

## **Certification Test Report**

**FCC ID: AZ492FT7089**

**IC: 109U-92FT7089**

**FCC Rule Part: 15.247**

**ISED Canada Radio Standards Specification: RSS-247**

**ACS Report Number: 16-2041.W06.3C**

Manufacturer: Motorola Solutions

Model(s): M37TSS9PW1AN

Test Begin Date: **August 11, 2016**

Test End Date: **September 2, 2016**

Report Issue Date: November 8, 2016



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

**Thierry Jean-Charles**  
EMC Engineer  
Advanced Compliance Solutions, Inc.

**Reviewed by:**

**Ryan McGann**  
Wireless Program Manager  
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 60 pages**

## **TABLE OF CONTENTS**

|       |                                                                                                                            |    |
|-------|----------------------------------------------------------------------------------------------------------------------------|----|
| 1     | GENERAL.....                                                                                                               | 3  |
| 1.1   | Purpose.....                                                                                                               | 3  |
| 1.2   | Product Description.....                                                                                                   | 3  |
| 1.3   | Manufacturer Information .....                                                                                             | 3  |
| 1.4   | Test Methodology and Considerations.....                                                                                   | 4  |
| 2     | TEST FACILITIES .....                                                                                                      | 5  |
| 2.1   | Location.....                                                                                                              | 5  |
| 2.2   | Laboratory Accreditations/Recognitions/Certifications .....                                                                | 5  |
| 2.3   | Radiated & Conducted Emissions Test Site Description .....                                                                 | 6  |
| 2.3.1 | Semi-Anechoic Chamber Test Site .....                                                                                      | 6  |
| 2.3.2 | Conducted Emissions Test Site Description.....                                                                             | 7  |
| 3     | APPLICABLE STANDARD REFERENCES .....                                                                                       | 8  |
| 4     | LIST OF TEST EQUIPMENT .....                                                                                               | 9  |
| 5     | SUPPORT EQUIPMENT .....                                                                                                    | 10 |
| 6     | EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM .....                                                                             | 11 |
| 7     | SUMMARY OF TESTS.....                                                                                                      | 12 |
| 7.1   | Antenna Requirement – FCC: Section 15.203 .....                                                                            | 12 |
| 7.2   | Peak Output Power - FCC Section 15.247(b)(1); ISED Canada RSS-247 5.4(2) .....                                             | 12 |
| 7.2.1 | Measurement Procedure (Conducted Method) .....                                                                             | 12 |
| 7.2.2 | Measurement Results .....                                                                                                  | 12 |
| 7.3   | Channel Usage Requirements .....                                                                                           | 19 |
| 7.3.1 | Carrier Frequency Separation – FCC Section 15.247(a)(1); ISED Canada: RSS-247 5.1(2).....                                  | 19 |
| 7.3.2 | Number of Hopping Channels – FCC Section 15.247(a)(1)(iii); ISED Canada: RSS-247 5.1(4).....                               | 20 |
| 7.3.3 | Channel Dwell Time – FCC Section 15.247(a)(1)(iii); ISED Canada RSS-247 5.1(4).....                                        | 22 |
| 7.3.4 | 20dB / 99% Bandwidth - FCC Section 15.247(a)(1); ISED Canada RSS-247 5.1(1) .....                                          | 24 |
| 7.4   | Band-Edge and Spurious Emissions.....                                                                                      | 36 |
| 7.4.1 | Band-Edge Compliance of RF Conducted Emissions - FCC Section 15.247(d); ISED Canada RSS-247 5.5.....                       | 36 |
| 7.4.2 | RF Conducted Spurious Emissions – FCC Section 15.247(d); ISED Canada RSS-247 5.5.....                                      | 43 |
| 7.4.3 | Radiated Spurious Emissions within the Restricted Bands - FCC Sections 15.205, 15.209; ISED Canada RSS-Gen 8.9, 8.10 ..... | 53 |
| 7.5   | Power Line Conducted Emissions – FCC Section 15.207; ISED Canada RSS-Gen 8.8.....                                          | 56 |
| 7.5.1 | Measurement Procedure.....                                                                                                 | 56 |
| 7.5.2 | Measurement Results .....                                                                                                  | 56 |
| 8     | CONCLUSION.....                                                                                                            | 59 |

## 1 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.

### 1.2 Product Description

The Motorola Solutions, Inc, APX8500 model M37TSS9PW1AN is a two-way mobile radio, which supports multiple land mobile radio bands such as VHF, UHF and 7/800 MHz. Additionally, the equipment provides 2.4 GHz 802.11b/g/n Wi-Fi as well as a Bluetooth Classic and Bluetooth Low Energy (BLE) capabilities. The test report documents the evaluation of the Bluetooth Classic transceiver.

#### Technical Details

|                     |                                                      |
|---------------------|------------------------------------------------------|
| Mode of Operation:  | Bluetooth 2.1 + Enhanced Data Rate (EDR)             |
| Frequency Range:    | 2402 MHz - 2480 MHz                                  |
| Number of Channels: | 79                                                   |
| Channel Separation: | 1 MHz                                                |
| Modulations:        | GFSK, $\pi/4$ -DQPSK, 8DPSK                          |
| TX Data Rates:      | GFSK: 1Mbps<br>$\pi/4$ -DQPSK: 2Mbps<br>8DPSK: 3Mbps |
| Antenna Type/Gain:  | Monopole, 5.15 dBi                                   |

### 1.3 Manufacturer Information

Motorola Solutions  
8000 West Sunrise Boulevard  
Sunrise, FL 33322

Model Number: M37TSS9PW1AN

Test Sample Serial Number(s): AM3C573

Test Sample Condition: The samples were in good conditions with no observable physical damages.

#### 1.4 Test Methodology and Considerations

The EUT was evaluated for radiated, power line and RF conducted measurements for all three modulations of the Bluetooth radio. The channels used for the evaluation are provided below. Where applicable, the worst case result is provided.

For the RF conducted measurements, the EUT was coupled to a spectrum analyzer to a QMA to SMA adapter and suitable attenuation.

The EUT was evaluated for radiated emissions up to the 10th harmonic of the fundamental frequency in the orientation of typical installation. A counterpoise of 1m diameter was provided for the evaluation.

The EUT was assessed for power line conducted emissions in the TX mode. The modulation leading to the worst case results is provided in this document.

The EUT was also investigated for unintentional emissions. The results are documented separately in a verification test report.

**Table 1.4-1: Bluetooth Radio Test configuration**

| Mode of Operations | Frequency (MHz) | Data Rate (kbps) |
|--------------------|-----------------|------------------|
| GFSK               | 2402            | 1000             |
|                    | 2441            | 1000             |
|                    | 2480            | 1000             |
| $\pi/4$ DQPSK      | 2402            | 2000             |
|                    | 2441            | 2000             |
|                    | 2480            | 2000             |
| 8 DPSK             | 2402            | 3000             |
|                    | 2441            | 3000             |
|                    | 2480            | 3000             |

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.  
3998 FAU Blvd, Suite 310  
Boca Raton, Florida 33431  
Phone: (561) 961-5585  
Fax: (561) 961-5587  
[www.acstestlab.com](http://www.acstestlab.com)

FCC Test Firm Registration #: 475089

Innovation, Science and Economic Development Canada Lab Code: 4175C

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

## 2.3 Radiated & Conducted Emissions Test Site Description

### 2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl flooring.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flush with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1060 Multi-device controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

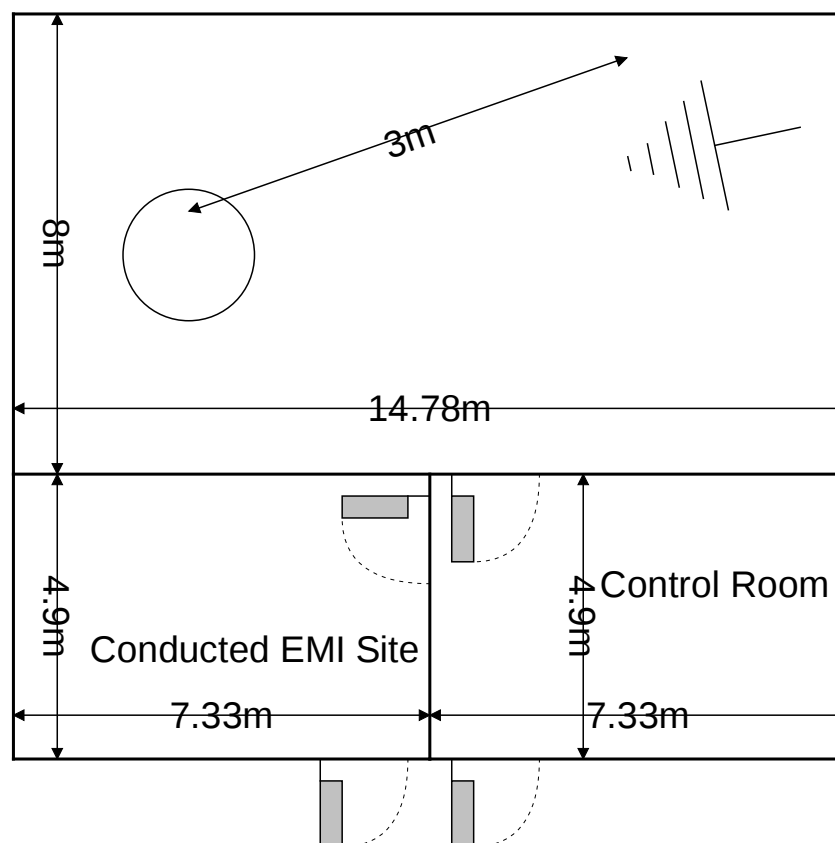


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

### 2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are  $7.3 \times 4.9 \times 3 \text{ m}^3$ . The power line conducted emission site includes two LISNs: a Solar Model 8028-50  $50 \Omega/50 \mu\text{H}$  and an EMCO Model 3825/2R, which are installed as shown in the figure below. For evaluations requiring 230 V, 50 Hz AC input, a Polarad LISN (S/N 879341/048) is used in conjunction with a California Instruments signal generator Model 2001RP-OP1.

A diagram of the room is shown below in figure 2.3.2-1:

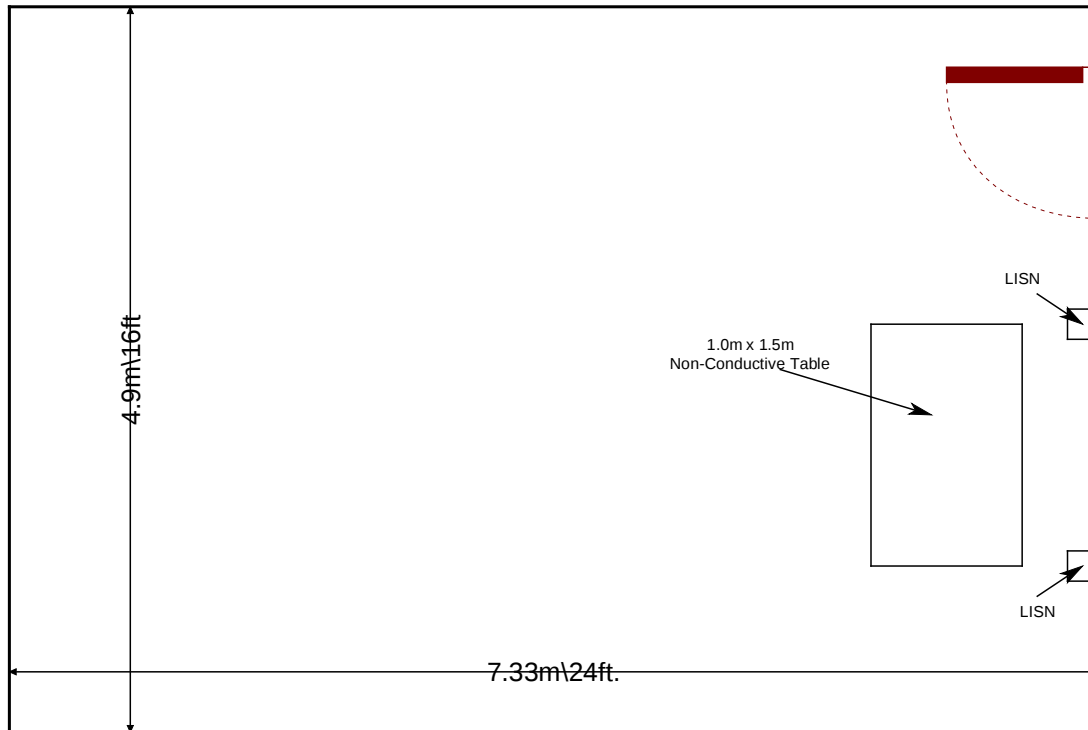


Figure 2.3.2-1: AC Mains Conducted EMI Site

### **3 APPLICABLE STANDARD REFERENCES**

The following standards were used:

- ❖ ANSI C63.4-2014: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9 kHz to 40 GHz.
- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016.
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2016
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-247 — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015.
- ❖ Innovation, Science and Economic Development Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, November 2014.

#### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment List**

| AssetID | Manufacturer               | Model #                | Equipment Type     | Serial #   | Last Calibration Date | Calibration Due Date |
|---------|----------------------------|------------------------|--------------------|------------|-----------------------|----------------------|
| 78      | EMCO                       | 6502                   | Antennas           | 9104-2608  | 5/11/2016             | 5/11/2018            |
| 283     | Rohde & Schwarz            | FSP40                  | Spectrum Analyzers | 1000033    | 7/21/2016             | 7/21/2018            |
| 523     | Agilent                    | E7405                  | Spectrum Analyzers | MY45103293 | 12/26/2014            | 12/26/2016           |
| 653     | Suhner                     | SF-102A                | Cables             | 0944/2A    | 9/15/2015             | 9/15/2016            |
| 2002    | EMCO                       | 3108                   | Antennas           | 2147       | 11/19/2015            | 11/19/2017           |
| 2004    | EMCO                       | 3146                   | Antennas           | 1385       | 11/19/2015            | 11/19/2017           |
| 2006    | EMCO                       | 3115                   | Antennas           | 2573       | 4/14/2015             | 4/14/2017            |
| 2008    | COM-Power                  | AH-826                 | Antennas           | 81009      | NCR                   | NCR                  |
| 2011    | Hewlett-Packard            | HP 8447D               | Amplifiers         | 2443A03952 | 11/18/2015            | 11/18/2016           |
| 2022    | EMCO                       | LISN3825/2R            | LISN               | 1095       | 9/14/2015             | 9/14/2017            |
| 2045    | ACS Boca                   | Conducted Cable Set    | Cable Set          | 2045       | 11/11/2015            | 11/11/2016           |
| 2070    | Mini Circuits              | VHF-8400+              | Filter             | 2070       | 11/17/2015            | 11/17/2016           |
| 2072    | Mini Circuits              | VHF-3100+              | Filter             | 30737      | 11/17/2015            | 11/17/2016           |
| 2082    | Teledyne Storm Products    | 90-010-048             | Cables             | 2082       | 4/21/2016             | 4/21/2017            |
| 2086    | Merrimac                   | FAN-6-10K              | Attenuators        | 23148-83-1 | 11/16/2015            | 11/16/2016           |
| 2089    | Agilent Technologies, Inc. | 83017A                 | Amplifiers         | 3123A00214 | 12/9/2015             | 12/9/2016            |
| 2095    | ETS Lindgren               | TILE4! - Version 4.2.A | Software           | 85242      | NCR                   | NCR                  |
| 2111    | Aeroflex Inmet             | 40AH2W-20              | Attenuator         | 2111       | 7/20/2016             | 7/20/2017            |
| 2112    | Teledyne Storm Products    | 921-0101-036           | Cables             | 12-06-698  | 11/13/2015            | 11/13/2016           |
| 2121    | ACS Boca                   | Radiated Cable Set     | Cable Set          | 2121       | 8/1/2016              | 8/1/2017             |
| 3004    | Teseq                      | CFL 9206A              | Attenuators        | 34720      | 10/7/2015             | 10/7/2016            |

**Note: NCR=No Calibration Required**

## 5 SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description


| Item # | Type Device         | Manufacturer | Model/Part #  | Serial #                      |
|--------|---------------------|--------------|---------------|-------------------------------|
| 1      | EUT                 | Motorola     | M37TSS9PW1AN  | AM3C573                       |
| 2      | Microphone          | Motorola     | HMN1090A      | N/A                           |
| 3      | Speaker             | Motorola     | HSN4038A      | N/A                           |
| 4      | LMR Antenna         | Motorola     | AN000131A01   | 562948                        |
| 5      | WiFi/BT/GPS Antenna | Motorola     | AN000163A01   | N/A                           |
| 6      | 15 VDC Power Supply | Motorola     | PS000280A01   | EB58704875                    |
| 7      | Laptop              | DELL         | Latitude D531 | CN-0XM006-48643-789-2125      |
| 8      | Laptop AC Adapter   | DELL         | LA65NS2-01    | CN-06TM1C-72438-358- 218F-A01 |
| 9      | Mouse               | DELL         | M-UARDEL7     | LZ9440C43W5                   |

Table 5-2: Cable Description

| Cable # | Cable Type           | Length | Shield | Termination                           |
|---------|----------------------|--------|--------|---------------------------------------|
| A       | USB                  | 1.39 m | No     | EUT to Laptop                         |
| B       | Coil Microphone      | 3.05 m | No     | EUT to Microphone                     |
| C       | Audio                | 2.82 m | No     | EUT to Speaker                        |
| D       | Coaxial              | 5.12 m | Yes    | LMR Antenna to EUT                    |
| E       | Coaxial              | 5.08 m | Yes    | Wi-Fi/BT Antenna to EUT               |
| F       | Coaxial              | 5.06 m | Yes    | GPS Antenna to EUT                    |
| G       | Power                | 1.17 m | No     | EUT to 15 VDC Power Supply            |
| H       | Power                | 2.28 m | No     | 15 VDC Power Supply to extension Cord |
| I       | Extension Power Cord | 2.7 m  | No     | Power Cord to AC Mains                |
| J       | Ignition Wire        | 3.09 m | No     | Not Terminated                        |
| K       | USB                  | 1.8 m  | No     | Laptop to Mouse                       |
| L       | Power                | 1.85 m | No     | Laptop to AC Adapter                  |
| M       | Power                | 0.90 m | No     | Laptop AC Adapter to AC Mains         |

Note: Item I was not used for the power line conducted emissions evaluation.

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

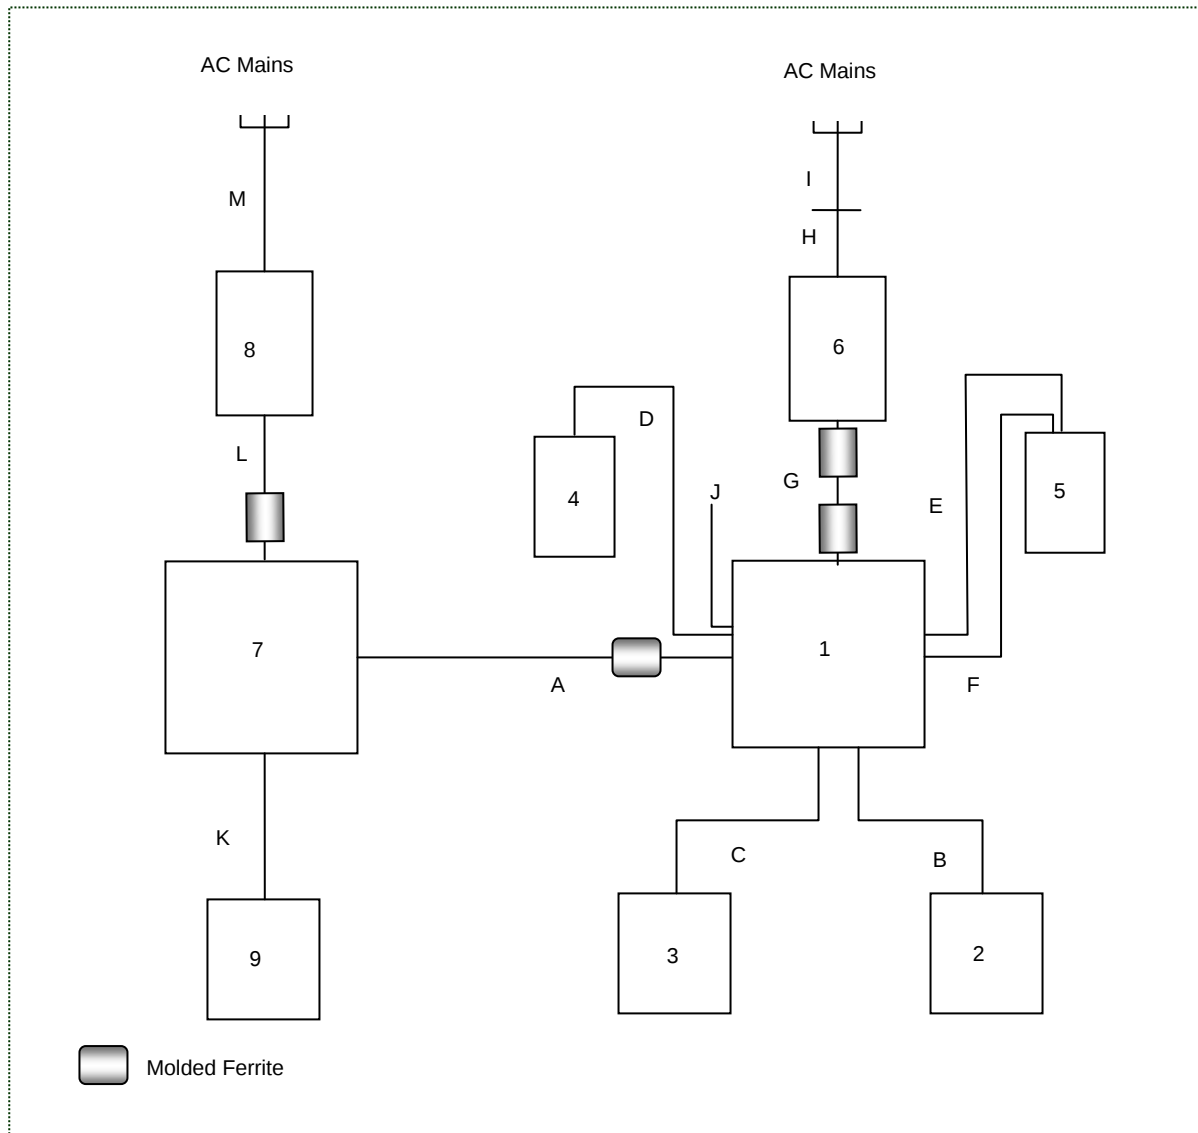

## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: Section 15.203

The EUT and the applicable 5.15 dBi monopole antenna use a QMA connector for the 2.4 GHz ISM radio. The antenna connector is unique thus meeting the requirements of FCC Section 15.203.

### 7.2 Peak Output Power - FCC Section 15.247(b)(1); ISED Canada RSS-247 5.4(2)

#### 7.2.1 Measurement Procedure (Conducted Method)


The RF output port of the EUT was directly connected to the input of the spectrum analyzer through suitable attenuation. The span was set to approximately five times the 20 dB bandwidth. The peak power was measured by using the marker-to-peak function which set the marker at the peak of the emission.

#### 7.2.2 Measurement Results

Results are shown below:


**Table 7.2.2-1 RF Output Power (GFSK)**

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 2402            | 7.85        |
| 2441            | 8.01        |
| 2480            | 8.13        |

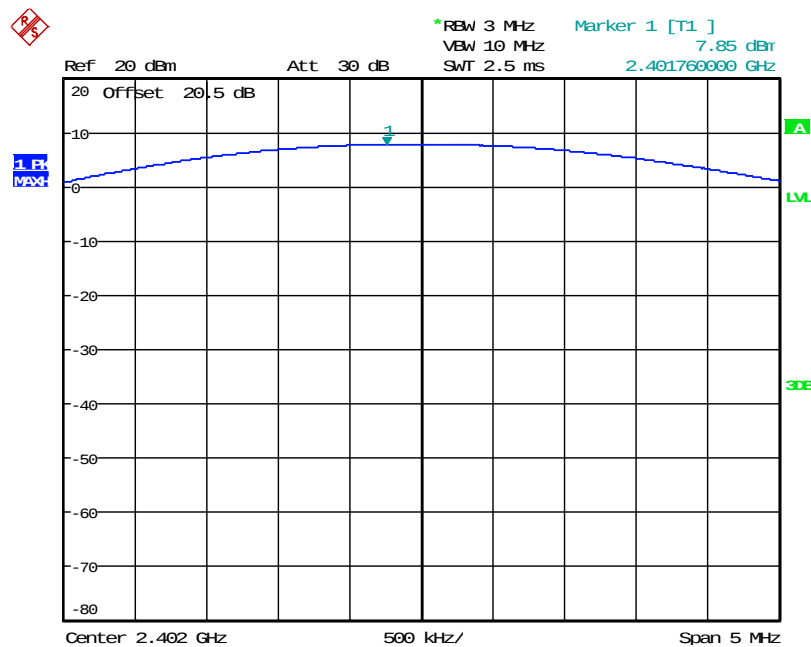


Date: 1.SEP.2016 20:23:22

Figure 7.2.2-1: RF Output Power (GFSK) - Low Channel

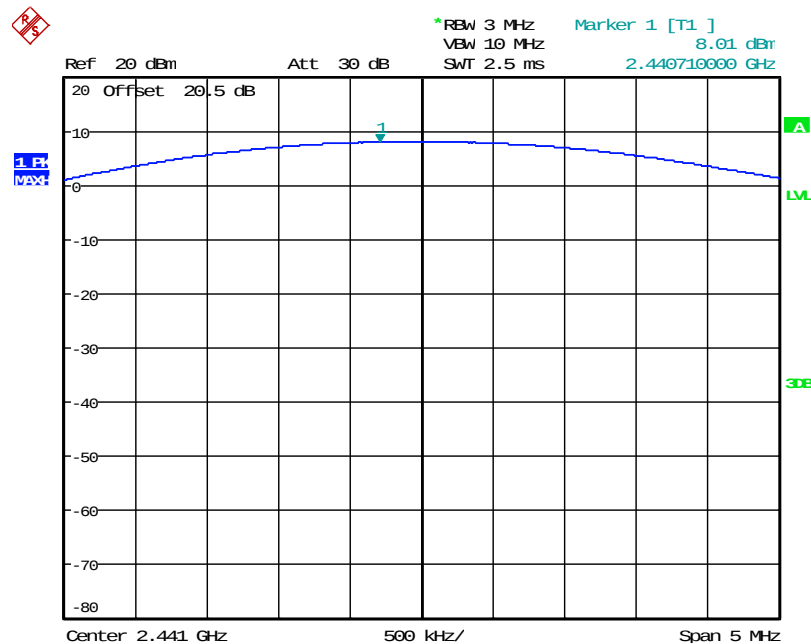

Date: 1.SEP.2016 20:25:15

Figure 7.2.2-2: RF Output Power (GFSK) - Middle Channel

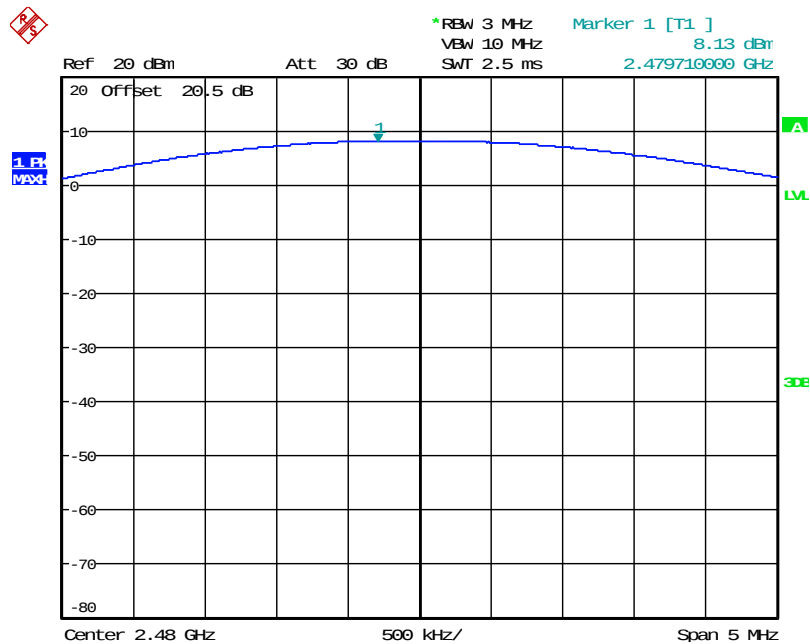


Date: 1.SEP.2016 20:26:46

Figure 7.2.2-3: RF Output Power (GFSK) - High Channel


Table 7.2.2-2: RF Output Power ( $\pi/4$  DQPSK)

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 2402            | 5.44        |
| 2441            | 5.66        |
| 2480            | 5.78        |

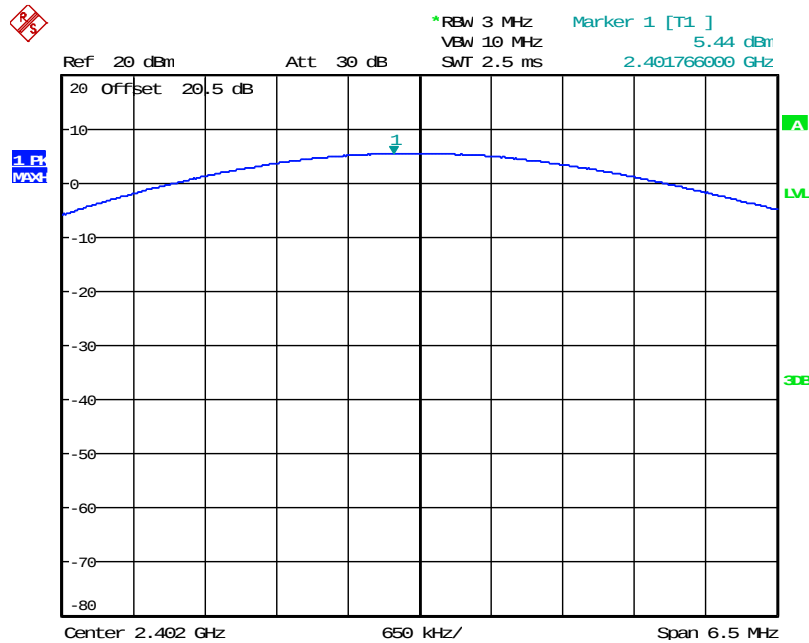


Date: 1.SEP.2016 20:20:02

Figure 7.2.2-4: RF Output Power ( $\pi/4$  DQPSK) - Low Channel

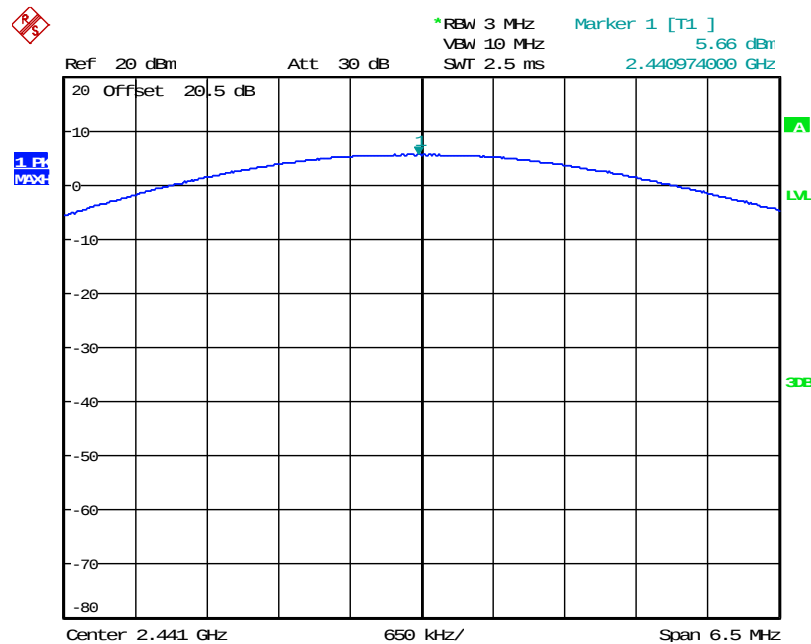

Date: 1.SEP.2016 20:13:35

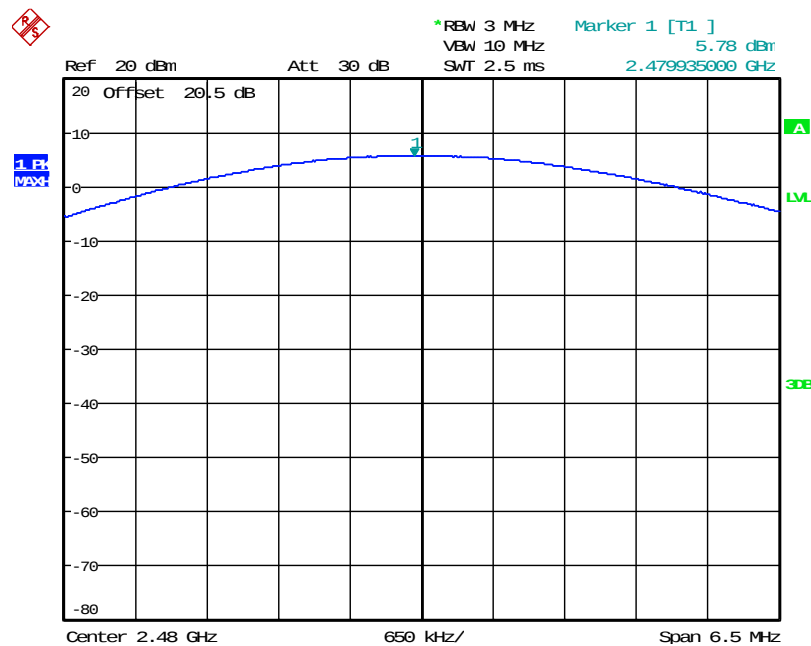
Figure 7.2.2-5: RF Output Power ( $\pi/4$  DQPSK) - Middle Channel

Date: 1.SEP.2016 20:12:26

Figure 7.2.2-6: RF Output Power ( $\pi/4$  DQPSK) - High Channel


Table 7.2.2-3: RF Output Power (8DPSK)

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 2402            | 6.02        |
| 2441            | 6.20        |
| 2480            | 6.27        |

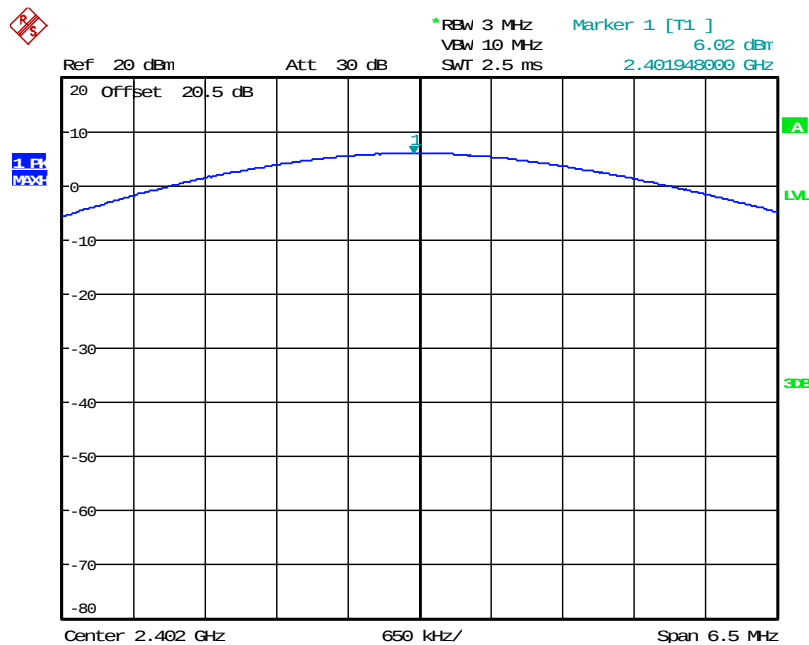


Date: 1.SEP.2016 20:17:27

Figure 7.2.2-7: RF Output Power (8DPSK) - Low Channel

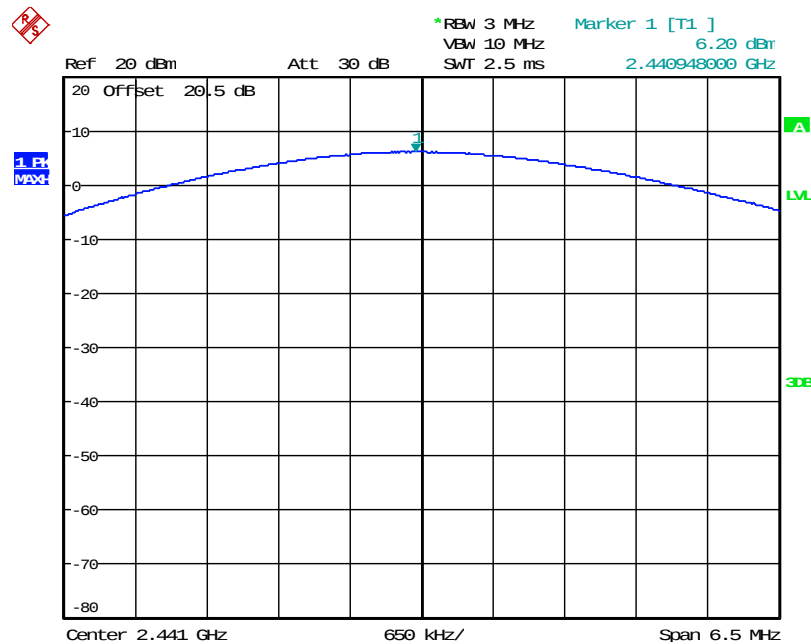

Date: 1.SEP.2016 20:14:59

Figure 7.2.2-8: RF Output Power (8DPSK) - Middle Channel

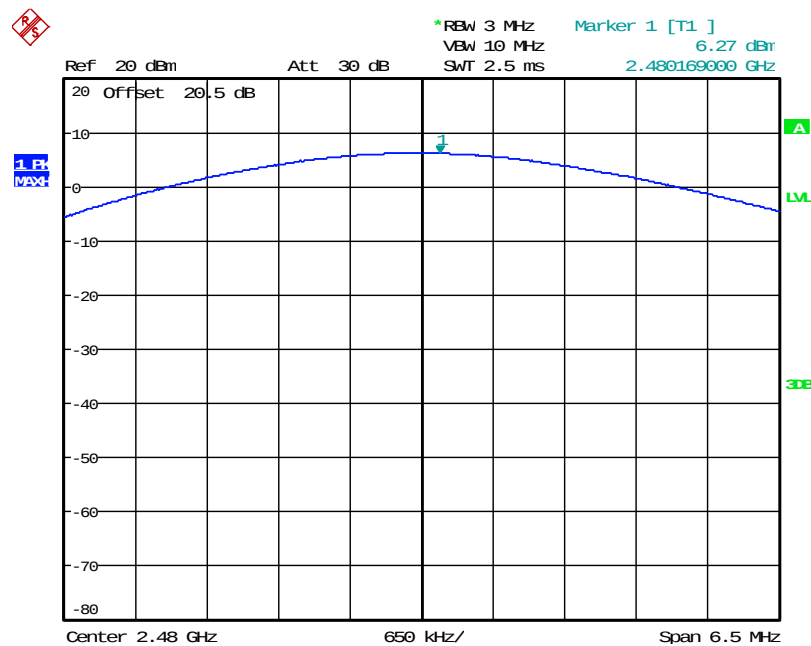

Date: 1.SEP.2016 20:11:24

Figure 7.2.2-9: RF Output Power (8DPSK) - High Channel

### 7.3 Channel Usage Requirements


#### 7.3.1 Carrier Frequency Separation – FCC Section 15.247(a)(1); ISED Canada: RSS-247 5.1(2)

##### 7.3.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to approximately 30% of the channel spacing. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

##### 7.3.1.2 Measurement Results

Results are shown below:

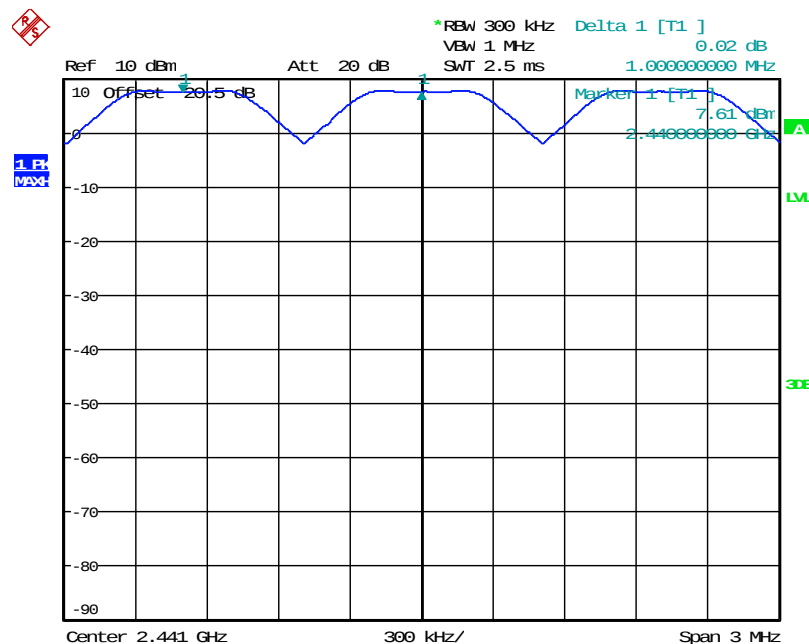

Date: 2.SEP.2016 14:07:08

Figure 7.3.1.2-1: Carrier Frequency Separation


## 7.3.2 Number of Hopping Channels – FCC Section 15.247(a)(1)(iii); ISED Canada: RSS-247 5.1(4)

### 7.3.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The resolution bandwidth was set to less than 30% of the channel spacing or the 20 dB bandwidth, whichever was smaller. The peak detector max hold function was enabled for the measurements.


### 7.3.2.2 Measurement Results

Results are shown below:

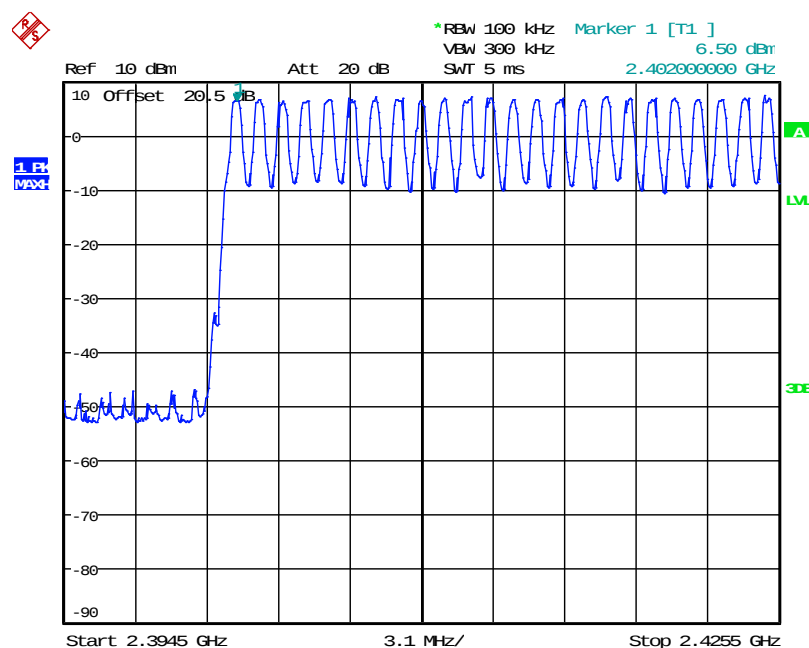


Date: 2.SEP.2016 14:13:40

Figure 7.3.2.2-1: Number of Hopping Channels (1 – 24)

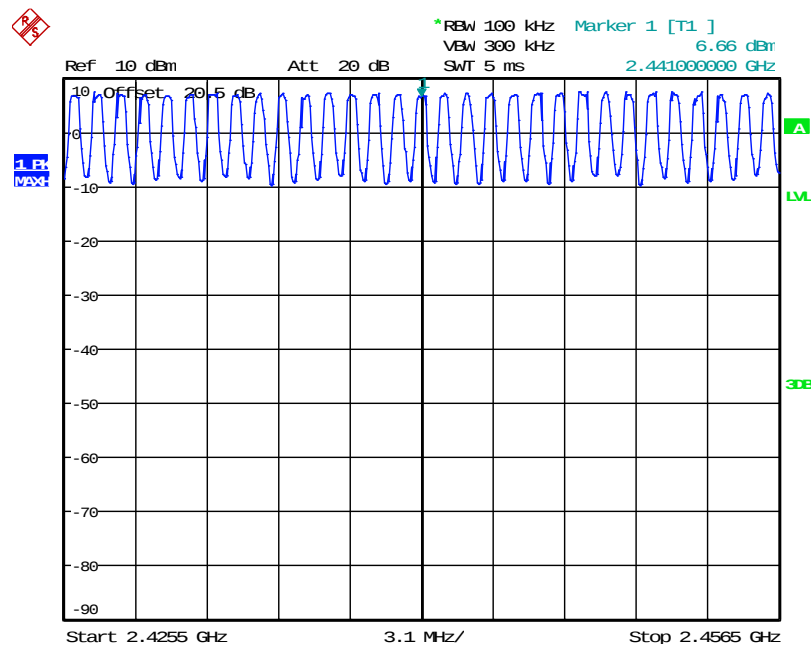

Date: 2.SEP.2016 14:11:23

Figure 7.3.2.2-2: Number of Hopping Channels (25 – 55)

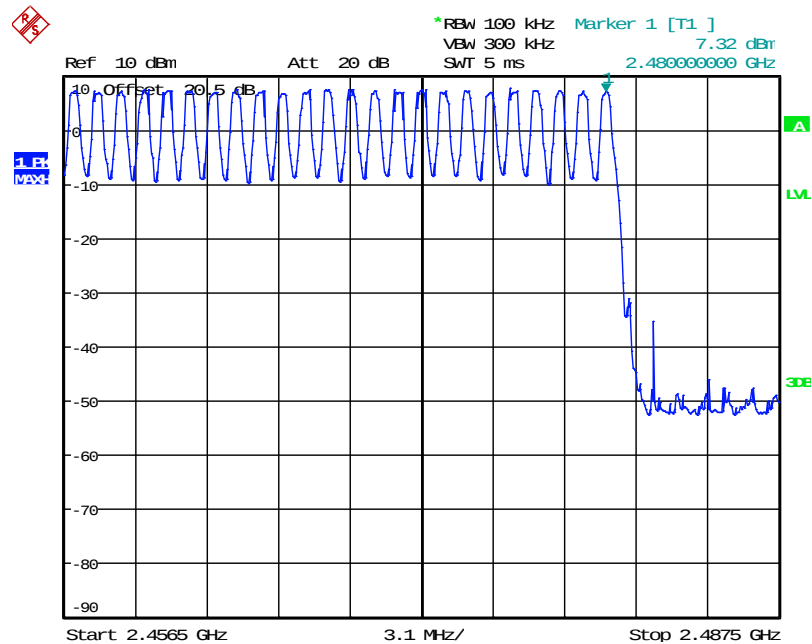

Date: 2.SEP.2016 14:16:51

Figure 7.3.2.2-3: Number of Hopping Channels (56 – 79)

### 7.3.3 Channel Dwell Time – FCC Section 15.247(a)(1)(iii); ISED Canada RSS-247 5.1(4)

#### 7.3.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to less than the channel spacing and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

#### 7.3.3.2 Measurement Results

Results are shown below:

**Table 7.3.3.2-1 Dwell Time on a 31.6s Second Cycle**

| Packet Format | Number of Hops Per Sec. (NHPS) | Number of Hops per Channel Per Sec. (NHPCPS) | Number of hops on a 31.6 s Cycle (NHPC) | Measured Dwell Times (ms) | Dwell Times on a 31.6 s Cycle | Limit (ms) | Status |
|---------------|--------------------------------|----------------------------------------------|-----------------------------------------|---------------------------|-------------------------------|------------|--------|
| DH1           | 800                            | 10.13                                        | 320                                     | 0.396                     | 126.72                        | 400        | PASS   |
| DH3           | 400                            | 5.06                                         | 160                                     | 1.664                     | 266.24                        | 400        | PASS   |
| DH5           | 266.67                         | 3.38                                         | 106.67                                  | 2.920                     | 311.48                        | 400        | PASS   |


\*Notes:

NHPS = (1600 /sec)/ (NT+NR) (where NT and NR are the number of transmit and receive packets, respectively)

NHPCPS = NHPS/79


NHPC = NHPCPS \* 31.6s

Dwell Time per Cycle = NHPC\* Measured Dwell Time

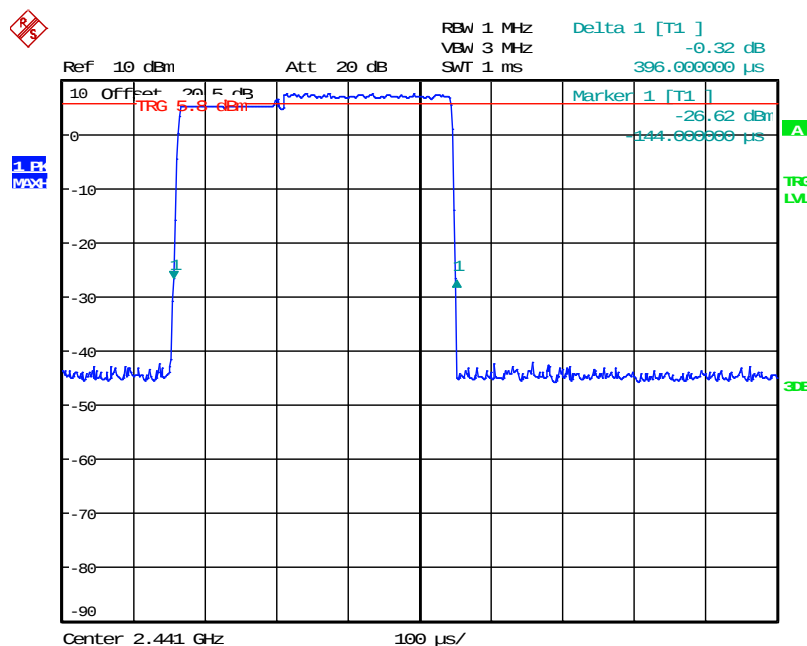


Date: 2.SEP.2016 14:55:39

**Figure 7.3.3.2-1: Channel Dwell Time – DH1**

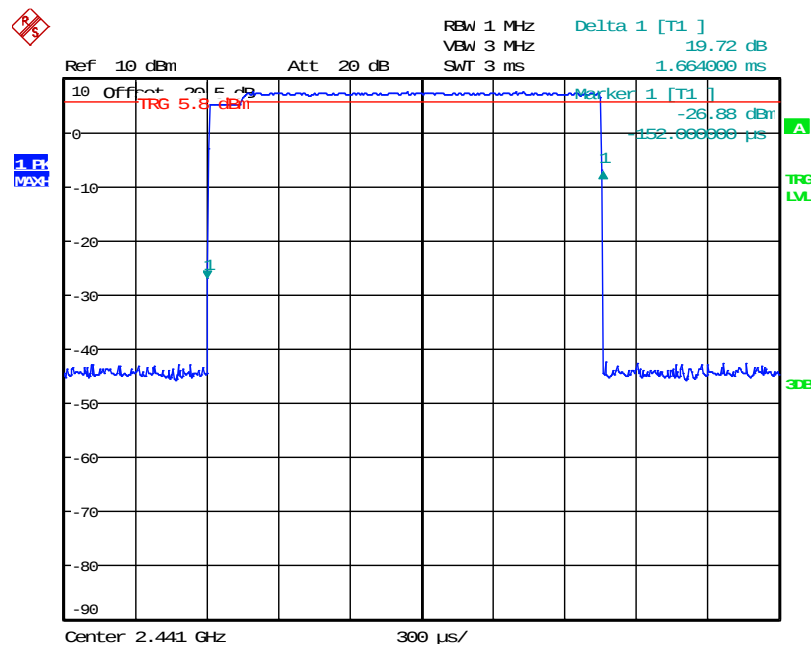

Date: 2.SEP.2016 14:50:50

Figure 7.3.3.2-2: Channel Dwell Time - DH3

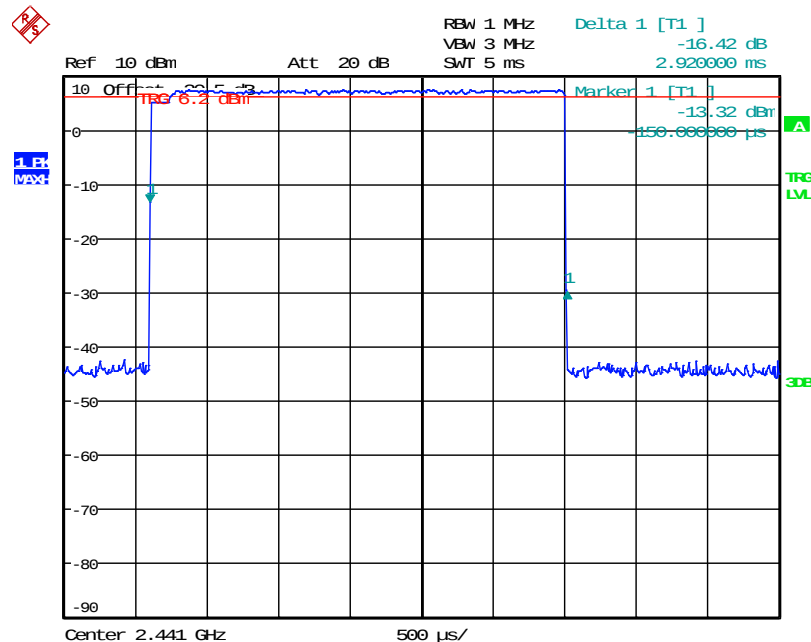

Date: 2.SEP.2016 14:41:54

Figure 7.3.3.2-3: Channel Dwell Time - DH5

### 7.3.4 20dB / 99% Bandwidth - FCC Section 15.247(a)(1); ISED Canada RSS-247 5.1(1)

#### 7.3.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 5 times the estimated bandwidth of the emission. The RBW was set to 1% to 5% of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emissions.


The 99% occupied bandwidth was measured in accordance to RSS-Gen Section 6.6. The spectrum analyzer span set to fully display the emission. The RBW was set to 1% to 5% of the approximated bandwidth. The occupied 99% bandwidth was measured by using the 99% bandwidth equipment function of the spectrum analyzer.

#### 7.3.4.2 Measurement Results

Results are shown below:


Table 7.3.4.2-1: 20dB / 99% Bandwidth

| Frequency [MHz] | 20dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|-----------------|----------------------|---------------------|
| 2402            | 912.00               | 846.0               |
| 2441            | 912.00               | 852.0               |
| 2480            | 924.00               | 852.0               |

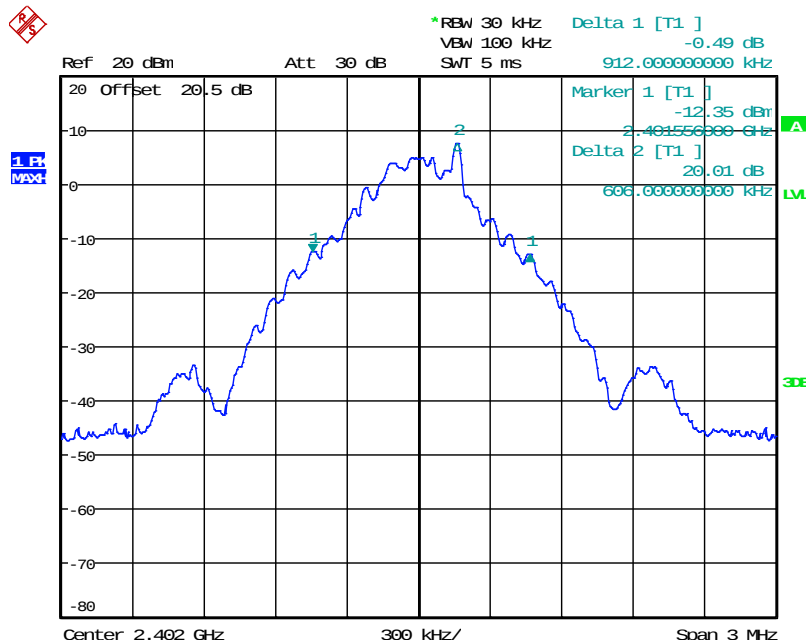


Date: 30.AUG.2016 15:52:28

Figure 7.3.4.2-1: 20dB BW Low Channel (GFSK)

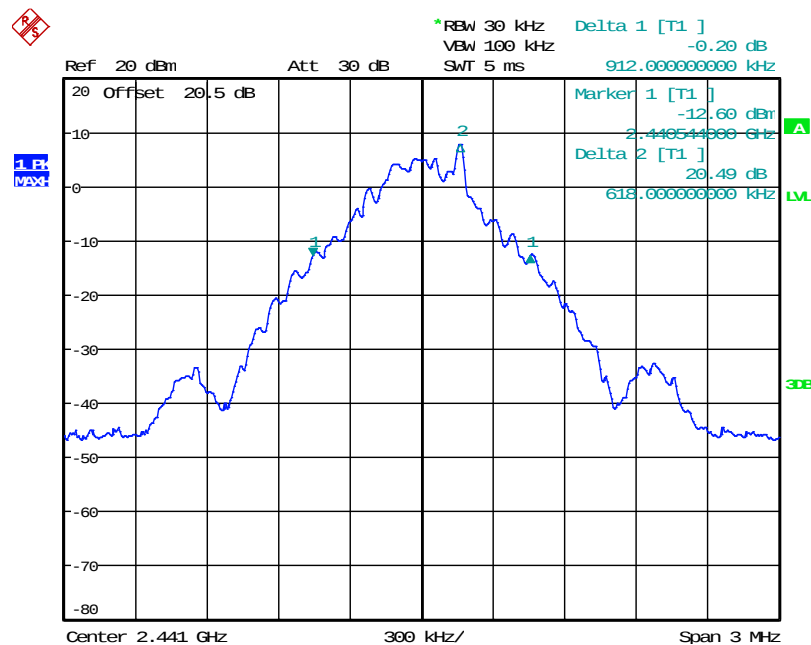


Date: 30.AUG.2016 16:00:56

Figure 7.3.4.2-2: 20dB BW Middle Channel (GFSK)

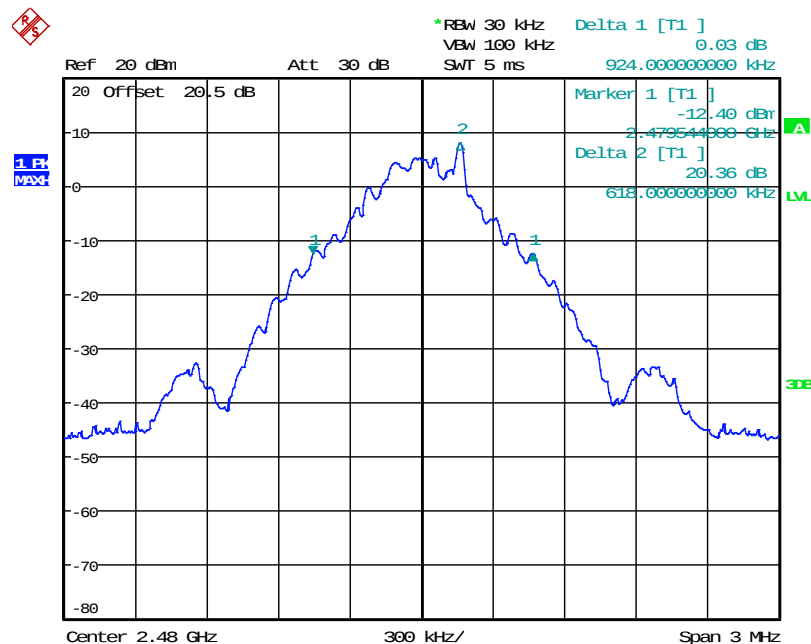


Date: 30.AUG.2016 16:12:00

Figure 7.3.4.2-3: 20dB BW High Channel (GFSK)

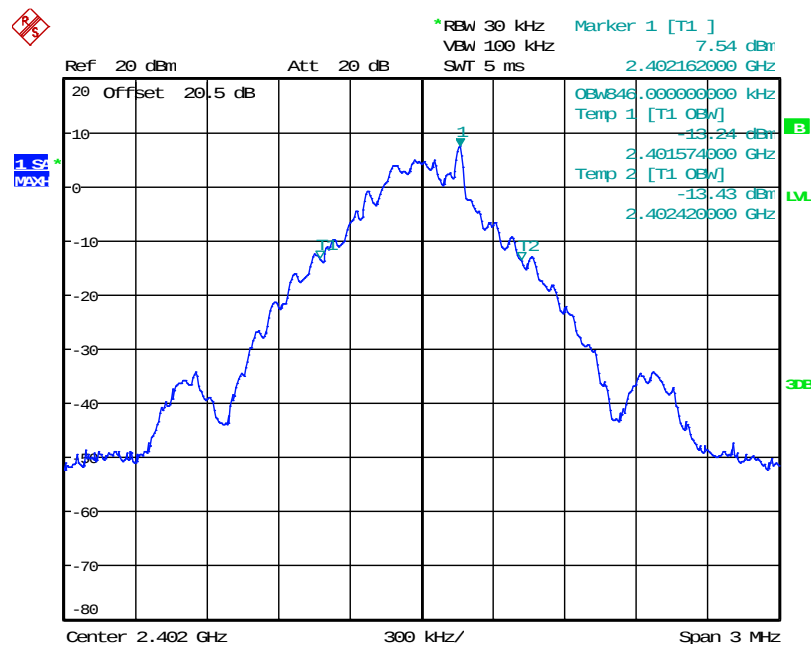


Date: 30.AUG.2016 15:47:53

Figure 7.3.4.2-4: 99% OBW Low Channel (GFSK)

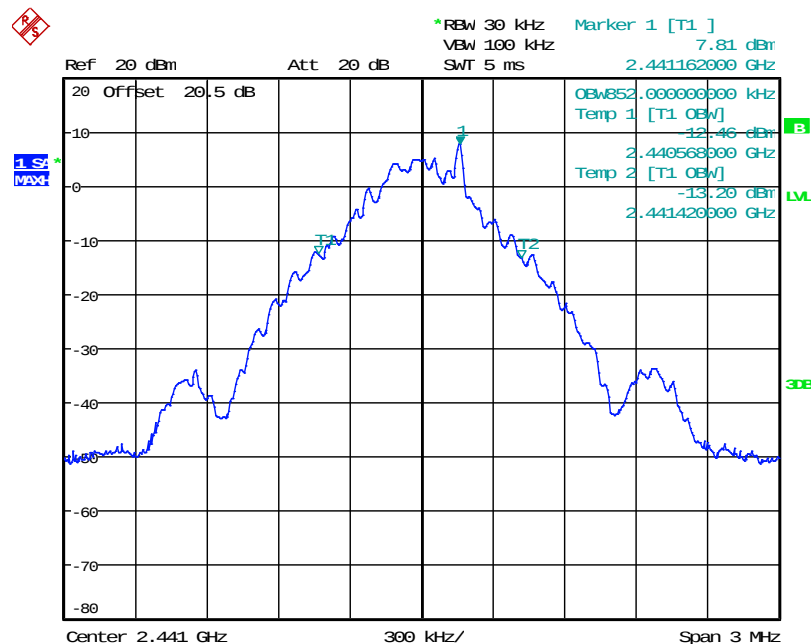

Date: 30.AUG.2016 16:05:26

Figure 7.3.4.2-5: 99% OBW Middle Channel (GFSK)

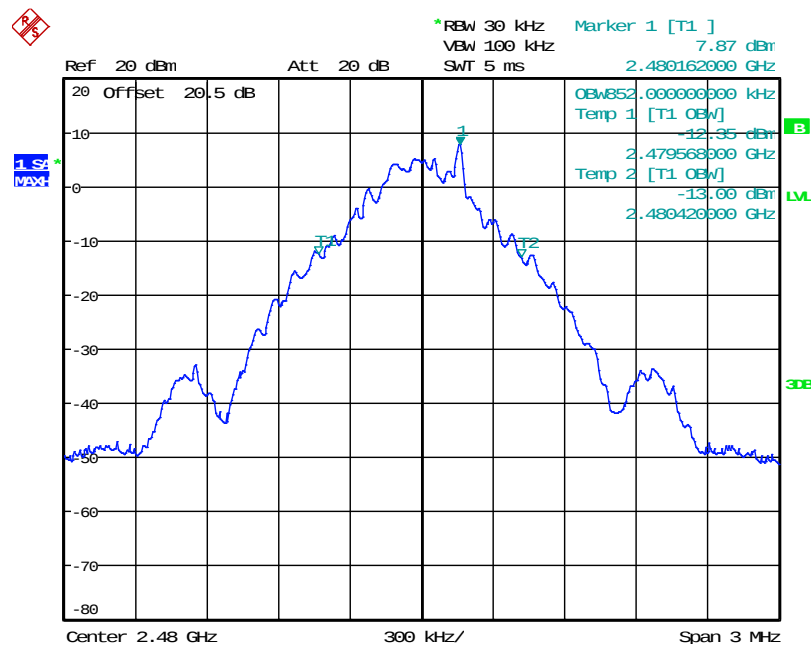


Date: 30.AUG.2016 16:07:44

Figure 7.3.4.2-6: 99% OBW High Channel (GFSK)


Table 7.3.4.2-2: 20dB / 99% Bandwidth ( $\pi/4$  DQPSK)

| Frequency [MHz] | 20dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|-----------------|----------------------|---------------------|
| 2402            | 1266.0               | 1170.0              |
| 2441            | 1266.0               | 1170.0              |
| 2480            | 1266.0               | 1170.0              |

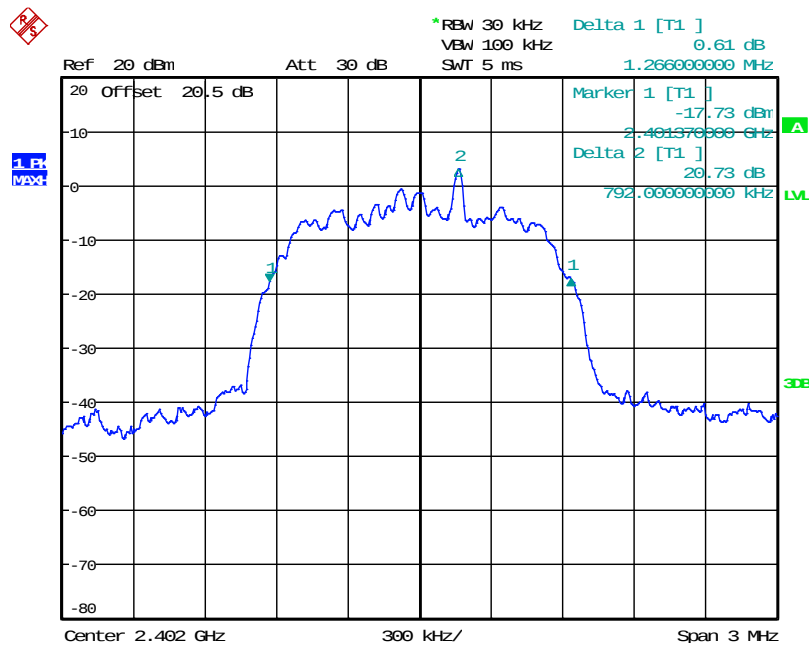


Date: 1.SEP.2016 19:53:13

Figure 7.3.4.2-7: 20dB BW Low Channel ( $\pi/4$  DQPSK)

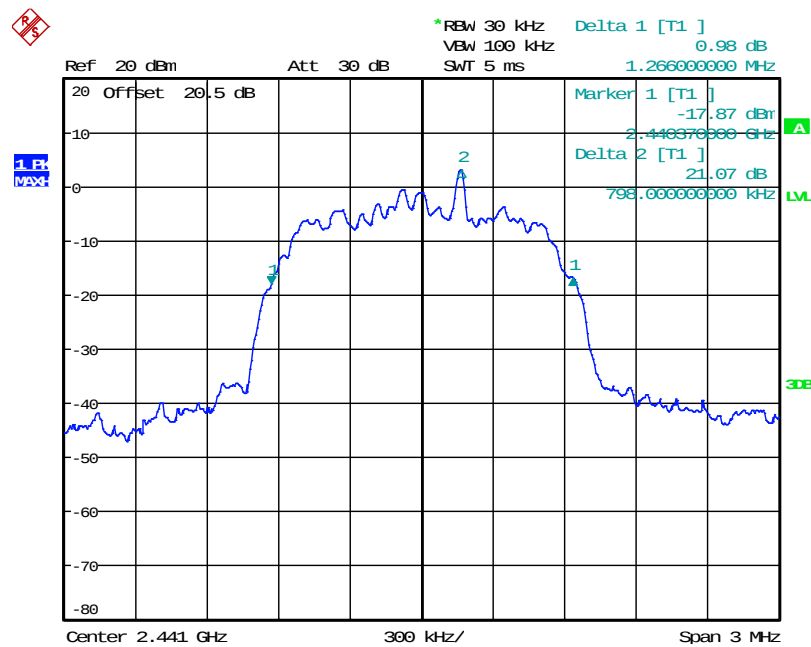


Date: 1.SEP.2016 19:40:06

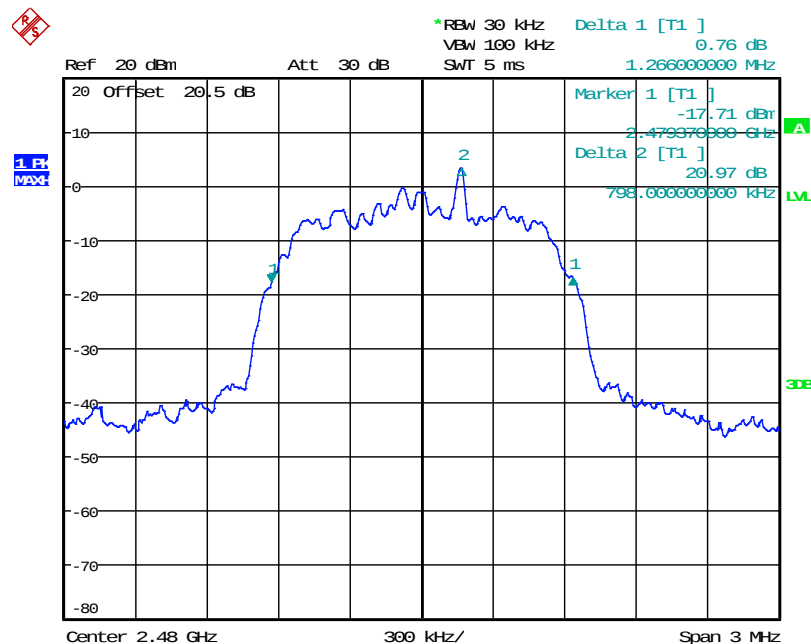
Figure 7.3.4.2-8: 20dB BW Middle Channel ( $\pi/4$  DQPSK)

Date: 1.SEP.2016 19:38:01

Figure 7.3.4.2-9: 20dB BW High Channel ( $\pi/4$  DQPSK)

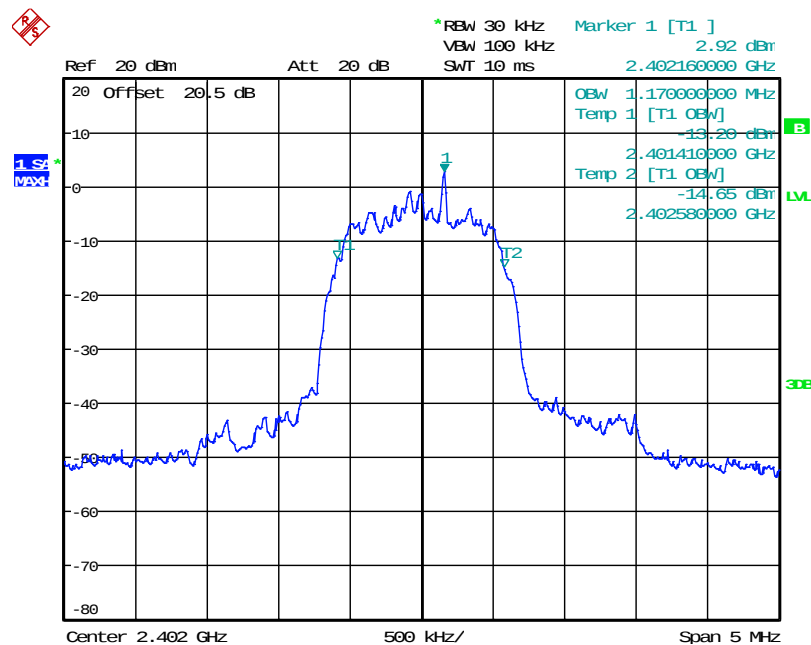


Date: 1.SEP.2016 19:51:13

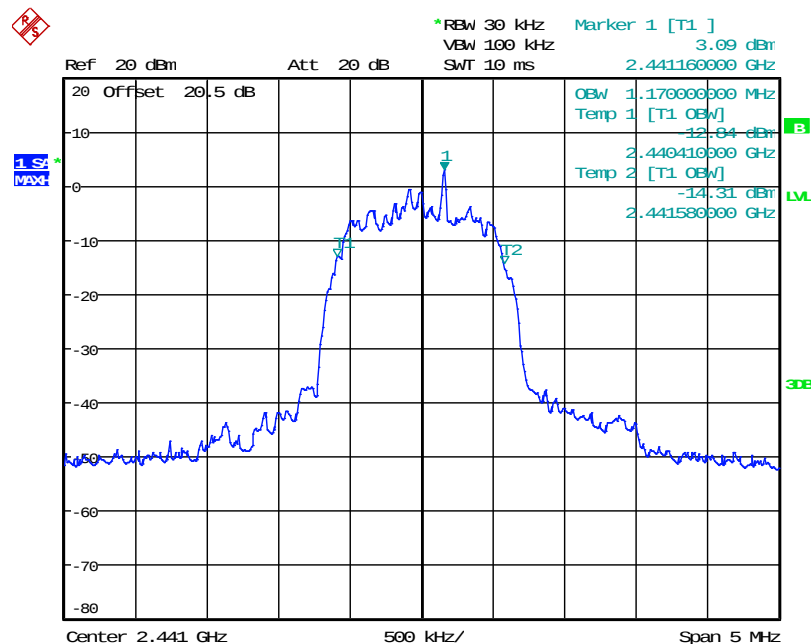Figure 7.3.4.2-10: 99% OBW Low Channel ( $\pi/4$  DQPSK)

Date: 1.SEP.2016 19:46:14

Figure 7.3.4.2-11: 99% OBW Middle Channel ( $\pi/4$  DQPSK)

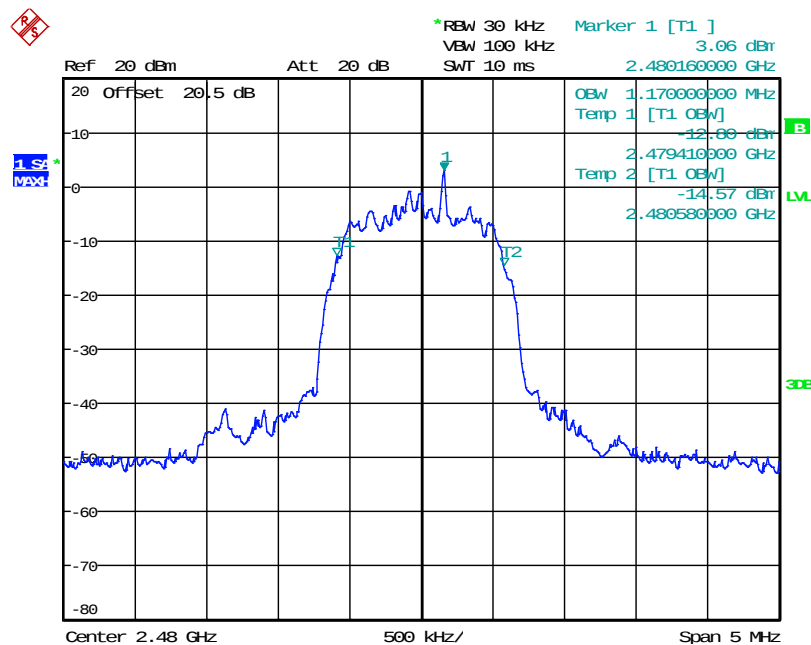


Date: 30.AUG.2016 16:17:14

Figure 7.3.4.2-12: 99% OBW High Channel ( $\pi/4$  DQPSK)


Table 7.3.4.2-3: 20dB / 99% Bandwidth (8DPSK)

| Frequency [MHz] | 20dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|-----------------|----------------------|---------------------|
| 2402            | 1272.0               | 1180.0              |
| 2441            | 1272.0               | 1180.0              |
| 2480            | 1272.0               | 1180.0              |

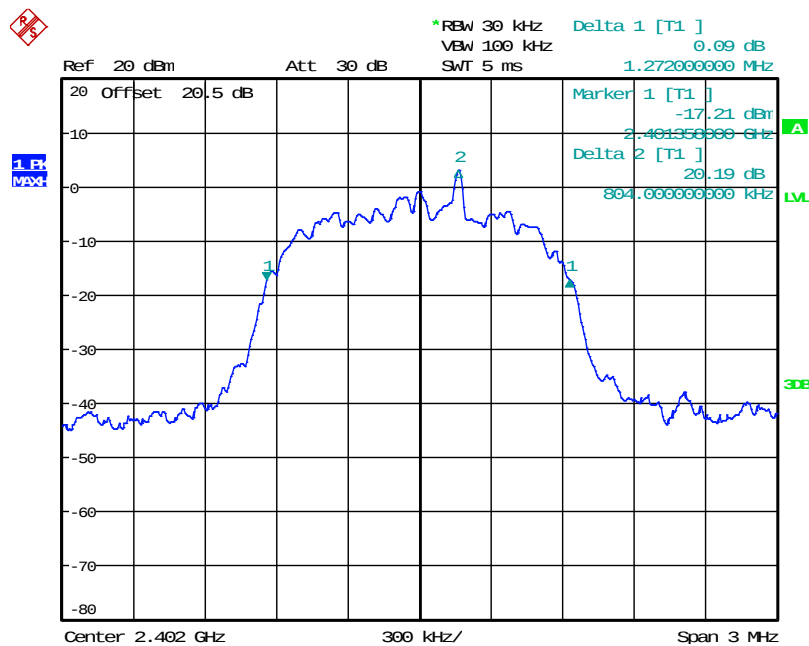


Date: 1.SEP.2016 19:56:47

Figure 7.3.4.2-13: 20dB BW Low Channel (8DPSK)

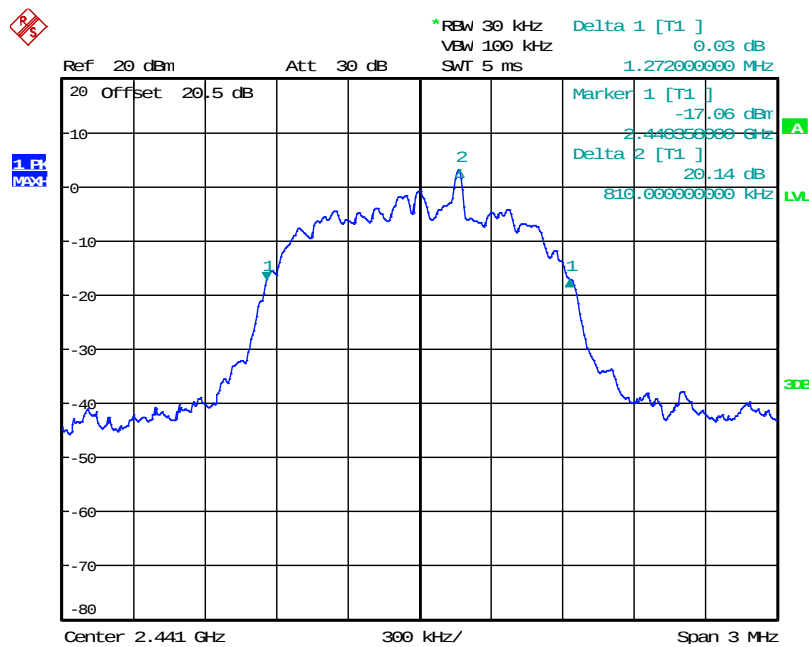


Date: 1.SEP.2016 20:05:42

Figure 7.3.4.2-14: 20dB BW Middle Channel (8DPSK)

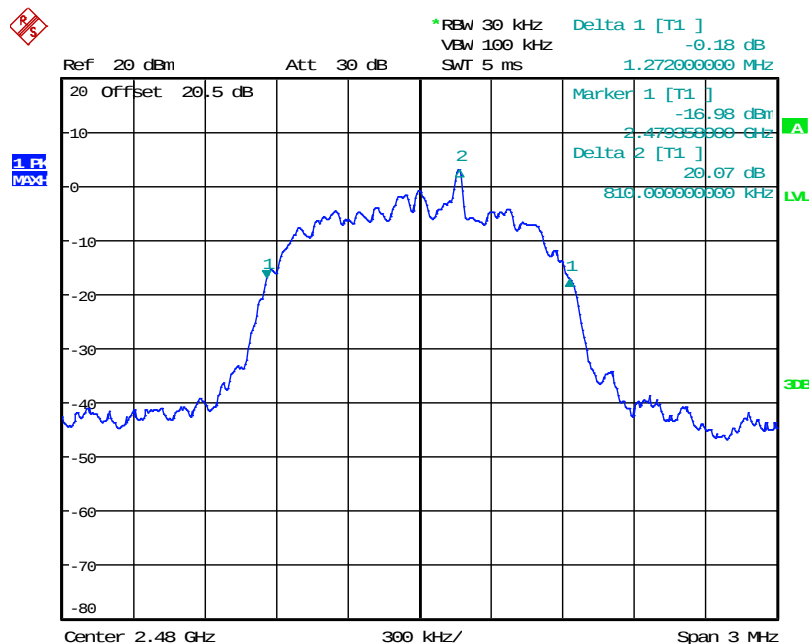


Date: 1.SEP.2016 20:07:19

Figure 7.3.4.2-15: 20dB BW High Channel (8DPSK)

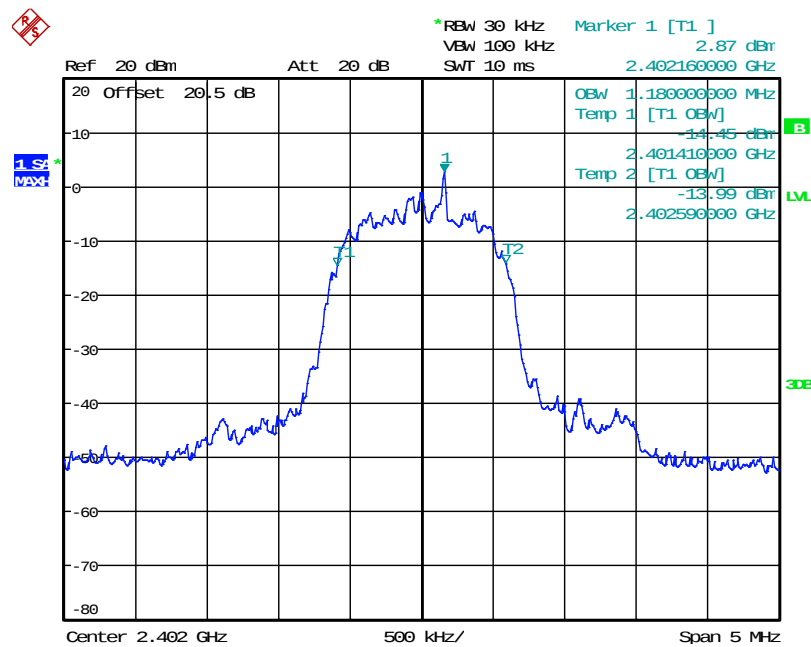


Date: 1.SEP.2016 20:00:11

Figure 7.3.4.2-16: 99% OBW Low Channel (8DPSK)

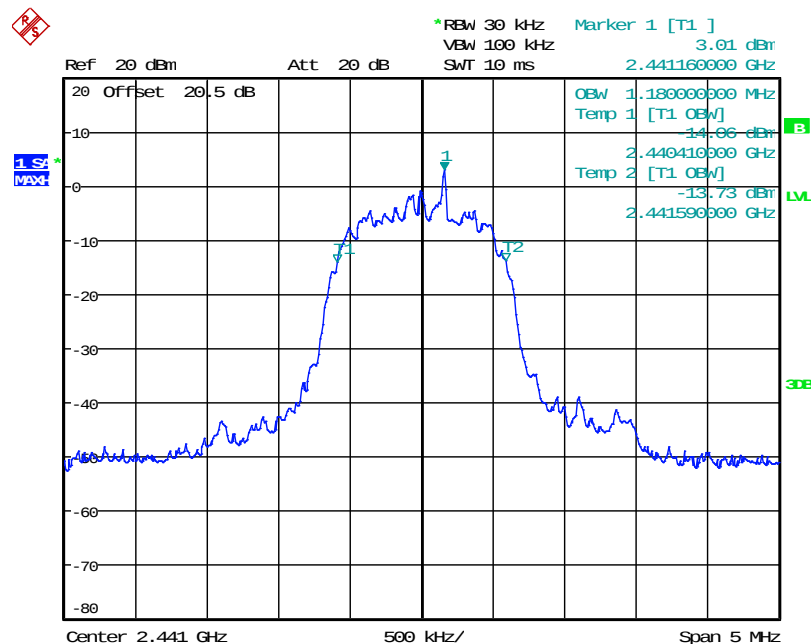

Date: 1.SEP.2016 20:02:55

Figure 7.3.4.2-17: 99% OBW Middle Channel (8DPSK)

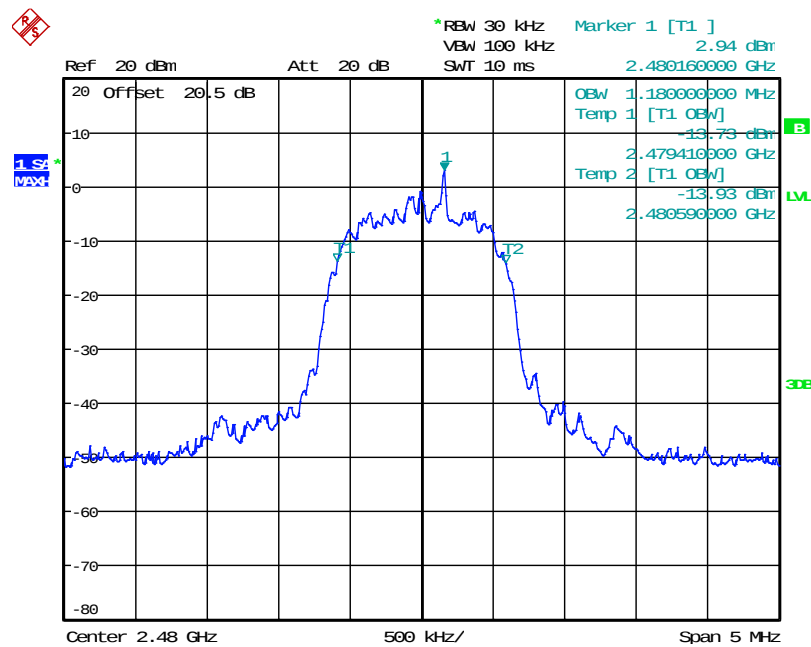

Date: 1.SEP.2016 20:09:44

Figure 7.3.4.2-18: 99% OBW High Channel (8DPSK)


## 7.4 Band-Edge and Spurious Emissions

### 7.4.1 Band-Edge Compliance of RF Conducted Emissions - FCC Section 15.247(d); ISED Canada RSS-247 5.5

#### 7.4.1.1 Measurement Procedure


The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to  $\geq 300$  kHz.

#### 7.4.1.2 Measurement Results

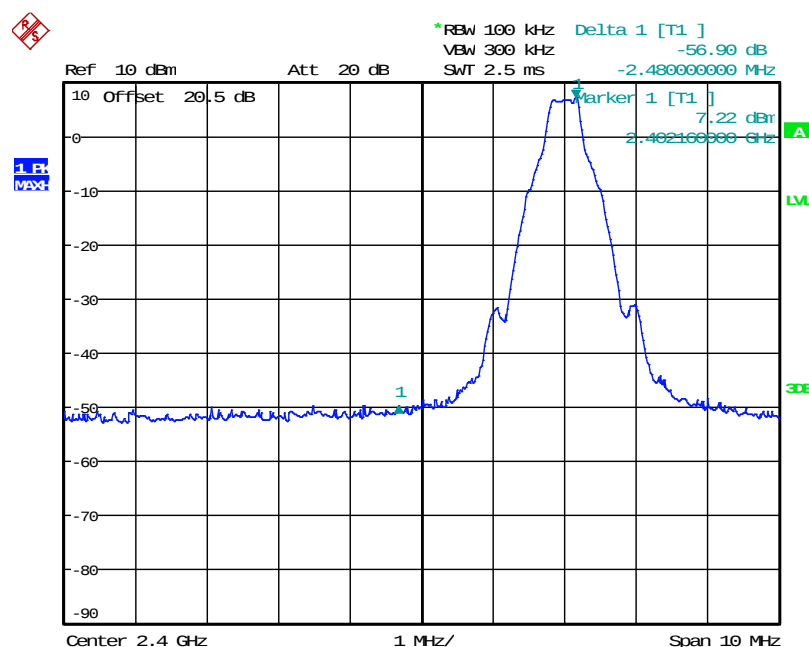


Date: 29.AUG.2016 19:26:12

Figure 7.4.1.2-1: Lower Band-edge (GFSK)

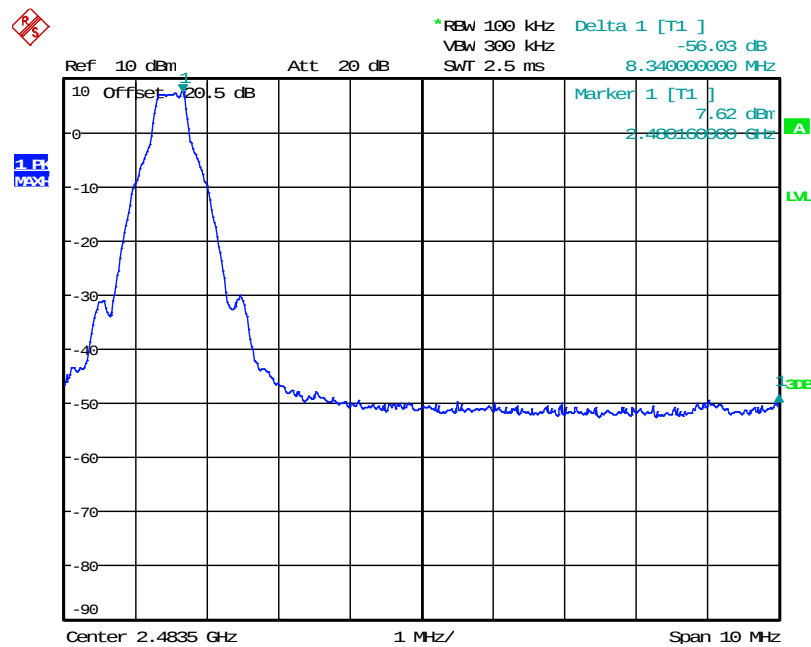


Date: 29.AUG.2016 20:26:19

Figure 7.4.1.2-2: Upper Band-edge (GFSK)

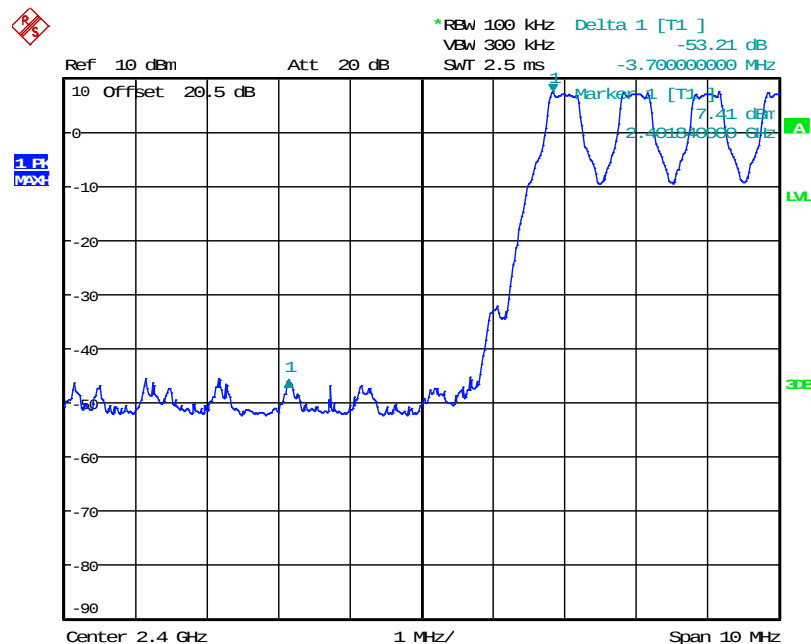


Date: 2.SEP.2016 13:06:13

Figure 7.4.1.2-3: Lower Band-edge – Hopping Mode (GFSK)

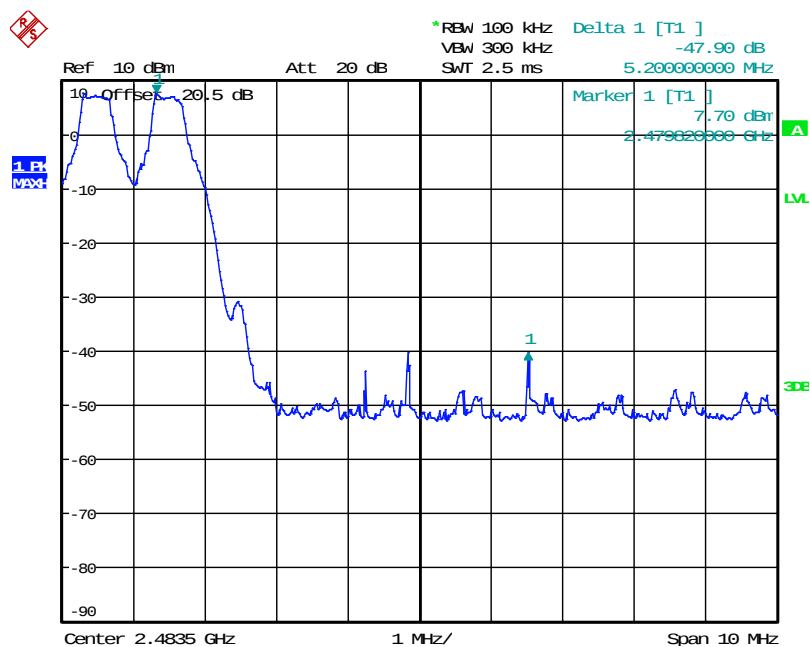


Date: 2.SEP.2016 13:11:40

Figure 7.4.1.2-4: Upper Band-edge – Hopping Mode (GFSK)

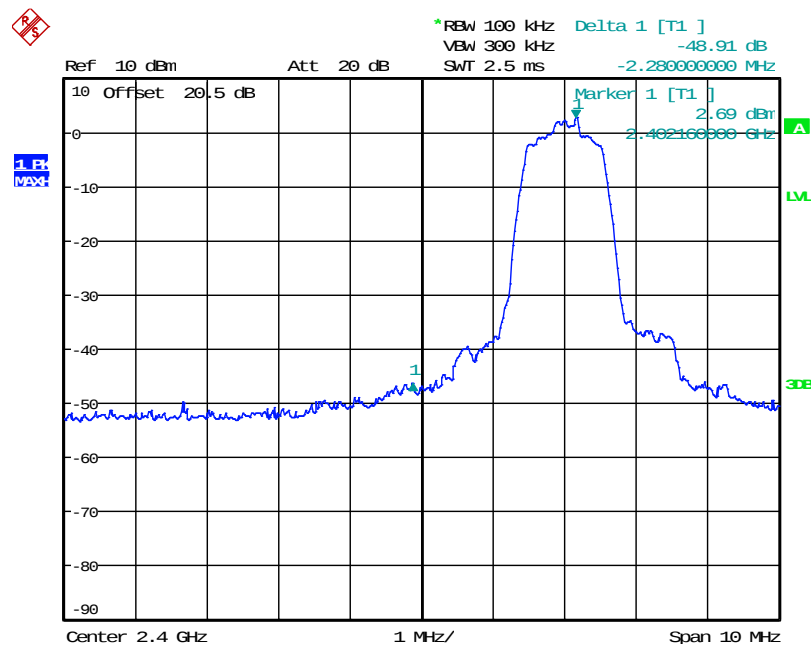


Date: 29.AUG.2016 19:59:44

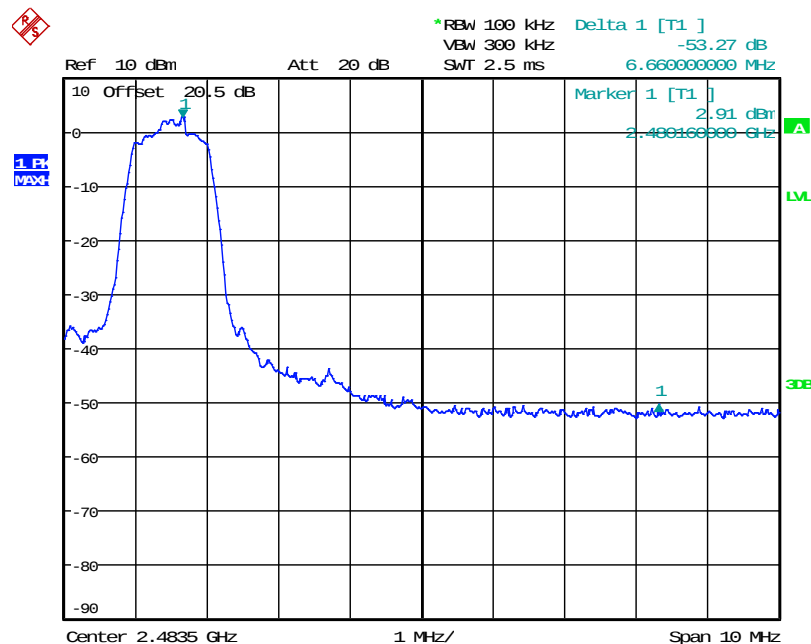
Figure 7.4.1.2-5: Lower Band-edge ( $\pi/4$  DQPSK)

Date: 29.AUG.2016 20:18:55

Figure 7.4.1.2-6: Upper Band-edge ( $\pi/4$  DQPSK)

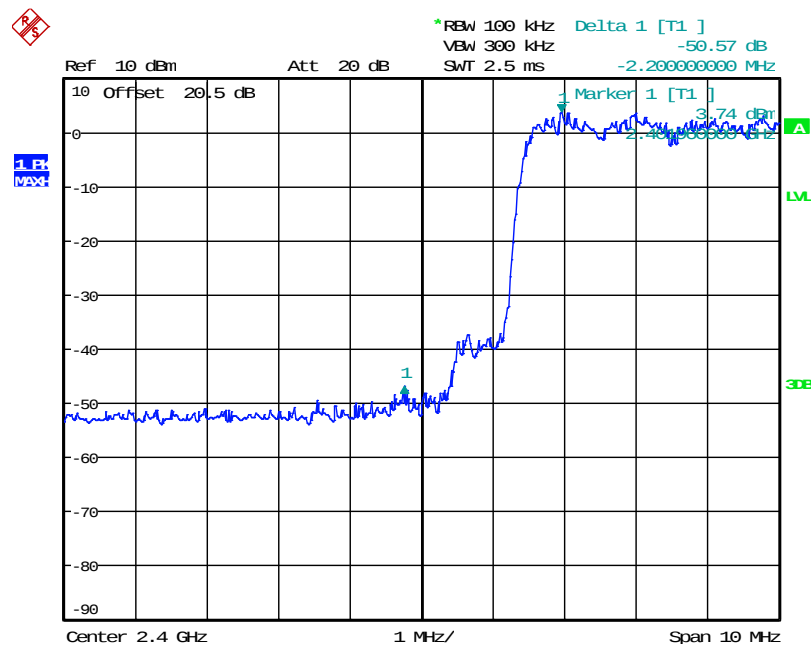


Date: 2.SEP.2016 13:20:55

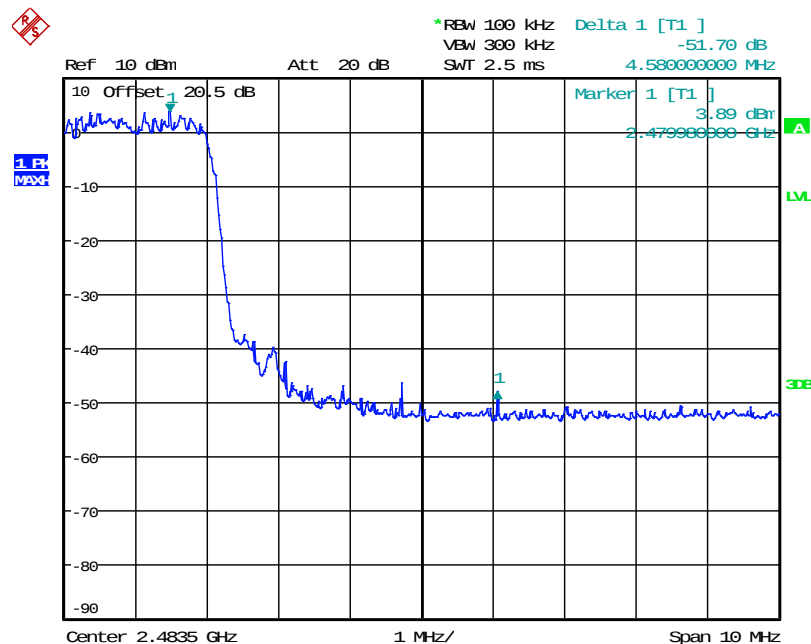Figure 7.4.1.2-7: Lower Band-edge – Hopping Mode ( $\pi/4$  DQPSK)


Date: 2.SEP.2016 13:17:14

Figure 7.4.1.2-8: Upper Band-edge – Hopping Mode ( $\pi/4$  DQPSK)

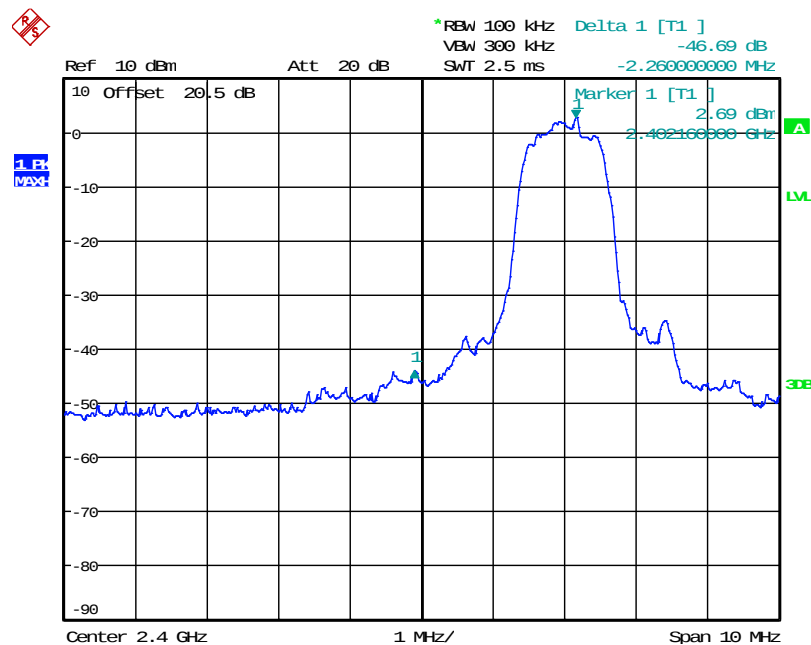


Date: 29.AUG.2016 20:08:48

Figure 7.4.1.2-9: Lower Band-edge (8DPSK)

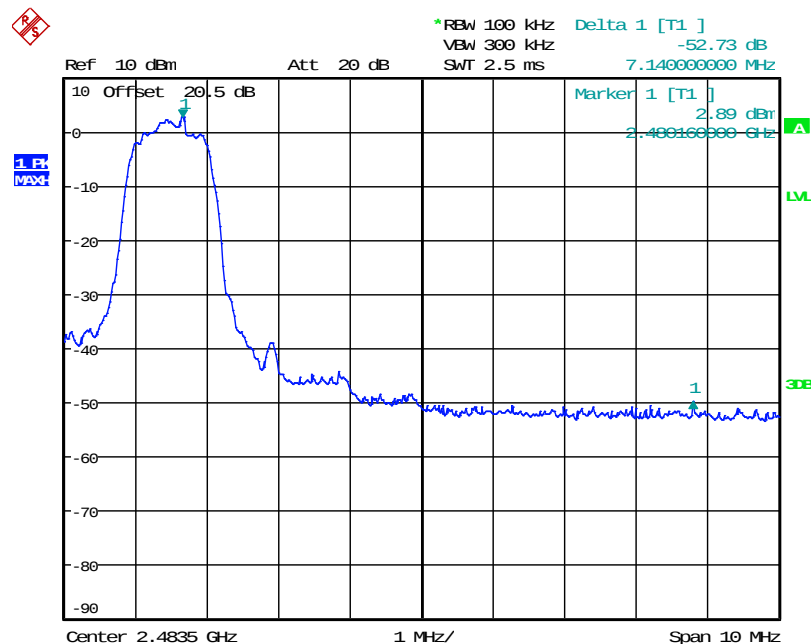


Date: 29.AUG.2016 20:10:57

Figure 7.4.1.2-10: Upper Band-edge (8DPSK)

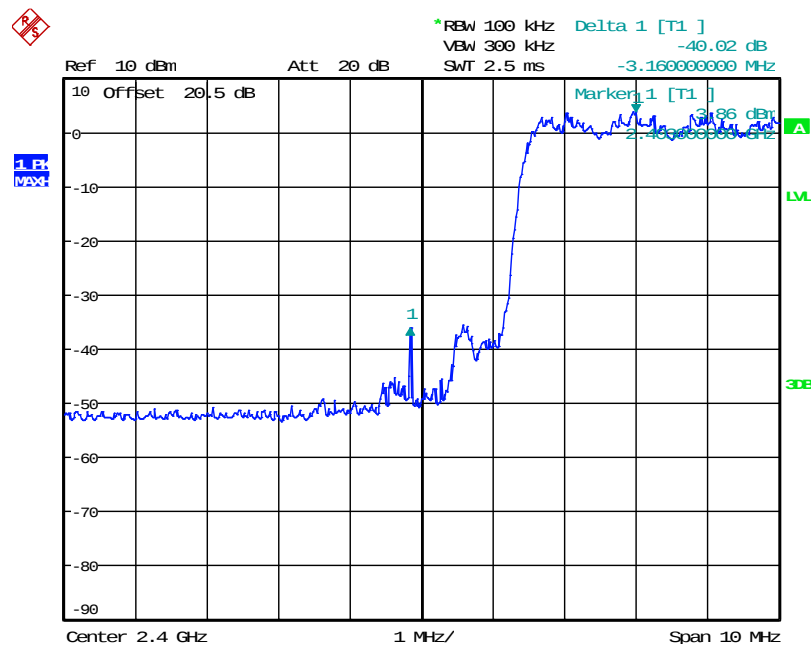

Date: 2.SEP.2016 13:26:14

Figure 7.4.1.2-11: Lower Band-edge – Hopping Mode (8DPSK)

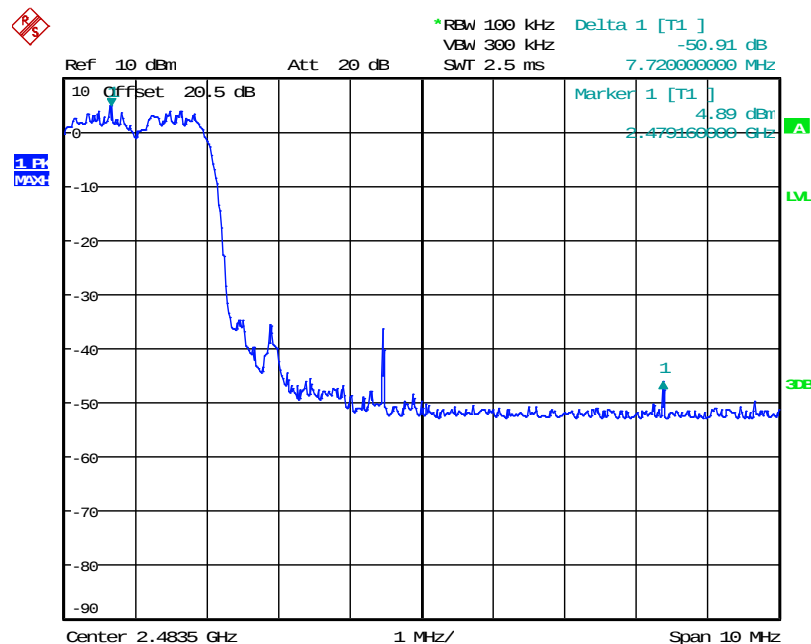

Date: 2.SEP.2016 13:31:02

Figure 7.4.1.2-12: Upper Band-edge – Hopping Mode (8DPSK)


## 7.4.2 RF Conducted Spurious Emissions – FCC Section 15.247(d); ISCED Canada RSS-247 5.5

### 7.4.2.1 Measurement Procedure

The RF output port of the EUT was connected to the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30 MHz to 26 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz. A peak detector function was used with the trace set to max hold. The levels were corrected for cable and attenuator losses.


### 7.4.2.2 Measurement Results

Results are shown below:

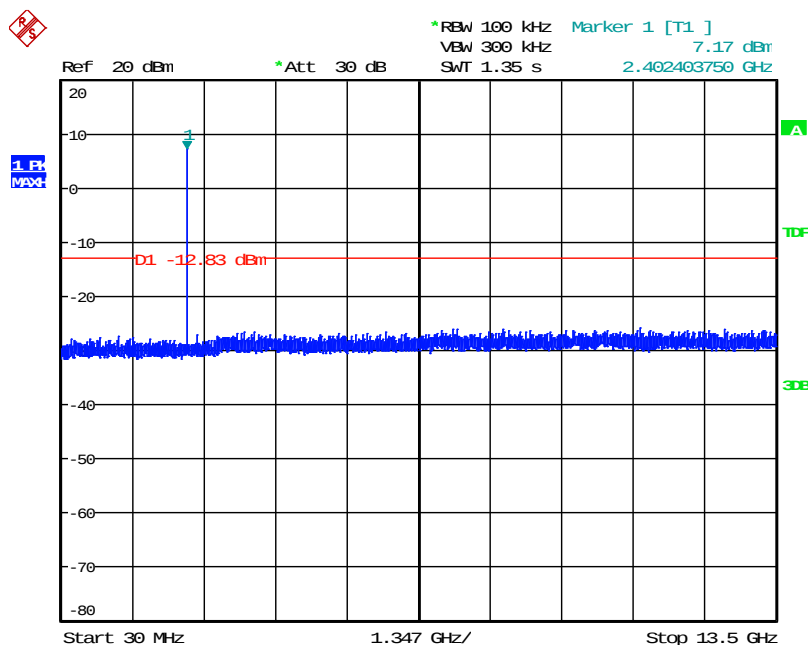


Date: 2.SEP.2016 15:14:44

Figure 7.4.2.2-1: 30 MHz – 13.5 GHz – Low Channel (GFSK)

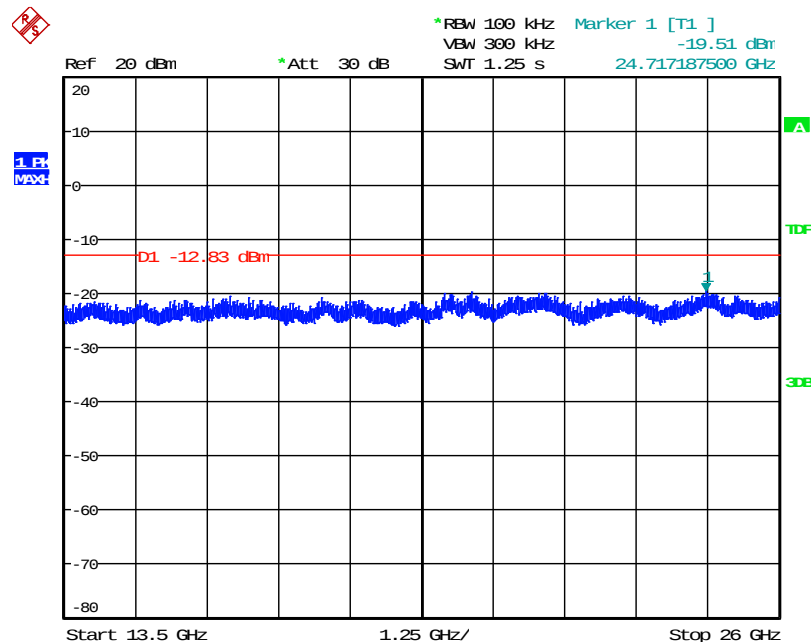


Date: 2.SEP.2016 15:16:51

Figure 7.4.2.2-2: 13.5 GHz –26 GHz – Low Channel (GFSK)

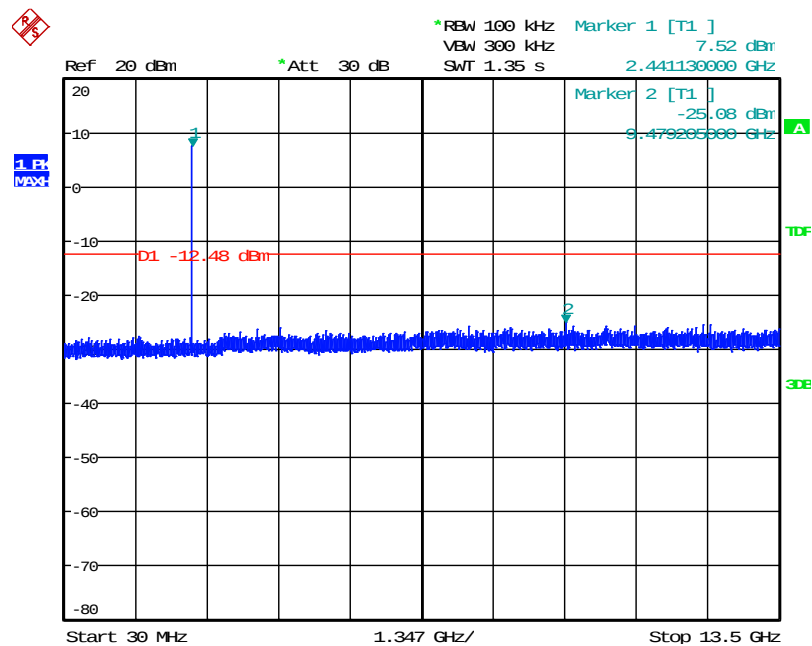


Date: 2.SEP.2016 15:19:55

Figure 7.4.2.2-3: 30 MHz – 13.5 GHz – Middle Channel (GFSK)

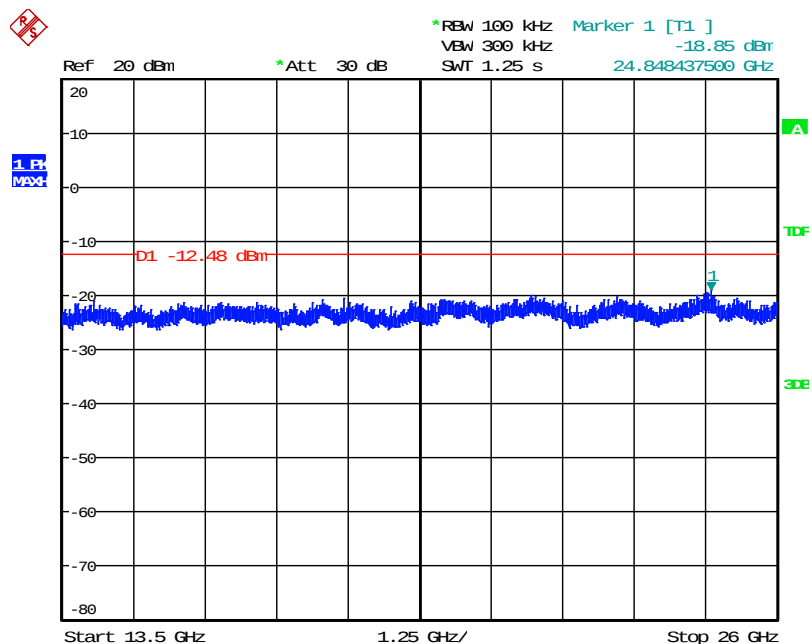


Date: 2.SEP.2016 15:21:22

Figure 7.4.2.2-4: 13.5 GHz – 26 GHz – Middle Channel (GFSK)

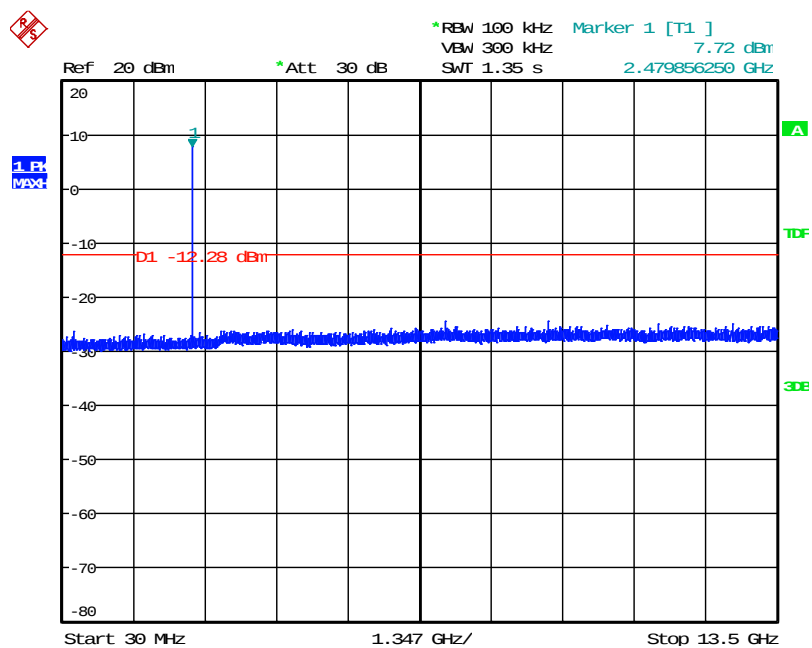


Date: 2.SEP.2016 16:01:29

Figure 7.4.2.2-5: 30 MHz – 13.5 GHz – High Channel (GFSK)

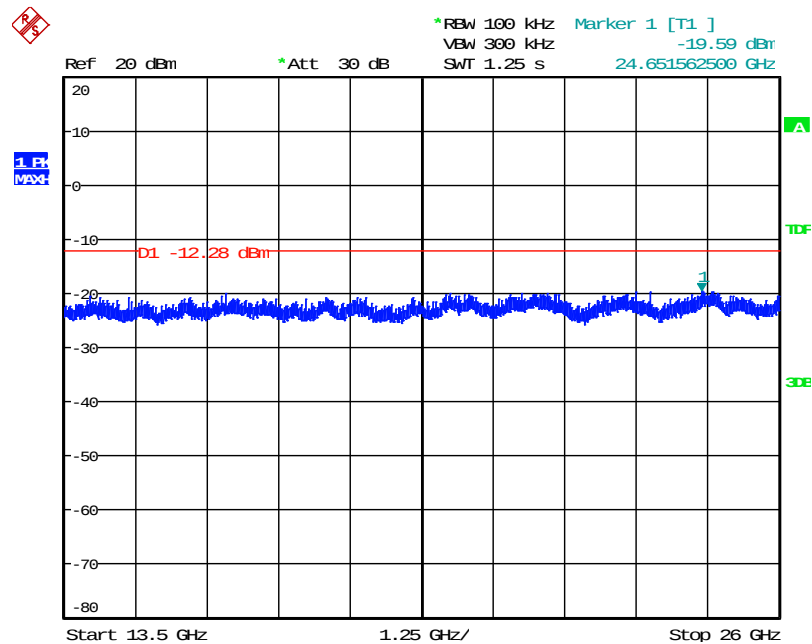


Date: 2.SEP.2016 16:04:53

Figure 7.4.2.2-6: 13.5 GHz –26 GHz –High Channel (GFSK)

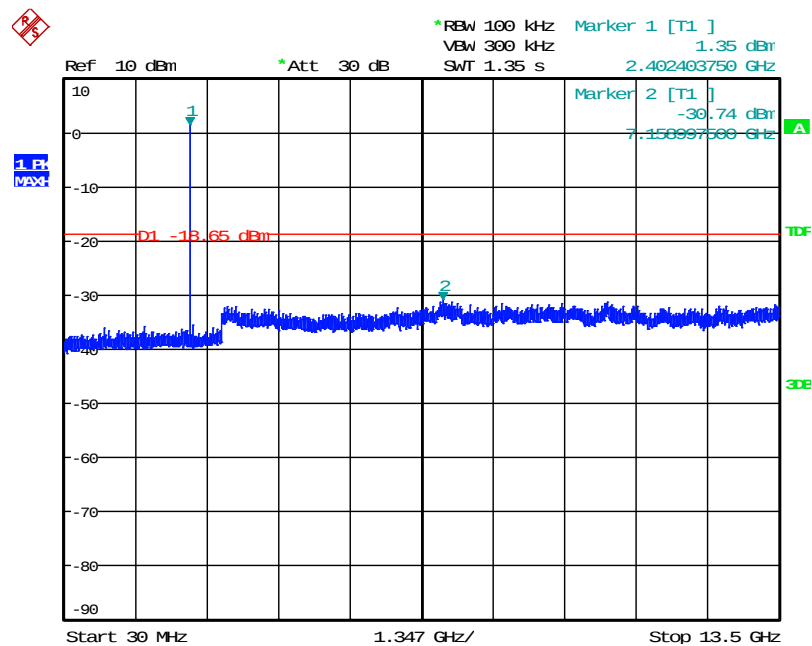


Date: 2.SEP.2016 16:17:50

Figure 7.4.2.2-7: 30 MHz – 13.5 GHz – Low Channel ( $\pi/4$  DQPSK)

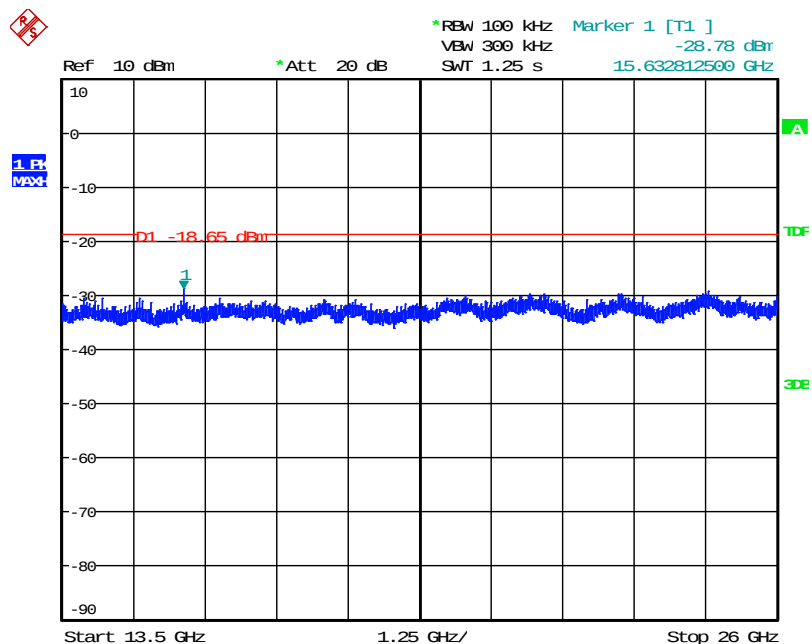


Date: 2.SEP.2016 16:21:38

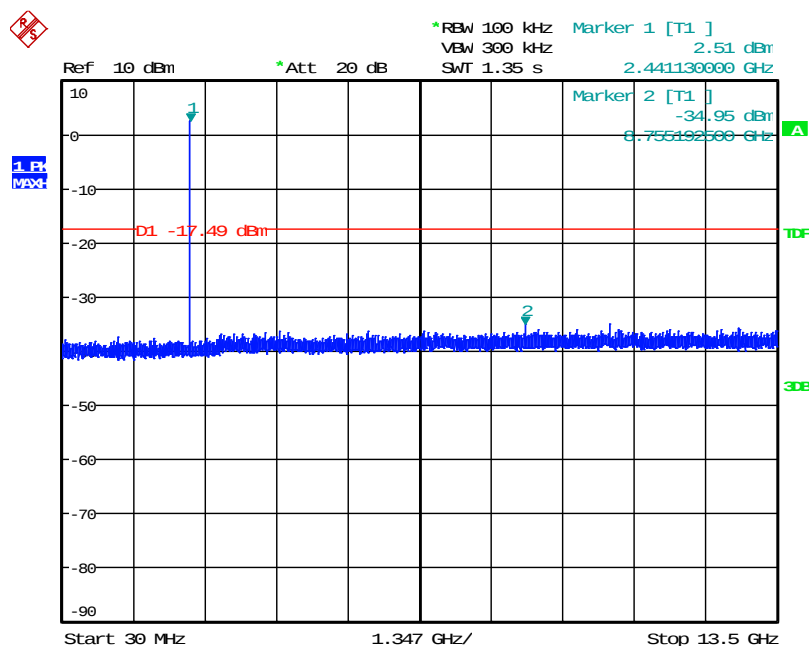
Figure 7.4.2.2-8: 13.5 GHz –26 GHz – Low Channel ( $\pi/4$  DQPSK)

Date: 2.SEP.2016 16:25:46

Figure 7.4.2.2-9: 30 MHz – 13.5 GHz –Middle Channel ( $\pi/4$  DQPSK)

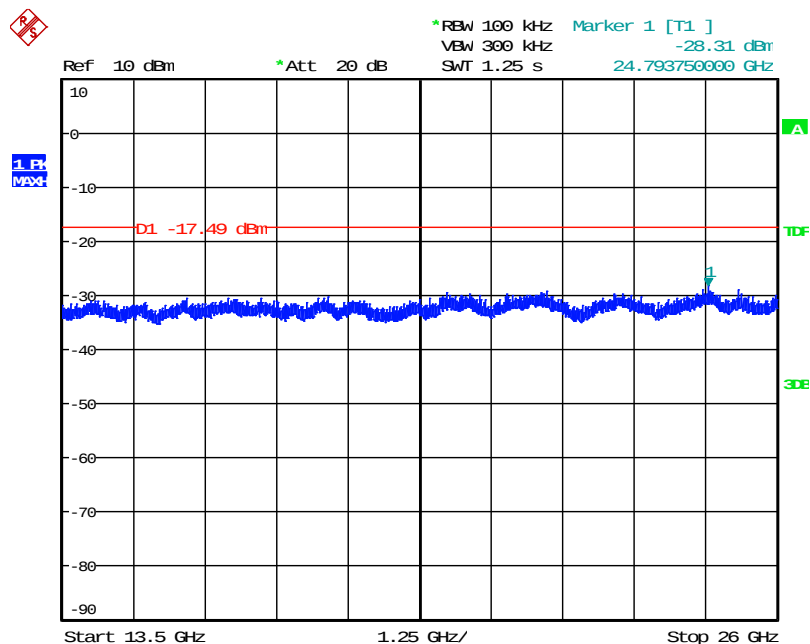


Date: 2.SEP.2016 16:34:12

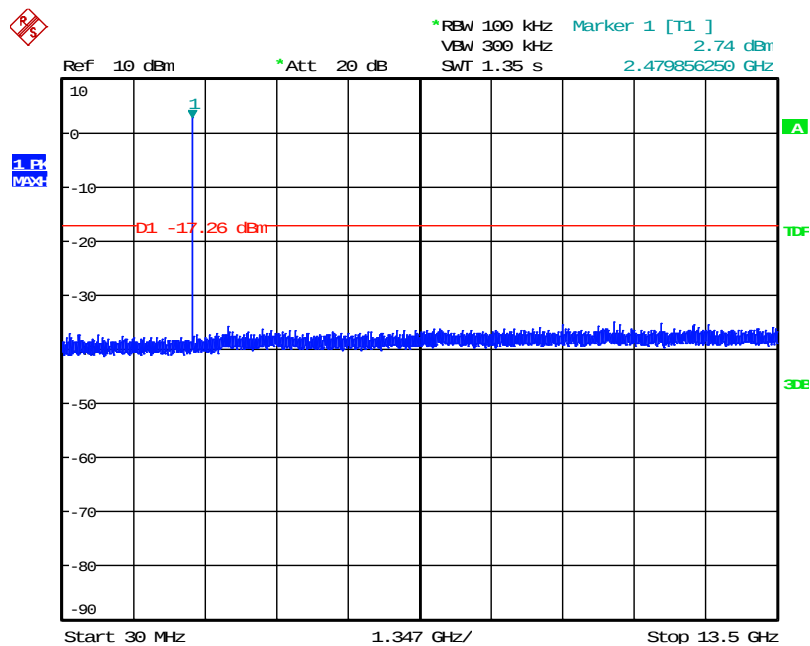Figure 7.4.2.2-10: 13.5 GHz –26 GHz – Middle Channel ( $\pi/4$  DQPSK)


Date: 2.SEP.2016 16:40:04

Figure 7.4.2.2-11: 30 MHz – 13.5 GHz – High Channel ( $\pi/4$  DQPSK)

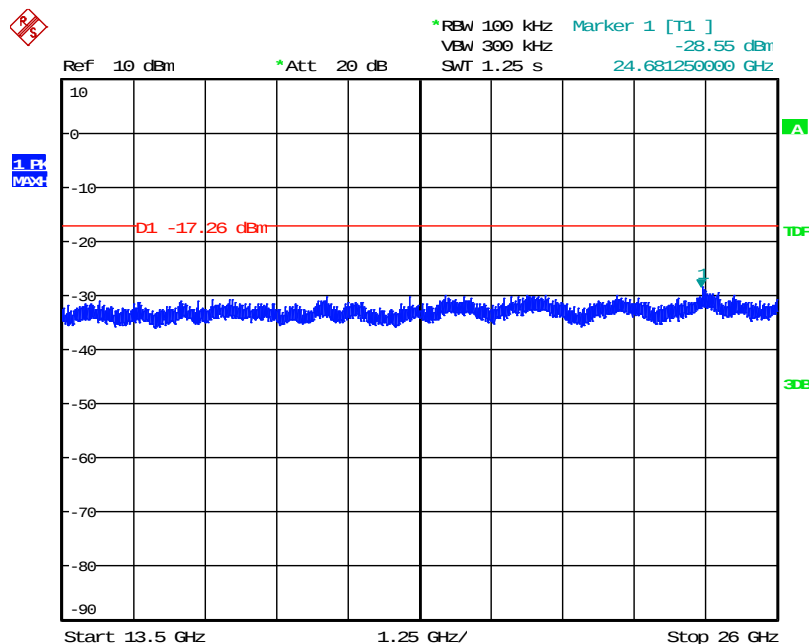


Date: 2.SEP.2016 16:42:35

Figure 7.4.2.2-12: 13.5 GHz –26 GHz –High Channel ( $\pi/4$  DQPSK)

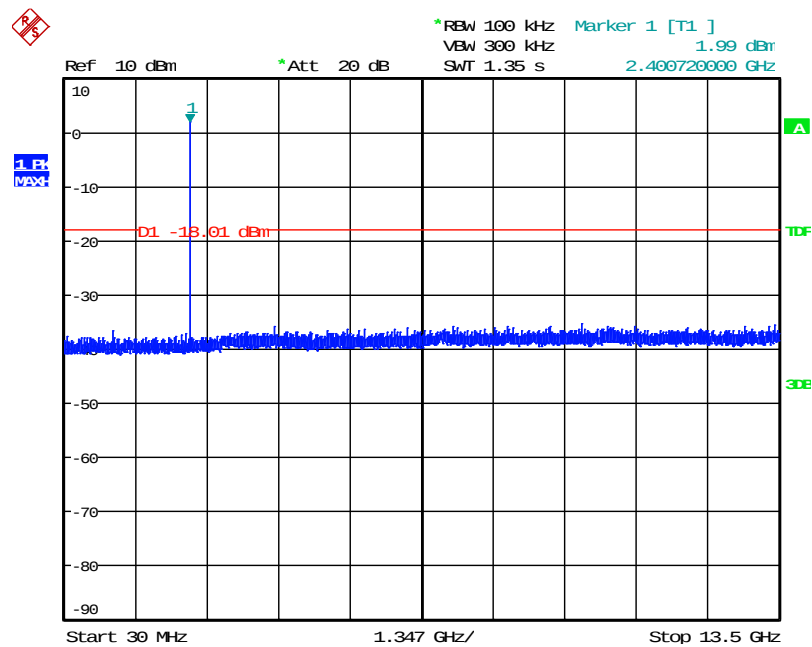


Date: 2.SEP.2016 16:49:17

Figure 7.4.2.2-13: 30 MHz – 13.5 GHz – Low Channel (8DPSK)

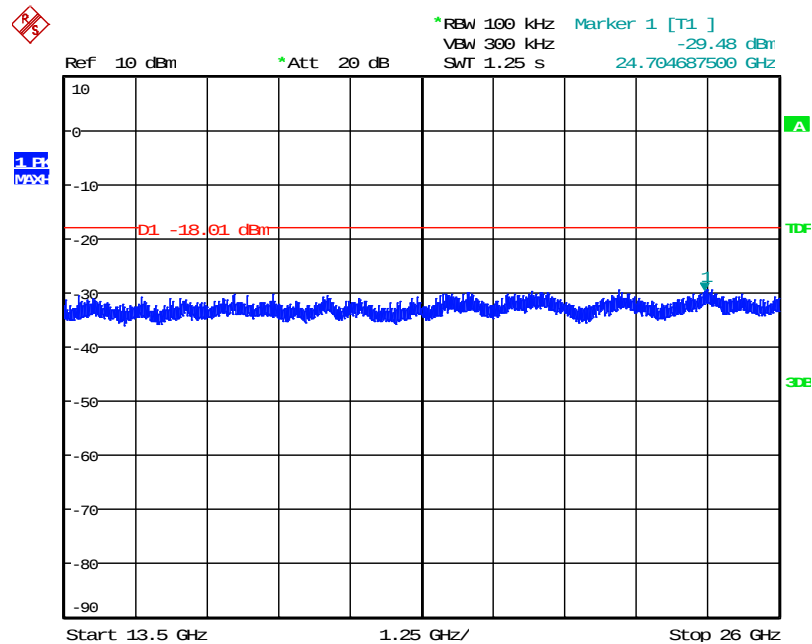


Date: 2.SEP.2016 16:52:31

Figure 7.4.2.2-14: 13.5 GHz –26 GHz – Low Channel (8DPSK)

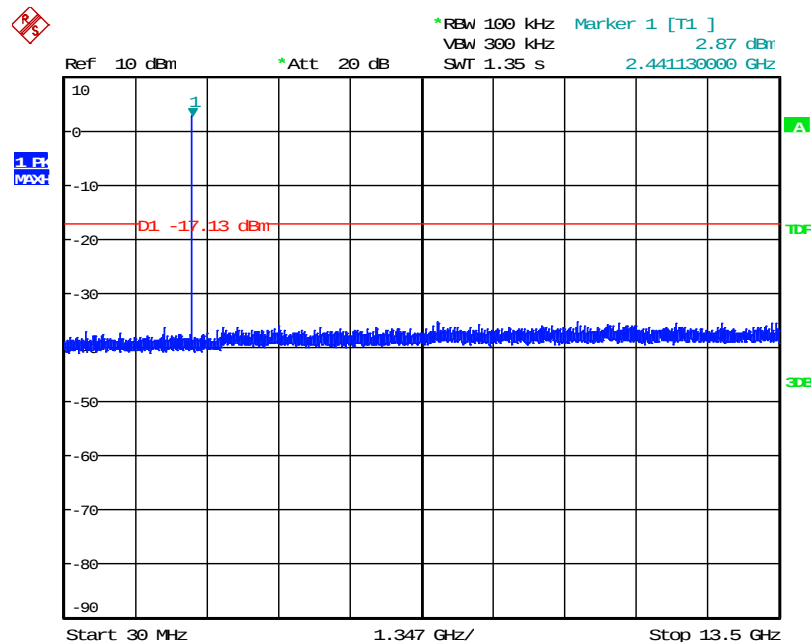


Date: 2.SEP.2016 17:01:05

Figure 7.4.2.2-15: 30 MHz – 13.5 GHz –Middle Channel (8DPSK)

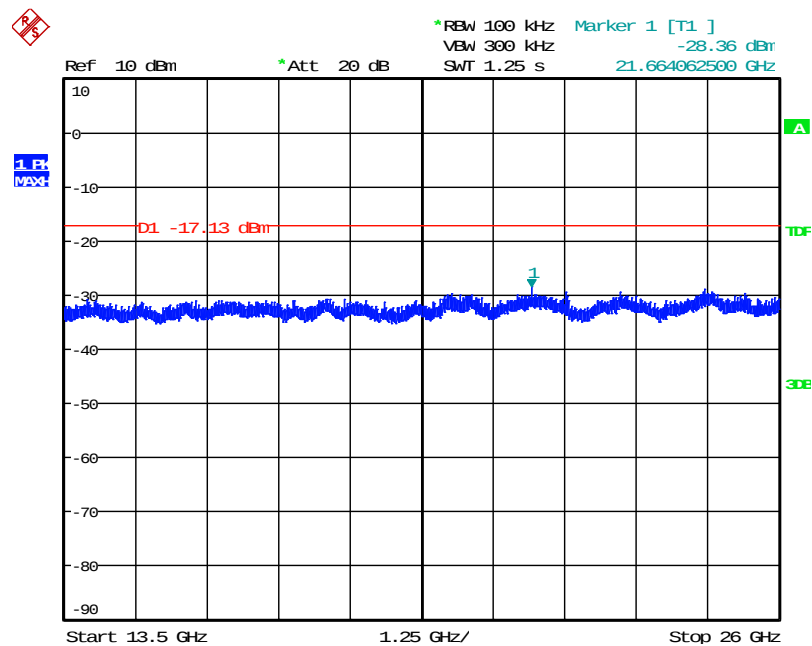


Date: 2.SEP.2016 17:06:17

Figure 7.4.2.2-16: 13.5 GHz –26 GHz – Middle Channel (8DPSK)

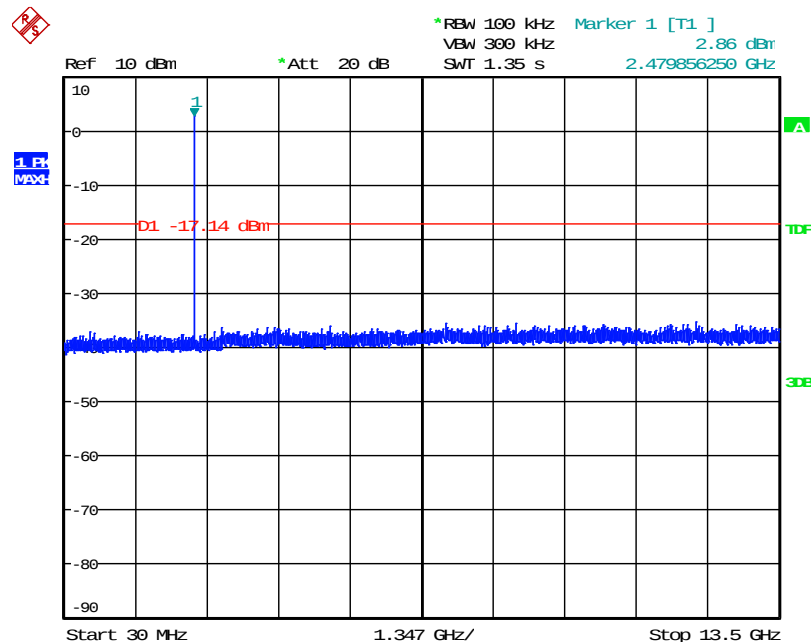

Date: 2.SEP.2016 17:13:10

Figure 7.4.2.2-17: 30 MHz – 13.5 GHz – High Channel (8DPSK)

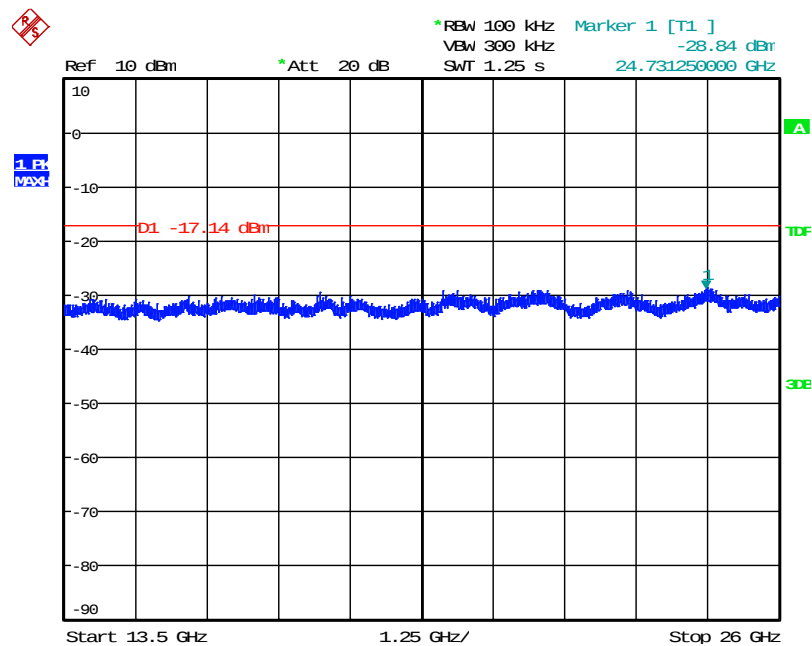

Date: 2.SEP.2016 17:31:23

Figure 7.4.2.2-18: 13.5 GHz –26 GHz –High Channel (8DPSK)

### 7.4.3 Radiated Spurious Emissions within the Restricted Bands - FCC Sections 15.205, 15.209; ISSED Canada RSS-Gen 8.9, 8.10

#### 7.4.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

For measurements below 30 MHz, the receive antenna height was set to 1m and the EUT was rotated through 360 degrees. The resolution bandwidth was set to 200 Hz below 150 kHz and to 9 kHz above 150 kHz.

For measurements above 30 MHz, the EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak measurements made with RBW and VBW of 1 MHz and 3 MHz respectively. Average measurements were collected in the linear amplitude scale with VBW of 30 Hz.

The EUT was caused to generate a continuous carrier signal on the hopping channel.

#### 7.4.3.2 Measurement Results

Band-edge and radiated spurious emissions found in the restricted bands of 9 kHz to 26 GHz are reported in the tables below.

**Table 7.4.3.2-1: Radiated Spurious Emissions Tabulated Data - GFSK**

| Frequency<br>(MHz)      | Level<br>(dBuV) |         | Antenna<br>Polarity<br><br>(H/V) | Correction<br>Factors<br><br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|-------------------------|-----------------|---------|----------------------------------|-----------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                         | pk              | Qpk/Avg |                                  |                                   | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel 2402 MHz    |                 |         |                                  |                                   |                             |         |                   |         |                |         |
| 2390                    | 57.2            | 43.67   | V                                | -5.35                             | 51.85                       | 38.32   | 74.0              | 54.0    | 22.2           | 15.7    |
| 4804                    | 43.00           | 30.14   | V                                | 3.21                              | 46.21                       | 33.35   | 74.0              | 54.0    | 27.8           | 20.7    |
| Middle Channel 2441 MHz |                 |         |                                  |                                   |                             |         |                   |         |                |         |
| 4882                    | 44.02           | 30.80   | V                                | 3.49                              | 47.51                       | 34.29   | 74.0              | 54.0    | 26.5           | 19.7    |
| 7323                    | 44.46           | 31.67   | H                                | 9.46                              | 53.92                       | 41.13   | 74.0              | 54.0    | 20.1           | 12.9    |
| 7323                    | 47.00           | 37.29   | V                                | 9.46                              | 56.46                       | 46.75   | 74.0              | 54.0    | 17.5           | 7.2     |
| High Channel 2480 MHz   |                 |         |                                  |                                   |                             |         |                   |         |                |         |
| 2483.5                  | 57.23           | 45.24   | H                                | -4.89                             | 52.34                       | 40.35   | 74.0              | 54.0    | 21.7           | 13.7    |
| 2483.5                  | 62.87           | 58.73   | V                                | -4.89                             | 57.98                       | 53.84   | 74.0              | 54.0    | 16.0           | 0.2     |
| 4960                    | 43.38           | 30.64   | V                                | 3.77                              | 47.15                       | 34.41   | 74.0              | 54.0    | 26.8           | 19.6    |
| 7440                    | 43.46           | 30.01   | H                                | 9.80                              | 53.26                       | 39.81   | 74.0              | 54.0    | 20.7           | 14.2    |
| 7440                    | 45.62           | 35.38   | V                                | 9.80                              | 55.42                       | 45.18   | 74.0              | 54.0    | 18.6           | 8.8     |

Notes: All emissions above 7.44 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.4.3.2-2: Radiated Spurious Emissions Tabulated Data – ( $\pi/4$ ) DQPSK

| Frequency<br>(MHz)      | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|-------------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                         | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel 2402 MHz    |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2390                    | 57.09           | 43.68   | V                            | -5.35                         | 51.74                       | 38.33   | 74.0              | 54.0    | 22.3           | 15.7    |
| Middle Channel 2441 MHz |                 |         |                              |                               |                             |         |                   |         |                |         |
| 7323                    | 43.88           | 30.50   | H                            | 9.46                          | 53.34                       | 39.96   | 74.0              | 54.0    | 20.7           | 14.0    |
| 7323                    | 45.48           | 33.96   | V                            | 9.46                          | 54.94                       | 43.42   | 74.0              | 54.0    | 19.1           | 10.6    |
| High Channel 2480 MHz   |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2483.5                  | 57.17           | 44.01   | H                            | -4.89                         | 52.28                       | 39.12   | 74.0              | 54.0    | 21.7           | 14.9    |
| 2483.5                  | 62.85           | 54.8    | V                            | -4.89                         | 57.96                       | 49.91   | 74.0              | 54.0    | 16.0           | 4.1     |
| 4960                    | 42.57           | 29.33   | V                            | 3.77                          | 46.34                       | 33.10   | 74.0              | 54.0    | 27.7           | 20.9    |
| 7440                    | 42.56           | 29.50   | H                            | 9.80                          | 52.36                       | 39.30   | 74.0              | 54.0    | 21.6           | 14.7    |
| 7440                    | 44.36           | 32.41   | V                            | 9.80                          | 54.16                       | 42.21   | 74.0              | 54.0    | 19.8           | 11.8    |

Note: All emissions above 7.44 GHz were attenuated below the limits and the noise floor of the measurement equipment.

Table 7.4.3.2-3: Radiated Spurious Emissions Tabulated Data – 8DPSK

| Frequency<br>(MHz)      | Level<br>(dBuV) |         | Antenna<br>Polarity<br>(H/V) | Correction<br>Factors<br>(dB) | Corrected Level<br>(dBuV/m) |         | Limit<br>(dBuV/m) |         | Margin<br>(dB) |         |
|-------------------------|-----------------|---------|------------------------------|-------------------------------|-----------------------------|---------|-------------------|---------|----------------|---------|
|                         | pk              | Qpk/Avg |                              |                               | pk                          | Qpk/Avg | pk                | Qpk/Avg | pk             | Qpk/Avg |
| Low Channel 2402 MHz    |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2390                    | 57.78           | 43.82   | V                            | -5.35                         | 52.43                       | 38.47   | 74.0              | 54.0    | 21.6           | 15.5    |
| Middle Channel 2441 MHz |                 |         |                              |                               |                             |         |                   |         |                |         |
| 7323                    | 43.72           | 30.44   | H                            | 9.46                          | 53.18                       | 39.90   | 74.0              | 54.0    | 20.8           | 14.1    |
| 7323                    | 45.43           | 33.81   | V                            | 9.46                          | 54.89                       | 43.27   | 74.0              | 54.0    | 19.1           | 10.7    |
| High Channel 2480 MHz   |                 |         |                              |                               |                             |         |                   |         |                |         |
| 2483.5                  | 56.79           | 44.03   | H                            | -4.89                         | 51.90                       | 39.14   | 74.0              | 54.0    | 22.1           | 14.9    |
| 2483.5                  | 65.25           | 54.95   | V                            | -4.89                         | 60.36                       | 50.06   | 74.0              | 54.0    | 13.6           | 3.9     |
| 4960                    | 42.71           | 29.42   | V                            | 3.77                          | 46.48                       | 33.19   | 74.0              | 54.0    | 27.5           | 20.8    |
| 7440                    | 42.77           | 29.42   | H                            | 9.80                          | 52.57                       | 39.22   | 74.0              | 54.0    | 21.4           | 14.8    |
| 7440                    | 44.52           | 32.34   | V                            | 9.80                          | 54.32                       | 42.14   | 74.0              | 54.0    | 19.7           | 11.9    |

Note: All emissions above 7.44 GHz were attenuated below the limits and the noise floor of the measurement equipment.

**7.4.3.3 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

|        |   |                                                                   |
|--------|---|-------------------------------------------------------------------|
| $CF_T$ | = | Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only) |
| $R_U$  | = | Uncorrected Reading                                               |
| $R_C$  | = | Corrected Level                                                   |
| AF     | = | Antenna Factor                                                    |
| CA     | = | Cable Attenuation                                                 |
| AG     | = | Amplifier Gain                                                    |
| DC     | = | Duty Cycle Correction Factor                                      |

$$DC = 20 \cdot \log(2.92/100) = -30.69 \text{ dB}$$

**Example Calculation: Peak**

Corrected Level:  $57.2 + (-5.35) = 51.85 \text{ dB}\mu\text{V/m}$

Margin:  $74 \text{ dB}\mu\text{V/m} - 51.85 \text{ dB}\mu\text{V/m} = 22.2 \text{ dB}$

**Example Calculation: Average**

Corrected Level:  $43.67 + (-5.35) = 38.32 \text{ dB}\mu\text{V/m}$

Margin:  $54 \text{ dB}\mu\text{V/m} - 38.32 \text{ dB}\mu\text{V/m} = 15.7 \text{ dB}$

## 7.5 Power Line Conducted Emissions – FCC Section 15.207; ISED Canada RSS-Gen 8.8

### 7.5.1 Measurement Procedure

ANSI C63.10 section 6.2 was the guiding document for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**

**Margin = Applicable Limit - Corrected Reading**

### 7.5.2 Measurement Results

Results of the test corresponding to the EUT configuration leading to the worse case emissions are shown below:

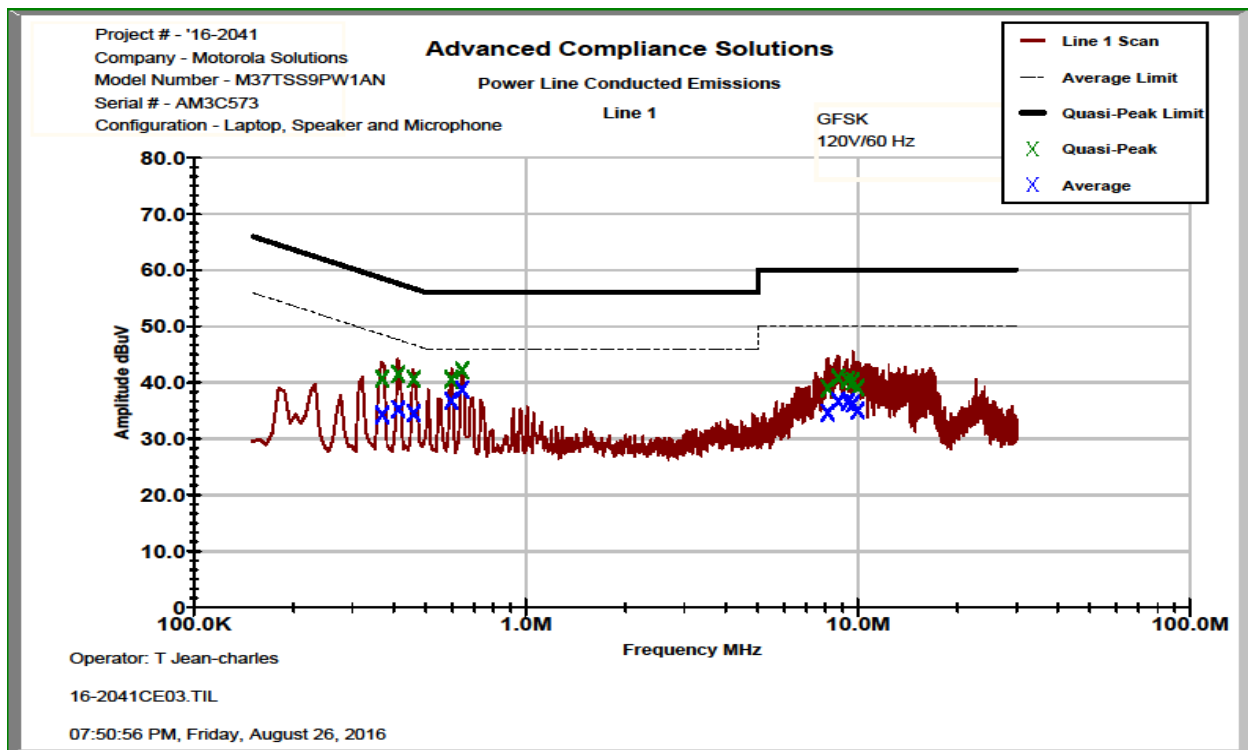


Figure 7.5.2-1: Conducted Emissions Results – Line 1

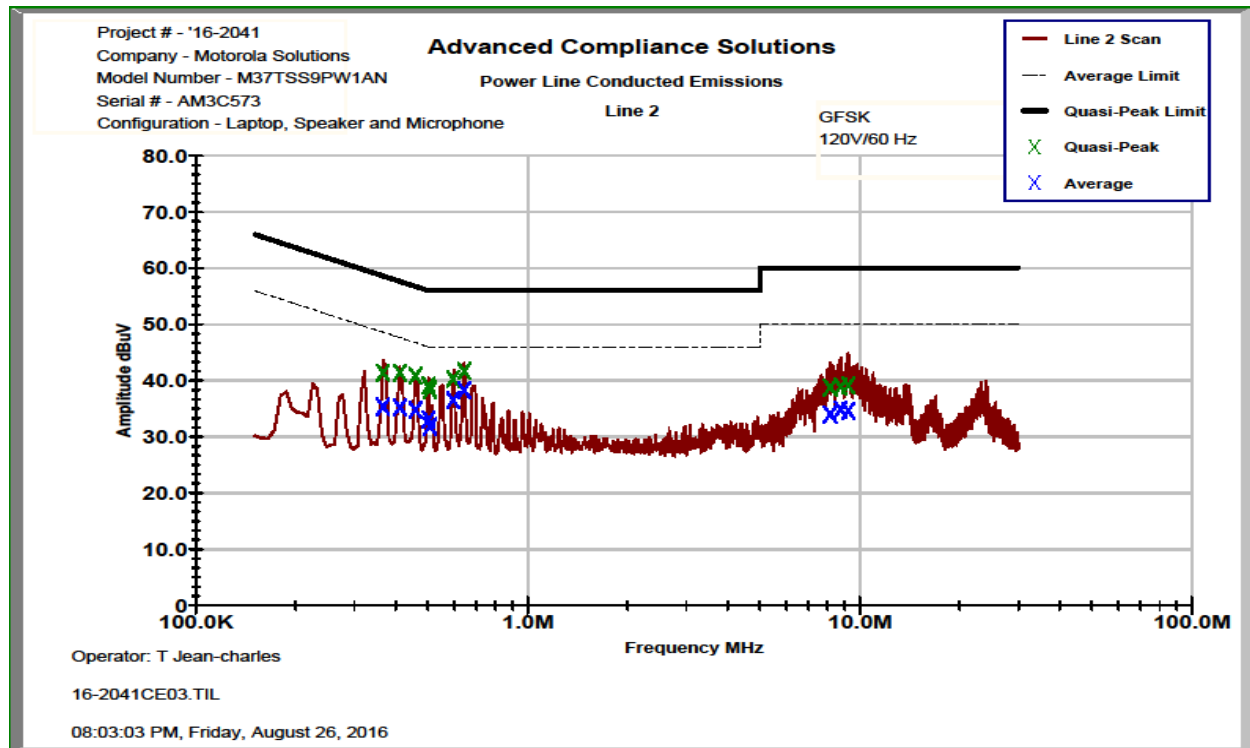


Figure 7.5.2-2: Conducted Emissions Results – Line 2

Table 7.5.2-1: Conducted EMI Results

| <div><div><div><input checked="" type="checkbox"/> Line 1</div><div><input checked="" type="checkbox"/> Line 2</div><div><input type="checkbox"/> Line 3</div><div><input type="checkbox"/> Line 4</div><div><input checked="" type="checkbox"/> To Ground</div><div><input type="checkbox"/> Floating</div><div><input type="checkbox"/> Telecom Port</div><div><input checked="" type="checkbox"/> dBµV</div><div><input type="checkbox"/> dBµA</div></div><div><div>Plot Number: <u>16-2041CE03</u></div><div>Power Supply Description: <u>15 VDC Power Supply</u></div></div></div> |                     |         |                              |                 |         |            |         |             |         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------|------------------------------|-----------------|---------|------------|---------|-------------|---------|
| Frequency (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Uncorrected Reading |         | Total Correction Factor (dB) | Corrected Level |         | Limit      |         | Margin (dB) |         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Quasi-Peak          | Average |                              | Quasi-Peak      | Average | Quasi-Peak | Average | Quasi-Peak  | Average |
| Line 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |         |                              |                 |         |            |         |             |         |
| 0.368863                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 30.492              | 24.043  | 10.20                        | 40.70           | 34.25   | 58.53      | 48.53   | 17.8        | 14.3    |
| 0.413387                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 31.252              | 25.032  | 10.21                        | 41.46           | 35.24   | 57.58      | 47.58   | 16.1        | 12.3    |
| 0.459713                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 30.375              | 24.283  | 10.21                        | 40.58           | 34.49   | 56.70      | 46.70   | 16.1        | 12.2    |
| 0.596149                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 30.362              | 26.518  | 10.20                        | 40.57           | 36.72   | 56.00      | 46.00   | 15.4        | 9.3     |
| 0.641725                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 31.93               | 28.543  | 10.20                        | 42.13           | 38.74   | 56.00      | 46.00   | 13.9        | 7.3     |
| 8.10769                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28.394              | 24.039  | 10.59                        | 38.99           | 34.63   | 60.00      | 50.00   | 21.0        | 15.4    |
| 8.7081                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 30.2                | 26.031  | 10.61                        | 40.81           | 36.64   | 60.00      | 50.00   | 19.2        | 13.4    |
| 9.30012                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 29.739              | 25.849  | 10.63                        | 40.37           | 36.48   | 60.00      | 50.00   | 19.6        | 13.5    |
| 9.6667                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 29.584              | 25.587  | 10.65                        | 40.23           | 36.23   | 60.00      | 50.00   | 19.8        | 13.8    |
| 9.99044                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28.413              | 24.349  | 10.66                        | 39.07           | 35.01   | 60.00      | 50.00   | 20.9        | 15.0    |
| Line 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                     |         |                              |                 |         |            |         |             |         |
| 0.366263                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 31.18               | 25.108  | 10.20                        | 41.38           | 35.31   | 58.59      | 48.59   | 17.2        | 13.3    |
| 0.411787                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 31.204              | 24.986  | 10.21                        | 41.42           | 35.20   | 57.61      | 47.61   | 16.2        | 12.4    |
| 0.457775                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 30.608              | 24.529  | 10.21                        | 40.82           | 34.74   | 56.73      | 46.73   | 15.9        | 12.0    |
| 0.502649                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 28.881              | 22.908  | 10.21                        | 39.09           | 33.11   | 56.00      | 46.00   | 16.9        | 12.9    |
| 0.506838                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 28.154              | 21.617  | 10.21                        | 38.36           | 31.82   | 56.00      | 46.00   | 17.6        | 14.2    |
| 0.5947                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 30.093              | 26.308  | 10.21                        | 40.31           | 36.52   | 56.00      | 46.00   | 15.7        | 9.5     |
| 0.642324                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 31.44               | 28.067  | 10.21                        | 41.65           | 38.28   | 56.00      | 46.00   | 14.4        | 7.7     |
| 8.12199                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28.126              | 23.327  | 10.63                        | 38.75           | 33.96   | 60.00      | 50.00   | 21.2        | 16.0    |
| 8.74591                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28.203              | 24.187  | 10.65                        | 38.85           | 34.84   | 60.00      | 50.00   | 21.1        | 15.2    |
| 9.21004                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 28.413              | 23.939  | 10.67                        | 39.08           | 34.61   | 60.00      | 50.00   | 20.9        | 15.4    |

## **8 CONCLUSION**

In the opinion of ACS, Inc., the model M37TSS9PW1AN manufactured by Motorola Solutions meets the requirements of FCC Part 15 subpart C and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-247 for the test procedures documented in the test report.

**END REPORT**