

Variant FCC Test Report

(PART 27)

Report No.: RFBERD-WTW-P22060603-2

FCC ID: HD5-CN85L1N

Test Model: CN85L1N

Received Date: Sep. 04, 2018

Test Date: Sep. 14, 2018 ~ Sep. 21, 2018

Issued Date: Jul. 04, 2022

Applicant: Honeywell International Inc.

Address: 9680 Old Bailes Road, Fort Mill, SC 29707 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	8
2.2 Test Site and Instruments	9
3 General Information	10
3.1 General Description of EUT	10
3.2 Configuration of System under Test	12
3.2.1 Description of Support Units	12
3.3 Test Mode Applicability and Tested Channel Detail	13
3.4 EUT Operating Conditions	19
3.5 General Description of Applied Standards and references	19
4 Test Types and Results	20
4.1 Output Power Measurement	20
4.1.1 Limits of Output Power Measurement	20
4.1.2 Test Procedures	20
4.1.3 Test Setup	21
4.1.4 Test Results	22
4.2 Modulation Characteristics Measurement	40
4.2.1 Limits of Modulation Characteristics	40
4.2.2 Test Setup	40
4.2.3 Test Procedure	40
4.2.4 Test Results	41
4.3 Frequency Stability Measurement	45
4.3.1 Limits of Frequency Stability Measurement	45
4.3.2 Test Procedure	45
4.3.3 Test Setup	45
4.3.4 Test Results	46
4.4 Occupied Bandwidth Measurement	61
4.4.1 Limits of Occupied Bandwidth Measurement	61
4.4.2 Test Procedure	61
4.4.3 Test Setup	61
4.4.4 Test Result	61
4.5 Band Edge Measurement	69
4.5.1 Limits of Band Edge Measurement	69
4.5.2 Test Setup	69
4.5.3 Test Procedures	69
4.5.4 Test Results	70
4.6 Peak to Average Ratio	86
4.6.1 Limits of Peak to Average Ratio Measurement	86
4.6.2 Test Setup	86
4.6.3 Test Procedures	86
4.6.4 Test Results	86
4.7 Conducted Spurious Emissions	94
4.7.1 Limits of Conducted Spurious Emissions Measurement	94
4.7.2 Test Setup	94
4.7.3 Test Procedure	94
4.7.4 Test Results	95
4.8 Radiated Emission Measurement	124
4.8.1 Limits of Radiated Emission Measurement	124
4.8.2 Test Procedure	124
4.8.3 Deviation from Test Standard	124
4.8.4 Test Setup	125

4.8.5 Test Results	126
5 Pictures of Test Arrangements.....	152
Appendix – Information of the Testing Laboratories	153

Release Control Record

Issue No.	Description	Date Issued
RFBERD-WTW-P22060603-2	Original Release	Jul. 04, 2022

1 Certificate of Conformity

Product: Mobile computer

Brand: Honeywell

Test Model: CN85L1N

Sample Status: Engineering Sample

Applicant: Honeywell International Inc.

Test Date: Sep. 14, 2018 ~ Sep. 21, 2018

Standards: FCC Part 27, Subpart C, H, F, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang, **Date:** Jul. 04, 2022
Lena Wang / Specialist

Approved by : Jeremy Lin, **Date:** Jul. 04, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.77 dB at 44.55 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.31 dB at 3465.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -38.35 dB at 1422.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53 (c)(2)(4)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(c)(2)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(c)(2)&(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -11.41 dB at 1564.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 17)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.33 dB at 1422.00 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM- 8000&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester- Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

3 General Information

3.1 General Description of EUT

Product	Mobile computer	
Brand	Honeywell	
Test Model	CN85L1N	
Status of EUT	Engineering Sample	
Power Supply Rating	3.85 Vdc (battery)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz)	706.5 ~ 713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz)	709.0 ~ 711.0 MHz
Emission Designator	WCDMA	4M15F9W
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M71W7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70W7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M98G7D
	LTE Band 13 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 13 (Channel Bandwidth: 10 MHz)	8M96W7D
	LTE Band 17 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 17 (Channel Bandwidth: 10 MHz)	8M99W7D

Max. ERP Power	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	231.21 mW
	LTE Band 12 (Channel Bandwidth: 3 MHz)	246.60 mW
	LTE Band 12 (Channel Bandwidth: 5 MHz)	267.92 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	283.79 mW
	LTE Band 13 (Channel Bandwidth: 5 MHz)	220.29 mW
	LTE Band 13 (Channel Bandwidth: 10 MHz)	219.79 mW
	LTE Band 17 (Channel Bandwidth: 5 MHz)	223.87 mW
	LTE Band 17 (Channel Bandwidth: 10 MHz)	237.14 mW
Max. EIRP Power	WCDMA	331.89 mW
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	215.77 mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	230.14 mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	244.34 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	260.02 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	279.25 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	295.80 mW
Antenna Type	PIFA Antenna	
Antenna Gain	WCDMA	1.6 dBi (Main) / 1.2 dBi (Aux.)
	LTE Band 4	1.6 dBi (Main) / 1.2 dBi (Aux.)
	LTE Band 12	0 dBi (Main) / -0.2 dBi (Aux.)
	LTE Band 13	0 dBi (Main) / -0.2 dBi (Aux.)
	LTE Band 17	0 dBi (Main) / -0.2 dBi (Aux.)
HW Version	V1.0	
HW P/N	V2.0 (DVT)	
SW Version	OS.02.001-HON01.102	
SW P/N	86.00.35-(0206)	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. This report is issued as a supplementary report to BV CPS report no. RF180904C09-2. The difference compared with original report is disable radio 2 by software, after the evaluation, it does not affect the original data, so the original test data is quoted.
2. The host devices are list as below table for difference of SKU.


Brand	Model	Product Name	USI FG P/N	Description
Honeywell	CN85L1N	Mobile computer	5487-273335-01	CN85G4/UPS/6703SR/CAM/WAN/GMS/FCC
Honeywell	CN85L1N	Mobile computer	5487-275335-01	CN85G4/UPS/6703SR/CAM/WAN/GMS/FCC/ No 2nd BT/No Zigbee

3. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	Inventus Power, Inc. / Honeywell	CW-BAT	3.85 Vdc, 5800 mAh, 22.3 Wh

4. The above Antenna information refers to the manufacturer's antenna specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

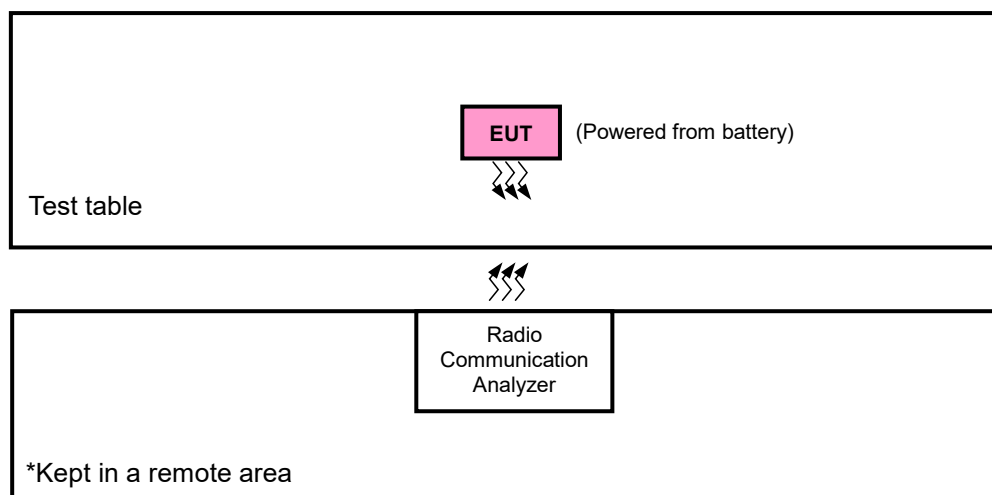

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
WCDMA	X-plane	Y-axis
LTE Band 4	Y-plane	Z-axis
LTE Band 12	X-plane	Y-axis
LTE Band 13	X-plane	Y-axis
LTE Band 17	X-plane	Y-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Modulation Characteristics	1312 to 1513	1312	WCDMA
-	Frequency Stability	1312 to 1513	1312, 1513	WCDMA
-	Occupied Bandwidth	1312 to 1513	1312, 1413, 1513	WCDMA
-	Band Edge	1312 to 1513	1312, 1513	WCDMA
-	Peak to Average Ratio	1312 to 1513	1312, 1413, 1513	WCDMA
-	Conducted Emission	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1312, 1413, 1513	WCDMA

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20050 to 20300	20175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset
			20393	1.4 MHz	QPSK	6 RB / 0 RB Offset
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 5 RB Offset
			20385	3 MHz	QPSK	6 RB / 0 RB Offset
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset
			20375	5 MHz	QPSK	15 RB / 0 RB Offset
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 14 RB Offset
			20350	10 MHz	QPSK	15 RB / 0 RB Offset
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset
			20325	15 MHz	QPSK	25 RB / 0 RB Offset
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 24 RB Offset
			20300	20 MHz	QPSK	25 RB / 0 RB Offset
		19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
			19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
			20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
			20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
			20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23060 to 23130	23095	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			23165	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23155	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23230	23230	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Frequency Stability	23205 to 23255	23205, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Band Edge	23205 to 23255	23205	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23255	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			23230	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 17

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23780 to 23800	23790	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Frequency Stability	23755 to 23825	23755, 23825	5 MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23780, 23800	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Band Edge	23755 to 23825	23755	5 MHz	QPSK	1 RB / 0 RB Offset
			23825	5 MHz	QPSK	25 RB / 0 RB Offset
		23780 to 23800	23780	10 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
			23800	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23780 to 23800	23780, 23790, 23800	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	3.85 Vdc	Jisyong Wang
Modulation Characteristics	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Band Edge	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Gavin Wu
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang / Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 746-757 MHz, 776-788 MHz, and 805-806 MHz band are limited to 3 watts ERP

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

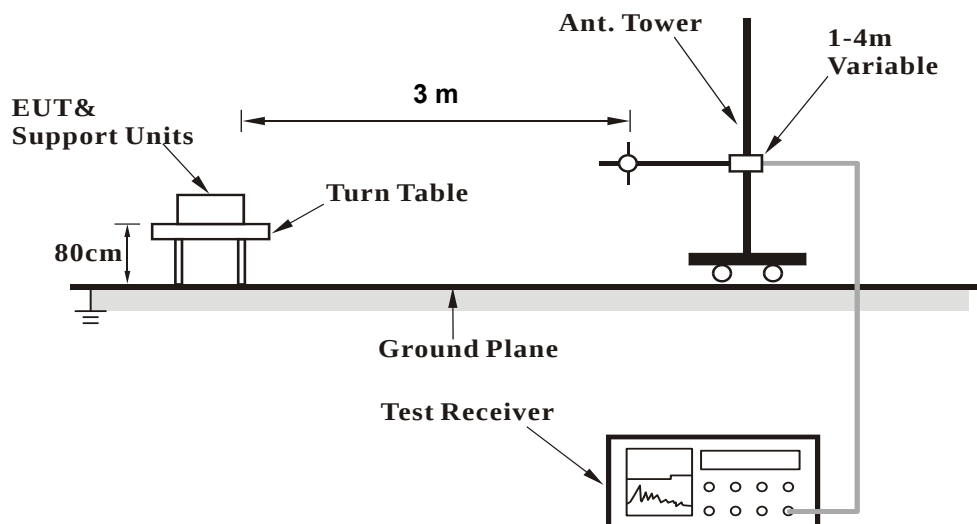


<Radiated Emission above 1 GHz>

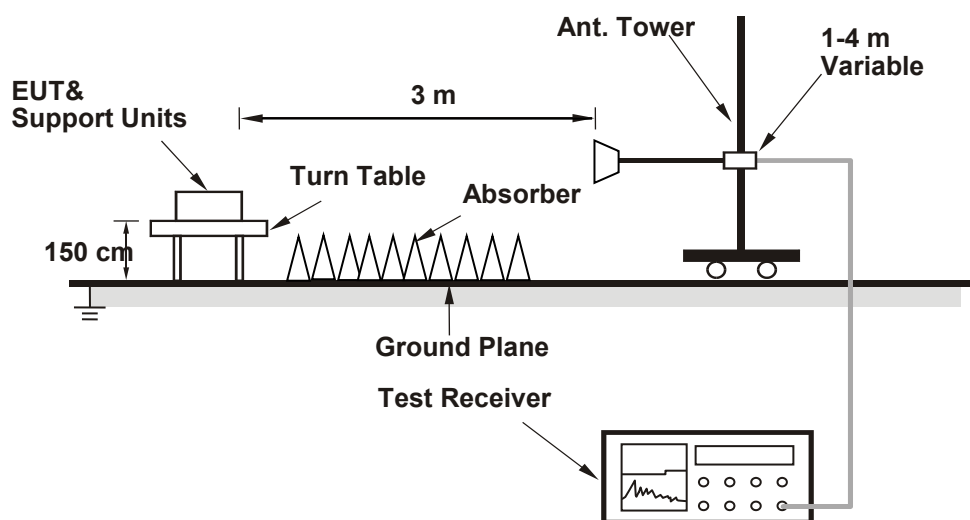

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	24.27	24.40	24.26
HSDPA Subtest-1	23.02	23.15	23.01
HSDPA Subtest-2	23.04	23.06	23.02
HSDPA Subtest-3	22.54	22.58	22.51
HSDPA Subtest-4	22.53	22.56	22.52
DC-HSDPA Subtest-1	23.02	23.13	23.01
DC-HSDPA Subtest-2	23.03	23.04	23.01
DC-HSDPA Subtest-3	22.53	22.56	23.52
DC-HSDPA Subtest-4	22.52	22.54	22.51
HSUPA Subtest-1	23.14	23.19	23.25
HSUPA Subtest-2	21.10	21.15	21.23
HSUPA Subtest-3	22.16	22.21	22.23
HSUPA Subtest-4	21.12	21.17	22.27
HSUPA Subtest-5	23.08	23.11	23.19

LTE Band 4																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20050	20175	20300				Channel		20025	20175	20325			
		Frequency (MHz)		1720.0	1732.5	1745.0				Frequency (MHz)		1717.5	1732.5	1747.5			
20M	QPSK	1	0	24.45	24.41	24.44	0	15M	QPSK	1	0	24.43	24.41	24.41	0		
		1	50	24.35	24.31	24.34	0			1	37	24.28	24.22	24.34	0		
		1	99	24.31	24.27	24.30	0			1	74	24.31	24.24	24.27	0		
		50	0	23.36	23.32	23.35	1			36	0	23.29	23.27	23.29	1		
		50	25	23.31	23.27	23.30	1			36	19	23.28	23.17	23.23	1		
		50	50	23.27	23.23	23.26	1			36	39	23.17	23.16	23.19	1		
		100	0	23.34	23.30	23.33	1			75	0	23.24	23.25	23.23	1		
		16QAM	1	0	23.41	23.37	23.35			1	16QAM	1	0	23.39	23.31	23.34	1
	1		50	23.25	23.22	23.33	1		1	37		23.26	23.22	23.26	1		
	1		99	23.25	23.20	23.27	1		1	74		23.29	23.15	23.22	1		
	50		0	22.32	22.27	22.28	2		36	0		22.27	22.28	22.32	2		
	50		25	22.21	22.18	22.21	2		36	19		22.24	22.14	22.24	2		
	50		50	22.22	22.22	22.21	2		36	39		22.19	22.06	22.18	2		
	100		0	22.34	22.27	22.31	2		75	0		22.22	22.14	22.23	2		
	64QAM		1	0	22.38	22.31	22.40		2	64QAM		1	0	22.30	22.28	22.44	2
		1	50	22.34	22.21	22.31	2		1		37	22.23	22.19	22.18	2		
		1	99	22.24	22.19	22.23	2		1		74	22.20	22.18	22.17	2		
		50	0	21.34	21.23	21.26	3		36		0	21.21	21.17	21.23	3		
		50	25	21.26	21.25	21.24	3		36		19	21.20	21.15	21.21	3		
		50	50	21.27	21.13	21.16	3		36		39	21.23	21.16	21.12	3		
		100	0	21.29	21.30	21.25	3		75		0	21.24	21.24	21.24	3		
		BW	MCS Index	RB Size	RB Offset	Low	Mid		High		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid
	Channel				20000	20175	20350		Channel					19975	20175	20375	
	Frequency (MHz)				1715.0	1732.5	1750.0		Frequency (MHz)					1712.5	1732.5	1752.5	
10M	QPSK	1	0	24.26	24.20	24.37	0	5M	QPSK	1	0	24.35	24.21	24.33	0		
		1	24	24.27	24.29	24.29	0			1	12	24.19	24.26	24.31	0		
		1	49	24.20	24.20	24.19	0			1	24	24.14	24.03	24.04	0		
		25	0	23.31	23.12	23.32	1			12	0	23.24	23.29	23.16	1		
		25	12	23.19	23.21	23.16	1			12	6	23.20	23.17	23.04	1		
		25	25	23.18	23.09	23.10	1			12	13	23.26	23.06	23.08	1		
		50	0	23.18	23.07	23.20	1			25	0	23.29	23.20	23.14	1		
		16QAM	1	0	23.23	23.19	23.41			1	16QAM	1	0	23.39	23.16	23.25	1
	1		24	23.22	23.10	23.08	1		1	12		23.07	23.16	23.09	1		
	1		49	23.07	23.04	23.24	1		1	24		23.15	23.15	23.06	1		
	25		0	22.26	22.20	22.12	2		12	0		22.12	22.14	22.06	2		
	25		12	22.20	22.03	22.07	2		12	6		22.08	22.02	22.10	2		
	25		25	22.19	22.03	22.05	2		12	13		22.17	22.12	22.09	2		
	50		0	22.16	22.11	22.17	2		25	0		22.30	22.15	22.09	2		
	64QAM		1	0	22.20	22.22	22.26		2	64QAM		1	0	22.24	22.34	22.38	2
		1	24	22.13	22.18	22.04	2		1		12	22.09	22.11	22.11	2		
		1	49	22.17	22.05	22.12	2		1		24	22.09	22.12	22.25	2		
		25	0	21.10	21.04	21.17	3		12		0	21.11	21.09	21.27	3		
		25	12	21.06	21.05	21.06	3		12		6	21.08	21.04	21.07	3		
		25	25	21.08	21.08	21.14	3		12		13	21.11	21.12	21.01	3		
		50	0	21.14	21.04	21.11	3		25		0	21.14	21.13	21.24	3		
		BW	MCS Index	RB Size	RB Offset	Low	Mid		High		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid
	Channel				19965	20175	20385		Channel					19957	20175	20393	
	Frequency (MHz)				1711.5	1732.5	1753.5		Frequency (MHz)					1710.7	1732.5	1754.3	
3M	QPSK	1	0	24.30	24.33	24.34	0	1.4M	QPSK	1	0	24.27	24.27	24.30	0		
		1	7	24.11	24.22	24.18	0			1	2	24.21	24.19	24.14	0		
		1	14	24.19	24.16	24.22	0			1	5	24.26	24.19	24.27	0		
		8	0	23.14	23.23	23.21	1			3	0	24.15	24.23	24.26	0		
		8	3	23.30	23.22	23.19	1			3	1	24.18	24.15	24.21	0		
		8	7	23.06	23.09	23.07	1			3	3	24.16	24.18	24.14	0		
		15	0	23.21	23.10	23.18	1			6	0	23.10	23.14	23.29	1		
		16QAM	1	0	23.35	23.25	23.25			1	16QAM	1	0	23.19	23.20	23.33	1
	1		7	23.12	23.22	23.15	1		1	2		23.24	23.18	23.13	1		
	1		14	23.20	23.12	23.07	1		1	5		23.07	23.14	23.06	1		
	8		0	22.04	22.10	22.29	2		3	0		23.19	23.06	23.11	1		
	8		3	22.07	22.16	22.13	2		3	1		23.11	23.05	23.14	1		
	8		7	22.13	22.14	22.04	2		3	3		23.03	22.98	22.93	1		
	15		0	22.15	22.24	22.15	2		6	0		22.24	22.15	22.10	2		
	64QAM		1	0	22.25	22.31	22.17		2	64QAM		1	0	22.34	22.21	22.21	2
		1	7	22.14	22.03	22.12	2		1		2	22.24	22.16	22.24	2		
		1	14	22.04	22.07	22.03	2		1		5	22.24	22.14	22.12	2		
		8	0	21.25	21.17	21.02	3		3		0	22.11	22.21	22.15	2		
		8	3	21.09	21.10	21.22	3		3		1	22.06	21.96	22.23	2		
		8	7	21.11	21.07	21.10	3		3		3	22.19	22.06	22.14	2		
		15	0	21.14	21.16	21.15	3		6		0	21.30	21.20	21.19	3		

LTE Band 12															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130				Channel		23035	23095	23155	
		Frequency (MHz)		704.0	707.5	711.0				Frequency (MHz)		701.5	707.5	713.5	
10M	QPSK	1	0	24.36	24.35	24.38	0	5M	QPSK	1	0	24.18	24.31	24.14	0
		1	24	24.50	24.49	24.52	0			1	12	24.37	24.45	24.33	0
		1	49	24.34	24.33	24.36	0			1	24	24.17	24.17	24.20	0
		25	0	23.23	23.22	23.25	1			12	0	23.06	22.99	23.06	1
		25	12	23.35	23.34	23.37	1			12	6	23.11	23.30	23.19	1
		25	25	23.20	23.19	23.22	1			12	13	23.12	22.97	23.02	1
		50	0	23.19	23.18	23.21	1			25	0	23.04	22.99	22.87	1
		50	12	23.35	23.34	23.37	1			25	12	23.12	22.97	23.02	1
	16QAM	1	0	23.18	23.12	23.12	1		16QAM	1	0	23.13	23.10	23.20	1
		1	24	23.40	23.43	23.28	1			1	12	23.34	23.31	23.32	1
		1	49	23.18	23.31	23.19	1			1	24	23.18	23.19	23.08	1
		25	0	22.05	22.01	21.95	2			12	0	22.03	21.93	22.08	2
		25	12	22.19	22.33	22.21	2			12	6	22.19	22.27	22.13	2
		25	25	22.12	22.05	21.95	2			12	13	22.00	22.12	22.00	2
		50	0	21.89	21.99	21.94	2			25	0	21.99	22.10	22.14	2
		50	12	22.38	22.31	22.28	2			25	12	22.37	22.48	22.41	2
	64QAM	1	0	22.29	22.13	22.21	2		64QAM	1	0	22.30	22.18	22.28	2
		1	24	22.38	22.31	22.28	2			1	12	22.37	22.48	22.41	2
		1	49	22.16	22.13	22.15	2			1	24	22.15	22.18	22.19	2
		25	0	21.10	21.02	21.15	3			12	0	21.11	21.04	21.16	3
		25	12	21.15	21.12	21.15	3			12	6	21.20	21.25	21.17	3
		25	25	21.03	20.99	21.01	3			12	13	21.00	21.00	21.05	3
		50	0	21.00	20.99	21.02	3			25	0	21.15	20.90	21.04	3
		50	12	21.00	20.99	21.02	3			25	12	21.15	20.90	21.04	3
3M	QPSK	1	0	24.16	24.15	24.34	0	1.4M	QPSK	1	0	24.30	24.19	24.27	0
		1	7	24.34	24.28	24.34	0			1	2	24.32	24.41	24.44	0
		1	14	24.30	24.17	24.33	0			1	5	24.19	24.29	24.20	0
		8	0	23.16	23.06	23.10	1			3	0	24.11	24.15	24.04	0
		8	3	23.20	23.16	23.18	1			3	1	24.23	24.21	24.18	0
		8	7	23.12	23.11	23.08	1			3	3	24.14	24.04	24.08	0
		15	0	23.03	23.01	23.14	1			6	0	23.08	23.10	23.07	1
		15	7	23.41	23.39	23.42	1			6	1	23.12	23.26	23.32	1
	16QAM	1	0	23.18	23.25	23.27	1		16QAM	1	0	23.12	23.26	23.32	1
		1	7	23.41	23.39	23.42	1			1	2	23.37	23.36	23.26	1
		1	14	23.02	23.26	23.18	1			1	5	23.13	23.23	23.19	1
		8	0	22.12	22.00	22.18	2			1	5	23.13	23.23	23.19	1
		8	3	22.19	22.18	22.15	2			3	0	23.07	23.03	23.06	1
		8	7	22.03	21.93	22.10	2			3	1	23.06	23.24	23.20	1
		15	0	21.95	21.97	22.13	2			3	3	23.04	23.02	23.20	1
		15	7	22.21	22.25	22.34	2			6	0	21.85	21.98	22.07	2
	64QAM	1	0	22.21	22.25	22.34	2		64QAM	1	0	22.15	22.19	22.24	2
		1	7	22.39	22.21	22.31	2			1	2	22.40	22.22	22.41	2
		1	14	22.19	22.13	22.17	2			1	5	22.30	22.20	22.17	2
		8	0	21.06	21.06	21.07	3			3	0	22.14	22.12	22.08	2
		8	3	21.17	21.09	21.28	3			3	1	22.13	22.11	22.23	2
		8	7	20.94	20.98	20.99	3			3	3	22.02	22.10	22.06	2
		15	0	20.91	20.96	21.10	3			6	0	21.05	20.98	21.09	3
		15	7	20.91	20.96	21.10	3			6	1	21.05	20.98	21.09	3

LTE Band 13															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			23230					Channel		23205	23230	23225	
		Frequency (MHz)			782.0					Frequency (MHz)		779.5	782.0	784.5	
10M	QPSK	1	0		23.56		0	5M	QPSK	1	0	23.42	23.46	23.41	0
		1	24		23.68		0			1	12	23.60	23.64	23.59	0
		1	49		23.44		0			1	24	23.30	23.34	23.29	0
		25	0		22.72		1			12	0	22.67	22.71	22.66	1
		25	12		22.55		1			12	6	22.45	22.49	22.44	1
		25	25		22.48		1			12	13	22.36	22.40	22.35	1
		50	0		22.61		1			25	0	22.54	22.58	22.53	1
		1	0		22.95		1		16QAM	1	0	22.83	22.87	22.82	1
	16QAM	1	24		22.74		1			1	12	22.70	22.74	22.69	1
		1	49		23.00		1			1	24	22.87	22.91	22.86	1
		25	0		21.76		2			12	0	21.72	21.76	21.71	2
		25	12		21.55		2			12	6	21.46	21.50	21.45	2
		25	25		21.50		2			12	13	21.39	21.43	21.38	2
		50	0		21.76		2			25	0	21.68	21.72	21.67	2
		1	0		21.49		2		64QAM	1	0	21.34	21.38	21.33	2
	64QAM	1	24		21.68		2			1	12	21.53	21.57	21.52	2
		1	49		21.40		2			1	24	21.28	21.32	21.27	2
		25	0		20.66		3			12	0	20.53	20.57	20.52	3
		25	12		20.54		3			12	6	20.35	20.39	20.34	3
		25	25		20.48		3			12	13	20.33	20.37	20.32	3
		50	0		20.61		3			25	0	20.42	20.46	20.41	3

LTE Band 17															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800				Channel		23755	23790	23825	
		Frequency (MHz)		709.0	710.0	711.0				Frequency (MHz)		706.5	710.0	713.5	
10M	QPSK	1	0	24.05	24.03	24.01	0	5M	QPSK	1	0	23.93	23.97	23.80	0
		1	24	24.06	24.04	24.02	0			1	12	24.03	24.01	23.90	0
		1	49	23.96	23.94	23.92	0			1	24	23.76	23.77	23.80	0
		25	0	23.10	23.08	23.06	1			12	0	23.07	22.89	22.91	1
		25	12	23.15	23.13	23.11	1			12	6	22.97	22.92	22.87	1
		25	25	23.09	23.07	23.05	1			12	13	23.01	22.88	22.89	1
		50	0	23.10	23.08	23.06	1			25	0	23.00	22.96	22.87	1
	16QAM	1	0	23.01	22.98	23.01	1		16QAM	1	0	22.90	22.93	22.88	1
		1	24	23.02	23.03	23.01	1			1	12	22.84	22.91	22.81	1
		1	49	22.90	22.89	22.84	1			1	24	22.79	22.67	22.77	1
		25	0	22.04	22.02	21.99	2			12	0	22.06	21.95	21.77	2
		25	12	22.15	22.13	22.06	2			12	6	21.96	21.94	21.96	2
		25	25	22.08	22.03	21.96	2			12	13	22.06	22.04	21.88	2
		50	0	22.02	22.04	21.99	2			25	0	21.93	21.89	21.75	2
	64QAM	1	0	22.02	22.03	21.97	2		64QAM	1	0	21.76	21.88	21.89	2
		1	24	22.00	22.03	21.96	2			1	12	21.74	21.87	21.85	2
		1	49	21.89	21.93	21.84	2			1	24	21.91	21.73	21.60	2
		25	0	21.01	21.07	20.99	3			12	0	20.77	20.81	20.93	3
		25	12	21.09	21.09	21.07	3			12	6	20.99	20.94	21.05	3
		25	25	21.02	20.99	21.00	3			12	13	20.95	20.88	20.82	3
		50	0	21.04	21.02	20.97	3			25	0	21.01	21.02	20.91	3

ERP Power (dBm)

LTE Band 12							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23017	699.7	-4.75	30.36	23.46	221.82	H
	23095	707.5	-4.70	30.17	23.32	214.78	
	23173	715.3	-4.38	30.17	23.64	231.21	
	23017	699.7	-12.65	32.03	17.23	52.84	V
	23095	707.5	-12.74	31.98	17.09	51.17	
	23173	715.3	-12.50	32.06	17.41	55.08	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	23017	699.7	-5.73	30.36	22.48	177.01	H
	23095	707.5	-5.68	30.17	22.34	171.40	
	23173	715.3	-5.36	30.17	22.66	184.50	
	23017	699.7	-13.63	32.03	16.25	42.17	V
	23095	707.5	-13.72	31.98	16.11	40.83	
	23173	715.3	-13.48	32.06	16.43	43.95	
Channel Bandwidth: 1.4 MHz / 64QAM							
X	23017	699.7	-6.75	30.36	21.46	139.96	H
	23095	707.5	-6.70	30.17	21.32	135.52	
	23173	715.3	-6.38	30.17	21.64	145.88	
	23017	699.7	-14.65	32.03	15.23	33.34	V
	23095	707.5	-14.74	31.98	15.09	32.28	
	23173	715.3	-14.50	32.06	15.41	34.75	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23025	700.5	-4.28	30.17	23.74	236.59	H
	23095	707.5	-4.42	30.17	23.60	229.09	
	23165	714.5	-4.11	30.18	23.92	246.60	
	23025	700.5	-12.30	31.96	17.51	56.36	V
	23095	707.5	-12.46	31.98	17.37	54.58	
	23165	714.5	-12.19	32.03	17.69	58.75	
Channel Bandwidth: 3 MHz / 16QAM							
X	23025	700.5	-5.39	30.17	22.63	183.23	H
	23095	707.5	-5.53	30.17	22.49	177.42	
	23165	714.5	-5.22	30.18	22.81	190.99	
	23025	700.5	-13.41	31.96	16.40	43.65	V
	23095	707.5	-13.57	31.98	16.26	42.27	
	23165	714.5	-13.30	32.03	16.58	45.50	
Channel Bandwidth: 3 MHz / 64QAM							
X	23025	700.5	-6.41	30.17	21.61	144.88	H
	23095	707.5	-6.55	30.17	21.47	140.28	
	23165	714.5	-6.24	30.18	21.79	151.01	
	23025	700.5	-14.43	31.96	15.38	34.51	V
	23095	707.5	-14.59	31.98	15.24	33.42	
	23165	714.5	-14.32	32.03	15.56	35.97	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23035	701.5	-3.92	30.17	24.10	257.04	H
	23095	707.5	-4.06	30.17	23.96	248.89	
	23155	713.5	-3.75	30.18	24.28	267.92	
	23035	701.5	-11.94	31.96	17.87	61.24	V
	23095	707.5	-12.10	31.98	17.73	59.29	
	23155	713.5	-11.83	32.03	18.05	63.83	
Channel Bandwidth: 5 MHz / 16QAM							
X	23035	701.5	-4.90	30.17	23.12	205.12	H
	23095	707.5	-5.04	30.17	22.98	198.61	
	23155	713.5	-4.73	30.18	23.30	213.80	
	23035	701.5	-12.92	31.96	16.89	48.87	V
	23095	707.5	-13.08	31.98	16.75	47.32	
	23155	713.5	-12.81	32.03	17.07	50.93	
Channel Bandwidth: 5 MHz / 64QAM							
X	23035	701.5	-5.89	30.17	22.13	163.31	H
	23095	707.5	-6.03	30.17	21.99	158.12	
	23155	713.5	-5.72	30.18	22.31	170.22	
	23035	701.5	-13.91	31.96	15.90	38.90	V
	23095	707.5	-14.07	31.98	15.76	37.67	
	23155	713.5	-13.80	32.03	16.08	40.55	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23060	704.0	-3.67	30.17	24.35	272.27	H
	23095	707.5	-3.81	30.17	24.21	263.63	
	23130	711.0	-3.50	30.18	24.53	283.79	
	23060	704.0	-11.69	31.96	18.12	64.86	V
	23095	707.5	-11.85	31.98	17.98	62.81	
	23130	711.0	-11.58	32.03	18.30	67.61	
Channel Bandwidth: 10 MHz / 16QAM							
X	23060	704.0	-4.69	30.17	23.33	215.28	H
	23095	707.5	-4.83	30.17	23.19	208.45	
	23130	711.0	-4.52	30.18	23.51	224.39	
	23060	704.0	-12.71	31.96	17.10	51.29	V
	23095	707.5	-12.87	31.98	16.96	49.66	
	23130	711.0	-12.60	32.03	17.28	53.46	
Channel Bandwidth: 10 MHz / 64QAM							
X	23060	704.0	-5.71	30.17	22.31	170.22	H
	23095	707.5	-5.85	30.17	22.17	164.82	
	23130	711.0	-5.54	30.18	22.49	177.42	
	23060	704.0	-13.73	31.96	16.08	40.55	V
	23095	707.5	-13.89	31.98	15.94	39.26	
	23130	711.0	-13.62	32.03	16.26	42.27	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23205	779.5	-7.08	32.24	23.01	199.99	H
	23230	782.0	-6.78	32.17	23.24	210.86	
	23255	784.5	-6.53	32.11	23.43	220.29	
	23205	779.5	-13.53	32.43	16.75	47.32	V
	23230	782.0	-13.26	32.42	17.01	50.23	
	23255	784.5	-12.79	32.46	17.52	56.49	
Channel Bandwidth: 5 MHz / 16QAM							
X	23205	779.5	-8.10	32.24	21.99	158.12	H
	23230	782.0	-7.80	32.17	22.22	166.72	
	23255	784.5	-7.55	32.11	22.41	174.18	
	23205	779.5	-14.55	32.43	15.73	37.41	V
	23230	782.0	-14.28	32.42	15.99	39.72	
	23255	784.5	-13.81	32.46	16.50	44.67	
Channel Bandwidth: 5 MHz / 64QAM							
X	23205	779.5	-9.12	32.24	20.97	125.03	H
	23230	782.0	-8.82	32.17	21.20	131.83	
	23255	784.5	-8.57	32.11	21.39	137.72	
	23205	779.5	-15.57	32.43	14.71	29.58	V
	23230	782.0	-15.30	32.42	14.97	31.41	
	23255	784.5	-14.83	32.46	15.48	35.32	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23230	782.0	-6.60	32.17	23.42	219.79	H
	23230	782.0	-13.10	32.42	17.17	52.12	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23230	782.0	-7.83	32.17	22.19	165.58	H
	23230	782.0	-14.33	32.42	15.94	39.26	V
Channel Bandwidth: 10 MHz / 64QAM							
X	23230	782.0	-8.80	32.17	21.22	132.43	H
	23230	782.0	-15.30	32.42	14.97	31.41	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 17							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23755	706.5	-4.71	30.36	23.50	223.87	H
	23790	710.0	-4.66	30.17	23.36	216.77	
	23825	713.5	-4.83	30.17	23.19	208.45	
	23755	706.5	-12.61	32.03	17.27	53.33	V
	23790	710.0	-12.69	31.98	17.14	51.76	
	23825	713.5	-12.98	32.06	16.93	49.32	
Channel Bandwidth: 5 MHz / 16QAM							
X	23755	706.5	-5.70	30.36	22.51	178.24	H
	23790	710.0	-5.65	30.17	22.37	172.58	
	23825	713.5	-5.82	30.17	22.20	165.96	
	23755	706.5	-13.60	32.03	16.28	42.46	V
	23790	710.0	-13.68	31.98	16.15	41.21	
	23825	713.5	-13.97	32.06	15.94	39.26	
Channel Bandwidth: 5 MHz / 64QAM							
X	23755	706.5	-6.69	30.36	21.52	141.91	H
	23790	710.0	-6.64	30.17	21.38	137.40	
	23825	713.5	-6.81	30.17	21.21	132.13	
	23755	706.5	-14.59	32.03	15.29	33.81	V
	23790	710.0	-14.67	31.98	15.16	32.81	
	23825	713.5	-14.96	32.06	14.95	31.26	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 17							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23780	709.0	-4.27	30.17	23.75	237.14	H
	23790	710.0	-4.41	30.17	23.61	229.61	
	23800	711.0	-4.59	30.18	23.44	220.80	
	23780	709.0	-12.29	31.96	17.52	56.49	V
	23790	710.0	-12.44	31.98	17.39	54.83	
	23800	711.0	-12.70	32.03	17.18	52.24	
Channel Bandwidth: 10 MHz / 16QAM							
X	23780	709.0	-5.29	30.17	22.73	187.50	H
	23790	710.0	-5.43	30.17	22.59	181.55	
	23800	711.0	-5.61	30.18	22.42	174.58	
	23780	709.0	-13.31	31.96	16.50	44.67	V
	23790	710.0	-13.46	31.98	16.37	43.35	
	23800	711.0	-13.72	32.03	16.16	41.30	
Channel Bandwidth: 10 MHz / 64QAM							
X	23780	709.0	-6.31	30.17	21.71	148.25	H
	23790	710.0	-6.45	30.17	21.57	143.55	
	23800	711.0	-6.63	30.18	21.40	138.04	
	23780	709.0	-14.33	31.96	15.48	35.32	V
	23790	710.0	-14.48	31.98	15.35	34.28	
	23800	711.0	-14.74	32.03	15.14	32.66	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	1312	1712.4	-11.49	36.29	24.80	302.00	H
	1413	1732.6	-11.48	36.69	25.21	331.89	
	1513	1752.6	-12.24	36.98	24.74	297.85	
	1312	1712.4	-18.39	37.11	18.72	74.47	V
	1413	1732.6	-18.49	37.60	19.11	81.47	
	1513	1752.6	-19.07	37.65	18.58	72.11	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19957	1710.7	-19.33	36.45	17.12	51.52	H
	20175	1732.5	-19.93	36.80	16.87	48.64	
	20393	1754.3	-19.92	36.94	17.02	50.35	
	19957	1710.7	-13.94	37.28	23.34	215.77	V
	20175	1732.5	-14.45	37.63	23.18	207.97	
	20393	1754.3	-14.38	37.64	23.26	211.84	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	19957	1710.7	-20.36	36.45	16.09	40.64	H
	20175	1732.5	-20.96	36.80	15.84	38.37	
	20393	1754.3	-20.95	36.94	15.99	39.72	
	19957	1710.7	-14.97	37.28	22.31	170.22	V
	20175	1732.5	-15.48	37.63	22.15	164.06	
	20393	1754.3	-15.41	37.64	22.23	167.11	
Channel Bandwidth: 1.4 MHz / 64QAM							
Y	19957	1710.7	-21.88	36.45	14.57	28.64	H
	20175	1732.5	-22.48	36.80	14.32	27.04	
	20393	1754.3	-22.47	36.94	14.47	27.99	
	19957	1710.7	-16.49	37.28	20.79	119.95	V
	20175	1732.5	-17.00	37.63	20.63	115.61	
	20393	1754.3	-16.93	37.64	20.71	117.76	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19965	1711.5	-19.05	36.45	17.40	54.95	H
	20175	1732.5	-19.65	36.80	17.15	51.88	
	20385	1753.5	-19.64	36.94	17.30	53.70	
	19965	1711.5	-13.66	37.28	23.62	230.14	V
	20175	1732.5	-14.17	37.63	23.46	221.82	
	20385	1753.5	-14.10	37.64	23.54	225.94	
Channel Bandwidth: 3 MHz / 16QAM							
Y	19965	1711.5	-20.07	36.45	16.38	43.45	H
	20175	1732.5	-20.67	36.80	16.13	41.02	
	20385	1753.5	-20.66	36.94	16.28	42.46	
	19965	1711.5	-14.68	37.28	22.60	181.97	V
	20175	1732.5	-15.19	37.63	22.44	175.39	
	20385	1753.5	-15.12	37.64	22.52	178.65	
Channel Bandwidth: 3 MHz / 64QAM							
Y	19965	1711.5	-21.04	36.45	15.41	34.75	H
	20175	1732.5	-21.64	36.80	15.16	32.81	
	20385	1753.5	-21.63	36.94	15.31	33.96	
	19965	1711.5	-15.65	37.28	21.63	145.55	V
	20175	1732.5	-16.16	37.63	21.47	140.28	
	20385	1753.5	-16.09	37.64	21.55	142.89	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19975	1712.5	-18.79	36.45	17.66	58.34	H
	20175	1732.5	-19.39	36.80	17.41	55.08	
	20375	1752.5	-19.38	36.94	17.56	57.02	
	19975	1712.5	-13.40	37.28	23.88	244.34	V
	20175	1732.5	-13.91	37.63	23.72	235.50	
	20375	1752.5	-13.84	37.64	23.80	239.88	
Channel Bandwidth: 5 MHz / 16QAM							
Y	19975	1712.5	-19.77	36.45	16.68	46.56	H
	20175	1732.5	-20.37	36.80	16.43	43.95	
	20375	1752.5	-20.36	36.94	16.58	45.50	
	19975	1712.5	-14.38	37.28	22.90	194.98	V
	20175	1732.5	-14.89	37.63	22.74	187.93	
	20375	1752.5	-14.82	37.64	22.82	191.43	
Channel Bandwidth: 5 MHz / 64QAM							
Y	19975	1712.5	-20.79	36.45	15.66	36.81	H
	20175	1732.5	-21.39	36.80	15.41	34.75	
	20375	1752.5	-21.38	36.94	15.56	35.97	
	19975	1712.5	-15.40	37.28	21.88	154.17	V
	20175	1732.5	-15.91	37.63	21.72	148.59	
	20375	1752.5	-15.84	37.64	21.80	151.36	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20000	1715.0	-18.71	36.64	17.93	62.09	H
	20175	1732.5	-19.12	36.80	17.68	58.61	
	20350	1750.0	-18.97	36.80	17.83	60.67	
	20000	1715.0	-13.29	37.44	24.15	260.02	V
	20175	1732.5	-13.64	37.63	23.99	250.61	
	20350	1750.0	-13.57	37.64	24.07	255.27	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20000	1715.0	-19.70	36.64	16.94	49.43	H
	20175	1732.5	-20.11	36.80	16.69	46.67	
	20350	1750.0	-19.96	36.80	16.84	48.31	
	20000	1715.0	-14.28	37.44	23.16	207.01	V
	20175	1732.5	-14.63	37.63	23.00	199.53	
	20350	1750.0	-14.56	37.64	23.08	203.24	
Channel Bandwidth: 10 MHz / 64QAM							
Y	20000	1715.0	-20.73	36.64	15.91	38.99	H
	20175	1732.5	-21.14	36.80	15.66	36.81	
	20350	1750.0	-20.99	36.80	15.81	38.11	
	20000	1715.0	-15.31	37.44	22.13	163.31	V
	20175	1732.5	-15.66	37.63	21.97	157.40	
	20350	1750.0	-15.59	37.64	22.05	160.32	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20025	1717.5	-18.21	36.45	18.24	66.68	H
	20175	1732.5	-18.81	36.80	17.99	62.95	
	20325	1747.5	-18.80	36.94	18.14	65.16	
	20025	1717.5	-12.82	37.28	24.46	279.25	V
	20175	1732.5	-13.33	37.63	24.30	269.15	
	20325	1747.5	-13.26	37.64	24.38	274.16	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20025	1717.5	-19.44	36.45	17.01	50.23	H
	20175	1732.5	-20.04	36.80	16.76	47.42	
	20325	1747.5	-20.03	36.94	16.91	49.09	
	20025	1717.5	-14.05	37.28	23.23	210.38	V
	20175	1732.5	-14.56	37.63	23.07	202.77	
	20325	1747.5	-14.49	37.64	23.15	206.54	
Channel Bandwidth: 15 MHz / 64QAM							
Y	20025	1717.5	-20.50	36.45	15.95	39.36	H
	20175	1732.5	-21.10	36.80	15.70	37.15	
	20325	1747.5	-21.09	36.94	15.85	38.46	
	20025	1717.5	-15.11	37.28	22.17	164.82	V
	20175	1732.5	-15.62	37.63	22.01	158.85	
	20325	1747.5	-15.55	37.64	22.09	161.81	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20050	1720.0	-17.96	36.45	18.49	70.63	H
	20175	1732.5	-18.56	36.80	18.24	66.68	
	20300	1745.0	-18.55	36.94	18.39	69.02	
	20050	1720.0	-12.57	37.28	24.71	295.80	V
	20175	1732.5	-13.08	37.63	24.55	285.10	
	20300	1745.0	-13.01	37.64	24.63	290.40	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20050	1720.0	-18.98	36.45	17.47	55.85	H
	20175	1732.5	-19.58	36.80	17.22	52.72	
	20300	1745.0	-19.57	36.94	17.37	54.58	
	20050	1720.0	-13.59	37.28	23.69	233.88	V
	20175	1732.5	-14.10	37.63	23.53	225.42	
	20300	1745.0	-14.03	37.64	23.61	229.61	
Channel Bandwidth: 20 MHz / 64QAM							
Y	20050	1720.0	-20.01	36.45	16.44	44.06	H
	20175	1732.5	-20.61	36.80	16.19	41.59	
	20300	1745.0	-20.60	36.94	16.34	43.05	
	20050	1720.0	-14.62	37.28	22.66	184.50	V
	20175	1732.5	-15.13	37.63	22.50	177.83	
	20300	1745.0	-15.06	37.64	22.58	181.13	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup





4.2.3 Test Procedure


Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

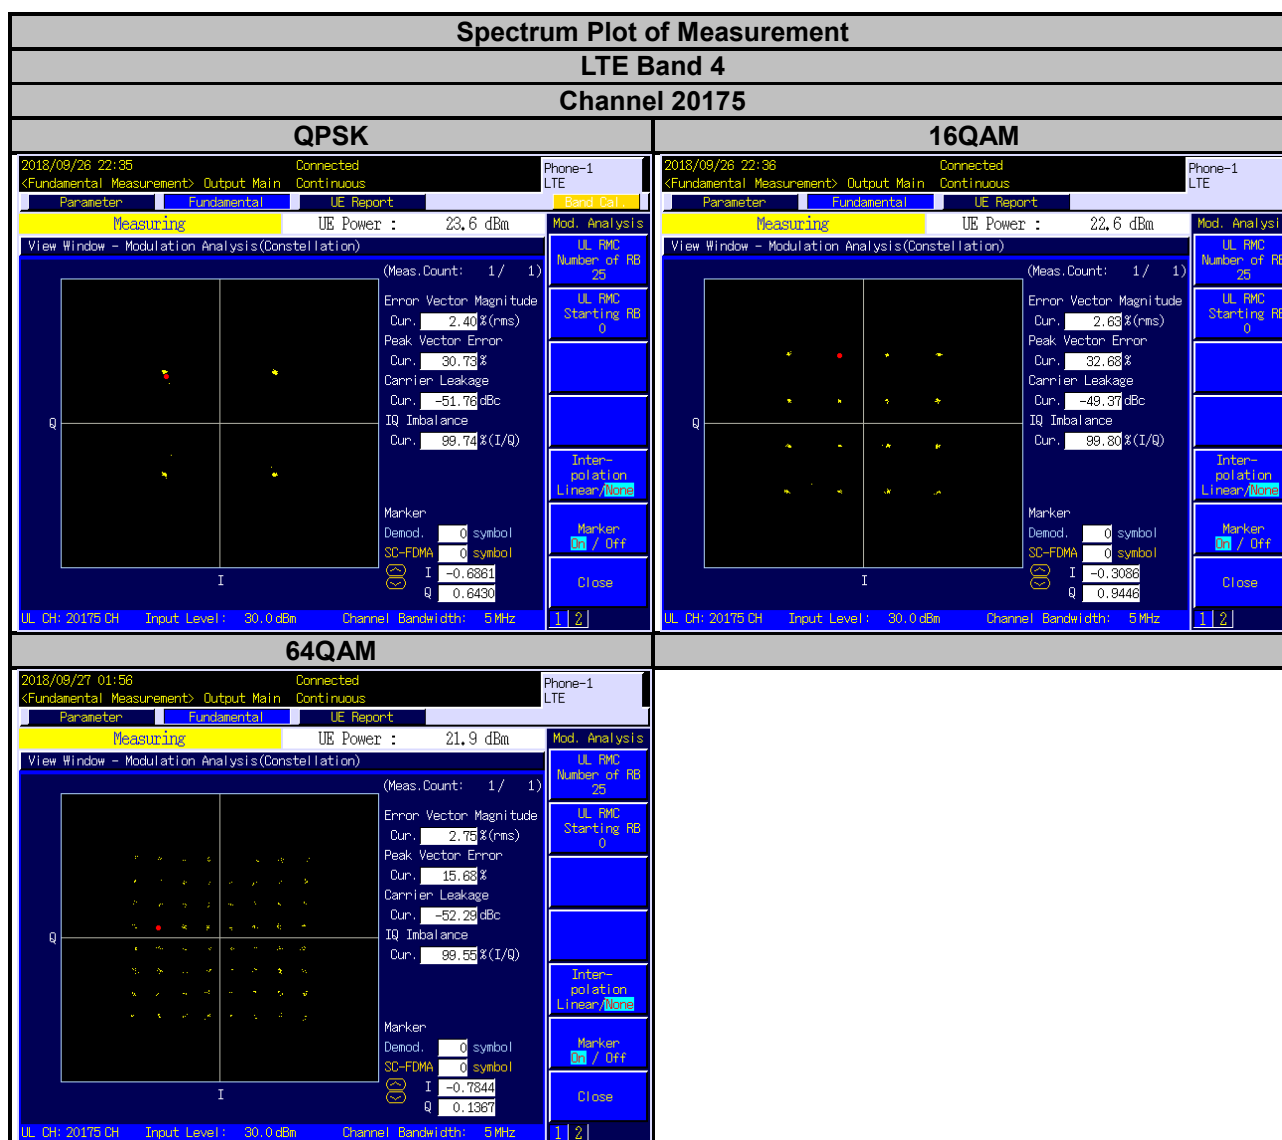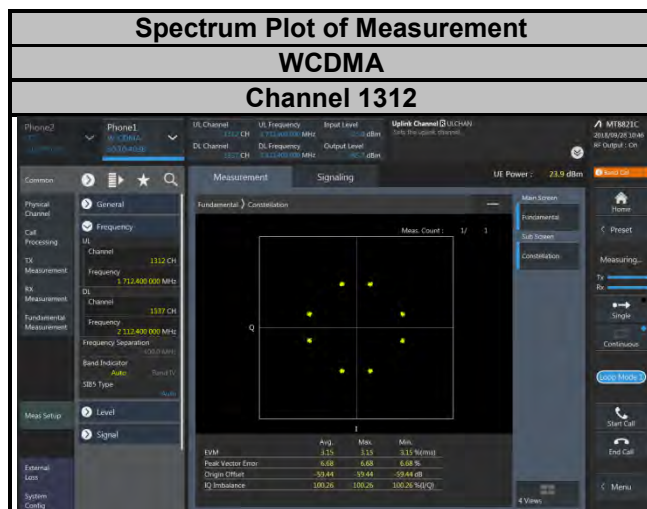

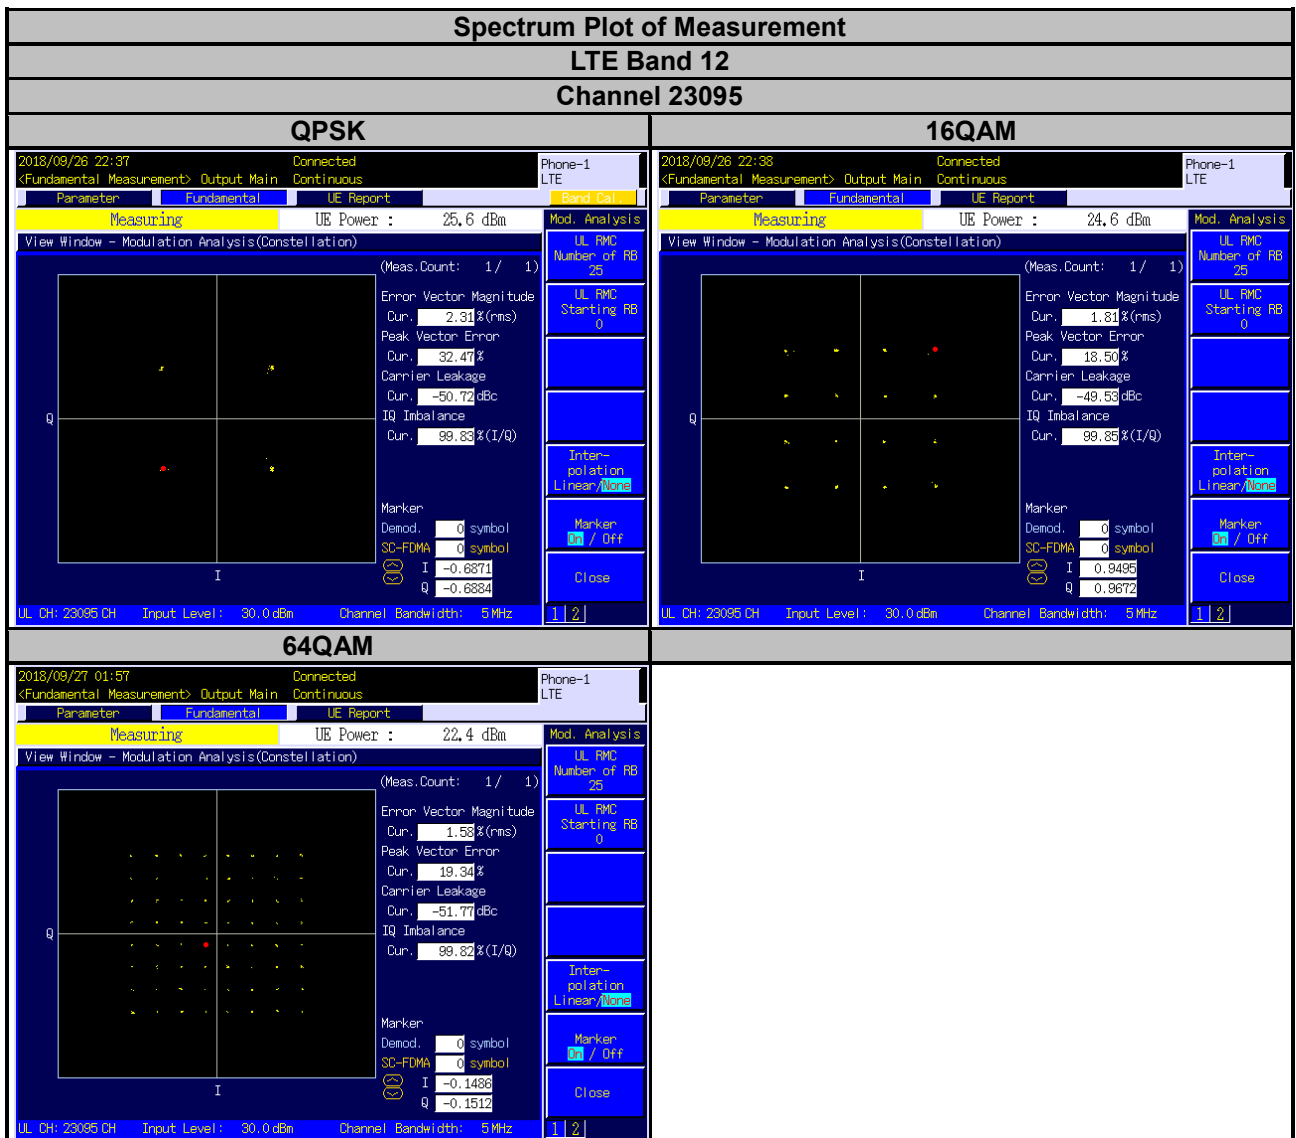

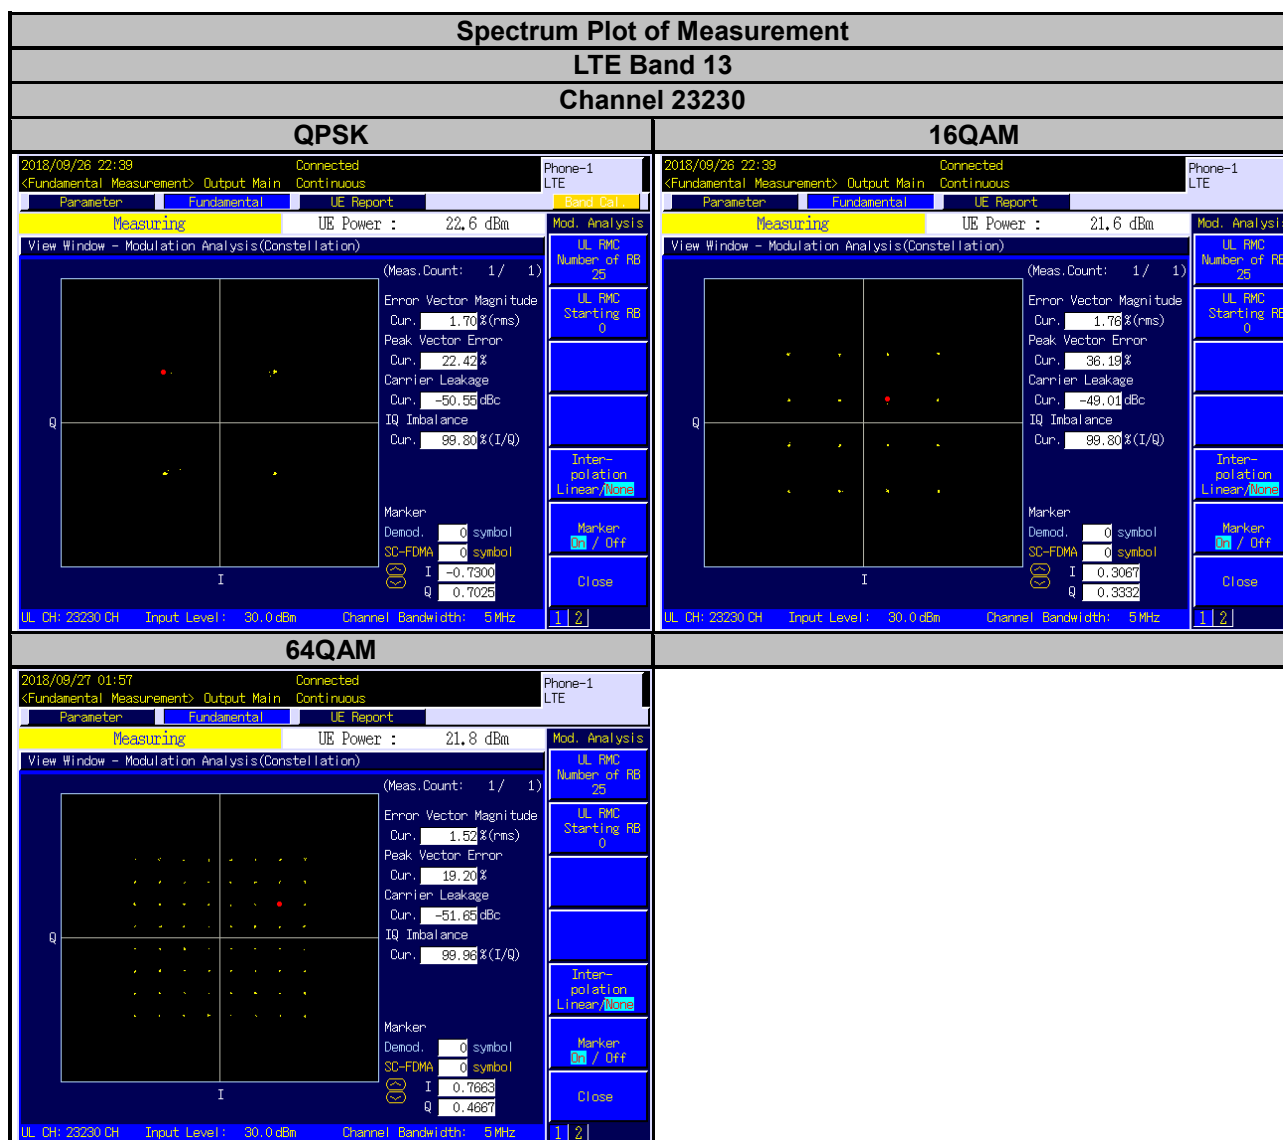

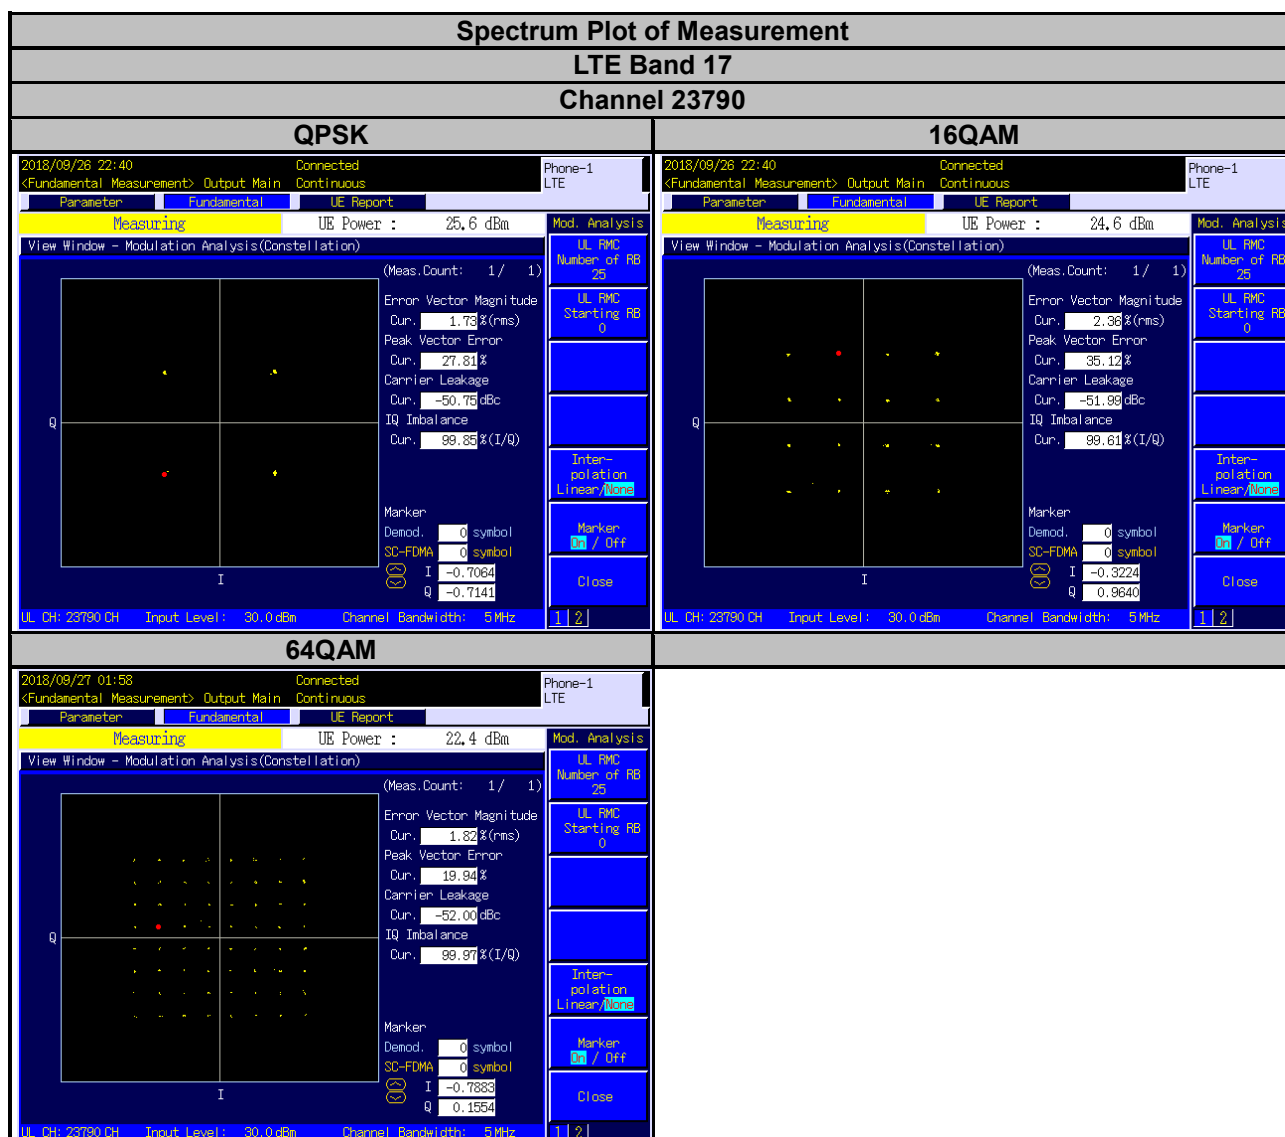

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

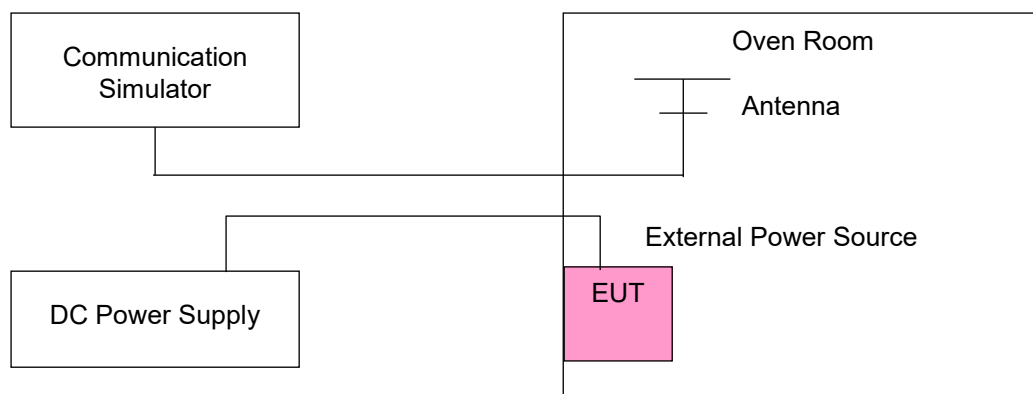

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1712.400001	0.001	1752.600003	0.002	2.5
3.27	1712.400002	0.001	1752.600004	0.002	2.5
4.43	1712.400003	0.002	1752.600003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1712.400004	0.002	1752.600002	0.001	2.5
-20	1712.400003	0.002	1752.600001	0.001	2.5
-10	1712.400002	0.001	1752.600002	0.001	2.5
0	1712.400002	0.001	1752.600004	0.002	2.5
10	1712.400002	0.001	1752.600003	0.002	2.5
20	1712.399998	-0.001	1752.599997	-0.002	2.5
30	1712.399997	-0.002	1752.599997	-0.002	2.5
40	1712.399999	-0.001	1752.599997	-0.002	2.5
50	1712.399999	-0.001	1752.599997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1710.700004	0.002	1754.300002	0.001	2.5
3.27	1710.700002	0.001	1754.300001	0.001	2.5
4.43	1710.700002	0.001	1754.300004	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1710.700004	0.002	1754.300004	0.002	2.5
-20	1710.700004	0.002	1754.300002	0.001	2.5
-10	1710.700003	0.002	1754.300004	0.002	2.5
0	1710.700002	0.001	1754.300003	0.002	2.5
10	1710.700004	0.002	1754.300004	0.002	2.5
20	1710.699998	-0.001	1754.299997	-0.002	2.5
30	1710.699996	-0.002	1754.299999	-0.001	2.5
40	1710.699998	-0.001	1754.299996	-0.002	2.5
50	1710.699997	-0.002	1754.299999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1711.500001	0.001	1753.500001	0.001	2.5
3.27	1711.500002	0.001	1753.500001	0.001	2.5
4.43	1711.500004	0.002	1753.500003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1711.500001	0.001	1753.500002	0.001	2.5
-20	1711.500003	0.002	1753.500001	0.001	2.5
-10	1711.500001	0.001	1753.500003	0.002	2.5
0	1711.500004	0.002	1753.500002	0.001	2.5
10	1711.500003	0.002	1753.500002	0.001	2.5
20	1711.499998	-0.001	1753.499998	-0.001	2.5
30	1711.499996	-0.002	1753.499998	-0.001	2.5
40	1711.499998	-0.001	1753.499999	-0.001	2.5
50	1711.499998	-0.001	1753.499997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1712.500004	0.002	1752.500002	0.001	2.5
3.27	1712.500004	0.002	1752.500004	0.002	2.5
4.43	1712.500001	0.001	1752.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1712.500002	0.001	1752.500004	0.002	2.5
-20	1712.500001	0.001	1752.500004	0.002	2.5
-10	1712.500004	0.002	1752.500002	0.001	2.5
0	1712.500001	0.001	1752.500003	0.002	2.5
10	1712.500001	0.001	1752.500002	0.001	2.5
20	1712.499998	-0.001	1752.499996	-0.002	2.5
30	1712.499998	-0.001	1752.499996	-0.002	2.5
40	1712.499996	-0.002	1752.499998	-0.001	2.5
50	1712.499997	-0.002	1752.499996	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1715.000003	0.002	1750.000002	0.001	2.5
3.27	1715.000003	0.002	1750.000002	0.001	2.5
4.43	1715.000003	0.002	1750.000004	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1715.000004	0.002	1750.000004	0.002	2.5
-20	1715.000002	0.001	1750.000004	0.002	2.5
-10	1715.000004	0.002	1750.000002	0.001	2.5
0	1715.000001	0.001	1750.000002	0.001	2.5
10	1715.000002	0.001	1750.000003	0.002	2.5
20	1714.999997	-0.002	1749.999997	-0.002	2.5
30	1714.999998	-0.001	1749.999999	-0.001	2.5
40	1714.999996	-0.002	1749.999998	-0.001	2.5
50	1714.999997	-0.002	1749.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1717.500003	0.002	1747.500003	0.001	2.5
3.27	1717.500004	0.002	1747.500003	0.002	2.5
4.43	1717.500001	0.001	1747.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1717.500002	0.001	1747.500001	0.001	2.5
-20	1717.500003	0.002	1747.500004	0.002	2.5
-10	1717.500002	0.001	1747.500002	0.001	2.5
0	1717.500001	0.001	1747.500001	0.001	2.5
10	1717.500003	0.002	1747.500003	0.002	2.5
20	1717.499996	-0.002	1747.499998	-0.001	2.5
30	1717.499998	-0.001	1747.499998	-0.001	2.5
40	1717.499997	-0.002	1747.499997	-0.002	2.5
50	1717.499997	-0.002	1747.499999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	1720.000004	0.002	1745.000001	0.001	2.5
3.27	1720.000002	0.001	1745.000001	0.001	2.5
4.43	1720.000004	0.002	1745.000002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1720.000003	0.002	1745.000003	0.002	2.5
-20	1720.000002	0.001	1745.000004	0.002	2.5
-10	1720.000002	0.001	1745.000003	0.002	2.5
0	1720.000002	0.001	1745.000004	0.002	2.5
10	1720.000003	0.002	1745.000002	0.001	2.5
20	1719.999998	-0.001	1744.999997	-0.002	2.5
30	1719.999997	-0.002	1744.999998	-0.001	2.5
40	1719.999999	-0.001	1744.999998	-0.001	2.5
50	1719.999998	-0.001	1744.999998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	699.700003	0.004	715.300001	0.002	2.5
3.27	699.700002	0.002	715.300003	0.004	2.5
4.43	699.700004	0.005	715.300002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	699.700002	0.002	715.300003	0.004	2.5
-20	699.700003	0.004	715.300003	0.004	2.5
-10	699.700003	0.005	715.300004	0.006	2.5
0	699.700002	0.003	715.300002	0.002	2.5
10	699.700004	0.006	715.300004	0.005	2.5
20	699.699998	-0.004	715.299998	-0.003	2.5
30	699.699997	-0.005	715.299998	-0.002	2.5
40	699.699998	-0.003	715.299997	-0.004	2.5
50	699.699998	-0.004	715.299996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	700.500002	0.003	714.500002	0.002	2.5
3.27	700.500001	0.002	714.500003	0.003	2.5
4.43	700.500003	0.004	714.500004	0.005	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	700.500004	0.005	714.500004	0.005	2.5
-20	700.500003	0.005	714.500004	0.005	2.5
-10	700.500003	0.004	714.500002	0.003	2.5
0	700.500003	0.005	714.500002	0.003	2.5
10	700.500003	0.004	714.500003	0.004	2.5
20	700.499997	-0.004	714.499997	-0.004	2.5
30	700.499997	-0.004	714.499996	-0.005	2.5
40	700.499998	-0.004	714.499999	-0.002	2.5
50	700.499997	-0.004	714.499996	-0.006	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	701.500004	0.005	713.500002	0.003	2.5
3.27	701.500002	0.003	713.500003	0.004	2.5
4.43	701.500003	0.004	713.500003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	701.500003	0.004	713.500004	0.005	2.5
-20	701.500003	0.005	713.500002	0.002	2.5
-10	701.500003	0.004	713.500003	0.004	2.5
0	701.500002	0.003	713.500002	0.003	2.5
10	701.500003	0.004	713.500002	0.002	2.5
20	701.499997	-0.004	713.499998	-0.003	2.5
30	701.499996	-0.005	713.499998	-0.002	2.5
40	701.499998	-0.002	713.499997	-0.005	2.5
50	701.499997	-0.004	713.499998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	704.000001	0.002	711.000001	0.002	2.5
3.27	704.000001	0.001	711.000002	0.002	2.5
4.43	704.000001	0.002	711.000002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	704.000003	0.004	711.000001	0.001	2.5
-20	704.000002	0.003	711.000001	0.002	2.5
-10	704.000003	0.004	711.000003	0.005	2.5
0	704.000004	0.005	711.000003	0.004	2.5
10	704.000003	0.004	711.000003	0.004	2.5
20	703.999999	-0.001	710.999996	-0.005	2.5
30	703.999997	-0.004	710.999998	-0.003	2.5
40	703.999997	-0.005	710.999997	-0.004	2.5
50	703.999998	-0.002	710.999996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	779.500004	0.005	784.500003	0.003	2.5
3.27	779.500001	0.002	784.500003	0.003	2.5
4.43	779.500002	0.002	784.500002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	779.500001	0.002	784.500002	0.003	2.5
-20	779.500003	0.004	784.500002	0.002	2.5
-10	779.500003	0.004	784.500003	0.004	2.5
0	779.500003	0.004	784.500002	0.002	2.5
10	779.500004	0.005	784.500003	0.004	2.5
20	779.499997	-0.004	784.499997	-0.003	2.5
30	779.499999	-0.001	784.499996	-0.005	2.5
40	779.499997	-0.004	784.499998	-0.002	2.5
50	779.499998	-0.002	784.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
3.85	782.000002	0.003	2.5
3.27	782.000001	0.002	2.5
4.43	782.000003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	782.000003	0.004	2.5
-20	782.000002	0.003	2.5
-10	782.000002	0.003	2.5
0	782.000004	0.005	2.5
10	782.000004	0.004	2.5
20	781.999997	-0.003	2.5
30	781.999998	-0.003	2.5
40	781.999999	-0.001	2.5
50	781.999997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	706.500002	0.002	713.500002	0.003	2.5
3.27	706.500001	0.002	713.500002	0.002	2.5
4.43	706.500001	0.002	713.500001	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	706.500003	0.005	713.500002	0.002	2.5
-20	706.500003	0.004	713.500001	0.002	2.5
-10	706.500002	0.002	713.500003	0.005	2.5
0	706.500002	0.003	713.500004	0.005	2.5
10	706.500002	0.002	713.500003	0.004	2.5
20	706.499997	-0.004	713.499999	-0.002	2.5
30	706.499998	-0.003	713.499996	-0.005	2.5
40	706.499996	-0.005	713.499999	-0.002	2.5
50	706.499997	-0.005	713.499997	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.85	709.000003	0.004	711.000003	0.004	2.5
3.27	709.000003	0.005	711.000002	0.003	2.5
4.43	709.000002	0.002	711.000004	0.006	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.27 Vdc to 4.43 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	709.000002	0.002	711.000002	0.002	2.5
-20	709.000004	0.005	711.000003	0.004	2.5
-10	709.000003	0.004	711.000003	0.004	2.5
0	709.000003	0.004	711.000003	0.005	2.5
10	709.000003	0.004	711.000002	0.002	2.5
20	708.999996	-0.005	710.999996	-0.006	2.5
30	708.999998	-0.002	710.999998	-0.003	2.5
40	708.999997	-0.004	710.999997	-0.005	2.5
50	708.999998	-0.003	710.999997	-0.004	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

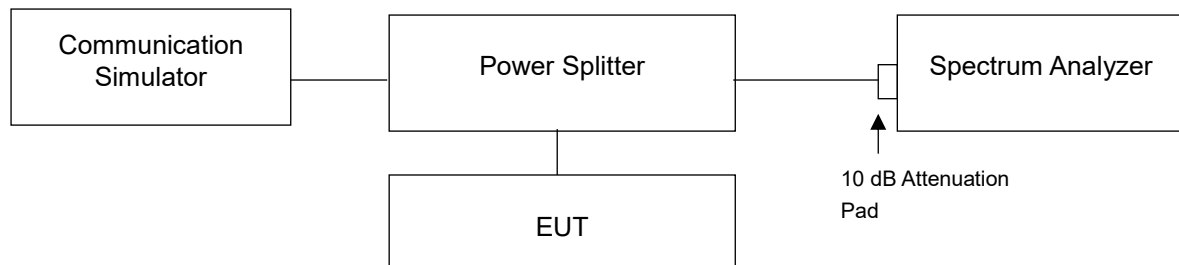


4.4.4 Test Result


WCDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
1312	1712.4	4.1372
1413	1732.6	4.1468
1513	1752.6	4.1477

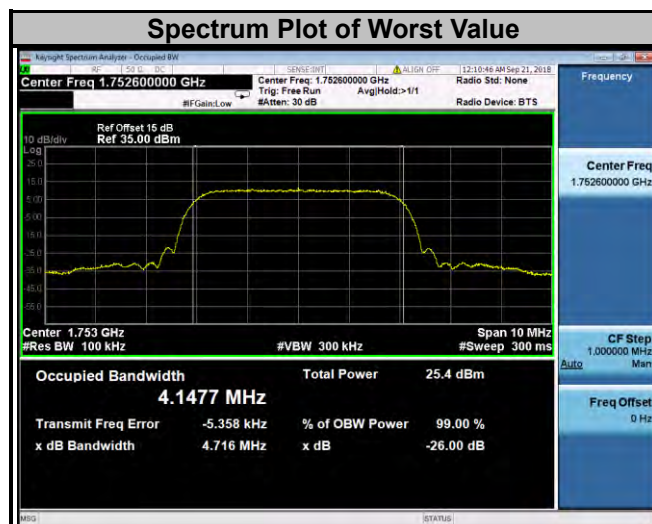


LTE Band 4									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19957	1710.7	1.0881	1.0902	1.0870	19965	1711.5	2.7024	2.6991	2.7077
20175	1732.5	1.0873	1.0881	1.0873	20175	1732.5	2.7032	2.7001	2.7050
20393	1754.3	1.0873	1.0863	1.0876	20385	1753.5	2.7028	2.6997	2.7040

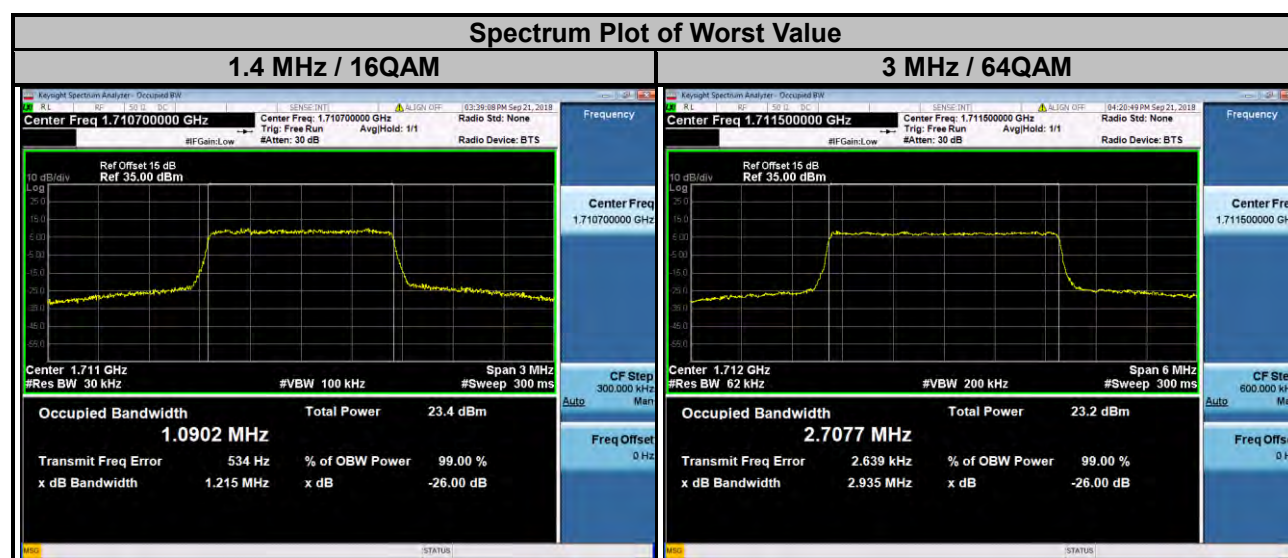

LTE Band 4									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19975	1712.5	4.4957	4.4931	4.4935	20000	1715.0	8.9638	8.9653	8.9611
20175	1732.5	4.4958	4.4971	4.4974	20175	1732.5	8.9839	8.9841	8.9778
20375	1752.5	4.4949	4.4963	4.4964	20350	1750.0	8.9678	8.9716	8.9633

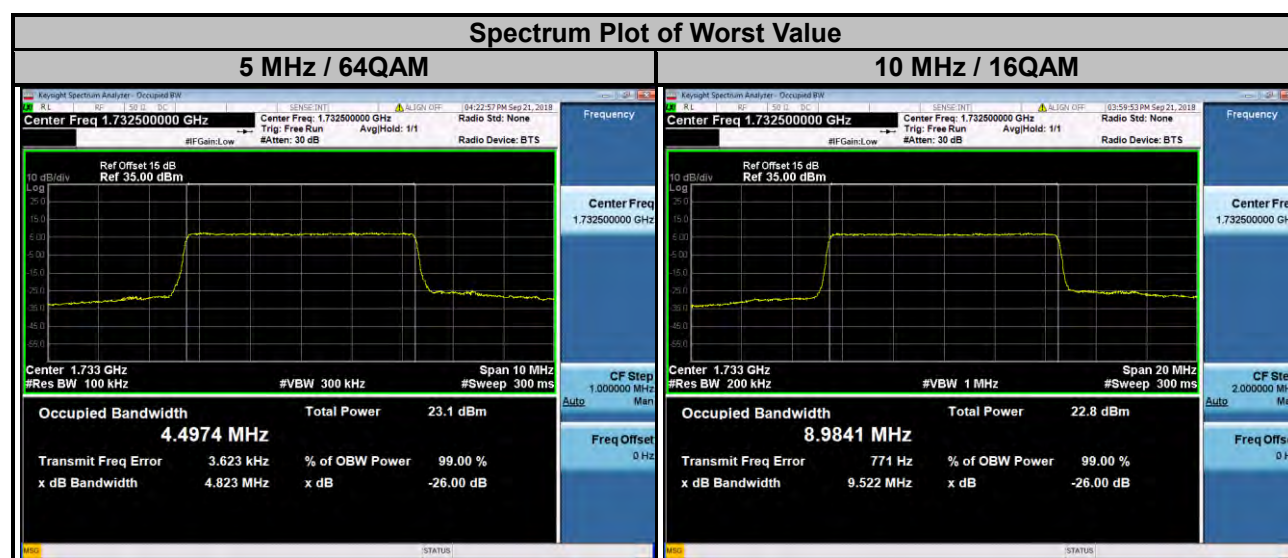


LTE Band 4									
Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20025	1717.5	13.434	13.421	13.411	20050	1720.0	17.891	17.904	17.909
20175	1732.5	13.487	13.472	13.466	20175	1732.5	17.981	17.997	17.994
20325	1747.5	13.433	13.421	13.412	20300	1745.0	17.874	17.894	17.877

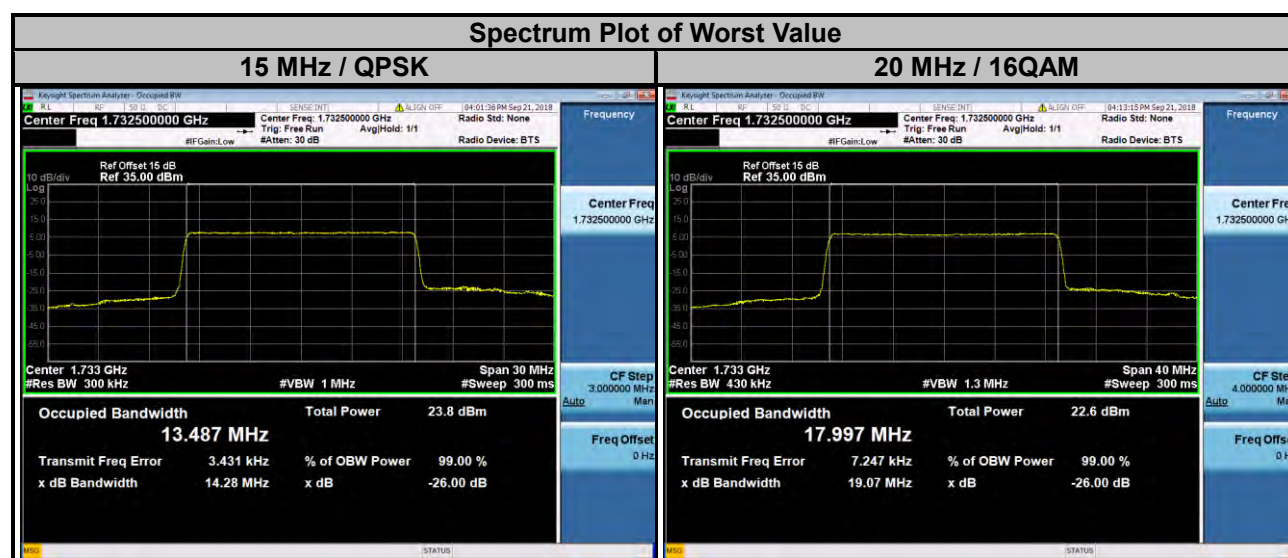


LTE Band 12

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23017	699.7	1.0881	1.0878	1.0874	23025	700.5	2.7018	2.6941	2.7049
23095	707.5	1.0878	1.0873	1.0870	23095	707.5	2.7037	2.6987	2.7025
23173	715.3	1.0872	1.0896	1.8065	23165	714.5	2.6989	2.6953	2.7011


Spectrum Plot of Worst Value

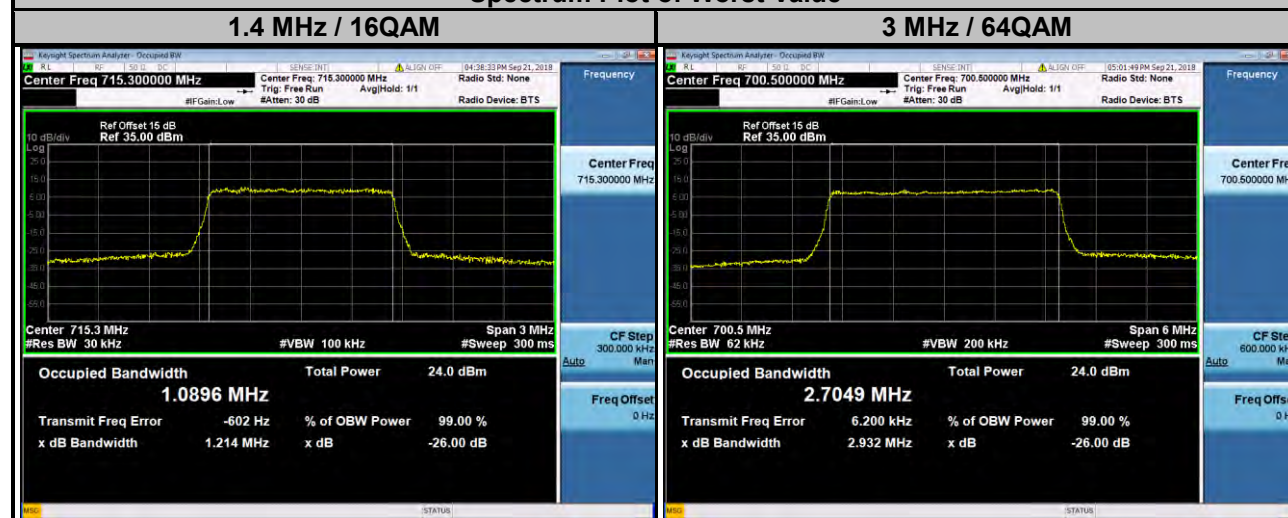

LTE Band 12									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23035	701.5	4.4878	4.4882	4.4889	23060	704.0	8.9424	8.9438	8.9374
23095	707.5	4.4959	4.4998	4.4980	23095	707.5	8.9806	8.9803	8.9756
23155	713.5	4.4864	4.4910	4.4919	23130	711.0	8.9732	8.9757	8.9720

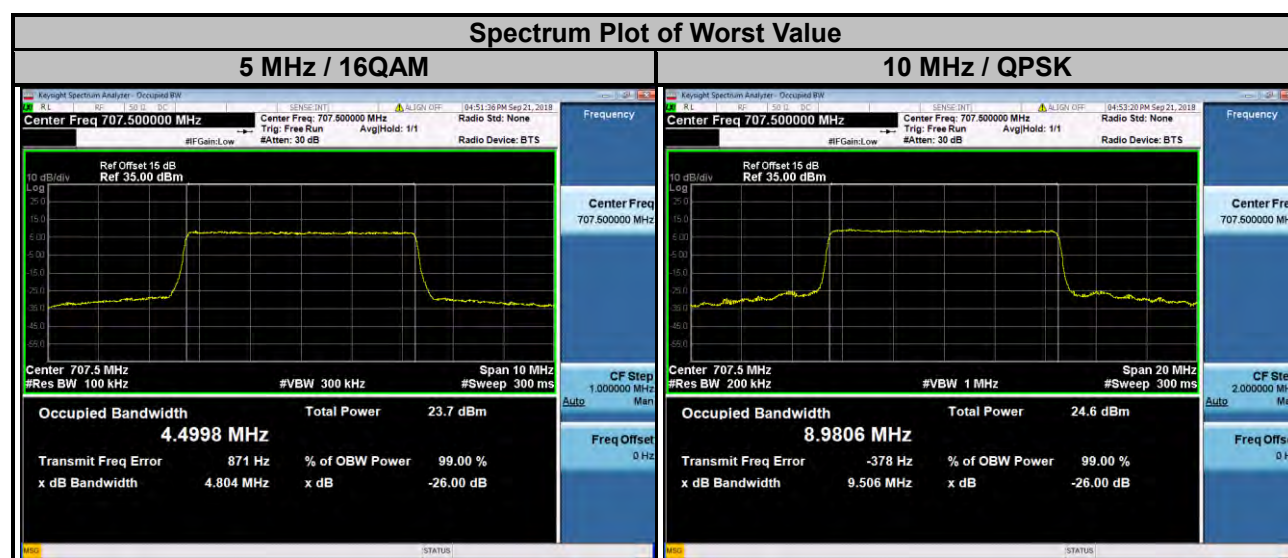


LTE Band 13									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23205	779.5	4.4912	4.4941	4.4955	23230	782.0	8.9569	8.9600	8.9524
23230	782.0	4.4854	4.4870	4.4904					
23255	784.5	4.4938	4.4928	4.4966					

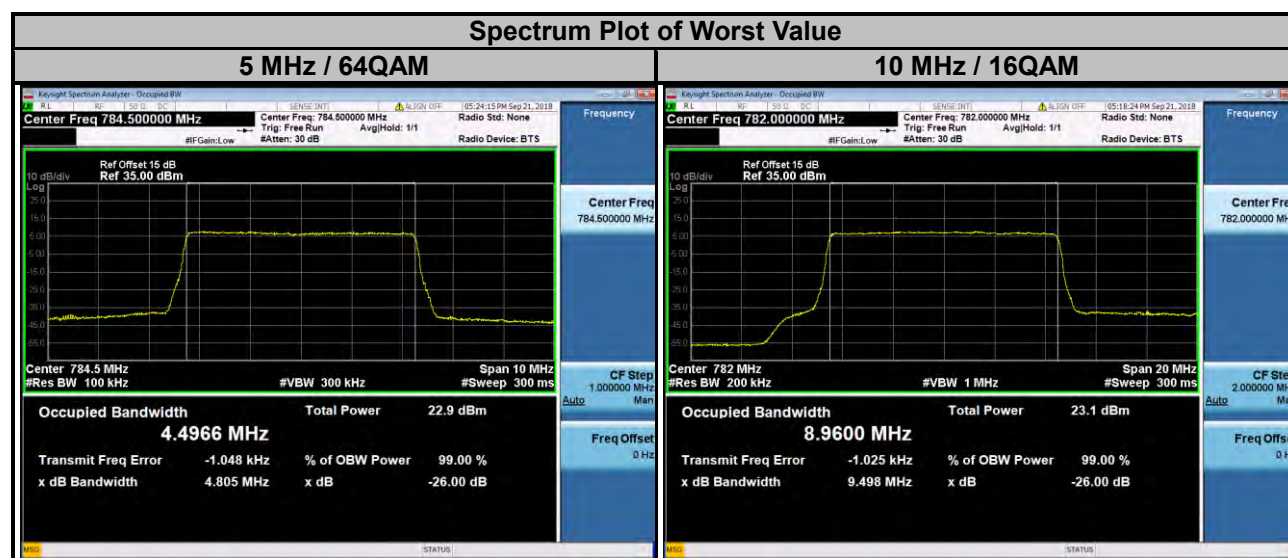

LTE Band 17

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23755	706.5	4.4953	4.4947	4.4969	23780	709.0	8.9852	8.9884	8.9832
23790	710.0	4.4939	4.4957	4.4976	23790	710.0	8.9820	8.9873	8.9822
23825	713.5	4.4856	4.4901	4.4925	23800	711.0	8.9765	8.9823	8.9830

Spectrum Plot of Worst Value

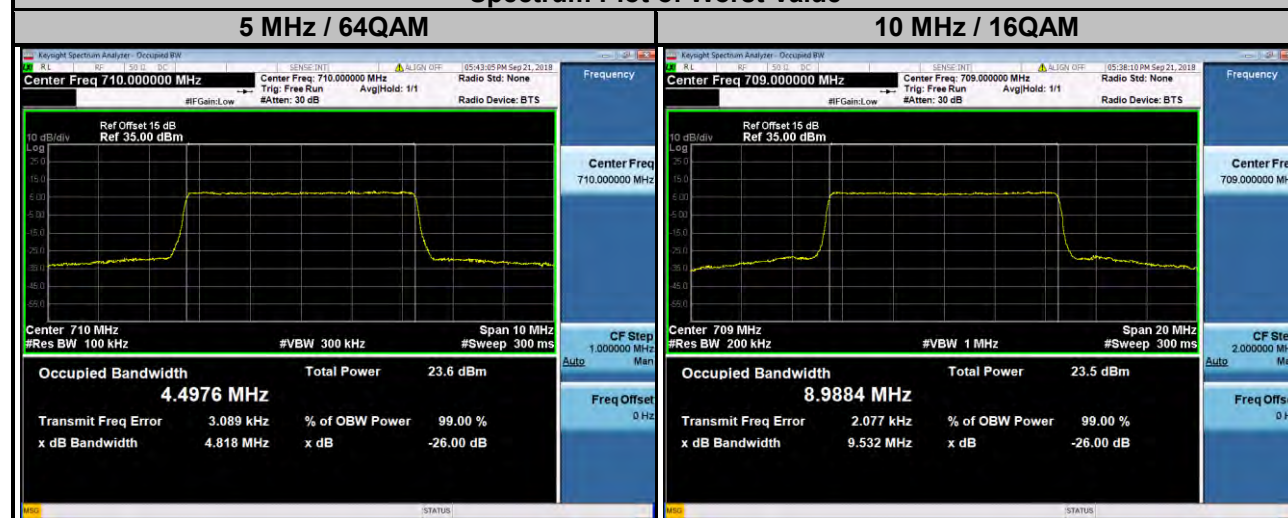

4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

For operations in the 698-787 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.


However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.



4.5.2 Test Setup

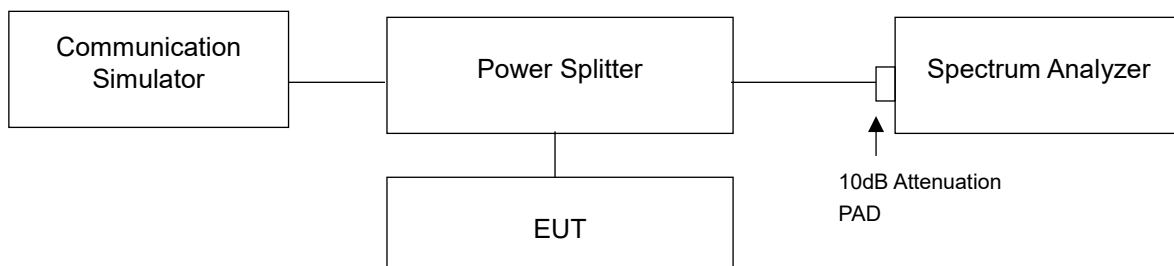



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max. trace plot into the test report.


4.5.4 Test Results

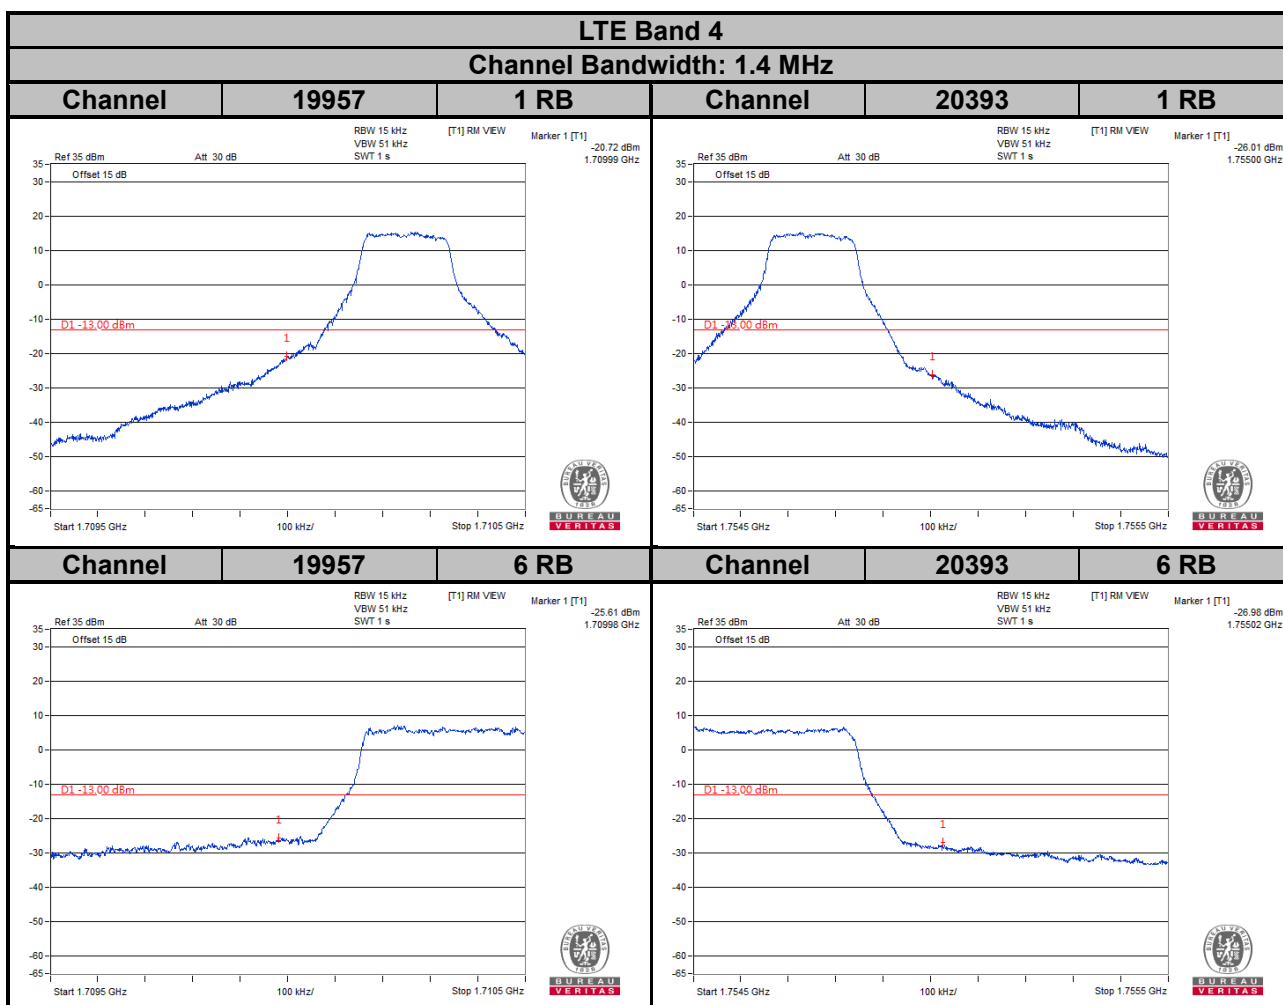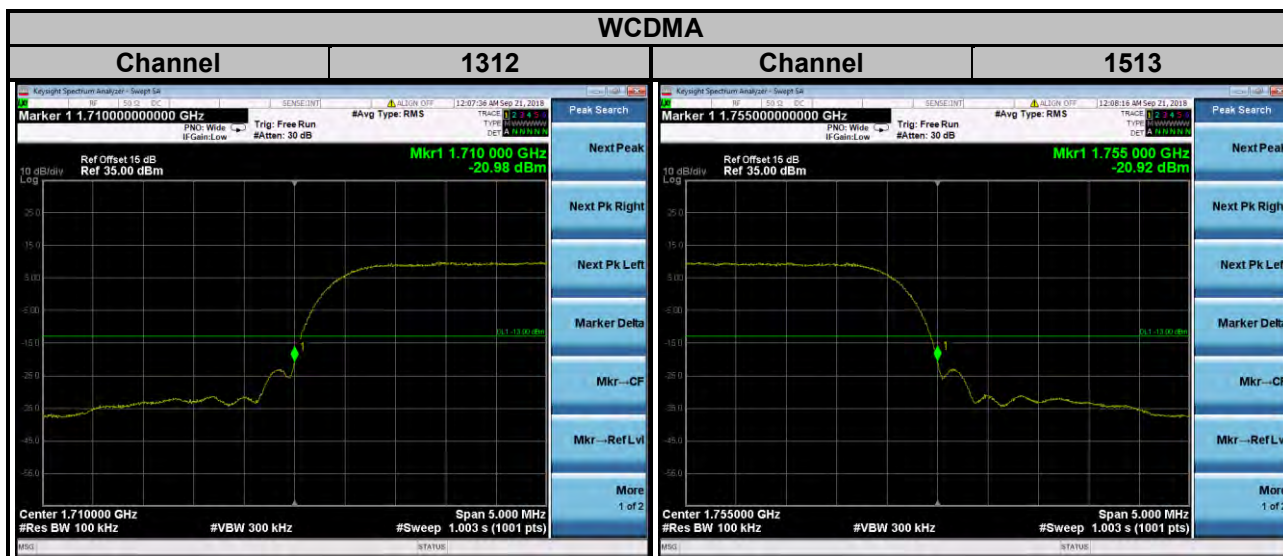


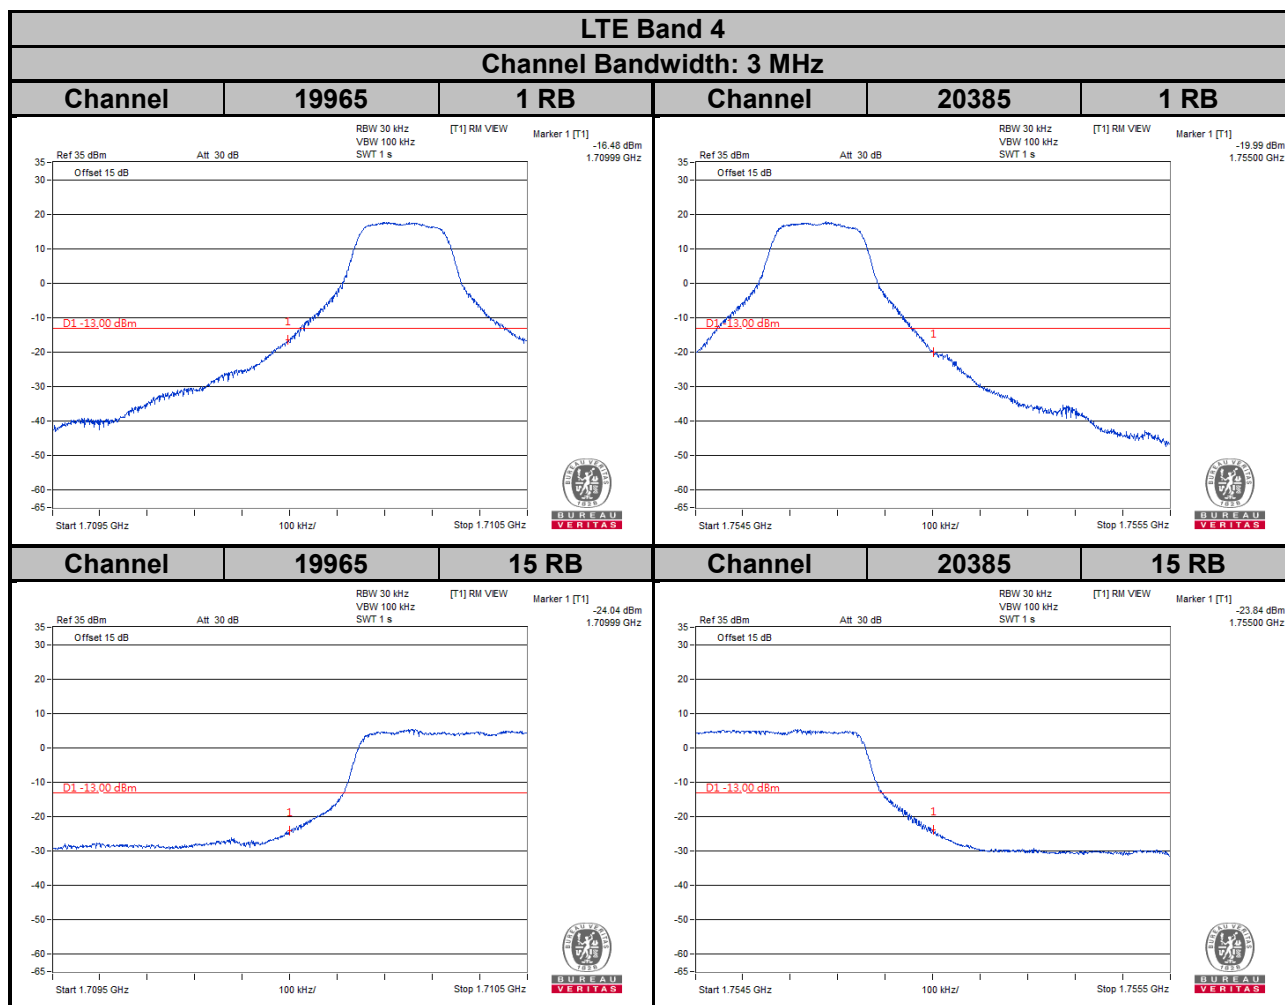


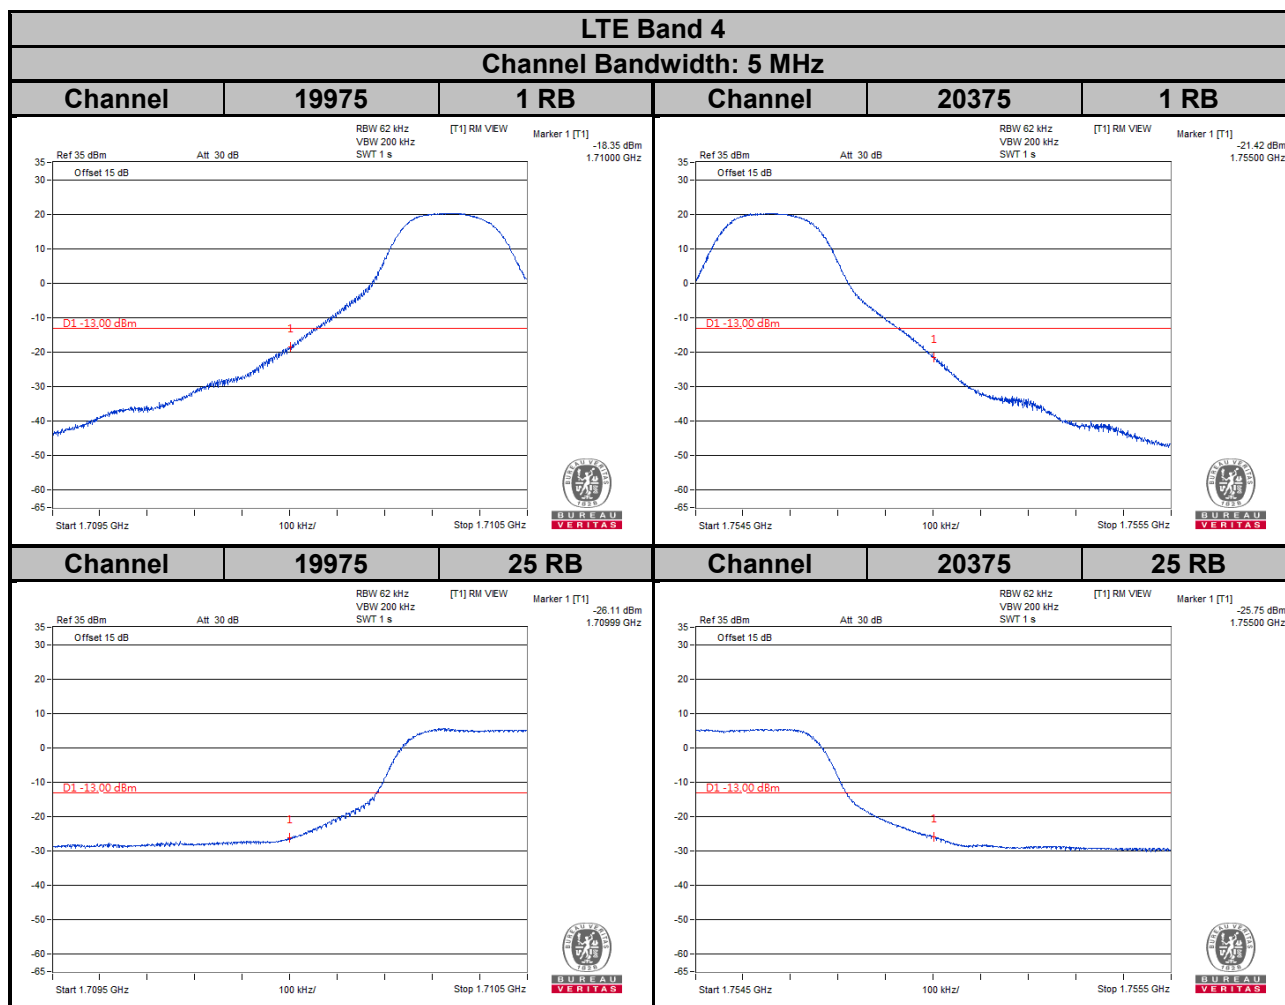


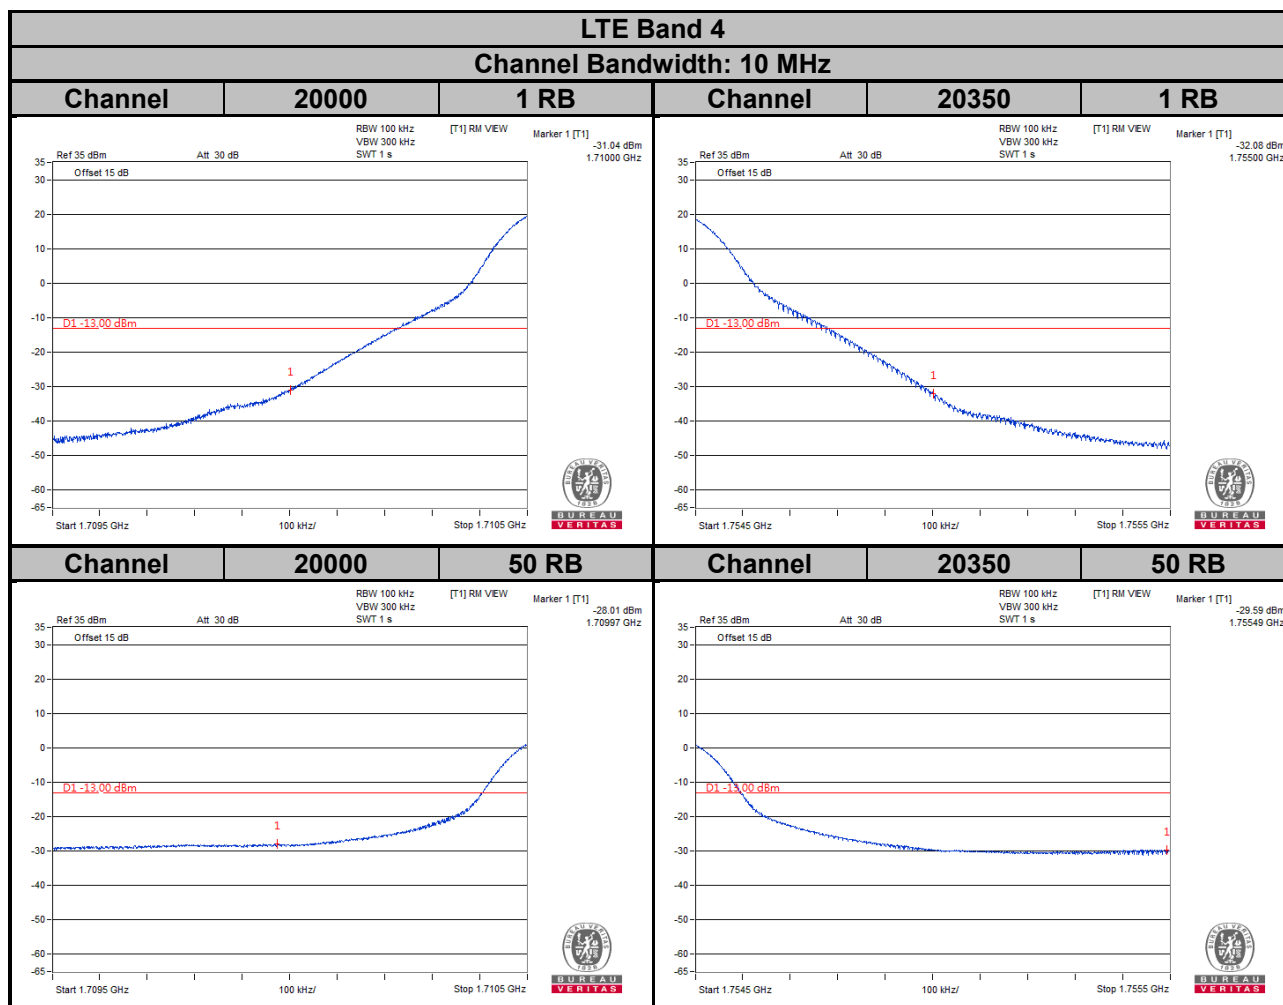


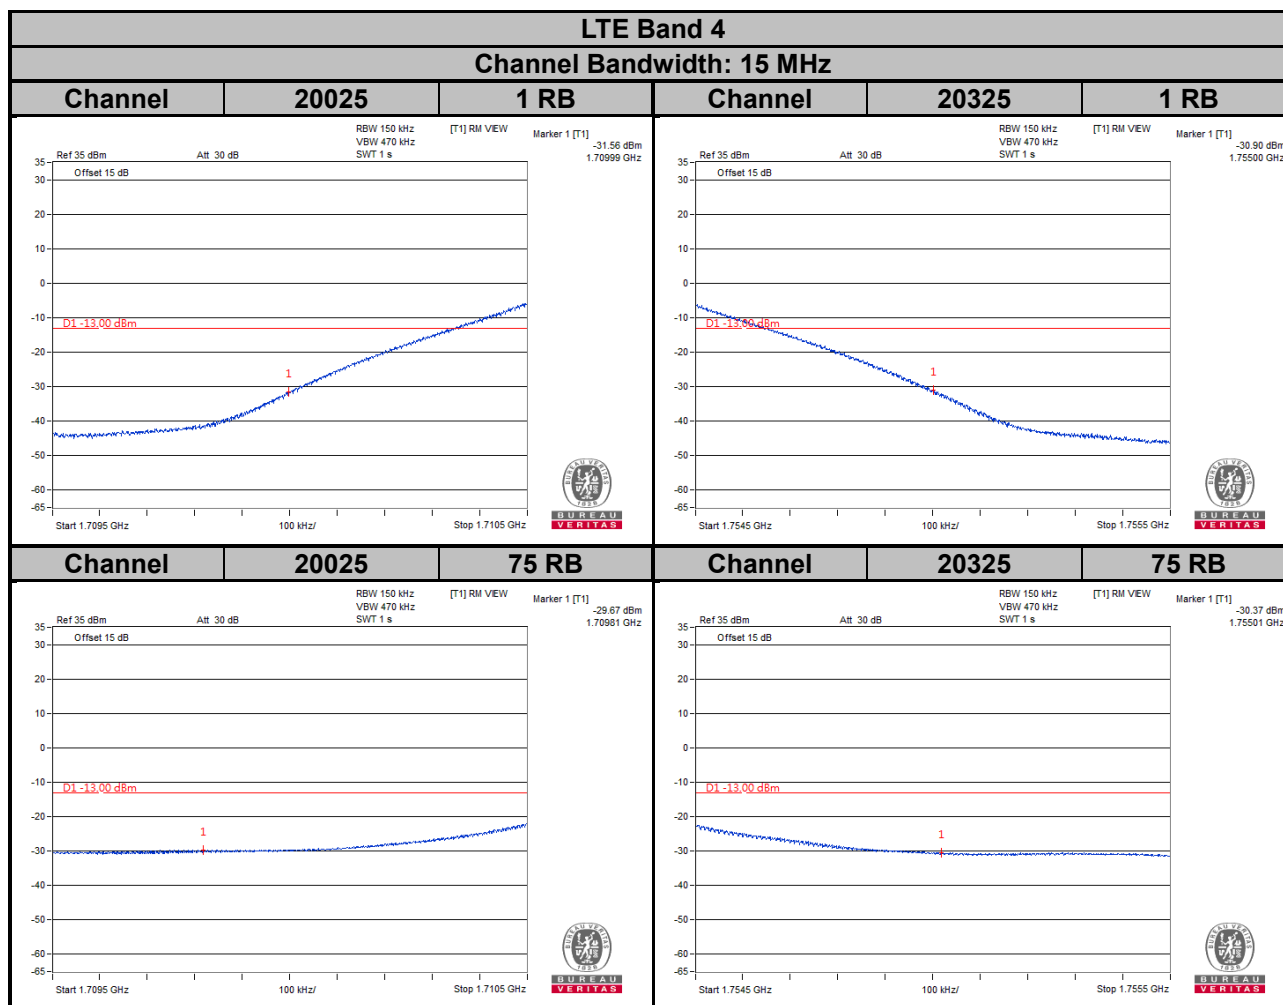


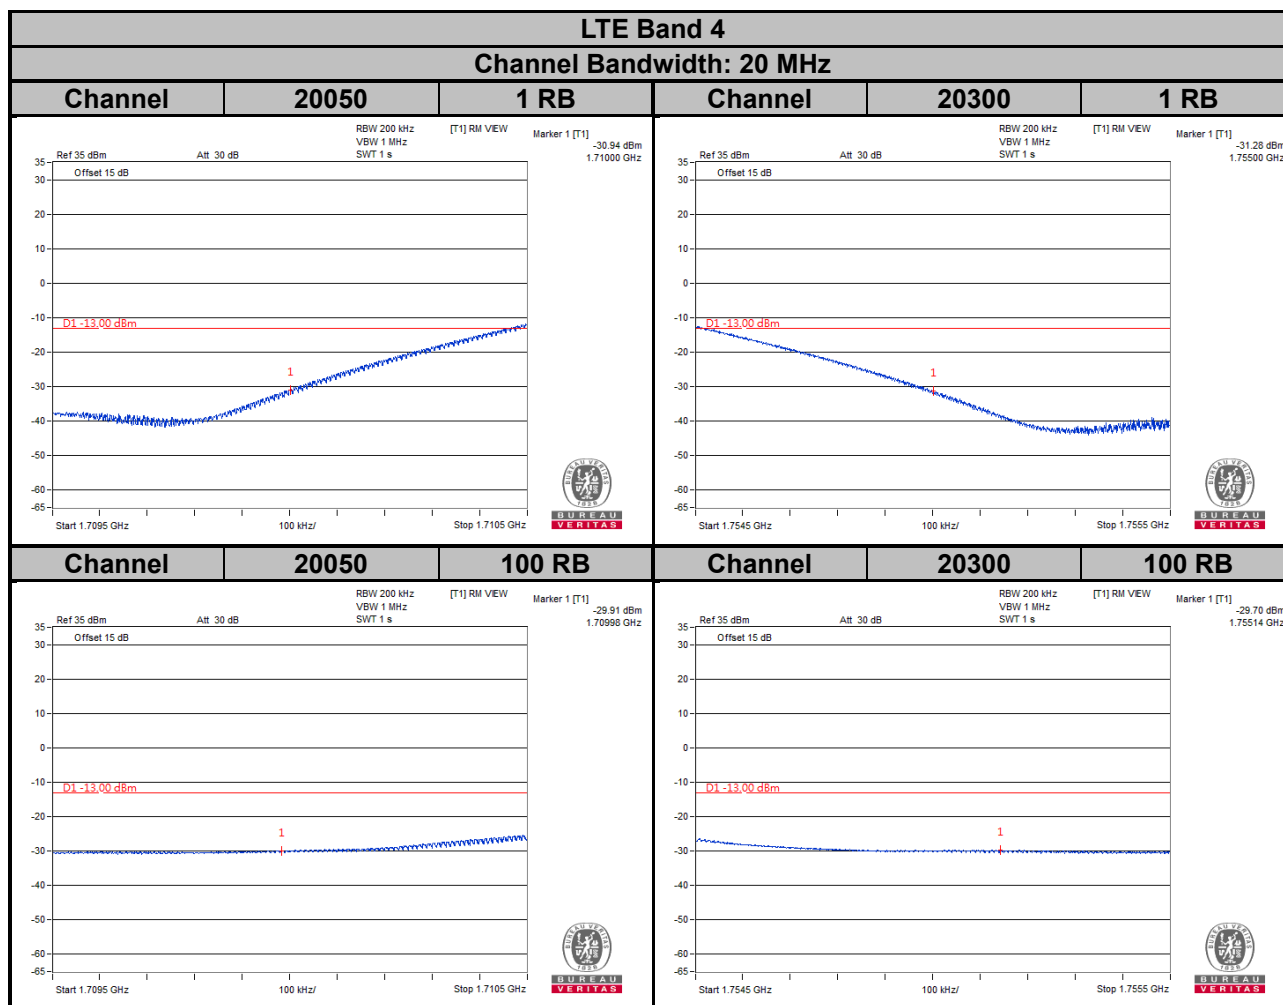


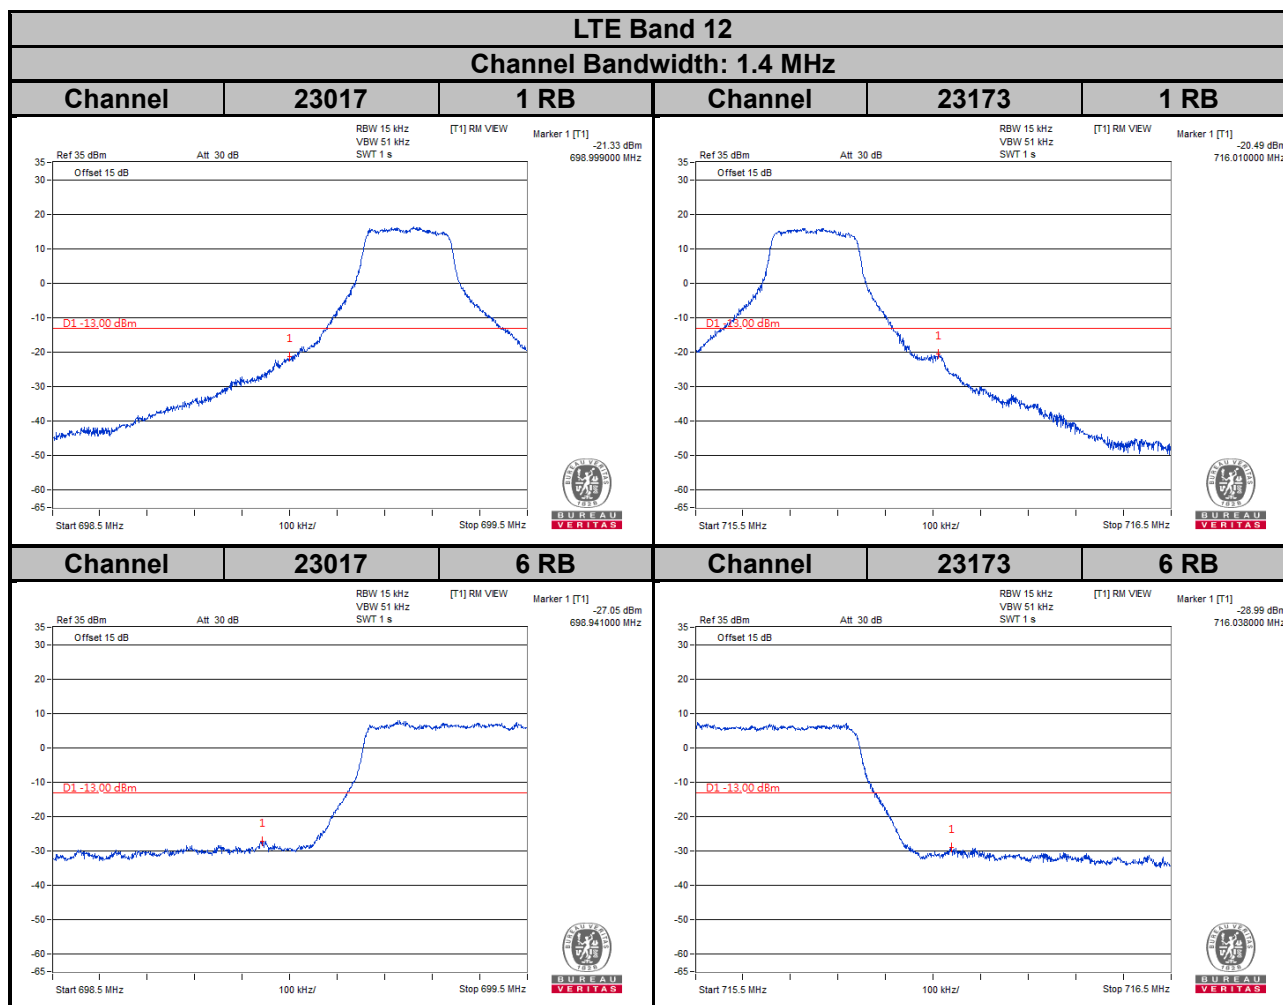


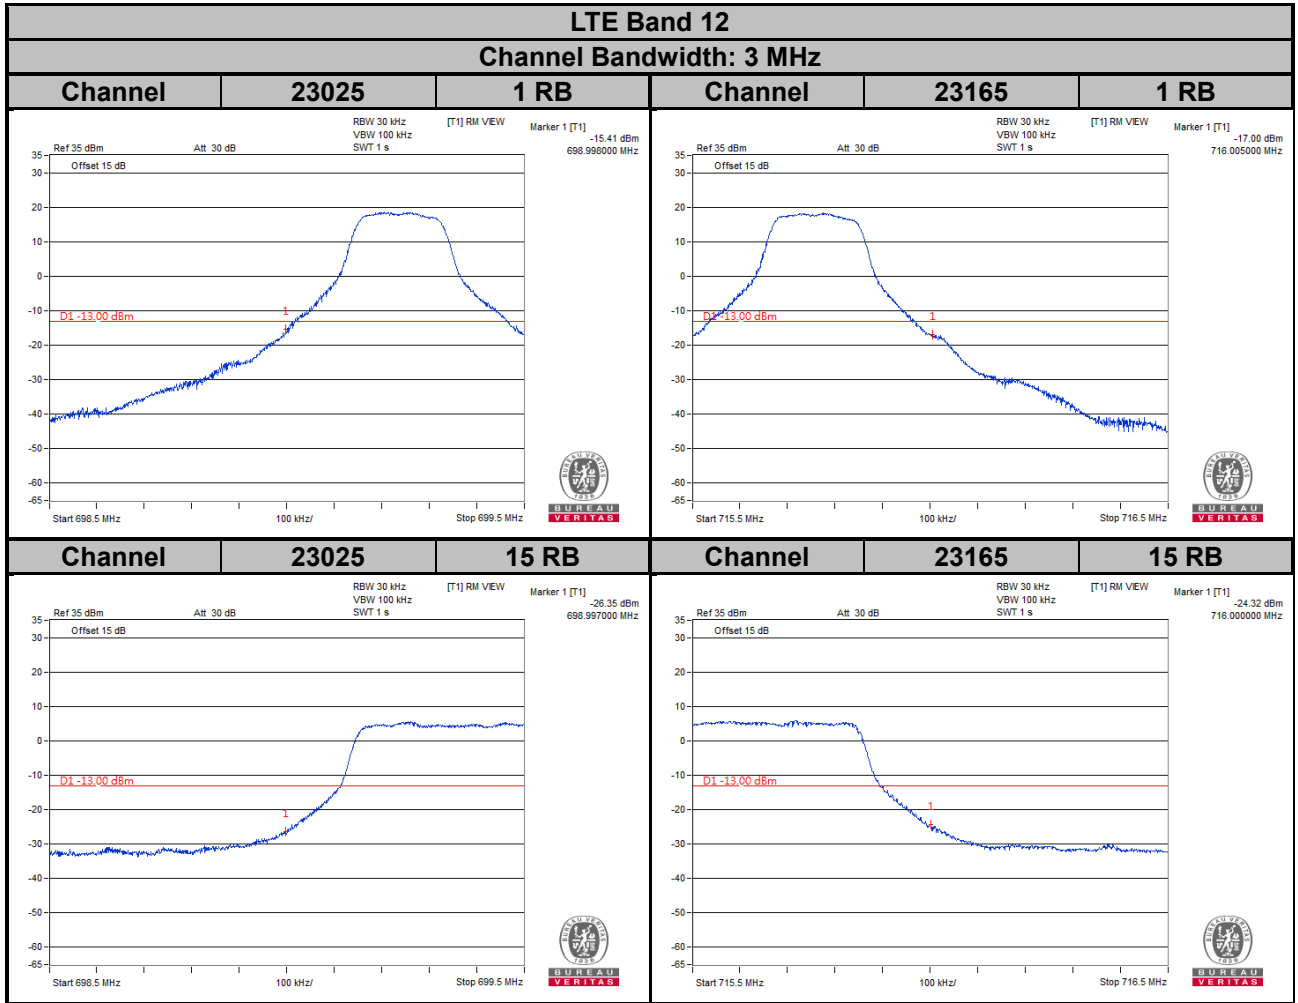


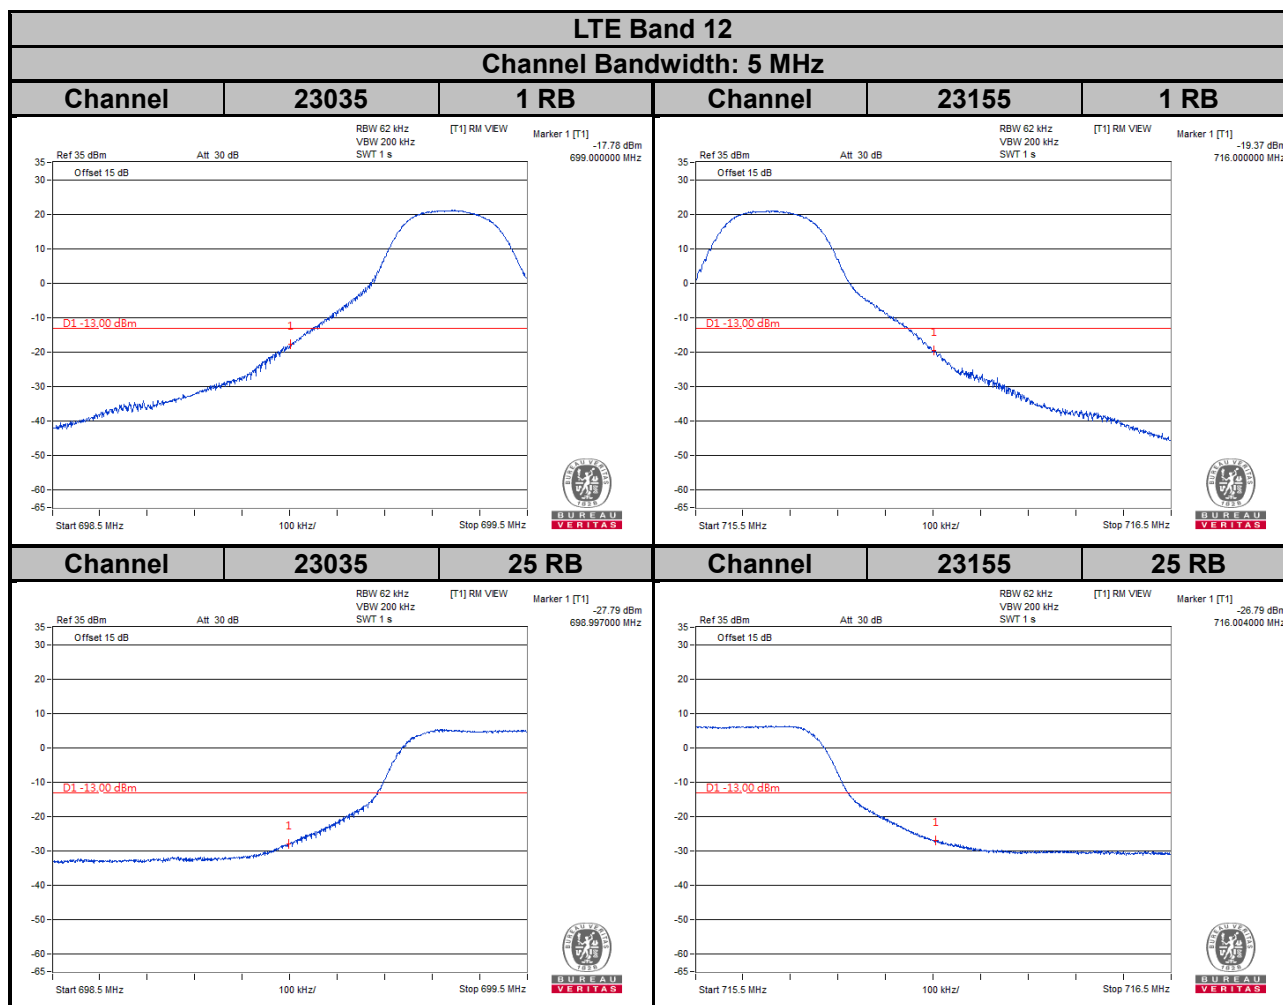


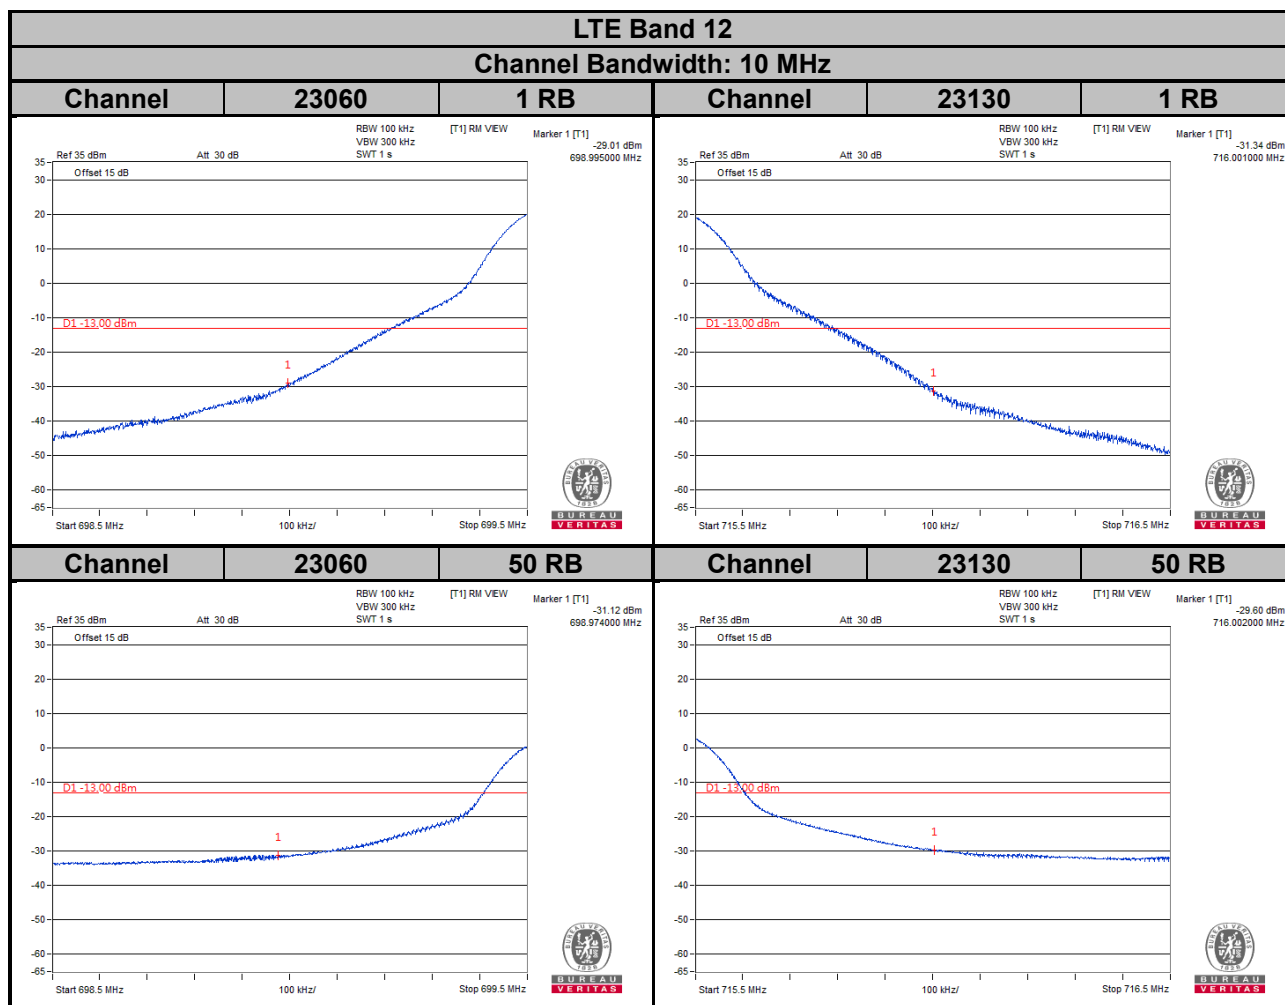

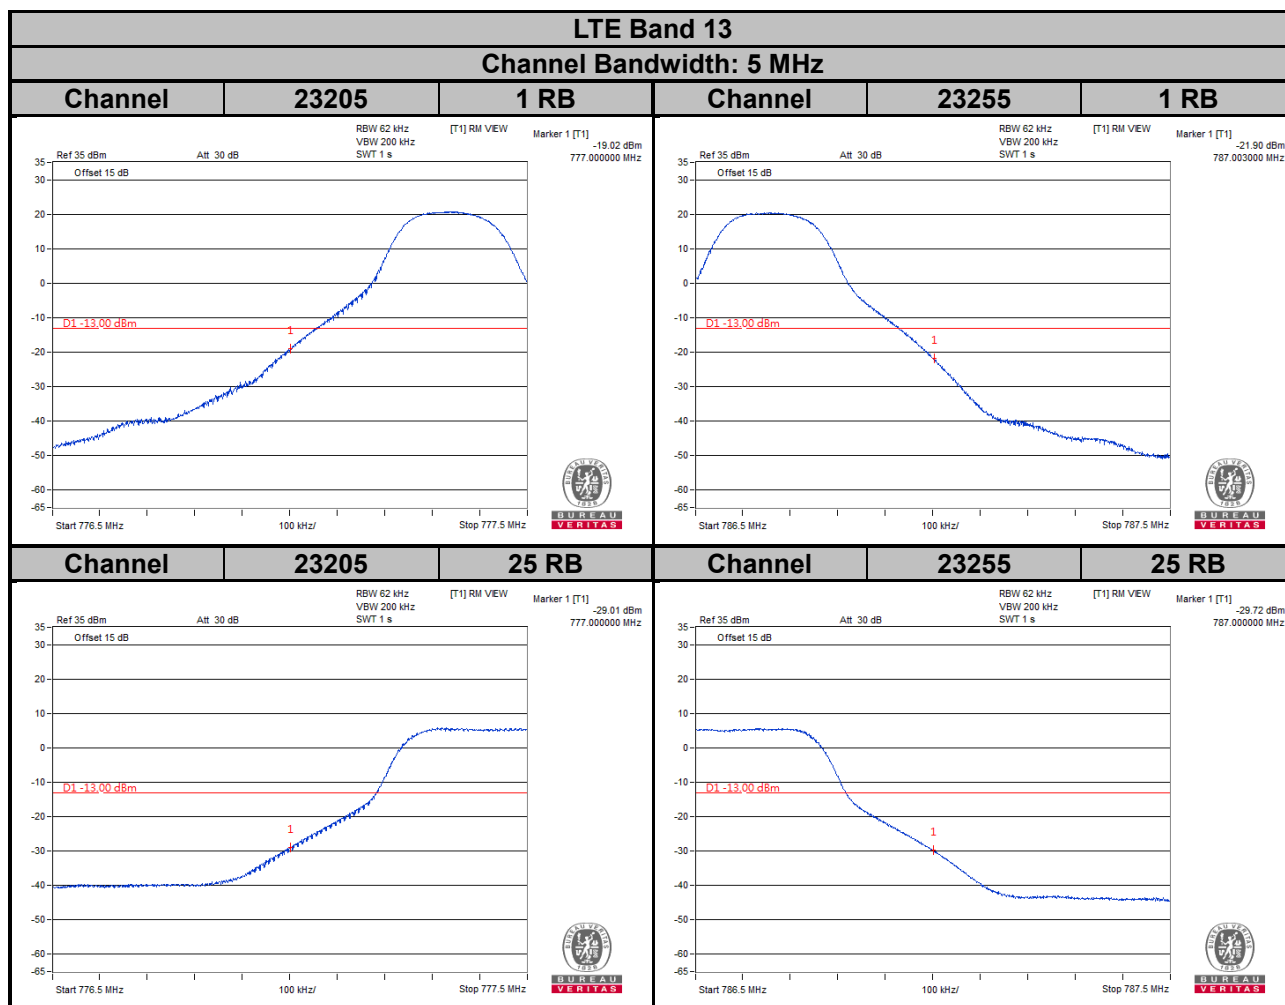


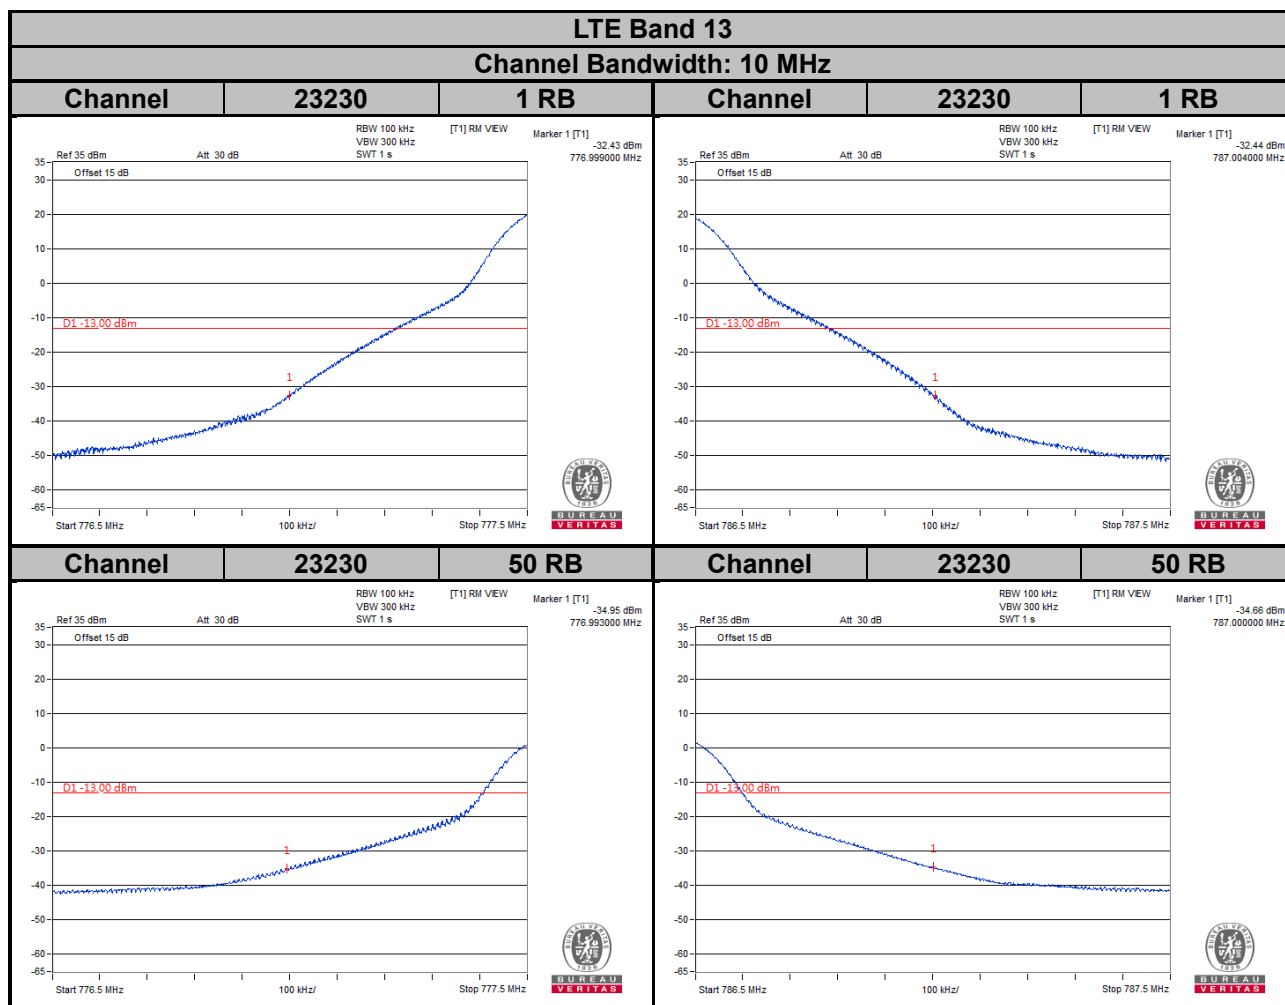

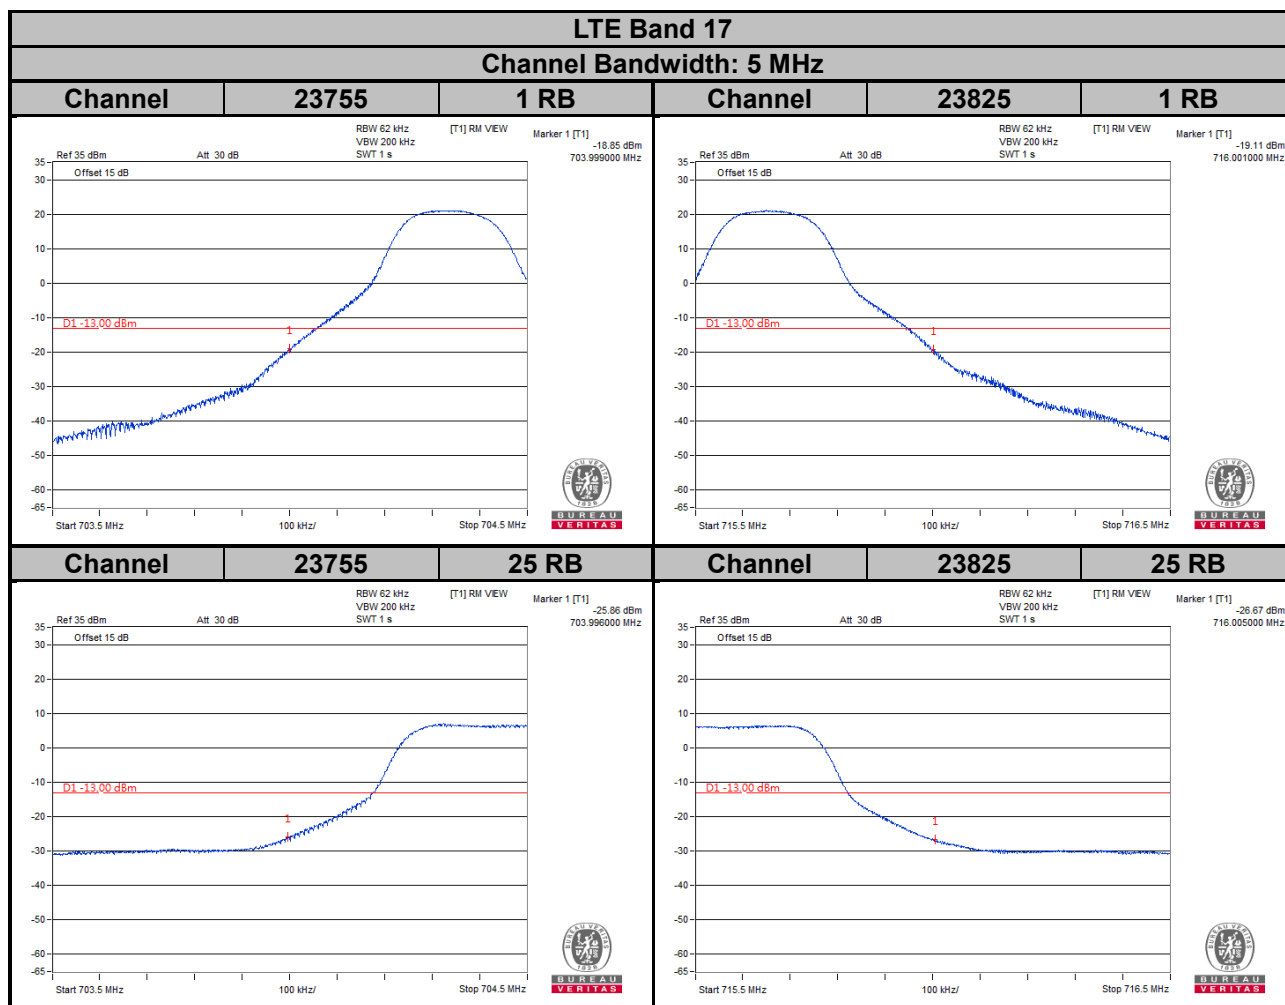

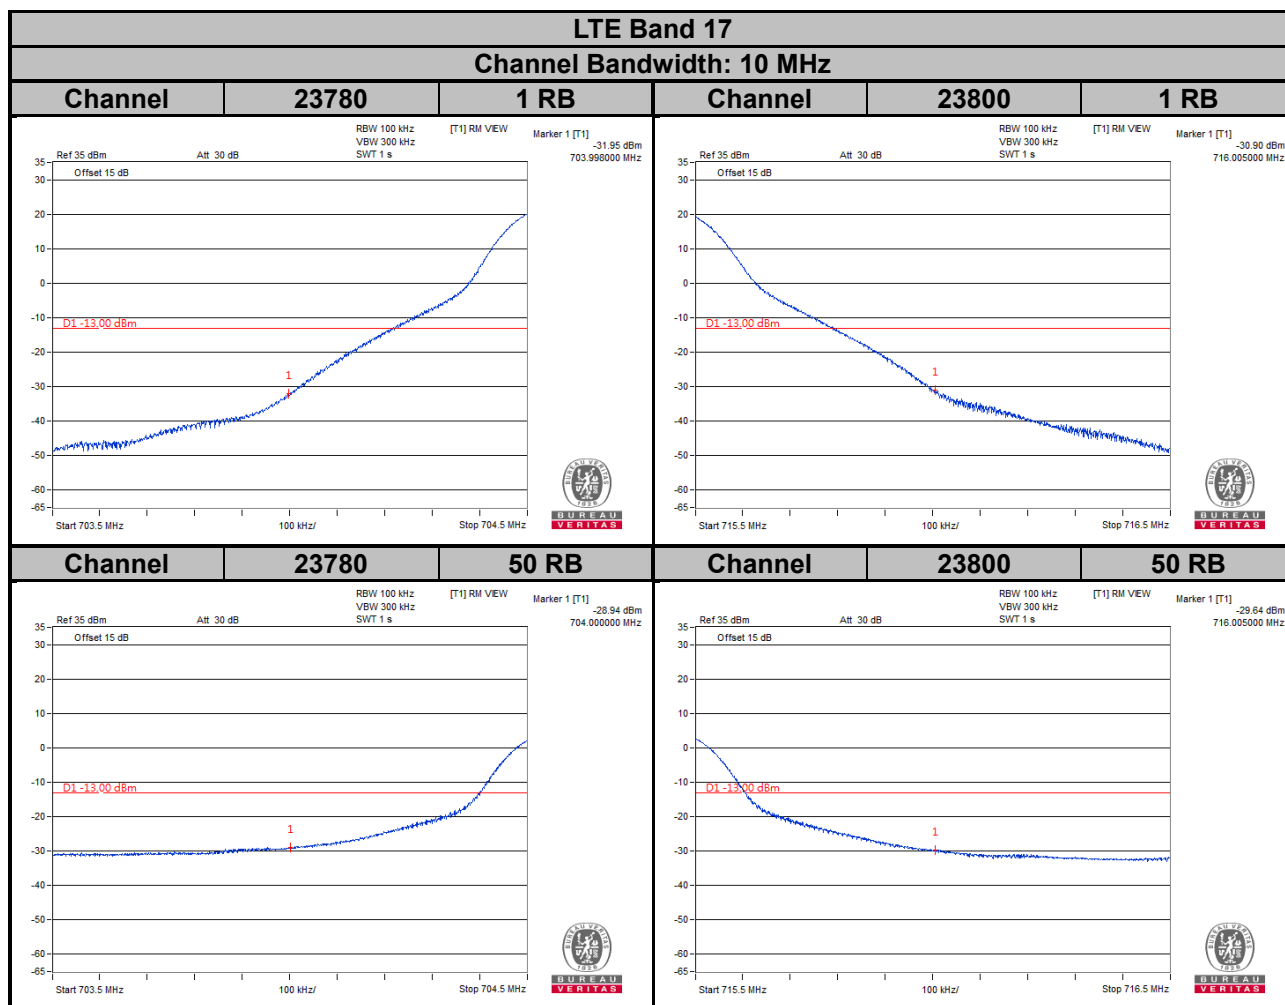


Emission Mask

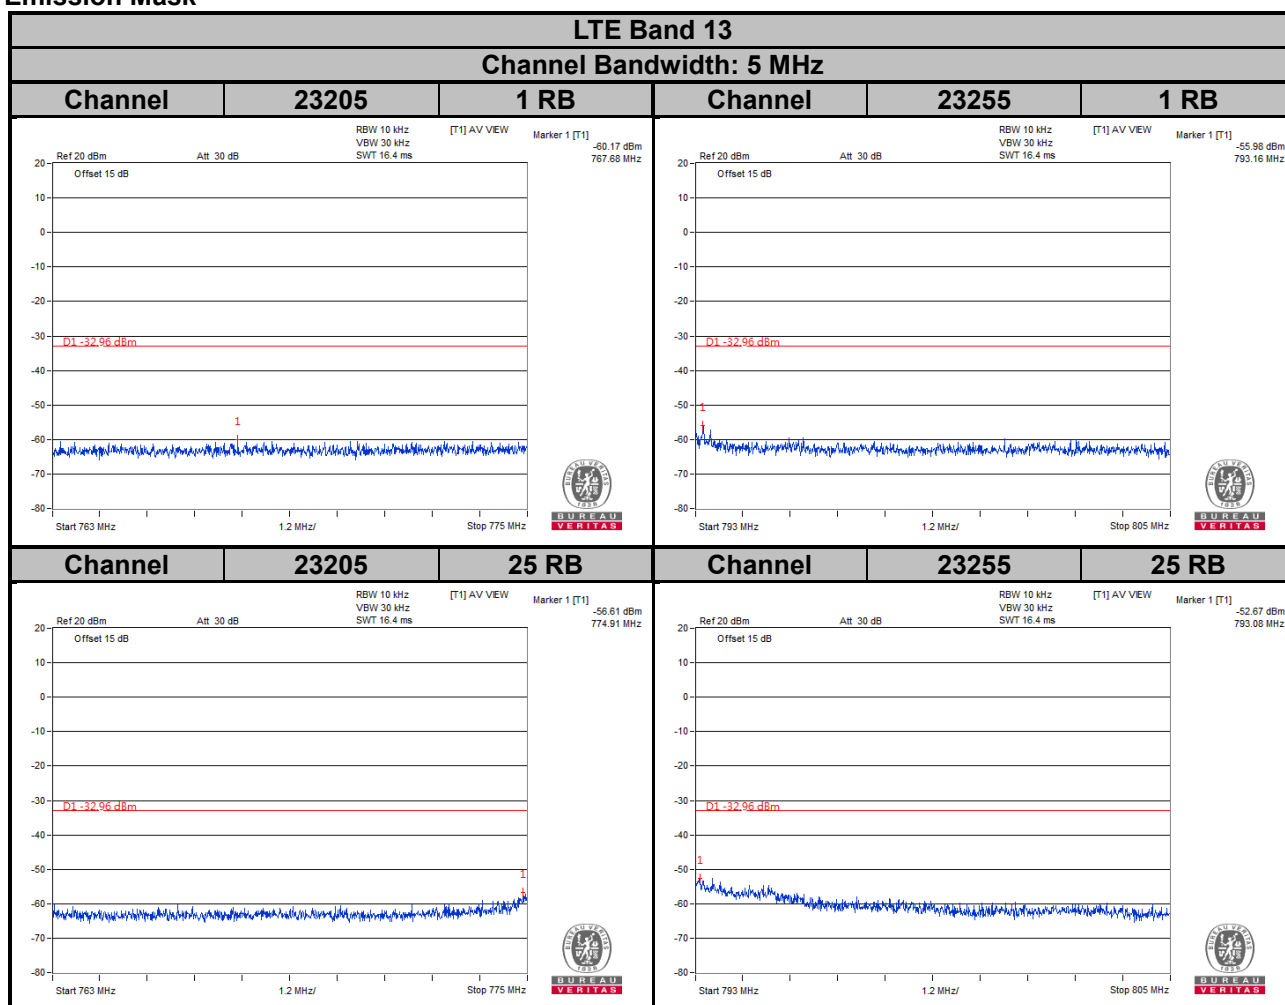

For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is $65 + 10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$

$$\text{Limit line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

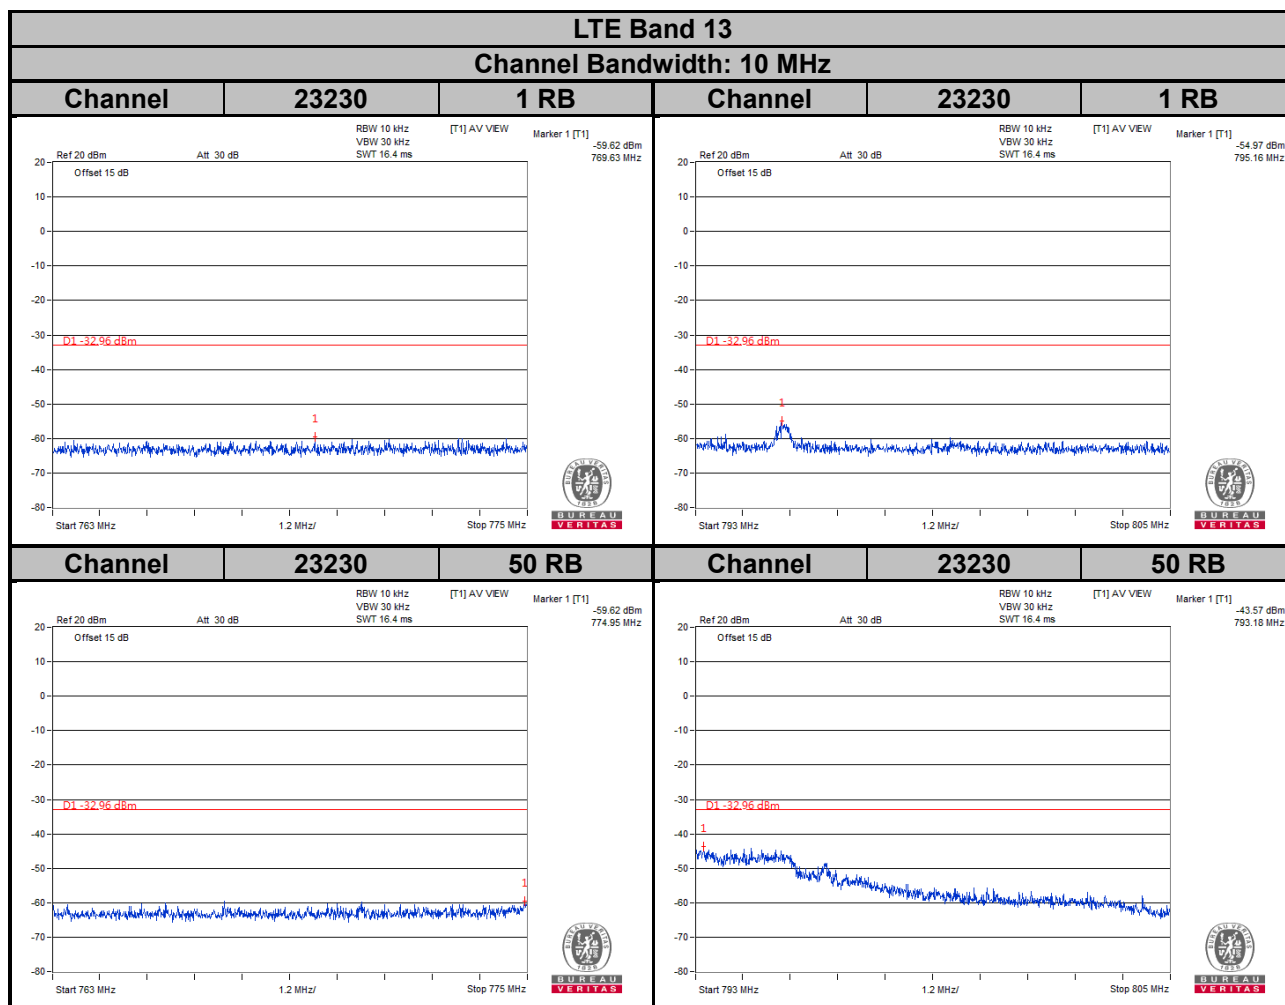

For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is $65 + 10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$


Limit line = -35 dBm + 2.04 dB = -32.96 dBm

4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

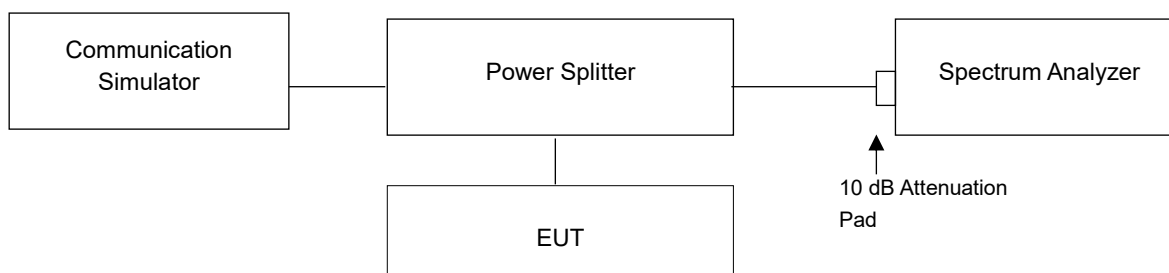


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


WCDMA		
Channel	Frequency (MHz)	Peak to Average Ratio (dB)
1312	1712.4	3.15
1413	1732.6	3.09
1513	1752.6	3.12

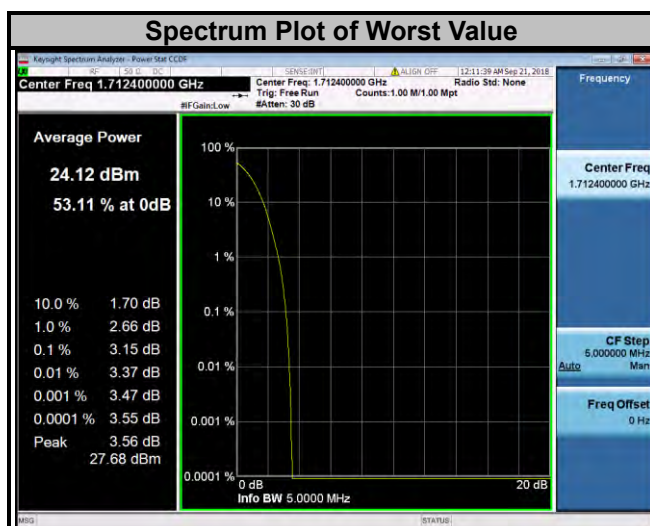


LTE Band 4									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19957	1710.7	4.63	5.65	5.62	19965	1711.5	4.56	5.55	5.43
20175	1732.5	5.32	6.10	6.11	20175	1732.5	5.22	5.98	5.98
20393	1754.3	5.31	6.08	6.07	20385	1753.5	5.22	5.96	5.97

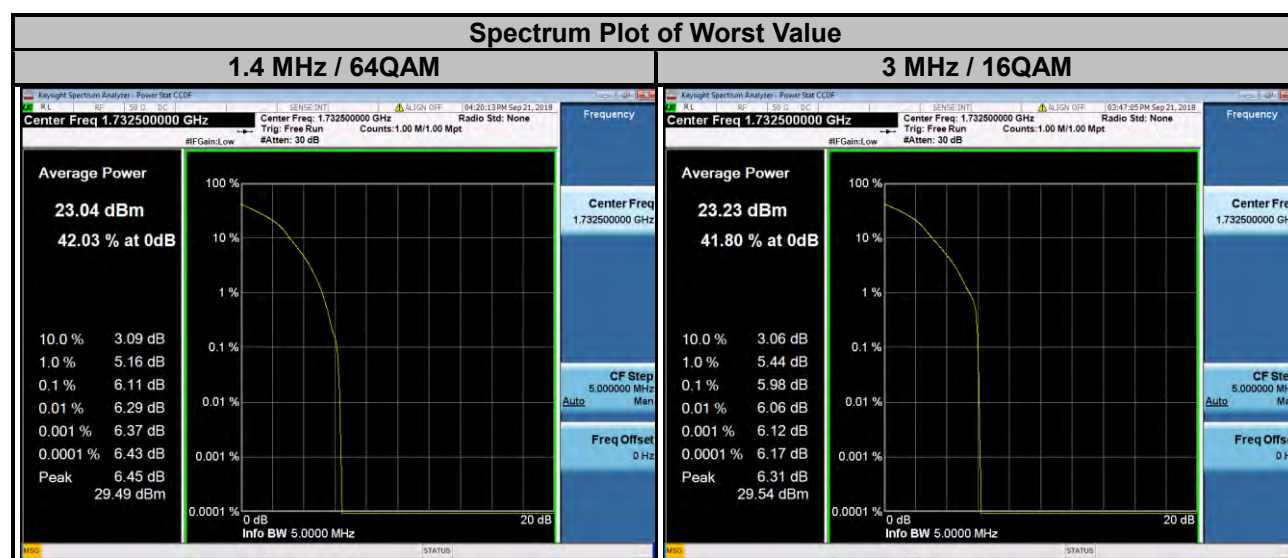


LTE Band 4									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19975	1712.5	4.48	5.30	5.32	20000	1715.0	4.68	5.38	5.50
20175	1732.5	5.20	5.98	5.97	20175	1732.5	5.19	5.97	5.85
20375	1752.5	4.98	5.72	5.71	20350	1750.0	4.92	5.65	5.67

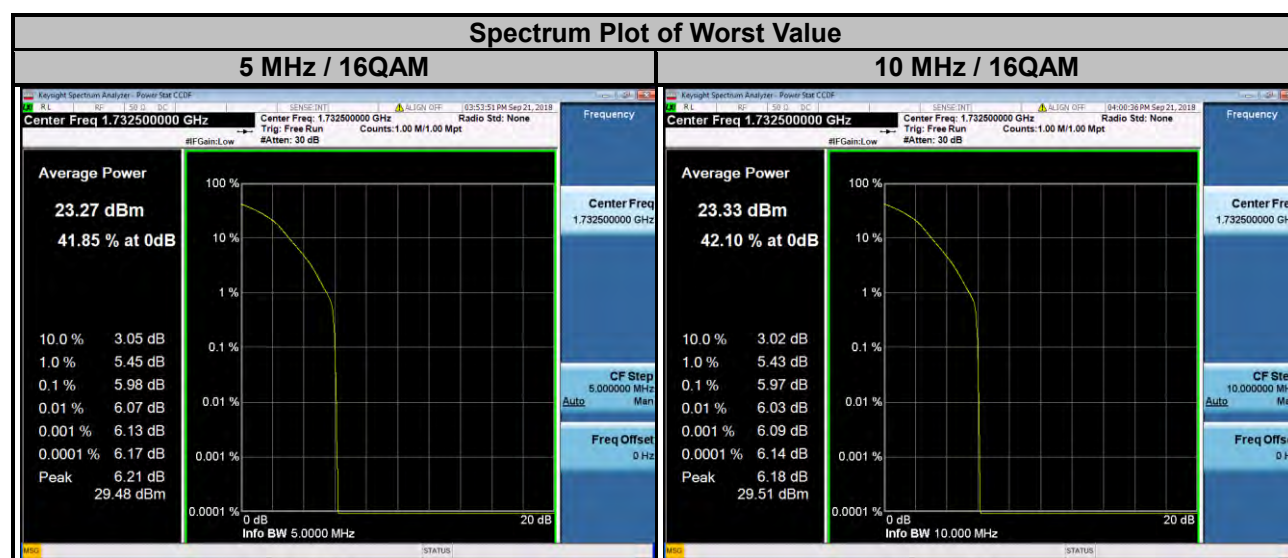


LTE Band 4									
Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20025	1717.5	4.52	5.30	5.29	20050	1720.0	4.53	5.35	5.36
20175	1732.5	5.12	6.00	5.82	20175	1732.5	5.16	5.95	5.93
20325	1747.5	5.19	6.02	6.00	20300	1745.0	5.13	5.88	5.89

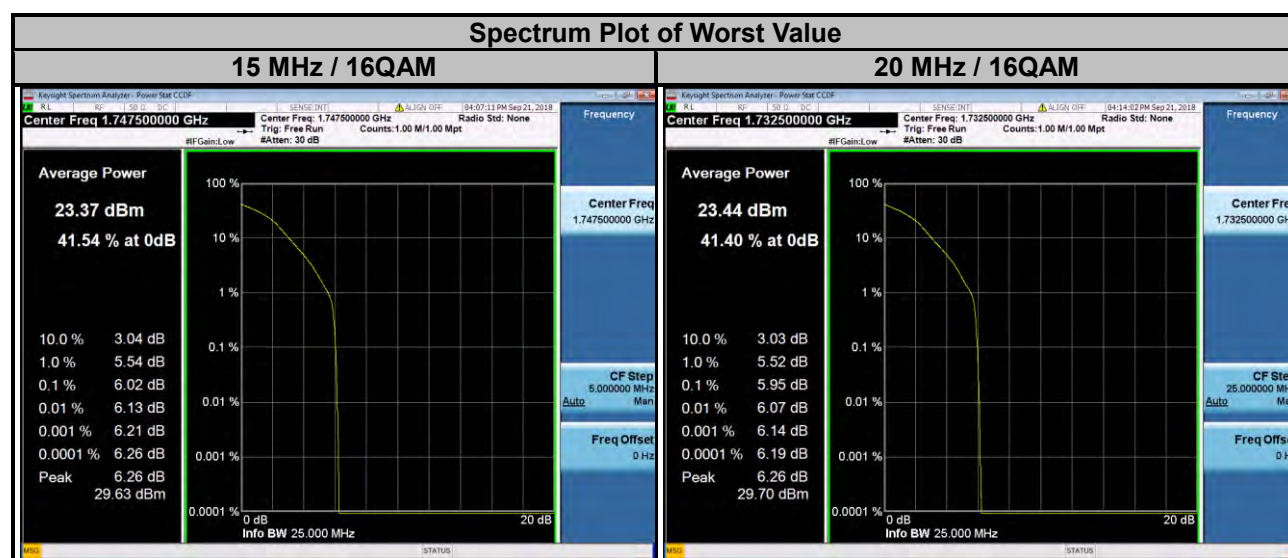


LTE Band 12									
Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23017	699.7	3.44	4.29	4.27	23025	700.5	3.41	4.18	4.07
23095	707.5	4.44	5.25	5.16	23095	707.5	4.41	5.18	5.12
23173	715.3	3.68	4.44	4.36	23165	714.5	3.58	4.38	4.26

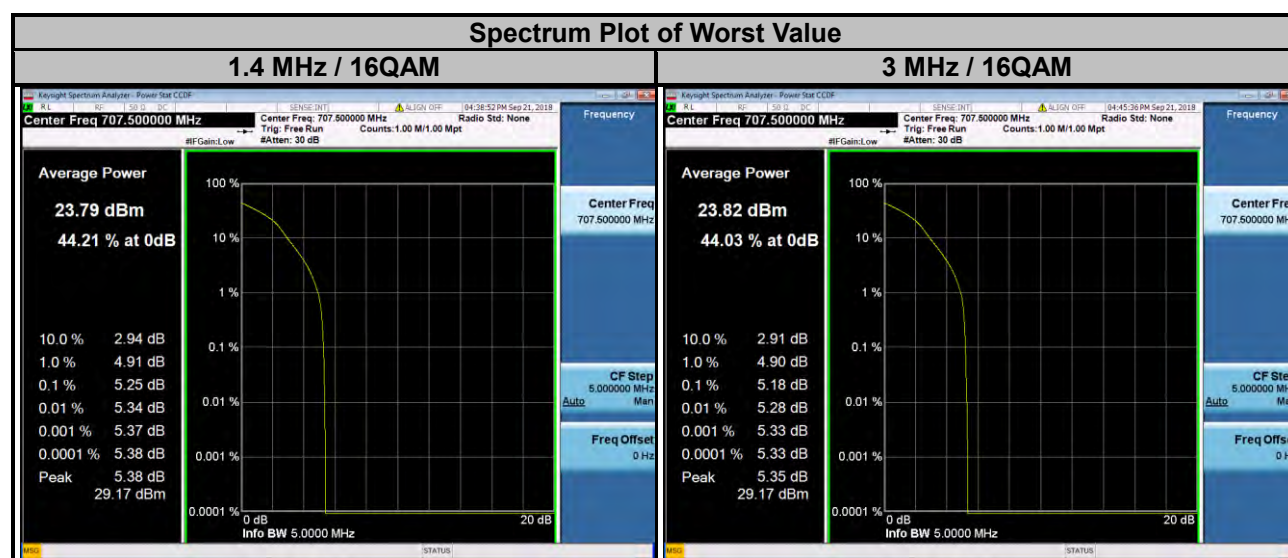

LTE Band 12									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23035	701.5	3.42	4.21	4.04	23060	704.0	3.36	4.16	4.09
23095	707.5	4.31	5.09	4.99	23095	707.5	3.72	4.48	4.38
23155	713.5	3.79	4.56	4.49	23130	711.0	4.39	5.16	5.08

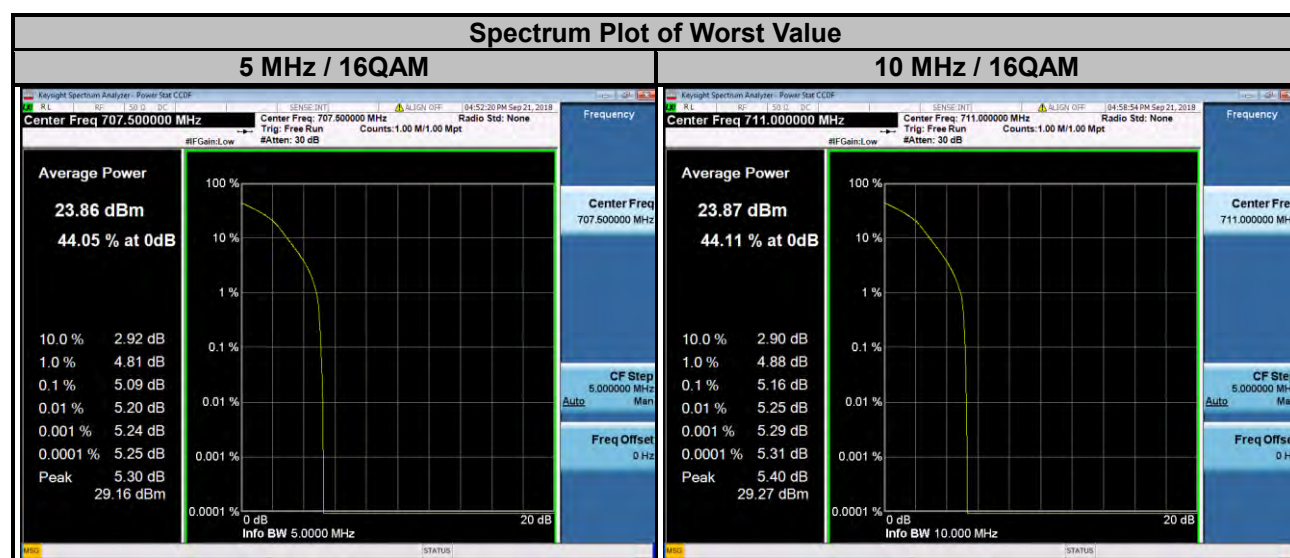


LTE Band 13									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23205	779.5	3.77	4.52	4.37	23230	782.0	3.91	4.65	4.54
23230	782.0	4.75	5.47	5.46					
23255	784.5	5.10	5.88	5.77					

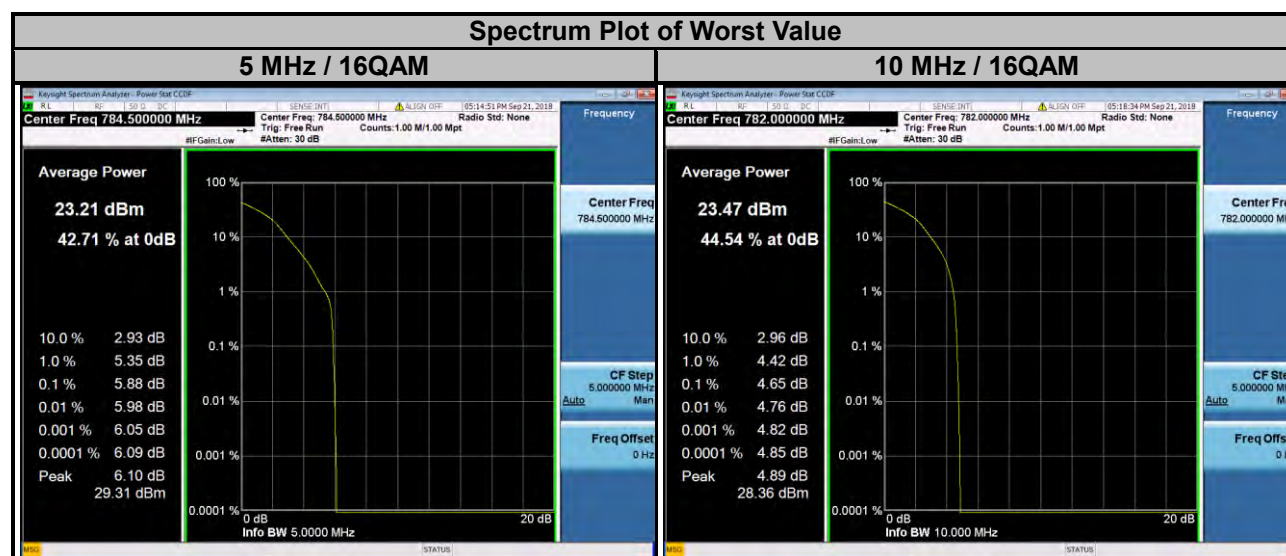

LTE Band 17

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23755	706.5	4.07	4.83	4.74	23780	709.0	4.14	4.85	4.80
23790	710.0	4.50	5.24	5.19	23790	710.0	4.39	5.16	5.10
23825	713.5	3.89	4.64	4.54	23800	711.0	4.44	5.23	5.12

Spectrum Plot of Worst Value

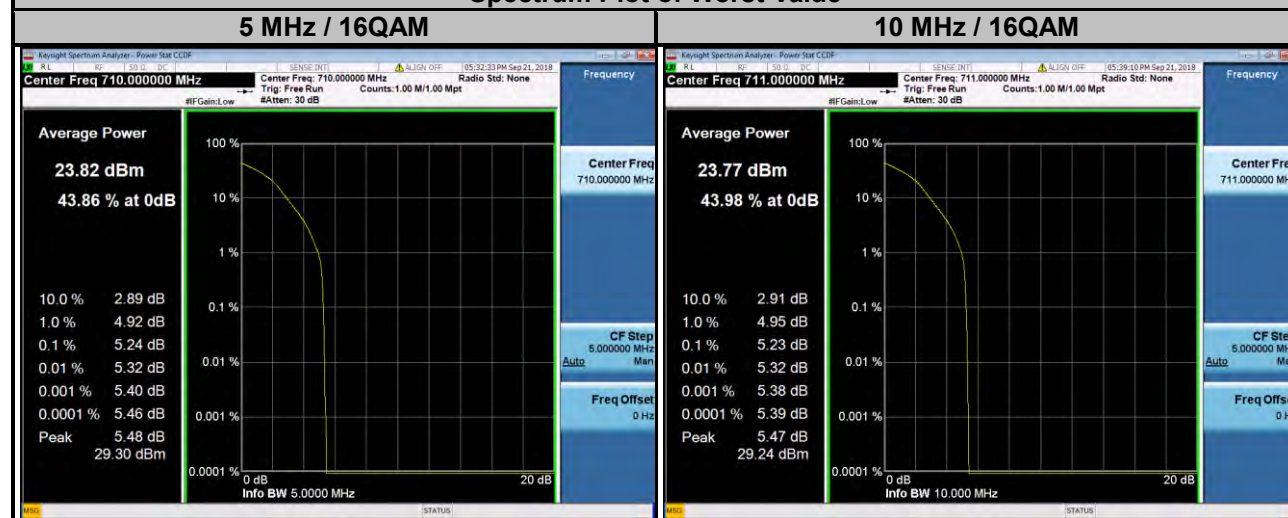


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.


4.7.2 Test Setup

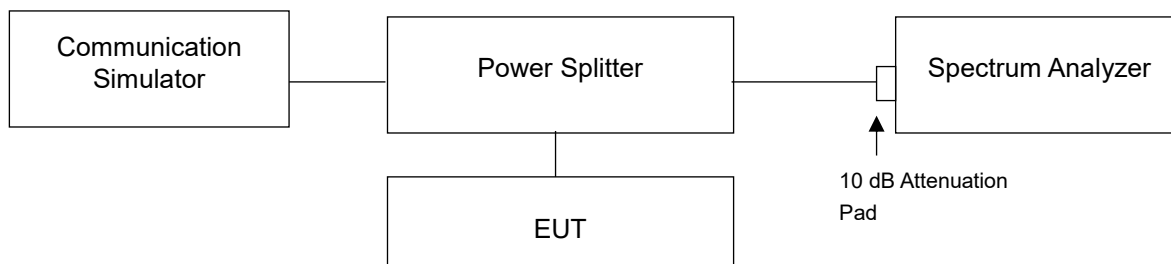


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 26.5 GHz / 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.


4.7.4 Test Results

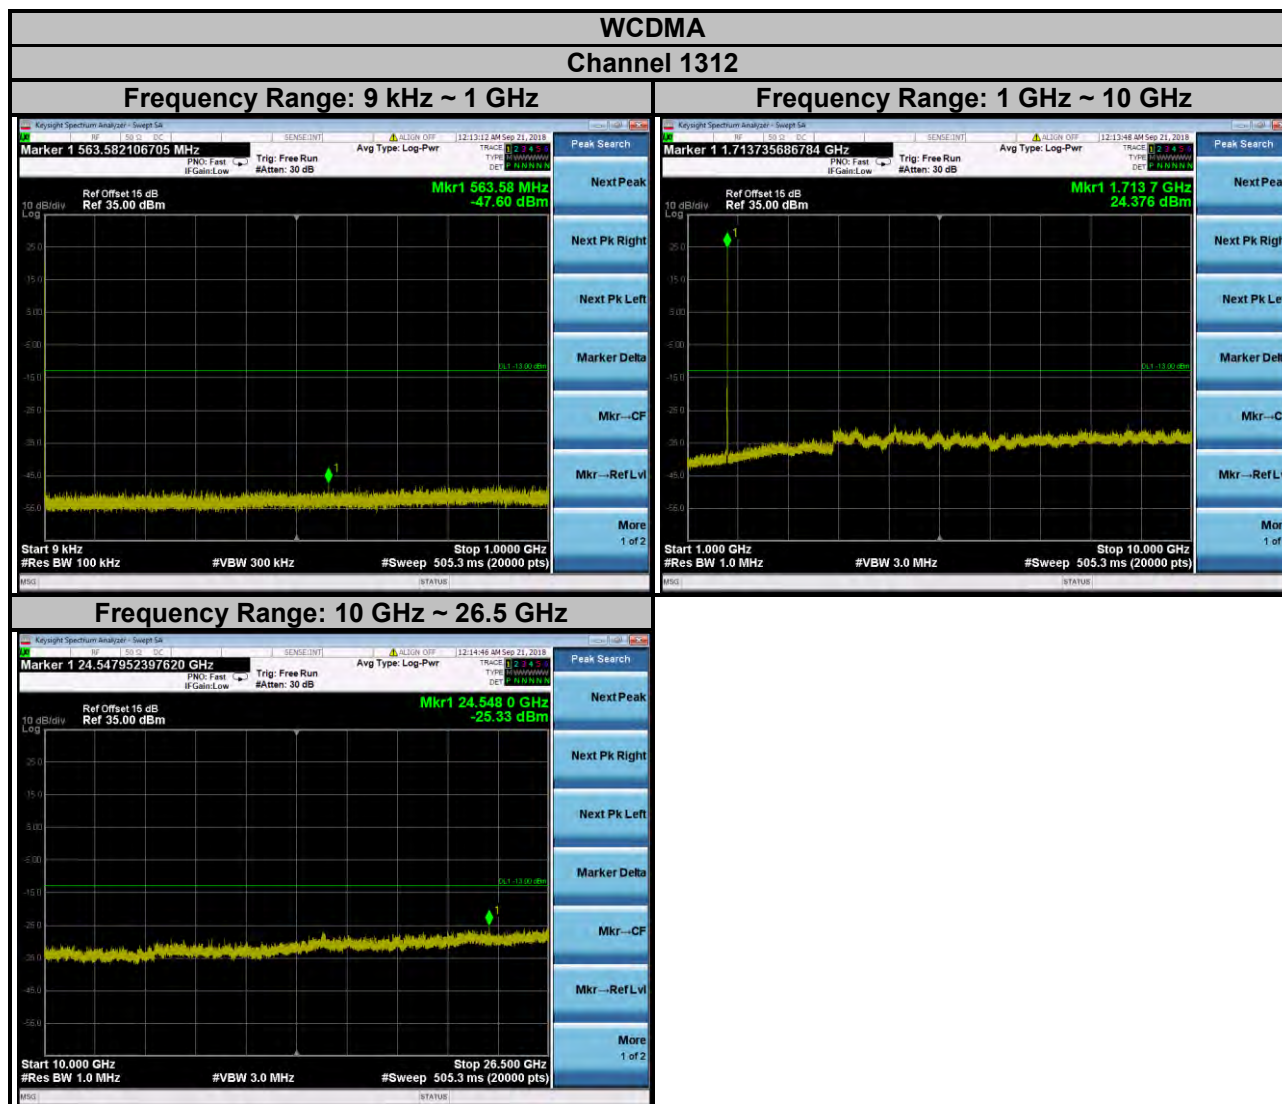


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

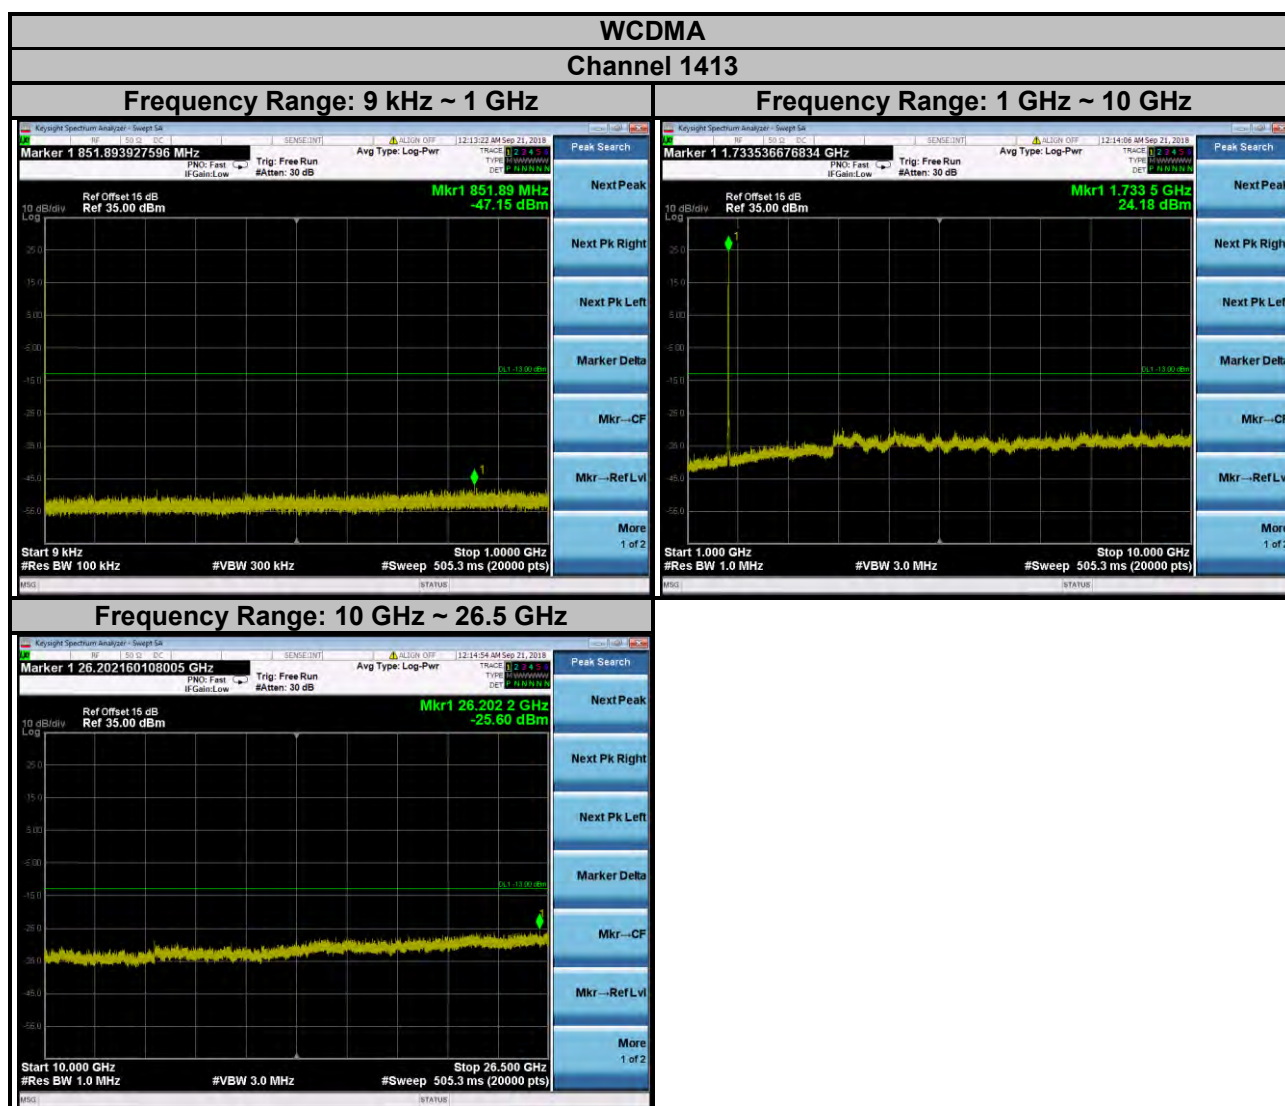


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

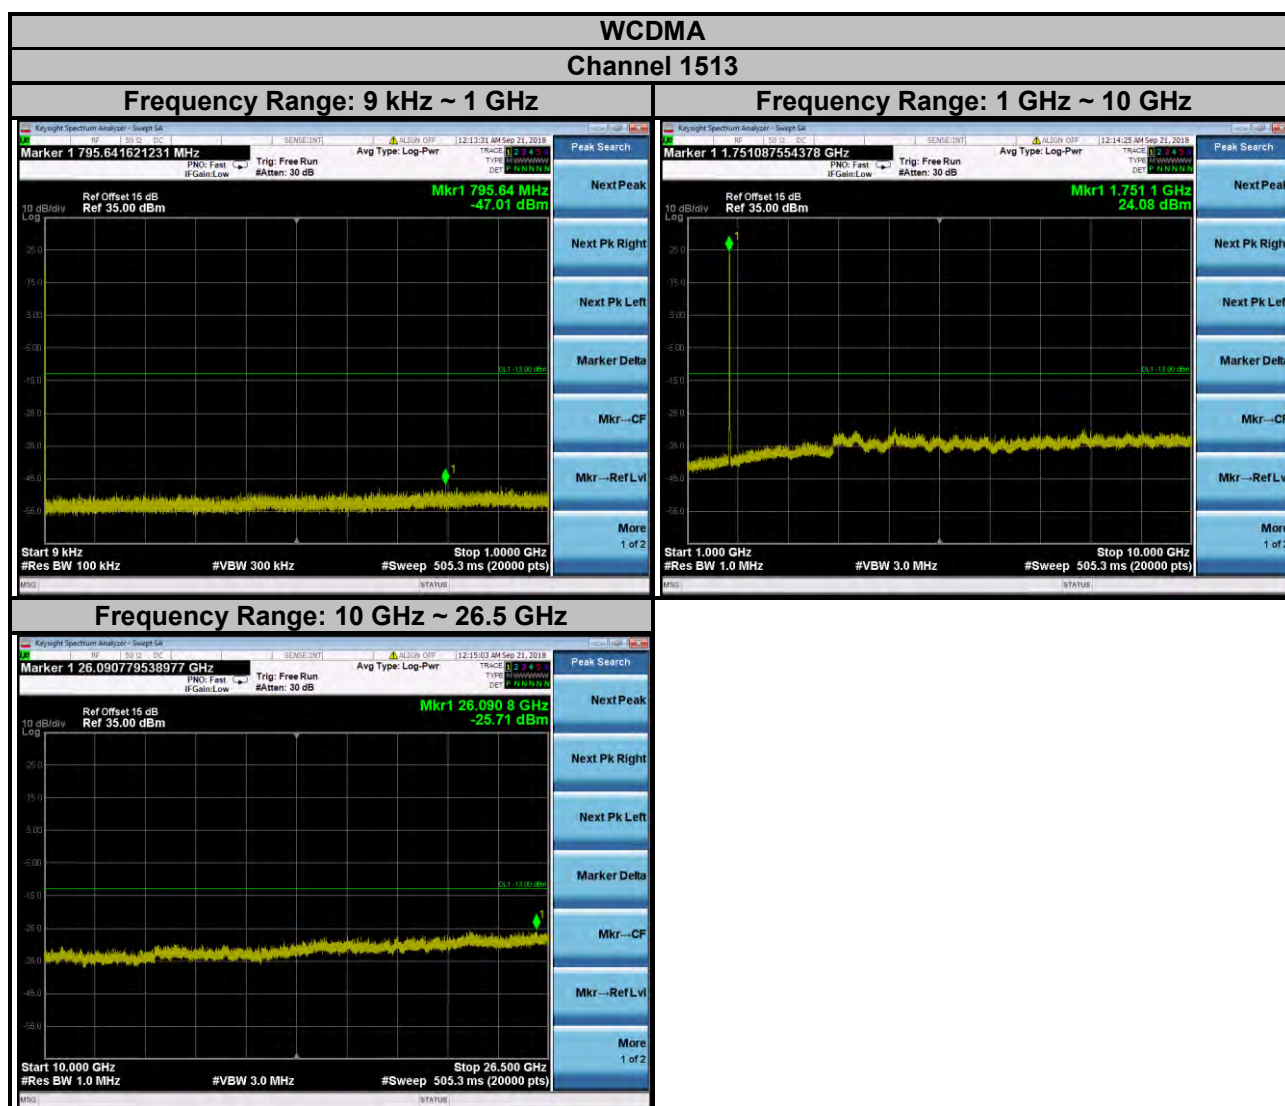


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

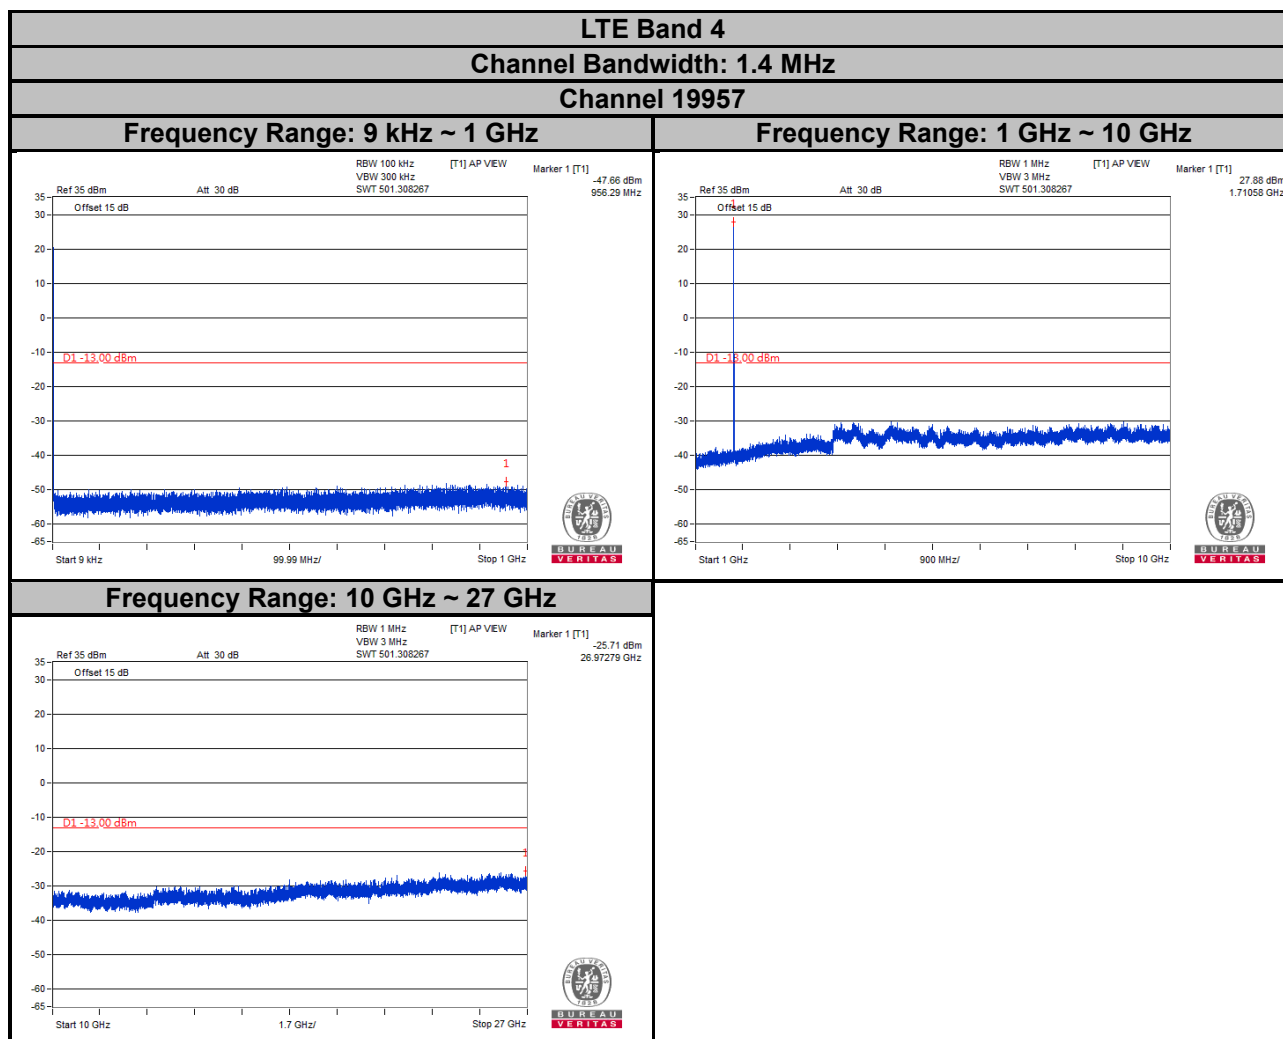


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

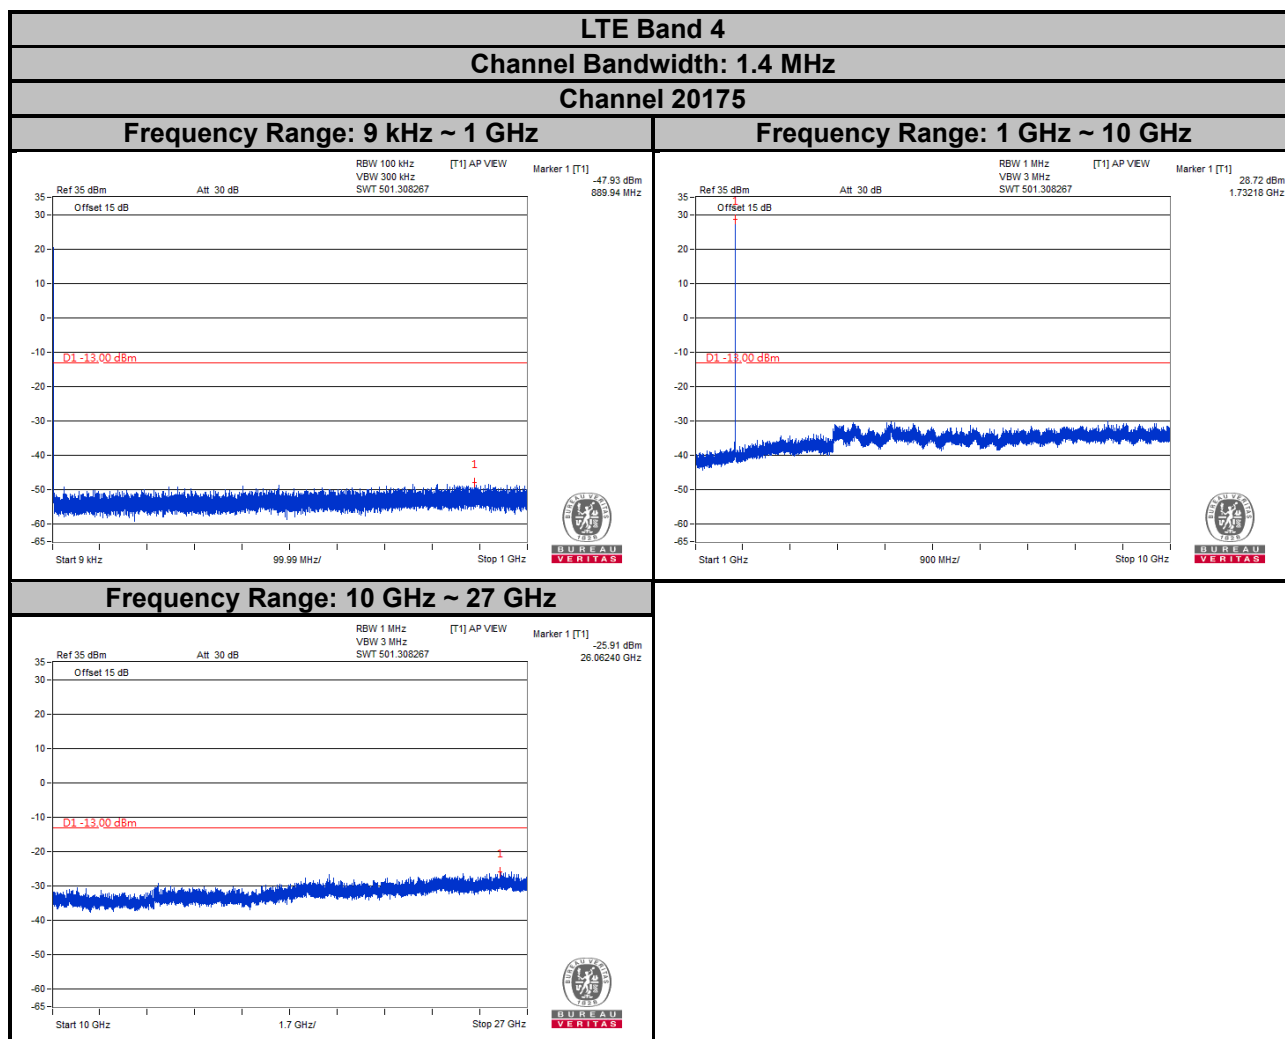


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

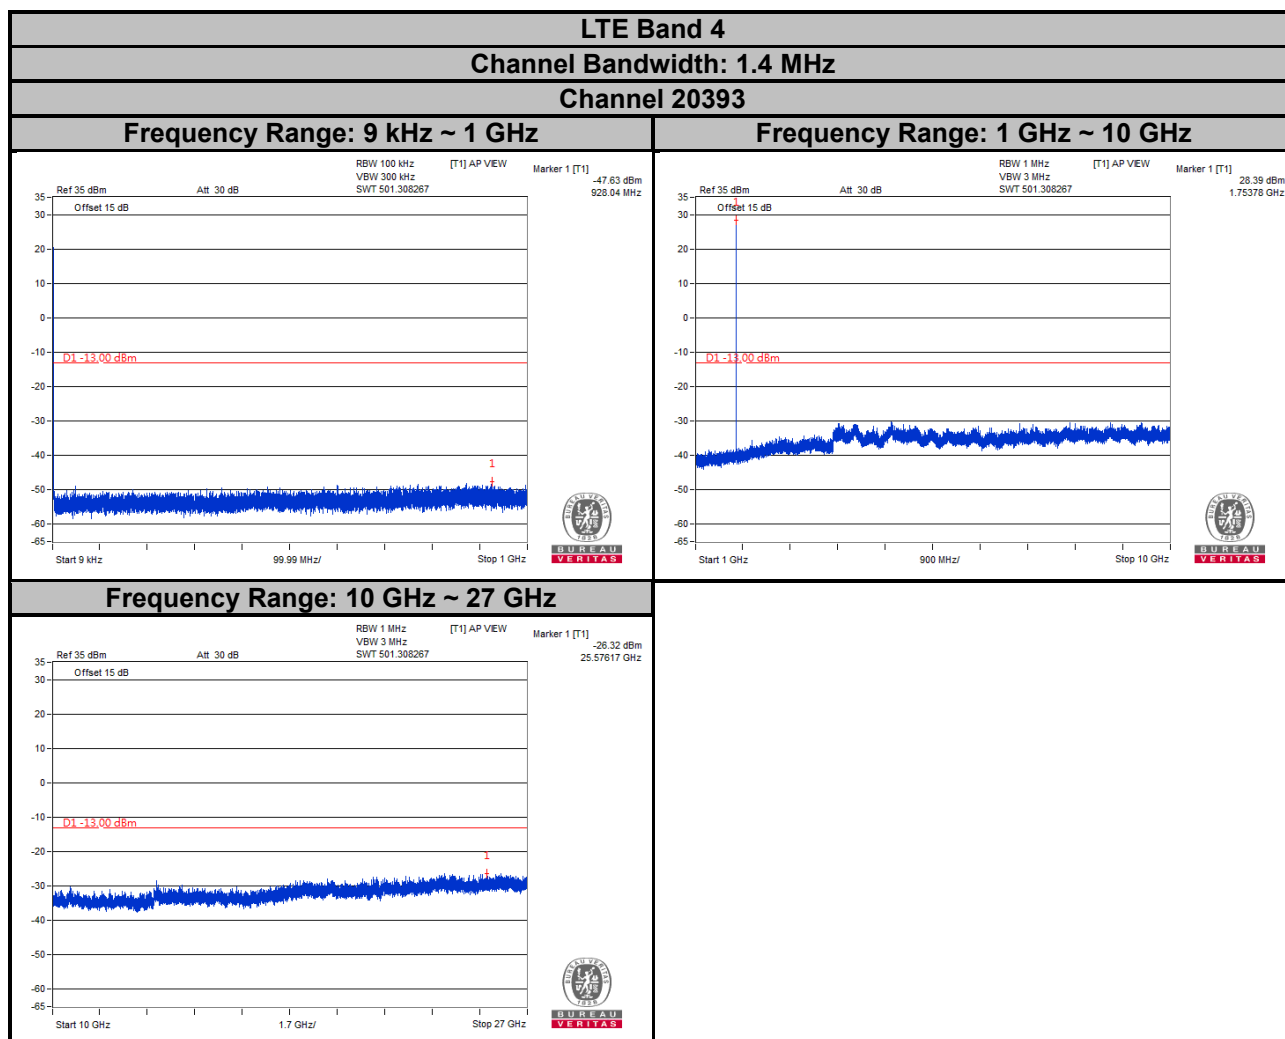


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

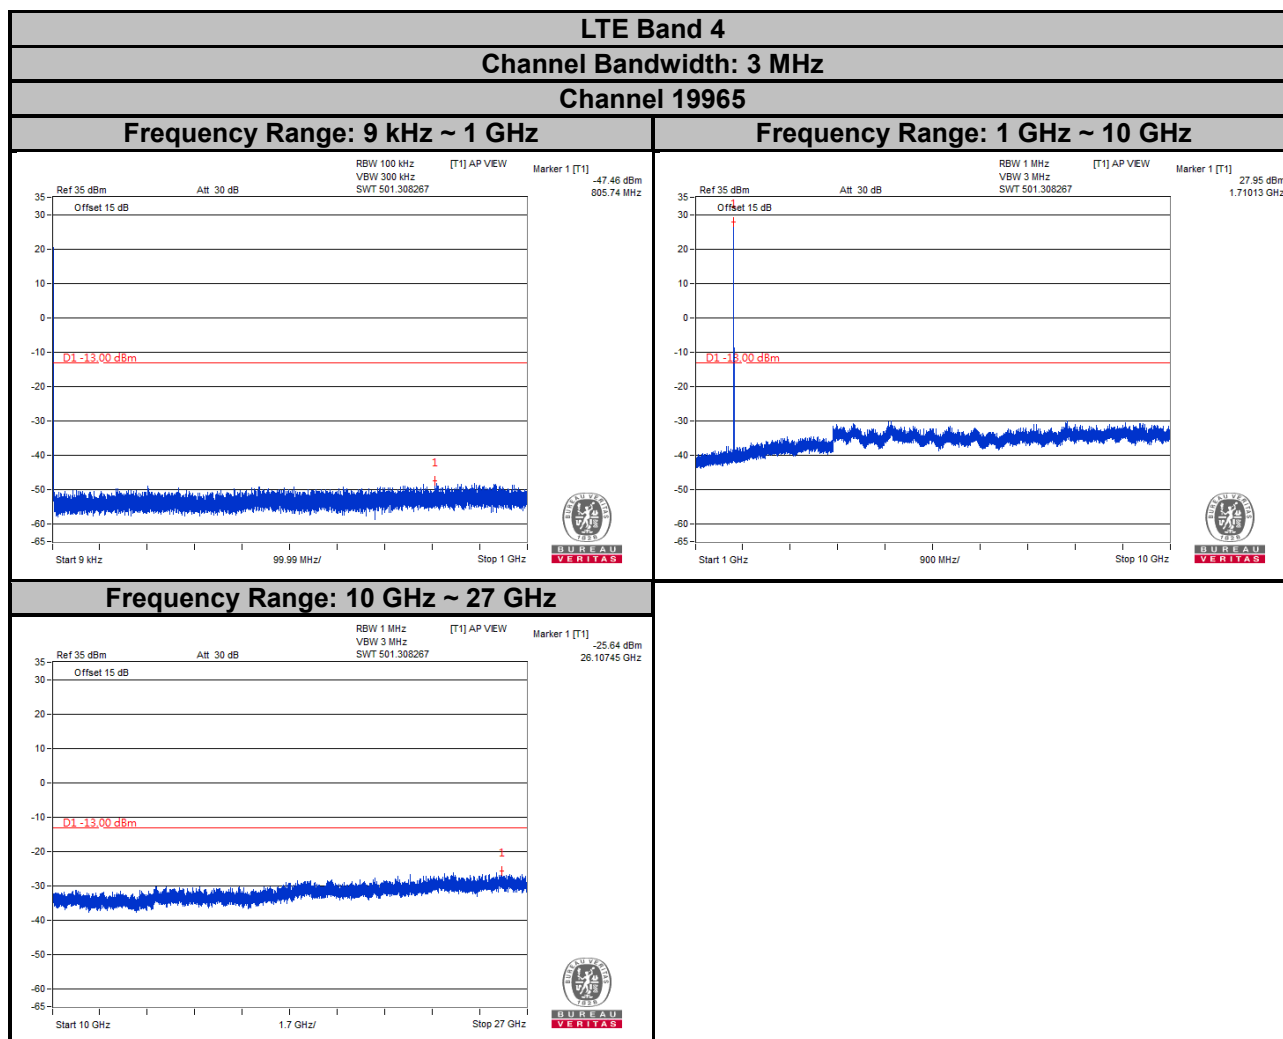


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

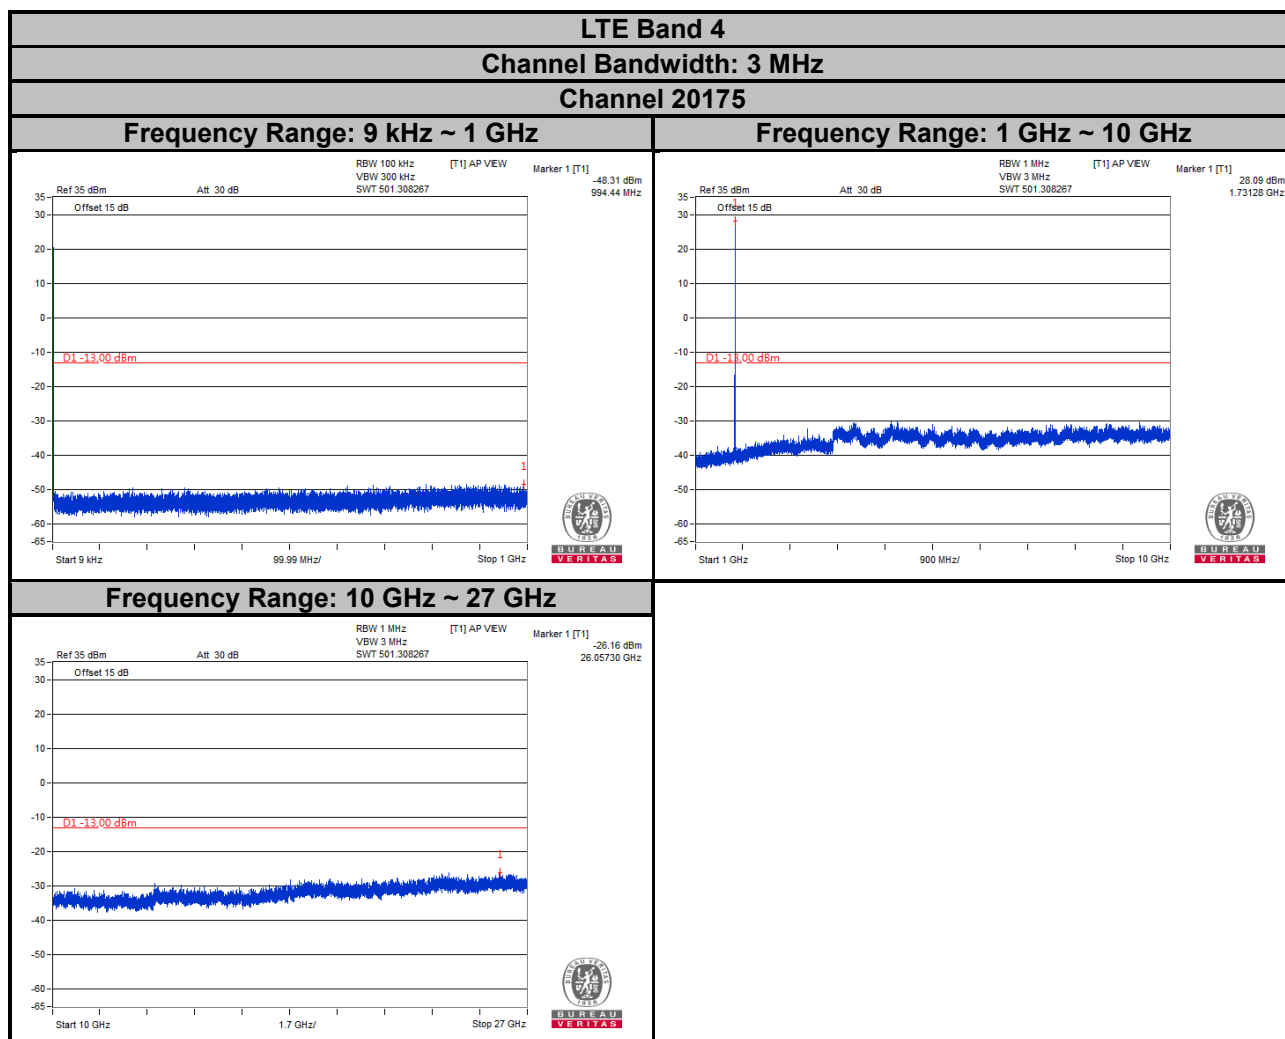


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

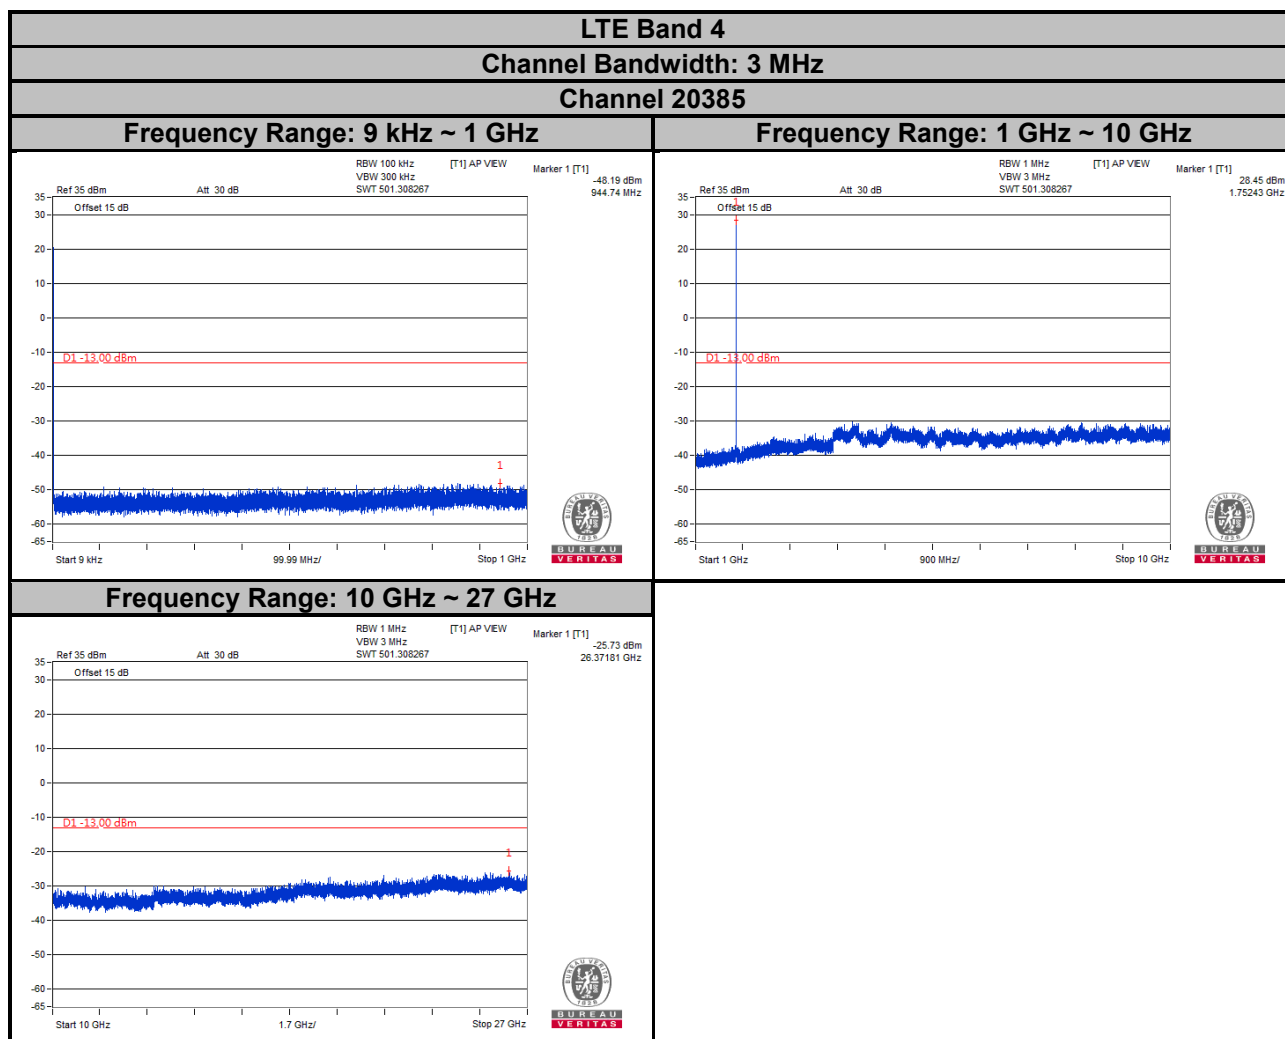


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

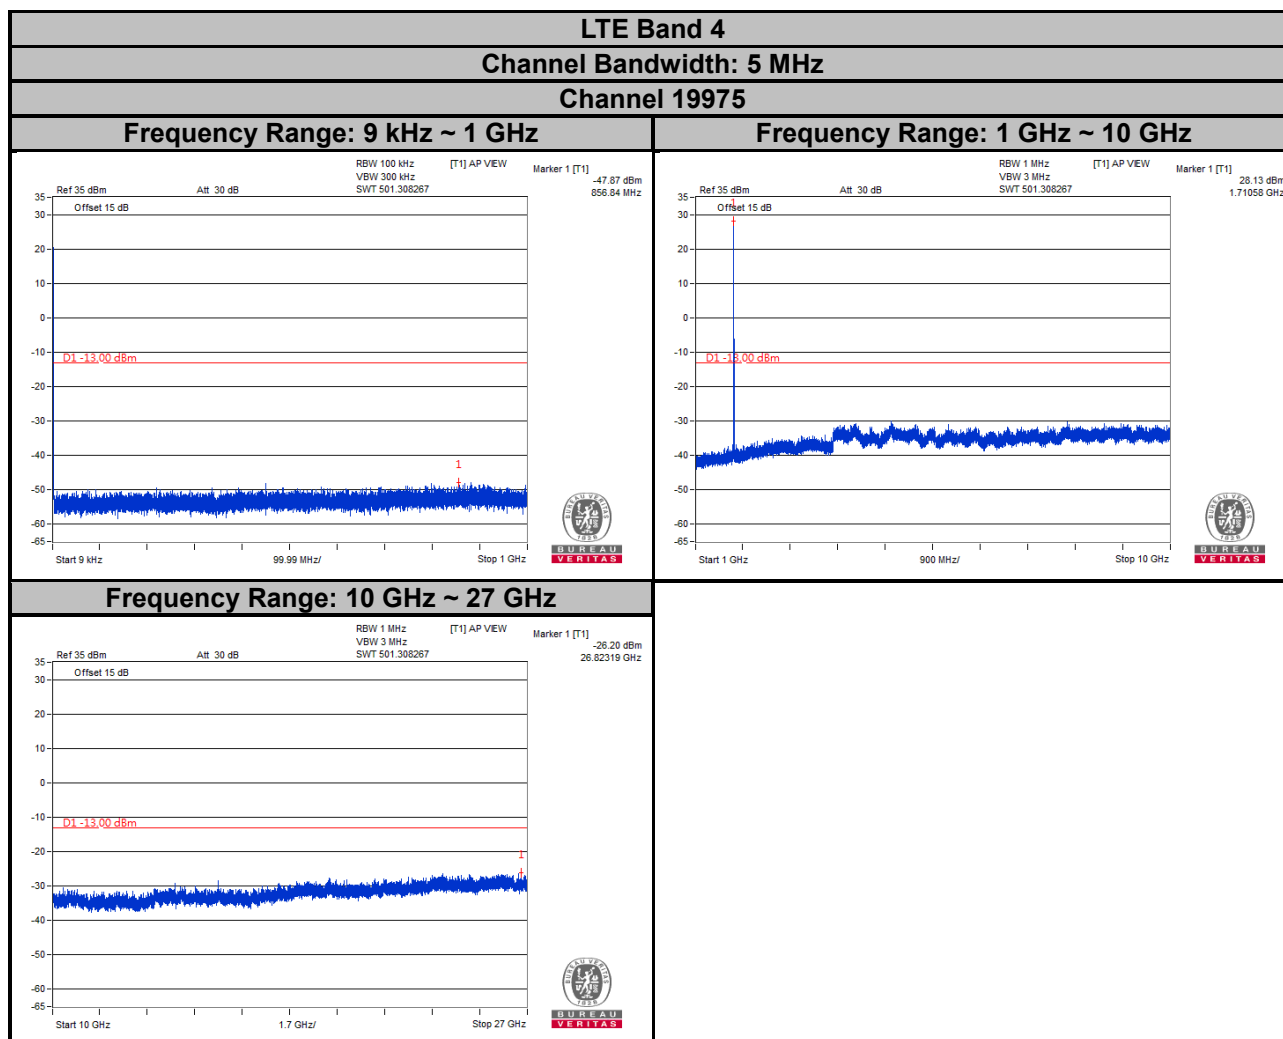


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

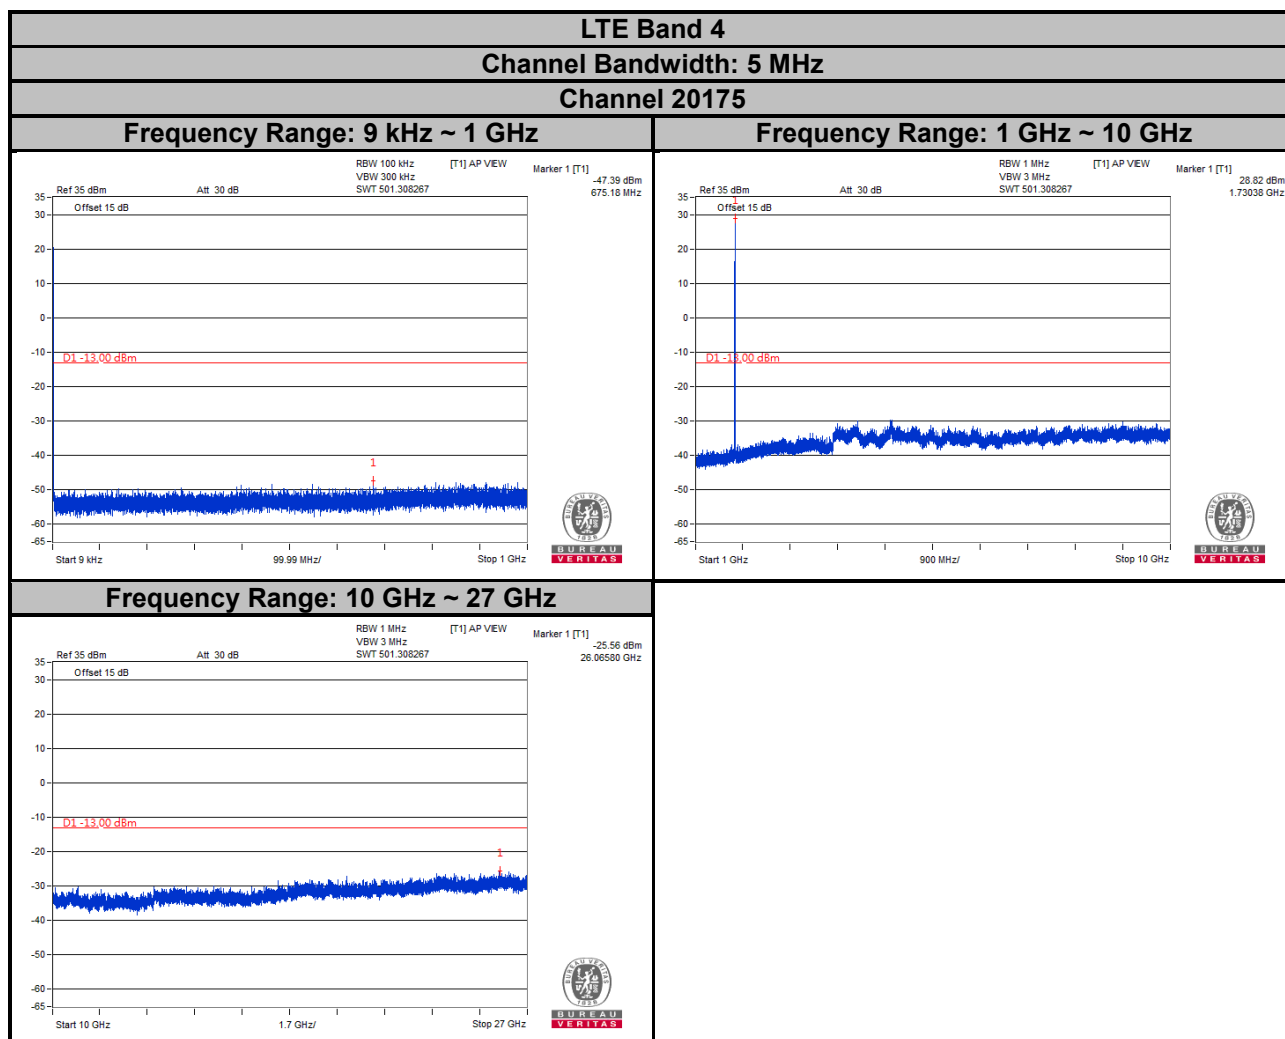


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

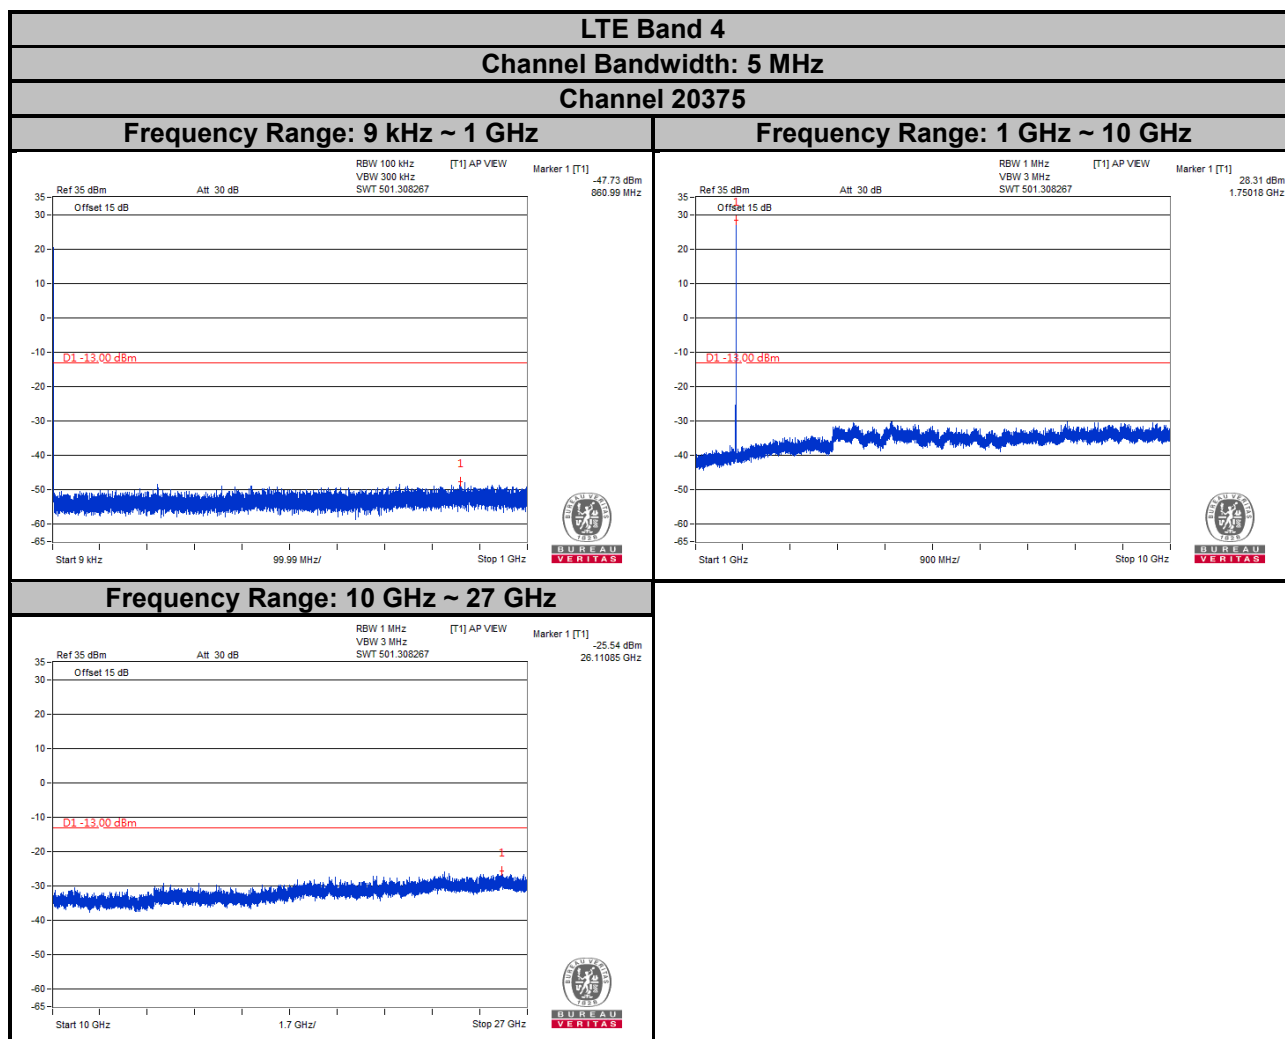


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

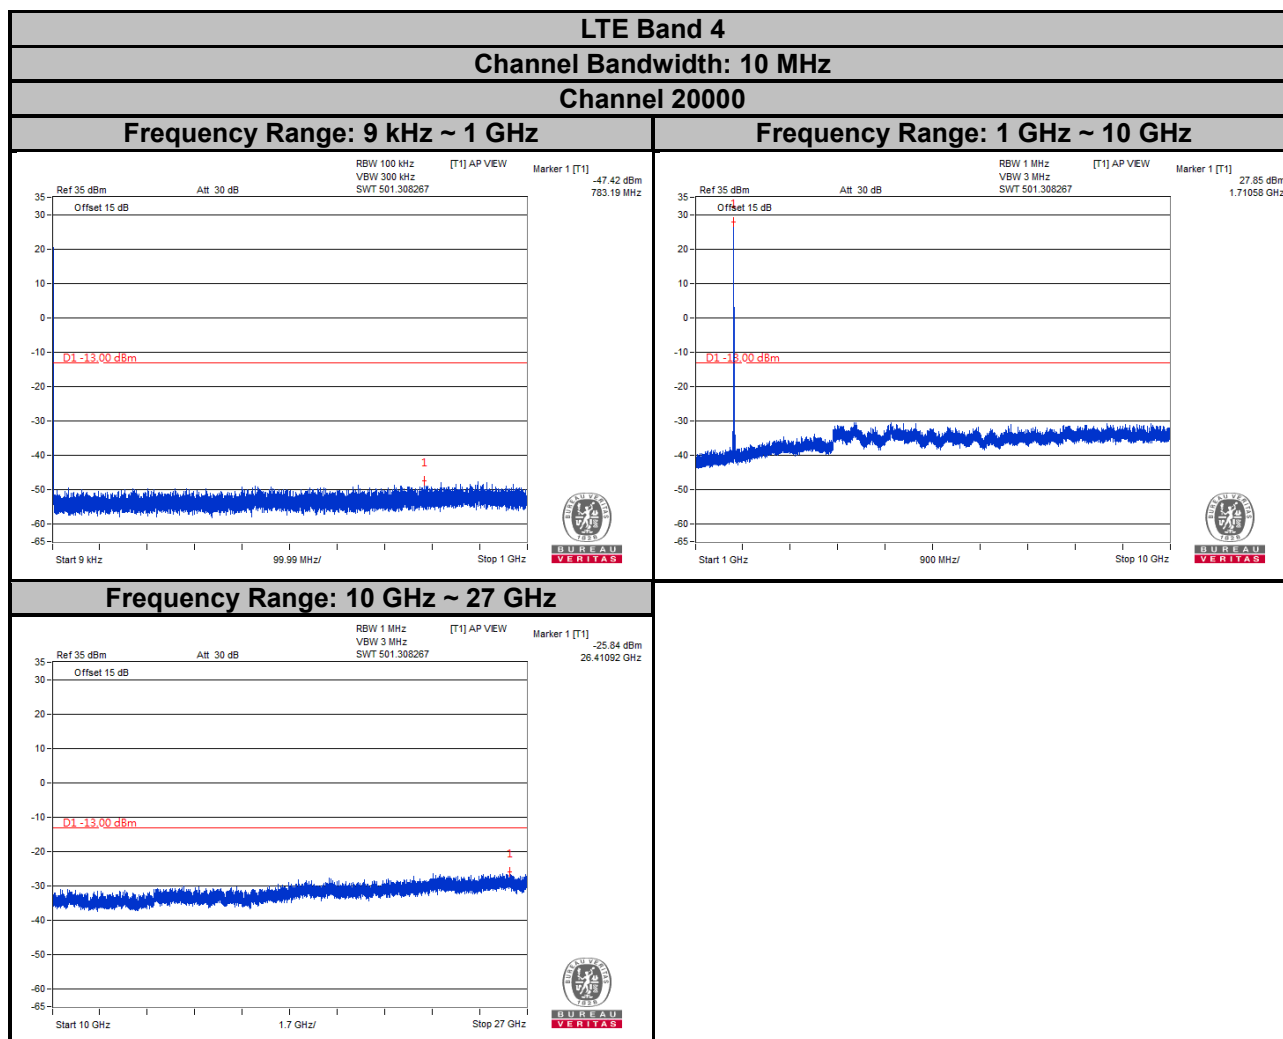


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

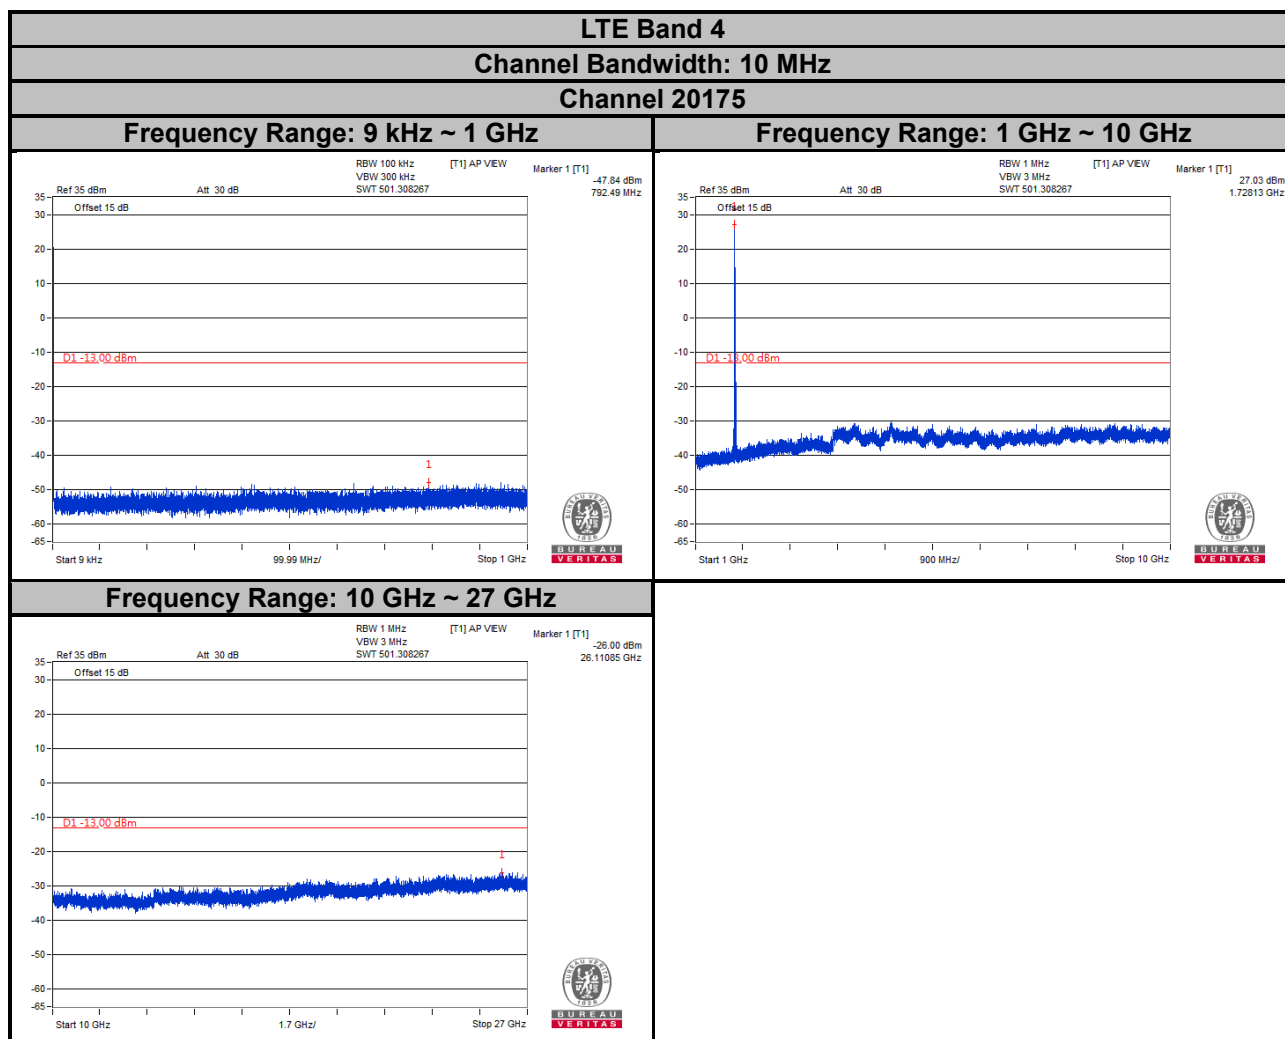


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

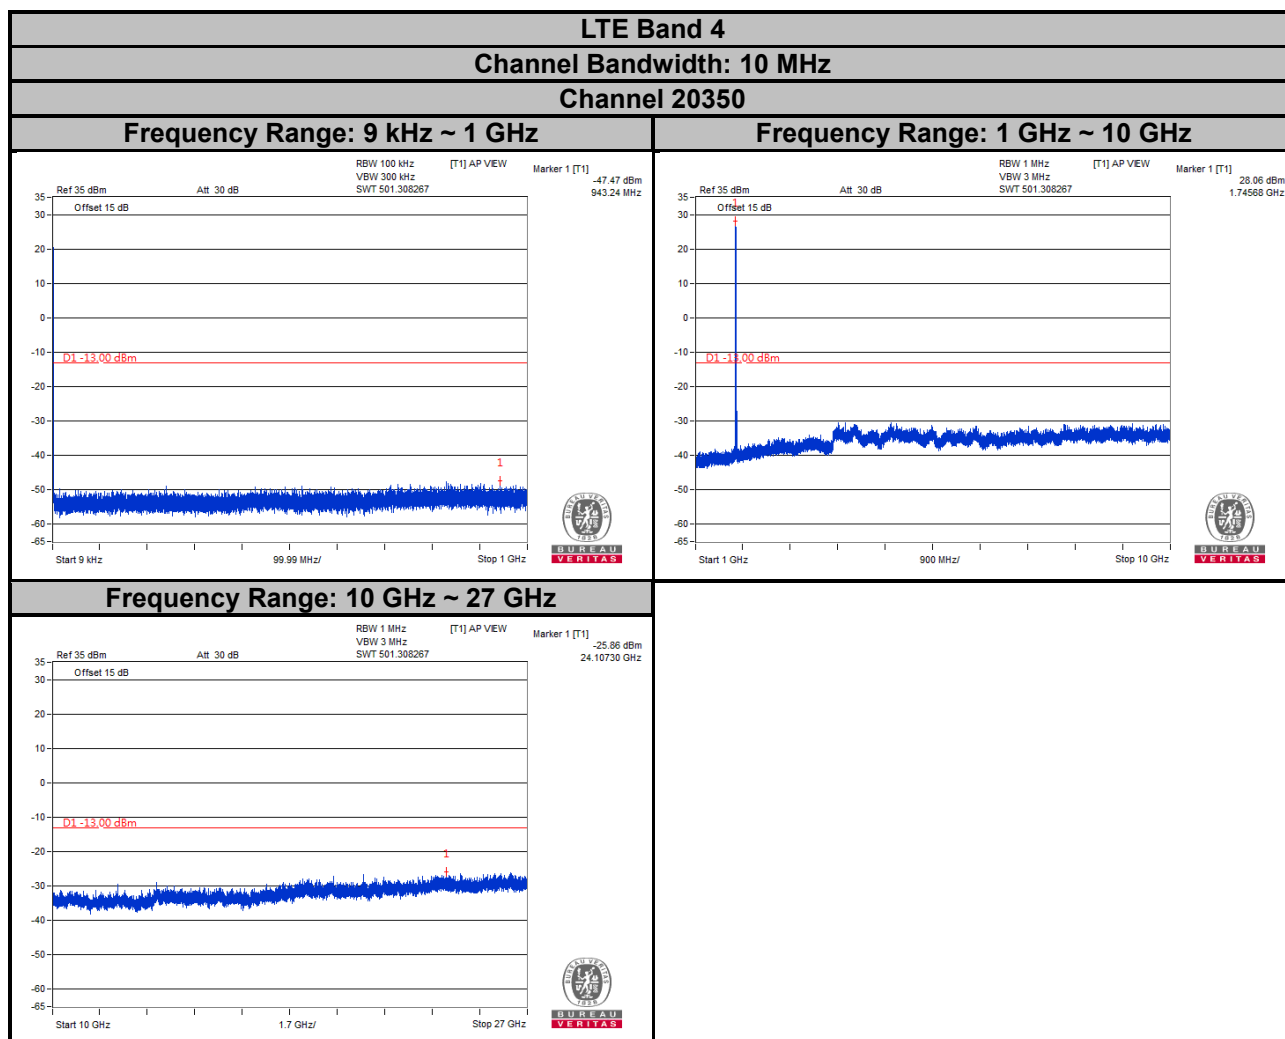


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

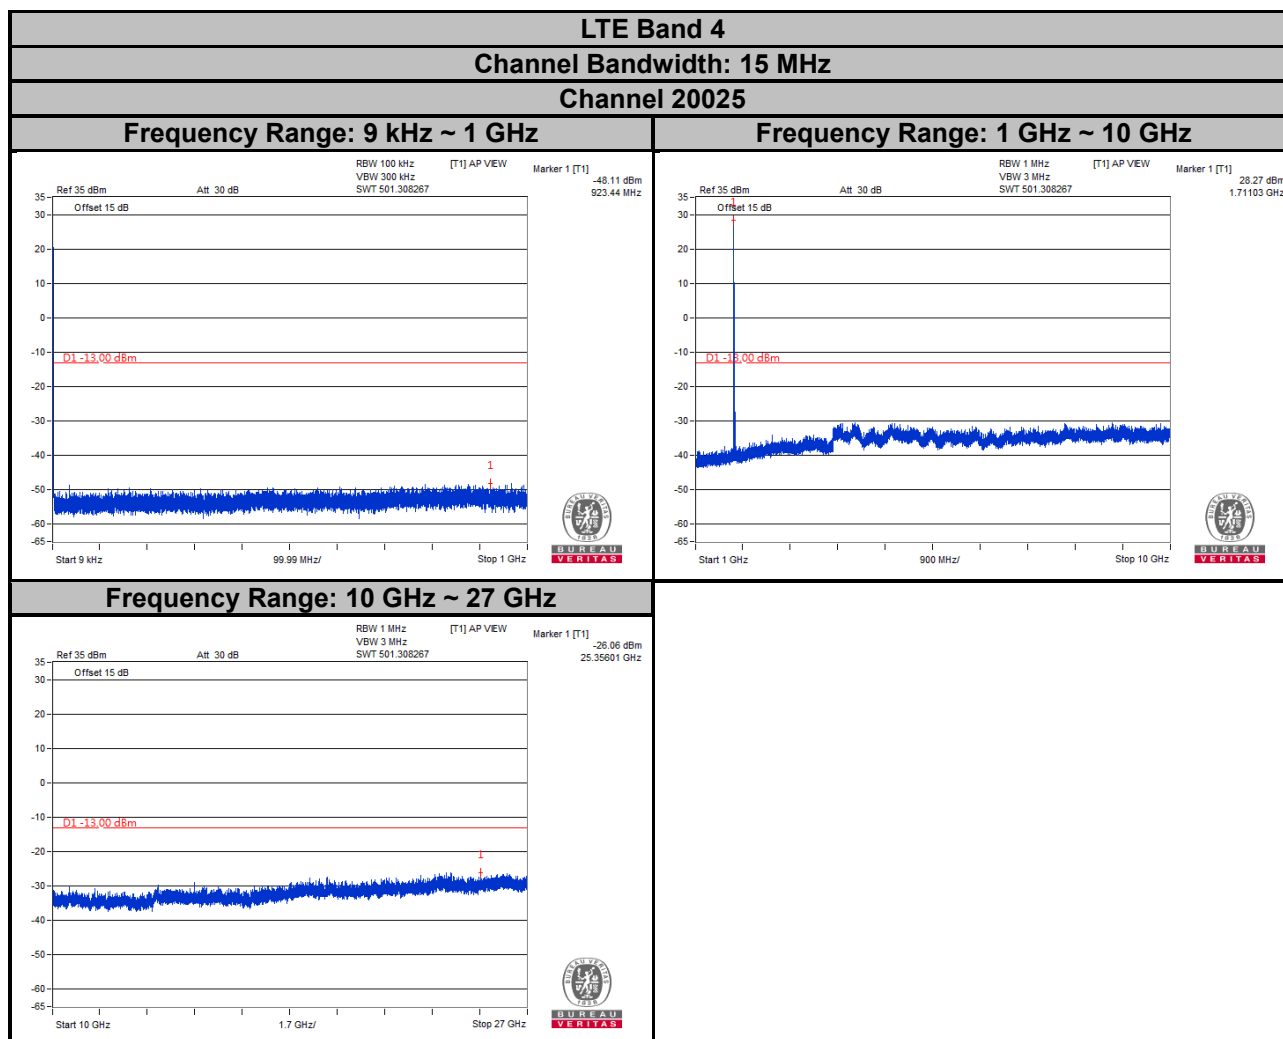


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

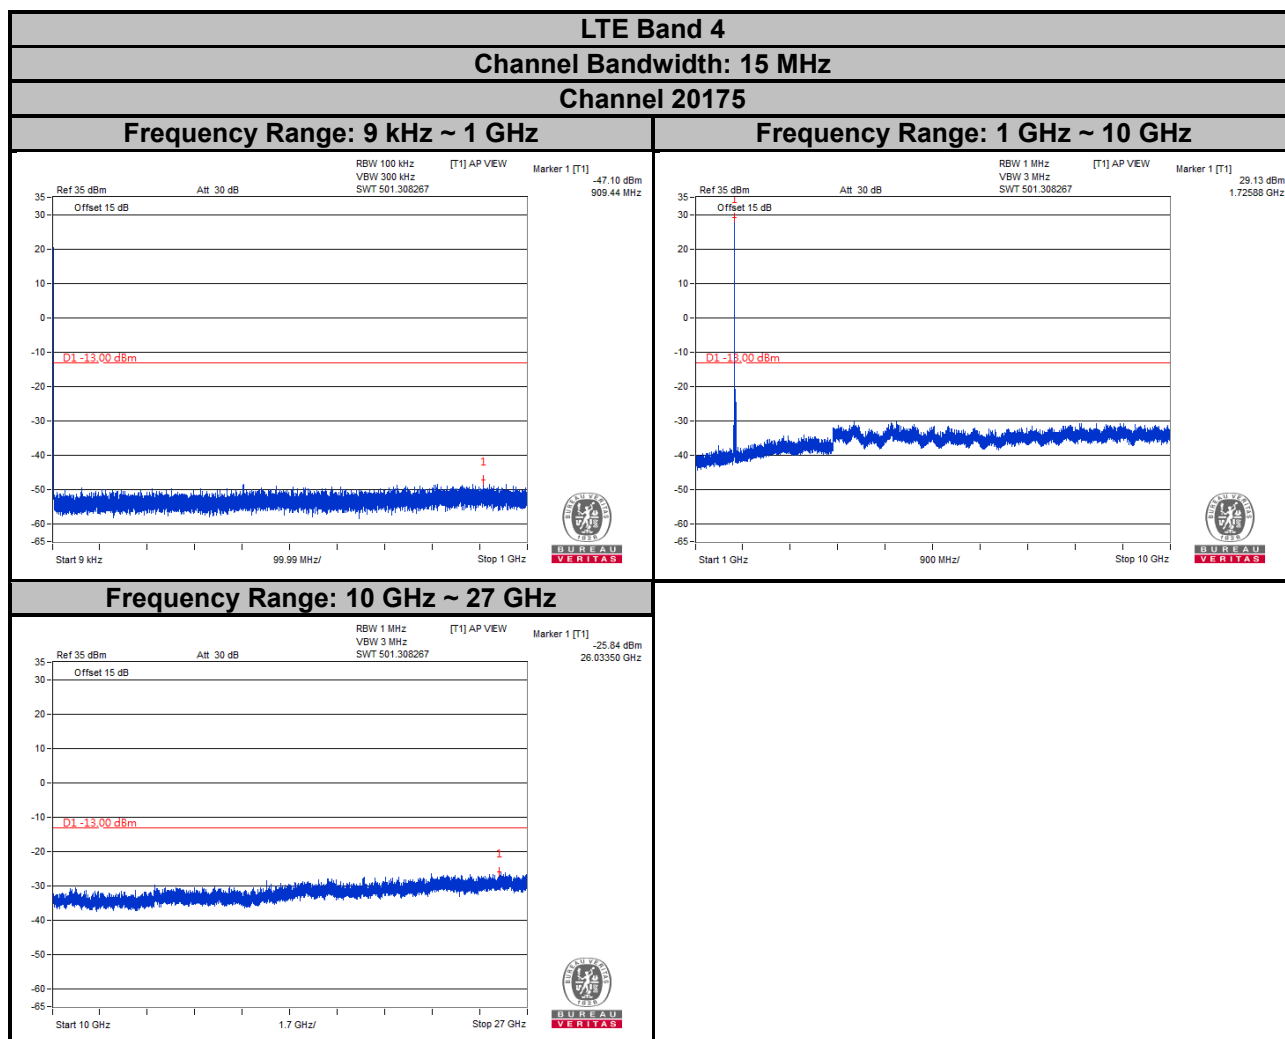


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

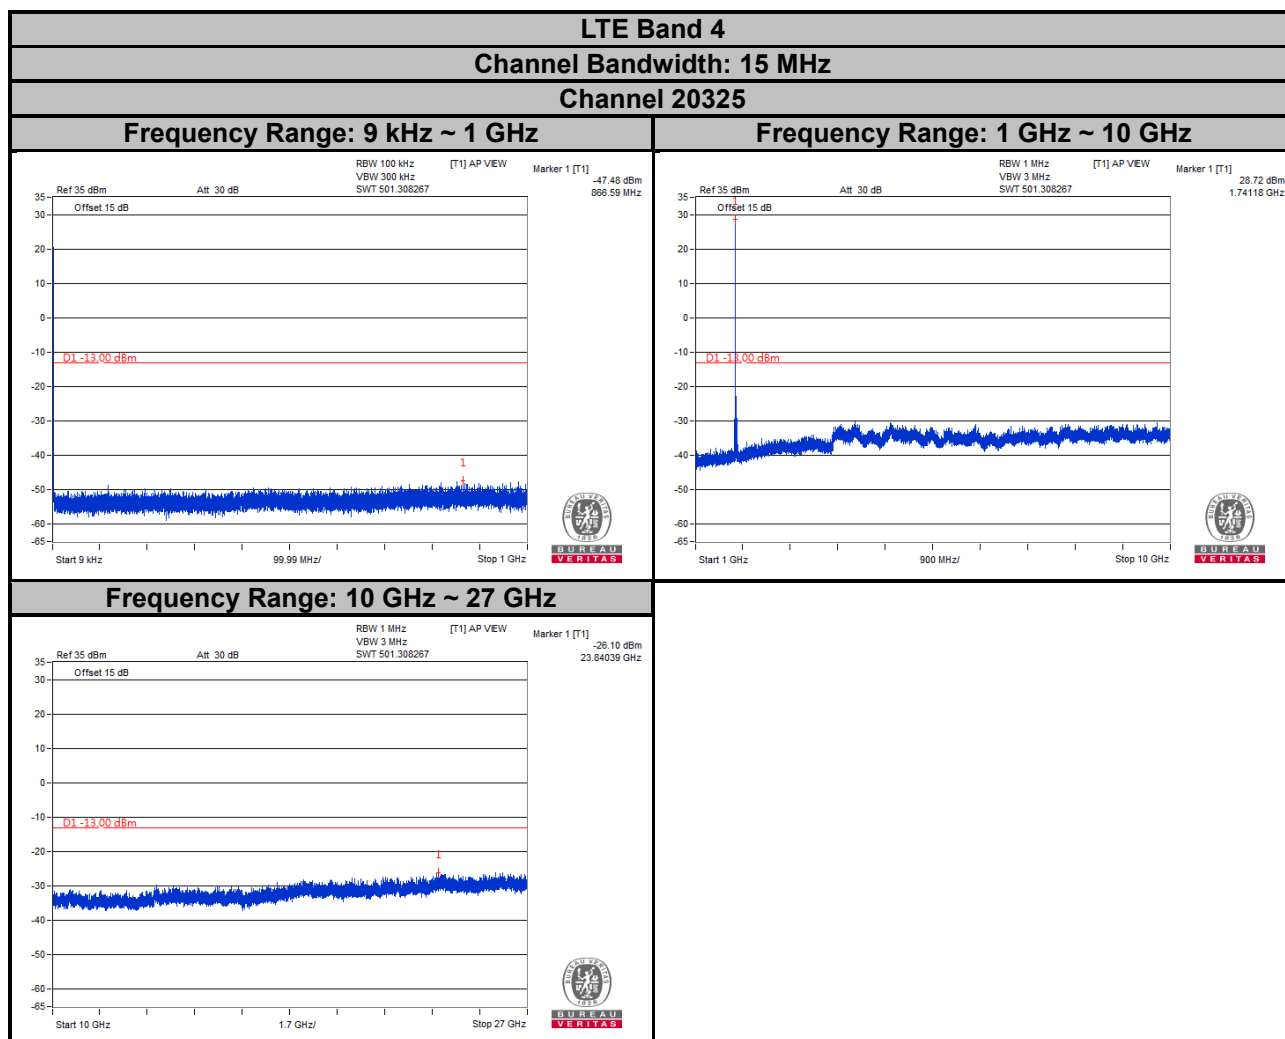


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

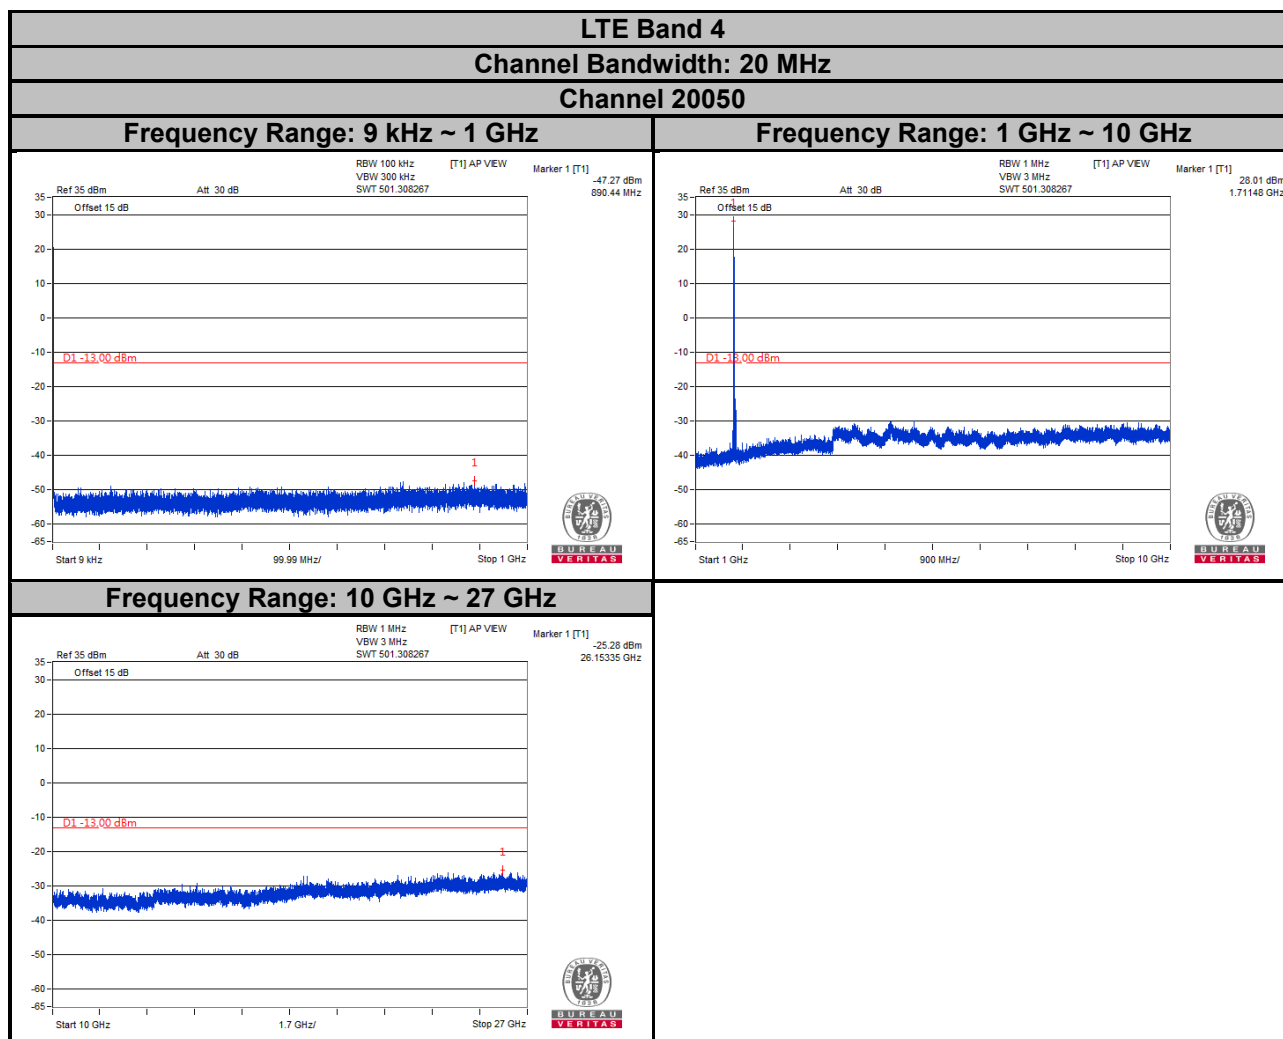


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

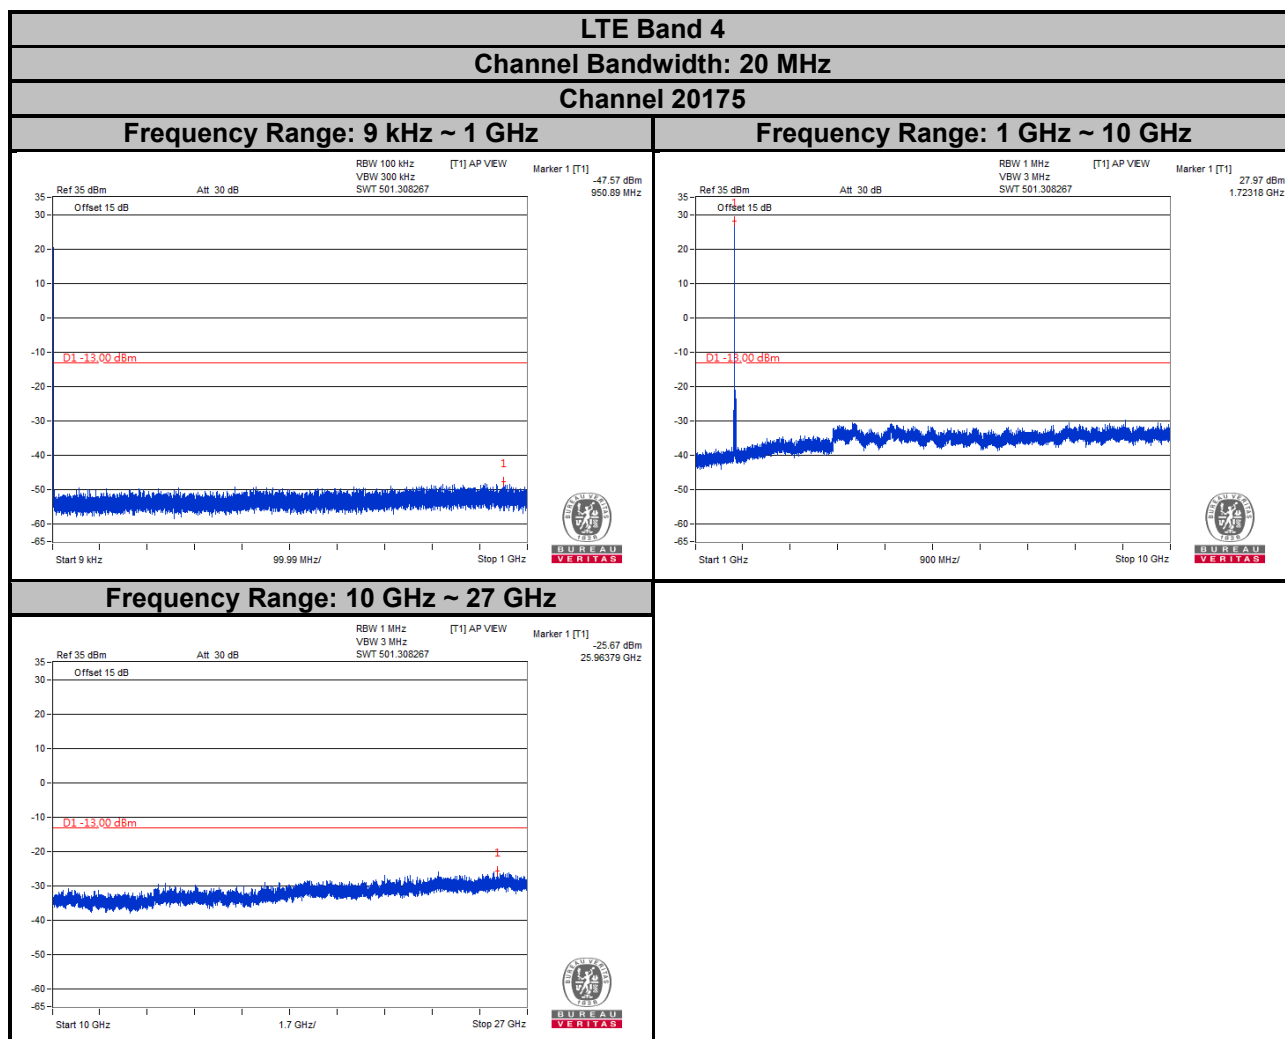


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

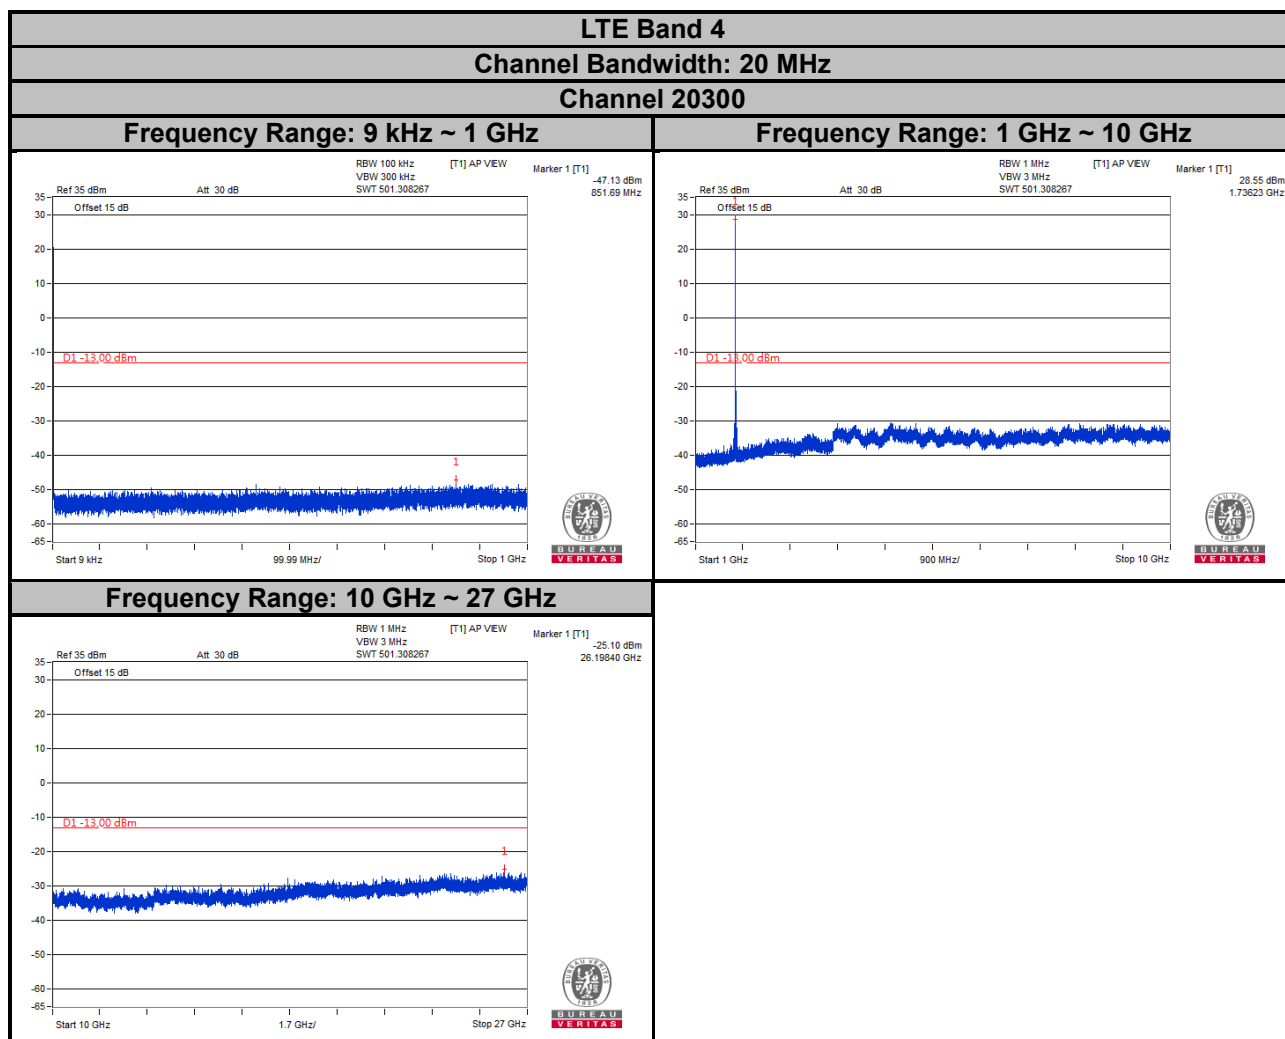


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

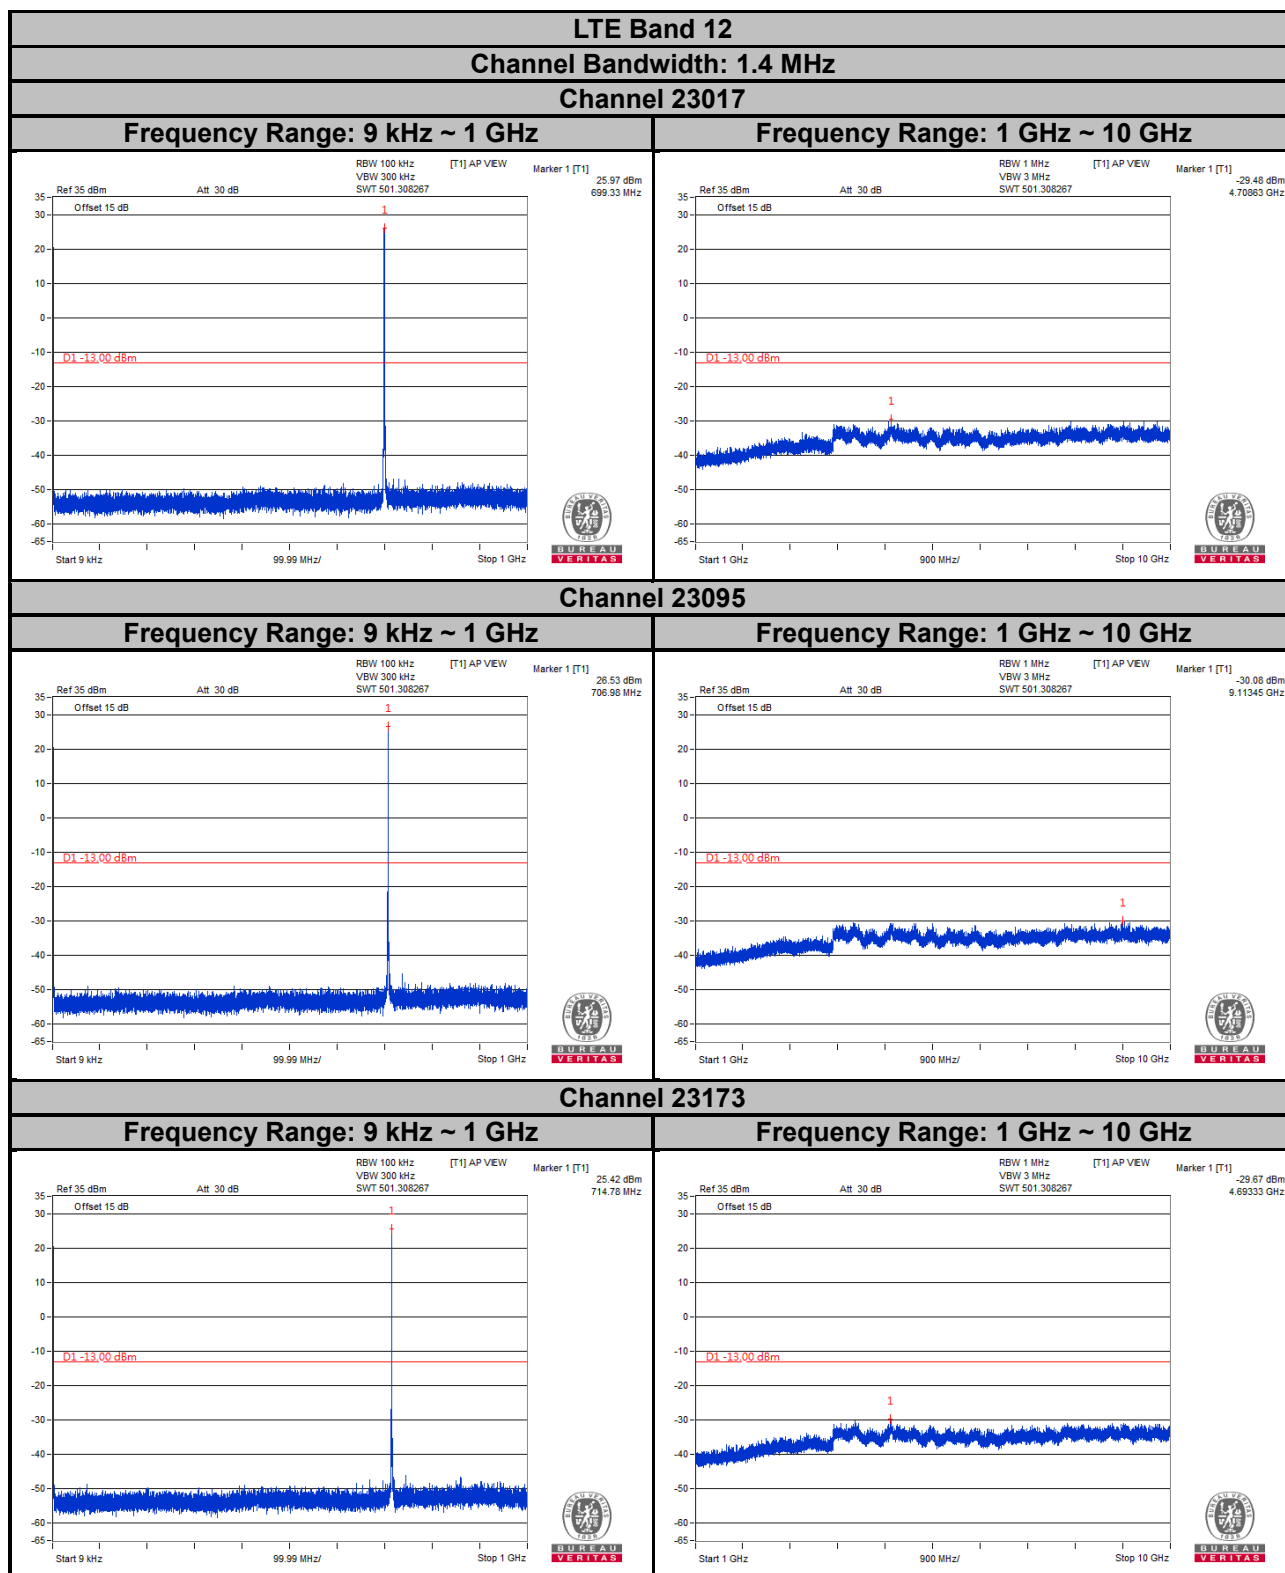


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

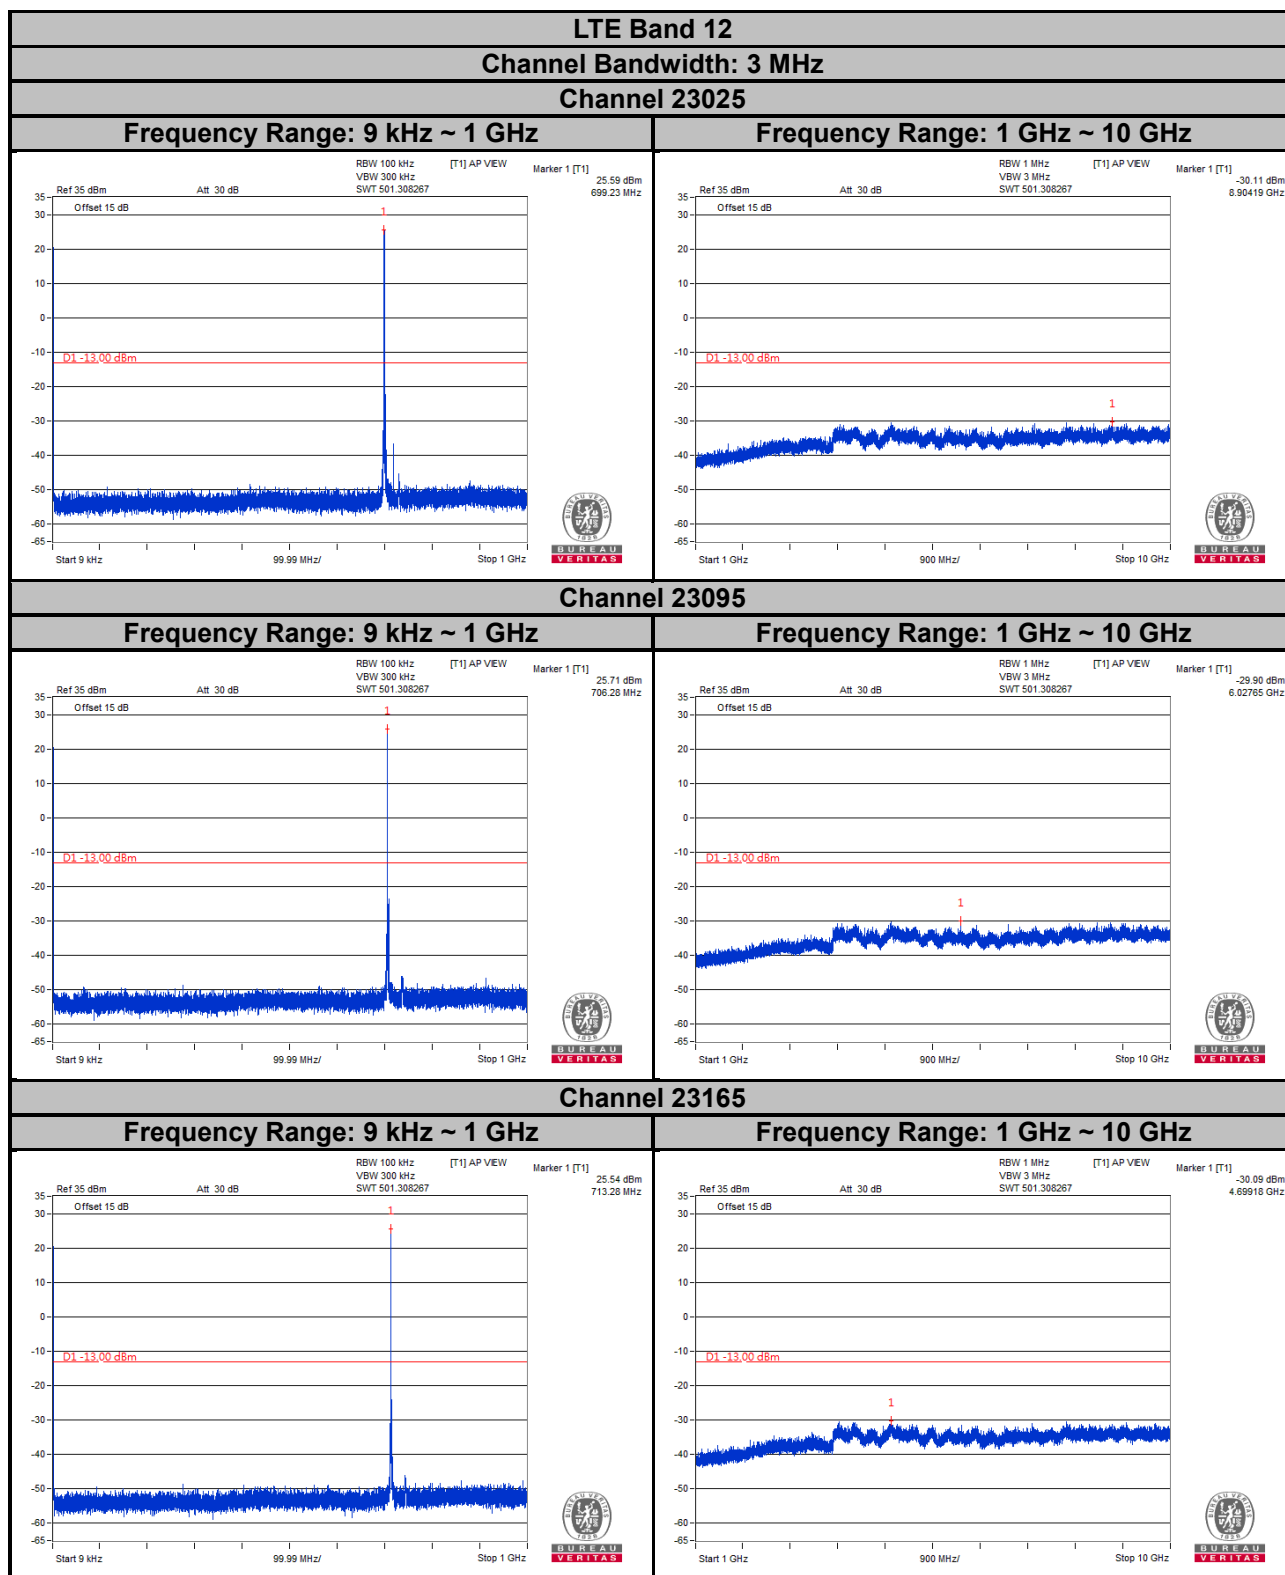


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

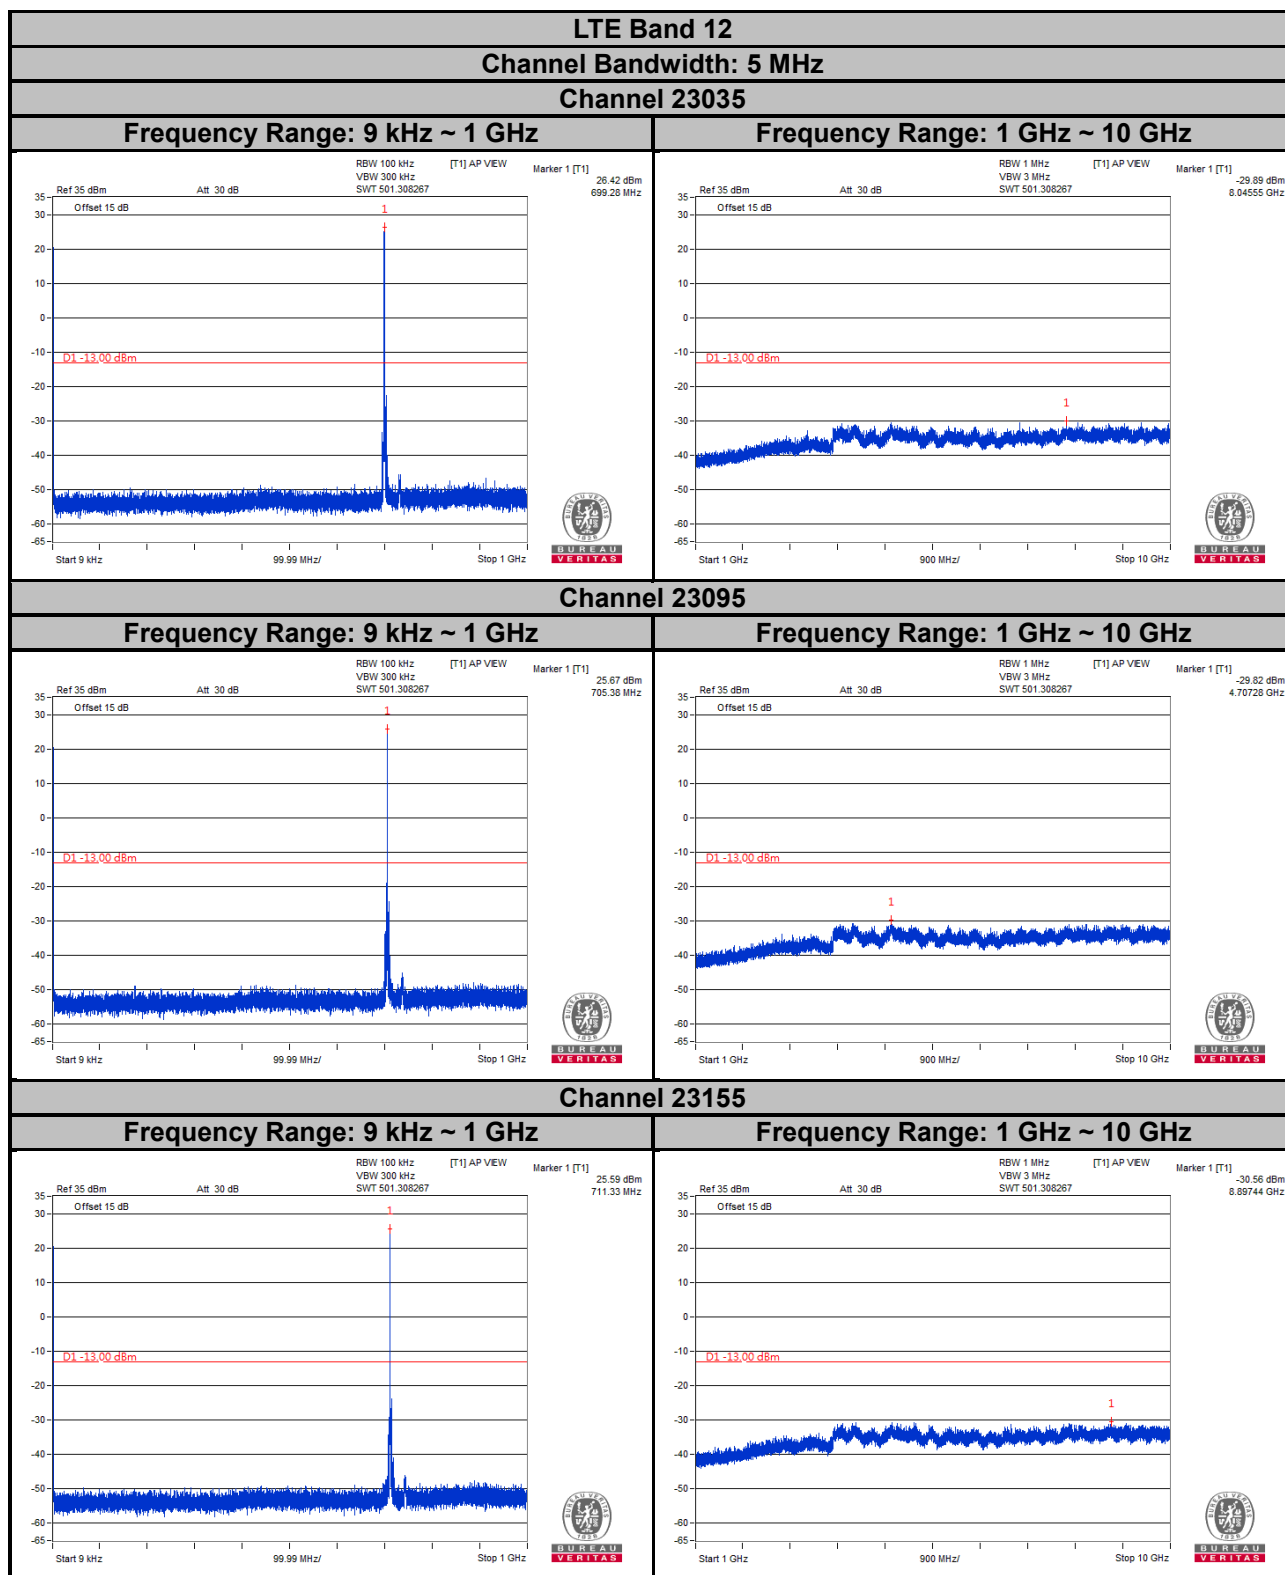


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

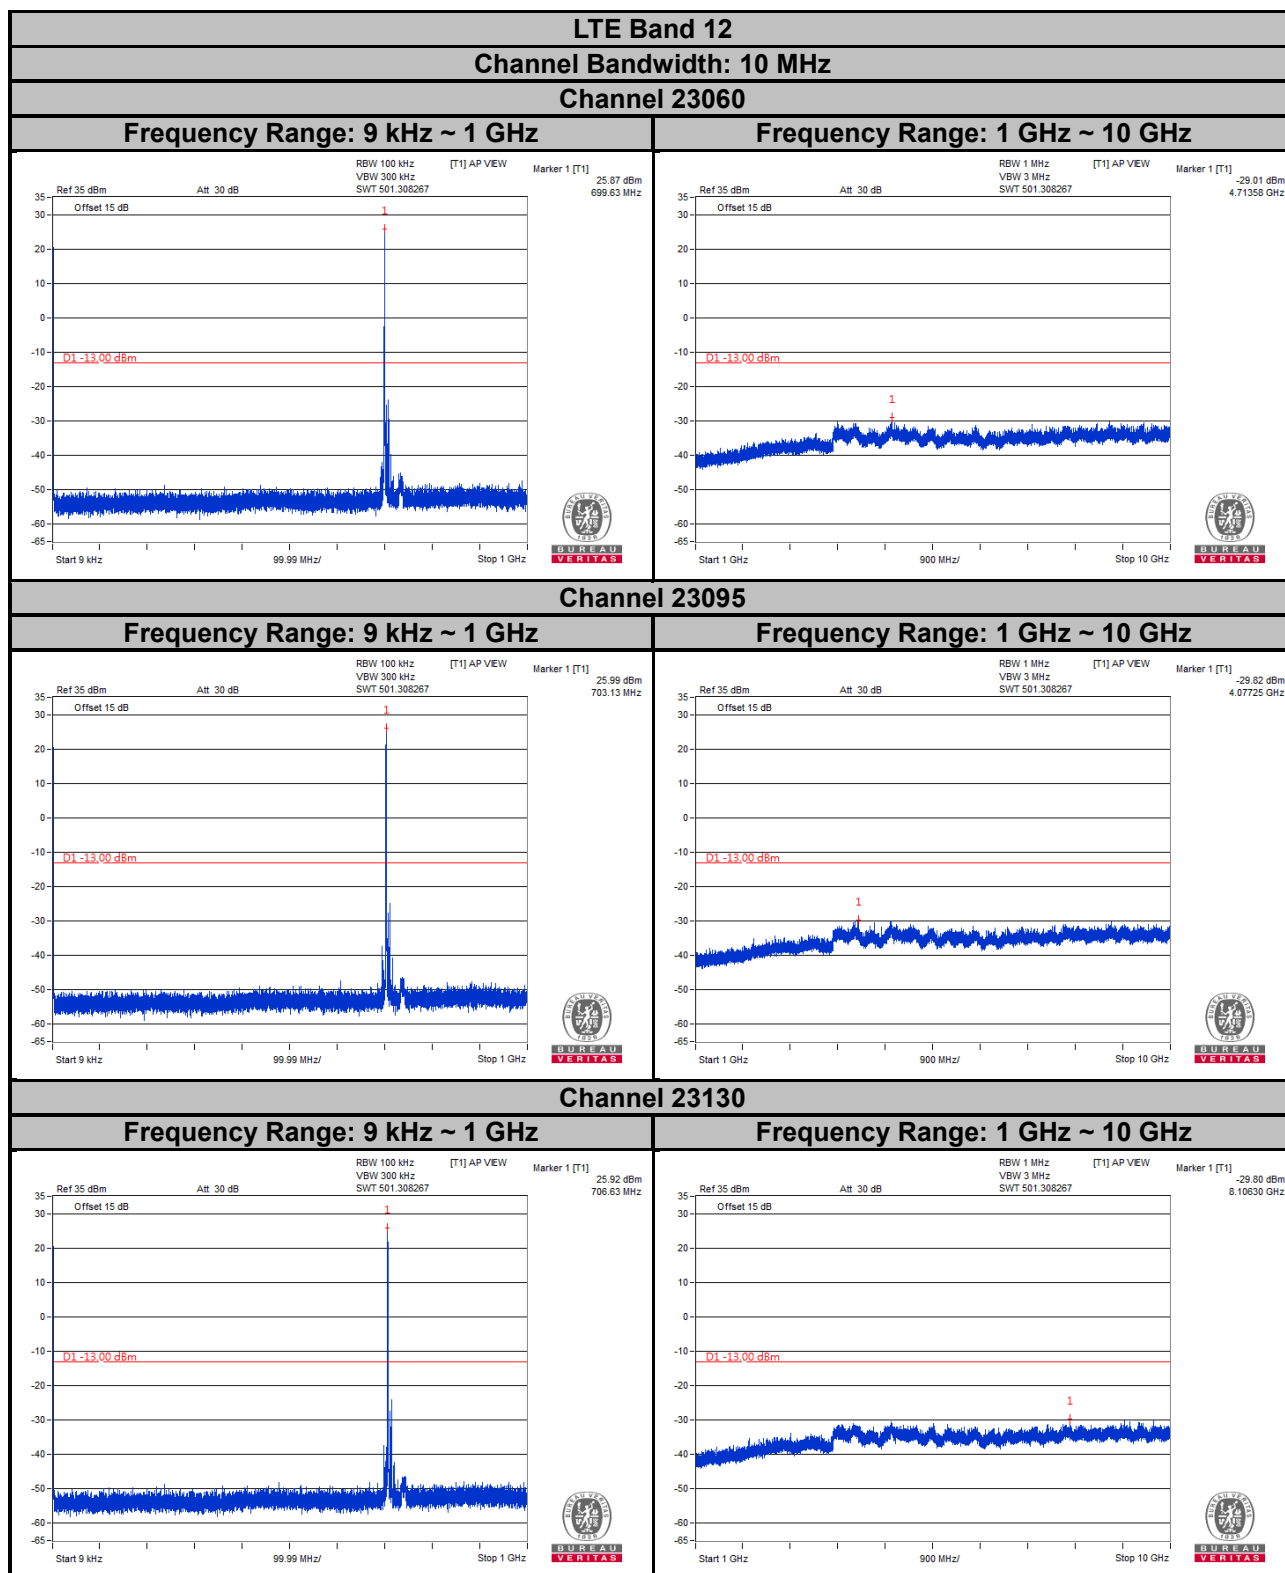


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

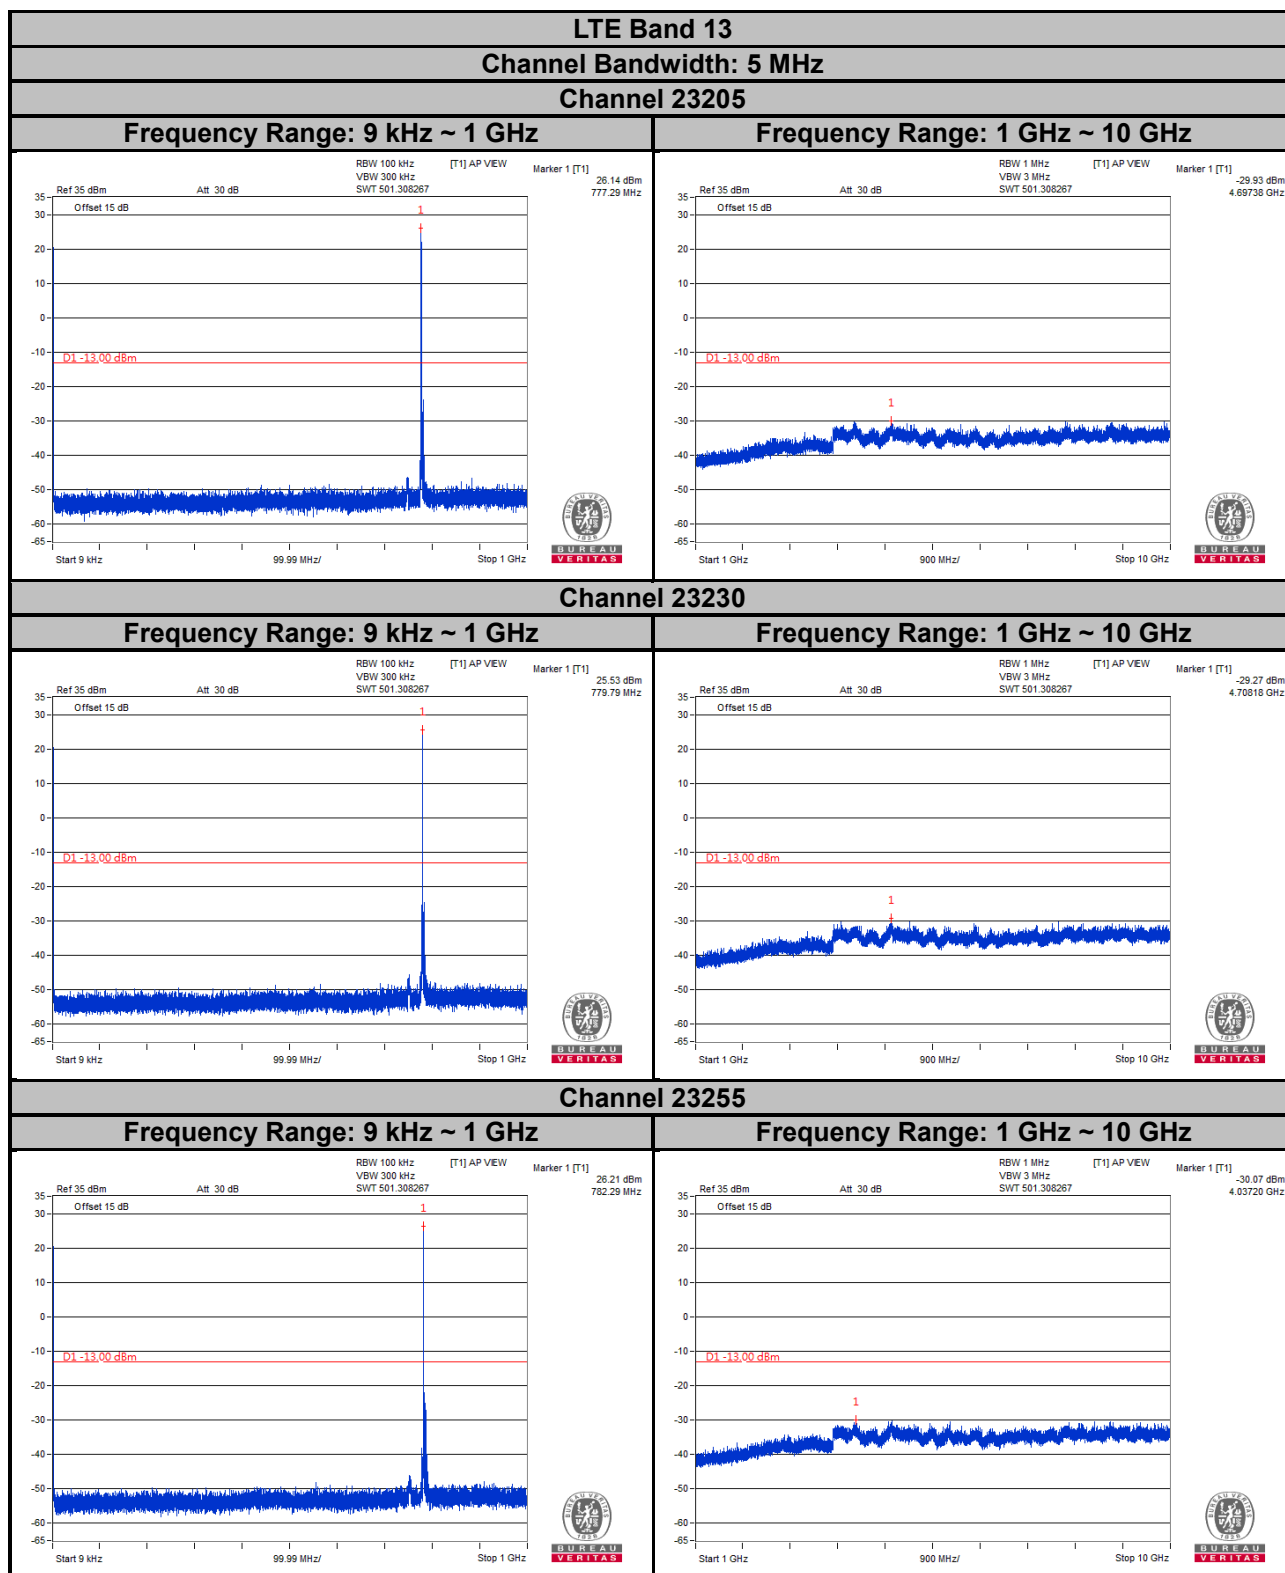


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

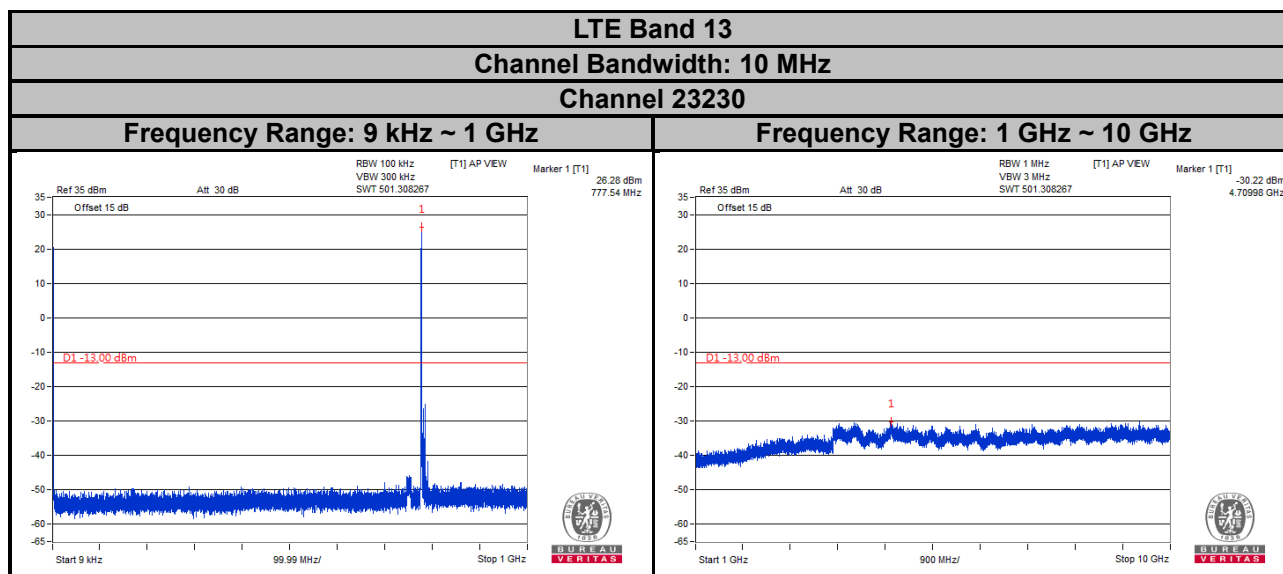

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

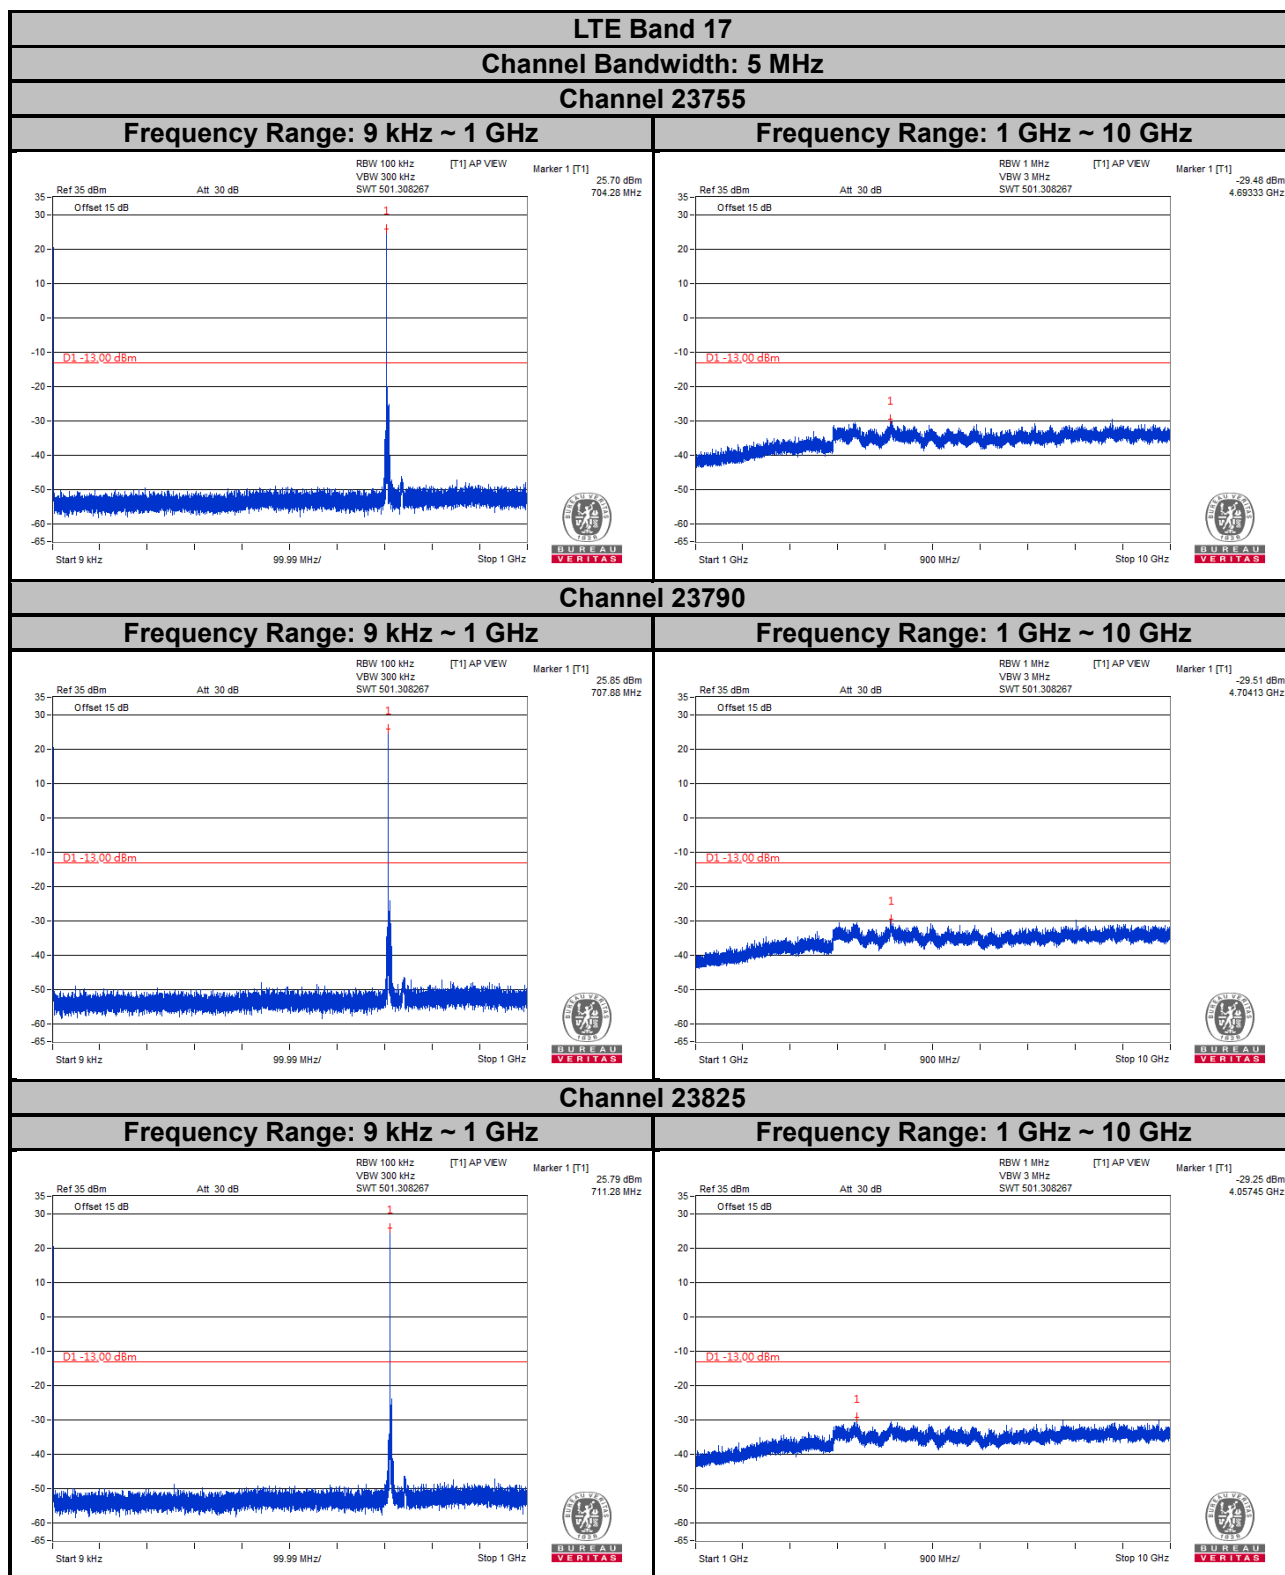

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

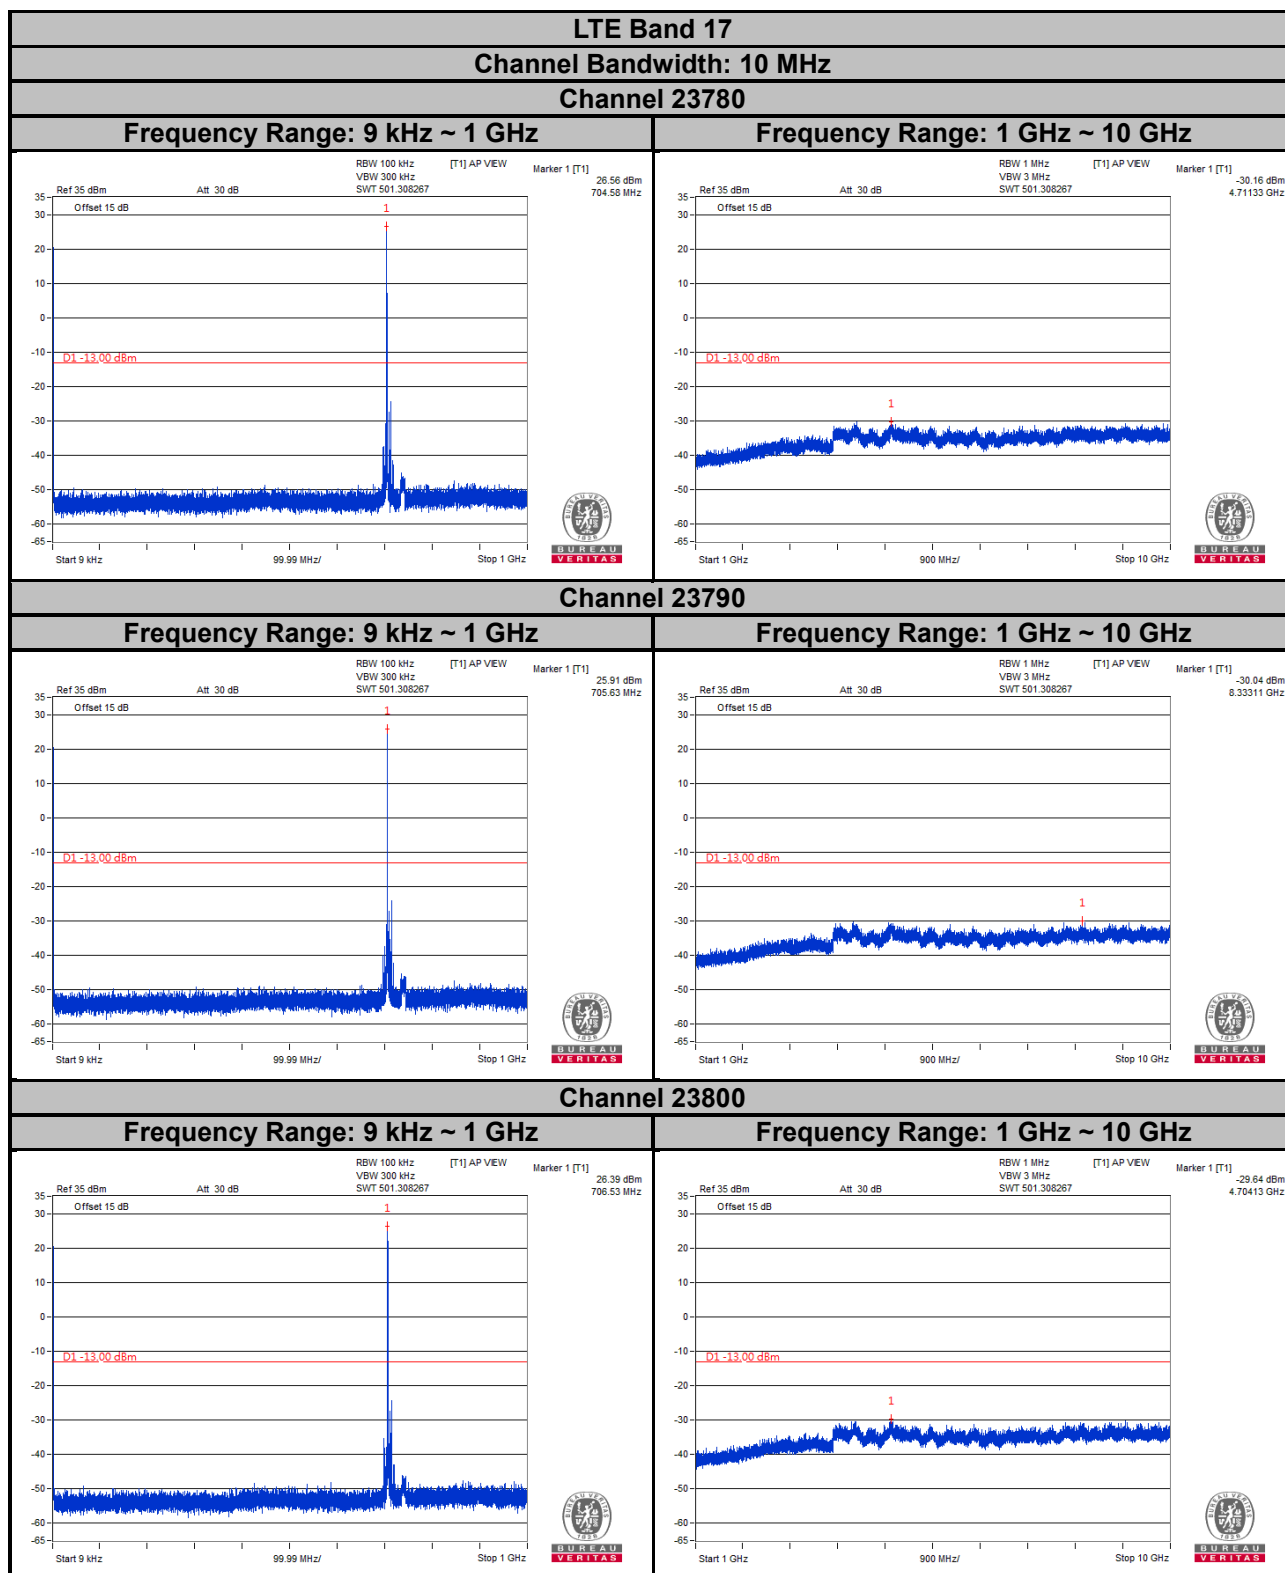

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.
- b. For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

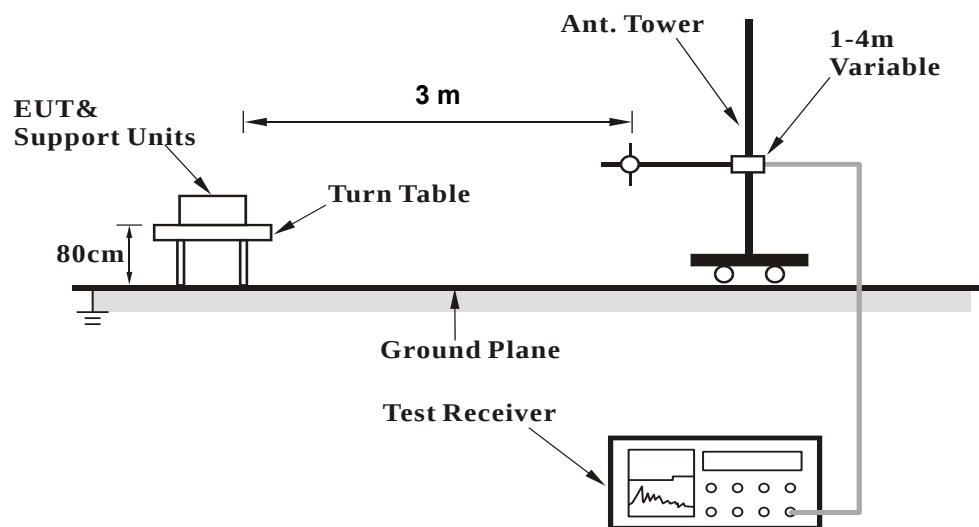

<Radiated Emission above 1 GHz>

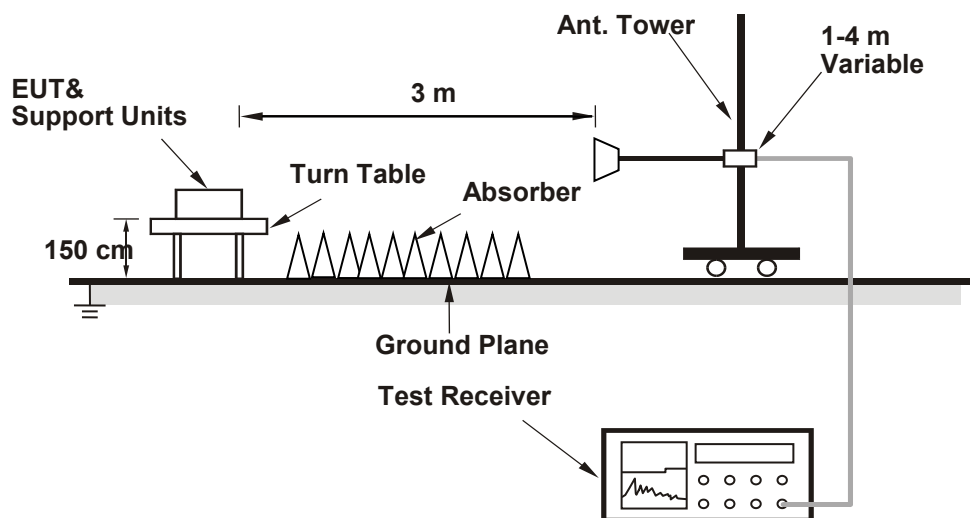

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

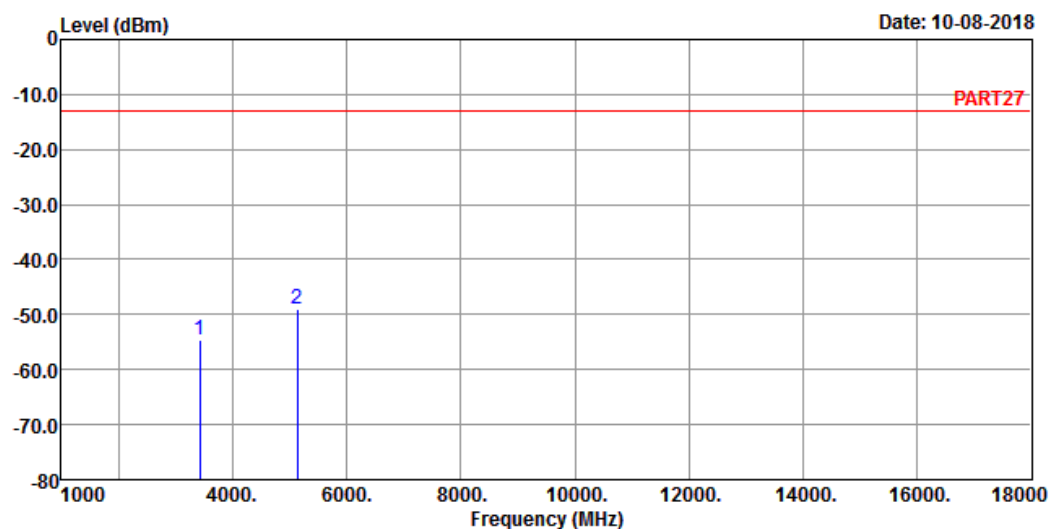

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remark : WCDMA Band 4 Link_L-CH
Tested by: Jisyong Wang


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3424.80	-54.51	-45.42	-13.00	-41.51	-9.09	Peak
2 pp	5137.20	-48.95	-45.98	-13.00	-35.95	-2.97	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

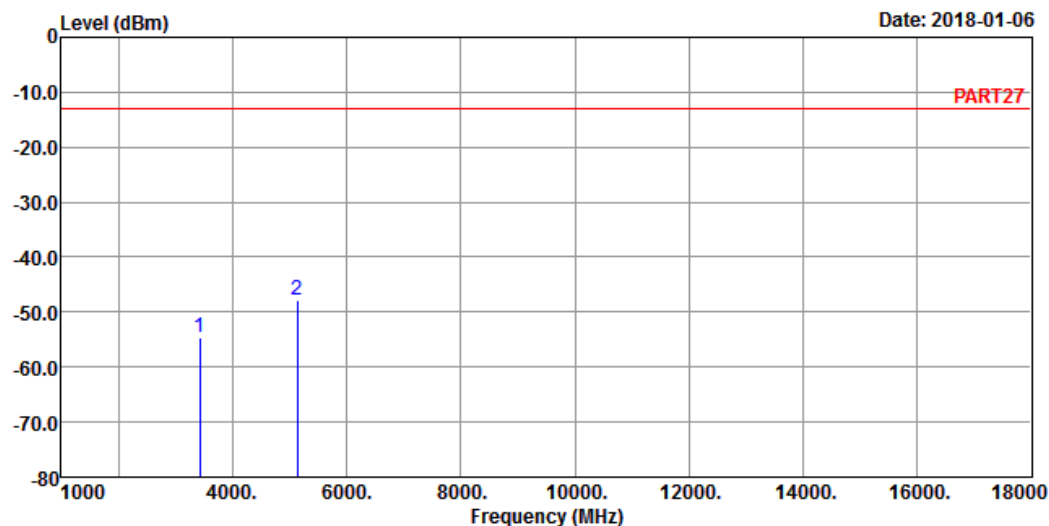

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remark : WCDMA Band 4 Link_L-CH
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3424.80	-54.72	-45.63	-13.00	-41.72	-9.09	Peak
2 pp	5137.20	-47.81	-44.84	-13.00	-34.81	-2.97	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

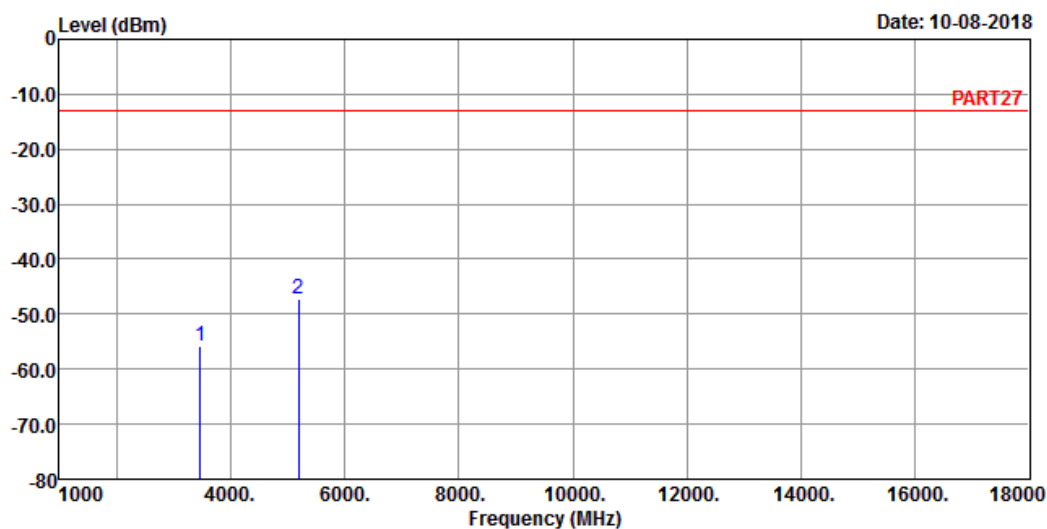

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remark : WCDMA Band 4 Link_M-CH
Tested by: Jisyong Wang


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.20	-55.90	-46.99	-13.00	-42.90	-8.91	Peak
2 pp	5197.80	-47.19	-44.33	-13.00	-34.19	-2.86	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

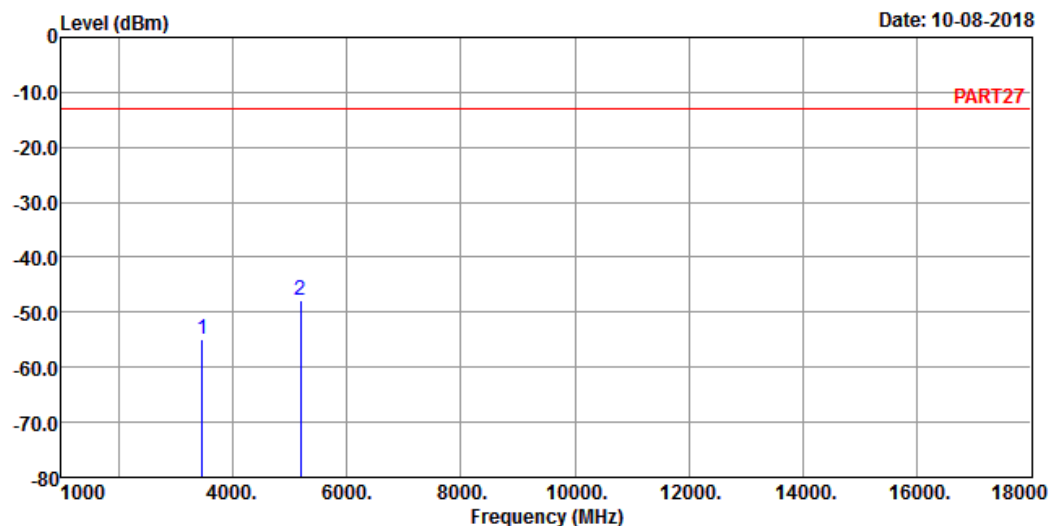

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remark : WCDMA Band 4 Link_M-CH
Tested by: Jisyong Wang

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.20	-54.76	-45.85	-13.00	-41.76	-8.91	Peak
2 pp	5197.80	-47.81	-44.95	-13.00	-34.81	-2.86	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

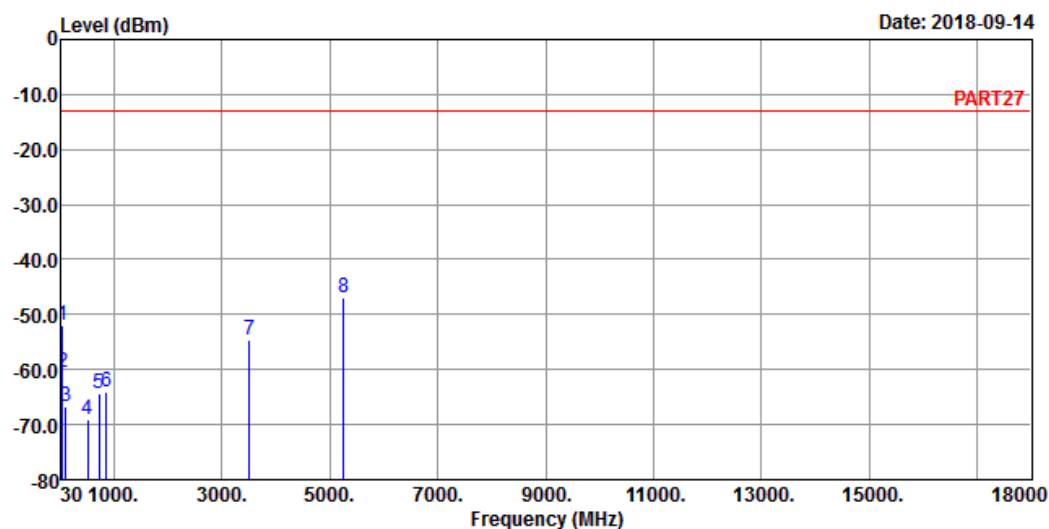

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remark : WCDMA Band 4 Link_H-CH
Tested by: Jisyong Wang


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	44.55	-51.84	-49.85	-25.00	-26.84	-1.99	Peak
2	52.31	-60.53	-54.99	-25.00	-35.53	-5.54	Peak
3	117.30	-66.61	-56.63	-25.00	-41.61	-9.98	Peak
4	509.18	-69.22	-64.92	-25.00	-44.22	-4.30	Peak
5	730.34	-64.27	-64.77	-25.00	-39.27	0.50	Peak
6	866.14	-64.07	-64.45	-25.00	-39.07	0.38	Peak
7	3505.20	-54.49	-46.38	-13.00	-41.49	-8.11	Peak
8	5257.80	-47.08	-44.60	-13.00	-34.08	-2.48	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

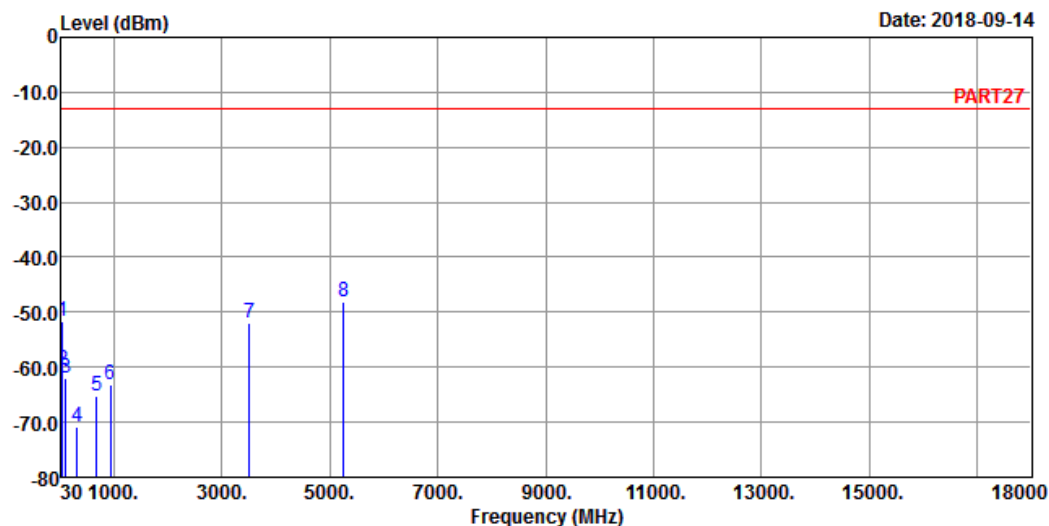

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remark : WCDMA Band 4 Link_H-CH
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	44.55	-51.77	-49.78	-25.00	-26.77	-1.99	Peak
2	53.28	-60.61	-54.80	-25.00	-35.61	-5.81	Peak
3	113.42	-62.08	-51.93	-25.00	-37.08	-10.15	Peak
4	326.82	-70.80	-64.20	-25.00	-45.80	-6.60	Peak
5	684.75	-65.14	-64.80	-25.00	-40.14	-0.34	Peak
6	932.10	-63.30	-64.67	-25.00	-38.30	1.37	Peak
7	3505.20	-52.00	-43.89	-13.00	-39.00	-8.11	Peak
8	5257.80	-48.11	-45.63	-13.00	-35.11	-2.48	Peak


LTE Band 4
Channel Bandwidth: 20 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

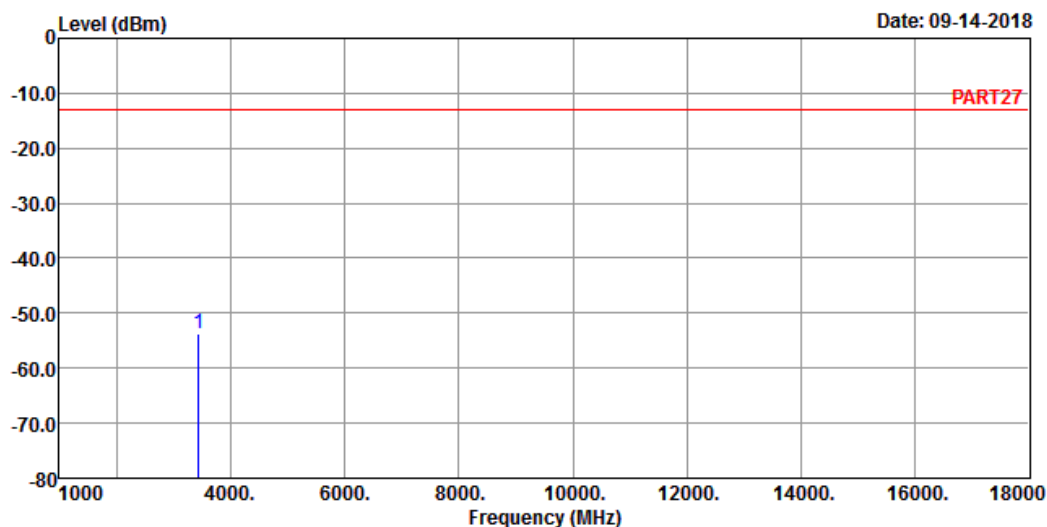

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_20M Link_L-CH
Tested by: Thomas Wei


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3440.00	-53.86	-45.64	-13.00	-40.86	-8.22	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

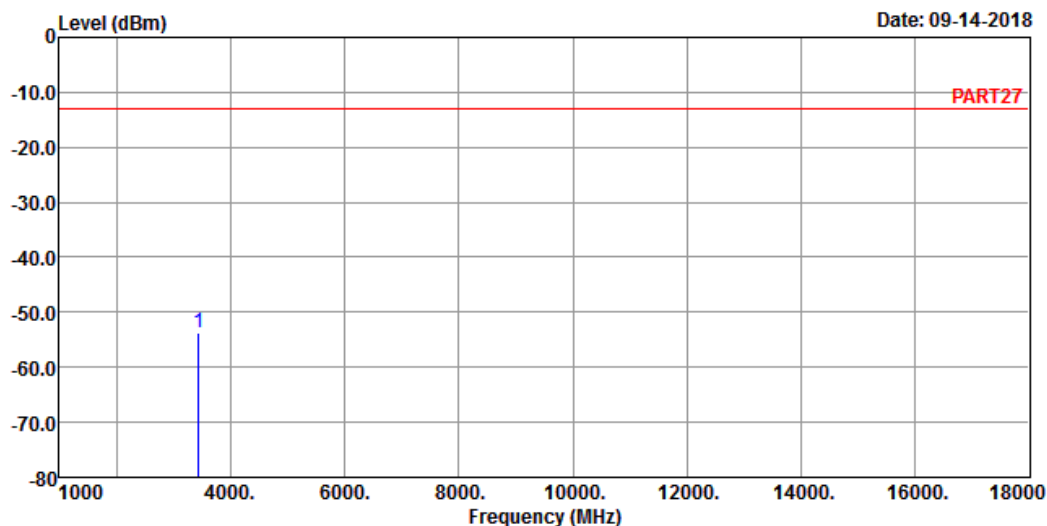

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 4 QPSK_20M Link_L-CH
 Tested by: Thomas Wei

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3440.00	-53.59	-45.37	-13.00	-40.59	-8.22	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

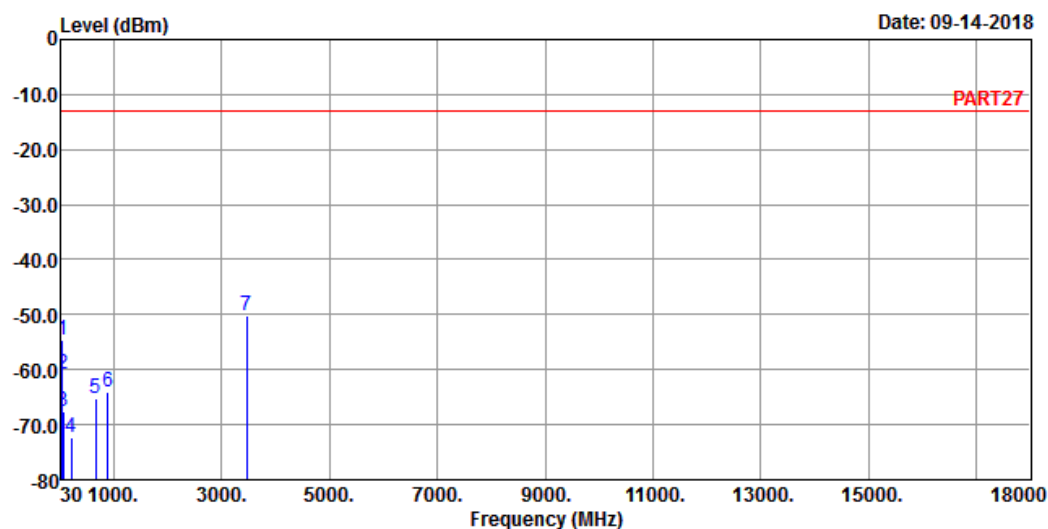

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_20M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	45.52	-54.50	-52.00	-13.00	-41.50	-2.50	Peak
2	53.28	-60.83	-55.02	-13.00	-47.83	-5.81	Peak
3	61.04	-67.65	-59.91	-13.00	-54.65	-7.74	Peak
4	208.48	-72.39	-64.72	-13.00	-59.39	-7.67	Peak
5	670.20	-65.31	-64.74	-13.00	-52.31	-0.57	Peak
6	896.21	-64.08	-64.63	-13.00	-51.08	0.55	Peak
7 pp	3465.00	-50.31	-42.43	-13.00	-37.31	-7.88	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

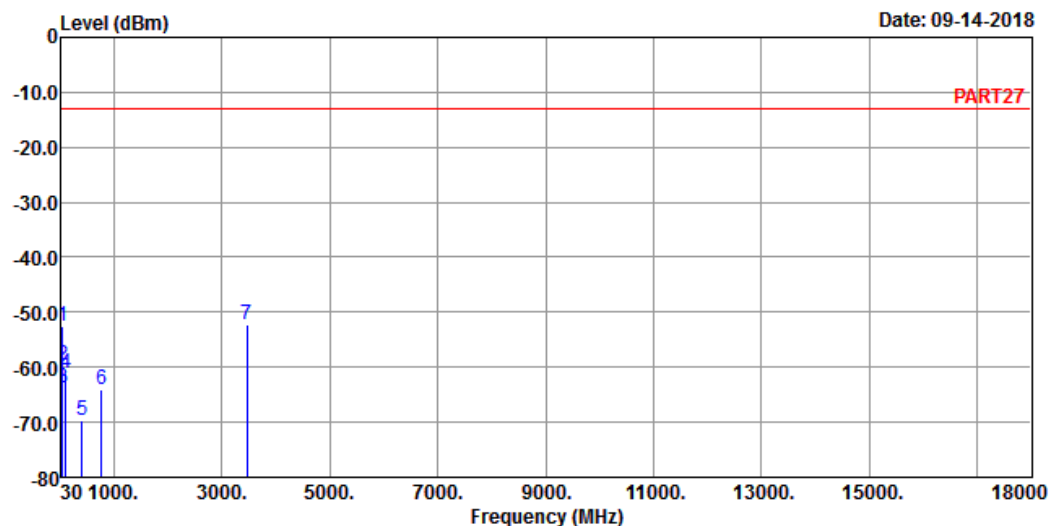

Site : 966 Chamber 5

Condition: PART27 VERTICAL

Remak : LTE Band 4 QPSK_20M Link_M-CH

Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-52.56	-50.57	-13.00	-39.56	-1.99	Peak
2	52.31	-59.71	-54.17	-13.00	-46.71	-5.54	Peak
3	54.25	-63.89	-57.82	-13.00	-50.89	-6.07	Peak
4	113.42	-61.18	-51.03	-13.00	-48.18	-10.15	Peak
5	413.15	-69.69	-63.85	-13.00	-56.69	-5.84	Peak
6	779.81	-63.95	-64.74	-13.00	-50.95	0.79	Peak
7 pp	3465.00	-52.36	-44.48	-13.00	-39.36	-7.88	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

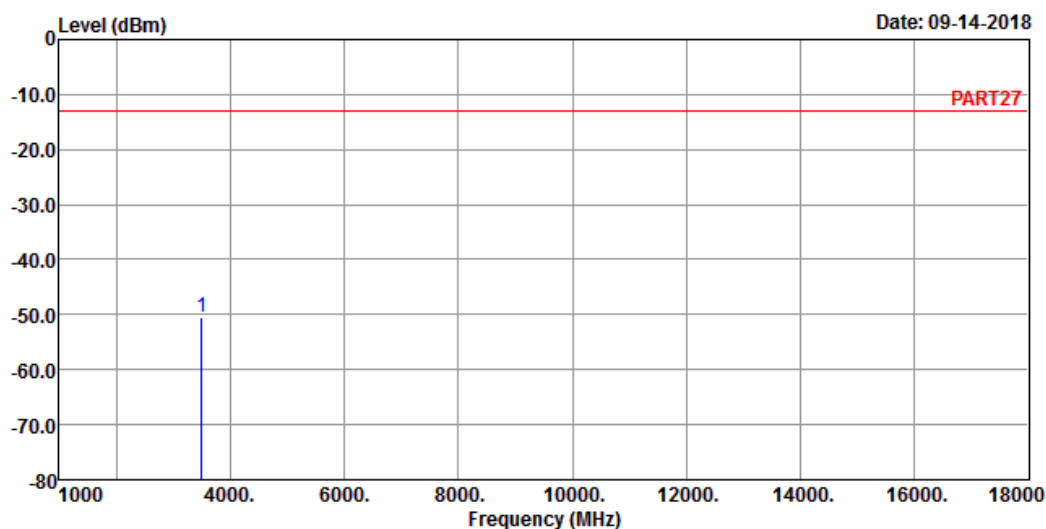

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 4 QPSK_20M Link_H-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 3490.00 -50.58 -42.93 -13.00 -37.58 -7.65 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

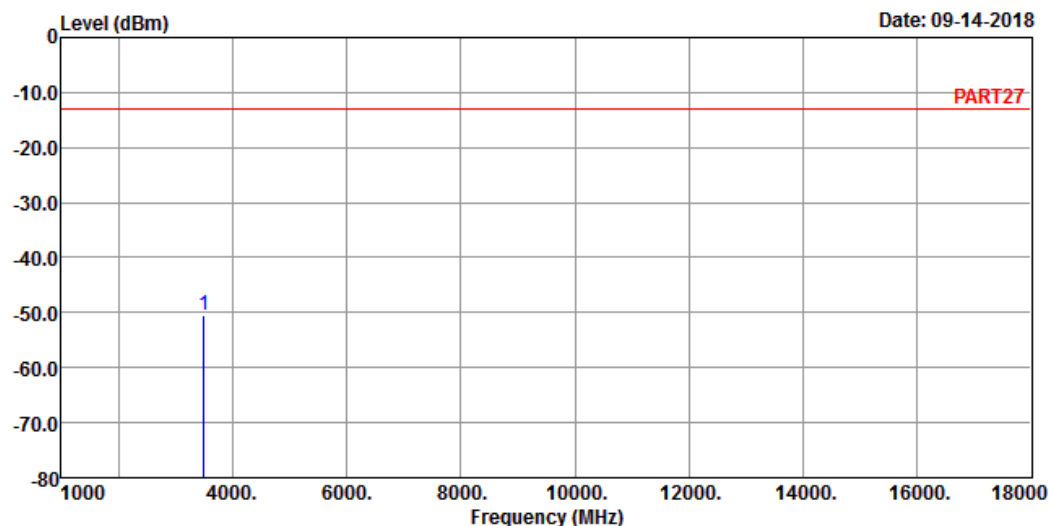

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 4 QPSK_20M Link_H-CH
 Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3490.00	-50.47	-42.82	-13.00	-37.47	-7.65	Peak


LTE Band 12
Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

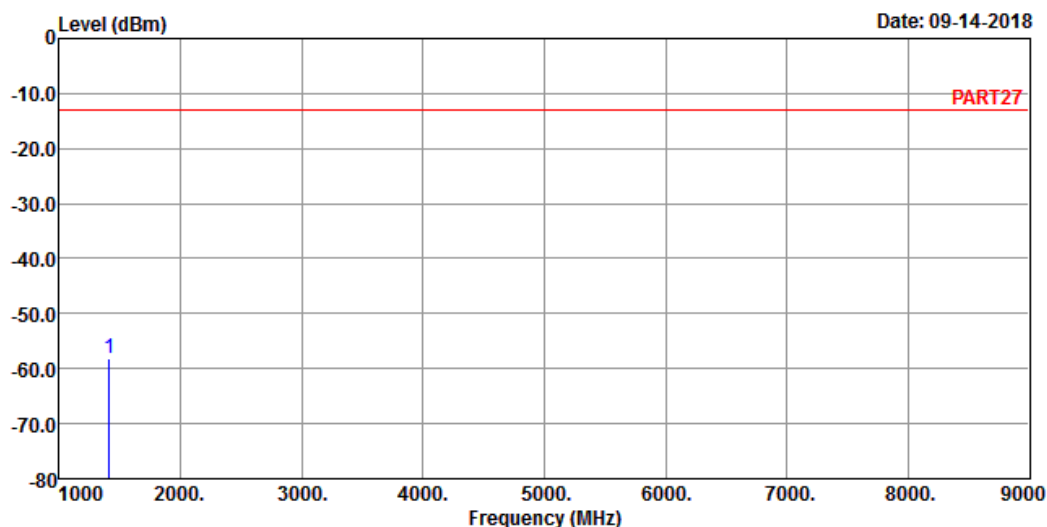

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_10M Link_L-CH
Tested by: Thomas Wei


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1408.00	-58.08	-46.12	-13.00	-45.08	-11.96	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

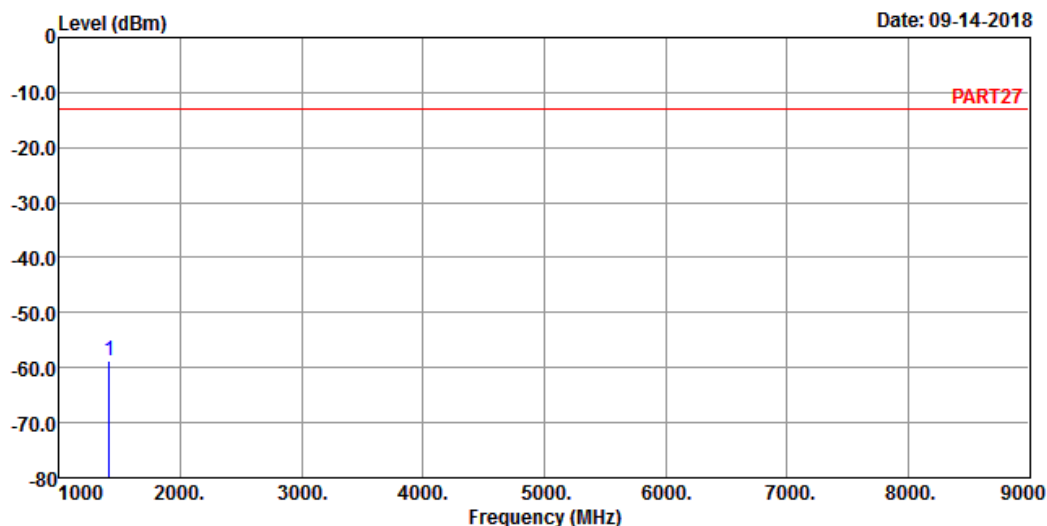

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 12 QPSK_10M Link_L-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1408.00	-58.80	-46.84	-13.00	-45.80	-11.96	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

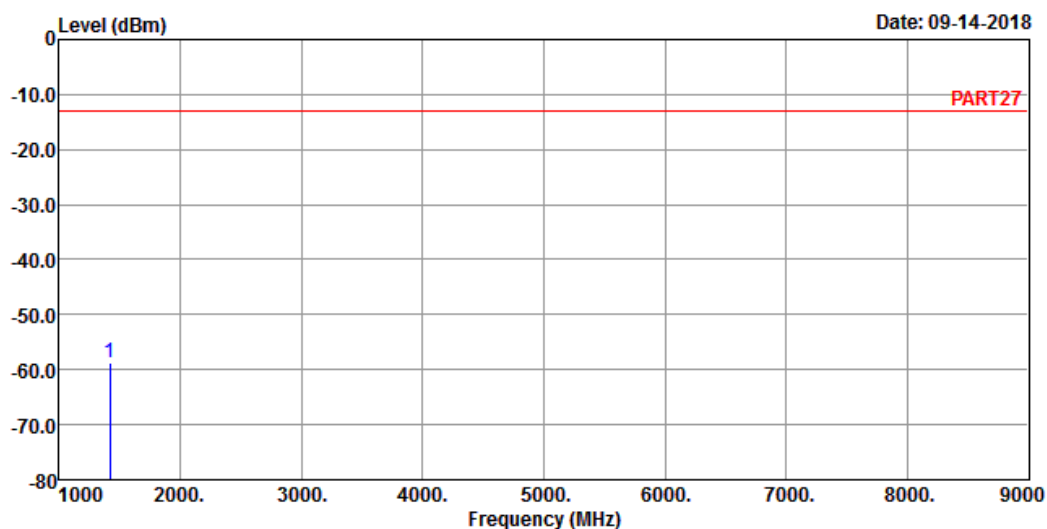

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 12 QPSK_10M Link_M-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1415.00 -58.86 -46.78 -13.00 -45.86 -12.08 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

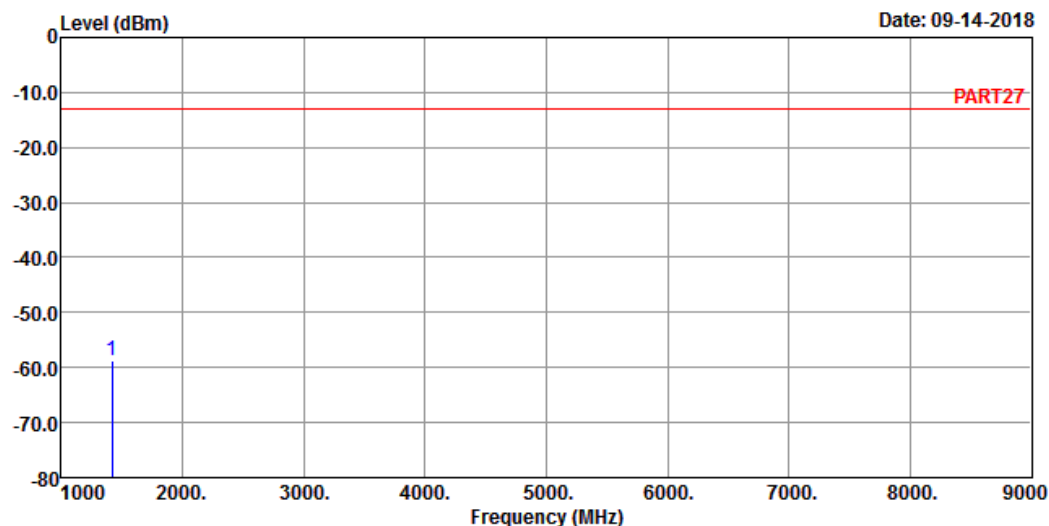

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_10M Link_M-CH
 Tested by: Thomas Wei

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1 pp 1415.00	-58.85	-46.77	-13.00	-45.85	-12.08	Peak	


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

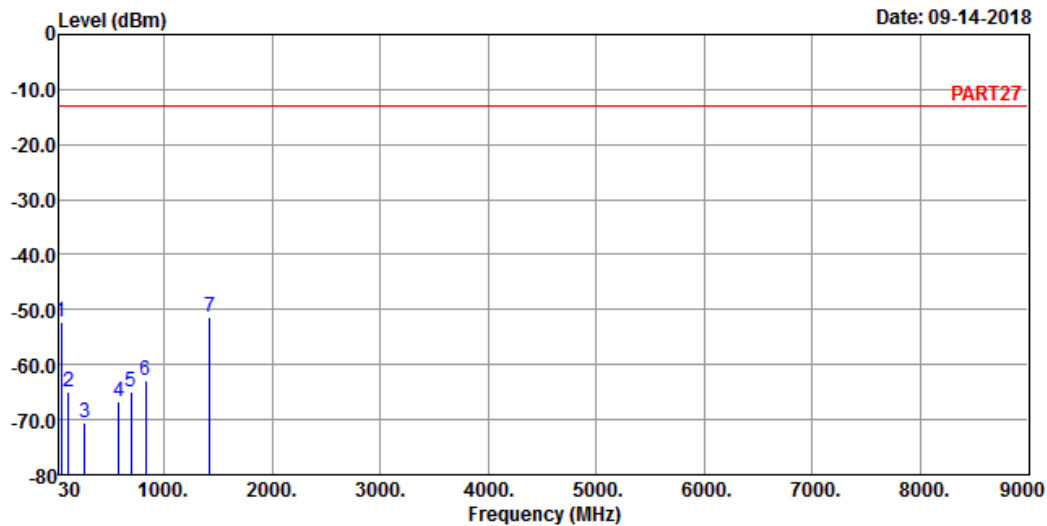

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : LTE Band 12 QPSK_10M Link_H-CH
 Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-52.20	-50.21	-13.00	-39.20	-1.99	Peak
2	116.33	-64.83	-54.81	-13.00	-51.83	-10.02	Peak
3	264.74	-70.50	-64.21	-13.00	-57.50	-6.29	Peak
4	578.05	-66.77	-65.09	-13.00	-53.77	-1.68	Peak
5	697.36	-64.94	-64.80	-13.00	-51.94	-0.14	Peak
6	828.31	-62.97	-63.45	-13.00	-49.97	0.48	Peak
7 pp	1422.00	-51.35	-39.16	-13.00	-38.35	-12.19	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

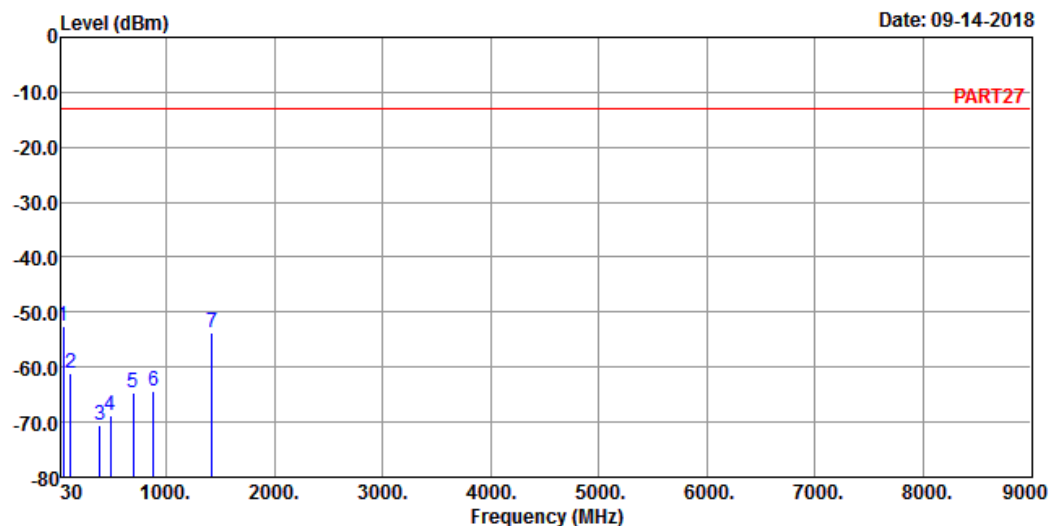

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 12 QPSK_10M Link_H-CH
 Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	44.55	-52.56	-50.57	-13.00	-39.56	-1.99	Peak
2	113.42	-61.18	-51.03	-13.00	-48.18	-10.15	Peak
3	387.93	-70.58	-64.56	-13.00	-57.58	-6.02	Peak
4	486.87	-68.91	-64.05	-13.00	-55.91	-4.86	Peak
5	695.42	-64.79	-64.62	-13.00	-51.79	-0.17	Peak
6	878.75	-64.25	-64.70	-13.00	-51.25	0.45	Peak
7	1422.00	-53.60	-41.41	-13.00	-40.60	-12.19	Peak


LTE Band 13
Channel Bandwidth: 10 MHz / QPSK
Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

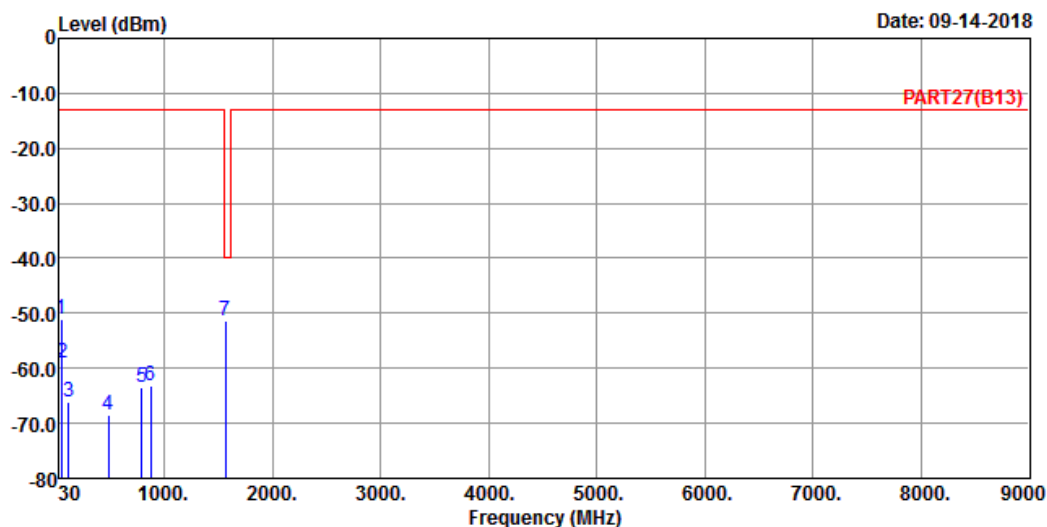

Site : 966 Chamber 5
Condition: PART27(B13) HORIZONTAL
Remak : LTE Band 13 QPSK_10M Link_M-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-51.04	-49.57	-13.00	-38.04	-1.47	Peak
2	52.31	-58.99	-53.45	-13.00	-45.99	-5.54	Peak
3	118.27	-66.19	-56.25	-13.00	-53.19	-9.94	Peak
4	480.08	-68.63	-63.64	-13.00	-55.63	-4.99	Peak
5	792.42	-63.46	-64.22	-13.00	-50.46	0.76	Peak
6	871.96	-63.17	-63.59	-13.00	-50.17	0.42	Peak
7 pp	1564.00	-51.41	-38.07	-40.00	-11.41	-13.34	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

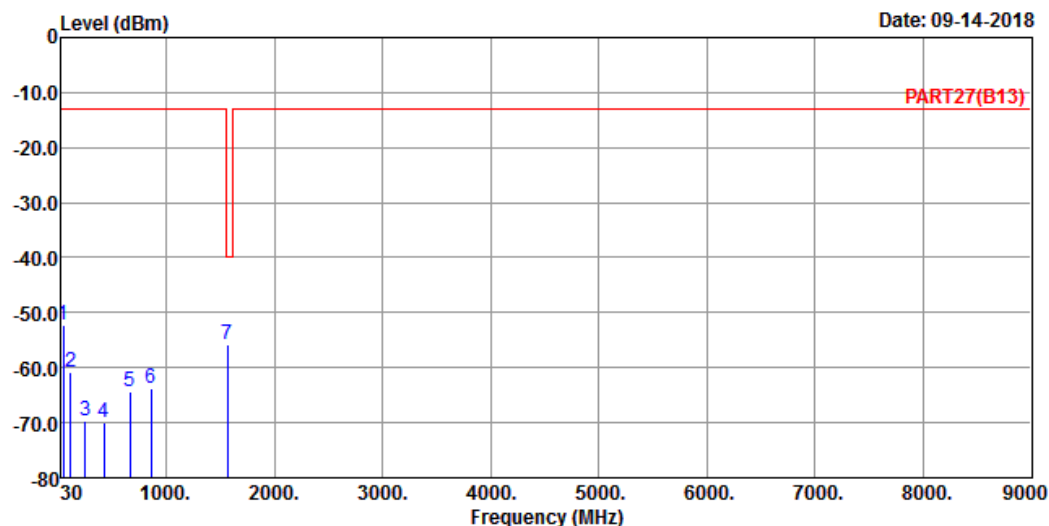

Site : 966 Chamber 5
Condition: PART27(B13) VERTICAL
Remak : LTE Band 13 QPSK_10M Link_M-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-52.15	-50.16	-13.00	-39.15	-1.99	Peak
2	113.42	-60.93	-50.78	-13.00	-47.93	-10.15	Peak
3	250.19	-69.77	-63.78	-13.00	-56.77	-5.99	Peak
4	422.85	-69.86	-64.10	-13.00	-56.86	-5.76	Peak
5	663.41	-64.40	-63.73	-13.00	-51.40	-0.67	Peak
6	861.29	-63.88	-64.24	-13.00	-50.88	0.36	Peak
7 pp	1564.00	-55.74	-42.40	-40.00	-15.74	-13.34	Peak


LTE Band 17
Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

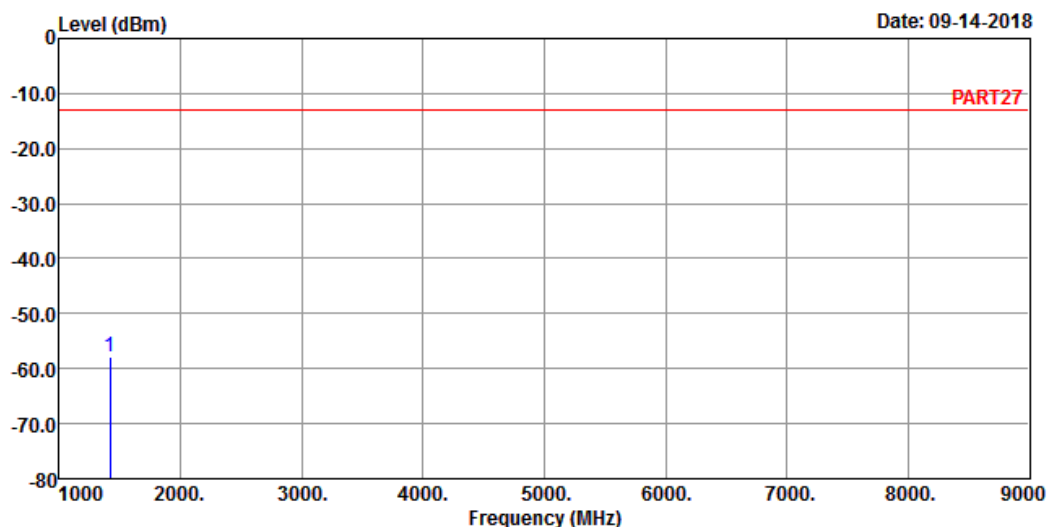

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 17 QPSK_10M Link_L-CH
Tested by: Thomas Wei


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1418.00	-57.92	-45.78	-13.00	-44.92	-12.14	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

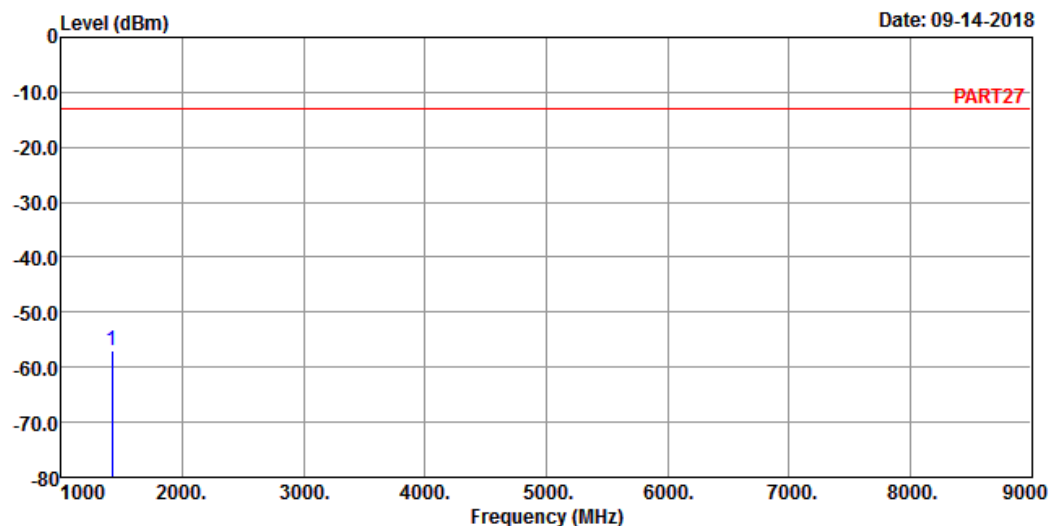

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : LTE Band 17 QPSK_10M Link_L-CH
 Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1418.00	-57.07	-44.93	-13.00	-44.07	-12.14	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 1

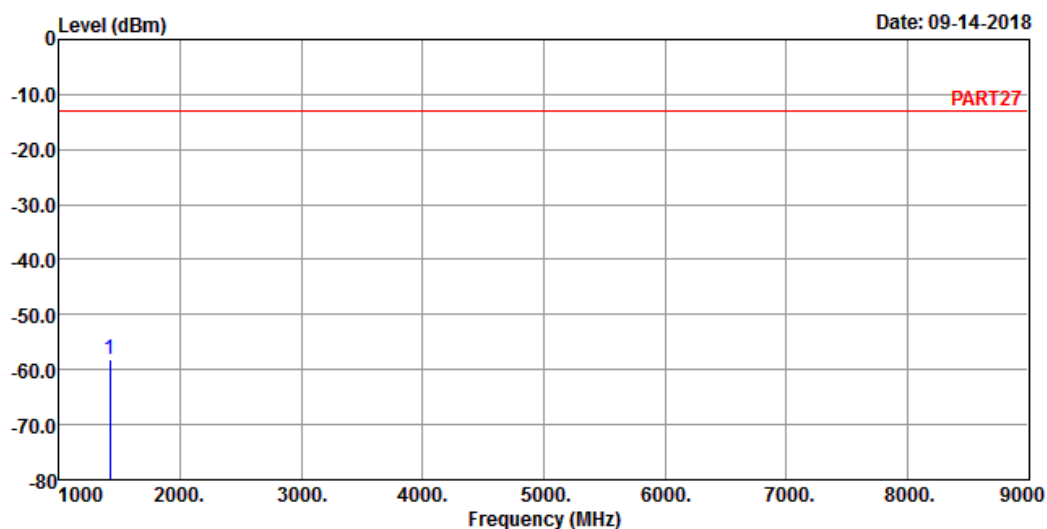

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 17 QPSK_10M Link_M-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	


1 pp 1420.00 -58.16 -46.02 -13.00 -45.16 -12.14 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 2

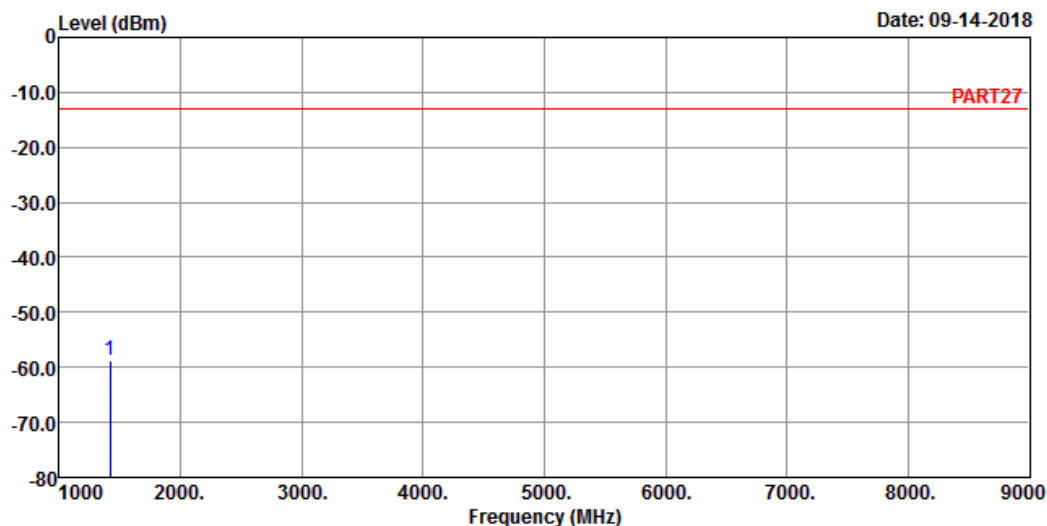

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 17 QPSK_10M Link_M-CH
Tested by: Thomas Wei

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1420.00	-58.60	-46.46	-13.00	-45.60	-12.14	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

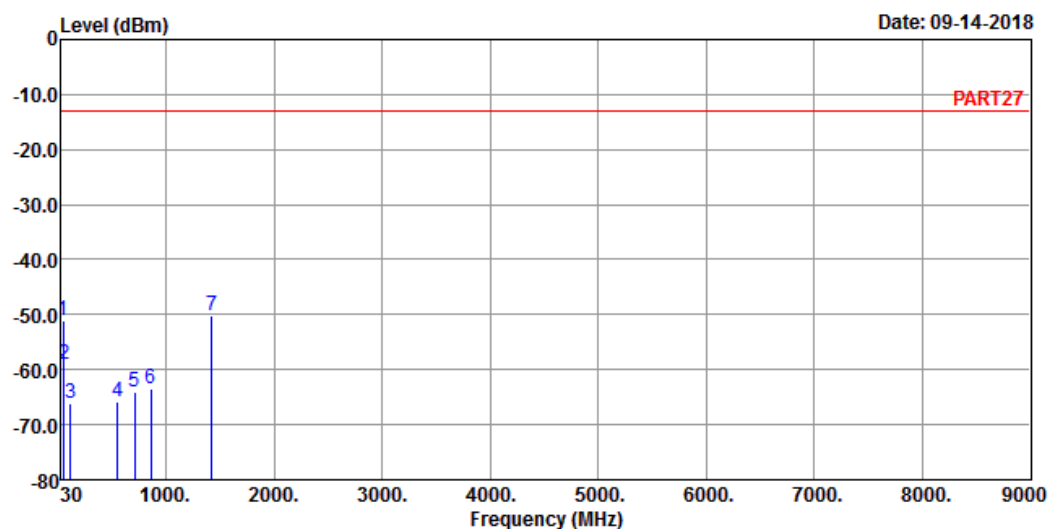

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : LTE Band 17 QPSK_10M Link_H-CH
Tested by: Thomas Wei


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.58	-51.04	-49.57	-13.00	-38.04	-1.47	Peak
2	52.31	-58.99	-53.45	-13.00	-45.99	-5.54	Peak
3	118.27	-66.19	-56.25	-13.00	-53.19	-9.94	Peak
4	552.83	-65.84	-63.11	-13.00	-52.84	-2.73	Peak
5	708.03	-64.10	-64.15	-13.00	-51.10	0.05	Peak
6	855.47	-63.42	-63.74	-13.00	-50.42	0.32	Peak
7 pp	1422.00	-50.33	-38.14	-13.00	-37.33	-12.19	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

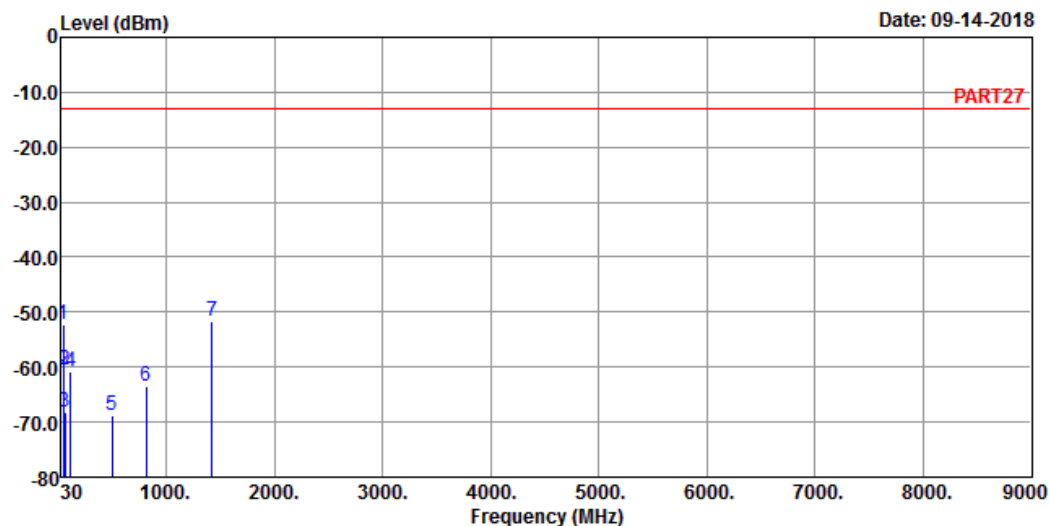

Site : 966 Chamber 5
Condition: PART27 VERTICAL
Remak : LTE Band 17 QPSK_10M Link_H-CH
Tested by: Thomas Wei

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.55	-52.15	-50.16	-13.00	-39.15	-1.99	Peak
2	52.31	-60.44	-54.90	-13.00	-47.44	-5.54	Peak
3	62.01	-68.05	-60.24	-13.00	-55.05	-7.81	Peak
4	113.42	-60.93	-50.78	-13.00	-47.93	-10.15	Peak
5	499.48	-68.84	-64.21	-13.00	-55.84	-4.63	Peak
6	814.73	-63.46	-64.06	-13.00	-50.46	0.60	Peak
7 pp	1422.00	-51.76	-39.57	-13.00	-38.76	-12.19	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---