



TEST REPORT

Report Number: C21T00142-SRD02-V01

Applicant	Shanghai Sunmi Technology Co.,Ltd.
Product Name	Data Processing Terminal
Model Name	L3561
Brand Name	SUNMI
FCC ID	2AH25D2SKDS
IC	22621-D2SKDS

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part15, ANSI C63.10-2013, KDB 558074, RSS-Gen Issue 5, RSS-247 Issue 2.

Prepared by 范宇航

Reviewed by 王长青

Approved by 杨华

Issue Date 2022-01-24

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 68866880

Revision Version

Report Number	Revision	Date	Memo
C21T00142-SRD02-V00	00	2022-01-14	Initial creation of test report
C21T00142-SRD02-V01	01	2022-01-24	Update the Testing End Date

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT INFORMATION	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS	10
4.1. REFERENCE DOCUMENTS FOR TESTING	10
4.2. REFERENCE INFORMATION FROM CLIENT	10
5. TEST SUMMARY	11
5.1. SUMMARY OF TEST RESULTS	11
5.2. STATEMENTS	12
6. MEASUREMENT RESULTS	13
6.1. PEAK OUTPUT POWER-CONDUCTED	14
6.2. 99% OCCUPIED BANDWIDTH	16
6.3. PEAK POWER SPECTRAL DENSITY	18
6.4. 6DB BANDWIDTH	20
6.5. FREQUENCY BAND EDGES-CONDUCTED	22



6.6.	CONDUCTED EMISSION	24
6.7.	RADIATED EMISSION	27
6.8.	AC POWERLINE CONDUCTED EMISSION	33
7.	TEST EQUIPMENT LIST	36
7.1.	CONDUCTED TEST SYSTEM	36
7.2.	RADIATED EMISSION TEST SYSTEM	36
ANNEX A: MEASUREMENT UNCERTAINTY		37
ANNEX B: ACCREDITATION CERTIFICATE		38

1. Test Laboratory

1.1. Testing Location

Primary Lab:

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	958356
FCC Designation No.	CN1177
IC designation No.	CN0067

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	30%RH~60%RH
Supply Voltage	120V/60Hz

1.3. Project Information

Project Leader	Wang Wenwen
Testing Start Date	2021-12-01
Testing End Date	2022-01-14

2. Client Information

2.1. Applicant Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

2.2. Manufacturer Information

Company Name	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Data Processing Terminal
Model name	L3561
Supported Radio Technology and Bands	BT4.2 WLAN 802.11b,g,n WLAN 802.11a, n, ac
Hardware Version	Athens_MB_V1.1
Software Version	d2-userdebug 11 RQ1D.210105.003 97 release-keys
FCC ID	2AH25D2SKDS
IC	22621-D2SKDS

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N01	DK03D1B240017	Athens_MB_V1.1	d2-userdebug 11 RQ1D.210105.003 97 release-keys	2021-12-01
N02	DK03D1B240033	Athens_MB_V1.1	d2-userdebug 11 RQ1D.210105.003 97 release-keys	2021-12-01
N03	DK03D1B240014	Athens_MB_V1.1	d2-userdebug 11 RQ1D.210105.003 97 release-keys	2021-12-01
N04	DK134259200019D05L2	Athens_MB_V1.1	d2-userdebug 11 RQ1D.210105.003 97 release-keys	2021-12-10

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
CA02	Adapter	CYZS36-240150	N/A
UB01	Serial port line	N/A	N/A
AE1	Notebook PC	DELL Latitude E6510	N/A
AE2	LAN Cable	N/A	N/A
AE3	USB Cable	N/A	N/A
AE4	Keyboard	KB212-B	CN-0Y88XT-65890-12I-005Q-A00
AE5	Mouse	MS111-P	CN-011D3V-71581-19J-1A64
AE6	Micro SD Card	Kingston SDC4/4GB 77	N/A
AE7	U-disk	DataTraveler 100 G3 64GB	N/A



AE8	Earphone	N/A	N/A
AE9	RF Cable	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

*The AE is provided by the client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2020
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	2019
RSS-247 Issue 2	Digital Transmission Systems (DTSSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017
RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

4.2. Reference Information from client

Information of the test sample provided by the client.

Antenna gain of EUT 1.58 dBi

5. Test Summary

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	Pass
6dB Occupied Bandwidth	15.247(a)	RSS-247 5.2	Pass
99% Occupied Bandwidth	N/A	RSS-Gen 6.7	Pass
Band Edges Compliance	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Radiated	15.247/15.205/15.209	RSS-Gen 8.9,8.10	Pass
AC Powerline Conducted Emission	15.207	RSS-Gen 8.8	Pass

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	24°C
Voltage	Vnom	230V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

5.2. Statements

The L3561 supporting BT/WLAN, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Measurement Results

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6.1. Peak Output Power-Conducted


6.1.1. Measurement Limit

Standard	Limit (dBm)
FCC 47 Part 15.247(b)(3)	<30
RSS-247 5.4(d)	<30

6.1.2. Test Condition

DTS procedure	RBW	VBW	Span	Sweptime
BT-LE	3MHz	10MHz	9MHz	Auto

6.1.3. Test Setup

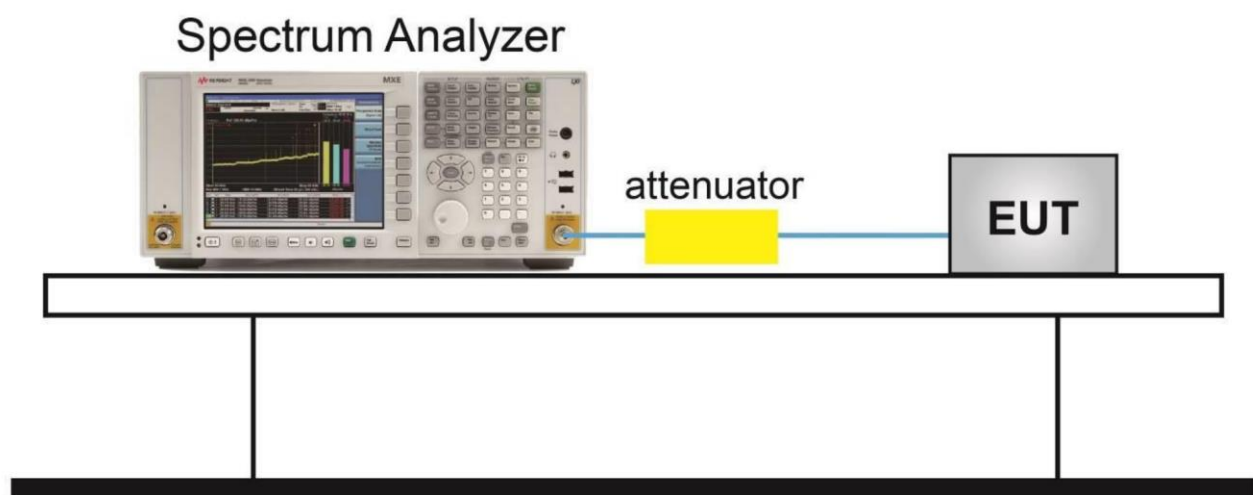

6.1.4. Test procedure

The measurement is according to ANSI C63.10 clause 11.9.1

- Set the RBW \geq DTS bandwidth.
- Set VBW \geq $[3 \times \text{RBW}]$.
- Set span \geq $[3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Measurement Results

Note: Bold font is the maximum Value


Peak Conducted Output Power CH0 (dBm)	6.026	Peak Conducted Output Power CH19 (dBm)	5.423
<p>Date: 10. DEC. 2021 15:41:09</p>		<p>Date: 10. DEC. 2021 15:41:58</p>	
Peak Conducted Output Power CH39 (dBm)	5.469	/	
<p>Date: 10. DEC. 2021 15:42:26</p>		/	

6.2. 99% Occupied Bandwidth

6.2.1. Measurement Limit

Standard	Limit
RSS-Gen 6.7	N/A

6.2.2. Test Setup

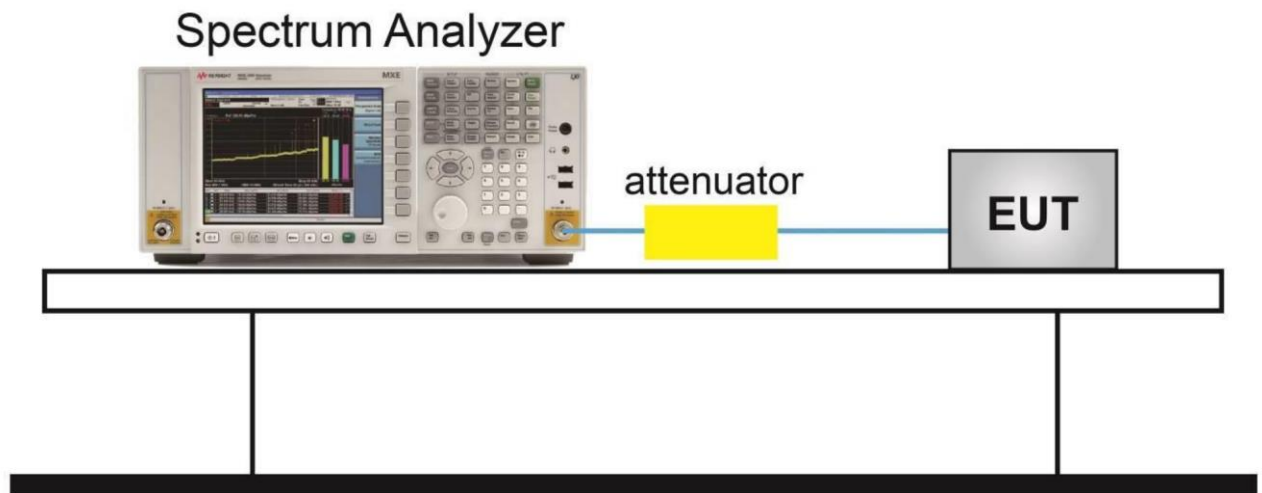

6.2.3. Test procedures


The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.



Measurement Result

Test graphs as below

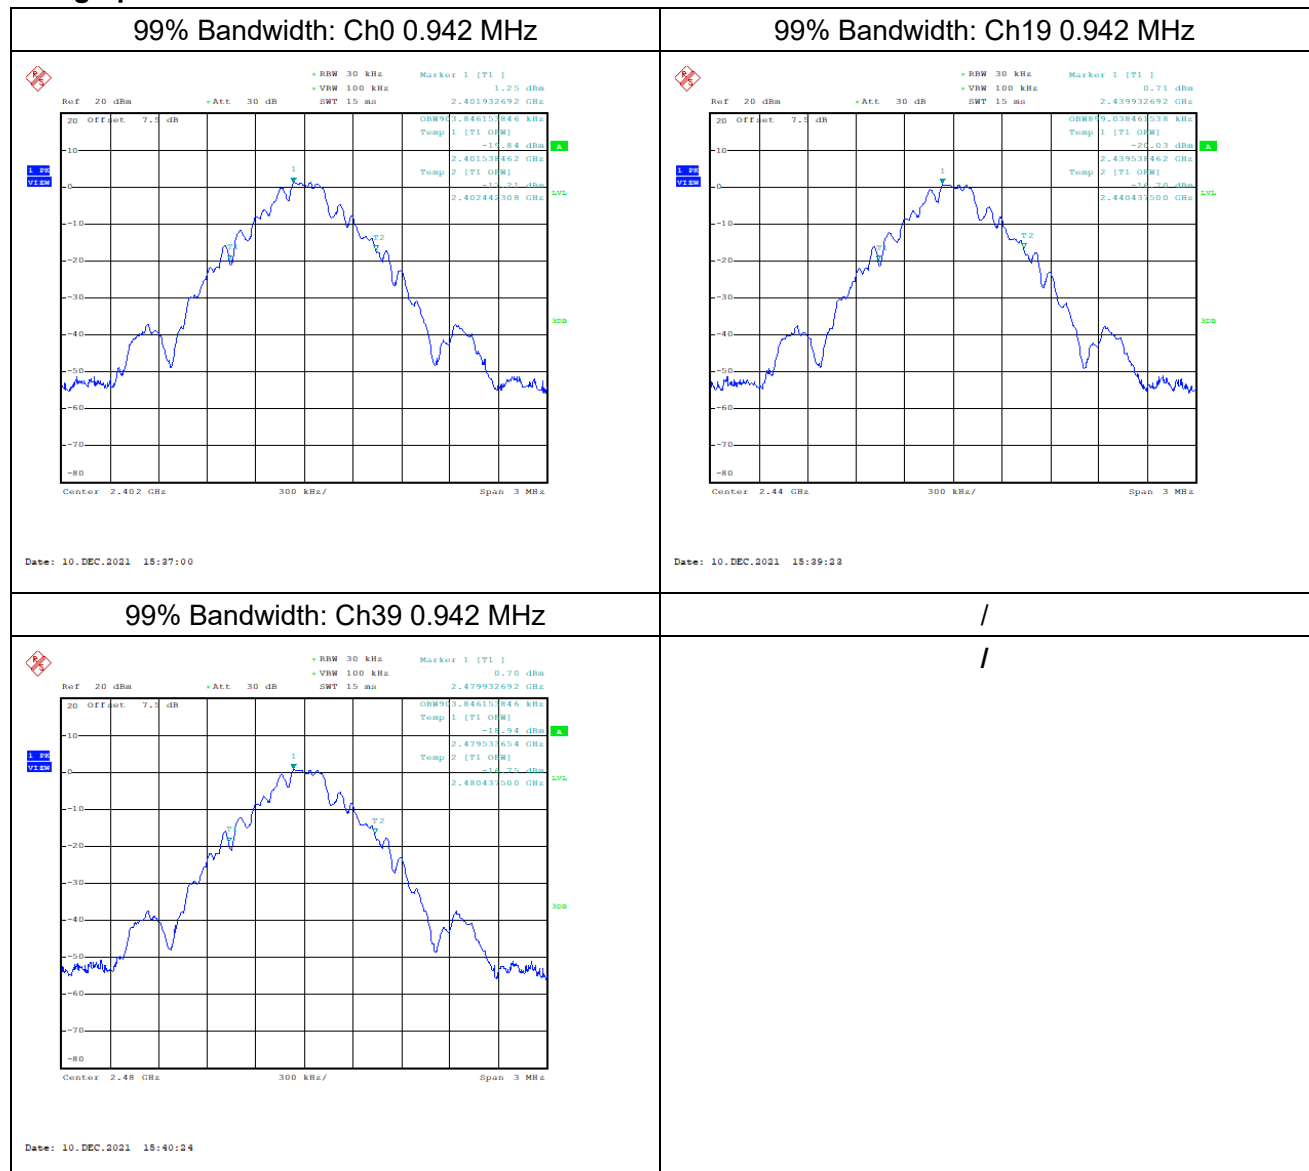


6.3. Peak Power Spectral Density

6.3.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247(e)	$\leq 8\text{dBm}/3\text{ kHz}$
RSS-247 5.2(b)	$\leq 8\text{dBm}/3\text{ kHz}$

6.3.2. Test Setup

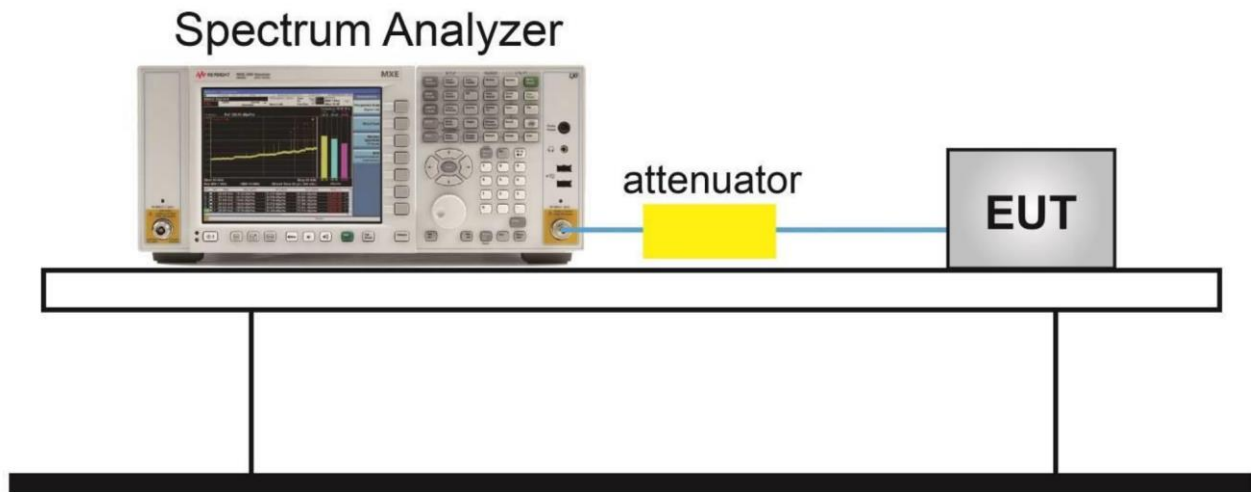

6.3.2. Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Measurement Results

Note: Bold font is the maximum Value


Power spectral density: CH0 (dBm/3kHz)	-4.495	Power spectral density: CH19 (dBm/3kHz)	-5.015
<p>Date: 10. DEC. 2021 15:46:59</p>		<p>Date: 10. DEC. 2021 15:47:27</p>	
Power spectral density: CH39 (dBm/3kHz)	-4.971	/	
<p>Date: 10. DEC. 2021 15:48:42</p>		/	

6.4. 6dB Bandwidth

6.4.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247 (a) (2)	$\geq 500\text{kHz}$
RSS-247 5.2(a)	$\geq 500\text{kHz}$

6.4.2. Test Setup

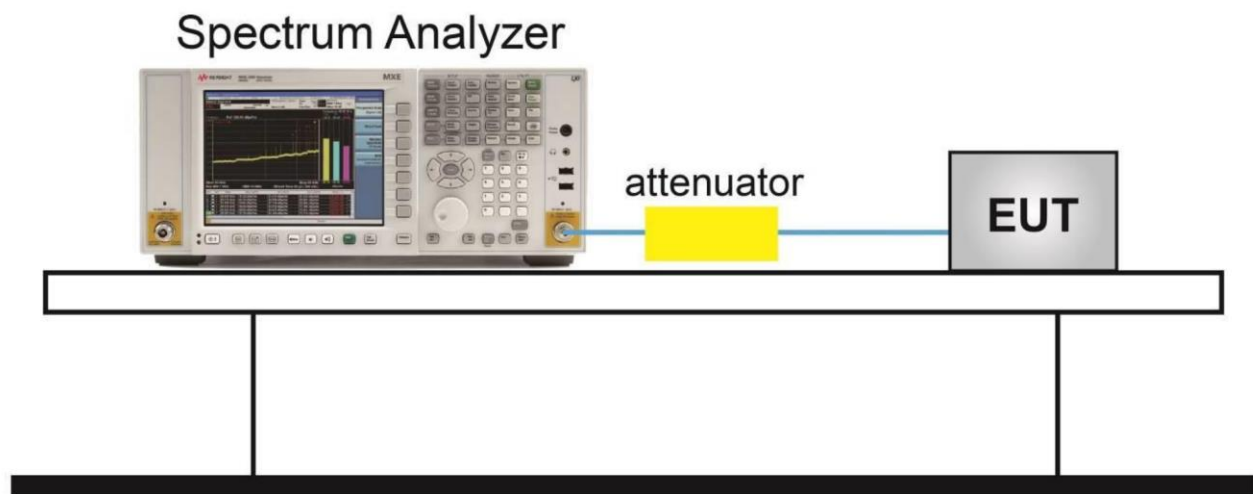

6.4.2. Test procedures

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Result

Note: Bold font is the maximum Value


6dB Bandwidth: Ch0(kHz)	505	6dB Bandwidth: Ch19(kHz)	505
<p>Date: 10.DEC.2021 15:21:42</p>		<p>Date: 10.DEC.2021 15:24:03</p>	
6dB Bandwidth: Ch39(kHz)	510	/	/
<p>Date: 10.DEC.2021 15:25:46</p>		/	/

6.5. Frequency Band Edges-Conducted

6.5.1. Measurement Limit

Standard	Limited(dBc)
FCC 47 Part 15.247(d)	>20
RSS-247 5.5	>20

6.5.2. Test Setup

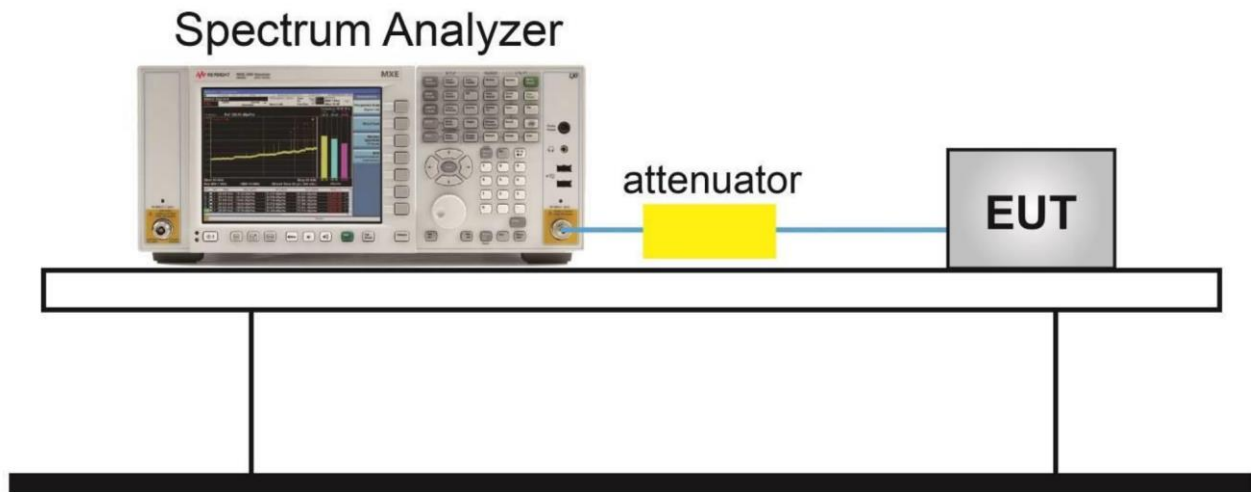


6.5.3. Test procedure

The measurement is according to ANSI C63.10 clause 11.13.2

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) Resolution bandwidth: 100 kHz.6) Video bandwidth: 300 kHz.7) Detector: Peak.8) Trace: Max hold.

Measurement results

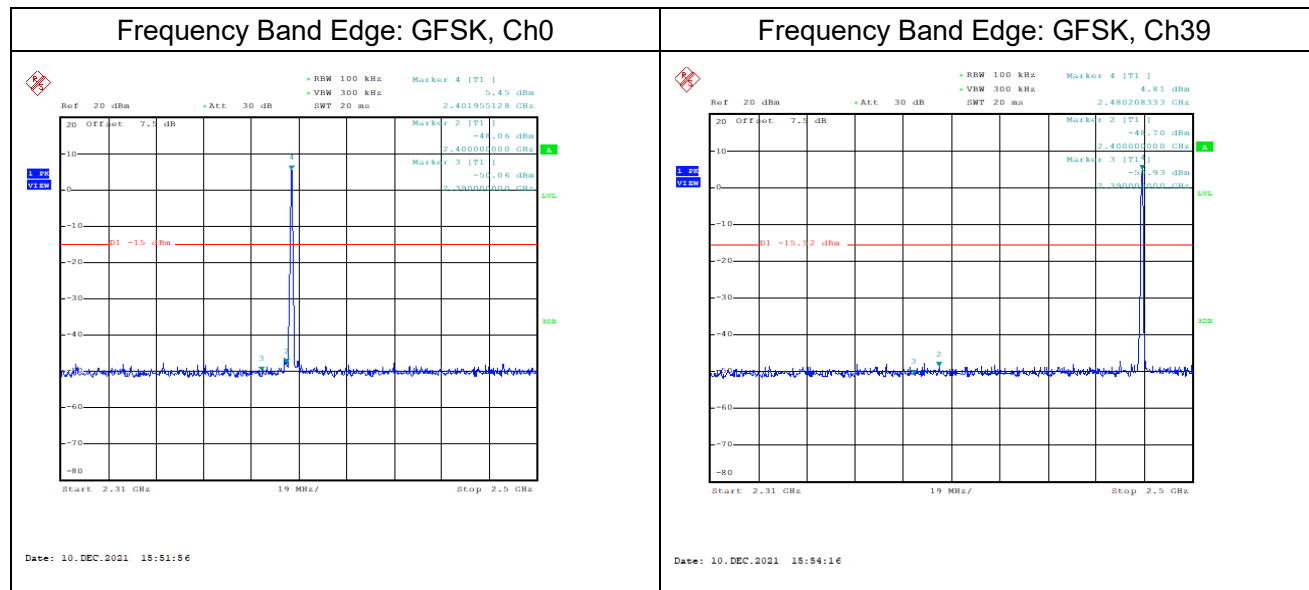


6.6. Conducted Emission

6.6.1. Measurement Limit

Standard	Limit
FCC 47 Part15.247 (d)	20dB below peak output power in 100KHz bandwidth
RSS-247 5.5	20dB below peak output power in 100KHz bandwidth

6.6.2. Test Setup

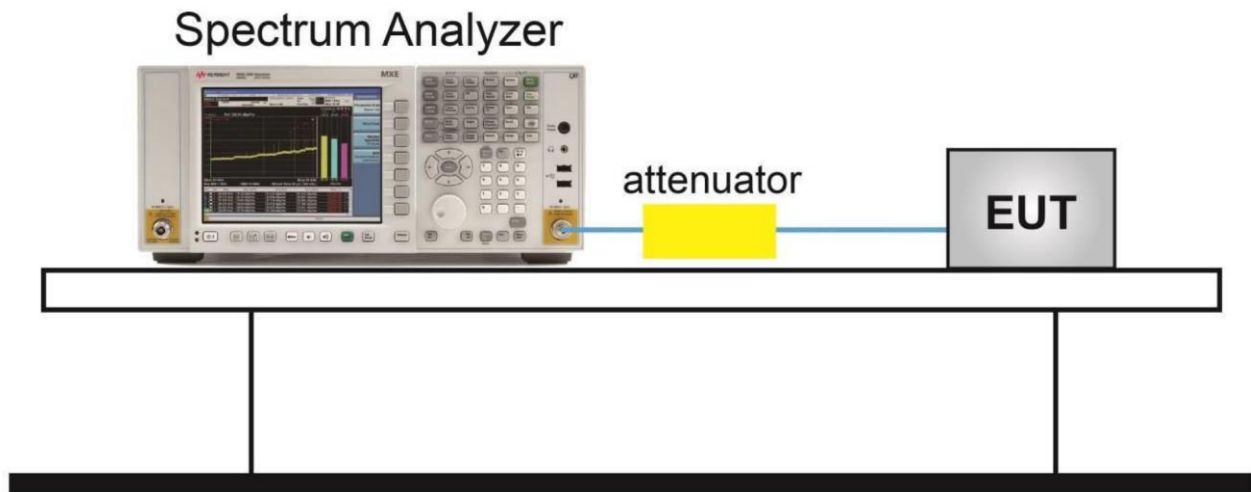

6.6.3. Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement


3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement


12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.

17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

Measurement Results

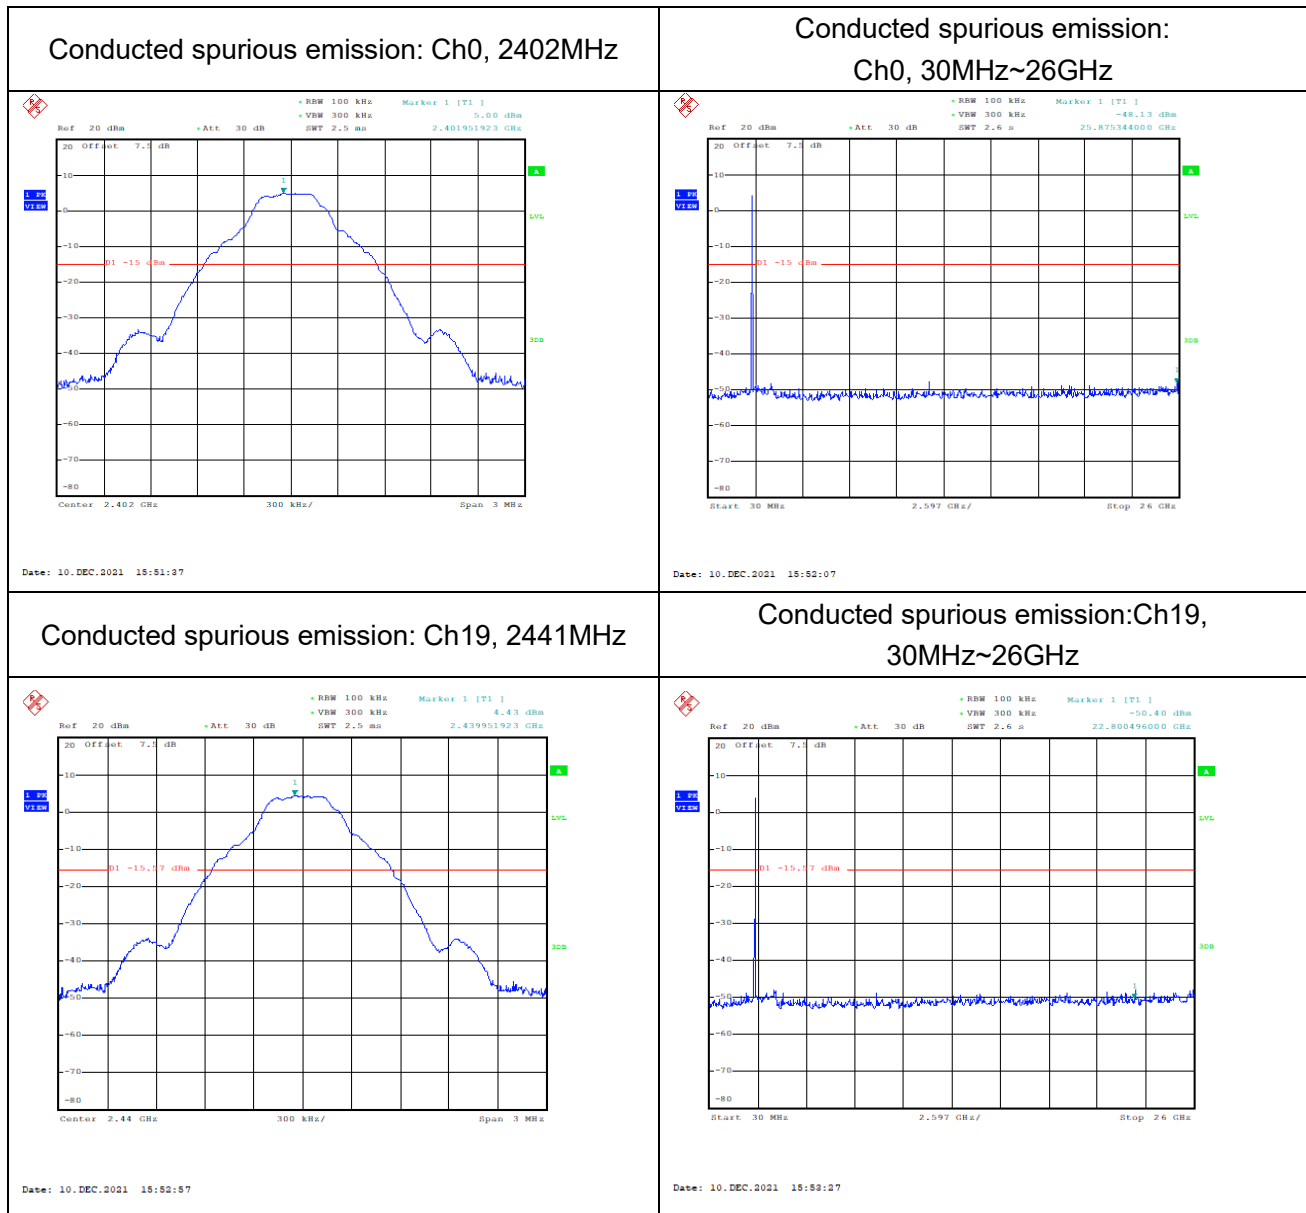


Conducted spurious emission: Ch39, 2480MHz

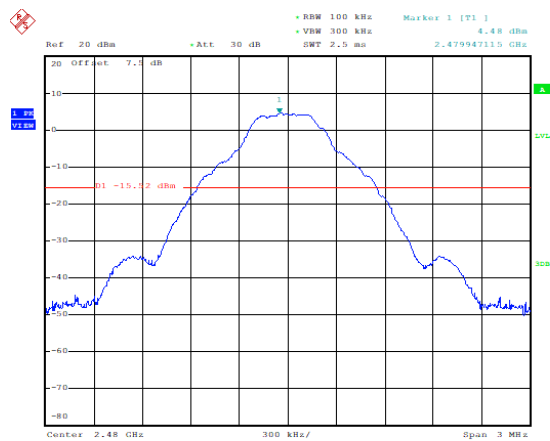

Date: 10.DEC.2021 15:58:56

Conducted spurious emission: Ch39, 30MHz~26GHz

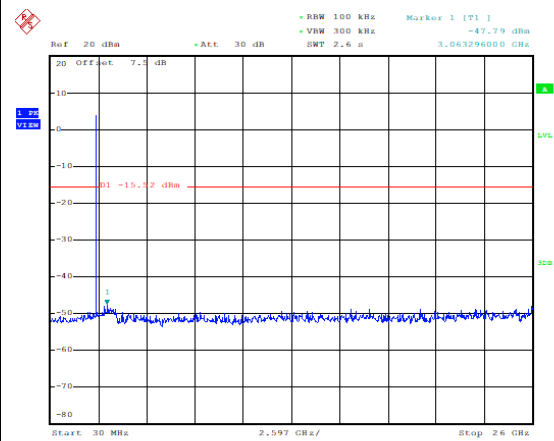

Date: 10.DEC.2021 15:54:27

6.7. Radiated Emission

6.7.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247(d),15.205(a),15.209(a)	20dB below peak output power
RSS-Gen 8.9,8.10	20dB below peak output power


In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band


Frequency of emission	Field strength (uV/m)	Field strength (dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.7.2 Test Setup

Below 1GHz Test Setup

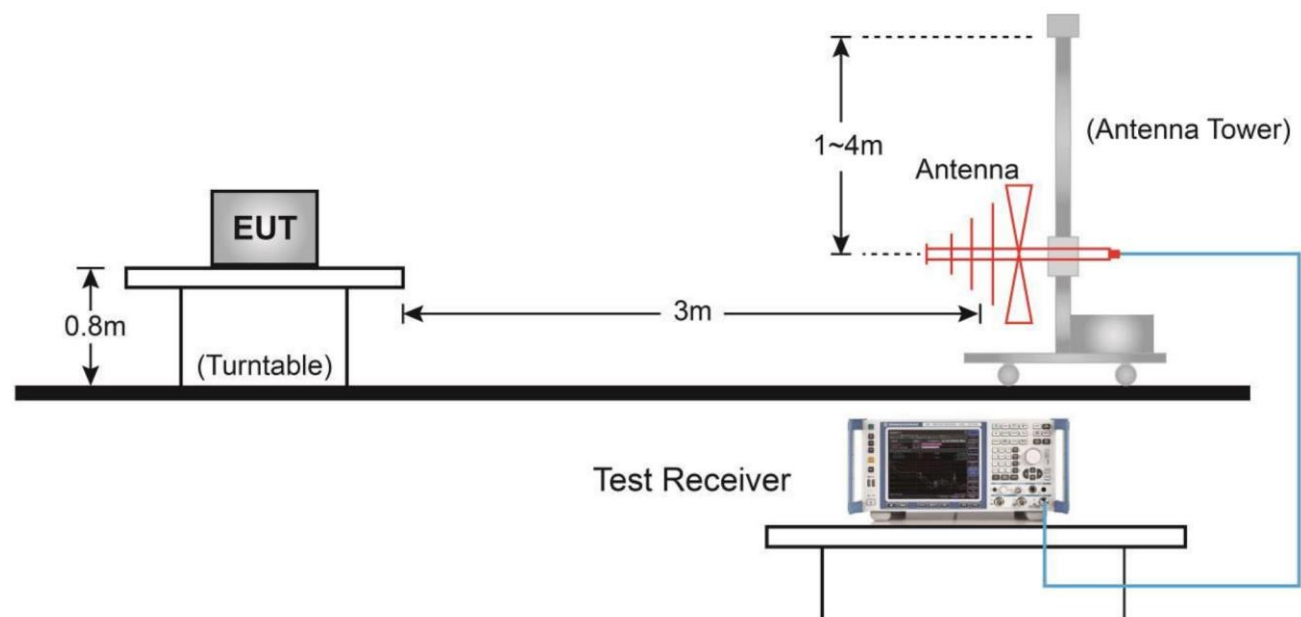

Above 1GHz Test Setup

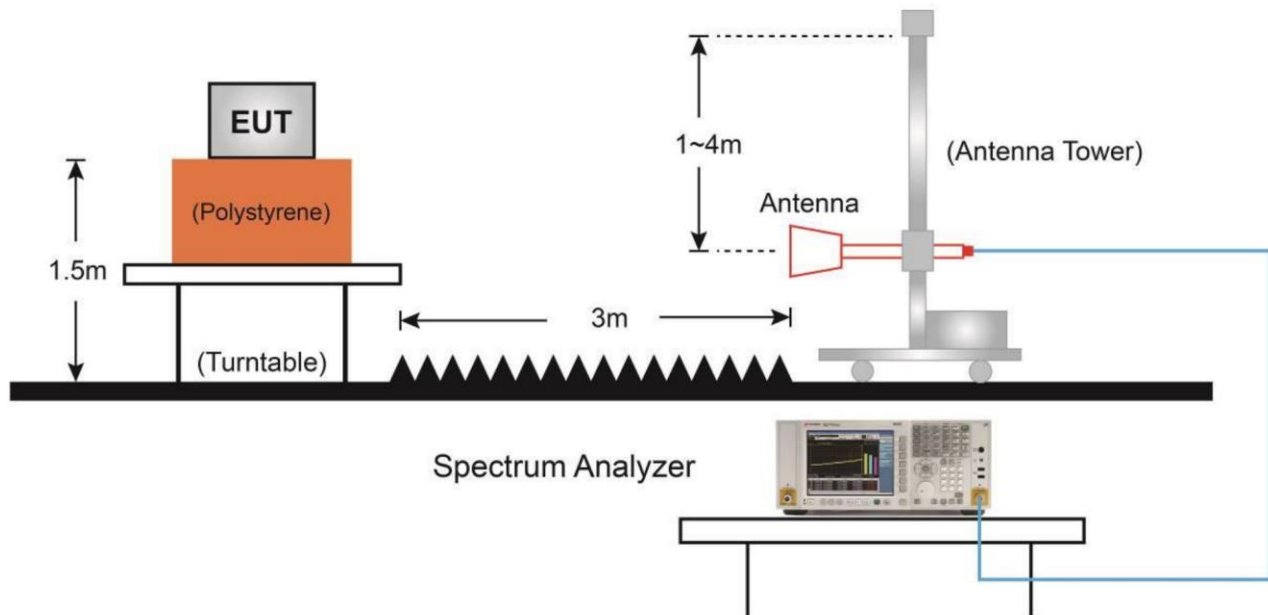

6.7.3. Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

Measurement Results:


A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:


$$A_{Rpi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$$

$$\text{Result} = P_{\text{Mea}} + A_{Rpi}$$


Mainly Supply

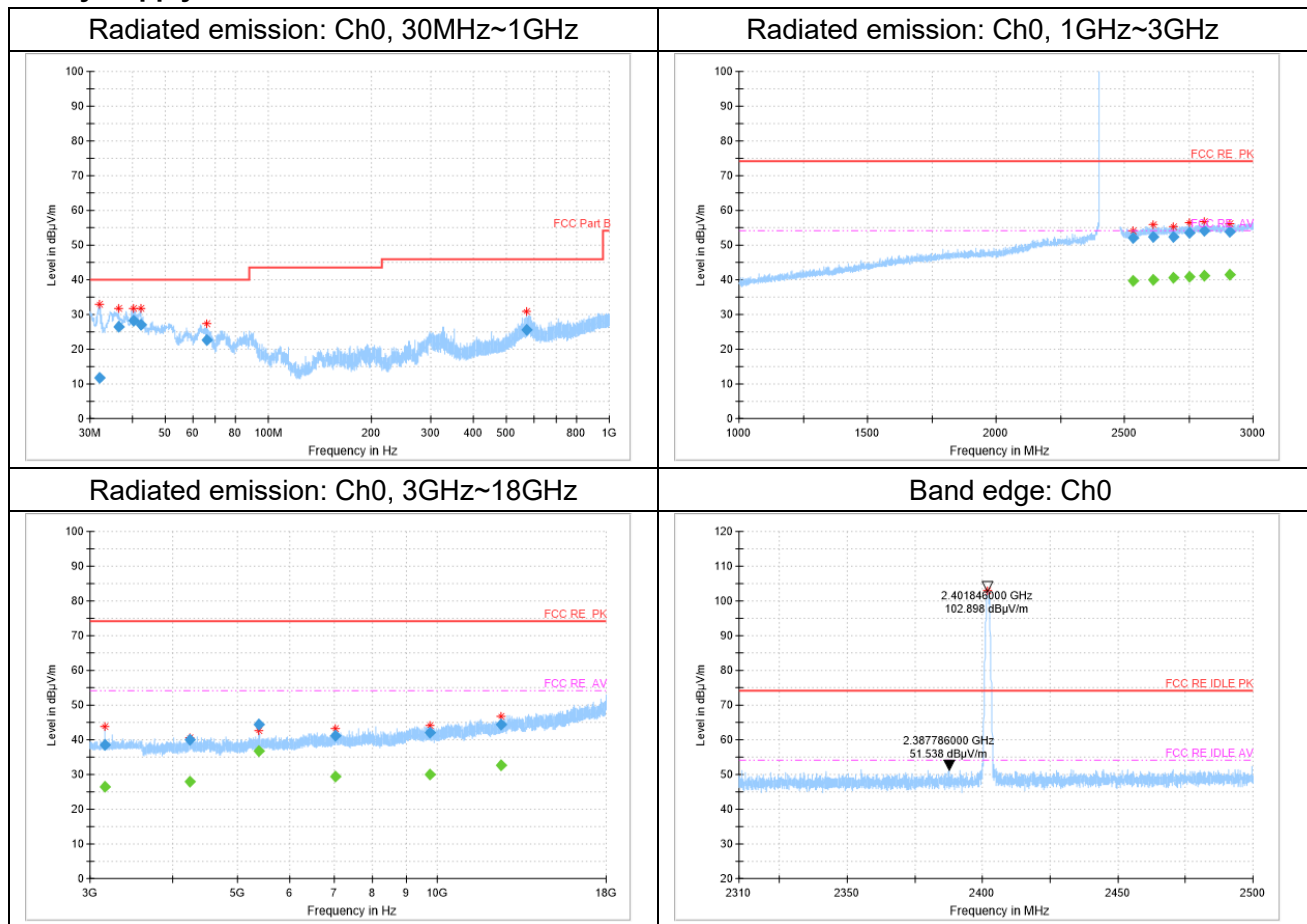


Radiated emission: Ch39, 30MHz~1GHz

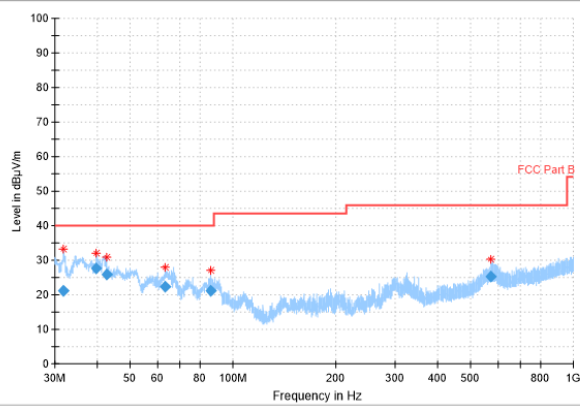


Radiated emission: Ch39, 1GHz~3GHz

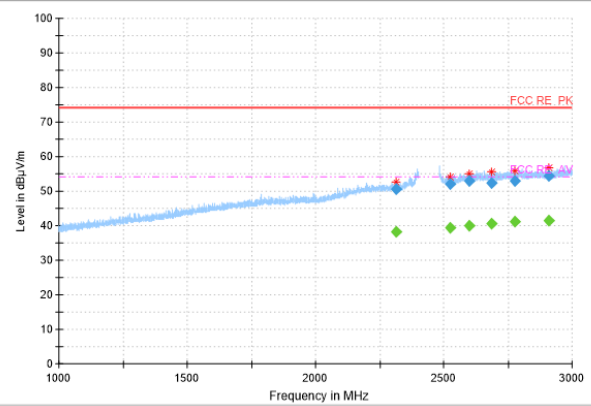

Radiated emission: Ch39, 3GHz~18GHz

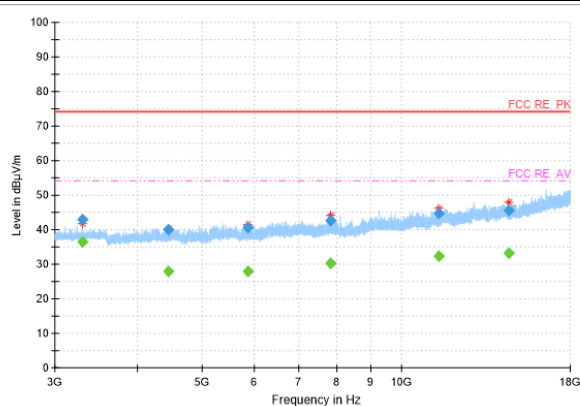

Bandedge:Ch39

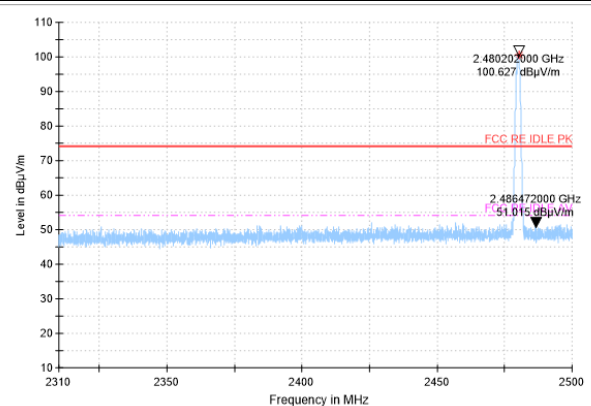

Mainly Supply

Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
32.1	11.69	-14.3	25.99	H
36.4	26.57	-13.7	40.27	V
40.1	28.35	-12.8	41.15	V
42.4	27.01	-12.6	39.61	V
66.1	22.71	-14.4	37.11	V
572.6	25.67	-3.9	29.57	H

Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2533.4	51.95	14.8	37.15	H
2609.8	52.45	15.6	36.85	V
2690.9	52.21	15.9	36.31	H

2750.5	53.42	16.2	37.22	V
2809.9	54.01	16.6	37.41	V
2907.4	53.74	16.7	37.04	H

Ch0 1GHz-3GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2809.9	41.11	16.6	24.51	V

Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
3157.5	38.61	-7.4	46.01	V
4243.3	39.97	-5.4	45.37	V
5400.1	44.52	-3.3	47.82	V
7025.1	41.15	-2.2	43.35	V
9765.4	42.14	-0.5	42.64	V
12479.5	44.45	2.3	42.15	H

Ch39 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
31.9	21.04	-14.3	35.34	V
39.8	27.55	-12.9	40.45	V
42.6	26.02	-12.6	38.62	V
63.0	22.43	-13.4	35.83	V
85.9	21.14	-16.5	37.64	V
571.8	25.18	-3.9	29.08	H

Ch39 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2312.8	50.52	13.3	37.22	H
2526.8	52.19	14.6	37.59	H
2597.5	52.88	15.5	37.38	H
2687.5	52.36	15.9	36.46	V

2776.7	52.95	16.4	36.55	H
2908.8	54.42	16.7	37.72	H

Ch39 1GHz-3GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2908.8	41.48	16.7	24.78	H

Ch39 3GHz-18GHz (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
3306.4	43.05	-7.3	50.35	H
4447.0	40.08	-4.9	44.98	V
5876.6	40.55	-3.9	44.45	H
7819.2	42.7	-1.8	44.5	H
11403.5	44.64	1.8	42.84	H
14544.7	45.57	5	40.57	H


6.8.AC Powerline Conducted Emission

6.8.1. Method of Measurement: ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.8.2. Test Setup

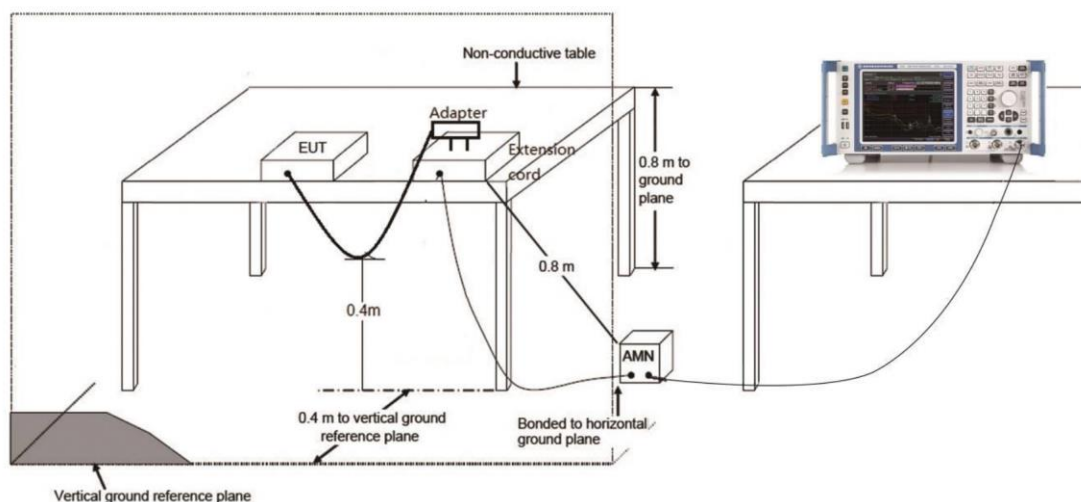

6.8.3. Test Condition:

Voltage (V)	Frequency (Hz)
120	60


Measurement Result and limit:

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Mainly Supply

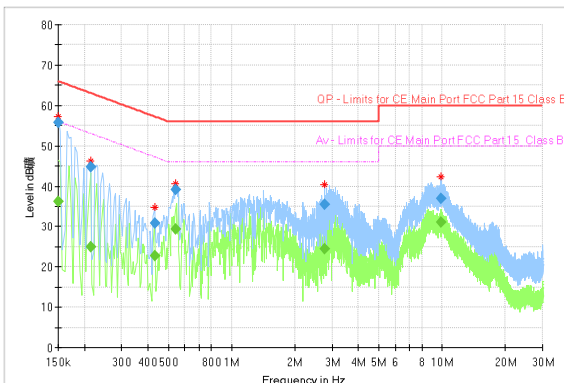CA02	/
 <p>The graph shows the EMC test results for CA02. The Y-axis represents 'Level in dBμ' from 0 to 80. The X-axis represents 'Frequency in Hz' on a logarithmic scale from 150k to 30M. Two limit lines are shown: a red line for 'QP - Limits for CE Main Port FCC Part 15 Class B' and a pink line for 'Av - Limits for CE Main Port FCC Part 15 Class B'. The test results are plotted as blue and green lines with markers, showing compliance with the limits.</p>	/

CA02

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	---	36.20	56.00	19.80	15000.0	9.000	L1	ON	9.6
0.150000	55.71	---	66.00	10.29	15000.0	9.000	L1	ON	9.6
0.213431	---	25.06	53.07	28.01	15000.0	9.000	L1	ON	9.6
0.213431	44.67	---	63.07	18.40	15000.0	9.000	L1	ON	9.6
0.429844	---	22.72	47.26	24.54	15000.0	9.000	N	ON	9.6
0.429844	30.94	---	57.26	26.31	15000.0	9.000	N	ON	9.6
0.541781	---	29.43	46.00	16.57	15000.0	9.000	N	ON	9.6
0.541781	39.19	---	56.00	16.81	15000.0	9.000	N	ON	9.6
2.765606	---	24.36	46.00	21.64	15000.0	9.000	N	ON	9.7
2.765606	35.51	---	56.00	20.49	15000.0	9.000	N	ON	9.7
9.892294	---	31.14	50.00	18.86	15000.0	9.000	N	ON	9.9
9.892294	37.05	---	60.00	22.95	15000.0	9.000	N	ON	9.9

7. Test Equipment List

7.1. Conducted Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ26	101091	R&S	2021-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2021-05-10	1 year
3	Eagle Test Software	Eagle V3.1 FCC BT/WIFI	N/A	ECIT	N/A	N/A

7.2. Radiated Emission Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2021-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2021-03-03	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-03	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	3 years
5	Universal Radio Communication Tester	CMW500	104178	R&S	2021-05-10	1 year
6	EMI Test Software	EMC32 V 9.15.00	N/A	R&S	N/A	N/A

Anechoic chamber

Fully anechoic chamber by ETS.

Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2402MHz-2480MHz	95%	0.544dB
Peak Power Spectral Density	2402MHz-2480MHz	95%	0.544dB
6dB Bandwidth	2402MHz-2480MHz	95%	62.04Hz
Frequency Band Edges-Conducted	2390MHz-2488.5MHz	95%	0.544dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 12th day of April 2021.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****