

RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Frequency hopping systems operating within the 2400.0 MHz - 2483.5 MHz MHz band	
Report Reference No	G0M-2209-1656-TFC247BTLR-V03
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	    DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970
Applicant	Leica Geosystems AG
Address	Heinrich-Wild-Strasse 9435 Heebrugg Switzerland
Test Specification	47 CFR Part 15C RSS-247, Issue 3, 2023-08 RSS-Gen, Issue 5, Amendment 2, 2021-02
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	Field Controller Win EC7
Model(s)	CS20 Basic
Additional Model(s)	None
Brand Name(s)	Leica Geosystems
Hardware Version(s)	V1.2
Software Version(s)	v7.07.19.1040033
FCC ID	RFD-CSNGP
IC	3177A-CSNGP
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 °C - 30 °C	
Test Lab Humidity	25 % - 55 %	
Date of receipt of test item	2022-09-26	
Report:		
Compiled by	Burkhard Pudell	
Tested by (+ signature) (Responsible for Test)	Burkhard Pudell	
Approved by (+ signature) (Test Lab Engineer)	Radwan Jaafar	
Date of Issue	2024-04-09	
Total number of pages	58	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		
Additional Comments:		
None		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2022-11-09	Initial Release	--
02	2024-02-05	Replaced document: G0M-2209-1656-TFC247BTLR-V01 Replaced by: G0M-2209-1656-TFC247BTLR-V02 Reason: - RSS-247 Issue 2 updated to RSS-247 Issue 3 and new evaluation. - Additional Variants deleted. - Summary table remarks updated.	G. Offorji
03	2024-04-09	Replaced document: G0M-2209-1656-TFC247BTLR-V02 Replaced by: G0M-2209-1656-TFC247BTLR-V03 Reason: - Correction of radio module and antenna information	St. Liebich

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
BR	Basic Rate (Bluetooth)
EDR	Enhanced Data Rate (Bluetooth)
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage

REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External	7
1.2	Photos – Equipment Internal	11
1.3	Support Equipment.....	15
1.4	Test Modes	15
1.5	Test Frequencies.....	15
1.6	Sample emission level calculation.....	16
2	Result Summary.....	17
3	Test Conditions and Results.....	18
3.1	Test Conditions and Results - AC powerline conducted emissions.....	18
3.2	Test Conditions and Results - Transmitter radiated emissions	22
3.3	Test Conditions and Results - Receiver radiated emissions	30
ANNEX A	Transmitter spurious emissions	36
ANNEX B	Receiver spurious emissions	54


1 Equipment (Test Item) Under Test

Description	Field Controller Win EC7	
Model	CS20 Basic	
Additional Model(s)	None	
Brand Name(s)	Leica Geosystems	
Serial Number(s)	2495073	
Test Sample Id(s)	41411	
Hardware Version(s)	V1.2	
Software Version(s)	v7.07.19.1040033	
PMN	CS20 Basic	
HVIN	CS20 Basic	
FVIN	n/a	
HMN	n/a	
FCC ID	RFD-CSNGP	
IC	3177A-CSNGP	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400.0 MHz - 2483.5 MHz	
Radio technology	Bluetooth	
Modulation	GFSK, PI/4-DQPSK, 8-DPSK	
Number of antenna ports	1	
Radio Module	Type	LR Bluetooth module
	Model	LRBT (OBS421)
	Manufacturer	connectBlue AB
	HW Version	B
	SW Version	5.2.0
	FCC-ID	PVH0946
	IC	5235A-0946
Antenna	Type	integrated
	Model	1000146
	Manufacturer	AVX
	Gain	1.7 dBi
Battery Voltage	V _{NOM}	11.1 VDC (Li-Ion GEB331)
Operating Temperature	T _{NOM}	25 °C
AC/DC-Adaptor	Model	GEV276 (AEL40US15)
	Vendor	Leica Geosystems (XP Power)
	Input	100 – 240 V AC
	Output	15 V DC
Manufacturer	Leica Geosystems Technologies Pte Ltd 2 Woodlands Sector 1 #01-10 Woodlands Spectrum 1 738068 Singapore SINGAPORE	


1.1 Photos – Equipment External



EUT BACK open Battery Case

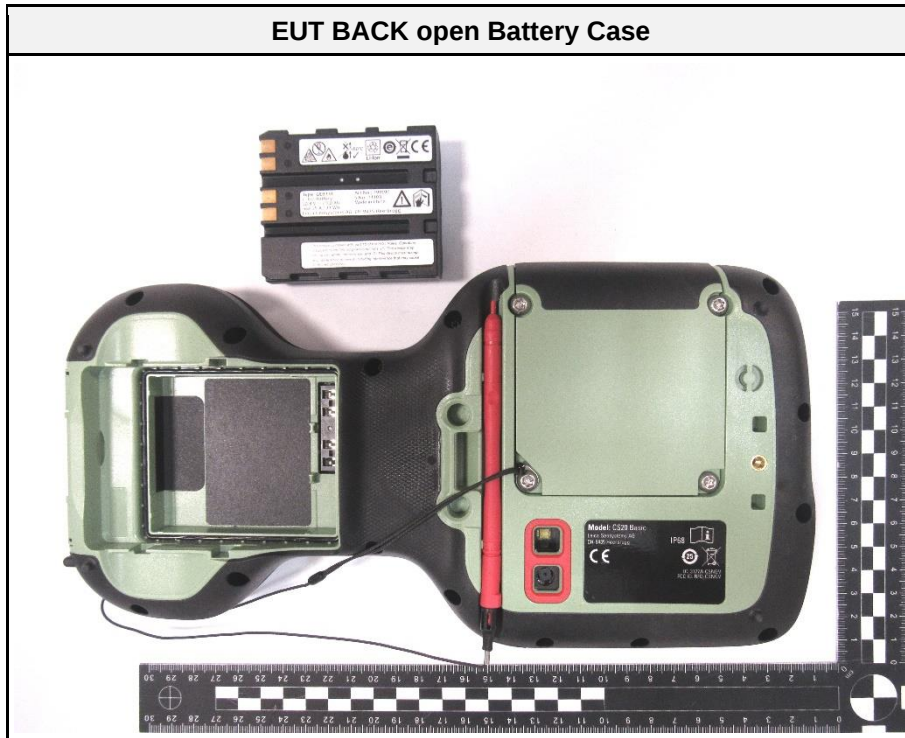

BATTERY


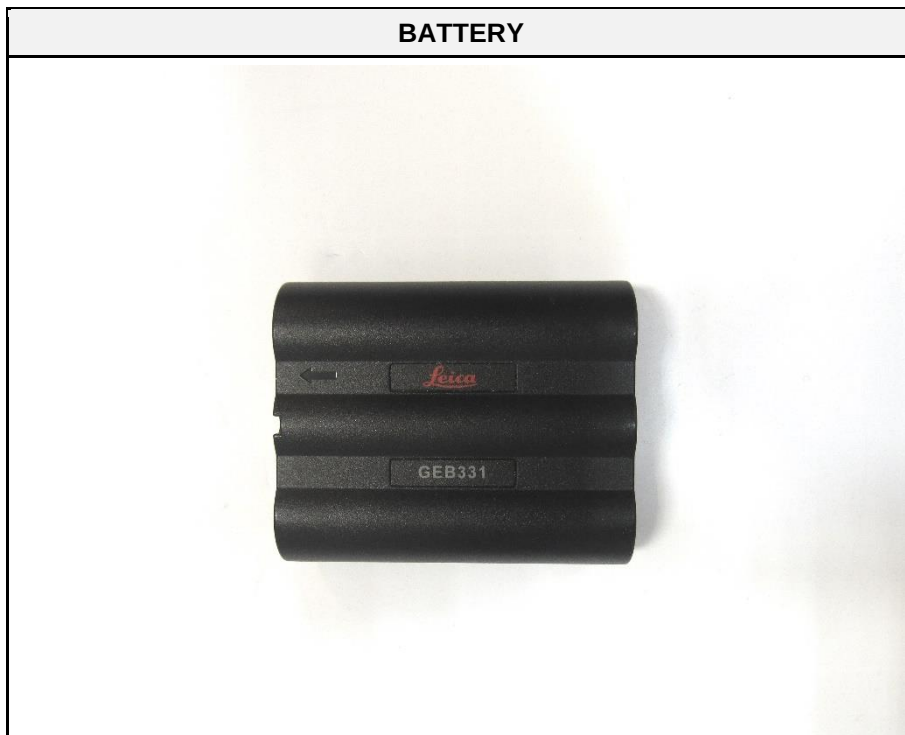


EUT LEFT SIDE





EUT BOTTOM open Interface




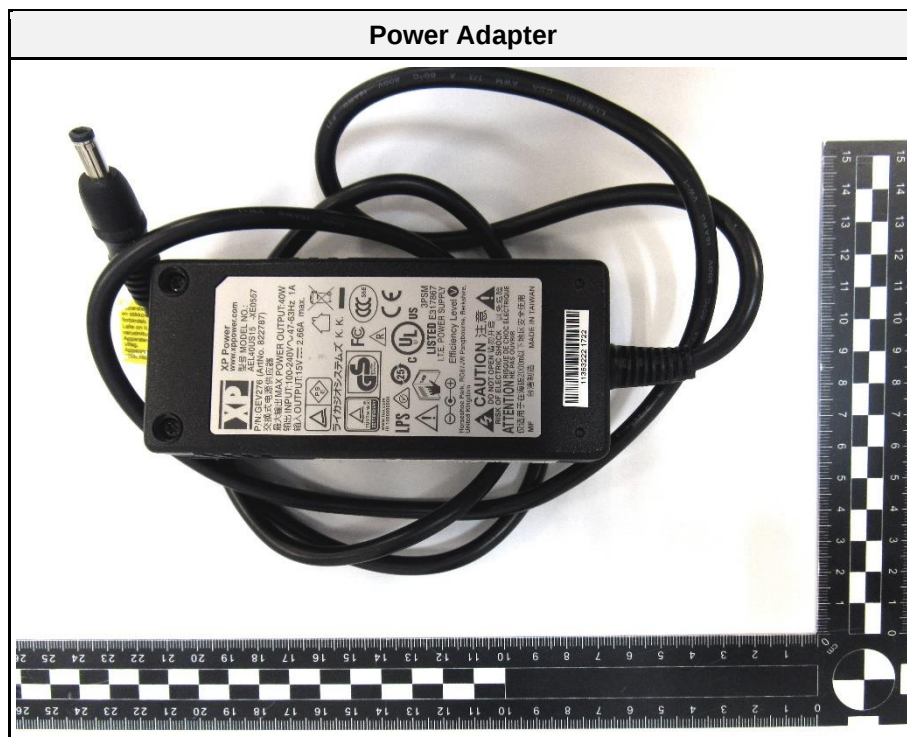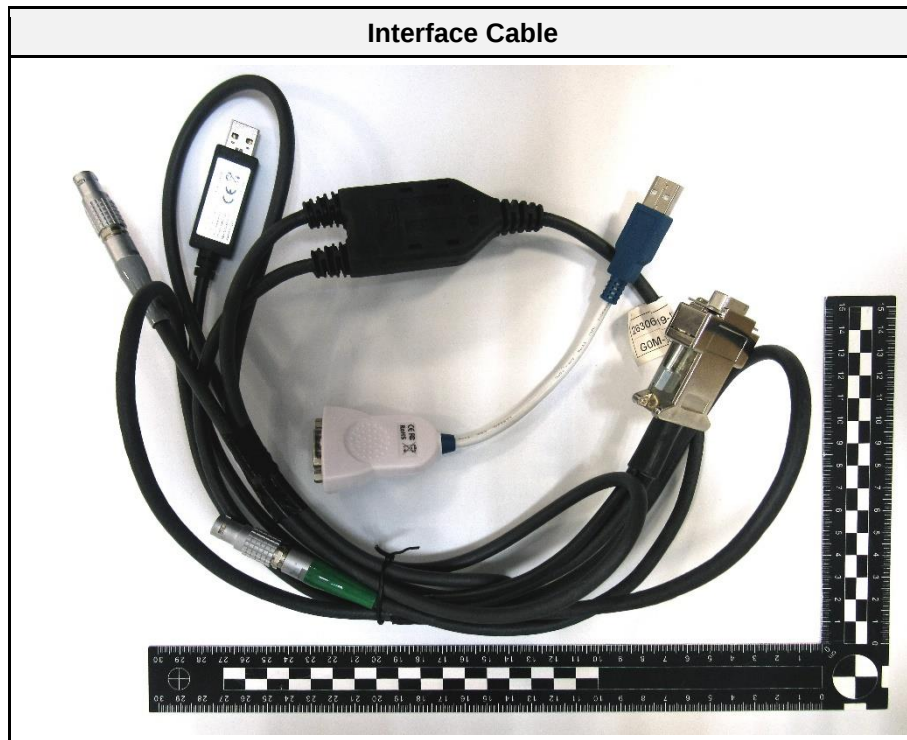

1.2 Photos – Equipment Internal

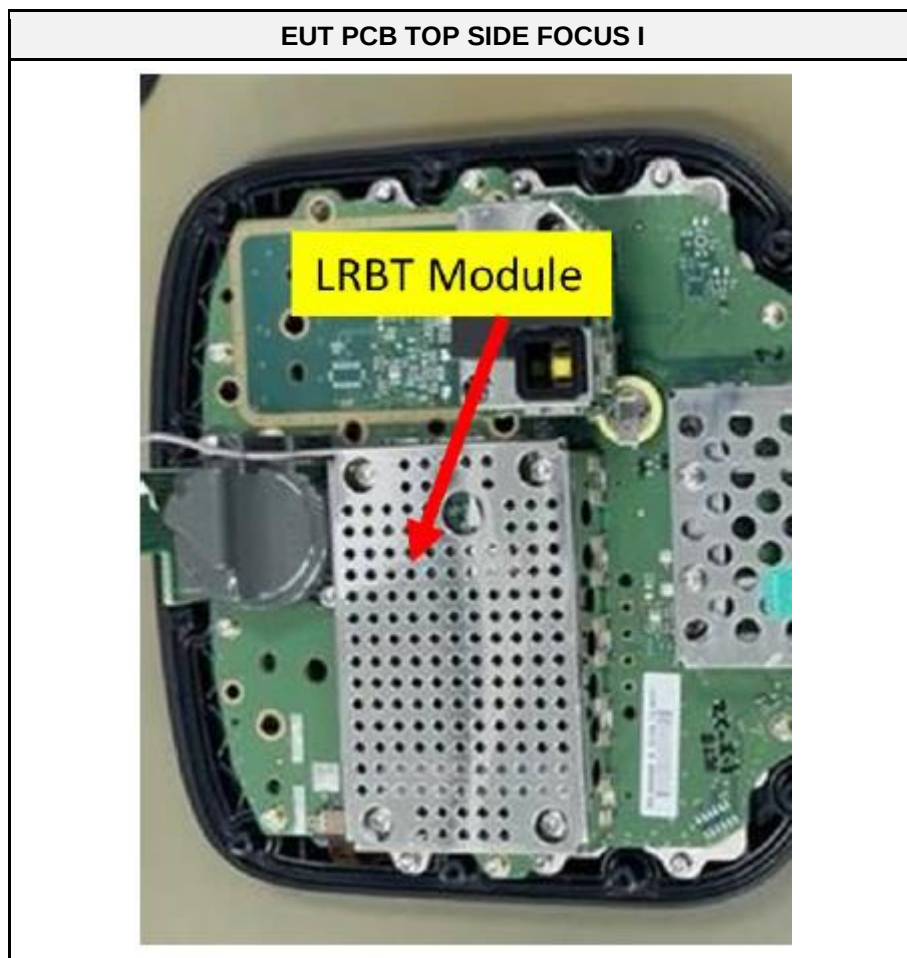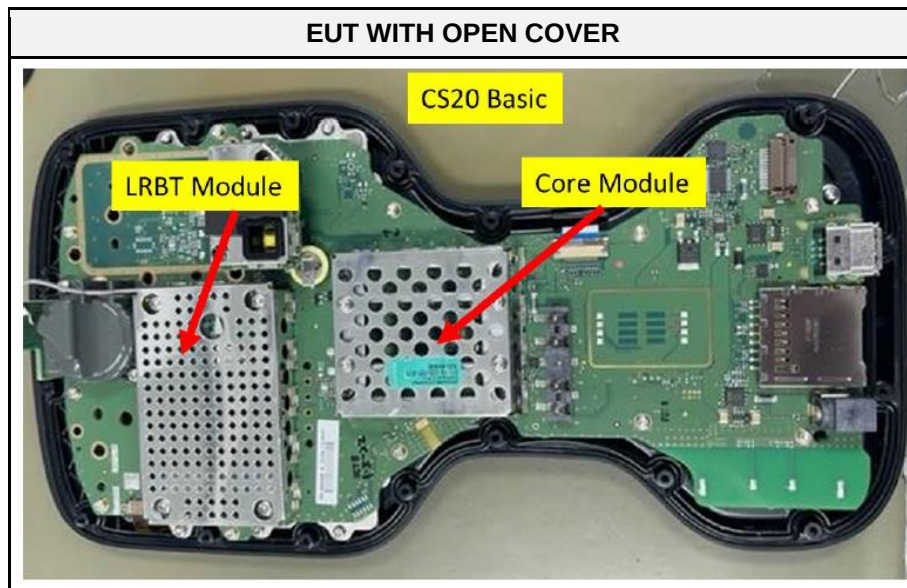


EUT PCB TOP SIDE FOCUS II

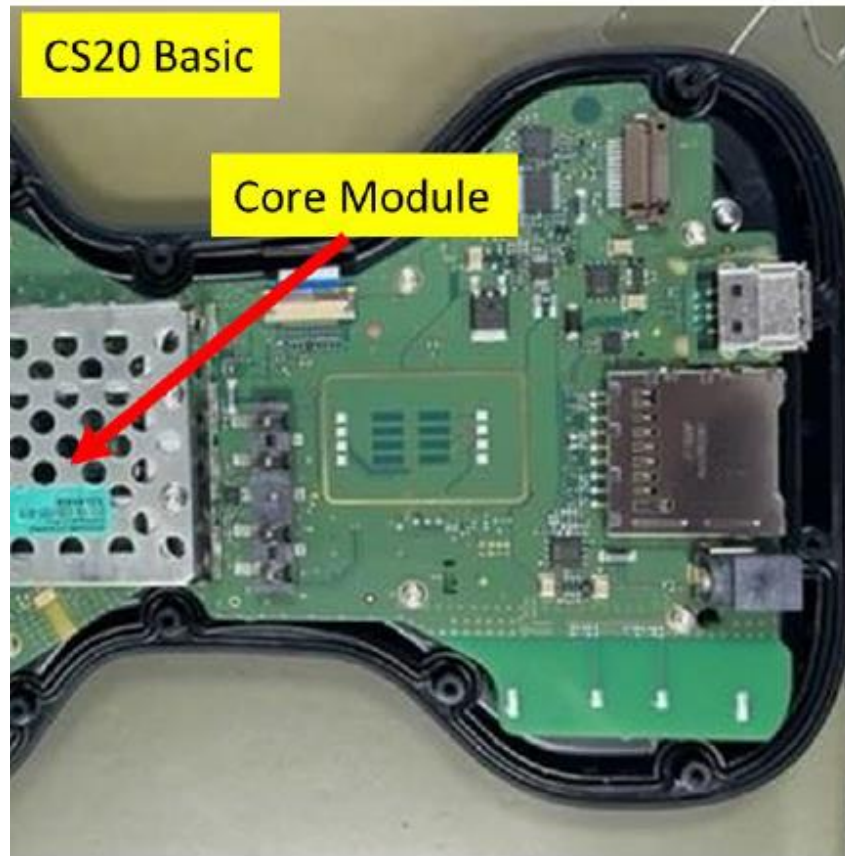

EUT PCB CORE MODULE BOARD TOP SIDE



EUT PCB CORE MODULE BOARD BOTTOM SIDE

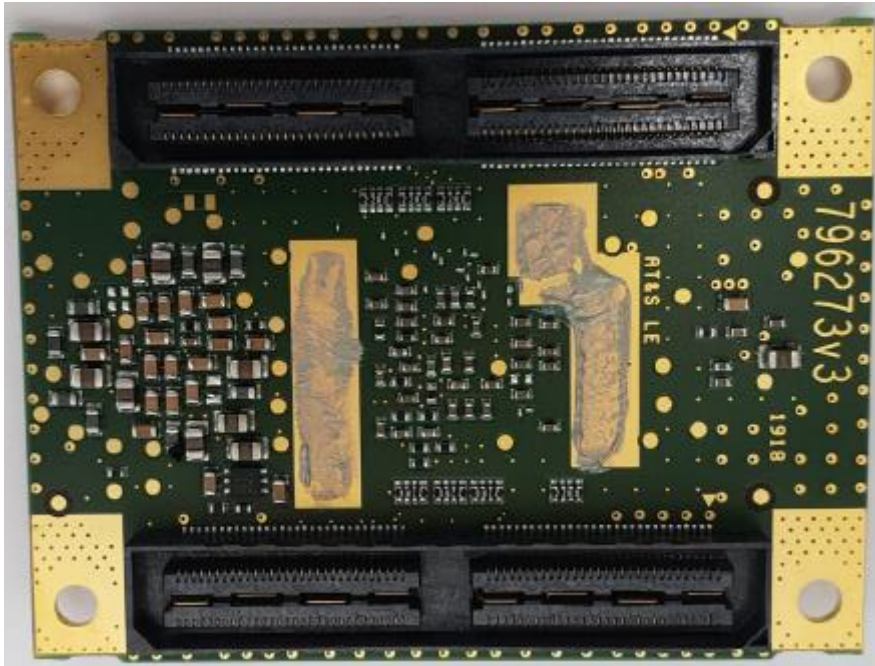

EUT PCB LONG-RANGE BLUETOOTH BOARD TOP SIDE



EUT PCB LONG-RANGE BLUETOOTH BOARD BOTTOM SIDE



1.3 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
SIM	Communication Tester	R&S	CBT	BT-Tester
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.4 Test Modes

Mode	Description
DH5 Single	Mode = Transmit (DUT mode) Modulation = GFSK Spreading = None Packet type = DH5 Duty cycle = 78%
Receive	Mode = Scan mode
Comment: Test mode selection is based on pre-compliance measurement of output power of all operational modes. The operational modes with the highest output power were selected for compliance tests.	

1.5 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	40	2442
F3	Tx / Rx	78	2480

1.6 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading - FCC limit	= Margin
+21.5 dBμV + 26 dB/m	= 47.5 dBμV/m	:	47.5 dBμV/m - 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 A2 (section 6.7)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(1) ISED RSS-247 § 5.1 Issue 3	20 dB Bandwidth	ANSI C63.10-2013	N/T	1
FCC § 15.247(a)(1)(iii) ISED RSS-247, Issue 3 (section 5.1)	Number of hopping frequencies	ANSI C63.10-2013	N/R	For FHSS only
FCC § 15.247(a)(1) ISED RSS-247, Issue 3 (section 5.1)	Frequency hopping channel separation	ANSI C63.10-2013	N/R	For FHSS only
FCC § 15.247(a)(1)(iii) ISED RSS-247, Issue 3 (section 5.1)	Time of occupancy (Dwell time)	ANSI C63.10-2013	N/R	For FHSS only
FCC § 15.247(b) ISED RSS-247, Issue 3 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	N/T	1
FCC § 15.207 ISED RSS-247, Issue 3 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	--
FCC § 15.247(d) ISED RSS-247, Issue 3 (section 5.5)	Band edge compliance	ANSI C63.10-2013	N/T	1
FCC § 15.247(d) ISED RSS-247, Issue 3 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	N/T	1
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 A2 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	--
ISED RSS-247, Issue 3 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.4-2014	PASS	--
Comment: The Decision Rule is applied on the basis of ETSI TR 102 273 and ETSI TR 100 028. These standards provide guidance on how to calculate and apply measurement uncertainty whilst providing maximum uncertainties allowance. In all cases due consideration will be given to ILAC-G8:09/2019. Where a result is considered conditional in respect of its proximity to the limit line, the customer would be made aware of situation so that they can make an informed decision on how to proceed. 1 → see module report F111592E2 from PHOENIX TESTLAB, Issue date 2011-06-22				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - AC powerline conducted emissions

3.1.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 3 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Measurement Uncertainty	± 3.82 dB
Operator	Mr. Liebich
Date	2022-10-24

3.1.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBμV]	Average [dBμV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.1.3 Setup

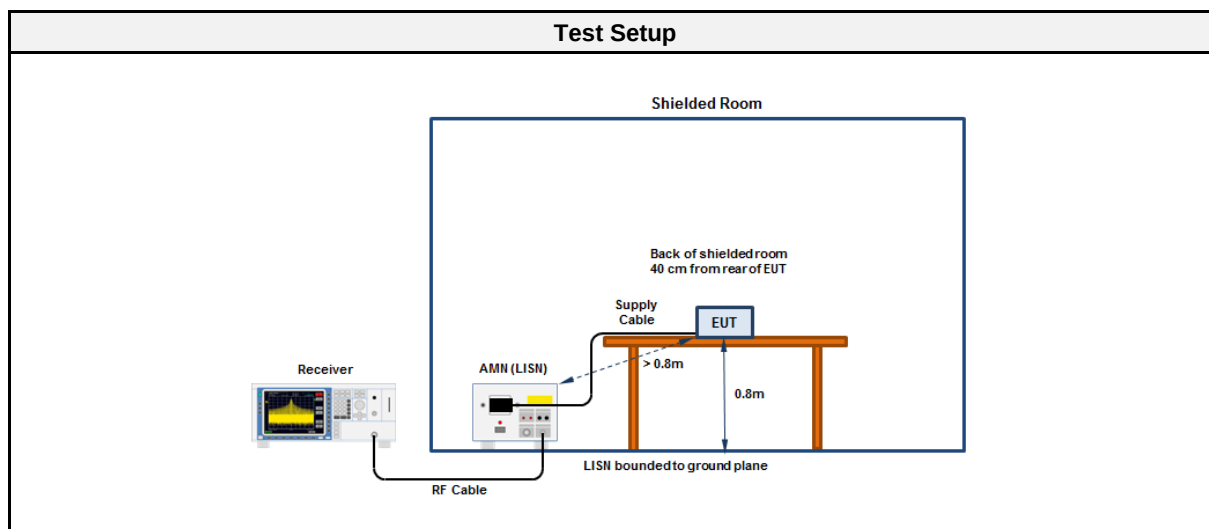

3.1.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8


Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	R&S	ESR7	EF00943	2022-07	2023-07
Pulse Limiter	R&S	ESH3-Z2	EF01222	2021-07	2023-07
LISN	Schwarzbeck	NSLK 8127 RC	EF01592	2021-07	2023-07

Conducted emissions at the mains power port according to FCC 47 CFR 15.207

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems AG
 Model Description: Field Controller Win EC7
 Model: CS20 Basic
 Test Sample ID: 41411
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2022-10-24
 Operating Conditions: ambient temperature: 22 °Celsius
 power input: 15 V DC via dedicated AC/DC-adapter by 110 V AC / 60 Hz
 LISN: Schwarzbeck NSLK 8127 RC L1
 Operational Mode: Bluetooth link to GNSS System + Bluetooth-LR link to Motorized Imaging Total Station + WLAN link to WLAN access point
 EUT Configuration:
 Applied to Port: L1
 Note 1: Charging via dedicated AC/DC-adapter (GEV276)

Index 16

RadiMation

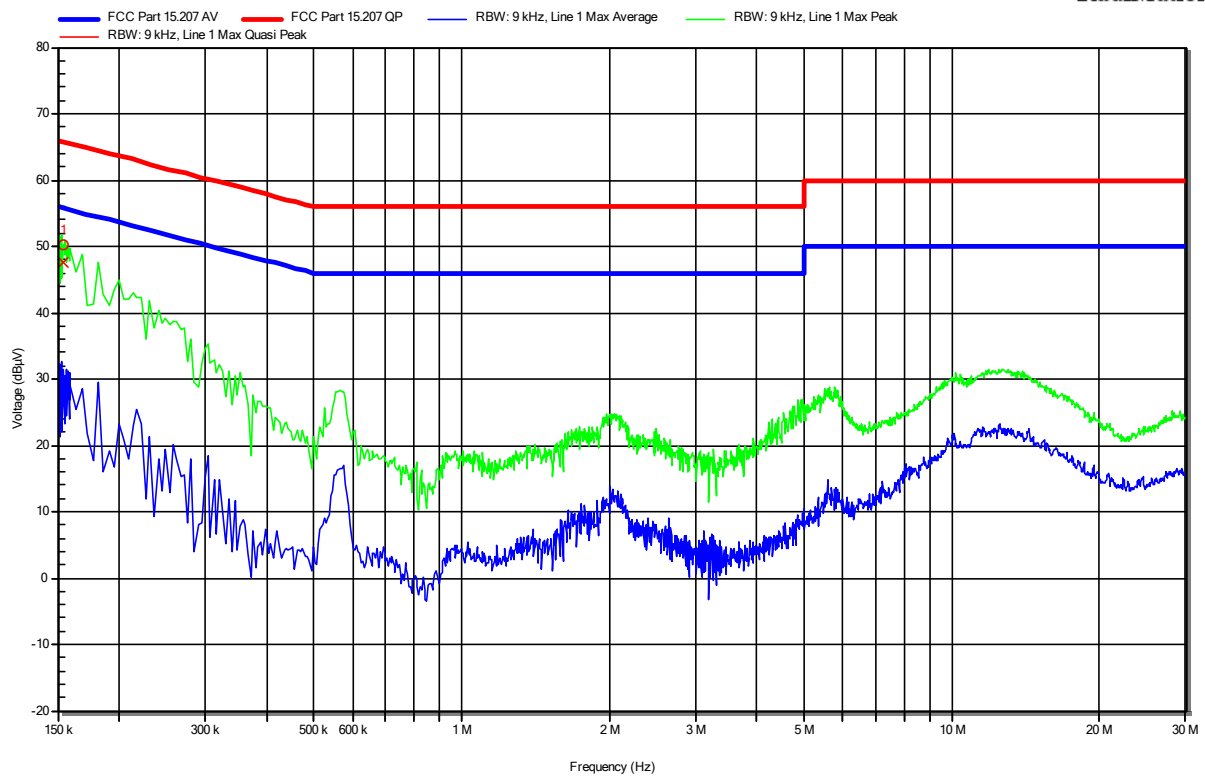

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	154.05 kHz	47.66 dBμV	65.78 dBμV	-18.12 dB	Pass	Line 1
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	154.05 kHz	28.92 dBμV	55.78 dBμV	-26.86 dB	Pass	Line 1

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Conducted emissions at the mains power port according to FCC 47 CFR 15.207

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems AG
 Model Description: Field Controller Win EC7
 Model: CS20 Basic
 Test Sample ID: 41411
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Liebich
 Test Date: 2022-10-24
 Operating Conditions: ambient temperature: 22 °Celsius
 power input: 15 V DC via dedicated AC/DC-adapter by 110 V AC / 60 Hz
 LISN: Schwarzbeck NSLK 8127
 Operational Mode: Bluetooth link to GNSS System + Bluetooth-LR link to Motorized Imaging Total Station + WLAN link to WLAN access point
 EUT Configuration:
 Applied to Port: N
 Note 1: Charging via dedicated AC/DC-adapter (GEV276)

Index 15

RadiMation

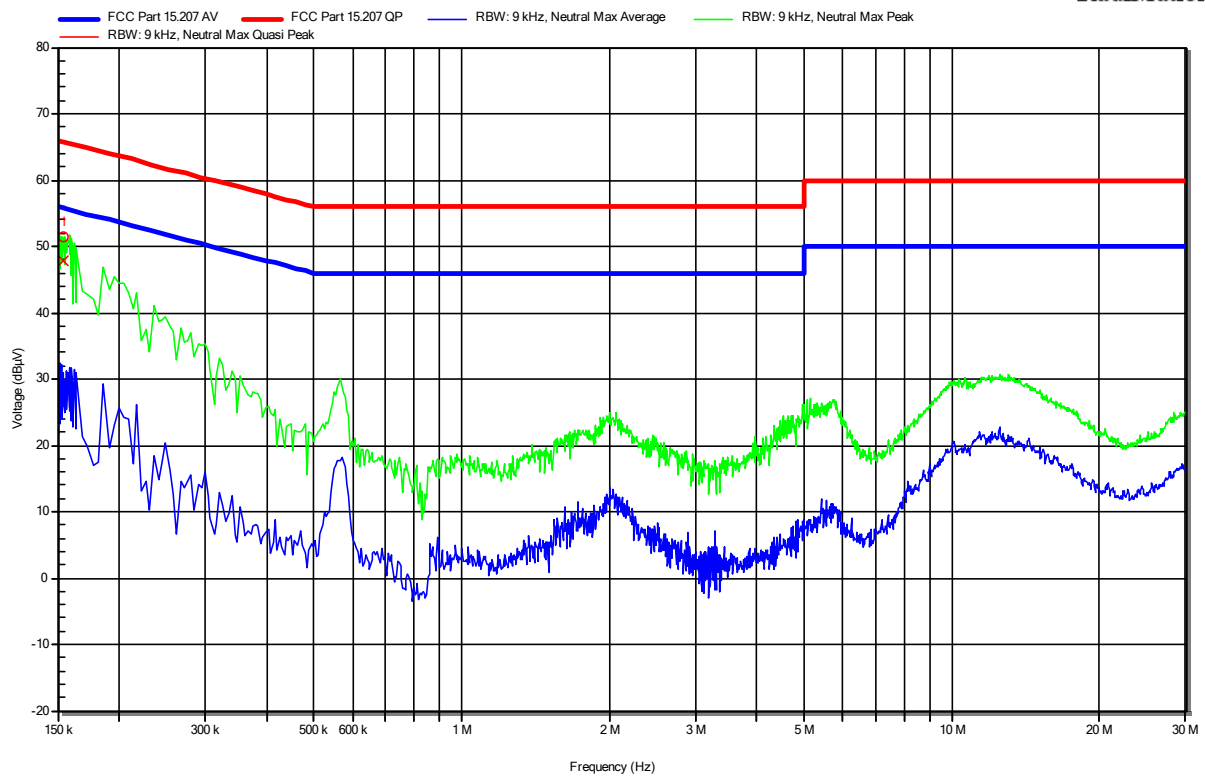


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	LISN
1	154.5 kHz	47.93 dBμV	65.75 dBμV	-17.83 dB	Pass	Neutral
Peak Number	Frequency	Average	Average Limit	Average Difference	Average Status	LISN
1	154.5 kHz	29.32 dBμV	55.75 dBμV	-26.44 dB	Pass	Neutral

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

3.1.5 Setup Photos

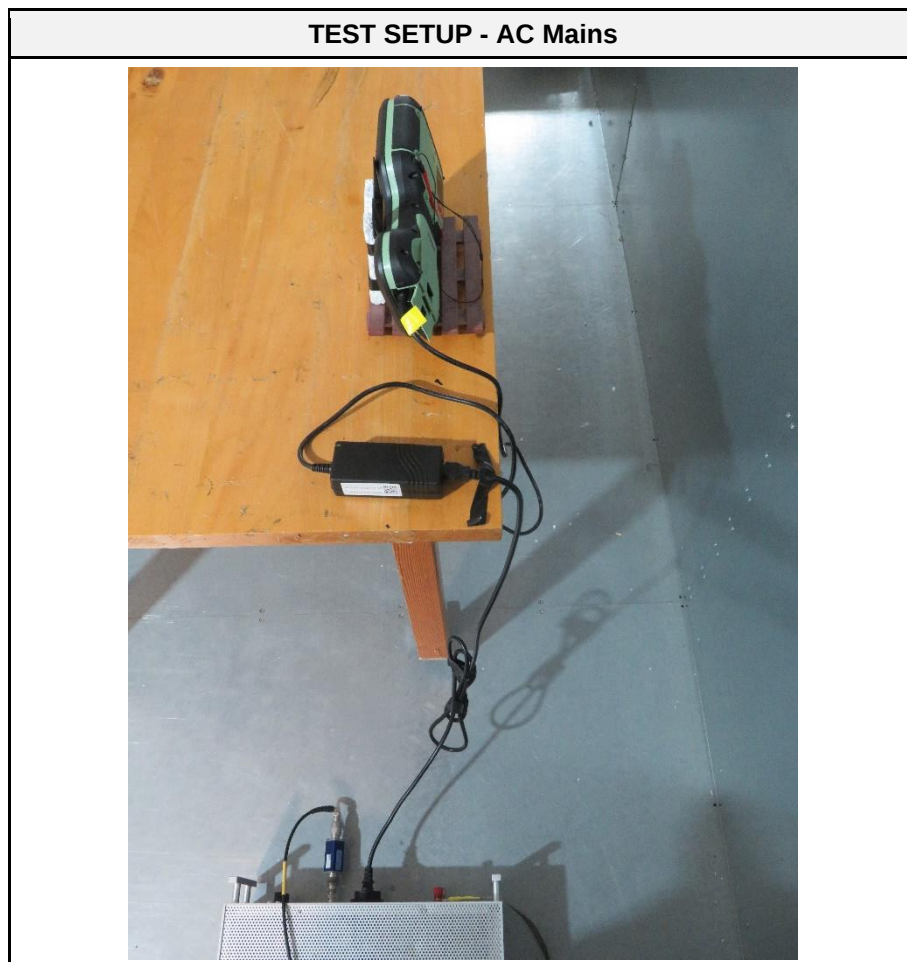

3.2 Test Conditions and Results - Transmitter radiated emissions


3.2.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISSED RSS-Gen, Issue 5 A2 (section 6.13)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6
Operator	Burkhard Pudell
Date	2022-10-10

3.2.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.2.3 Setup

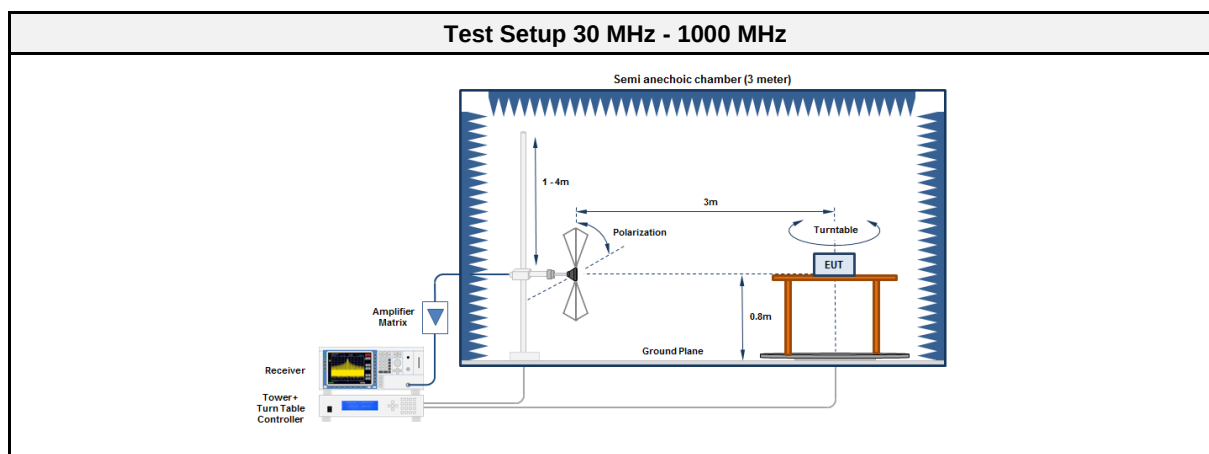

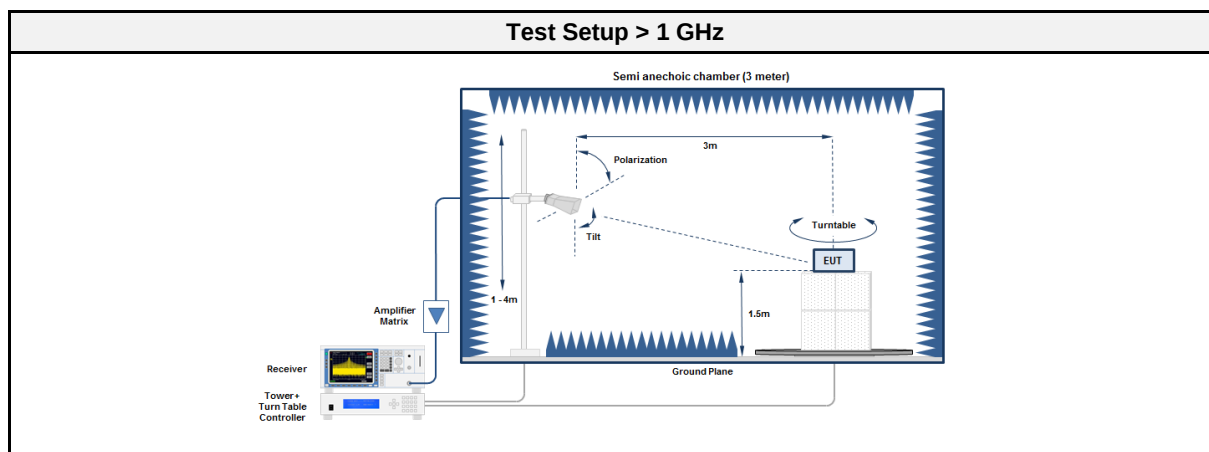

3.2.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 MHz - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	functional test	functional test
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2023-01
Antenna	R&S	HK 116	EF00030	2021-05	2024-05
Antenna	R&S	HL 223	EF00212	2022-08	2025-08

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC 2	EF01616	functional test	functional test
Spectrum analyzer	R&S	FSU43	EF01631	2022-08	2023-08
Horn antenna	Schwarzbeck	BBHA 9120B	EF01678	2021-03	2024-03
Horn Antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2024-03
Horn Antenna	Amplifier Research	AT4560	EF00302	2021-06	2023-06
Horn Antenna	Flann Microwave Ltd	22240-25	EF00301	2019-12	2022-12

3.2.5 Procedure



Test Procedure 30 MHz - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector


3.2.6 Results

Test Results - 3-DH5						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	2356.9	54.32	pk	hor	74.00	-19.68
2402	2356.9	42.53	avg	hor	54.00	-11.47
2402	2365.1	54.58	pk	ver	74.00	-19.42
2402	2365.1	41.68	avg	ver	54.00	-12.32
2402	2381.7	54.73	pk	ver	74.00	-19.27
2402	2381.7	41.41	avg	ver	54.00	-12.59
2402	4803.9	35.48	avg	ver	54.00	-18.52
2402	4804.1	37.19	avg	hor	54.00	-16.81
2402	19215	45.80	avg	ver	54.00	-08.20
2402	19217	40.10	avg	ver	54.00	-13.90
2442	4883.6	34.40	avg	ver	54.00	-19.60
2442	7325.9	38.50	avg	hor	54.00	-15.50
2442	19535	39.15	avg	hor	54.00	-14.85
2442	19537	43.00	avg	ver	54.00	-11.00
2480	135.9738	30.00	qpk	hor	43.50	-13.54
2480	408.4942	26.20	qpk	ver	46.00	-19.80
2480	2484.4	55.54	pk	ver	74.00	-18.46
2480	2484.4	43.81	avg	ver	54.00	-10.19
2480	2486.5	46.07	avg	ver	54.00	-07.93
2480	2498.7	42.60	avg	hor	54.00	-11.40
2480	4960	36.35	avg	ver	54.00	-17.65
2480	4960	38.01	avg	ver	54.00	-15.99
2480	7440	41.90	avg	ver	54.00	-12.10
2480	7440	40.28	avg	hor	54.00	-13.72
2480	19841	43.86	avg	hor	54.00	-10.14
2480	19841	45.35	avg	ver	54.00	-08.65
2480	22319	39.31	avg	ver	54.00	-14.69
2480	22321	42.10	avg	hor	54.00	-11.90


3.2.7 Setup Photos

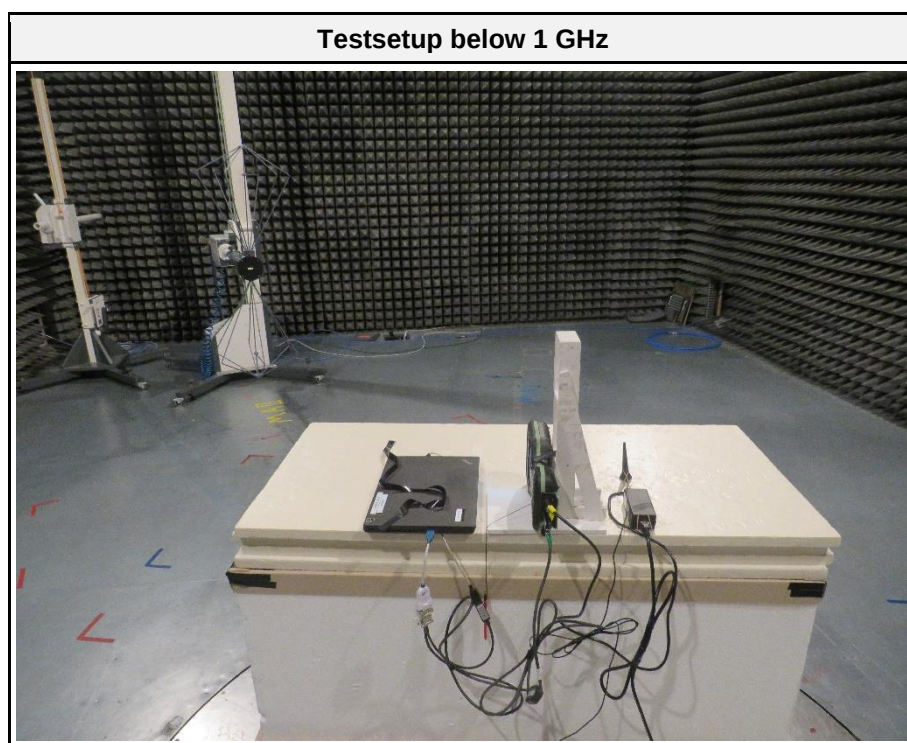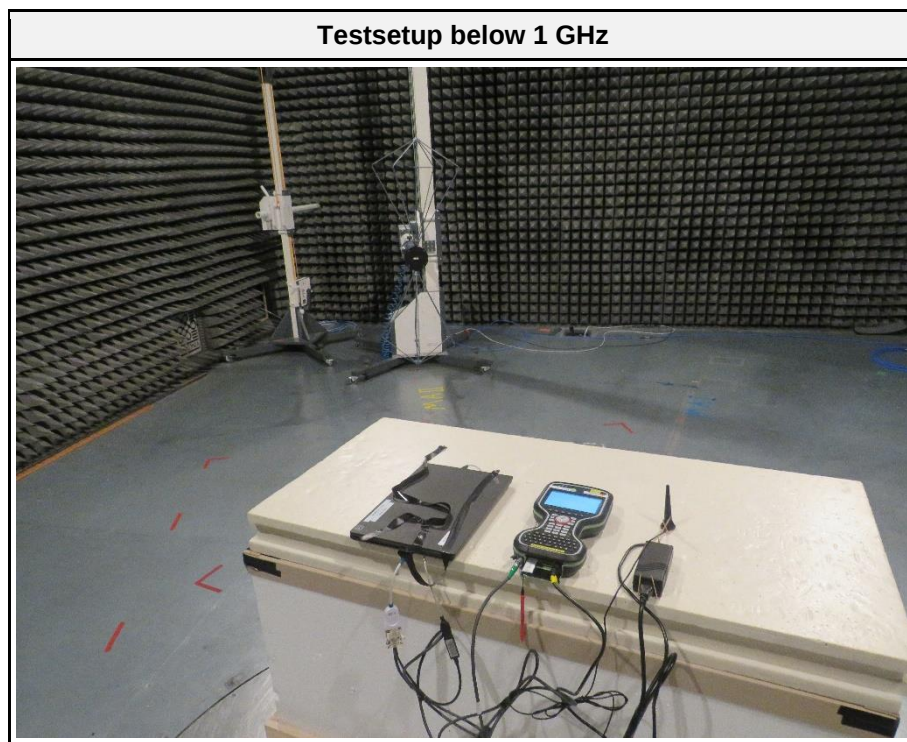


Testsetup below 1 GHz

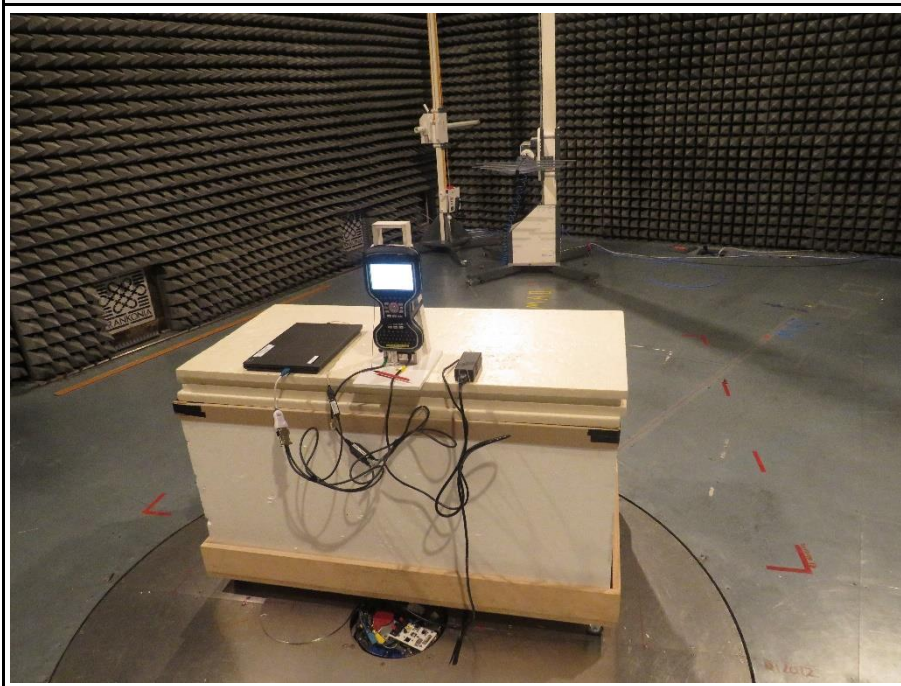


Testsetup below 1 GHz

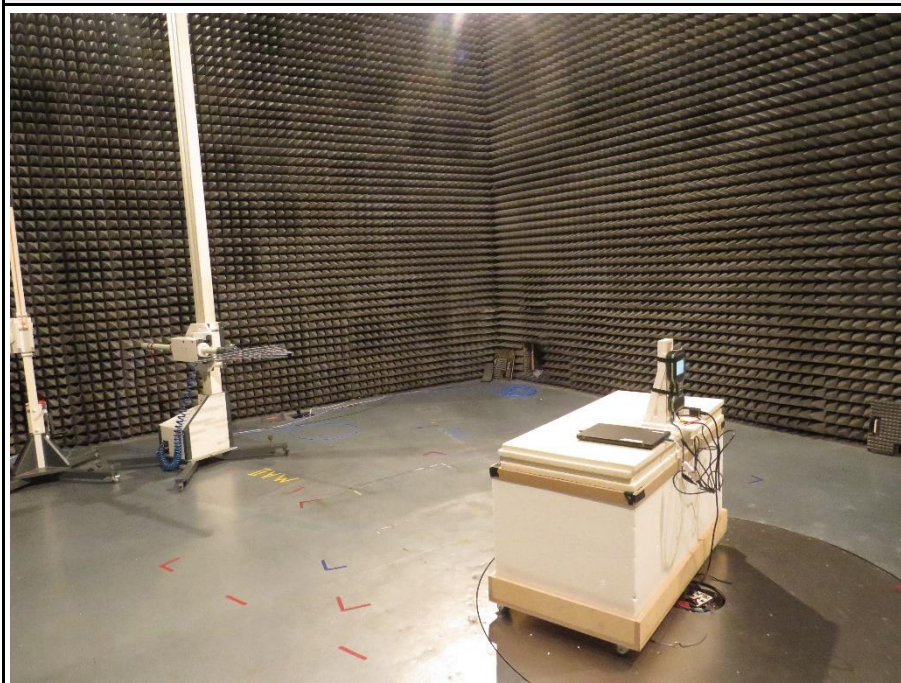


Testsetup below 1 GHz

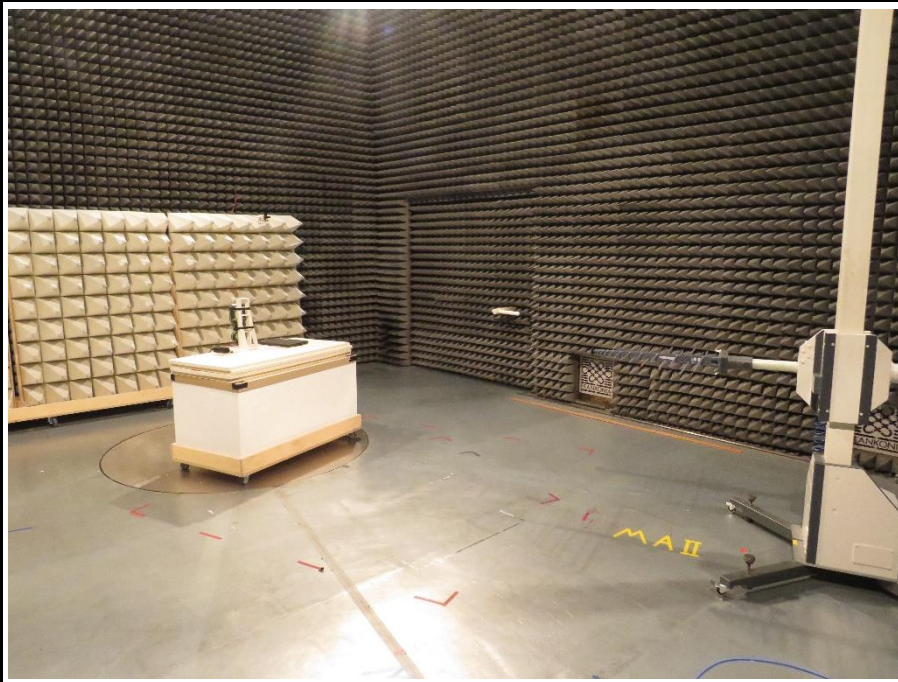


Testsetup above 1 GHz

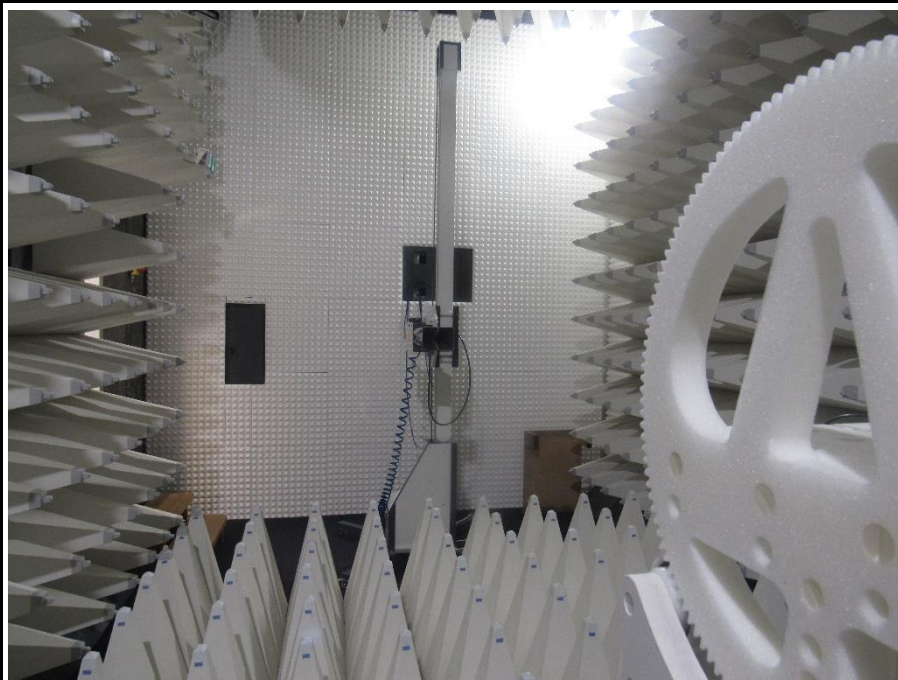

Testsetup above 1 GHz

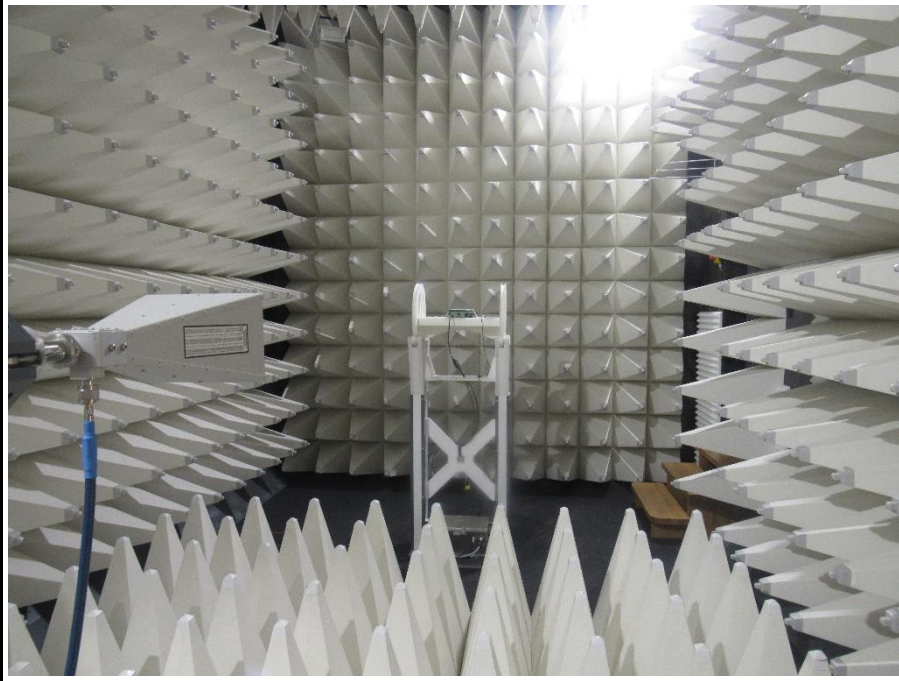

Testsetup above 1 GHz

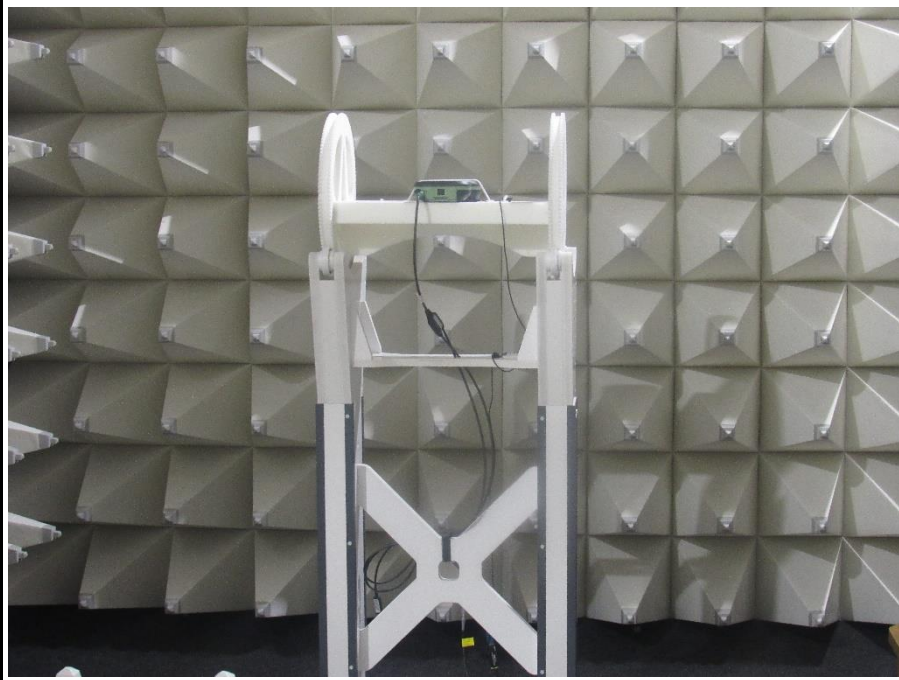

Testsetup above 1 GHz



Testsetup above 1 GHz



3.3 Test Conditions and Results - Receiver radiated emissions



3.3.1 Information

Test Information	
Reference	ISED RSS-247, Issue 3 (section 3.1)
Measurement Uncertainty	± 5.95 dB
Measurement Method	ANSI C63.4-2014 8.1-8.3
Operator	Florian Voigt
Date	2022-10-21

3.3.2 Limits

Limits			
Frequency range [MHz]	Detector	Field strength [$\mu\text{V/m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.3.3 Setup

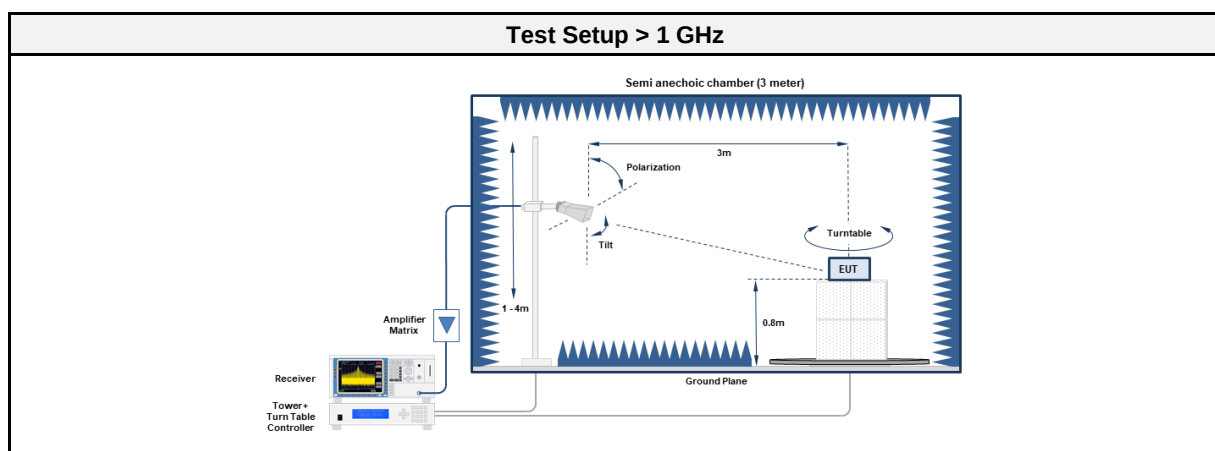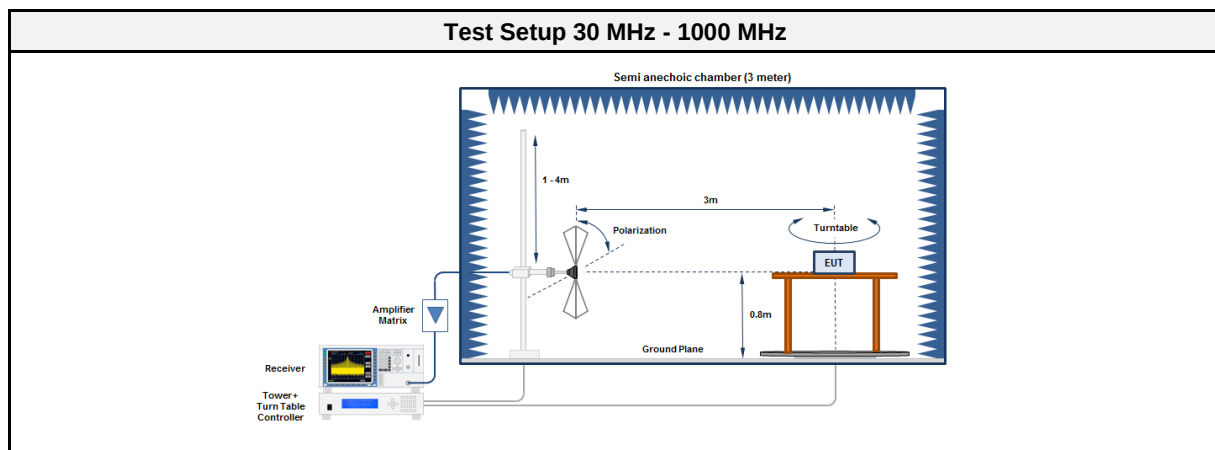

3.3.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 MHz - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF01011	functional test	functional test
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2023-01
Antenna	R&S	HK 116	EF00030	2021-05	2024-05
Antenna	R&S	HL 223	EF00212	2022-08	2025-08

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF01011	functional test	functional test
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2021-07	2023-01
Horn antenna	Schwarzbeck	BBHA 9120D	EF00019	2020-11	2022-11
Horn antenna	Schwarzbeck	HWRD 650	EF01679	2021-03	2024-03



3.3.5 Procedure

Test Procedure	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT is set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	


3.3.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
scan mode	30.0467	28.50	qpk	ver	40.00	-11.52
scan mode	30.5558	38.80	qpk	ver	40.00	-01.25
scan mode	102.403	30.50	qpk	ver	43.50	-13.05
scan mode	435.46	29.70	qpk	ver	46.00	-16.29
scan mode	1596	32.59	avg	ver	53.98	-21.39


3.3.7 Setup Photos

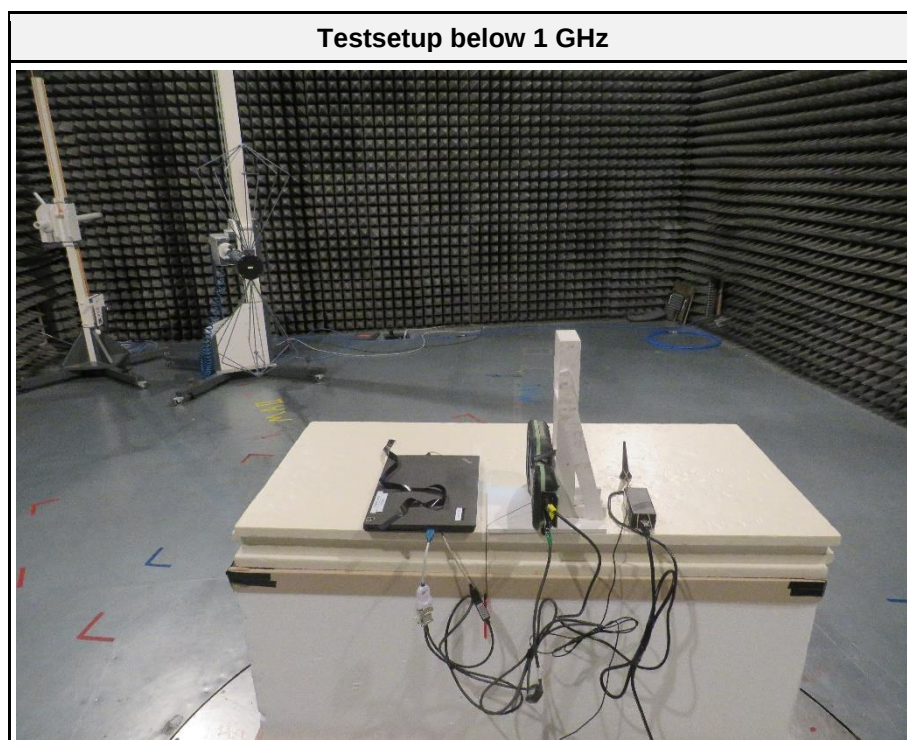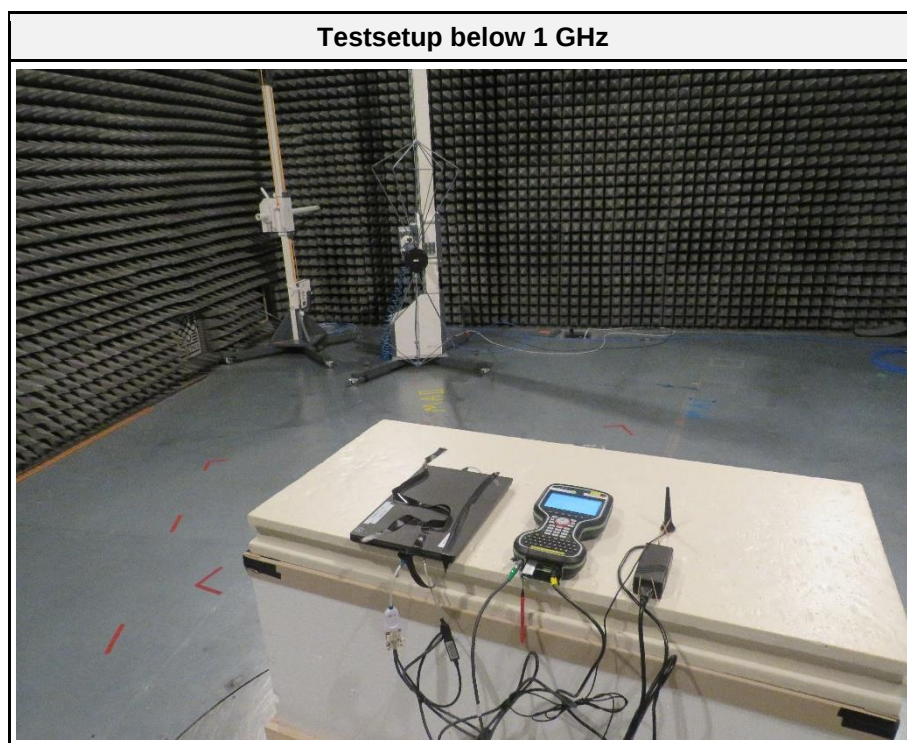


Testsetup below 1 GHz

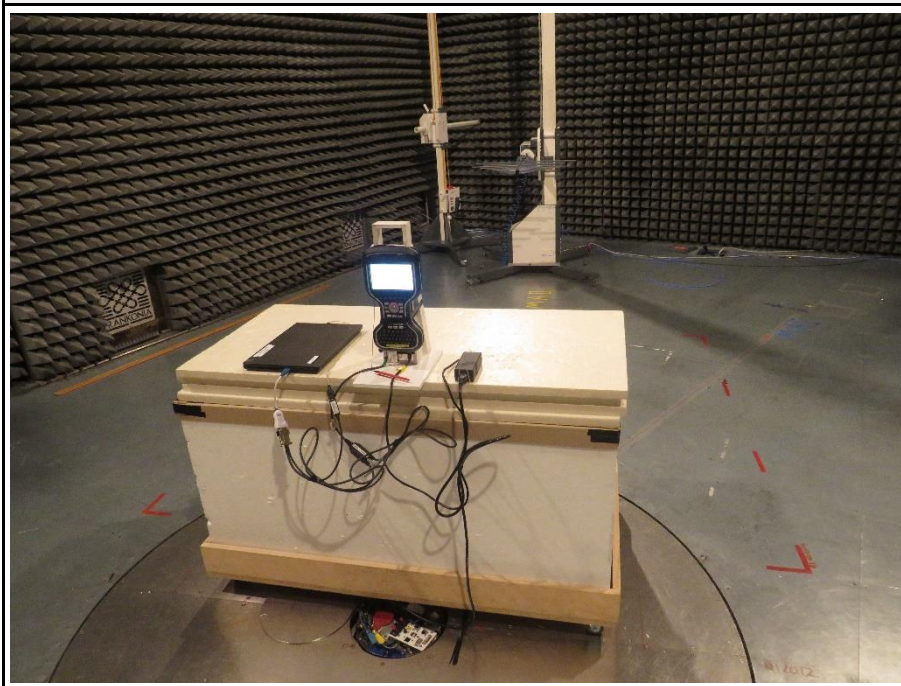


Testsetup below 1 GHz

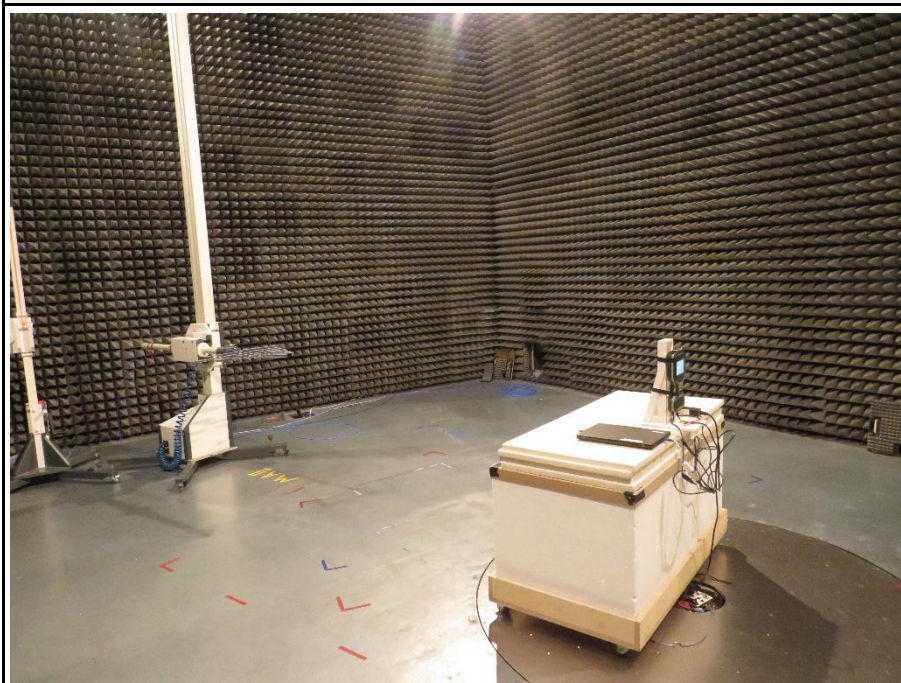


Testsetup below 1 GHz

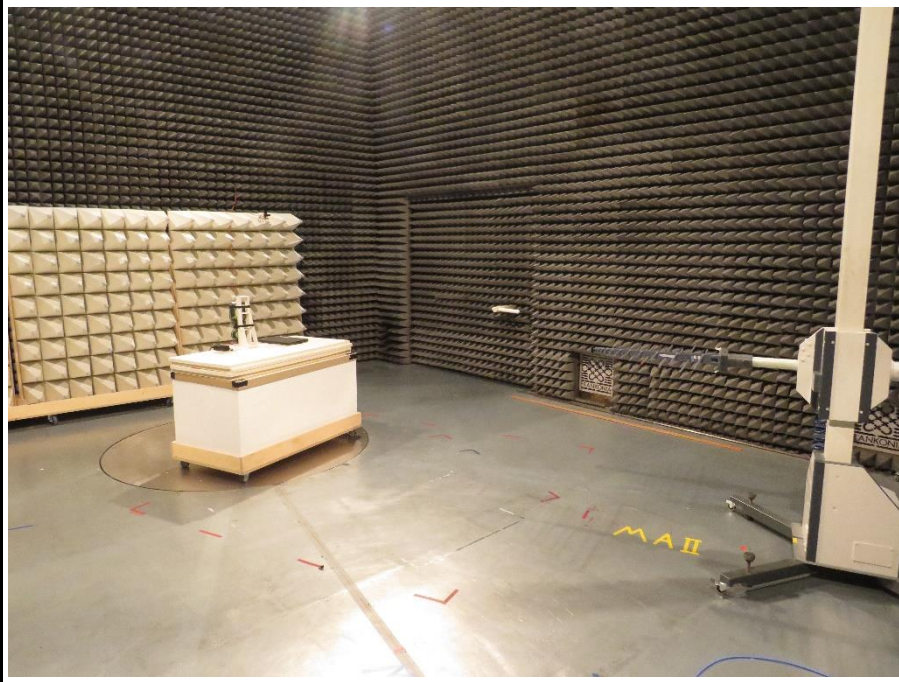


Testsetup above 1 GHz

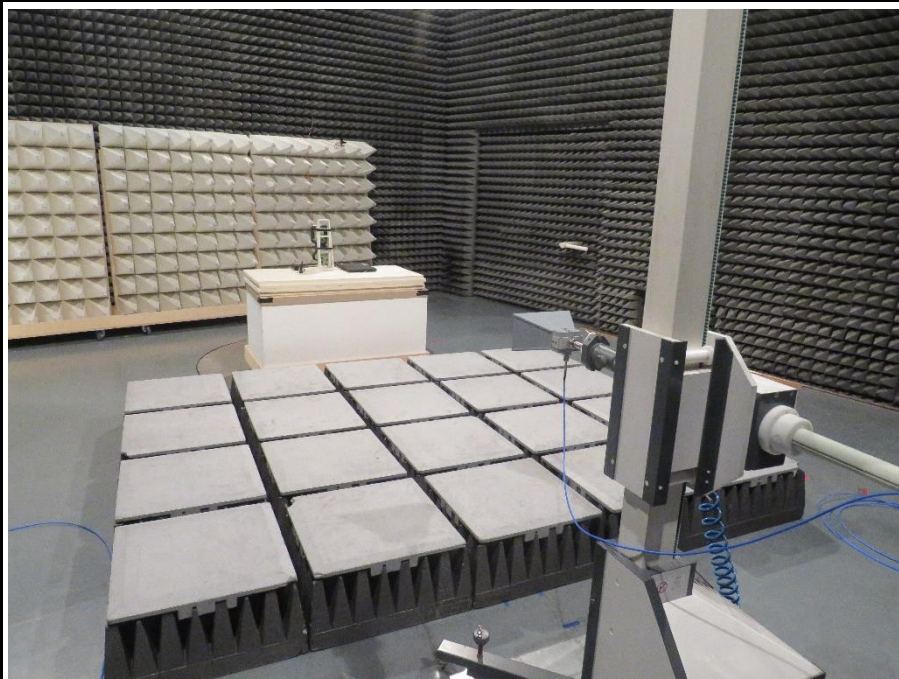

Testsetup above 1 GHz

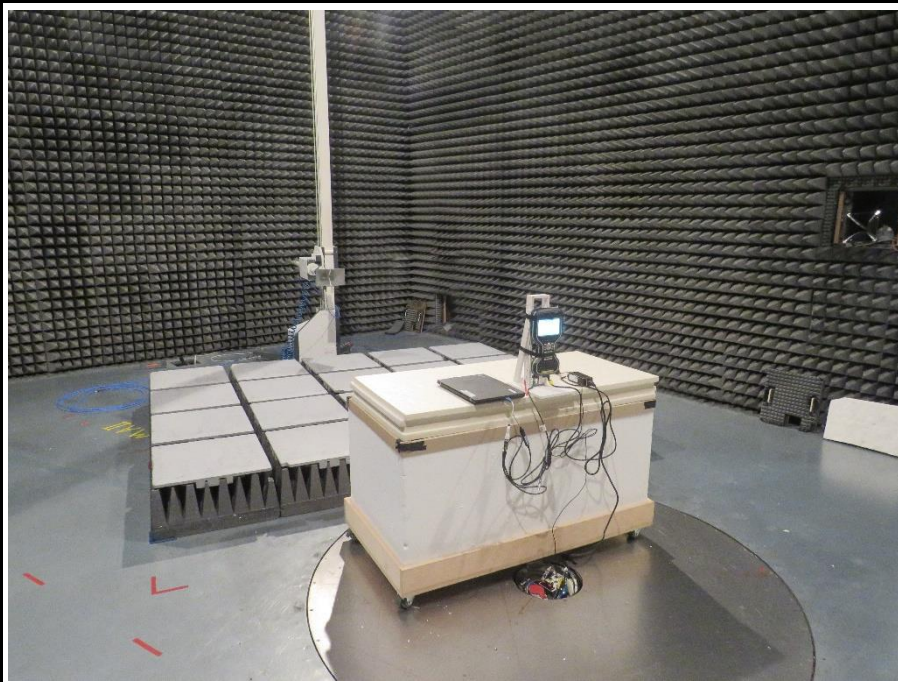


Testsetup above 1 GHz

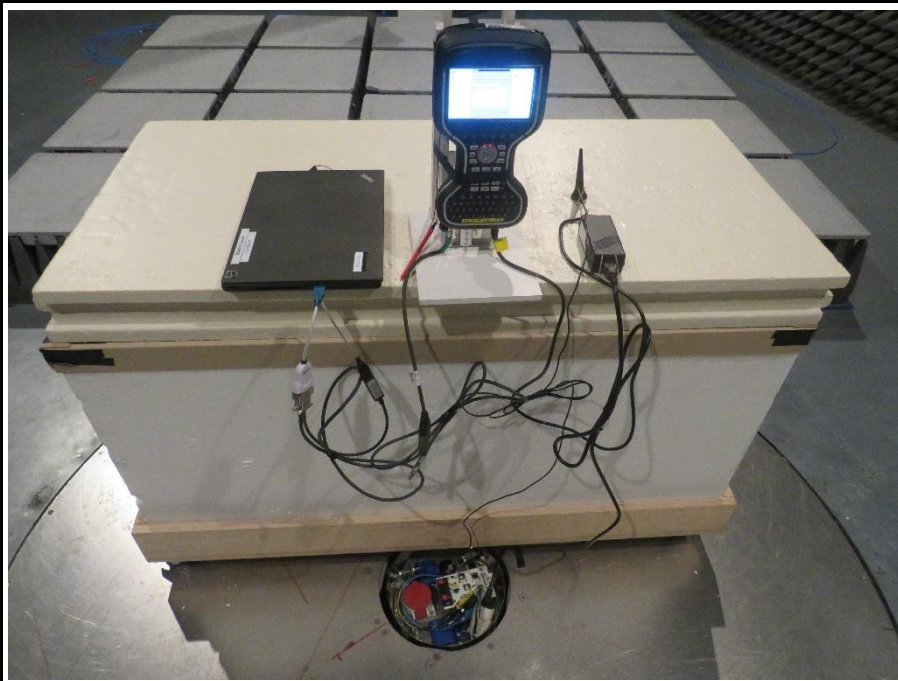

ANNEX A Transmitter spurious emissions

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3


Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-10-21
 Note: EUT horizontal

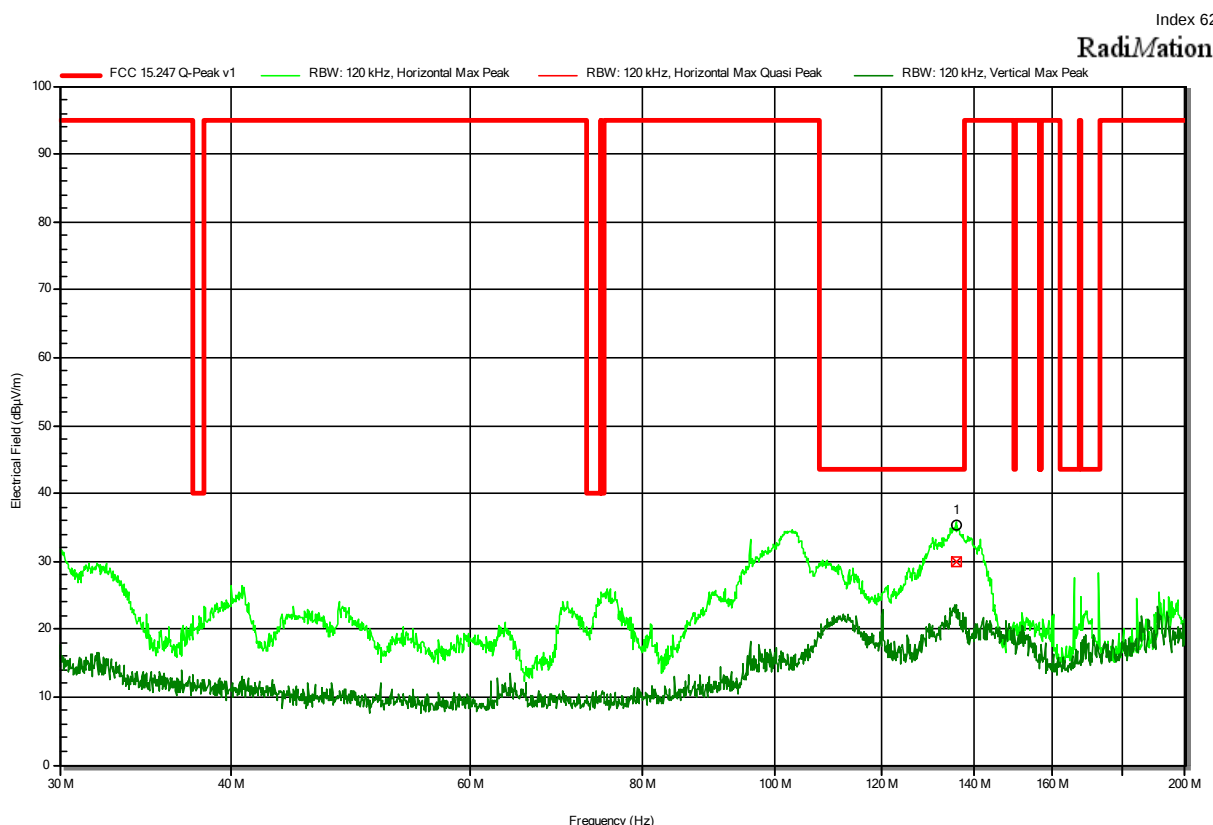

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
135.9738 MHz	30 dBµV/m	43.5 dBµV/m	-13.54 dB	Pass	Horizontal

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-10-21
 Note: EUT horizontal

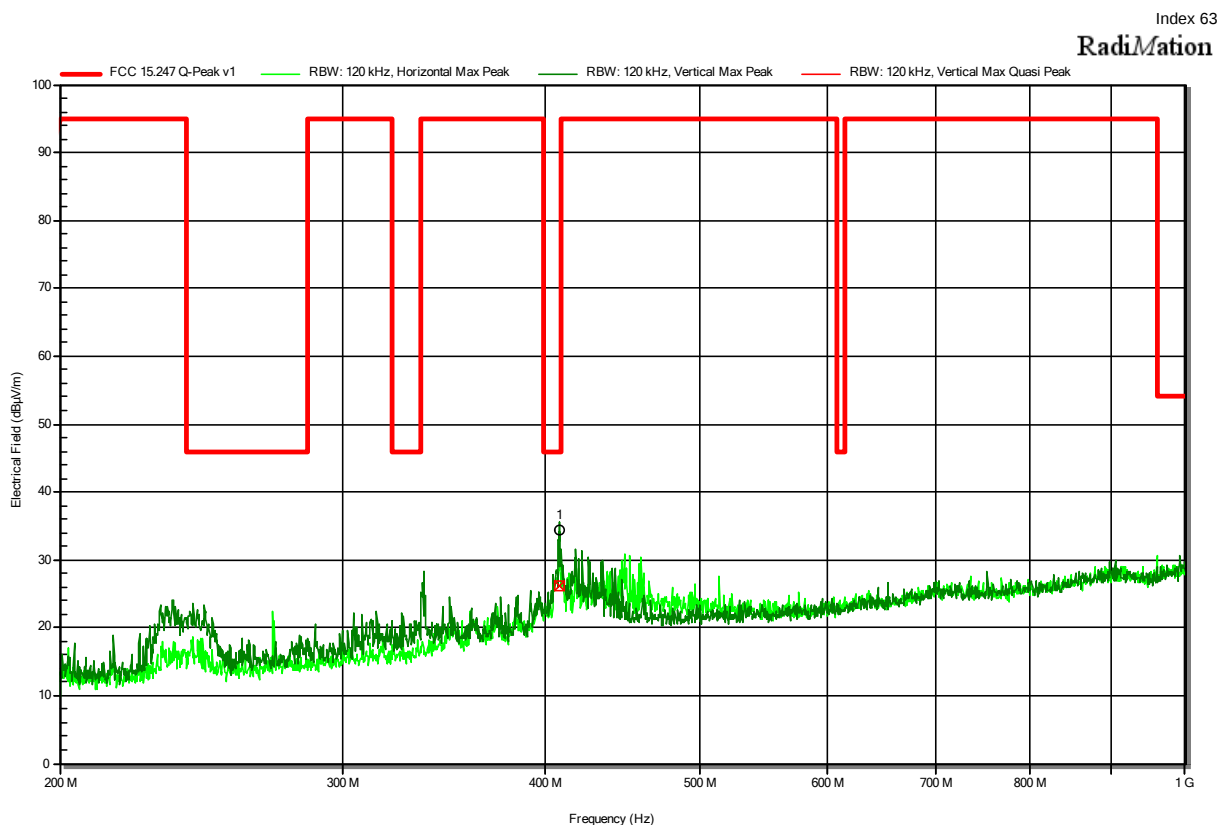


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
408.4942 MHz	26.2 dBµV/m	46 dBµV/m	-19.8 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 46

RadiMation

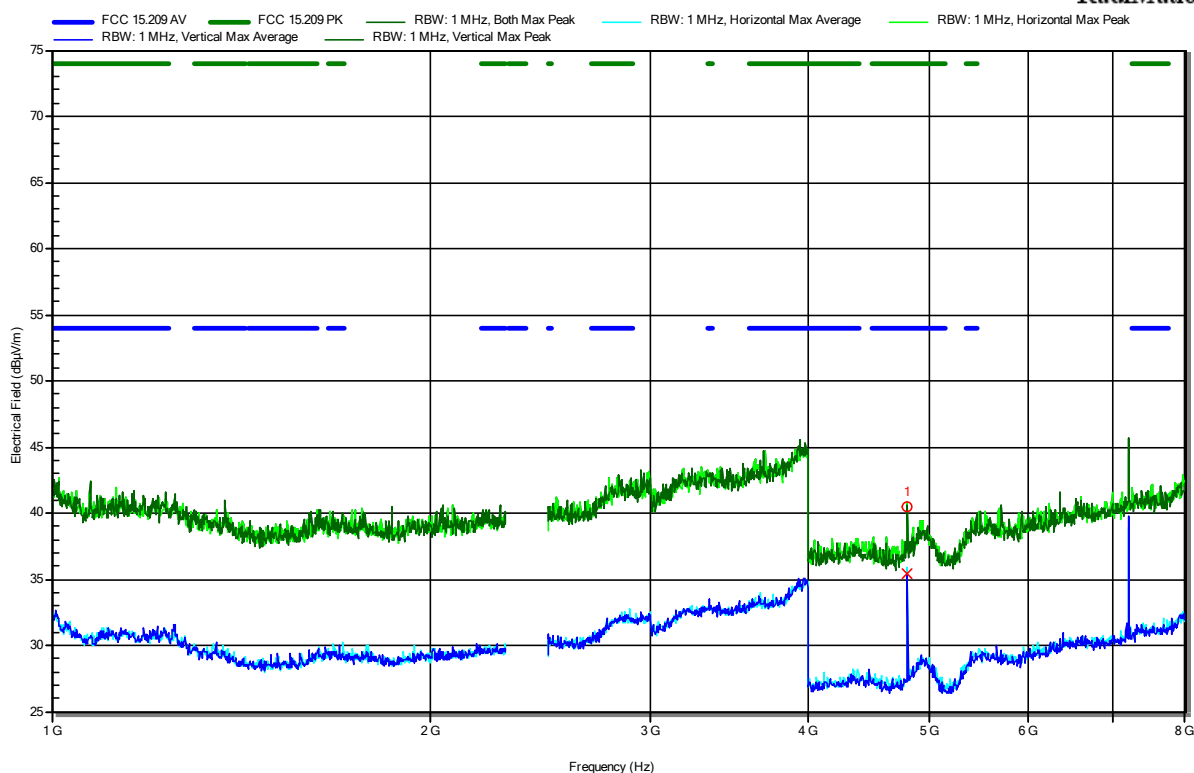

Frequency 4.8039 GHz	Peak 40.53 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -33.47 dB	Peak Status Pass	Polarization Vertical
Frequency 4.8039 GHz	Average 35.48 dBµV/m	Average Limit 54 dBµV/m	Average Difference -18.52 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT vertical

Index 52

RadiMation

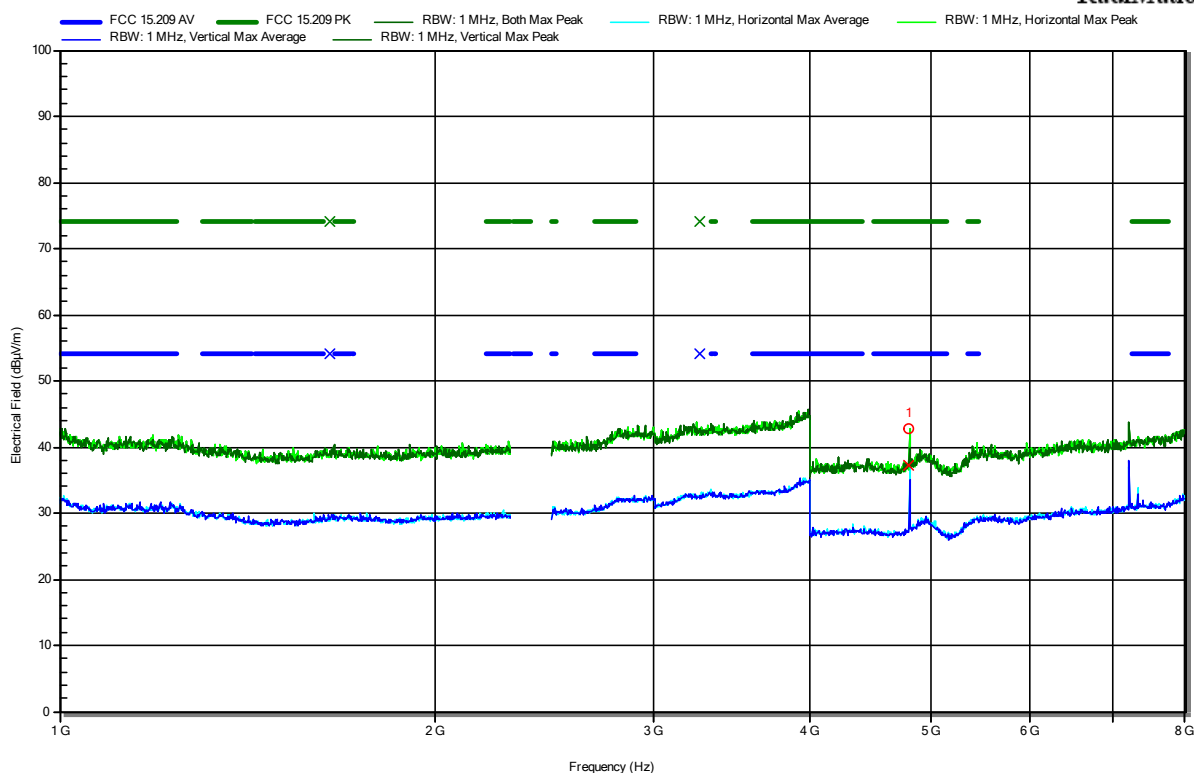

Frequency 4.8041 GHz	Peak 42.76 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -31.24 dB	Peak Status Pass	Polarization Horizontal
Frequency 4.8041 GHz	Average 37.19 dBµV/m	Average Limit 54 dBµV/m	Average Difference -16.81 dB	Average Status Pass	Polarization Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 40 (2442 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 48

RadiMation

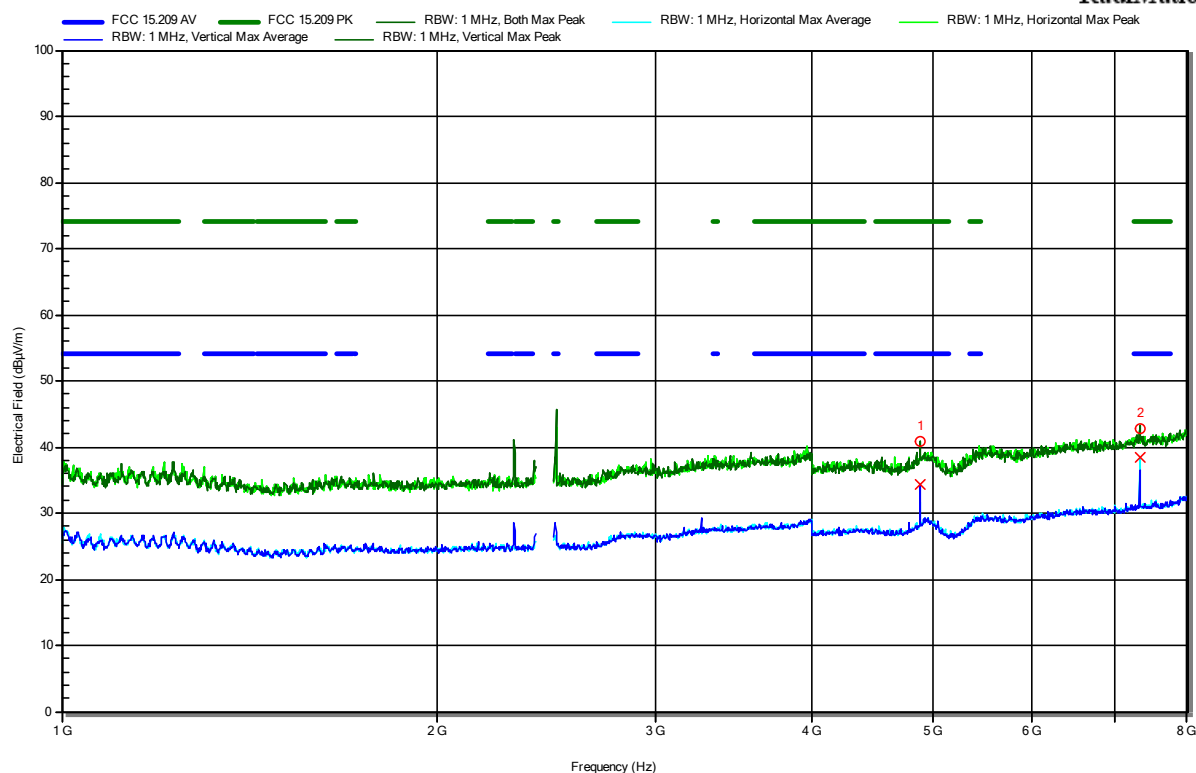

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.8836 GHz	40.86 dBµV/m	74 dBµV/m	-33.14 dB	Pass	Vertical
7.3259 GHz	42.72 dBµV/m	74 dBµV/m	-31.28 dB	Pass	Horizontal

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
4.8836 GHz	34.4 dBµV/m	54 dBµV/m	-19.6 dB	Pass	Vertical
7.3259 GHz	38.5 dBµV/m	54 dBµV/m	-15.5 dB	Pass	Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 49

RadiMation

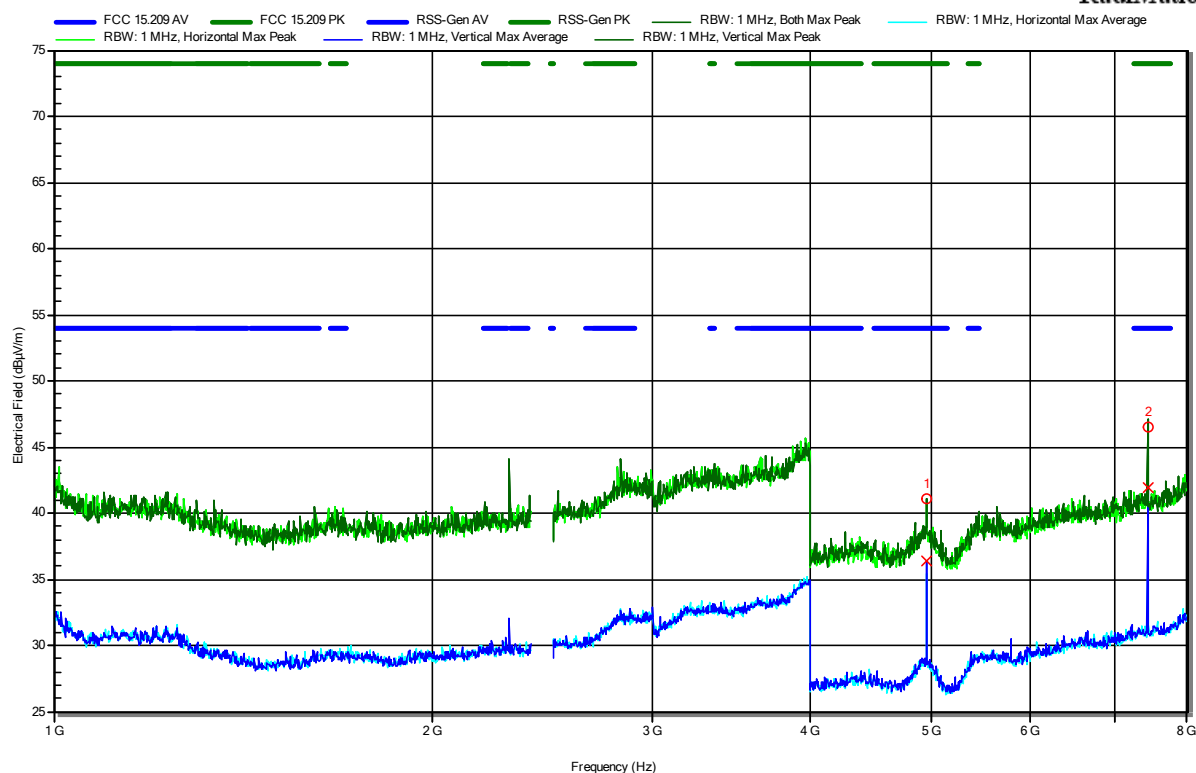

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.96 GHz	41.14 dBμV/m	74 dBμV/m	-32.86 dB	Pass	Vertical
7.44 GHz	46.48 dBμV/m	74 dBμV/m	-27.52 dB	Pass	Vertical

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
4.96 GHz	36.35 dBμV/m	54 dBμV/m	-17.65 dB	Pass	Vertical
7.44 GHz	41.9 dBμV/m	54 dBμV/m	-12.1 dB	Pass	Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT vertical

Index 51

RadiMation

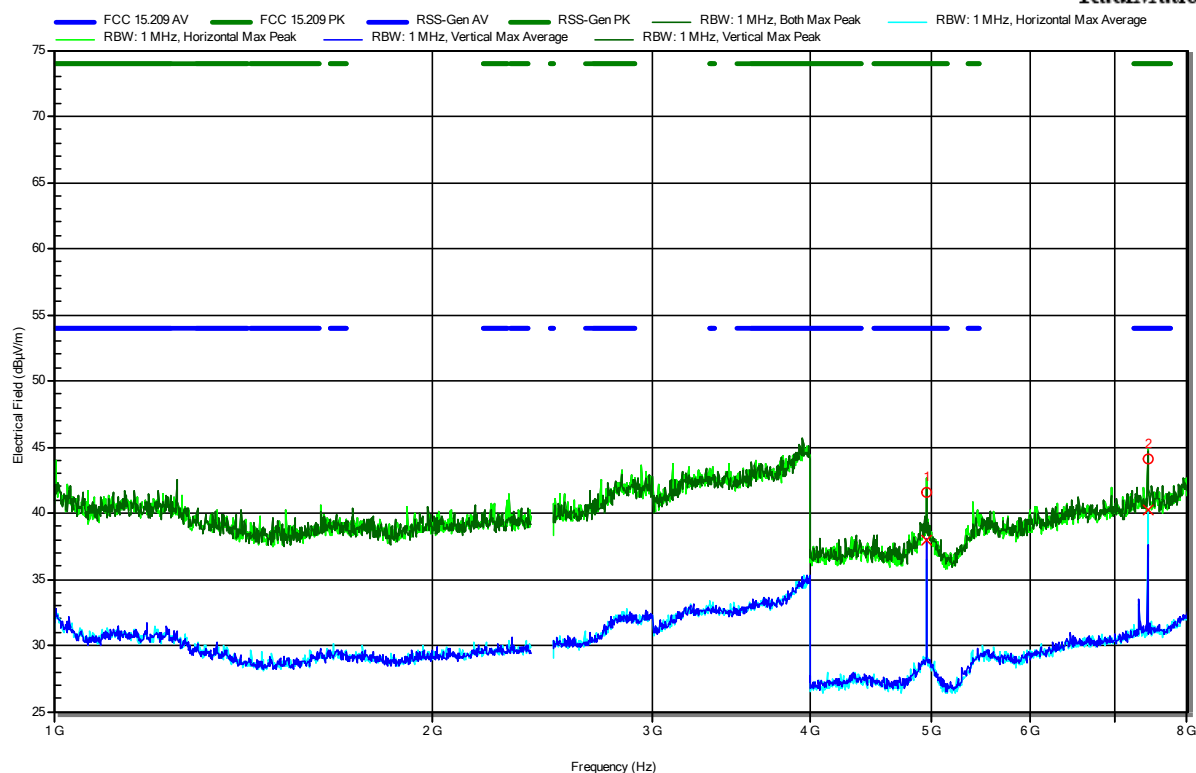

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
4.96 GHz	41.6 dBµV/m	74 dBµV/m	-32.4 dB	Pass	Vertical
7.44 GHz	44.07 dBµV/m	74 dBµV/m	-29.93 dB	Pass	Horizontal

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
4.96 GHz	38.01 dBµV/m	54 dBµV/m	-15.99 dB	Pass	Vertical
7.44 GHz	40.28 dBµV/m	54 dBµV/m	-13.72 dB	Pass	Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: lower bandedge; EUT horizontal

Index 47

RadiMation

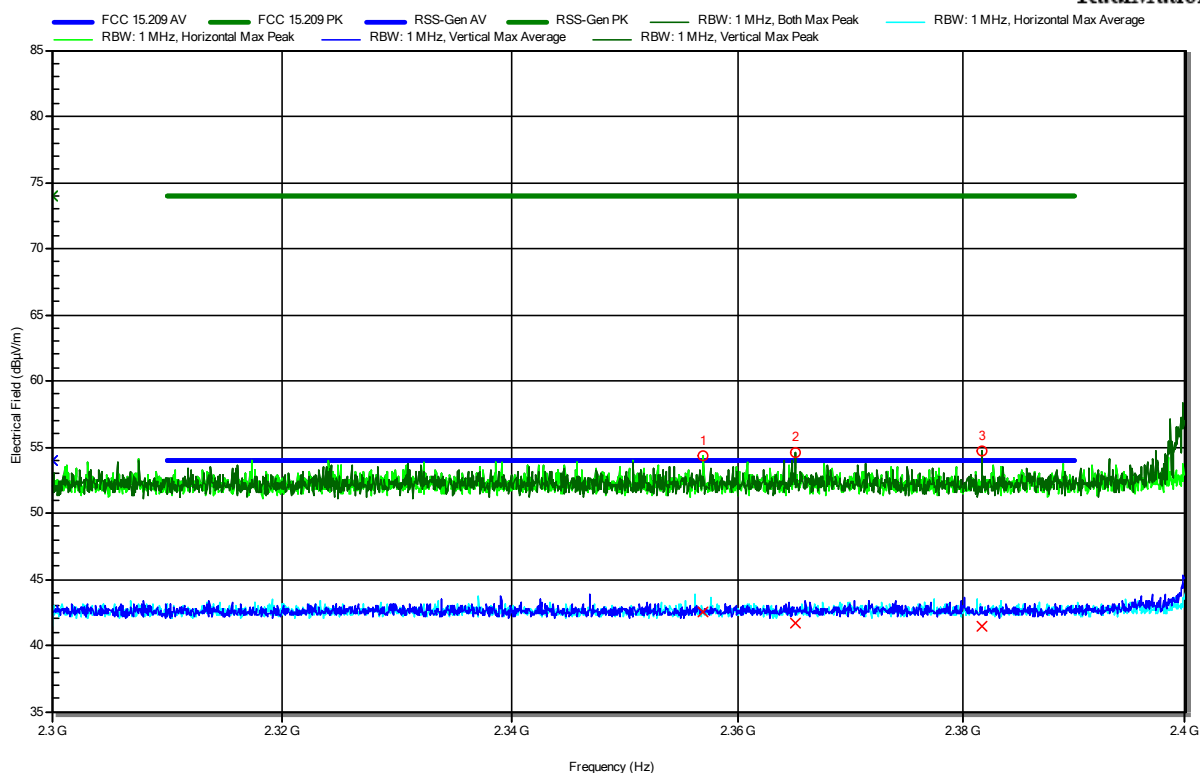

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.3569 GHz	54.32 dBµV/m	74 dBµV/m	-19.68 dB	Pass	Horizontal
2.3651 GHz	54.58 dBµV/m	74 dBµV/m	-19.42 dB	Pass	Vertical
2.3817 GHz	54.73 dBµV/m	74 dBµV/m	-19.27 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.3569 GHz	42.53 dBµV/m	54 dBµV/m	-11.47 dB	Pass	Horizontal
2.3651 GHz	41.68 dBµV/m	54 dBµV/m	-12.32 dB	Pass	Vertical
2.3817 GHz	41.41 dBµV/m	54 dBµV/m	-12.59 dB	Pass	Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120B
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: upper bandedge; EUT horizontal

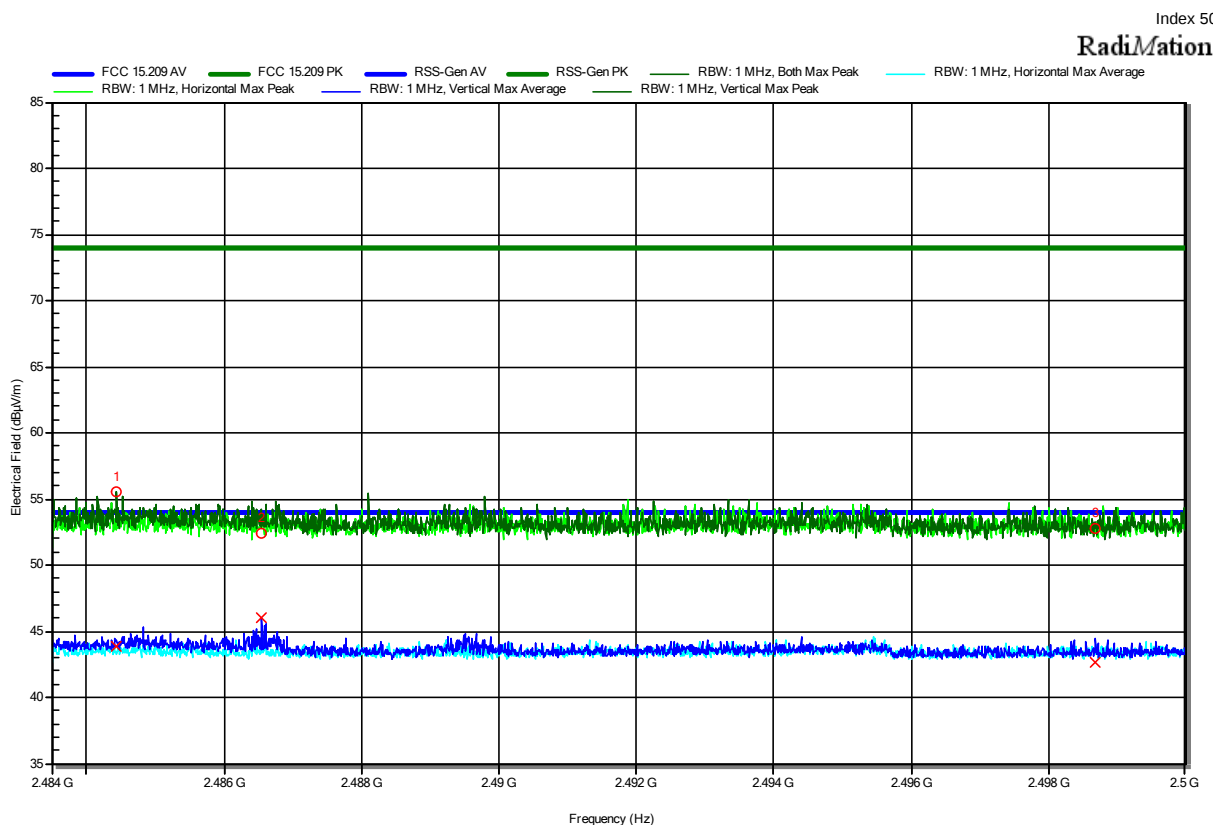

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
2.4844 GHz	55.54 dBµV/m	74 dBµV/m	-18.46 dB	Pass	Vertical
2.4865 GHz	52.38 dBµV/m	74 dBµV/m	-21.62 dB	Pass	Vertical
2.4987 GHz	52.8 dBµV/m	74 dBµV/m	-21.2 dB	Pass	Horizontal


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
2.4844 GHz	43.81 dBµV/m	54 dBµV/m	-10.19 dB	Pass	Vertical
2.4865 GHz	46.07 dBµV/m	54 dBµV/m	-7.93 dB	Pass	Vertical
2.4987 GHz	42.6 dBµV/m	54 dBµV/m	-11.4 dB	Pass	Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

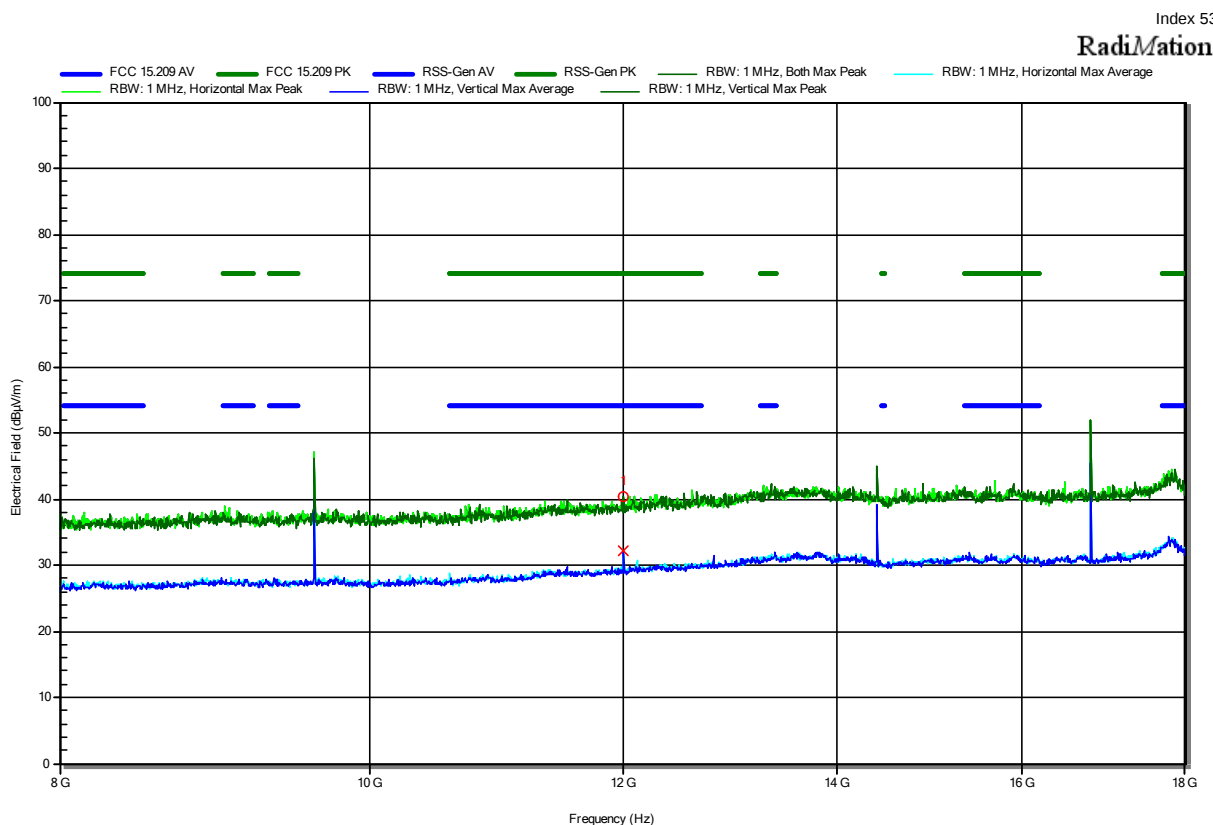

Frequency 12.011 GHz	Peak 40.43 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -33.57 dB	Peak Status Pass	Polarization Vertical
Frequency 12.011 GHz	Average 32.27 dBµV/m	Average Limit 54 dBµV/m	Average Difference -21.73 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 40 (2442 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 54

RadiMation

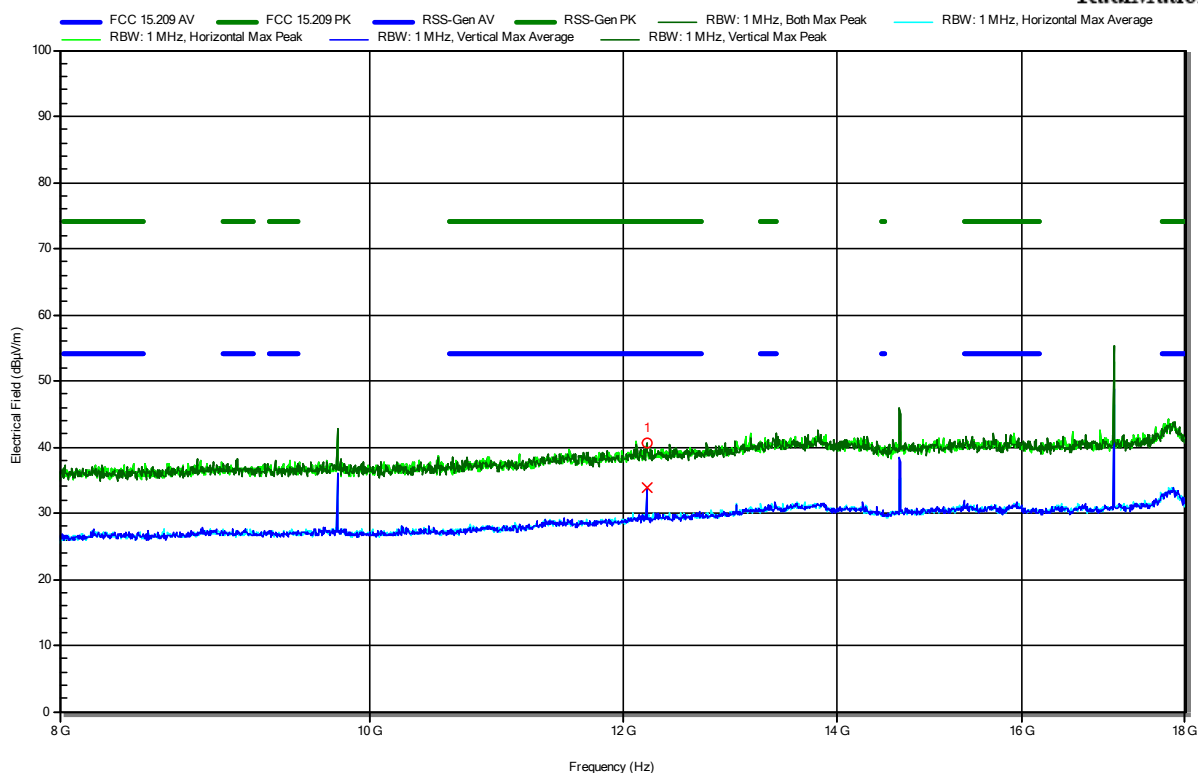


Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
12.211 GHz	40.65 dBµV/m	74 dBµV/m	-33.35 dB	Pass	Vertical
Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
12.211 GHz	33.96 dBµV/m	54 dBµV/m	-20.04 dB	Pass	Vertical

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 55

RadiMation

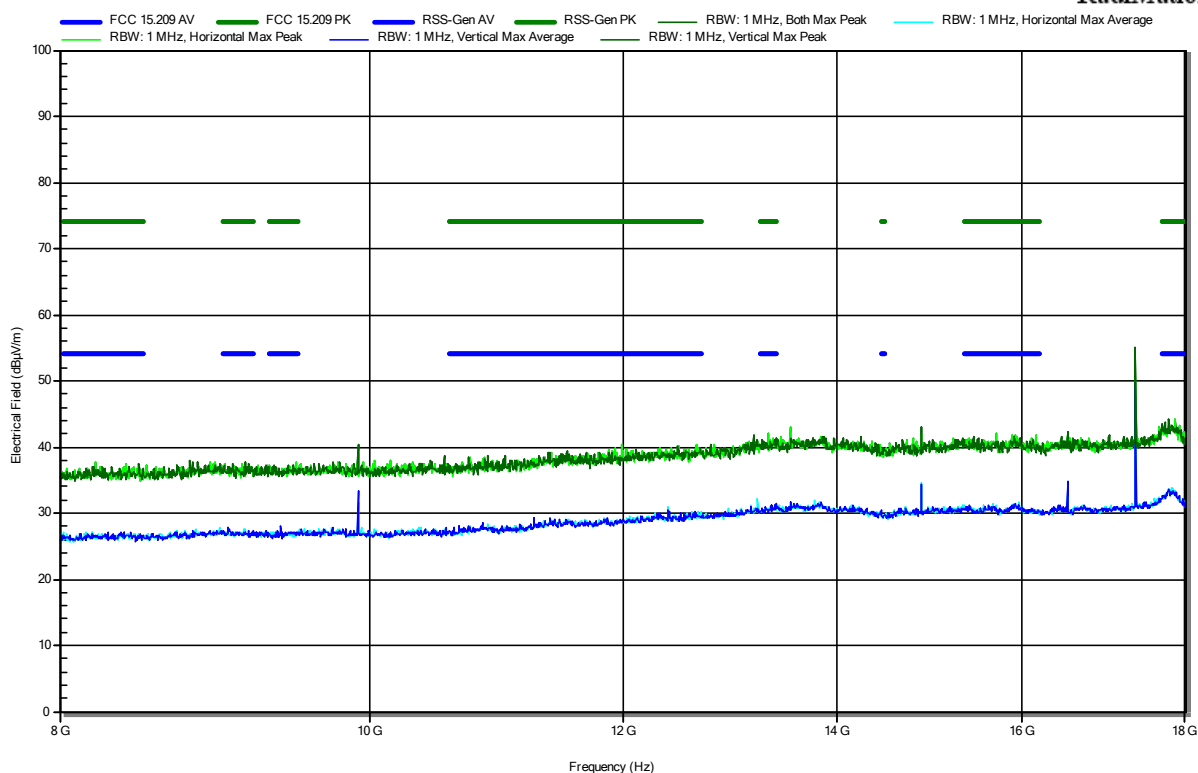


Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

Index 56

RadiMation

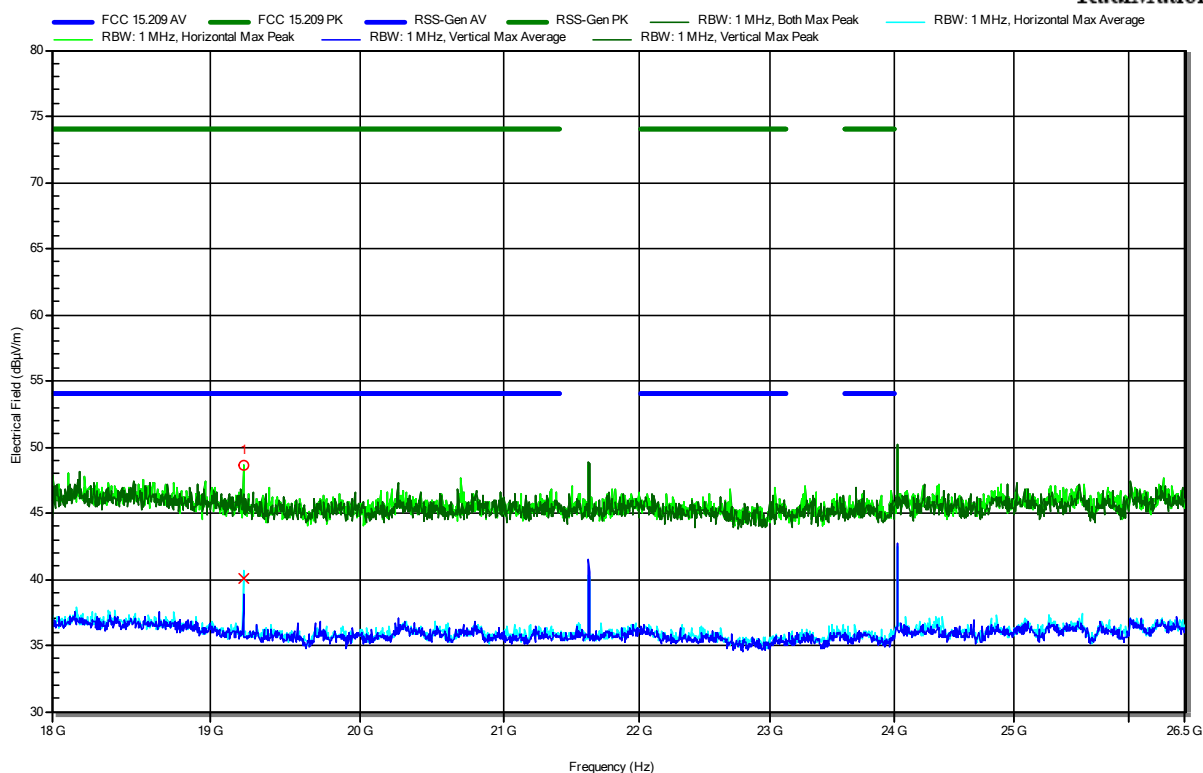


Frequency 19.217 GHz	Peak 48.58 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -25.42 dB	Peak Status Pass	Polarization Horizontal
Frequency 19.217 GHz	Average 40.1 dBµV/m	Average Limit 54 dBµV/m	Average Difference -13.9 dB	Average Status Pass	Polarization Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 0 (2402 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT vertical

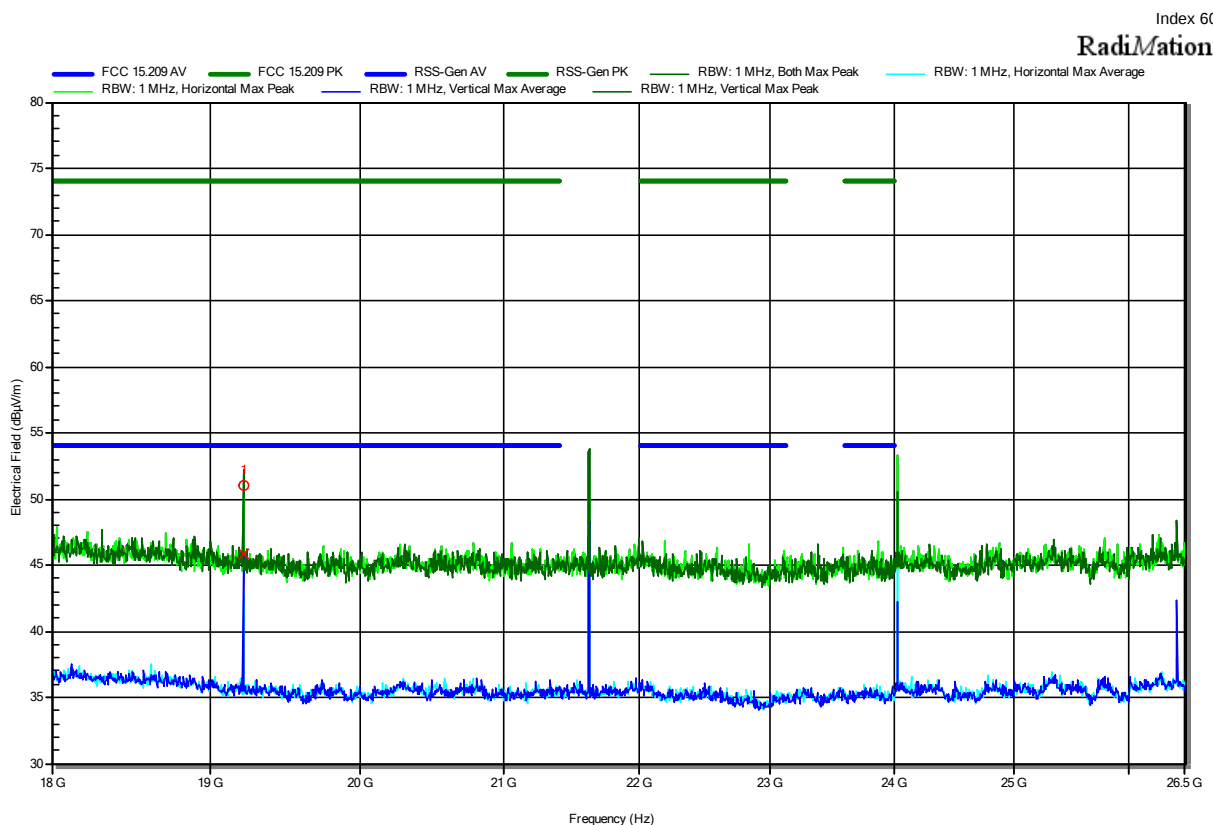


Frequency 19.215 GHz	Peak 51 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -23 dB	Peak Status Pass	Polarization Vertical
Frequency 19.215 GHz	Average 45.8 dBµV/m	Average Limit 54 dBµV/m	Average Difference -8.2 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 40 (2442 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

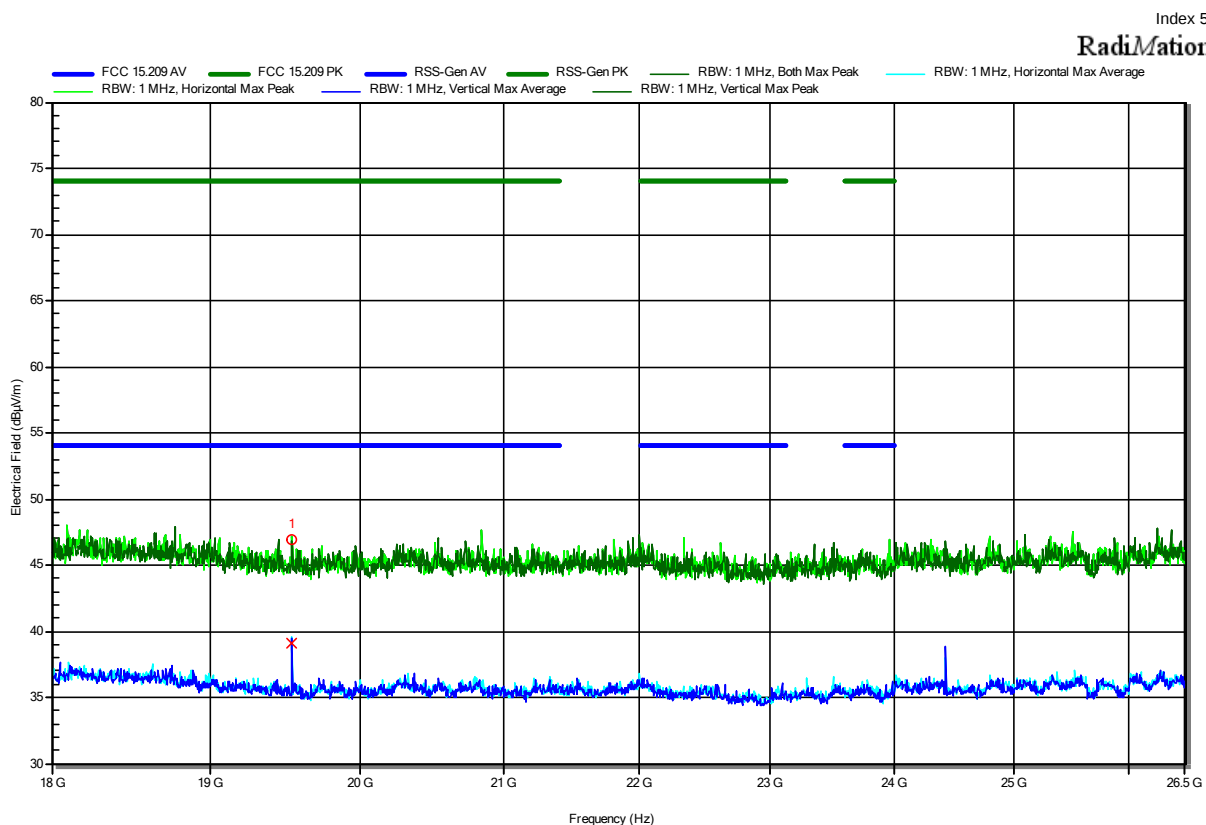


Frequency 19.535 GHz	Peak 46.89 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -27.11 dB	Peak Status Pass	Polarization Horizontal
Frequency 19.535 GHz	Average 39.15 dBµV/m	Average Limit 54 dBµV/m	Average Difference -14.85 dB	Average Status Pass	Polarization Horizontal

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 40 (2442 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT vertical

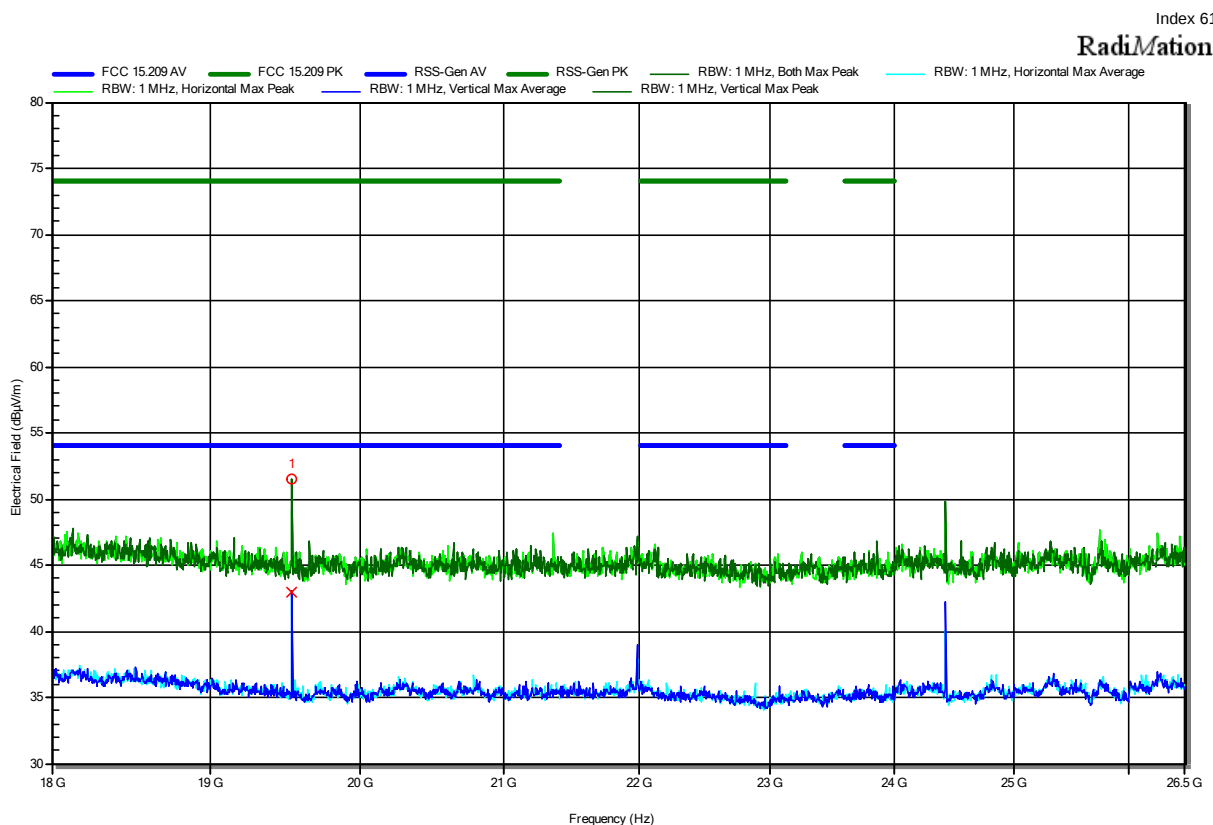


Frequency 19.537 GHz	Peak 51.46 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -22.54 dB	Peak Status Pass	Polarization Vertical
Frequency 19.537 GHz	Average 43 dBµV/m	Average Limit 54 dBµV/m	Average Difference -11 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT horizontal

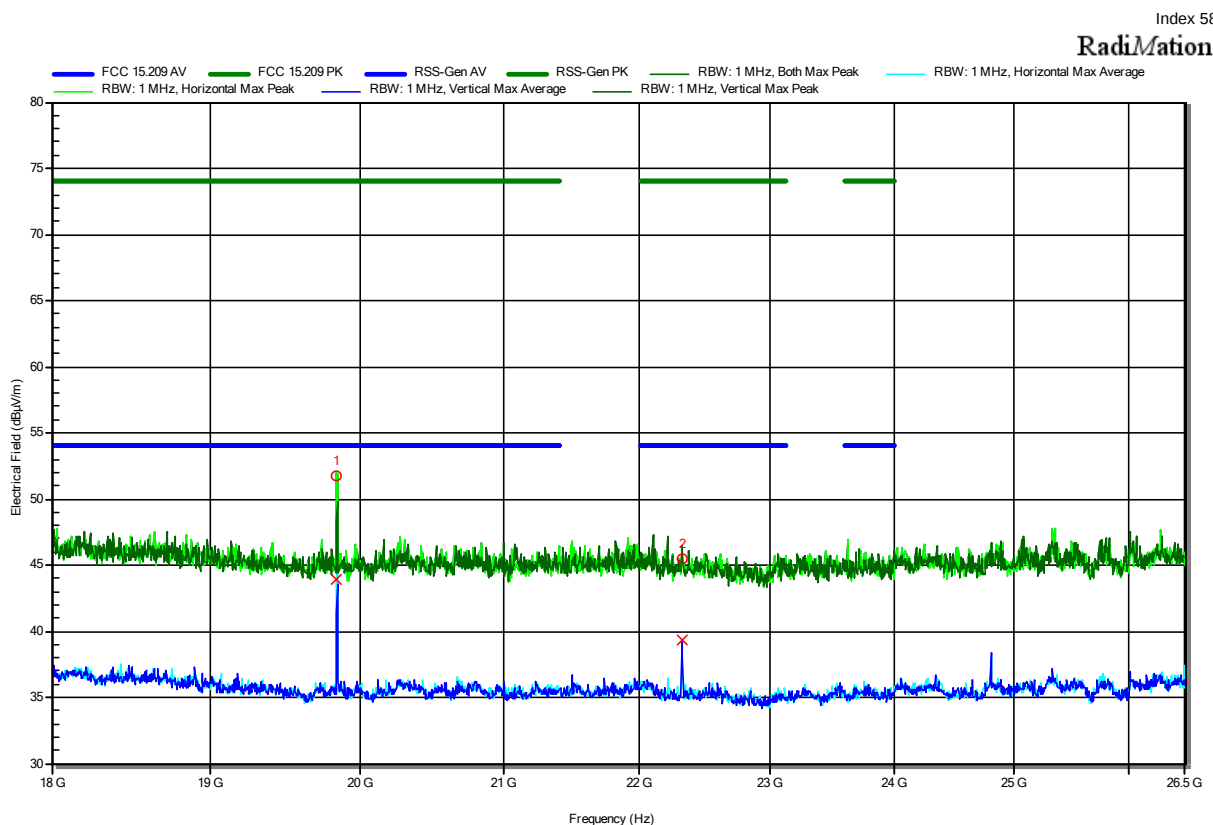

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
19.841 GHz	51.79 dBµV/m	74 dBµV/m	-22.21 dB	Pass	Horizontal
22.319 GHz	45.45 dBµV/m	74 dBµV/m	-28.55 dB	Pass	Vertical


Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
19.841 GHz	43.86 dBµV/m	54 dBµV/m	-10.14 dB	Pass	Horizontal
22.319 GHz	39.31 dBµV/m	54 dBµV/m	-14.69 dB	Pass	Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to 47 CFR Part 15.247, RSS-247, Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pudell
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 22 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Amplifier Research AT4560
 Measurement distance: 3 m
 Mode: Tx; LR-BT_CH 78 (2480 MHz)_GFSK_DH5_PRBS9_Pmax
 Test Date: 2022-09-30
 Note: EUT vertical

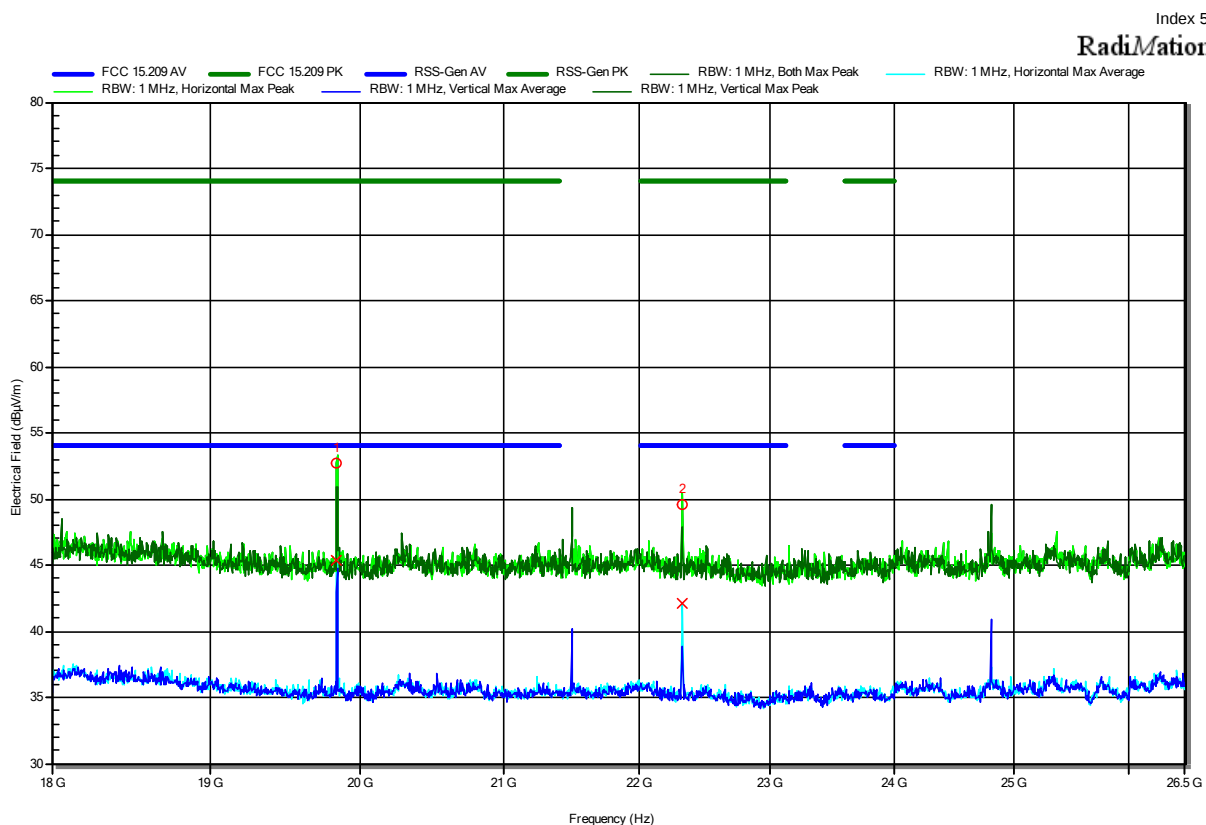

Frequency	Peak	Peak Limit	Peak Difference	Peak Status	Polarization
19.841 GHz	52.72 dBµV/m	74 dBµV/m	-21.28 dB	Pass	Horizontal
22.321 GHz	49.62 dBµV/m	74 dBµV/m	-24.38 dB	Pass	Horizontal

Frequency	Average	Average Limit	Average Difference	Average Status	Polarization
19.841 GHz	45.35 dBµV/m	54 dBµV/m	-8.65 dB	Pass	Horizontal
22.321 GHz	42.1 dBµV/m	54 dBµV/m	-11.9 dB	Pass	Horizontal


Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

ANNEX B Receiver spurious emissions

Radiated Spurious Emissions according to RSS-247 Issue 3


Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Rx; Bluetooth; scan mode
 Test Date: 2022-10-21
 Note: EUT horizontal

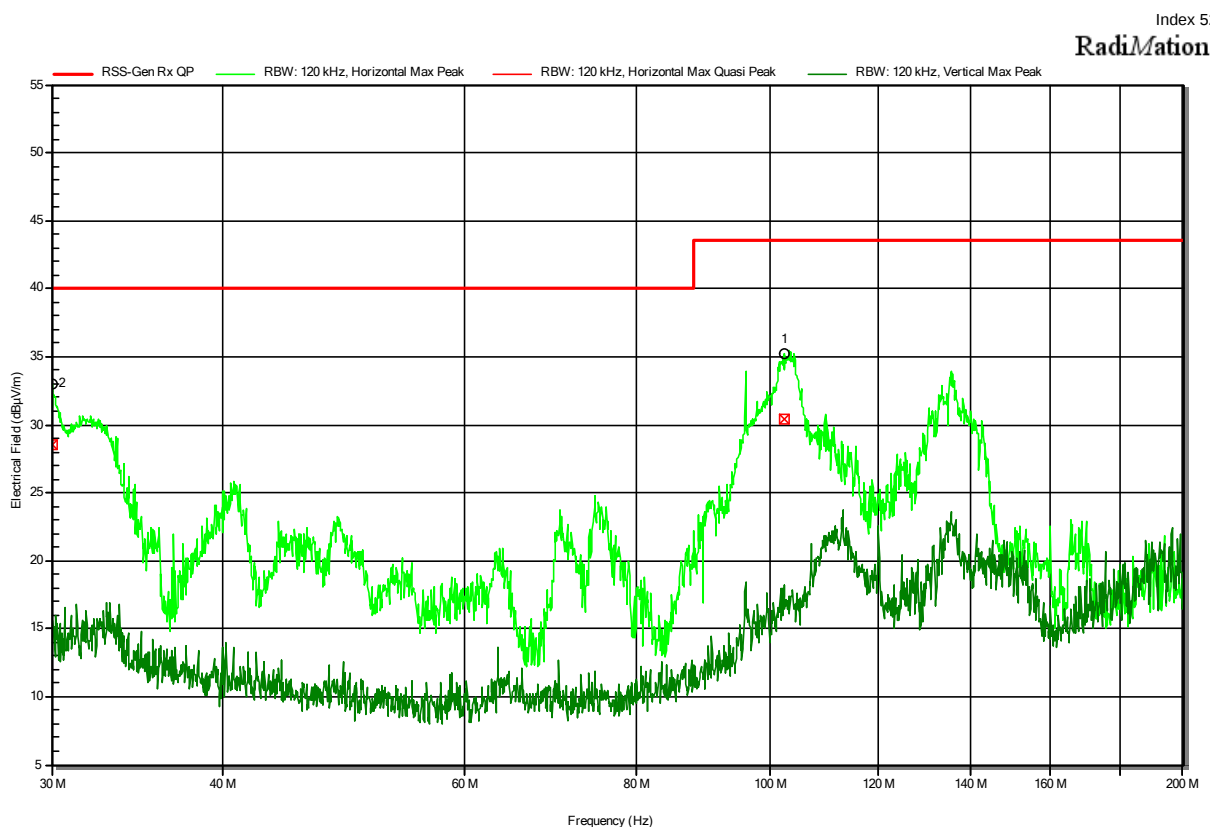

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
30.0467 MHz	28.5 dBµV/m	40 dBµV/m	-11.52 dB	Pass	Horizontal
102.403 MHz	30.5 dBµV/m	43.5 dBµV/m	-13.05 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247 Issue 3


Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HK 116
 Measurement distance: 3 m
 Mode: Rx; Bluetooth; scan mode
 Test Date: 2022-10-24
 Note: EUT horizontal2

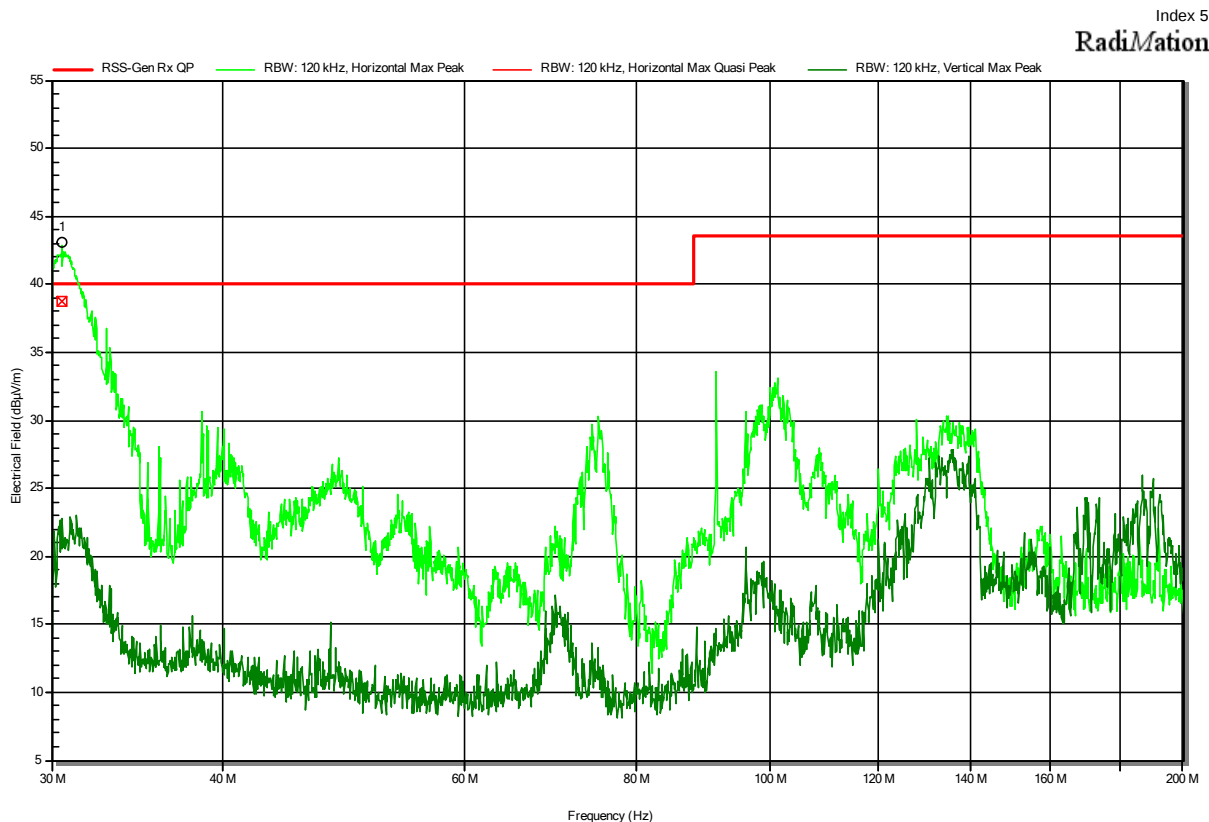

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
30.5558 MHz	38.8 dBµV/m	40 dBµV/m	-1.25 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247 Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Rohde & Schwarz HL 223
 Measurement distance: 3 m
 Mode: Rx; Bluetooth; scan mode
 Test Date: 2022-10-21
 Note: EUT vertical

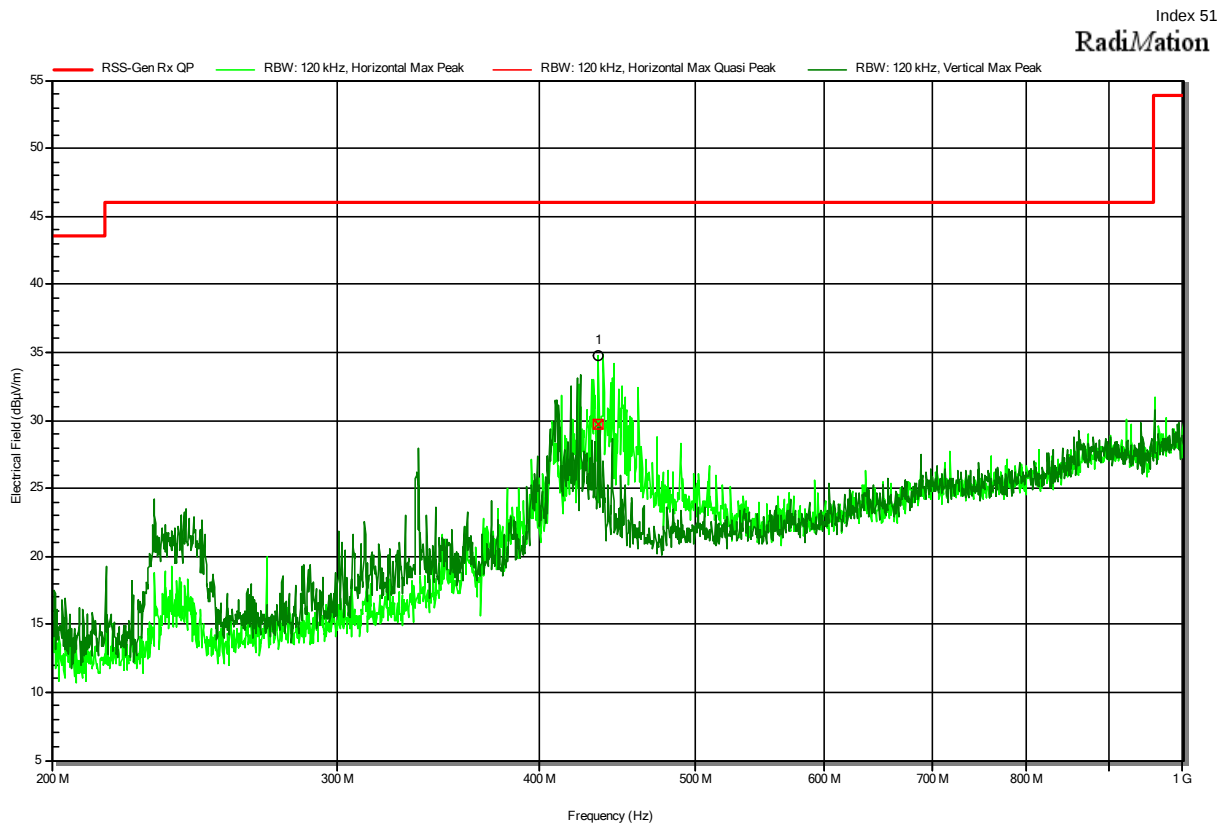


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Polarization
435.46 MHz	29.7 dBµV/m	46 dBµV/m	-16.29 dB	Pass	Horizontal

Radiated Spurious Emissions according to RSS-247 Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck BBHA 9120D
 Measurement distance: 3 m
 Mode: Rx; Bluetooth; scan mode
 Test Date: 2022-10-24
 Note: EUT vertical

Index 56

RadiMation

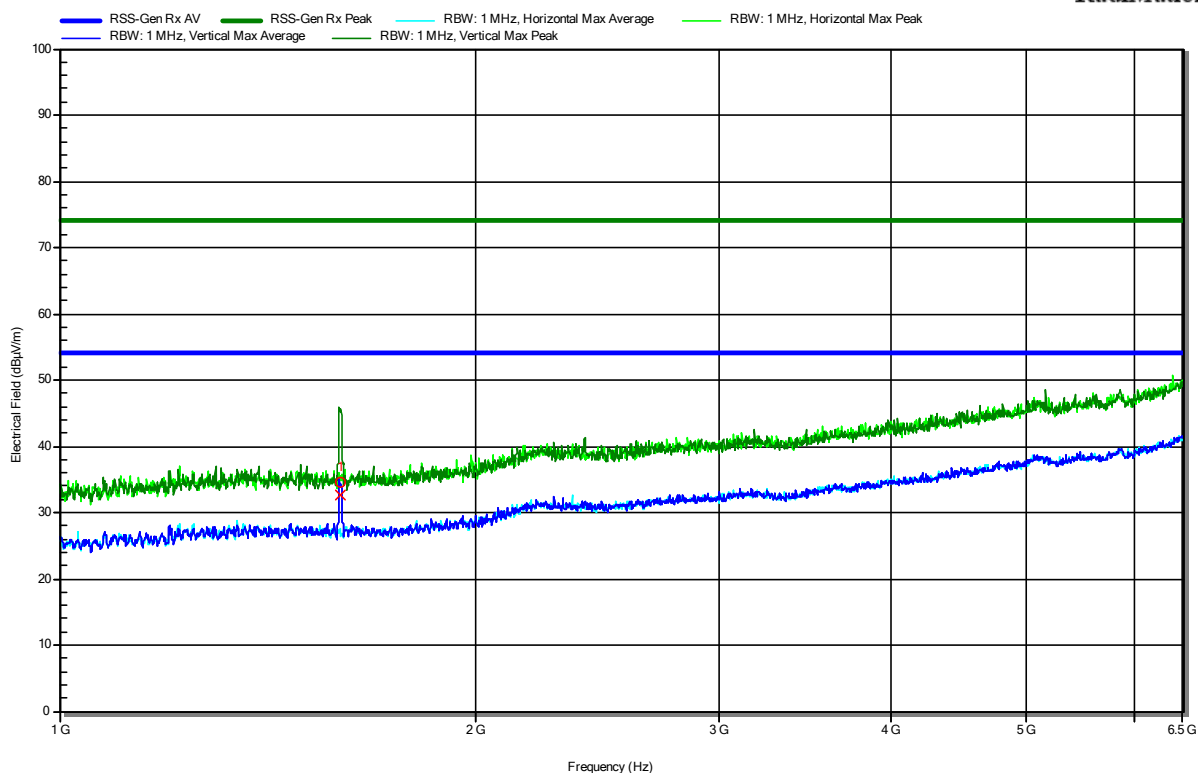

Frequency 1.596 GHz	Peak 34.46 dBµV/m	Peak Limit 74 dBµV/m	Peak Difference -39.54 dB	Peak Status Pass	Polarization Vertical
Frequency 1.596 GHz	Average 32.59 dBµV/m	Average Limit 53.98 dBµV/m	Average Difference -21.39 dB	Average Status Pass	Polarization Vertical

Test Report No.: G0M-2209-1656-TFC247BTLR-V03


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated Spurious Emissions according to RSS-247 Issue 3

Project Number: G0M-2209-1656
 Applicant: Leica Geosystems Technologies Pte Ltd
 Model Description: Field Controller Win EC7
 Model: CS20 Basic (Amber)
 Test Sample ID: 41411 (SN: 2495073)
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Voigt
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius, Vnom: 120V AC (intern 11.1 V DC)
 Antenna: Schwarzbeck HWRD 650
 Measurement distance: 3 m
 Mode: Rx; Bluetooth; scan mode
 Test Date: 2022-10-24
 Note: EUT vertical

Index 53

RadiMation

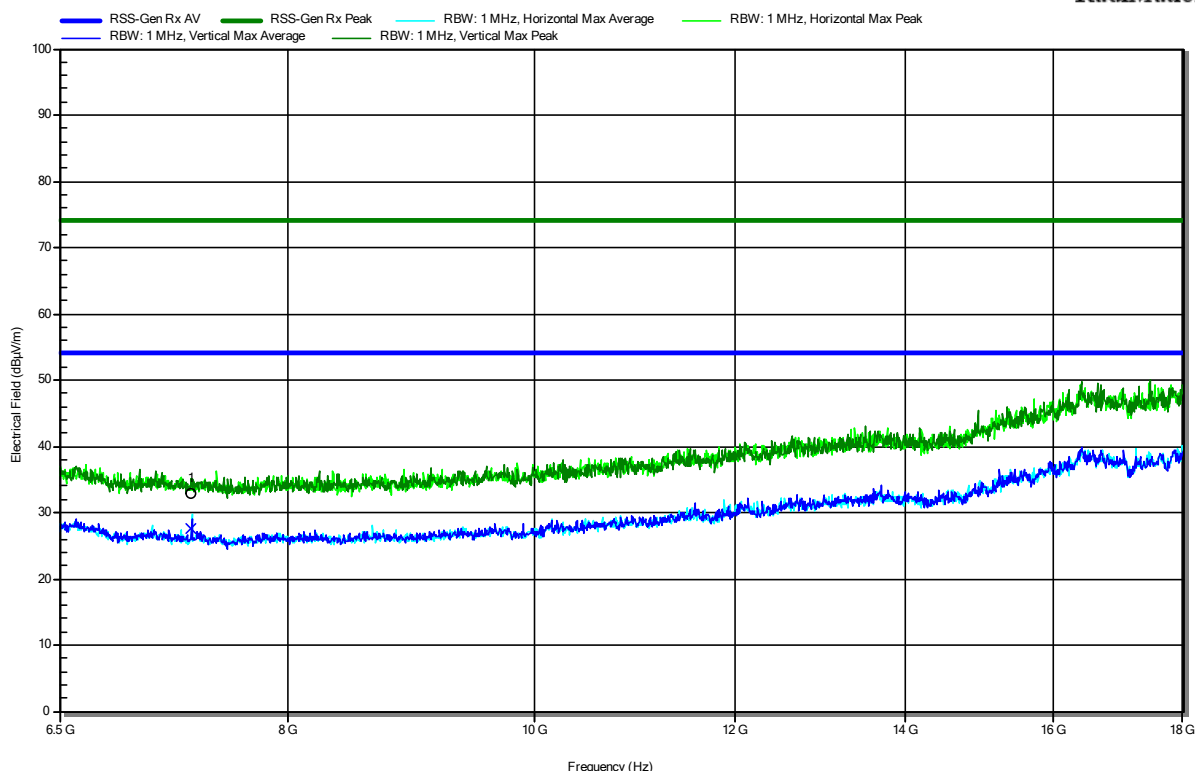

Frequency 7.326 GHz	Peak 32.8 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -41.2 dB	Peak Status Pass	Polarization Horizontal
Frequency 7.326 GHz	Average 27.47 dBμV/m	Average Limit 53.98 dBμV/m	Average Difference -26.51 dB	Average Status Pass	Polarization Horizontal

== END OF TEST REPORT ==

Test Report No.: G0M-2209-1656-TFC247BTLR-V03

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany