



ShenZhen Huaxinwei communication technology
Co.,Ltd.

Antenna test report

Customer Name: XunRui

Project Name: S6068R

Designer: Zhang Jun


Date: 2024/08/04



The customer name		XunRui	Project Name	S6068R
NO.	project	Detailed above		
1	spectrum	GSM850/900/1800/1900+WCDMA-B1/2/5/8+LTE-B1/2/3/4/5/7/8/12/17/19/20/26/28/66/38/40/41+GPS/WIFI/BT		
2	Project type	The mobile phone		
3	Antenna space area			
4	Feed point type			
5	The sensitivity			
6	Type of antenna			
7	The length of the PCB board			
8	note	Debugging prototype		
RF		Zhang Jun	13430515055	hxw_xiaozhang@126.com

1、Test system and test equipment


System Brand: MVG(SATIMO) measurement features: gain • pattern beamwidth cross polarization resolution sidelobe level 3D cavity reflectance at any polarization cavity reflectance (line or arc) antenna efficiency TRP, TIS, EIRP and EIS. Frequency band: StarLab 6 GHZ - 650 MHZ to 6 GHZ

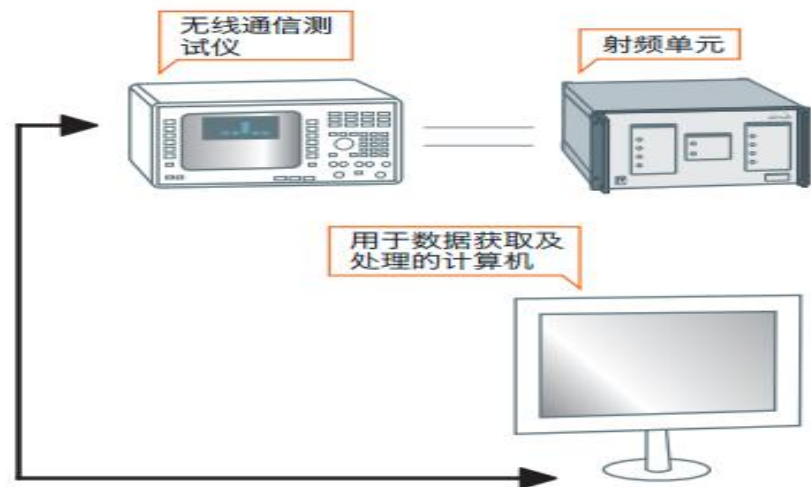

TIS预计测量时间 (一个信道每隔30° 取样)

灵敏度算法 \ 标准	GSM GPRS EDGE	CDMA 1 x RTT 1 x EvDO	WCDMA HSDPA LTE FDD/TDD	Wi-Fi 802.11 a/b/g/n	CTIA 批准方法
RSSI模式+线性化+TIS补偿	8 min		10 min		是
EIS模式+TIS补偿		5 min		5 min	是 ²
快速CDMA		8 min			No
EIRP模式+TIS补偿				10 min	No

1、根据RTC
2、根据协议

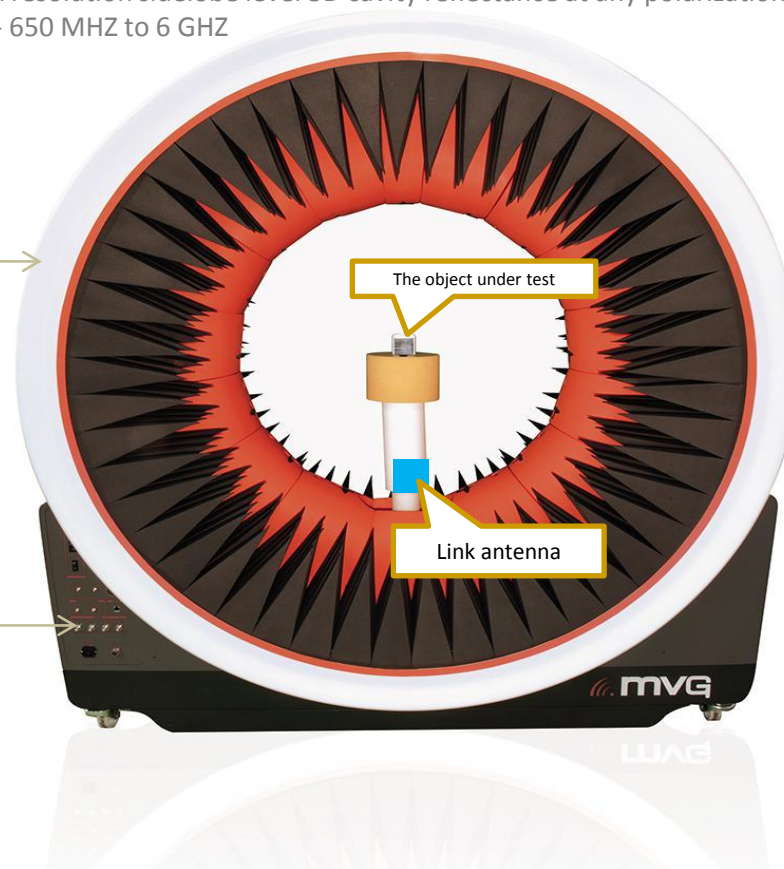


TIS 3D方位切割强度图



TRP 3D方位切割强度图

Test Equipment

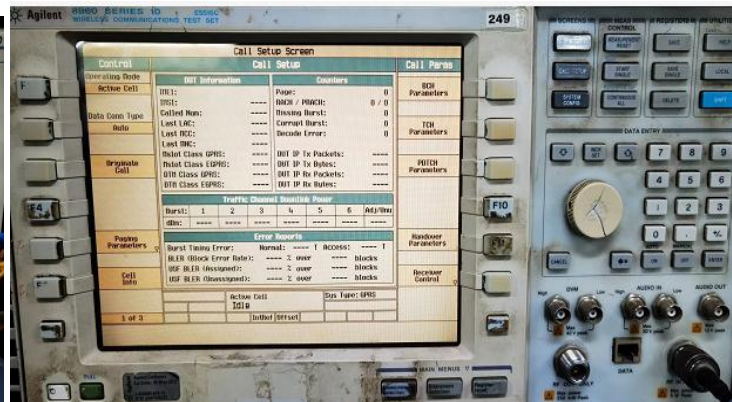


Efficient (2G+3G+4G+2. 4G-WiFi /BT)


PEAK GAIN			
2G:	Frequency range	Effi %	Gaim dBi
GSM850	824~894Mhz	21.80	-0.71
GSM900	880~960Mhz	20.84	-1.05
DCS1800	1710~1880Mhz	28.62	0.63
PCS1900	1850~1990Mhz	30.81	0.81
3G:			
W1	1920~2170Mhz	37.45	0.91
W2	1850~1990Mhz	30.81	0.81
W5	824~894Mhz	21.80	-0.71
W8	880~960Mhz	20.84	-1.05
4G:			
LTE-B1	1920~2170Mhz	37.45	0.91
LTE-B2	1850~1990Mhz	30.81	0.81
LTE-B3	1710~1880Mhz	28.62	0.63
LTE-B4	1710~2155Mhz	31.07	0.92
LTE-B5	824~894Mhz	21.80	-0.71
LTE-B7	2500~2690Mhz	28.01	1.12
LTE-B8	880~960Mhz	20.84	-1.05
LTE-B12	698~746Mhz	19.03	-1.42
LTE-B17	704~746Mhz	19.04	-1.42
LTE-B19	830~890Mhz	21.80	-0.71
LTE-B20	791~862Mhz	20.84	-0.71
LTE-B26	819~889Mhz	20.84	-0.71
LTE-B28	708~798Mhz	19.05	-1.42
LTE-B66	1710~2170Mhz	31.08	0.92
LTE-B38	2570~2620Mhz	28.03	1.12
LTE-B40	2300~2400Mhz	29.21	1.14
LTE-B41	2500~2690Mhz	28.03	1.12
5G-WIFI	5150~5250Mhz	37.81	1.81
	5725~5850Mhz	37.16	1.91
2. 4G-WIFI	2400~2500Mhz	42.52	1.37
BT	2400~2500Mhz	42.51	1.37
GPS	1575Mhz	38.73	0.43

Efficient (698–798MHz)


710.000MHz

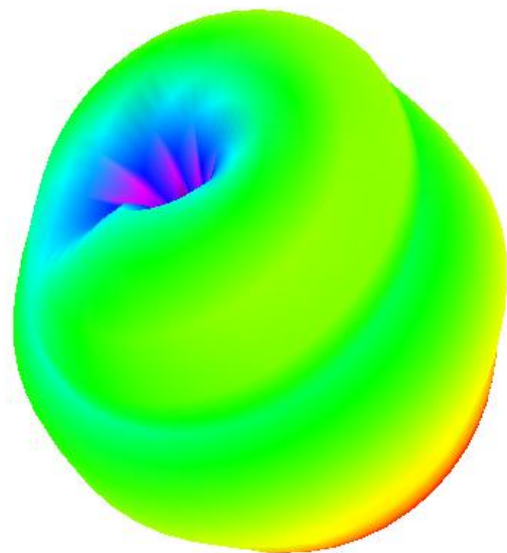


710.000MHz H

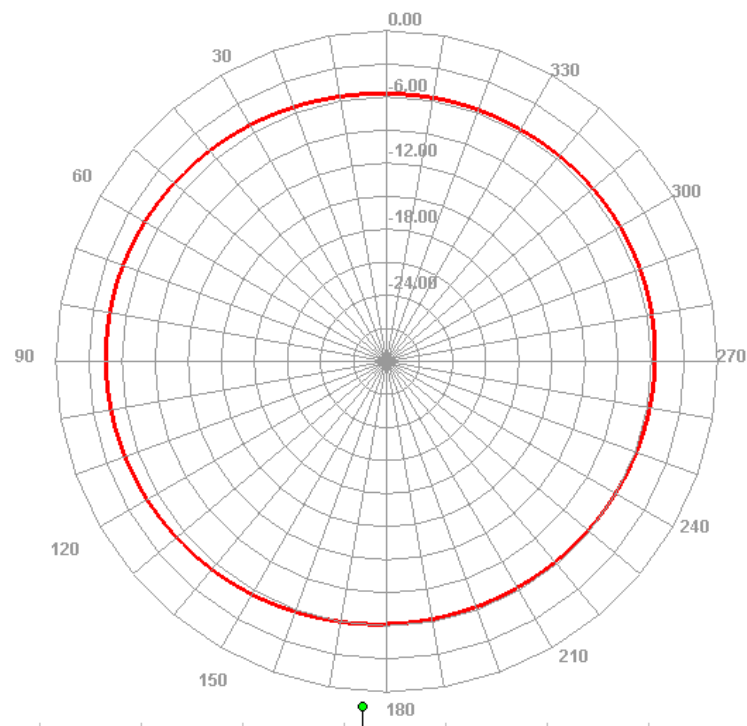

710.000MHz E1

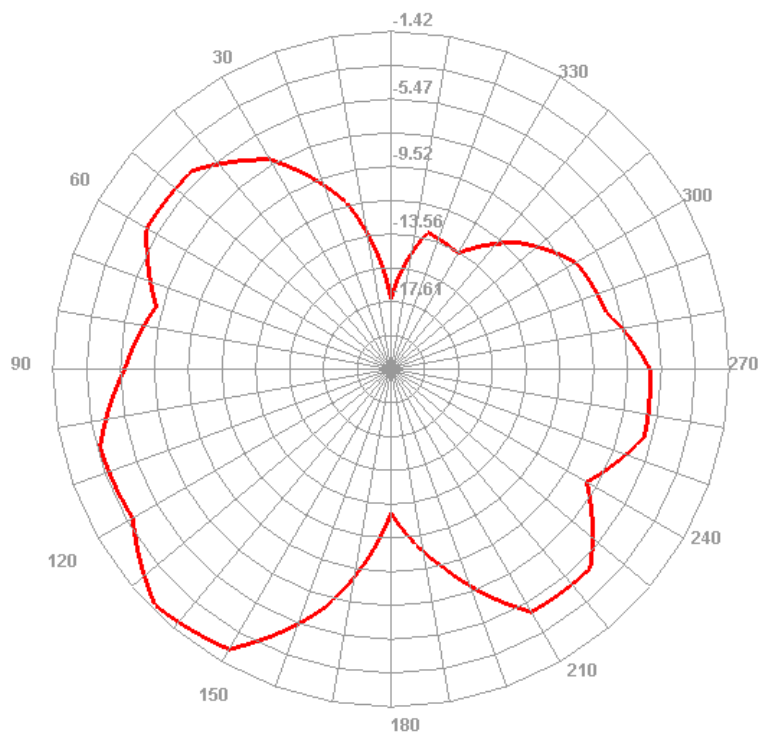


710.000MHz E2

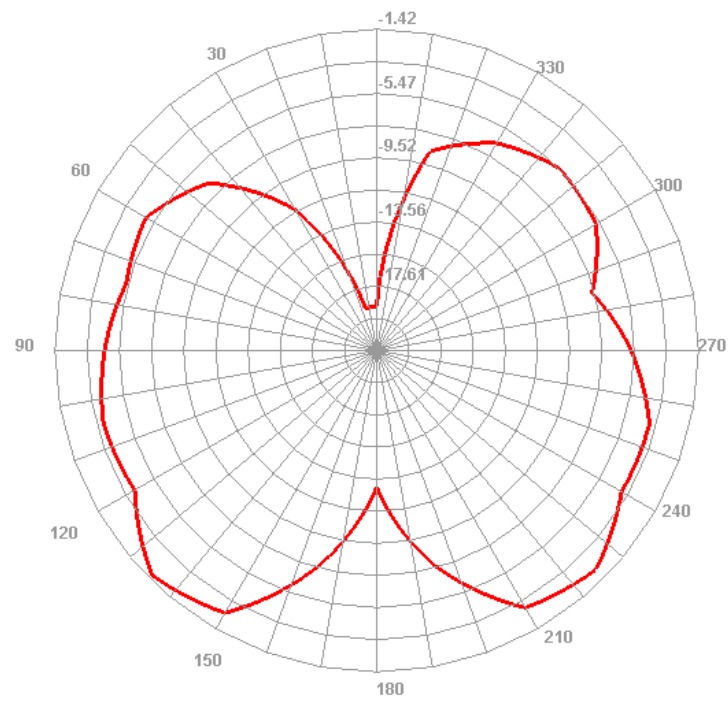


Efficient (791-894MHz)


830.000MHz

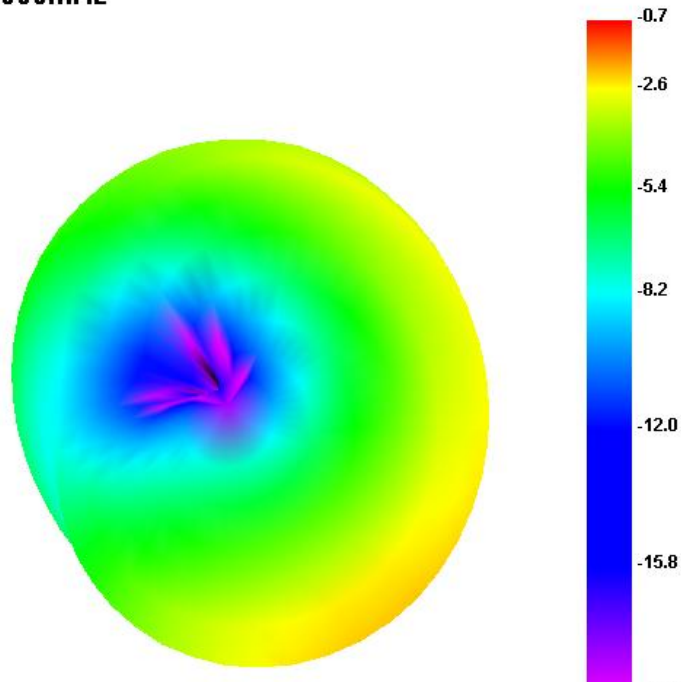


830.000MHz H

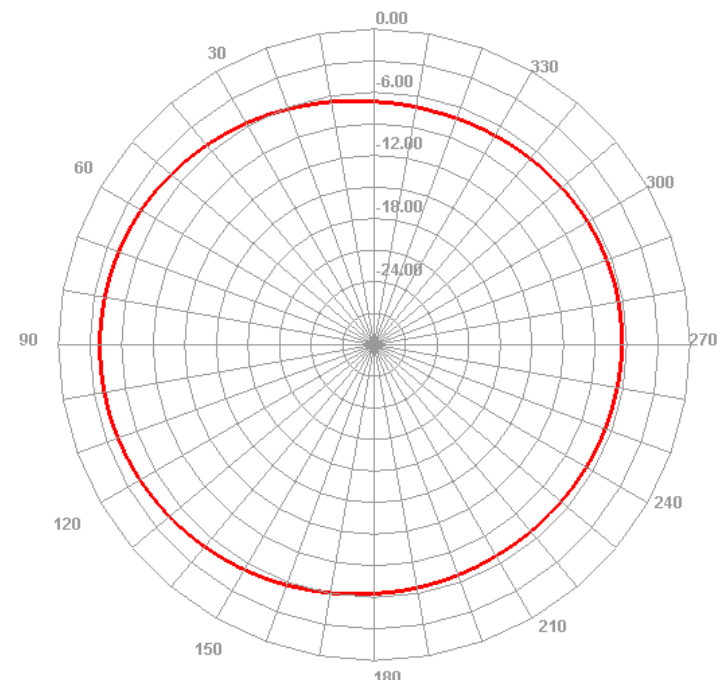

830.000MHz E1

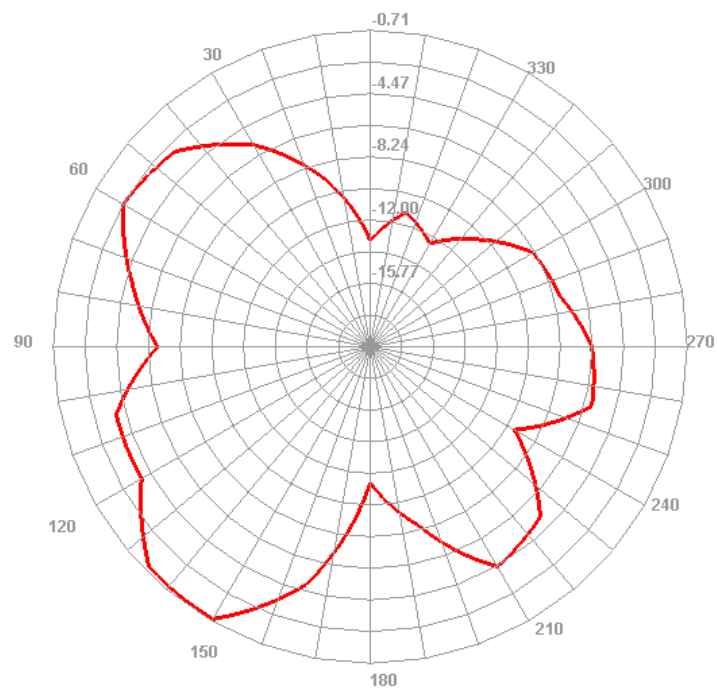


830.000MHz E2

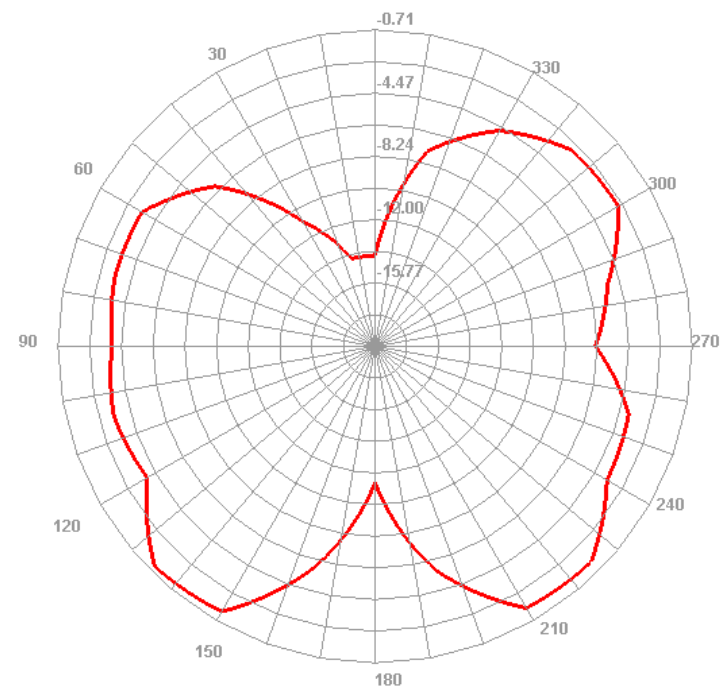


Efficient (880–960MHz)


900.000MHz

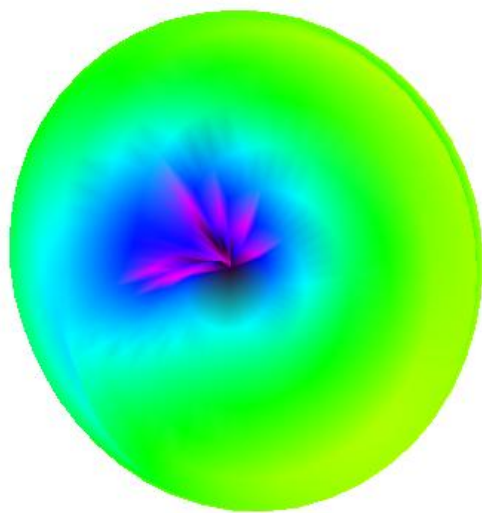


900.000MHz H

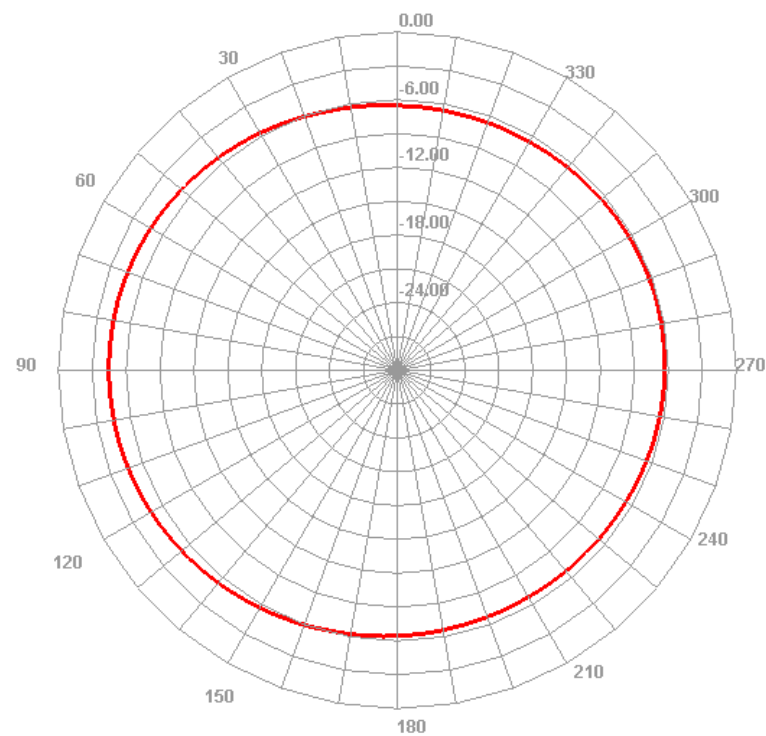

900.000MHz E1

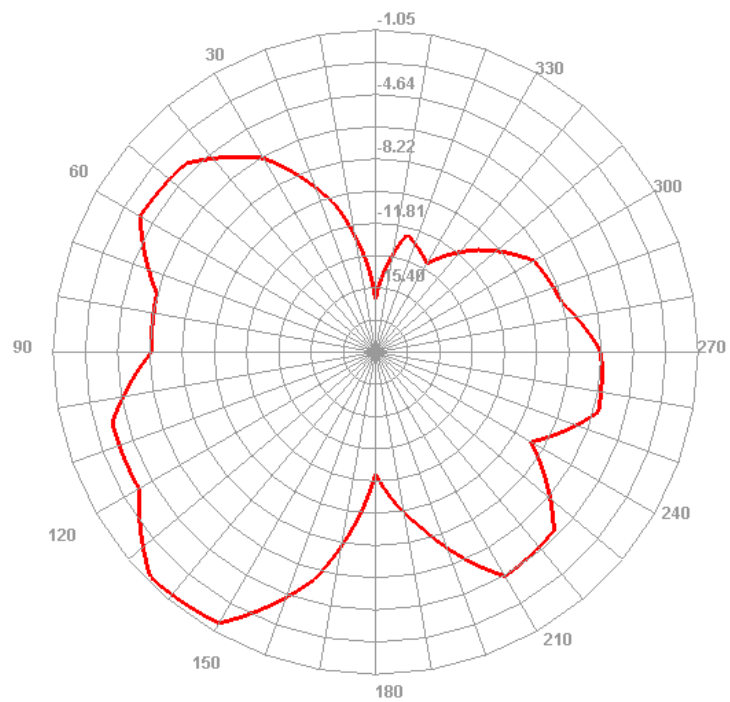


900.000MHz E2

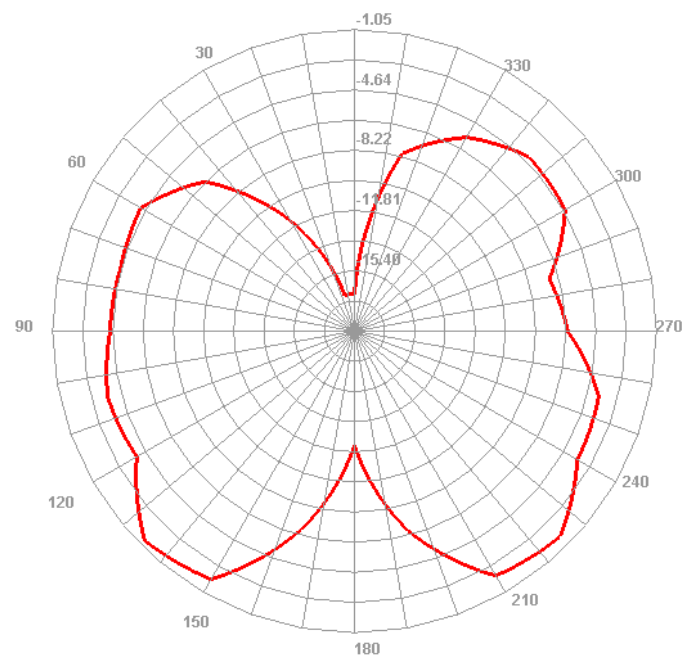


Efficient (1710–1880MHz)


1820.000MHz

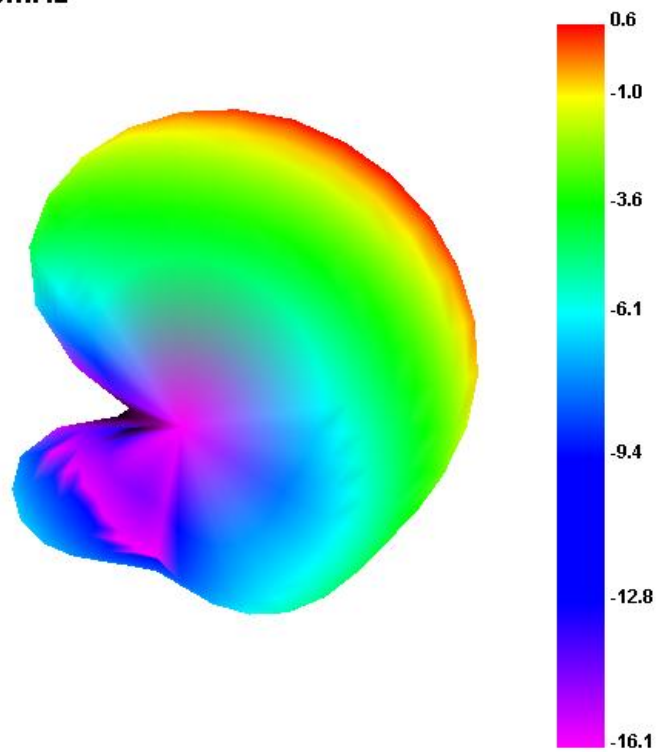


1820.000MHz H

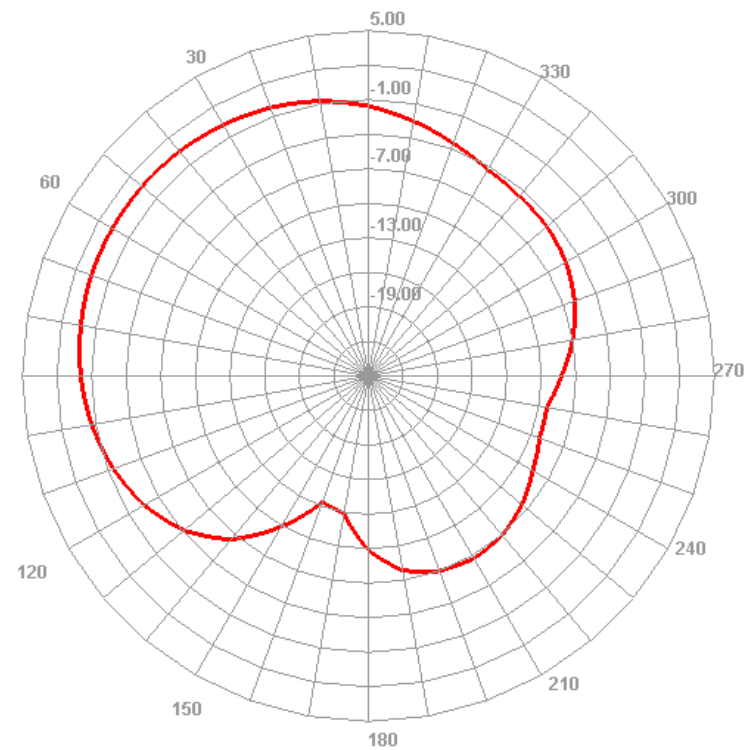

1820.000MHz E1

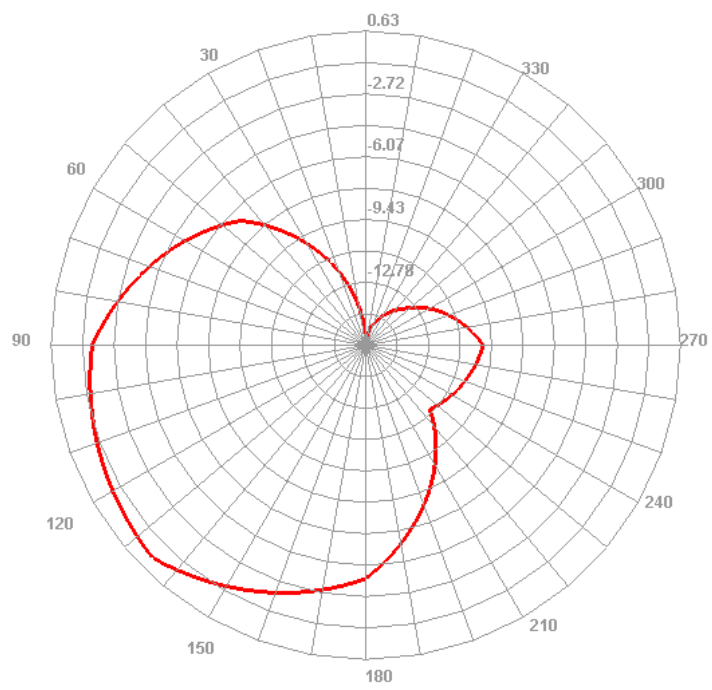


1820.000MHz E2

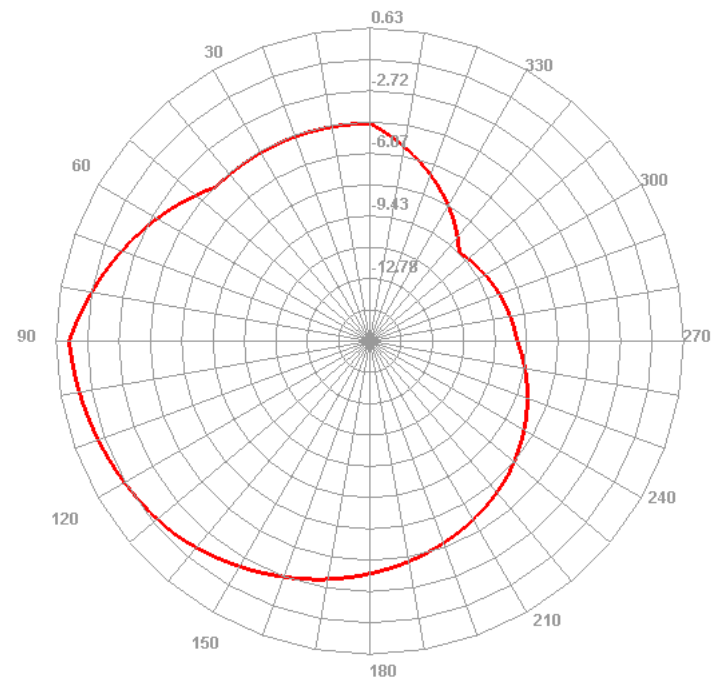


Efficient (1710–1990MHz)



1920.000MHz

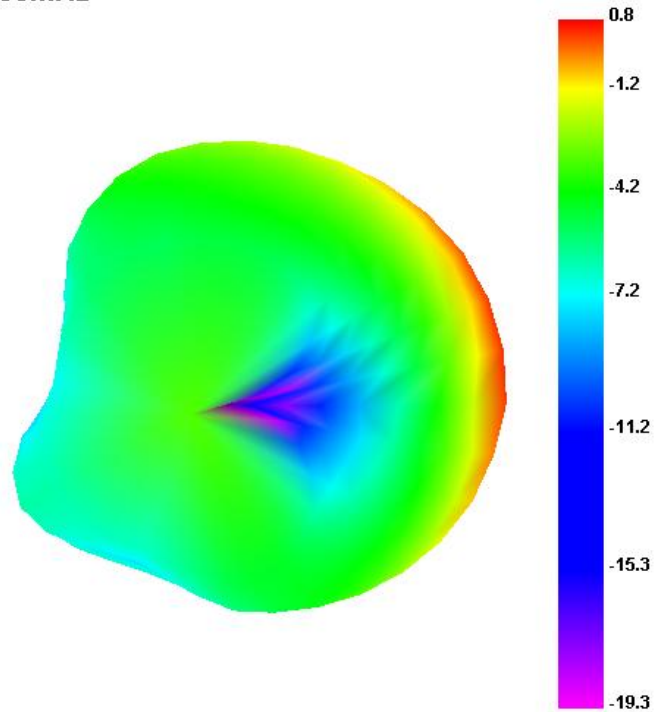

1920.000MHz H

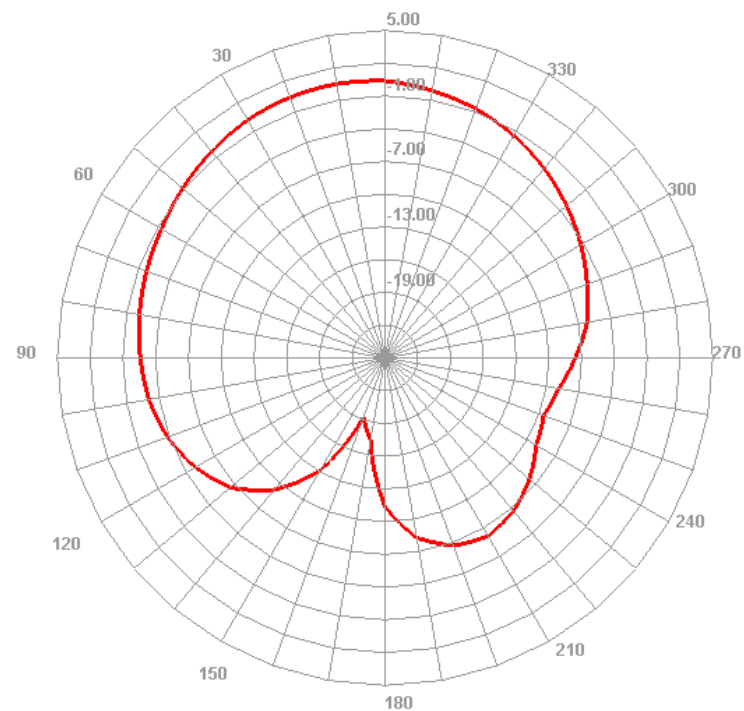


1920.000MHz E1

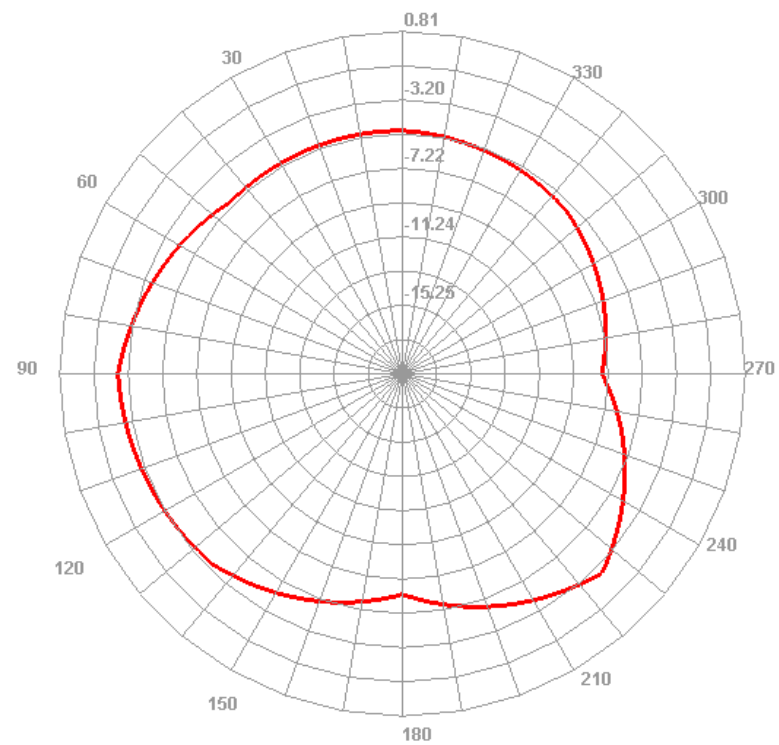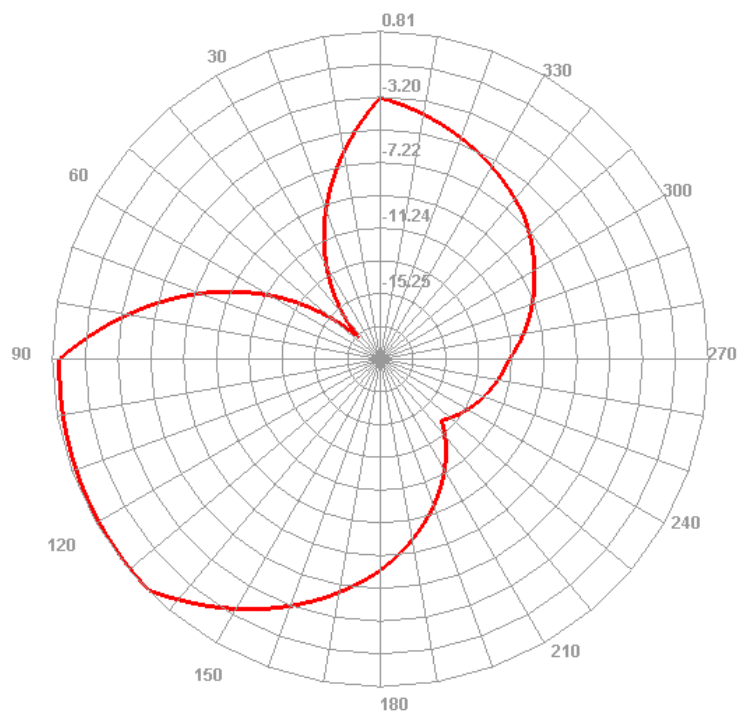


Efficient (1920-2170MHz)


2010.000MHz

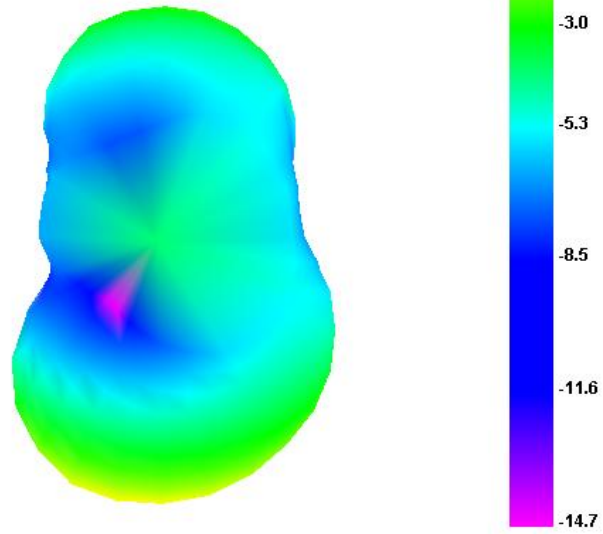


2010.000MHz H

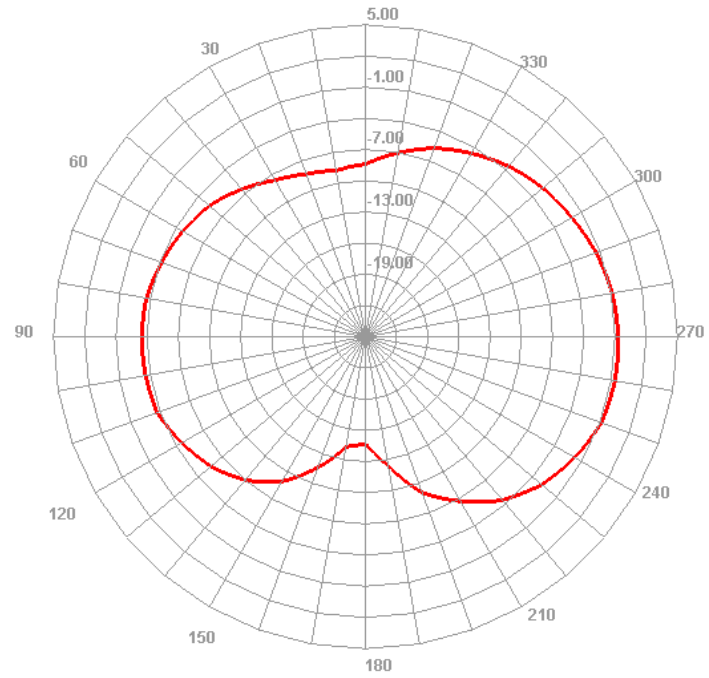

2010.000MHz E1

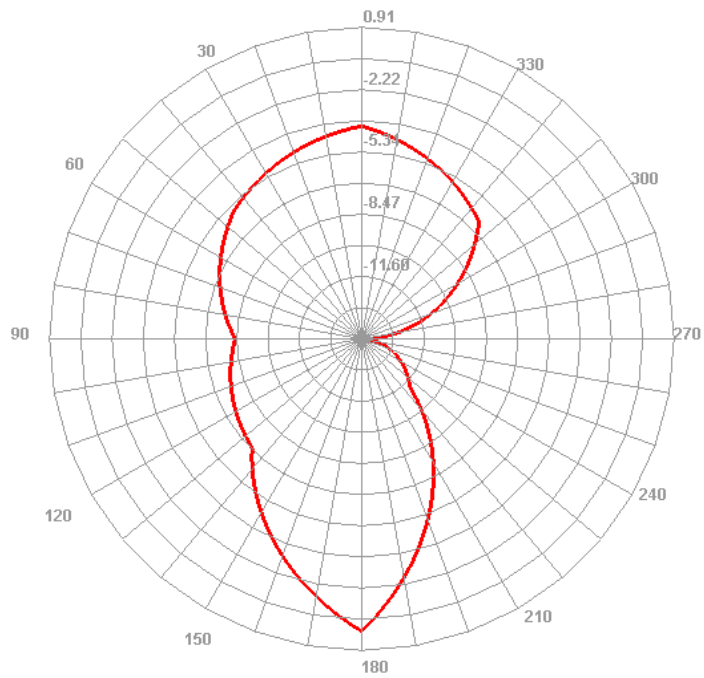


2010.000MHz E2

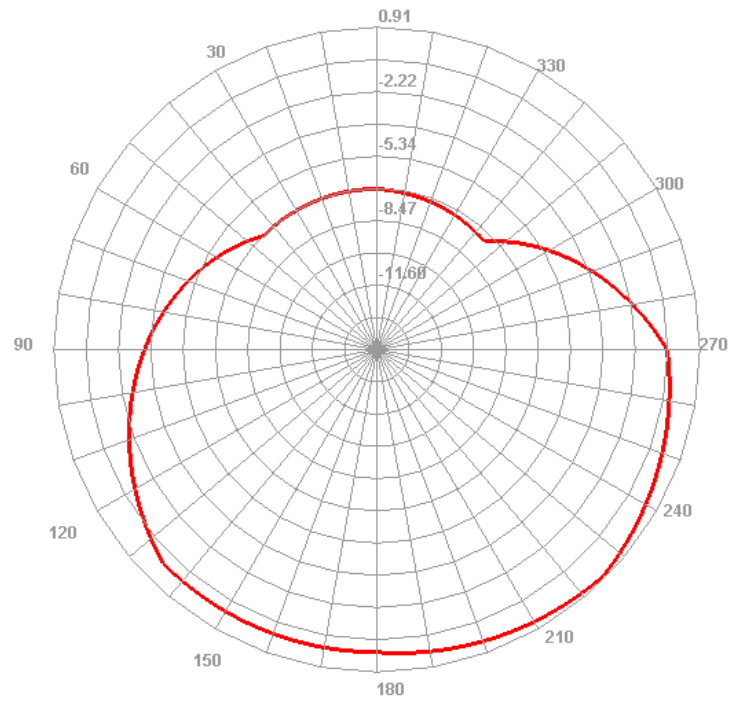


Efficient (2300–2400MHz)


2370.000MHz

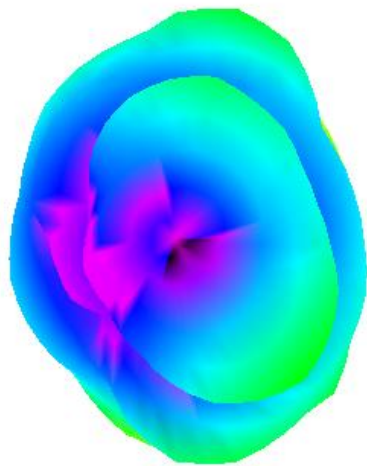


2370.000MHz H

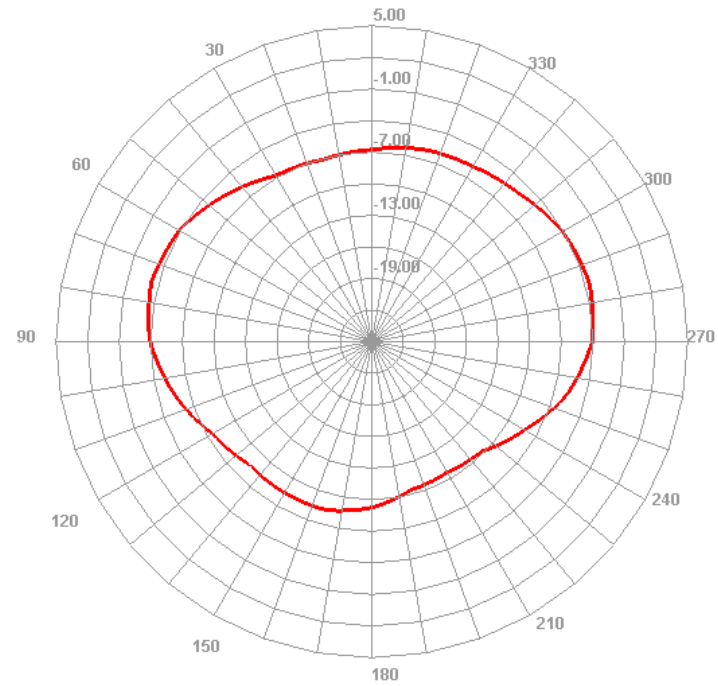

2370.000MHz E1


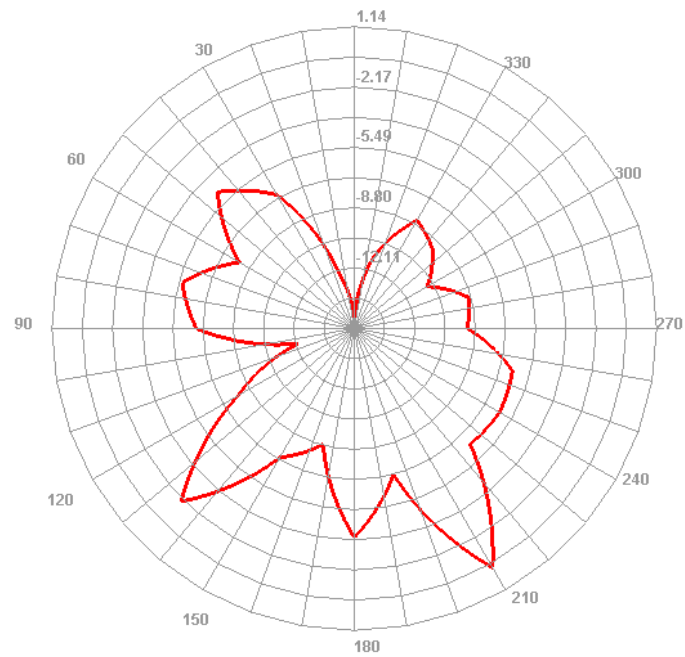


2370.000MHz E2

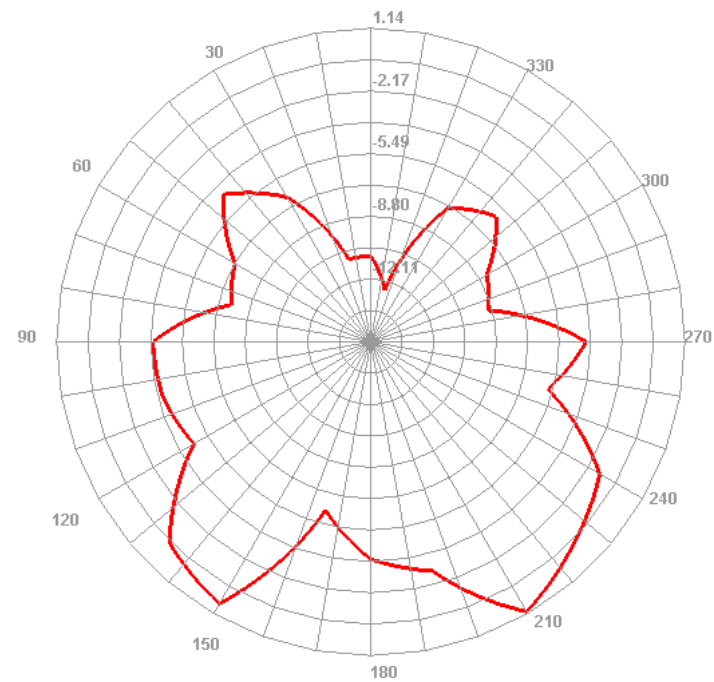


Efficient (2500–2690MHz)


2660.000MHz

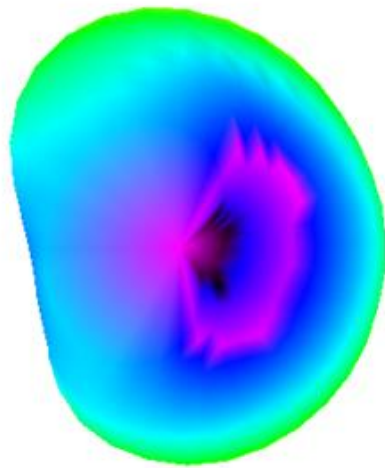


2660.000MHz H

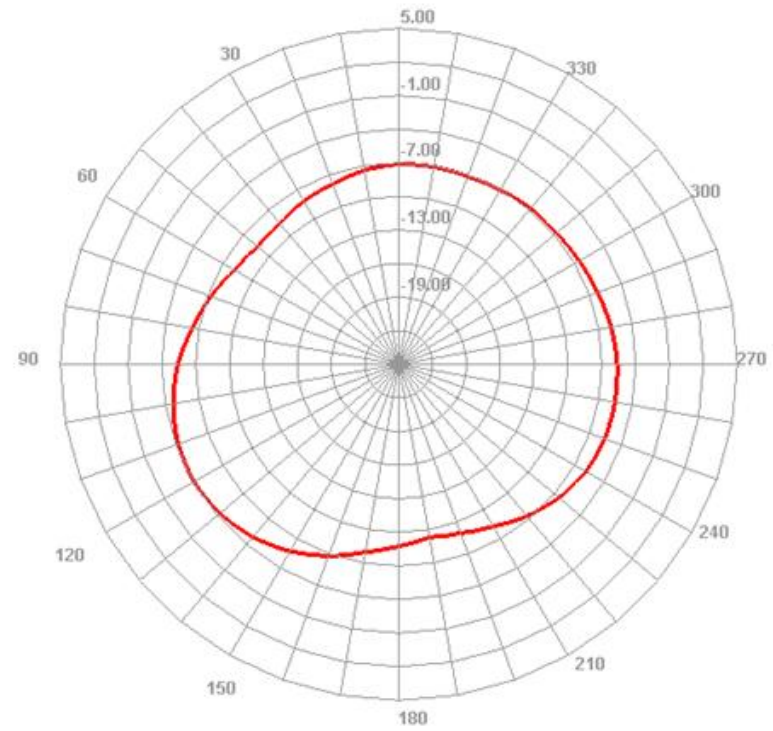

2660.000MHz E1

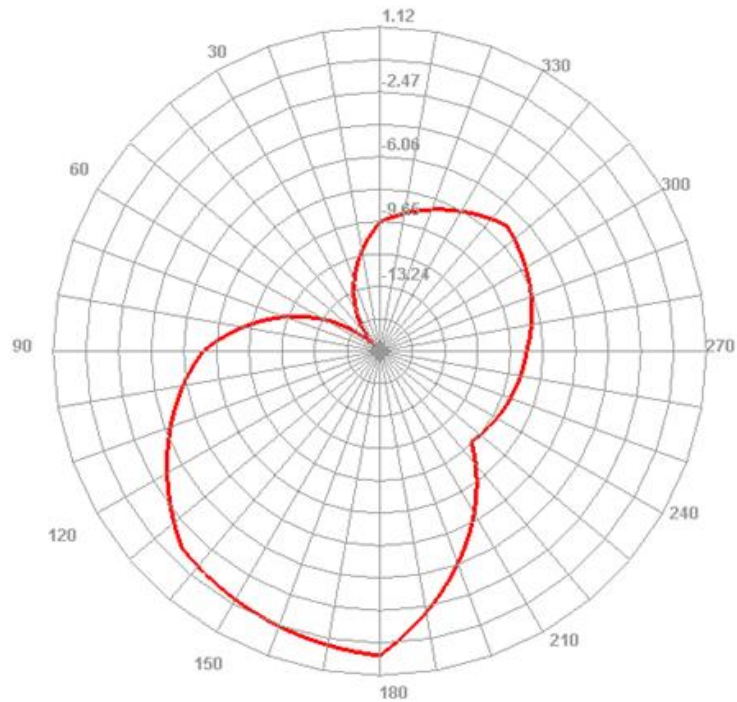


2660.000MHz E2

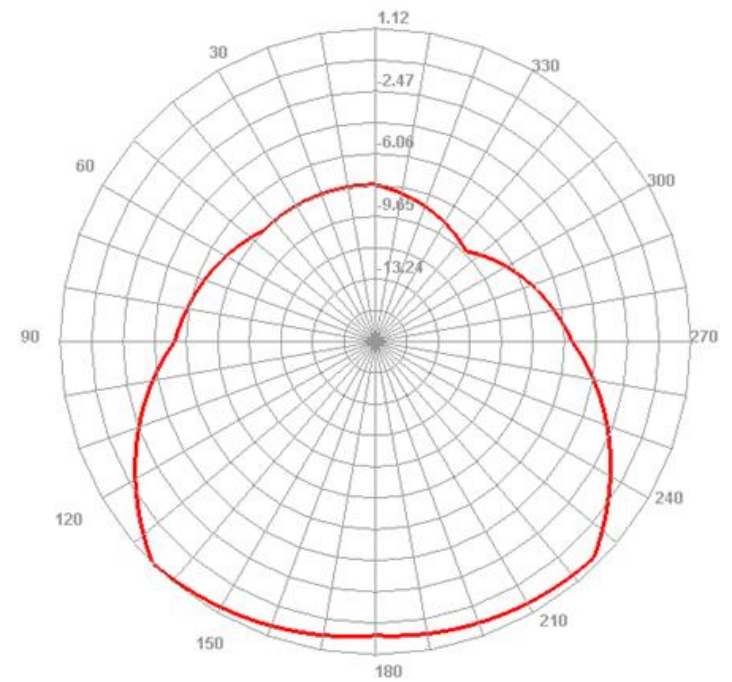


Efficient (2. 4G-WIFI/BT 2400-2500MHz)


2450.000MHz

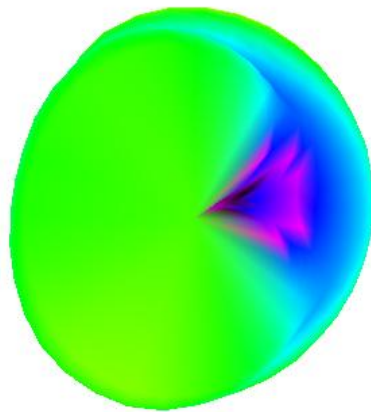


2450.000MHz H

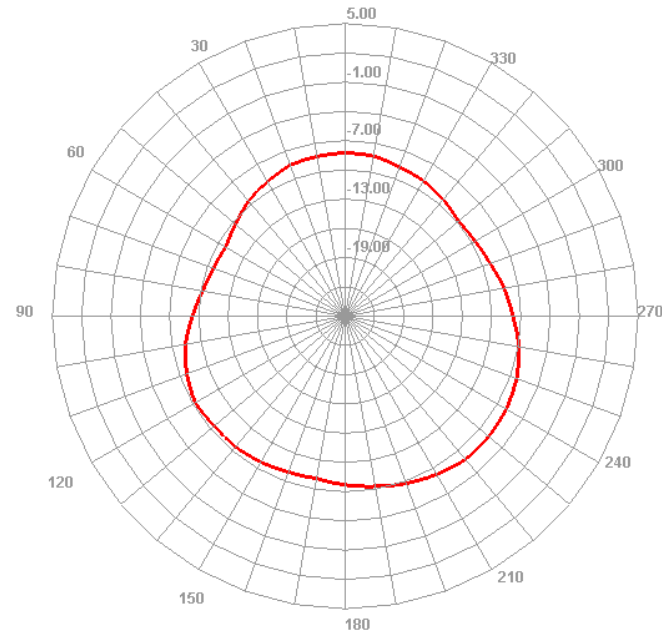

2450.000MHz E1

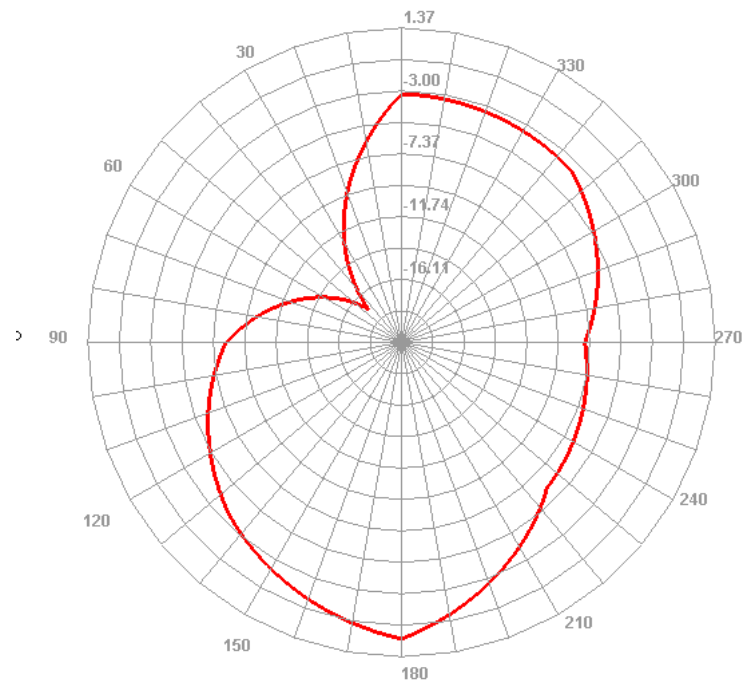


2450.000MHz E2

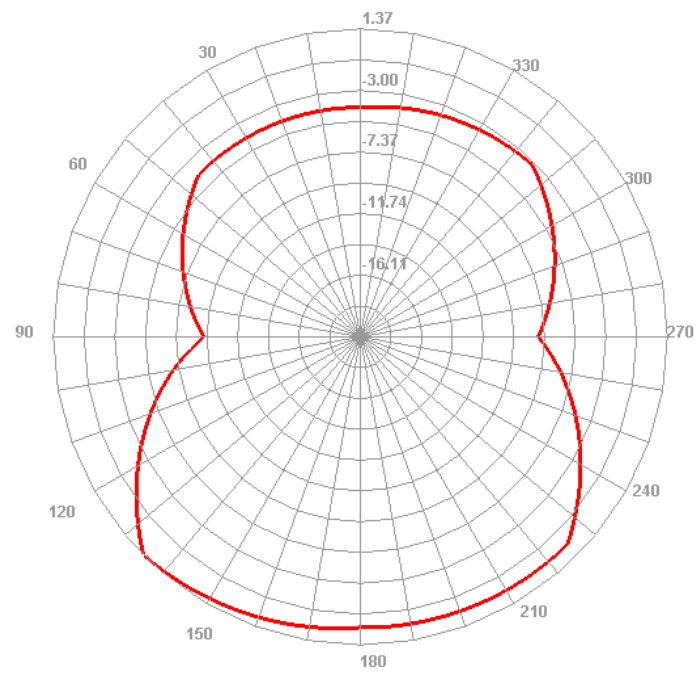


Efficient (5G-WIFI 5000-5250MHz)


5150.000MHz

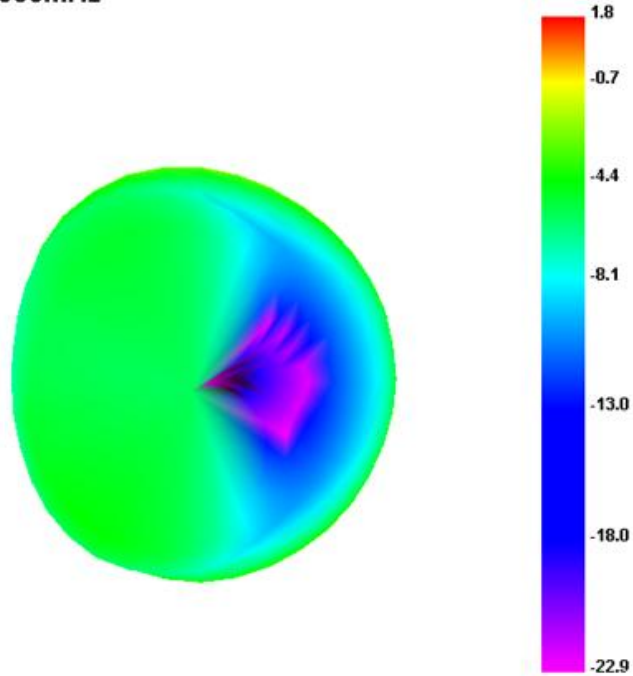


5150.000MHz H

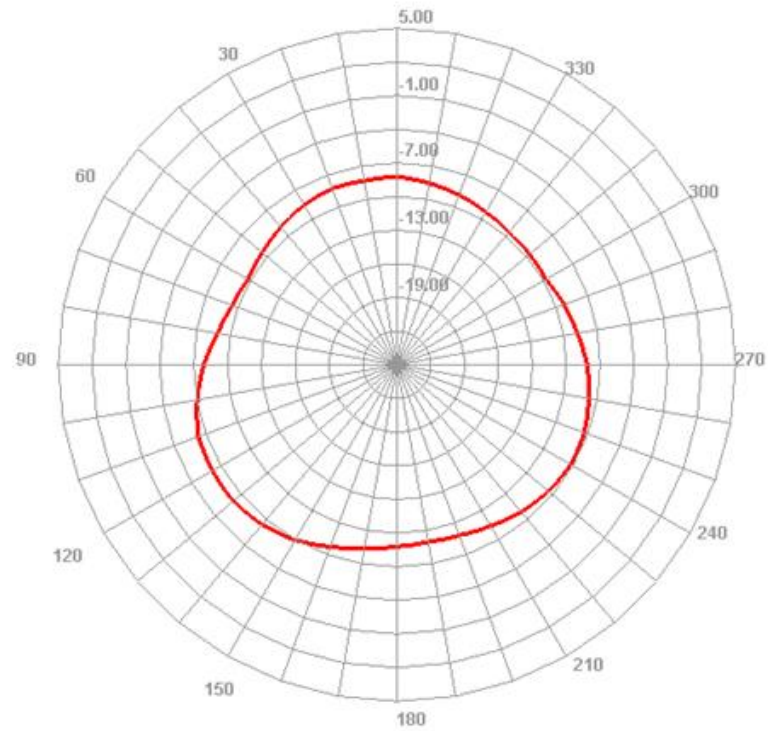

5150.000MHz E1

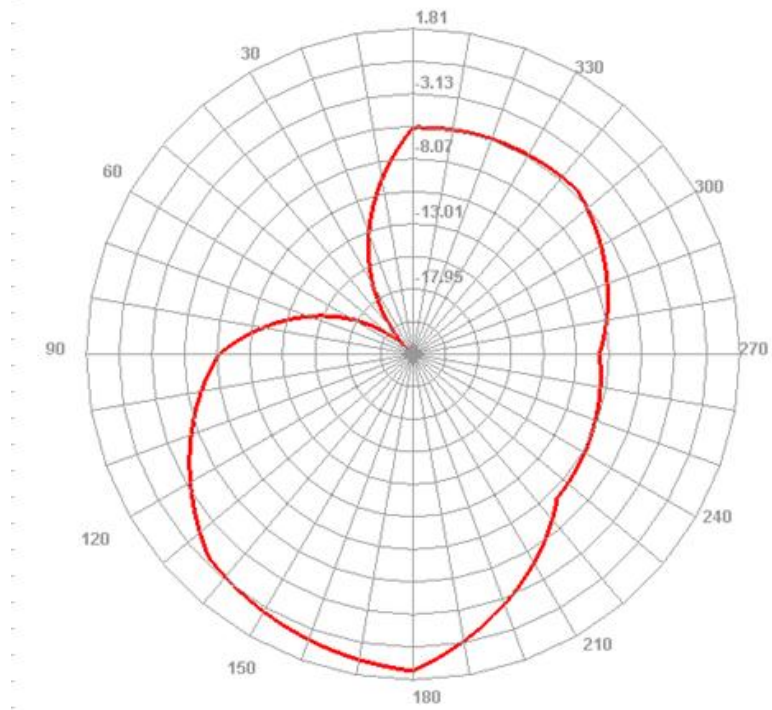


5150.000MHz E2

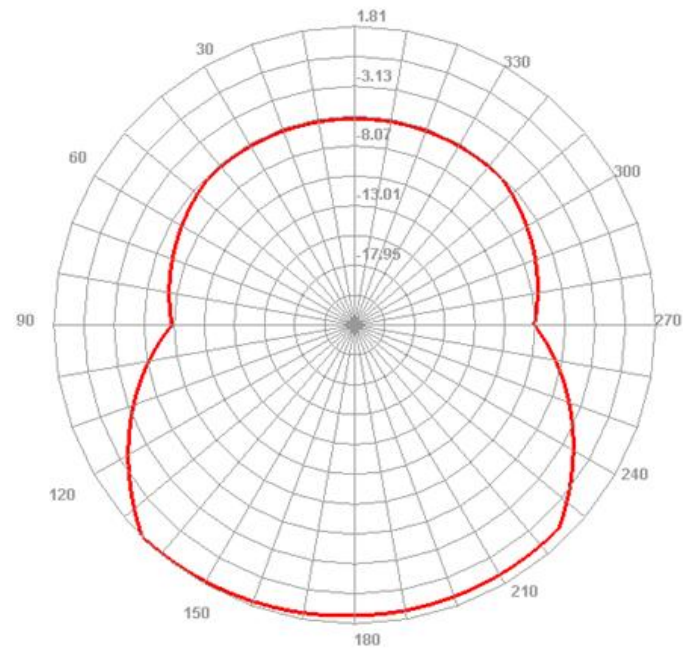


Efficient (5G-WIFI 5725-5850MHz)


5740.000MHz

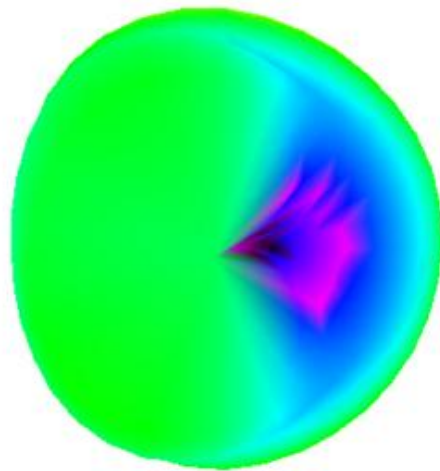


5740.000MHz E1

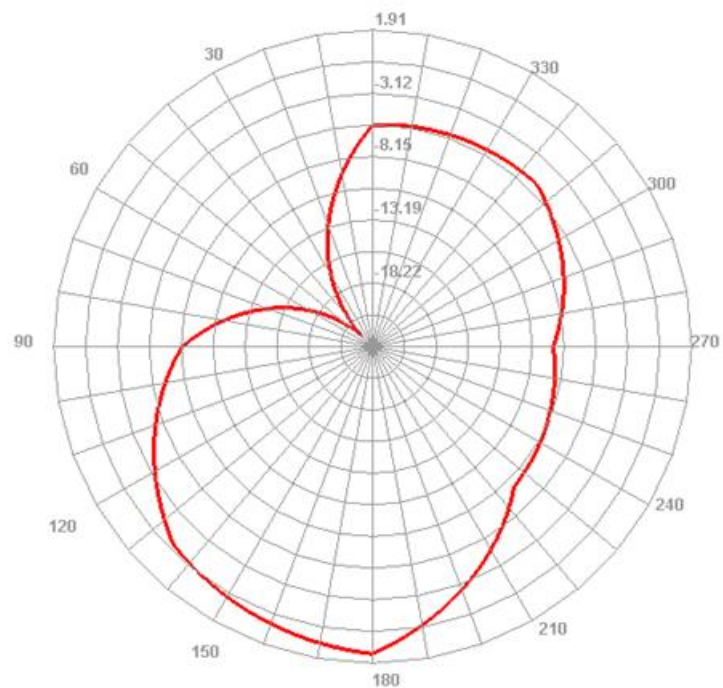

5740.000MHz H


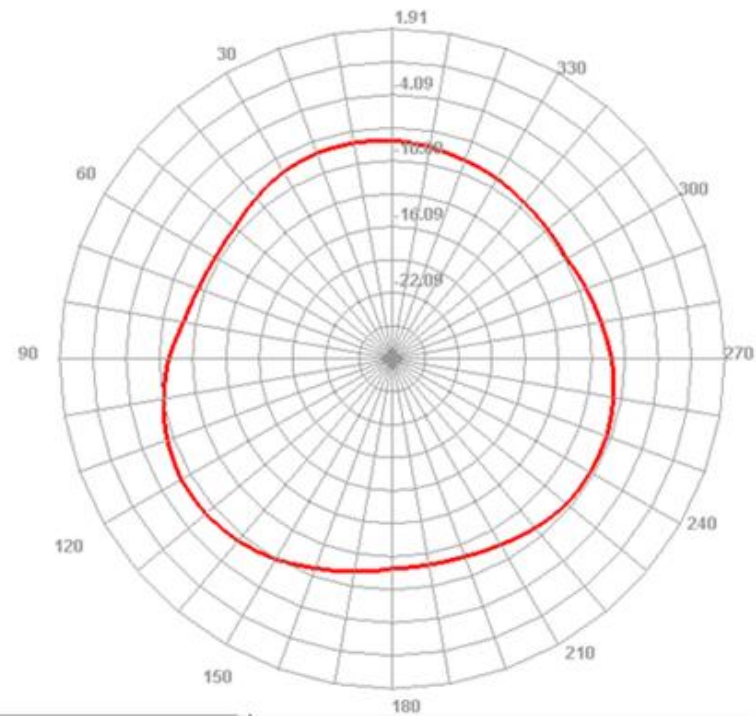


5740.000MHz E2

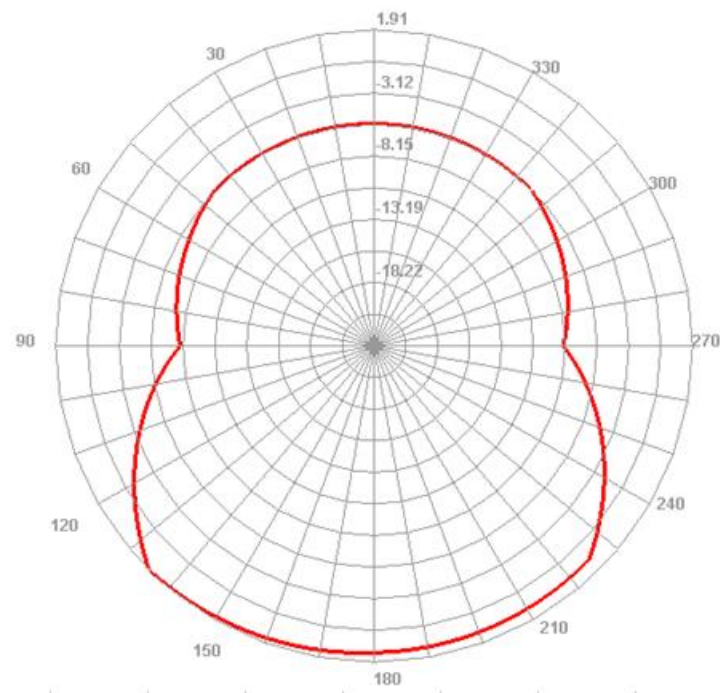


Efficient (GPS 1575.42MHz)


1575.491MHz

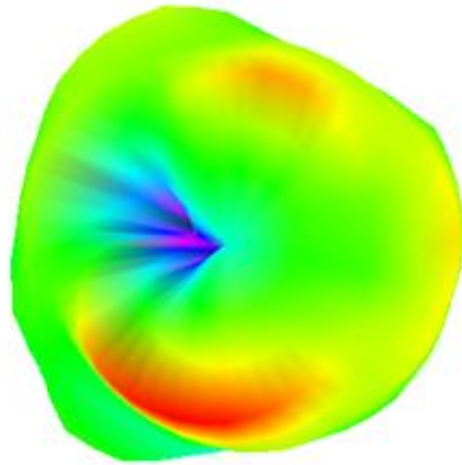


1575.491MHz H

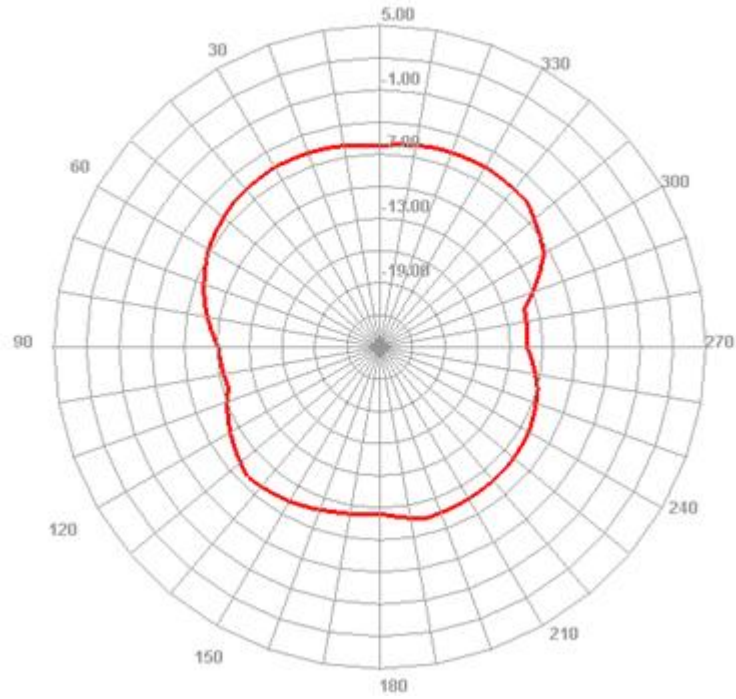

1575.491MHz E1

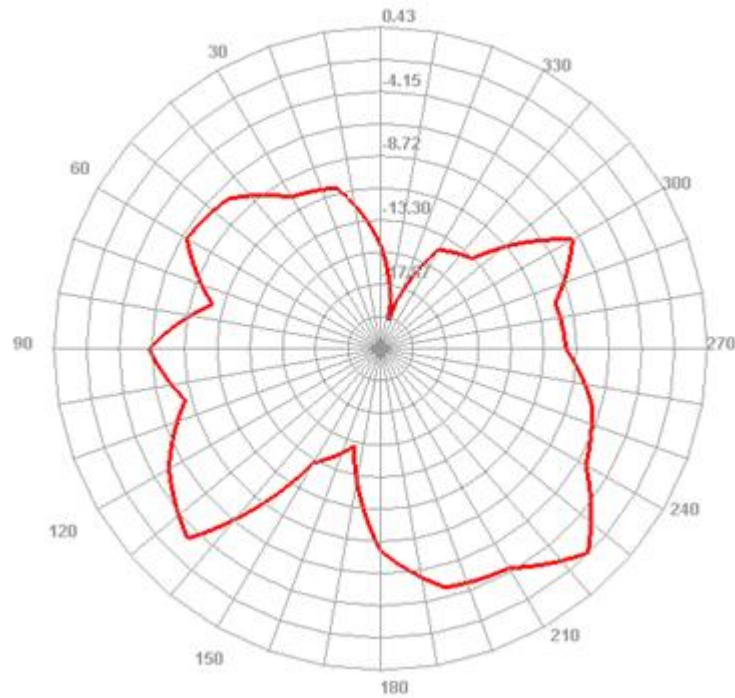

1575.491MHz E2

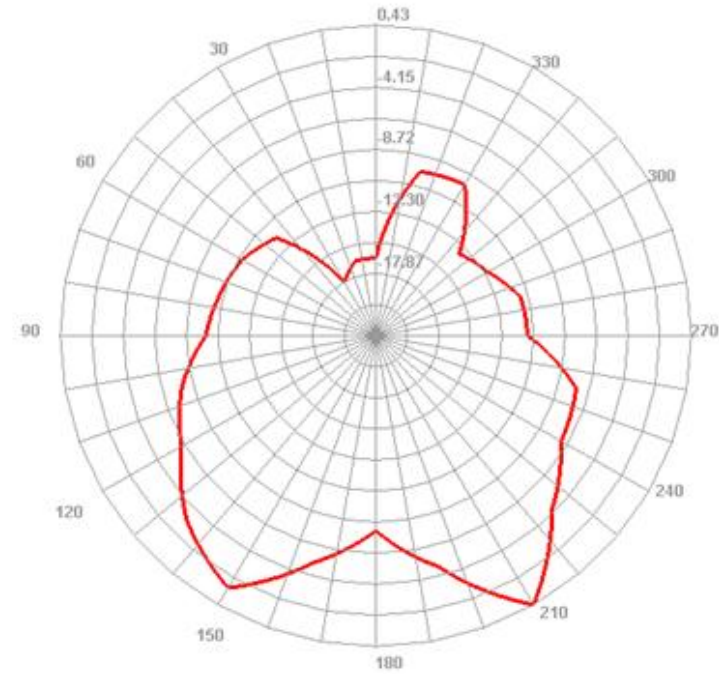


Master antenna specifications

version	Modify the content	modifier	date of revision


Shape - screen printing




Half and half black covering film
silkscreen white characters



substrate	half to 1/3	
	half and half	✓
	3 pairs and a bit	
	one-to-one	



Finished product drawing-front

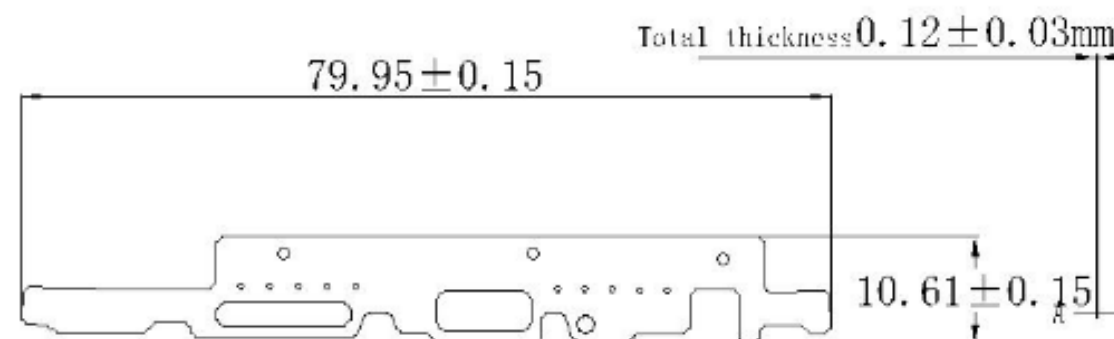

Hand tear line back glue map-back

▽ V0.1
▽ V0.2
▽ V0.3
▽ V0.4
▽ V0.5
▽ V0.6
▽ V0.7
▽ V0.8
▽ V0.9
▽ V0.10

NOTES:

1. Gunned paper: 3M300LSE;
2. The gold finger has a gilded surface $0.5 \sim 3 \mu\text{m}$; Attention to materials, No oxidation is allowed in this position.
3. The overall thickness should be less than or equal to 0.12mm ;
4. Precise tolerance range: $\pm 0.03\text{mm}$;
5. Only the product diagram is allowed to conduct electricity;

Amplification at A




- The front side is the covering film $13 \sim 20 \mu\text{m}$
- The second layer is copper Cu $38 \mu\text{m}$
- The third layer is silver Ag $33 \sim 38 \mu\text{m}$
- The fourth substrate PI $125 \mu\text{m}$
- Back solder: 63/37 Sn63 50 μm

Huaxin Micro Communication Technology Co. LTD				
	unit: mm	name: FPC	date: 2024-09-04	
General tolerance:		Material number: S6068R GSM	design: zhuoshunshen	
L ± 0.5		material: FPC+3M9471	R F:	
.X ± 0.25		Surface treatment: clean	confirm:	
.3X ± 0.05		color:	proportion: 1:1	version: A
.XXY ± 0.05				
ANGULAR $\leq 0.5^\circ$				

	version	Modify the content	modifier	date of modify


Shape - screen printing → Half and half black covering film
silkscreen white characters



substrate	half to 1/3	
	half and half	✓
	3 pair and a half	
	one-to-one	



Finished product drawing-front

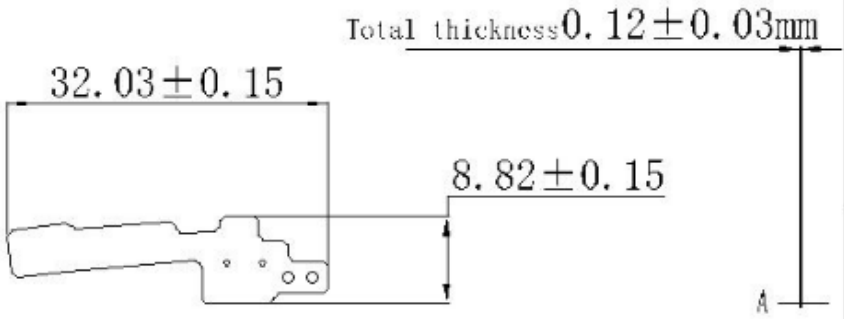


Hand tear line back glue map-back

NOTES:

1. Gunned paper: 3M300LSE;
2. The gold finger has a gilded surface 0.5~3u";Attention to materials, No oxidation is allowed in this position.
3. The overall thickness should be less than or equal to 0.12mm;
4. Precise tolerance range: ±0.03mm;
5. Only the product diagram is allowed to conduct electricity;

Amplification at A

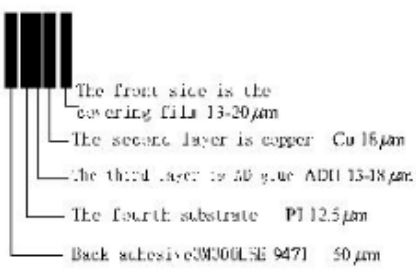


Huaxin Micro Communication Technology Co. LTD				
	unit: mm	name: FPC	date: 2024-09-04	
General tolerance: mm ±0.5 mm ±0.25 mm ±0.05 mm ±0.05 ANGULAR <= 0.5°		Material number: SG068R GWD	design: zhushunshen	
		material: FPC+3M9471	R F:	
		Surface treatment: clean	confirm:	
		color:	proportion: 1:1	version: A

- ✓ V0.1
- ✓ V0.2
- ✓ V0.3
- ✓ V0.4
- ✓ V0.5
- ✓ V0.6
- ✓ V0.7
- ✓ V0.8
- ✓ V0.9
- ✓ V0.10



Diversity antenna specifications

version	Modify the content	modifier	date of revision

Shape - screen printing → Half and half black covering film
silkscreen white characters

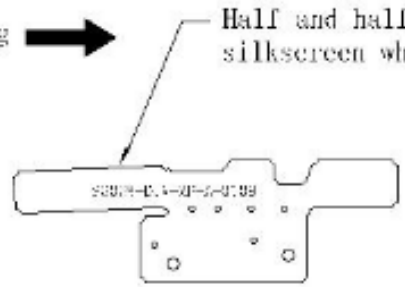

substrate	half to 1/3	
	half and half	✓
	3 pair and a half	
	one-to-one	

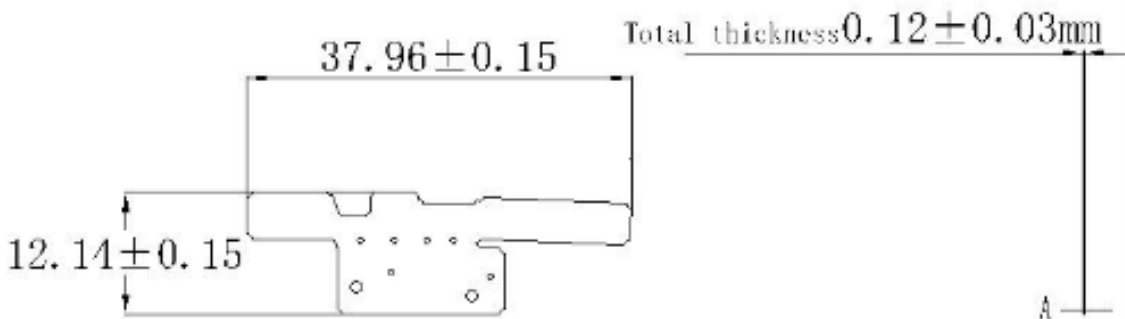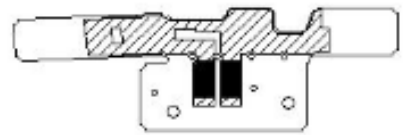

Finished product drawing-front

Hand tear line back glue map-back

NOTES:

- 1. Gunned paper: 3M300LSE;
- 2. The gold finger has a gilded surface0.5~3u";Attention to materials, No oxidation is allowed in this position.
- 3. The overall thickness should be less than or equal to0.12mm;
- 4. Precise tolerance range:±0.03mm;
- 5. Only the product diagram is allowed to conduct electricity;

Amplification at A



Huaxin Micro Communication Technology Co. LTD				
		unit: mm	name: FPC	date: 2024-09-04
General tolerances:		Material number: S8068 DIV	design: shushunshen	
L ±0.5		material: FPC+3H9471	R F:	
.X ±0.25		Surface treatment: clean	confirm:	
.XX ±0.05		color:	proportion: 1:1	version: A
.XXX ±0.05				
ANGULAR		∠ = 0.5°		

- ☑ VER.1
- ☑ VER.2
- ☑ VER.3
- ☑ VER.4
- ☑ VER.5
- ☑ VER.6
- ☑ VER.7
- ☑ VER.8
- ☑ VER.9
- ☑ VER.10