

FCC Test Report (WLAN)

Report No.: RF181107E09

FCC ID: JNZNR0018

Test Model: N-R0018

Received Date: Oct. 31, 2018

Test Date: Oct. 31, 2018 to Feb. 14, 2019

Issued Date: Apr. 22, 2019

Applicant: LOGITECH FAR EAST LTD.

Address: #2 Creation Rd. 4, Science-Based Ind. Park Hsinchu Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures.....	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup.....	37
4.2.6 EUT Operating Conditions.....	37
4.2.7 Test Results	38
4.3 6dB Bandwidth Measurement	40
4.3.1 Limits of 6dB Bandwidth Measurement	40
4.3.2 Test Setup.....	40
4.3.3 Test Instruments	40
4.3.4 Test Procedure	40
4.3.5 Deviation from Test Standard	40
4.3.6 EUT Operating Conditions.....	40
4.3.7 Test Result.....	41
4.4 Conducted Output Power Measurement.....	43
4.4.1 Limits of Conducted Output Power Measurement	43
4.4.2 Test Setup.....	43
4.4.3 Test Instruments	43
4.4.4 Test Procedures.....	43
4.4.5 Deviation from Test Standard	43
4.4.6 EUT Operating Conditions.....	43
4.4.7 Test Results	44
4.5 Power Spectral Density Measurement.....	46
4.5.1 Limits of Power Spectral Density Measurement	46
4.5.2 Test Setup.....	46
4.5.3 Test Instruments	46
4.5.4 Test Procedure	46
4.5.5 Deviation from Test Standard	46
4.5.6 EUT Operating Condition	46

4.5.7 Test Results	47
4.6 Conducted Out of Band Emission Measurement	49
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	49
4.6.2 Test Setup.....	49
4.6.3 Test Instruments	49
4.6.4 Test Procedure	49
4.6.5 Deviation from Test Standard	49
4.6.6 EUT Operating Condition	49
4.6.7 Test Results	49
5 Pictures of Test Arrangements.....	54
Appendix – Information of the Testing Laboratories	55

Release Control Record

Issue No.	Description	Date Issued
RF181107E09	Original release.	Apr. 22, 2019

1 Certificate of Conformity

Product: Wireless Hub

Brand: Logitech

Test Model: N-R0018

Sample Status: ENGINEERING SAMPLE

Applicant: LOGITECH FAR EAST LTD.

Test Date: Oct. 31, 2018 to Feb. 14, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Apr. 22, 2019
Wendy Wu / Specialist

Approved by :  , **Date:** Apr. 22, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.21dB at 0.59506MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -3.1dB at 4824MHz, 4924MHz, 2483.5MHz, 2390MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Hub
PMN	Harmony Pro
Brand	Logitech
Test Model	N-R0018
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 5V from USB interface DC48V from PoE adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 150Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7
Output Power	93.756mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1 Remote Controller x 1 (Brand: Logitech / Model No.: N-R0010) Charging cradle for remote x 1 (Brand: Logitech / Model No.: P/N: 815-000144) Tool Packet x 1
Data Cable Supplied	IR Cable x 3 (Shielded, 1.8m) Audio Cable x 1 (Unshielded, 1.9m)

Note:

1. The EUT may have a lot of colors for marketing requirement.
2. There are WLAN, Bluetooth and GFSK technology used for the EUT. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN 2.4GHz	Bluetooth	GFSK

3. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	Bluetooth	GFSK

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT must be supplied with a power adapter as following table :

Brand	Model No.	Spec.
logi	BI12T-050200-BdU	Input: 100-240Vac, 0.5A, 50/60Hz Output: 5Vdc, 2A, (Unshielded, 2m)

[For Charging cradle for remote](#)

Brand	Model No.	Spec.
logi	IVP0510-1000	Input: 100-240Vac, 0.5A, 50/60Hz Output: 5.1Vdc, 1.0A, (Unshielded, 1.8m)

5. The antennas provided to the EUT, please refer to the following table:

For WLAN			
Antenna Gain (dBi)	Frequency range(GHz)	Antenna Type	Connector Type
4.87	2.4~2.4835	Printed Antenna	N/A
For Bluetooth			
Antenna Gain (dBi)	Frequency range(GHz)	Antenna Type	Connector Type
1.61	2.4~2.4835	Printed Antenna	N/A
For GFSK			
Antenna Gain (dBi)	Frequency range(GHz)	Antenna Type	Connector Type
3	2.4~2.4835	Dipole Antenna	R-SMA

6. The EUT incorporates a SISO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX
802.11n (HT40)	MCS 0~7	1TX	1RX

7. For radiated emissions and conducted emissions, the EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	Power from adapter
Mode B	Power from PoE adapter
Mode C	Power from laptop

From the above modes, the worst case of radiated emissions was found in Mode B; the worst case of conducted emissions was found in Mode A. Therefore only the test data of the mode was recorded in this report.

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	20deg. C, 66%RH	120Vac, 60Hz	Steven Chiang
RE<1G	20deg. C, 64%RH	120Vac, 60Hz	Robert Cheng
PLC	23deg. C, 75%RH	120Vac, 60Hz	Andy Chang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $32.237/32.312 = 0.998$

802.11g: Duty cycle = $5.357/5.41 = 0.99$

802.11n (HT20): Duty cycle = $4.965/5.02 = 0.989$

802.11n (HT40): Duty cycle = $2.405/2.462 = 0.977$, Duty factor = $10 * \log(1/0.977) = 0.10$

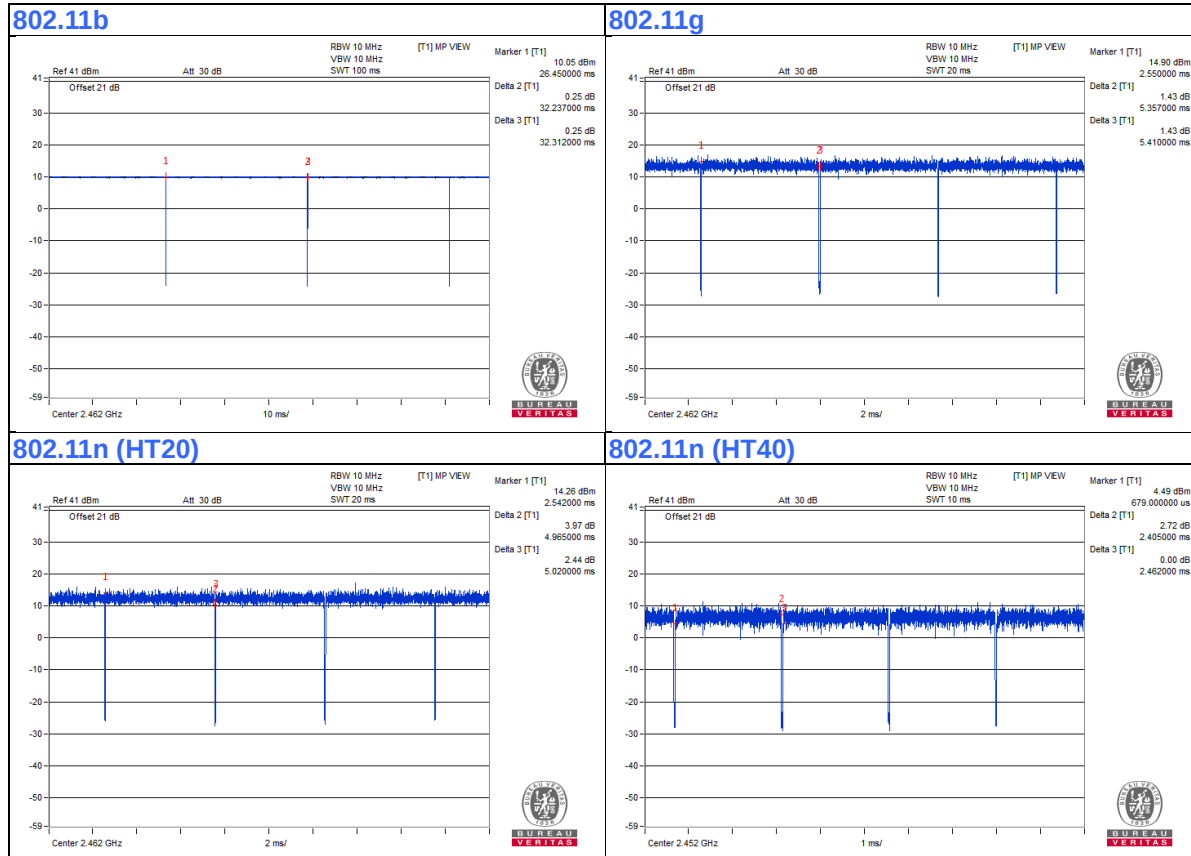

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Remote Control	Logitech	N-R0010	NA	JNZNR0010	Supplied by client
B.	Laptop	Lenovo	80WG	YD025N5Q	PD93165NGU	Provided by Lab
C.	Laptop	NA	NA	NA	NA	Provided by Lab
D.	PoE Adapter	Power Dsine	3501G/AC	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	2	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	IR Cable	1	1.8	No	0	Supplied by client
4.	RJ-45 Cable	1	3	No	0	Provided by Lab

3.4.1 Configuration of System under Test

For conducted emissions test:

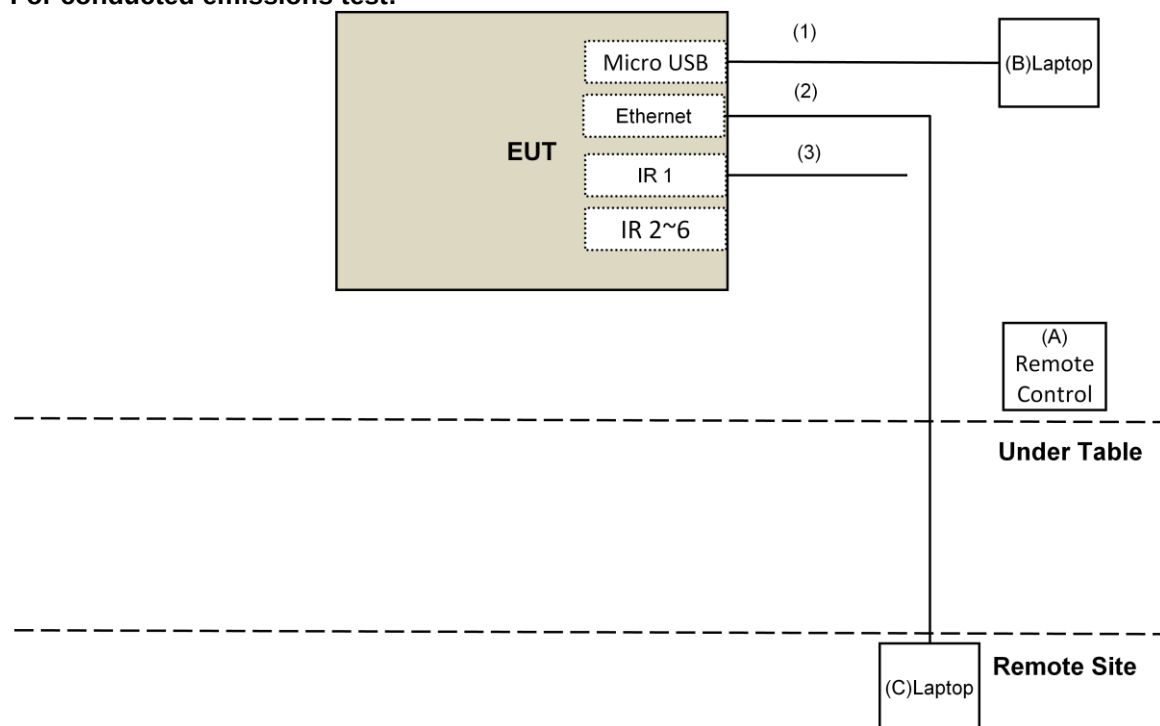

For other test:

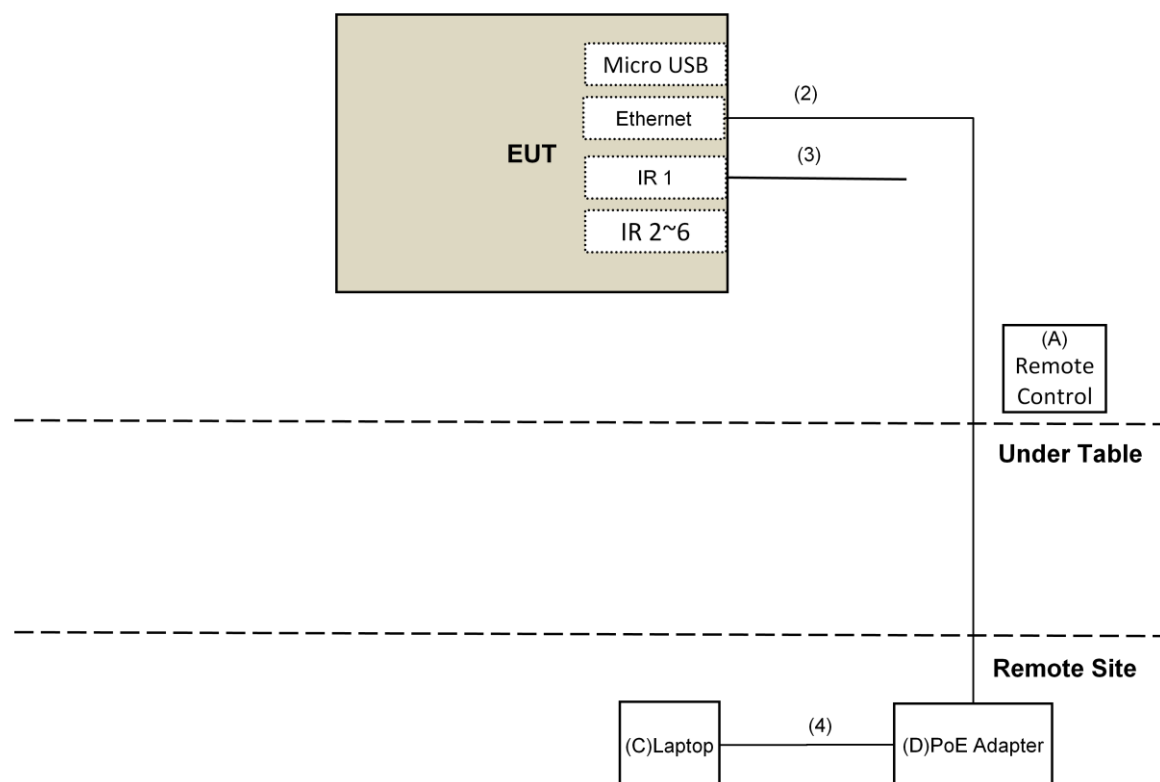

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB or below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emissions below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Feb. 09, 2018	Feb. 08, 2019
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001	Jan. 15, 2018	Jan. 14, 2019
RF Cable	NA	LOOPCAB-002	Jan. 15, 2018	Jan. 14, 2019
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 09, 2017	Nov. 08, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 29, 2017	Nov. 28, 2018
RF Cable	8D	966-4-1	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-2	Mar. 21, 2018	Mar. 20, 2019
RF Cable	8D	966-4-3	Mar. 21, 2018	Mar. 20, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Oct. 31, 2018

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 07, 2018	May 06, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Feb. 13 to 14, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

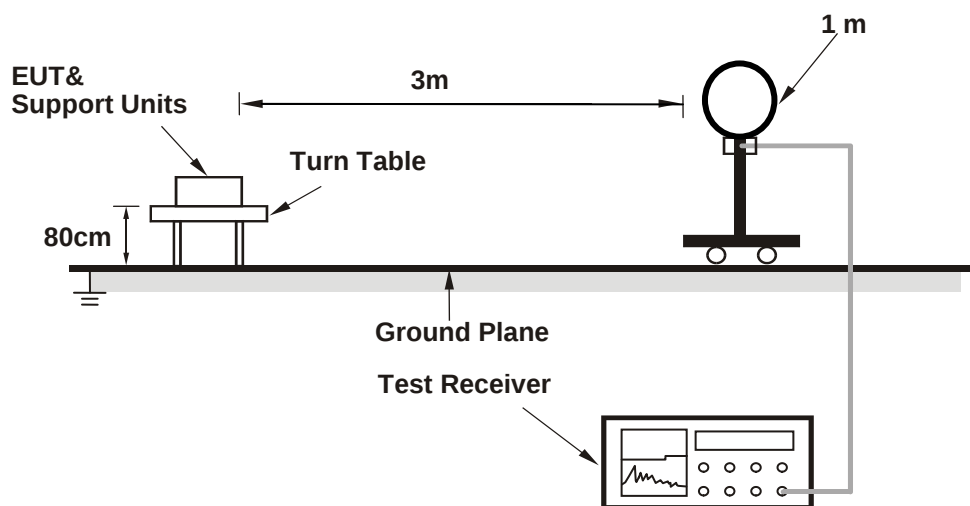

For Radiated emission 30MHz to 1GHz

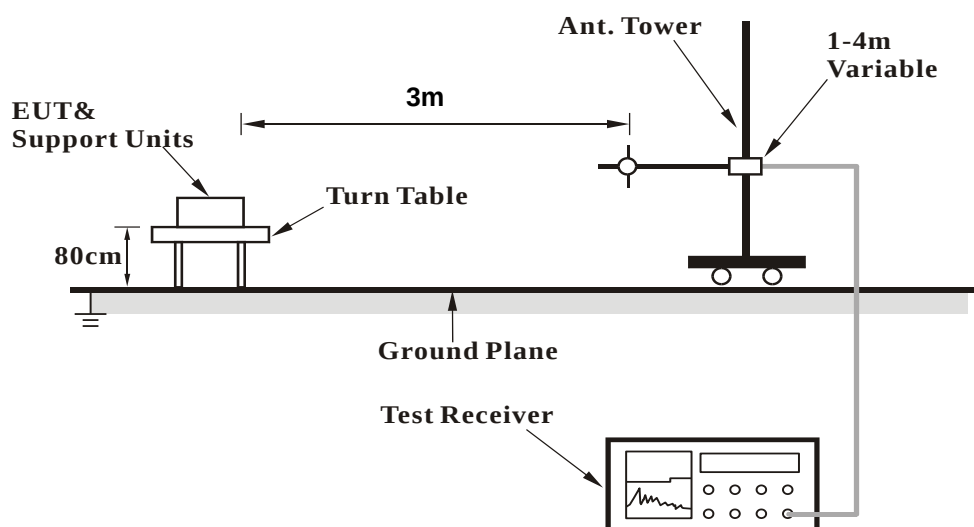

For Radiated emission above 1GHz

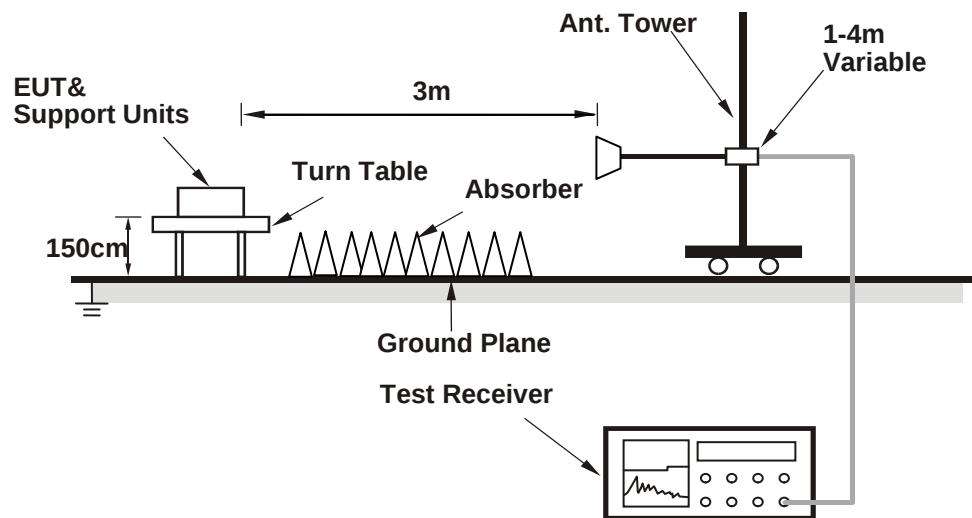

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Controlling software (art.exe [v2.56]) has been activated to set the EUT under transmission condition continuously.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.21 H	244	59.7	-2.2
2	2390.00	45.4 AV	54.0	-8.6	1.21 H	244	47.6	-2.2
3	*2412.00	97.2 PK			1.21 H	244	99.5	-2.3
4	*2412.00	94.8 AV			1.21 H	244	97.1	-2.3
5	4824.00	51.5 PK	74.0	-22.5	1.47 H	158	49.8	1.7
6	4824.00	50.6 AV	54.0	-3.4	1.47 H	158	48.9	1.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	3.11 V	61	57.8	-2.2
2	2390.00	43.2 AV	54.0	-10.8	3.11 V	61	45.4	-2.2
3	*2412.00	92.0 PK			3.11 V	61	94.3	-2.3
4	*2412.00	89.9 AV			3.11 V	61	92.2	-2.3
5	4824.00	52.3 PK	74.0	-21.7	2.98 V	353	50.6	1.7
6	4824.00	50.9 AV	54.0	-3.1	2.98 V	353	49.2	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	96.8 PK			1.24 H	229	99.2	-2.4
2	*2437.00	93.6 AV			1.24 H	229	96.0	-2.4
3	4874.00	50.8 PK	74.0	-23.2	1.16 H	152	49.1	1.7
4	4874.00	49.8 AV	54.0	-4.2	1.16 H	152	48.1	1.7
5	7311.00	44.0 PK	74.0	-30.0	1.43 H	220	35.8	8.2
6	7311.00	31.4 AV	54.0	-22.6	1.43 H	220	23.2	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	91.0 PK			3.16 V	46	93.4	-2.4
2	*2437.00	88.8 AV			3.16 V	46	91.2	-2.4
3	4874.00	52.1 PK	74.0	-21.9	3.99 V	357	50.4	1.7
4	4874.00	50.8 AV	54.0	-3.2	3.99 V	357	49.1	1.7
5	7311.00	46.4 PK	74.0	-27.6	1.51 V	270	38.2	8.2
6	7311.00	34.1 AV	54.0	-19.9	1.51 V	270	25.9	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.1 PK			1.07 H	241	98.5	-2.4
2	*2462.00	92.9 AV			1.07 H	241	95.3	-2.4
3	2483.50	55.4 PK	74.0	-18.6	1.07 H	241	57.7	-2.3
4	2483.50	42.5 AV	54.0	-11.5	1.07 H	241	44.8	-2.3
5	4924.00	50.6 PK	74.0	-23.4	1.23 H	150	48.8	1.8
6	4924.00	48.9 AV	54.0	-5.1	1.23 H	150	47.1	1.8
7	7386.00	44.2 PK	74.0	-29.8	1.48 H	221	35.9	8.3
8	7386.00	31.9 AV	54.0	-22.1	1.48 H	221	23.6	8.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	90.4 PK			3.15 V	48	92.8	-2.4
2	*2462.00	88.2 AV			3.15 V	48	90.6	-2.4
3	2483.50	55.3 PK	74.0	-18.7	3.15 V	48	57.6	-2.3
4	2483.50	42.1 AV	54.0	-11.9	3.15 V	48	44.4	-2.3
5	4924.00	52.3 PK	74.0	-21.7	3.63 V	11	50.5	1.8
6	4924.00	50.9 AV	54.0	-3.1	3.63 V	11	49.1	1.8
7	7386.00	46.2 PK	74.0	-27.8	1.56 V	257	37.9	8.3
8	7386.00	33.9 AV	54.0	-20.1	1.56 V	257	25.6	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.18 H	199	70.3	-2.2
2	2390.00	50.5 AV	54.0	-3.5	1.18 H	199	52.7	-2.2
3	*2412.00	102.0 PK			1.18 H	199	104.3	-2.3
4	*2412.00	91.4 AV			1.18 H	199	93.7	-2.3
5	4824.00	60.7 PK	74.0	-13.3	1.28 H	140	59.0	1.7
6	4824.00	46.9 AV	54.0	-7.1	1.28 H	140	45.2	1.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	3.10 V	66	67.6	-2.2
2	2390.00	47.8 AV	54.0	-6.2	3.10 V	66	50.0	-2.2
3	*2412.00	97.0 PK			3.10 V	66	99.3	-2.3
4	*2412.00	86.4 AV			3.10 V	66	88.7	-2.3
5	4824.00	61.1 PK	74.0	-12.9	4.00 V	3	59.4	1.7
6	4824.00	47.2 AV	54.0	-6.8	4.00 V	3	45.5	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.15 H	202	59.9	-2.2
2	2390.00	45.3 AV	54.0	-8.7	1.15 H	202	47.5	-2.2
3	*2437.00	105.5 PK			1.15 H	202	107.9	-2.4
4	*2437.00	94.9 AV			1.15 H	202	97.3	-2.4
5	2483.50	54.9 PK	74.0	-19.1	1.15 H	202	57.2	-2.3
6	2483.50	42.1 AV	54.0	-11.9	1.15 H	202	44.4	-2.3
7	4874.00	63.3 PK	74.0	-10.7	1.28 H	154	61.6	1.7
8	4874.00	49.8 AV	54.0	-4.2	1.28 H	154	48.1	1.7
9	7311.00	44.4 PK	74.0	-29.6	1.42 H	211	36.2	8.2
10	7311.00	32.2 AV	54.0	-21.8	1.42 H	211	24.0	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.3 PK	74.0	-18.7	3.12 V	50	57.5	-2.2
2	2390.00	43.2 AV	54.0	-10.8	3.12 V	50	45.4	-2.2
3	*2437.00	100.3 PK			3.12 V	50	102.7	-2.4
4	*2437.00	90.1 AV			3.12 V	50	92.5	-2.4
5	2483.50	54.8 PK	74.0	-19.2	3.12 V	50	57.1	-2.3
6	2483.50	42.1 AV	54.0	-11.9	3.12 V	50	44.4	-2.3
7	4874.00	64.4 PK	74.0	-9.6	4.00 V	4	62.7	1.7
8	4874.00	50.5 AV	54.0	-3.5	4.00 V	4	48.8	1.7
9	7311.00	46.4 PK	74.0	-27.6	1.50 V	250	38.2	8.2
10	7311.00	34.2 AV	54.0	-19.8	1.50 V	250	26.0	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.7 PK			1.14 H	223	104.1	-2.4
2	*2462.00	91.3 AV			1.14 H	223	93.7	-2.4
3	2483.50	69.8 PK	74.0	-4.2	1.14 H	223	72.1	-2.3
4	2483.50	50.9 AV	54.0	-3.1	1.14 H	223	53.2	-2.3
5	4924.00	60.7 PK	74.0	-13.3	1.31 H	157	58.9	1.8
6	4924.00	47.0 AV	54.0	-7.0	1.31 H	157	45.2	1.8
7	7386.00	43.7 PK	74.0	-30.3	1.50 H	213	35.4	8.3
8	7386.00	31.6 AV	54.0	-22.4	1.50 H	213	23.3	8.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	96.5 PK			3.13 V	71	98.9	-2.4
2	*2462.00	86.1 AV			3.13 V	71	88.5	-2.4
3	2483.50	67.1 PK	74.0	-6.9	3.13 V	71	69.4	-2.3
4	2483.50	48.2 AV	54.0	-5.8	3.13 V	71	50.5	-2.3
5	4924.00	61.3 PK	74.0	-12.7	3.95 V	353	59.5	1.8
6	4924.00	47.3 AV	54.0	-6.7	3.95 V	353	45.5	1.8
7	7386.00	46.3 PK	74.0	-27.7	1.61 V	247	38.0	8.3
8	7386.00	34.1 AV	54.0	-19.9	1.61 V	247	25.8	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.18 H	200	69.7	-2.2
2	2390.00	50.5 AV	54.0	-3.5	1.18 H	200	52.7	-2.2
3	*2412.00	100.0 PK			1.18 H	200	102.3	-2.3
4	*2412.00	89.9 AV			1.18 H	200	92.2	-2.3
5	4824.00	60.4 PK	74.0	-13.6	1.23 H	146	58.7	1.7
6	4824.00	46.8 AV	54.0	-7.2	1.23 H	146	45.1	1.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	3.13 V	72	67.0	-2.2
2	2390.00	47.9 AV	54.0	-6.1	3.13 V	72	50.1	-2.2
3	*2412.00	94.9 PK			3.13 V	72	97.2	-2.3
4	*2412.00	84.8 AV			3.13 V	72	87.1	-2.3
5	4824.00	63.5 PK	74.0	-10.5	3.91 V	23	61.8	1.7
6	4824.00	48.0 AV	54.0	-6.0	3.91 V	23	46.3	1.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.21 H	191	60.6	-2.2
2	2390.00	46.3 AV	54.0	-7.7	1.21 H	191	48.5	-2.2
3	*2437.00	105.4 PK			1.21 H	191	107.8	-2.4
4	*2437.00	95.2 AV			1.21 H	191	97.6	-2.4
5	2483.50	55.7 PK	74.0	-18.3	1.21 H	191	58.0	-2.3
6	2483.50	42.6 AV	54.0	-11.4	1.21 H	191	44.9	-2.3
7	4874.00	63.4 PK	74.0	-10.6	1.27 H	141	61.7	1.7
8	4874.00	49.7 AV	54.0	-4.3	1.27 H	141	48.0	1.7
9	7311.00	44.1 PK	74.0	-29.9	1.52 H	209	35.9	8.2
10	7311.00	31.5 AV	54.0	-22.5	1.52 H	209	23.3	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	3.15 V	46	57.9	-2.2
2	2390.00	43.6 AV	54.0	-10.4	3.15 V	46	45.8	-2.2
3	*2437.00	100.5 PK			3.15 V	46	102.9	-2.4
4	*2437.00	90.3 AV			3.15 V	46	92.7	-2.4
5	2483.50	55.4 PK	74.0	-18.6	3.15 V	46	57.7	-2.3
6	2483.50	42.2 AV	54.0	-11.8	3.15 V	46	44.5	-2.3
7	4874.00	65.1 PK	74.0	-8.9	3.85 V	8	63.4	1.7
8	4874.00	50.7 AV	54.0	-3.3	3.85 V	8	49.0	1.7
9	7311.00	46.4 PK	74.0	-27.6	1.55 V	256	38.2	8.2
10	7311.00	34.1 AV	54.0	-19.9	1.55 V	256	25.9	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.3 PK			1.14 H	224	102.7	-2.4
2	*2462.00	90.1 AV			1.14 H	224	92.5	-2.4
3	2483.50	68.0 PK	74.0	-6.0	1.14 H	224	70.3	-2.3
4	2483.50	50.6 AV	54.0	-3.4	1.14 H	224	52.9	-2.3
5	4924.00	59.9 PK	74.0	-14.1	1.28 H	129	58.1	1.8
6	4924.00	46.2 AV	54.0	-7.8	1.28 H	129	44.4	1.8
7	7386.00	44.0 PK	74.0	-30.0	1.47 H	207	35.7	8.3
8	7386.00	31.7 AV	54.0	-22.3	1.47 H	207	23.4	8.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.0 PK			3.10 V	56	97.4	-2.4
2	*2462.00	84.8 AV			3.10 V	56	87.2	-2.4
3	2483.50	65.6 PK	74.0	-8.4	3.10 V	56	67.9	-2.3
4	2483.50	48.2 AV	54.0	-5.8	3.10 V	56	50.5	-2.3
5	4924.00	62.1 PK	74.0	-11.9	3.87 V	22	60.3	1.8
6	4924.00	47.8 AV	54.0	-6.2	3.87 V	22	46.0	1.8
7	7386.00	47.0 PK	74.0	-27.0	1.66 V	239	38.7	8.3
8	7386.00	34.6 AV	54.0	-19.4	1.66 V	239	26.3	8.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.19 H	202	68.8	-2.2
2	2390.00	50.9 AV	54.0	-3.1	1.19 H	202	53.1	-2.2
3	*2422.00	96.4 PK			1.19 H	202	98.7	-2.3
4	*2422.00	85.4 AV			1.19 H	202	87.7	-2.3
5	4844.00	57.8 PK	74.0	-16.2	1.29 H	110	56.2	1.6
6	4844.00	43.8 AV	54.0	-10.2	1.29 H	110	42.2	1.6
7	7266.00	44.7 PK	74.0	-29.3	1.45 H	221	36.5	8.2
8	7266.00	32.2 AV	54.0	-21.8	1.45 H	221	24.0	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	3.05 V	54	66.4	-2.2
2	2390.00	48.3 AV	54.0	-5.7	3.05 V	54	50.5	-2.2
3	*2422.00	91.4 PK			3.05 V	54	93.7	-2.3
4	*2422.00	80.2 AV			3.05 V	54	82.5	-2.3
5	4844.00	60.4 PK	74.0	-13.6	3.81 V	5	58.8	1.6
6	4844.00	46.6 AV	54.0	-7.4	3.81 V	5	45.0	1.6
7	7266.00	46.1 PK	74.0	-27.9	1.59 V	247	37.9	8.2
8	7266.00	34.1 AV	54.0	-19.9	1.59 V	247	25.9	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.06 H	252	71.0	-2.2
2	2390.00	50.9 AV	54.0	-3.1	1.06 H	252	53.1	-2.2
3	*2437.00	99.2 PK			1.06 H	252	101.6	-2.4
4	*2437.00	88.2 AV			1.06 H	252	90.6	-2.4
5	2483.50	54.0 PK	74.0	-20.0	1.06 H	252	56.3	-2.3
6	2483.50	48.3 AV	54.0	-5.7	1.06 H	252	50.6	-2.3
7	4874.00	60.8 PK	74.0	-13.2	1.32 H	115	59.1	1.7
8	4874.00	47.0 AV	54.0	-7.0	1.32 H	115	45.3	1.7
9	7311.00	44.2 PK	74.0	-29.8	1.53 H	224	36.0	8.2
10	7311.00	32.1 AV	54.0	-21.9	1.53 H	224	23.9	8.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	3.07 V	55	66.5	-2.2
2	2390.00	48.5 AV	54.0	-5.5	3.07 V	55	50.7	-2.2
3	*2437.00	93.7 PK			3.07 V	55	96.1	-2.4
4	*2437.00	82.8 AV			3.07 V	55	85.2	-2.4
5	2483.50	63.2 PK	74.0	-10.8	3.07 V	55	65.5	-2.3
6	2483.50	47.2 AV	54.0	-6.8	3.07 V	55	49.5	-2.3
7	4874.00	63.4 PK	74.0	-10.6	3.81 V	7	61.7	1.7
8	4874.00	49.3 AV	54.0	-4.7	3.81 V	7	47.6	1.7
9	7311.00	46.3 PK	74.0	-27.7	1.59 V	254	38.1	8.2
10	7311.00	33.9 AV	54.0	-20.1	1.59 V	254	25.7	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.2 PK			1.14 H	225	98.6	-2.4
2	*2452.00	85.1 AV			1.14 H	225	87.5	-2.4
3	2483.50	66.0 PK	74.0	-8.0	1.14 H	225	68.3	-2.3
4	2483.50	50.5 AV	54.0	-3.5	1.14 H	225	52.8	-2.3
5	4904.00	58.2 PK	74.0	-15.8	1.28 H	119	56.4	1.8
6	4904.00	44.1 AV	54.0	-9.9	1.28 H	119	42.3	1.8
7	7356.00	44.5 PK	74.0	-29.5	1.47 H	234	36.3	8.2
8	7356.00	32.1 AV	54.0	-21.9	1.47 H	234	23.9	8.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	91.3 PK			3.06 V	60	93.7	-2.4
2	*2452.00	80.1 AV			3.06 V	60	82.5	-2.4
3	2483.50	64.3 PK	74.0	-9.7	3.06 V	60	66.6	-2.3
4	2483.50	47.8 AV	54.0	-6.2	3.06 V	60	50.1	-2.3
5	4904.00	60.8 PK	74.0	-13.2	3.82 V	356	59.0	1.8
6	4904.00	46.6 AV	54.0	-7.4	3.82 V	356	44.8	1.8
7	7356.00	46.4 PK	74.0	-27.6	1.64 V	232	38.2	8.2
8	7356.00	34.1 AV	54.0	-19.9	1.64 V	232	25.9	8.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.95	28.8 QP	40.0	-11.2	1.00 H	72	39.2	-10.4
2	132.92	30.8 QP	43.5	-12.7	1.50 H	65	39.5	-8.7
3	249.96	37.1 QP	46.0	-8.9	1.00 H	315	45.8	-8.7
4	399.98	40.3 QP	46.0	-5.7	1.64 H	196	44.7	-4.4
5	750.02	34.6 QP	46.0	-11.4	1.00 H	30	31.1	3.5
6	875.06	34.8 QP	46.0	-11.2	2.00 H	263	29.5	5.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

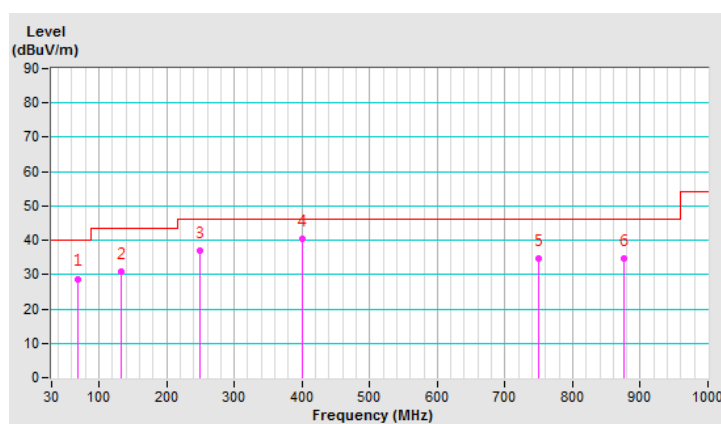


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.71	31.9 QP	40.0	-8.1	1.50 V	231	40.7	-8.8
2	143.30	30.6 QP	43.5	-12.9	1.00 V	1	38.7	-8.1
3	249.96	33.6 QP	46.0	-12.4	1.50 V	225	42.3	-8.7
4	399.98	37.5 QP	46.0	-8.5	1.00 V	315	41.9	-4.4
5	625.03	34.8 QP	46.0	-11.2	1.78 V	311	33.8	1.0
6	875.06	34.2 QP	46.0	-11.8	1.00 V	337	28.9	5.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

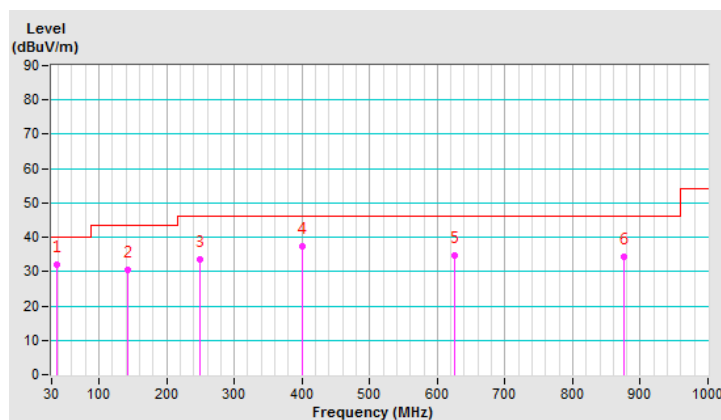

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Feb. 14, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

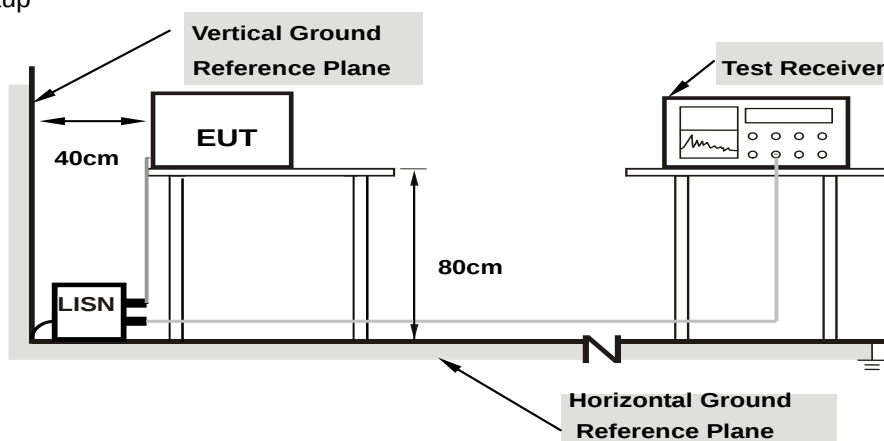

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.59141	10.10	29.57	26.25	39.67	36.35	56.00	46.00	-16.33	-9.65
2	0.76719	10.11	19.49	17.86	29.60	27.97	56.00	46.00	-26.40	-18.03
3	0.97031	10.13	27.26	19.17	37.39	29.30	56.00	46.00	-18.61	-16.70
4	4.98438	10.38	31.28	19.12	41.66	29.50	56.00	46.00	-14.34	-16.50
5	14.03125	10.97	29.15	16.46	40.12	27.43	60.00	50.00	-19.88	-22.57
6	23.07031	11.43	25.89	16.51	37.32	27.94	60.00	50.00	-22.68	-22.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

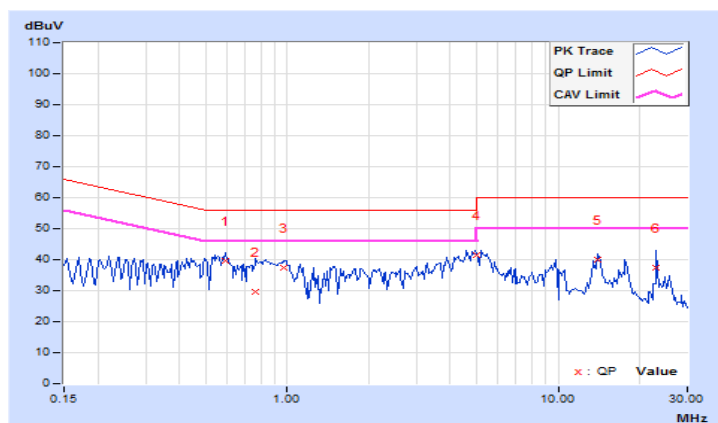


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.37656	9.98	27.58	25.67	37.56	35.65	58.35	48.35	-20.79	-12.70
2	0.43906	9.98	32.47	28.59	42.45	38.57	57.08	47.08	-14.63	-8.51
3	0.59506	9.99	32.55	31.80	42.54	41.79	56.00	46.00	-13.46	-4.21
4	0.70859	9.99	32.28	26.41	42.27	36.40	56.00	46.00	-13.73	-9.60
5	0.81406	9.99	31.34	26.65	41.33	36.64	56.00	46.00	-14.67	-9.36
6	1.05859	10.00	34.04	26.73	44.04	36.73	56.00	46.00	-11.96	-9.27
7	1.13281	10.01	33.25	28.24	43.26	38.25	56.00	46.00	-12.74	-7.75
8	1.26953	10.02	32.34	26.11	42.36	36.13	56.00	46.00	-13.64	-9.87
9	1.78125	10.05	28.69	13.13	38.74	23.18	56.00	46.00	-17.26	-22.82
10	2.58984	10.10	31.99	22.53	42.09	32.63	56.00	46.00	-13.91	-13.37
11	3.94531	10.17	26.02	24.78	36.19	34.95	56.00	46.00	-19.81	-11.05
12	4.62891	10.21	32.83	25.72	43.04	35.93	56.00	46.00	-12.96	-10.07
13	23.12891	11.19	34.85	27.66	46.04	38.85	60.00	50.00	-13.96	-11.15

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

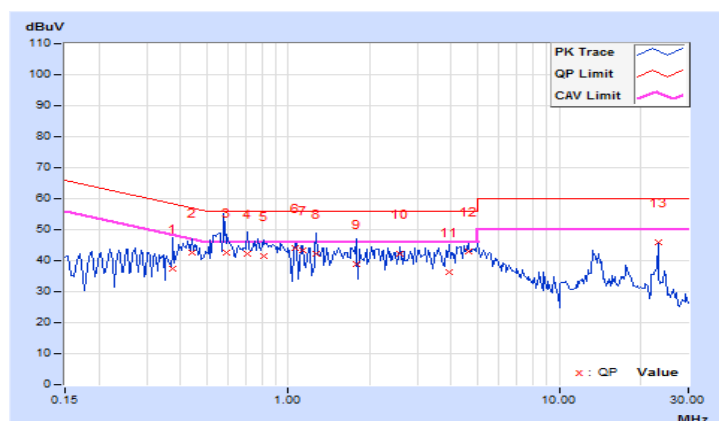


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.16	0.5	PASS
6	2437	10.13	0.5	PASS
11	2462	10.13	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.42	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.44	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.60	0.5	Pass
6	2437	17.60	0.5	Pass
11	2462	17.65	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
3	2422	36.19	0.5	Pass
6	2437	36.21	0.5	Pass
9	2452	36.39	0.5	Pass

Spectrum Plot of Worst Value


802.11b: CH6

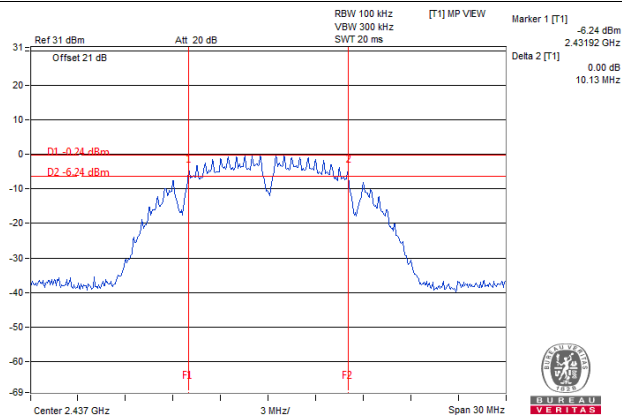


802.11g: CH6

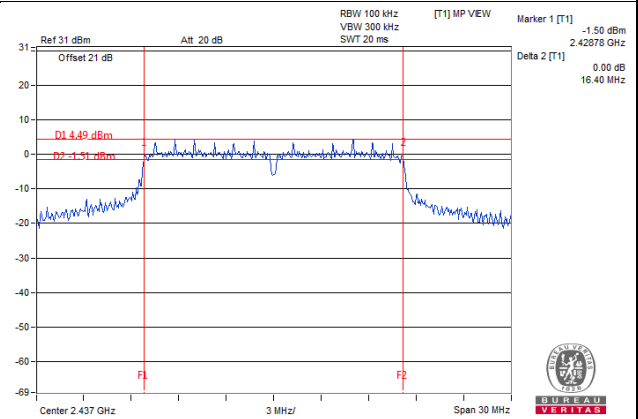

802.11n (HT20): CH1

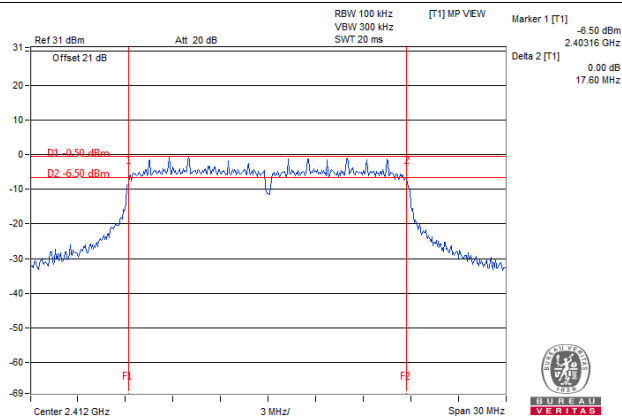

802.11n (HT40) : CH3

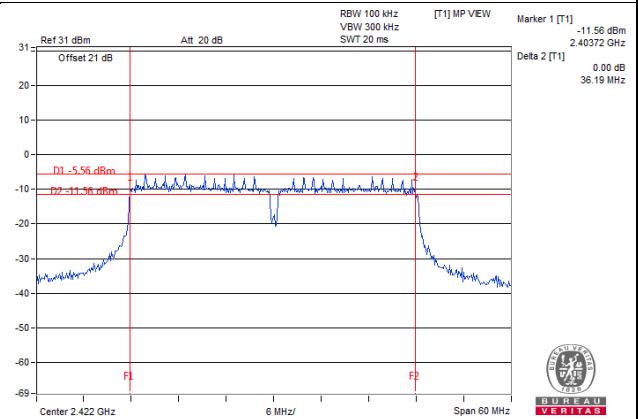


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value..

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	16.444	12.16	30	Pass
6	2437	12.853	11.09	30	Pass
11	2462	10.093	10.04	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	57.28	17.58	30	Pass
6	2437	92.257	19.65	30	Pass
11	2462	55.719	17.46	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	45.499	16.58	30	Pass
6	2437	93.756	19.72	30	Pass
11	2462	43.551	16.39	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
3	2422	47.098	16.73	30	Pass
6	2437	59.841	17.77	30	Pass
9	2452	44.157	16.45	30	Pass

FOR AVERAGE POWER

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	9.572	9.81
6	2437	7.534	8.77
11	2462	5.957	7.75

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	13.032	11.15
6	2437	32.584	15.13
11	2462	12.942	11.12

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	10.715	10.30
6	2437	33.42	15.24
11	2462	10.423	10.18

802.11n (HT40)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
3	2422	7.638	8.83
6	2437	14.997	11.76
9	2452	7.295	8.63

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-14.53	8	Pass
6	2437	-14.59	8	Pass
11	2462	-14.76	8	Pass

802.11g

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-13.91	8	Pass
6	2437	-9.87	8	Pass
11	2462	-14.55	8	Pass

802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-15.58	8	Pass
6	2437	-10.96	8	Pass
11	2462	-16.81	8	Pass

802.11n (HT40)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
3	2422	-20.37	8	Pass
6	2437	-17.17	8	Pass
9	2452	-19.23	8	Pass

Spectrum Plot of Worst Value


802.11b: CH1

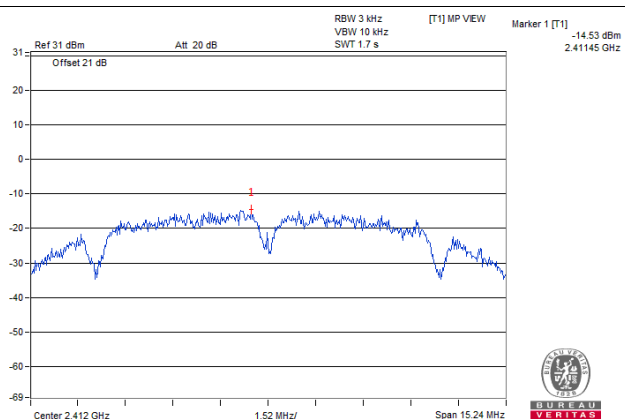


802.11g: CH6

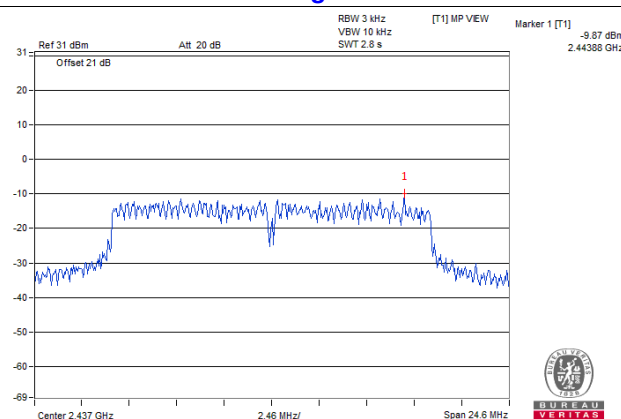

802.11n (HT20): CH6

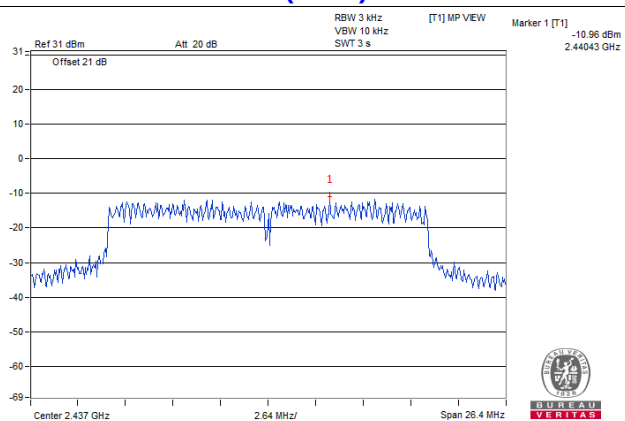

802.11n (HT40): CH6

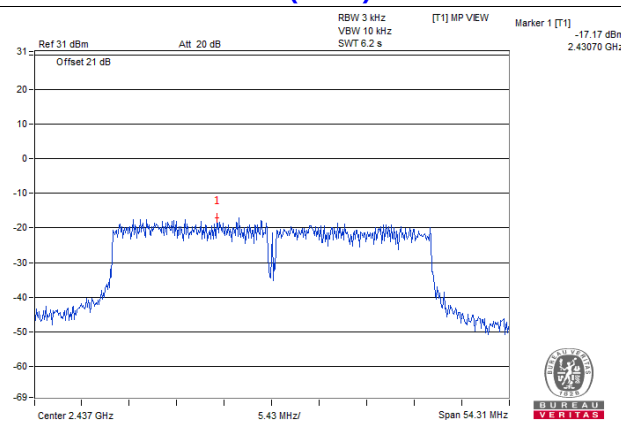


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

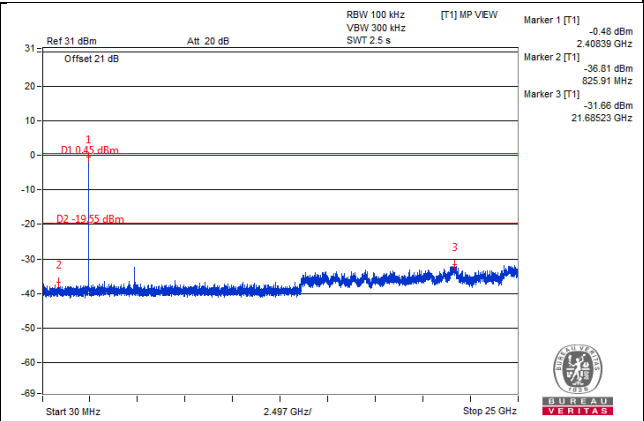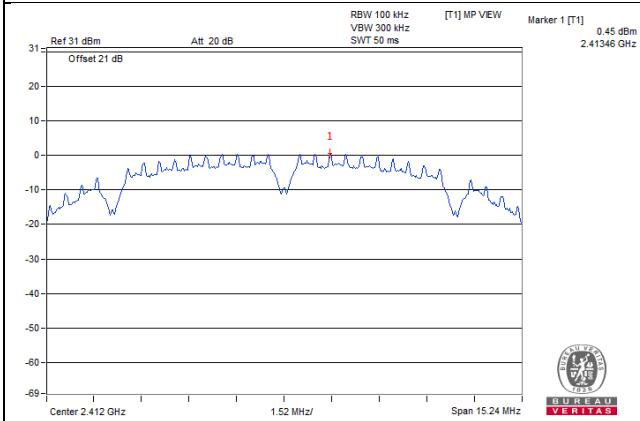


CH 6

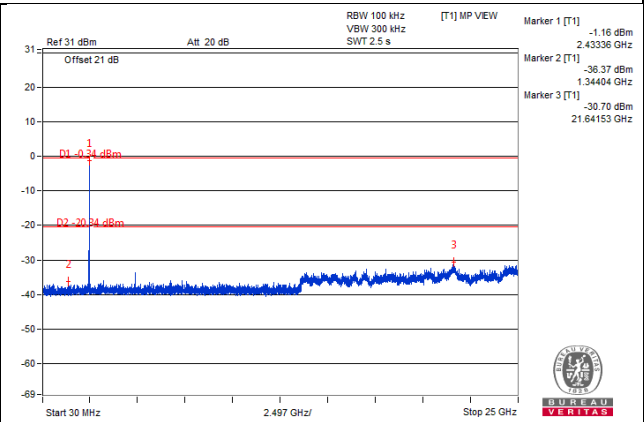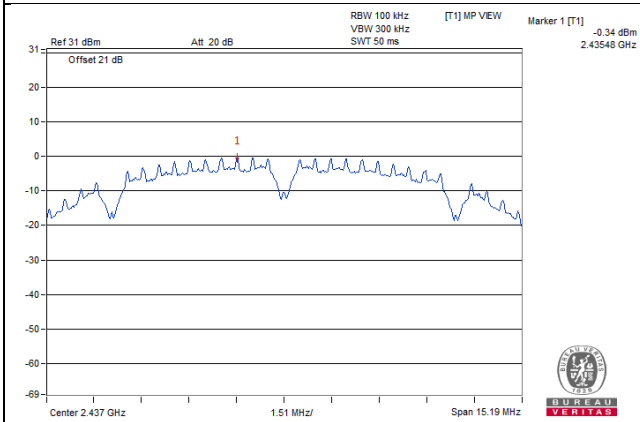


CH 11

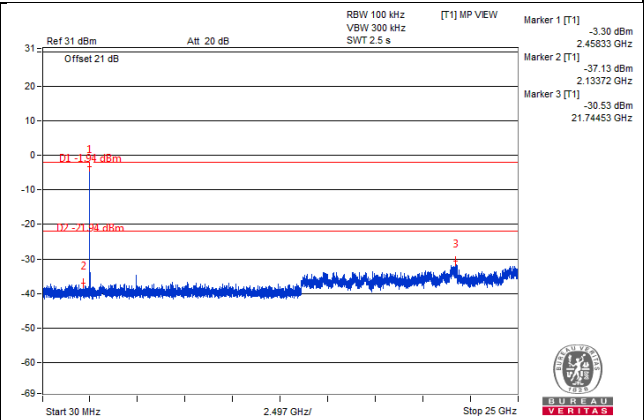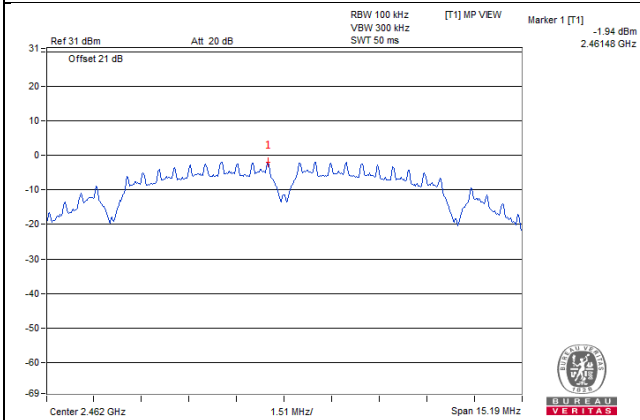

CH 1 Band edge


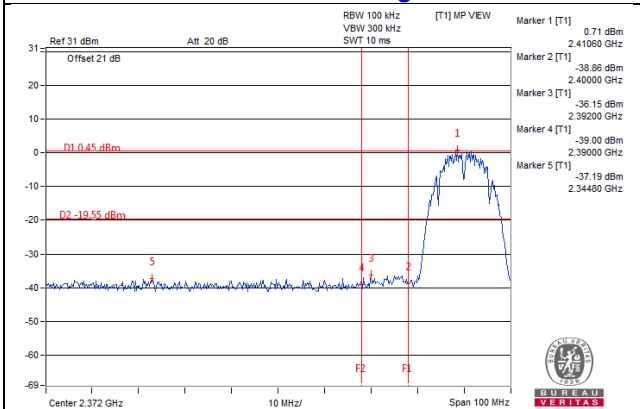


CH 11 Band edge


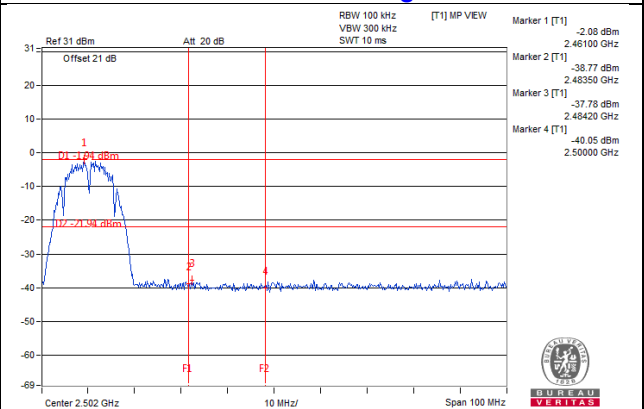


802.11g



CH 1

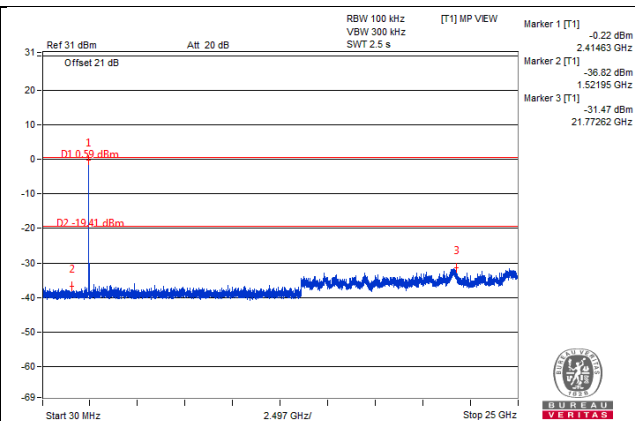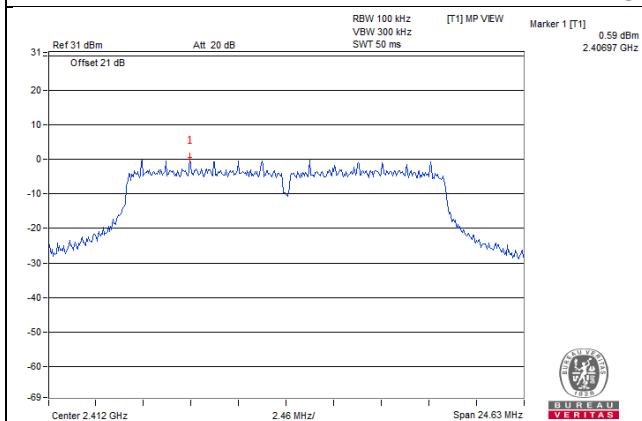


CH 6

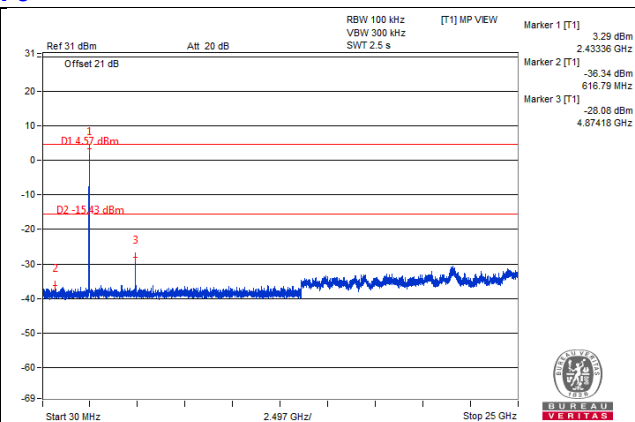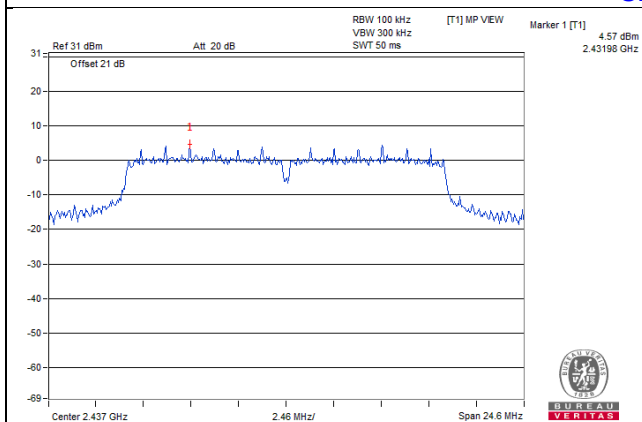


CH 11

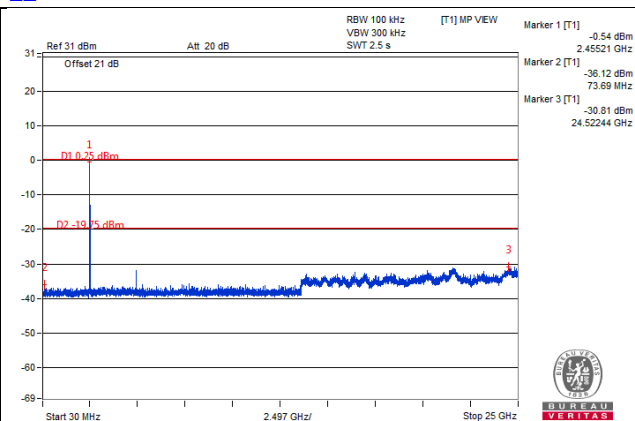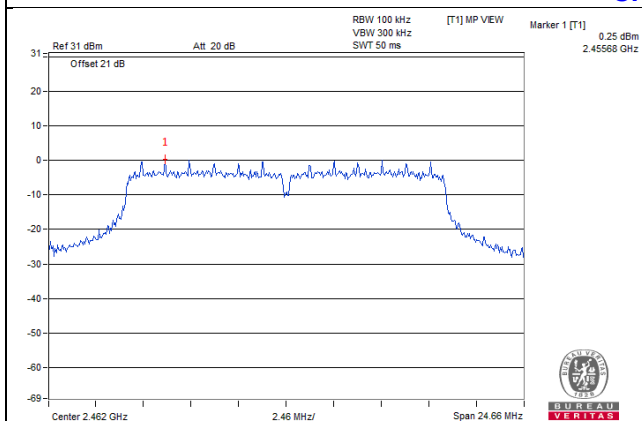

CH 1 Band edge


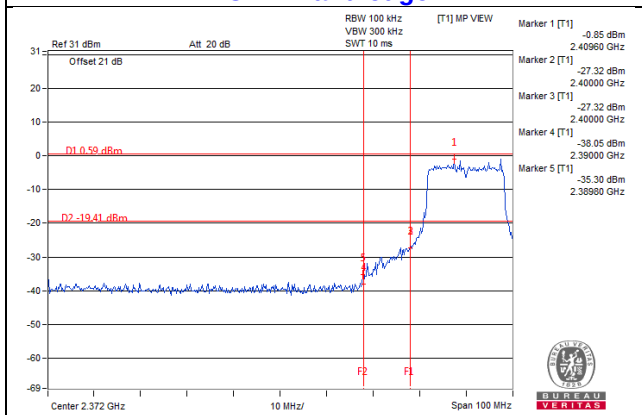


CH 11 Band edge


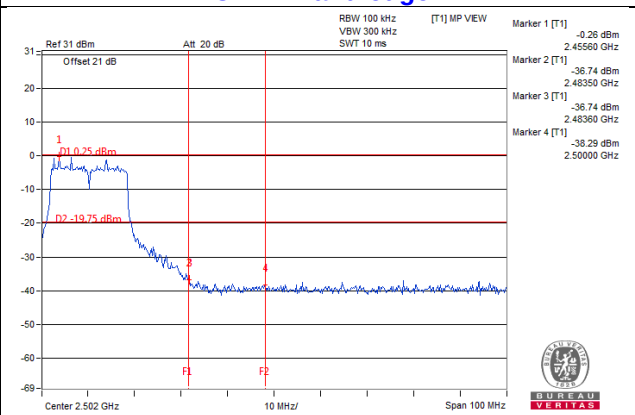


802.11n (HT20)



CH 1

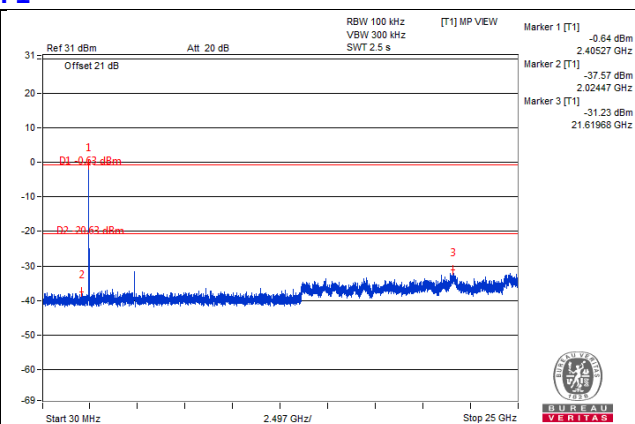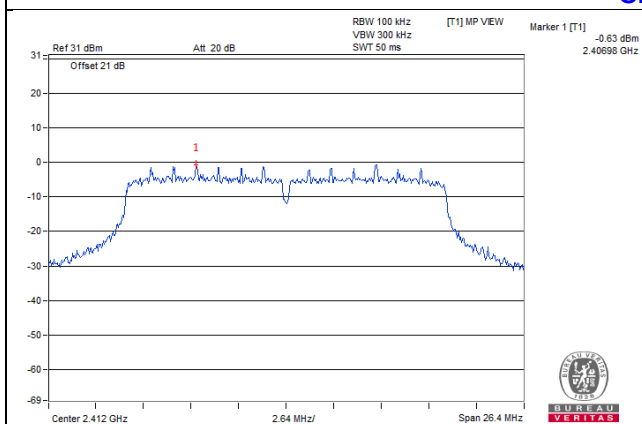


CH 6

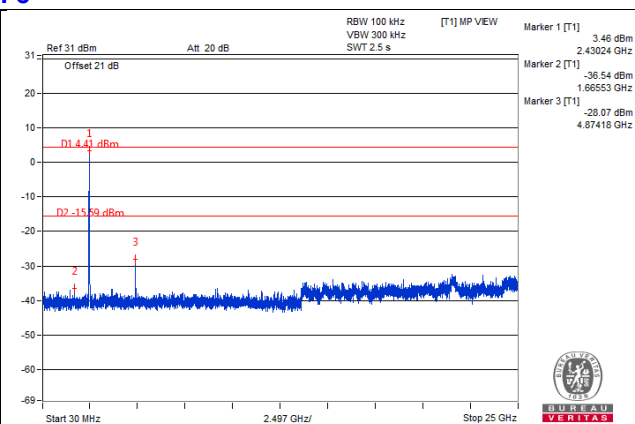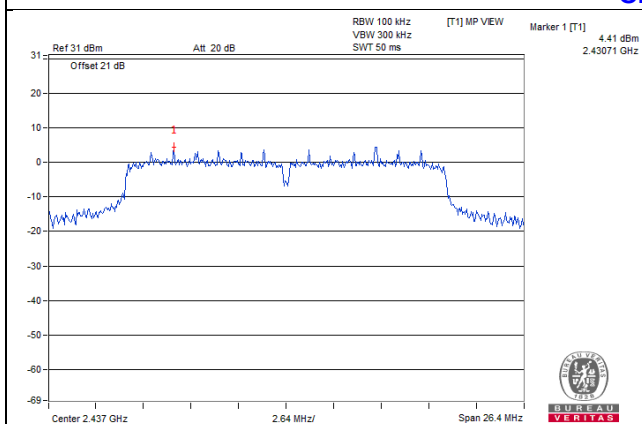


CH 11

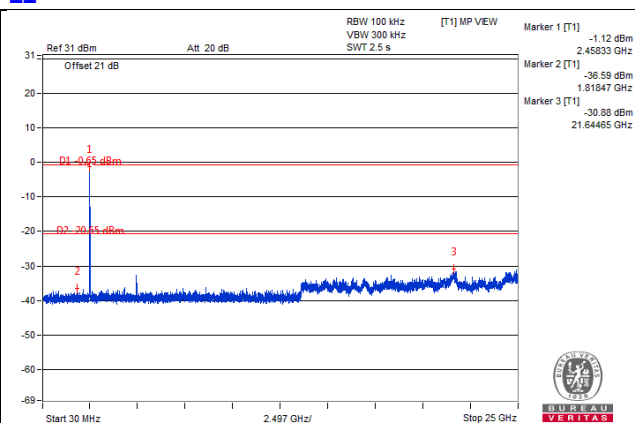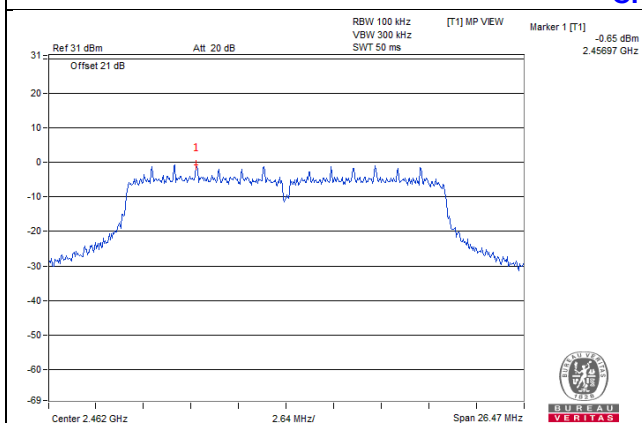

CH 1 Band edge


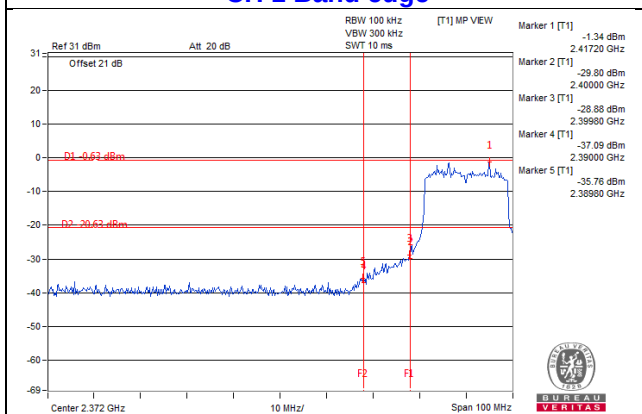


CH 11 Band edge


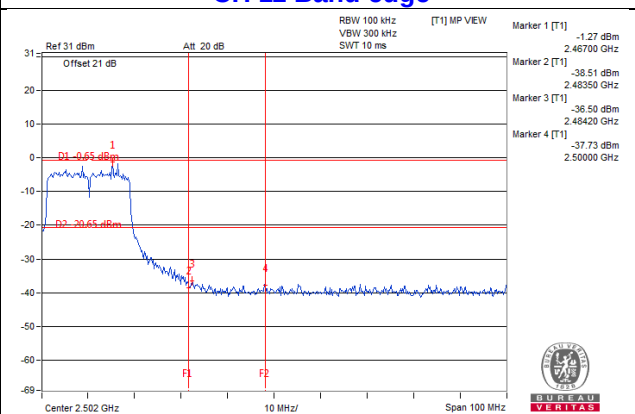


802.11n (HT40)



CH 3

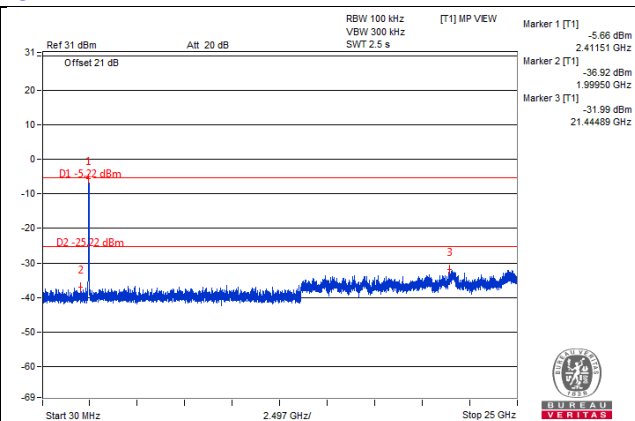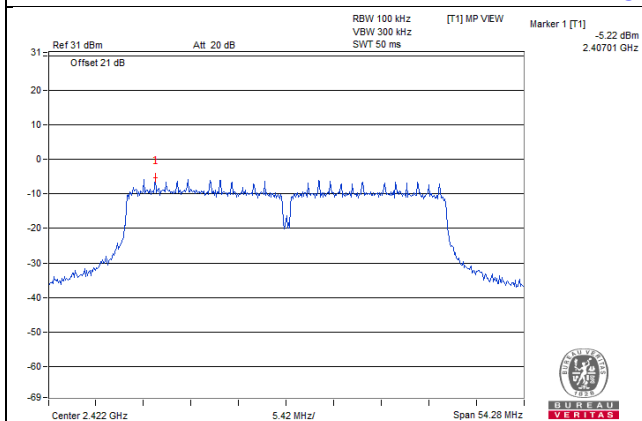


CH 6

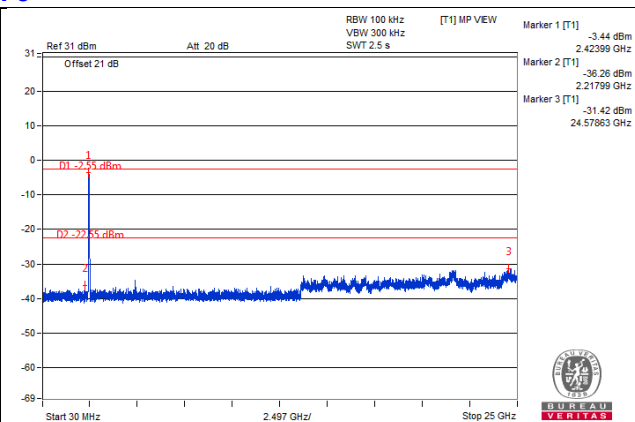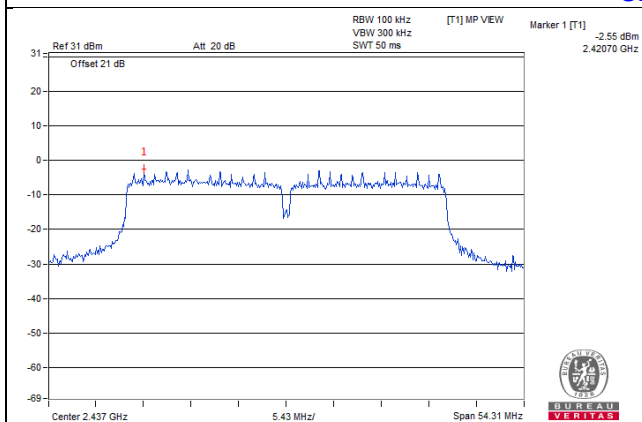


CH 9

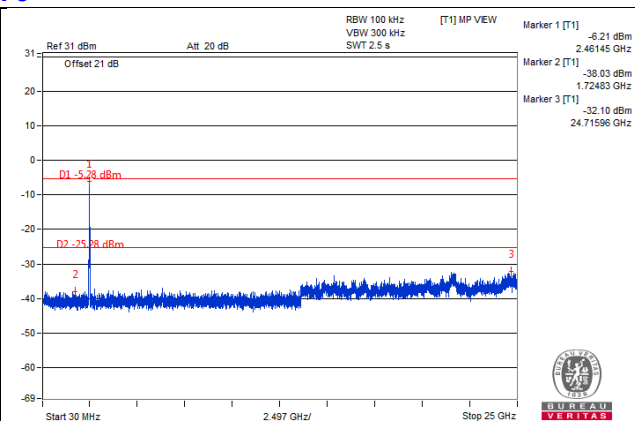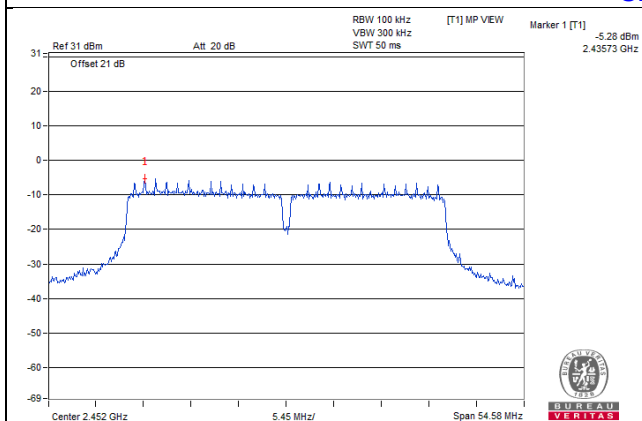

CH 3 Band edge

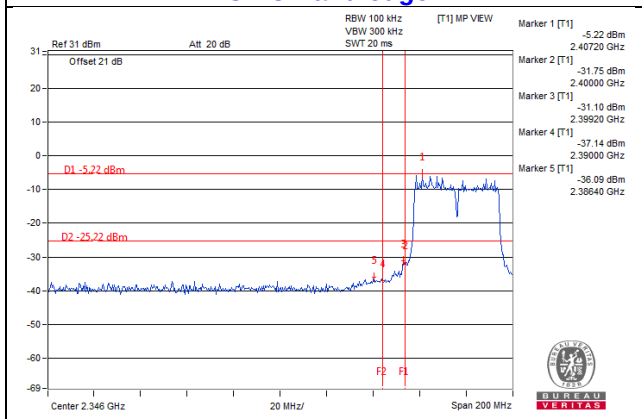

CH 9 Band edge

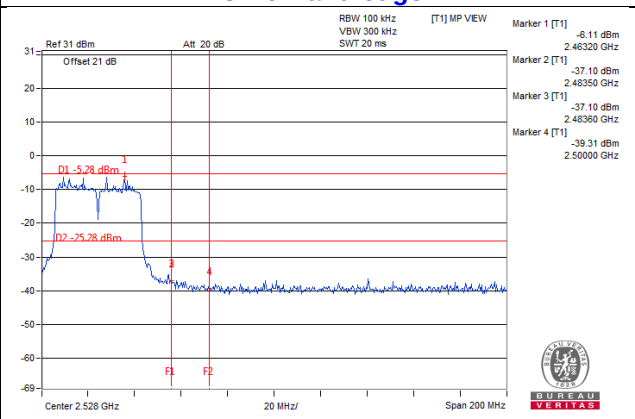

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---