


TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
1736.200000	7.28	25.89	
2146.933333	-43.73	-39.50	Fundamental
2980.533333	-44.25	-40.69	
6939.000000	-42.96	-36.00	
13366.500000	-43.76	-41.36	
17889.000000	-46.17	-39.36	

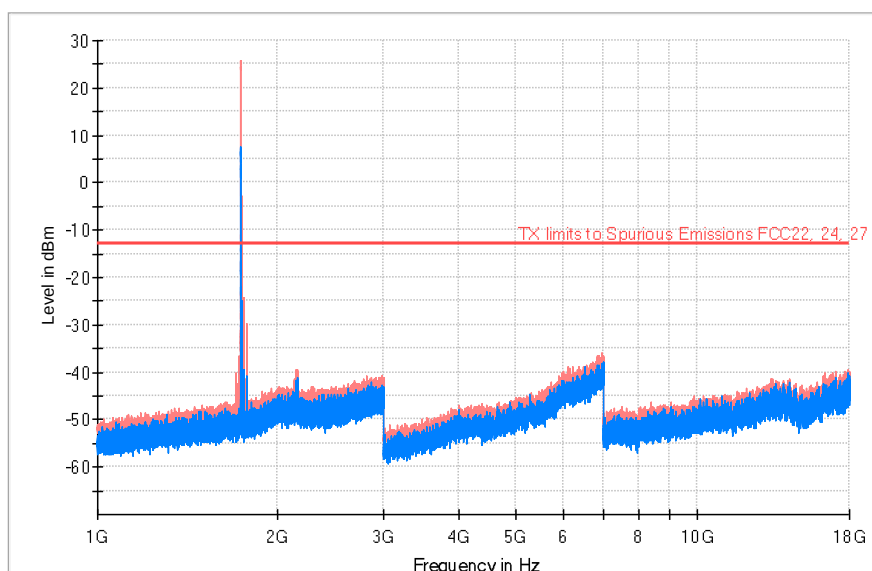


— PK+_MAXH — PK+_CLRWR — TX limits to Spurious Emissions FCC22, 24, 27

TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 18-40 GHz

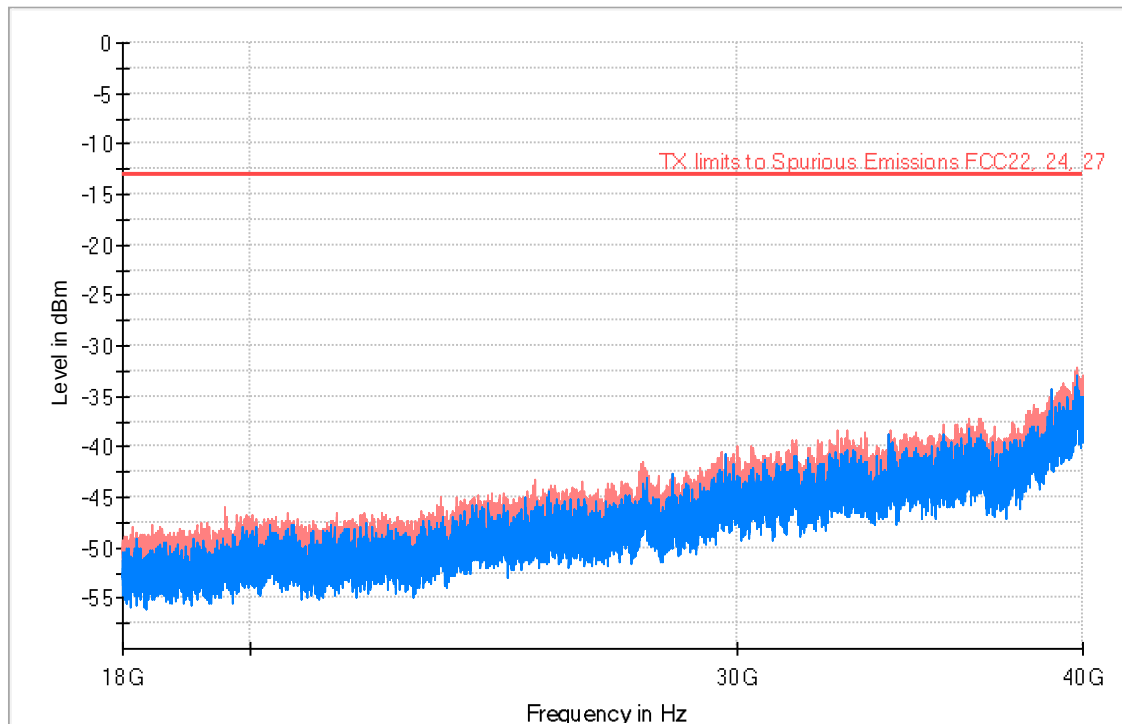

— PK+_MAXH — PK+_CLRWR — TX limits to Spurious Emissions FCC22, 24, 27

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#02 (Band 7)
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 15 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.

No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.


LTE QPSK MODULATION.

TEST RESULTS (Cont):	Lowest Channel
----------------------	----------------

Lowest Channel. RB = 1. Offset = 0. BW = 15 MHz

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
30.323333	-64.01	-59.95
943.675333	-56.19	-48.37

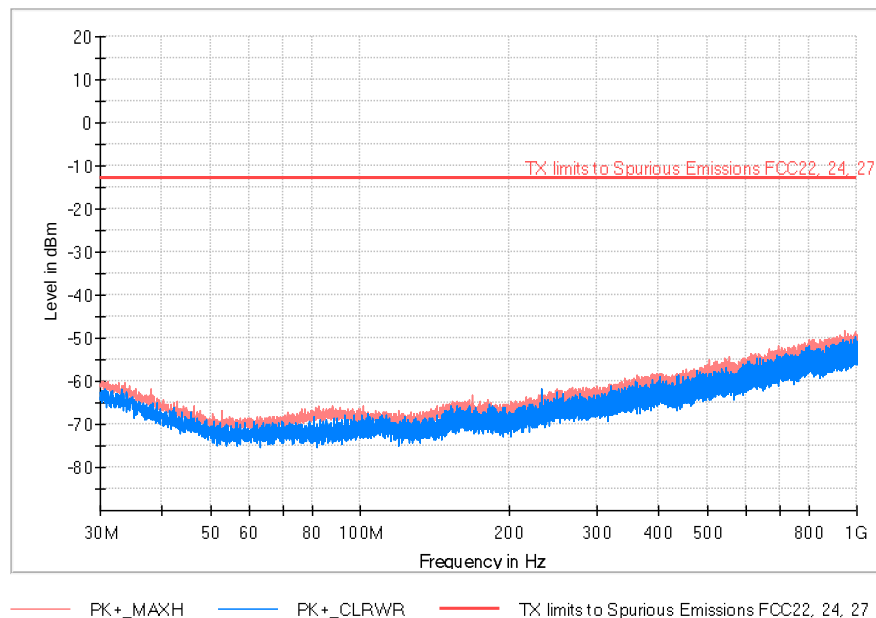


TEST RESULTS (Cont):

Lowest Channel

FREQUENCY RANGE: 1-18 GHz


Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
2072.266667	-46.92	-33.09	
2500.800000	-0.73	24.89	Fundamental
2631.333333	-47.29	-40.09	
6963.500000	-42.18	-36.47	
14264.500000	-46.91	-41.40	
17958.000000	-43.27	-39.98	

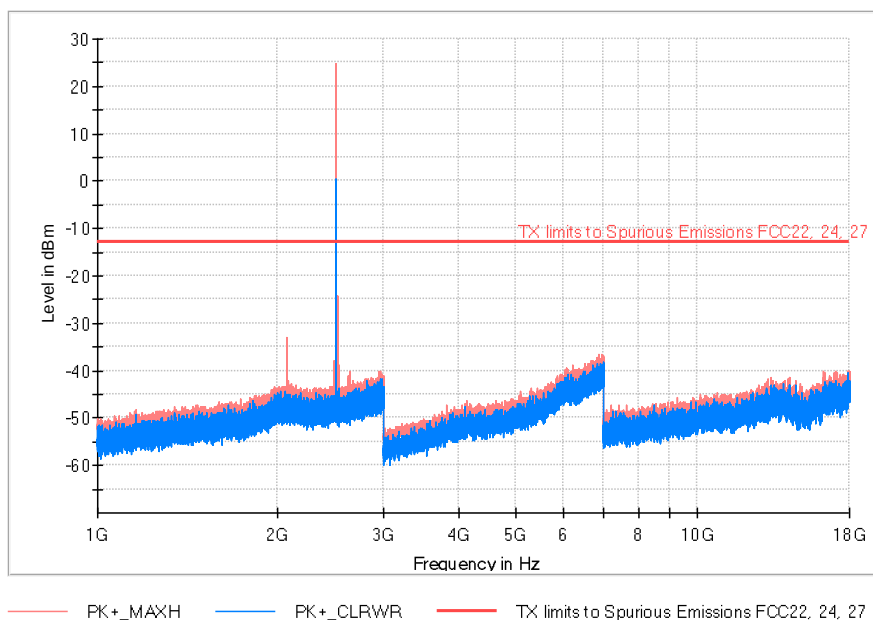

TEST RESULTS (Cont):

Lowest Channel

FREQUENCY RANGE: 18-40 GHz

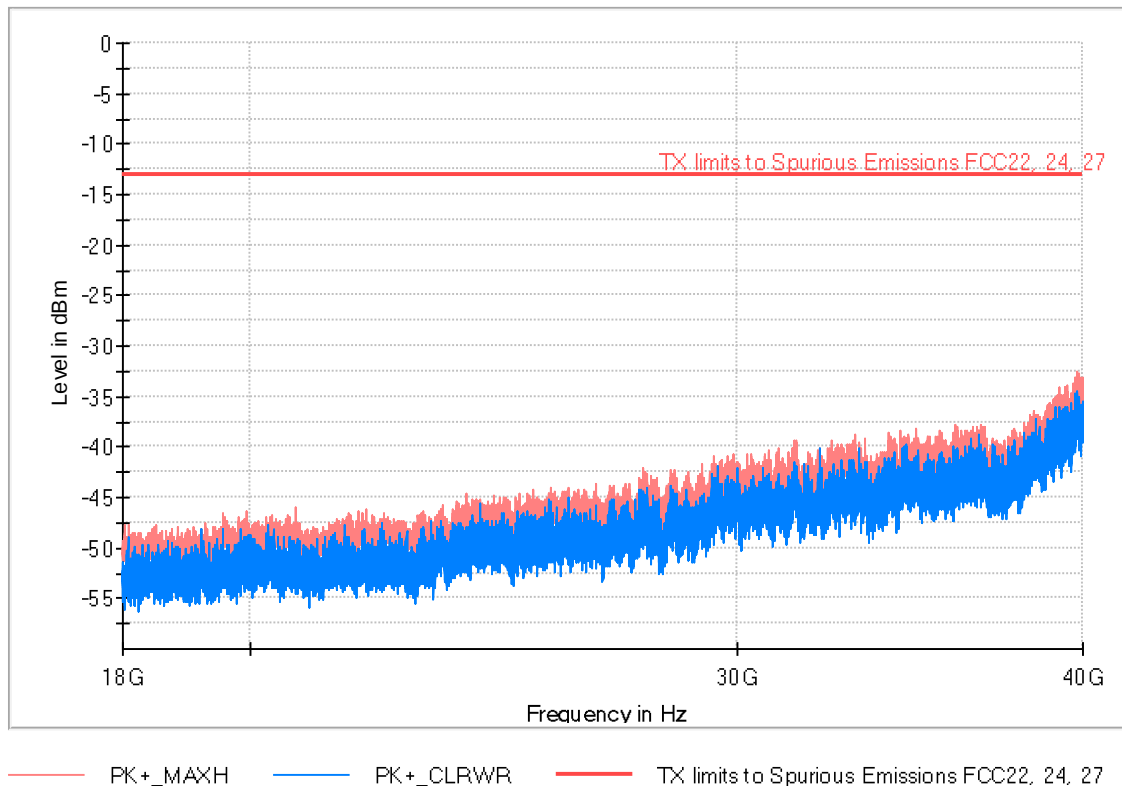


TEST RESULTS (Cont):

Middle Channel

Middle Channel RB = 1. Offset = 0. BW = 15 MHz

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
31.552000	-65.75	-58.53
996.605000	-55.43	-48.33

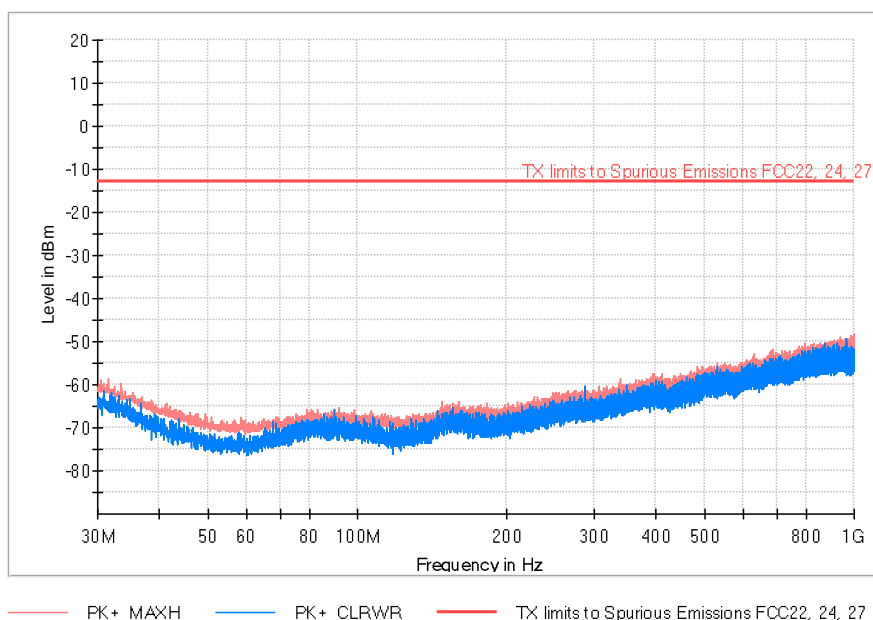


TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 1-18 GHz


Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
2528.400000	-3.77	25.32	Fundamental
2951.200000	-43.23	-40.78	
6971.500000	-41.82	-36.10	
14244.000000	-46.27	-41.10	
17957.000000	-44.38	-39.28	

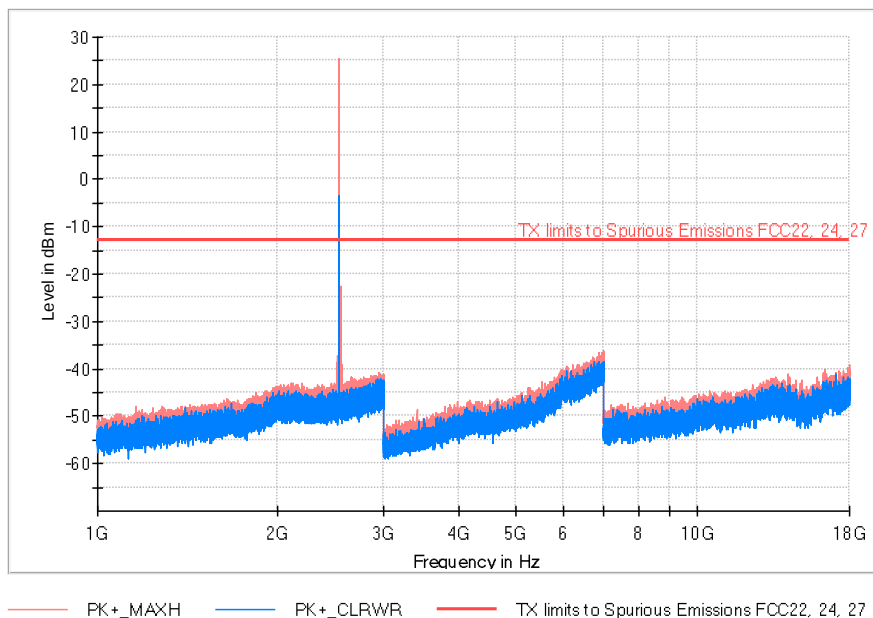

TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 18-40 GHz

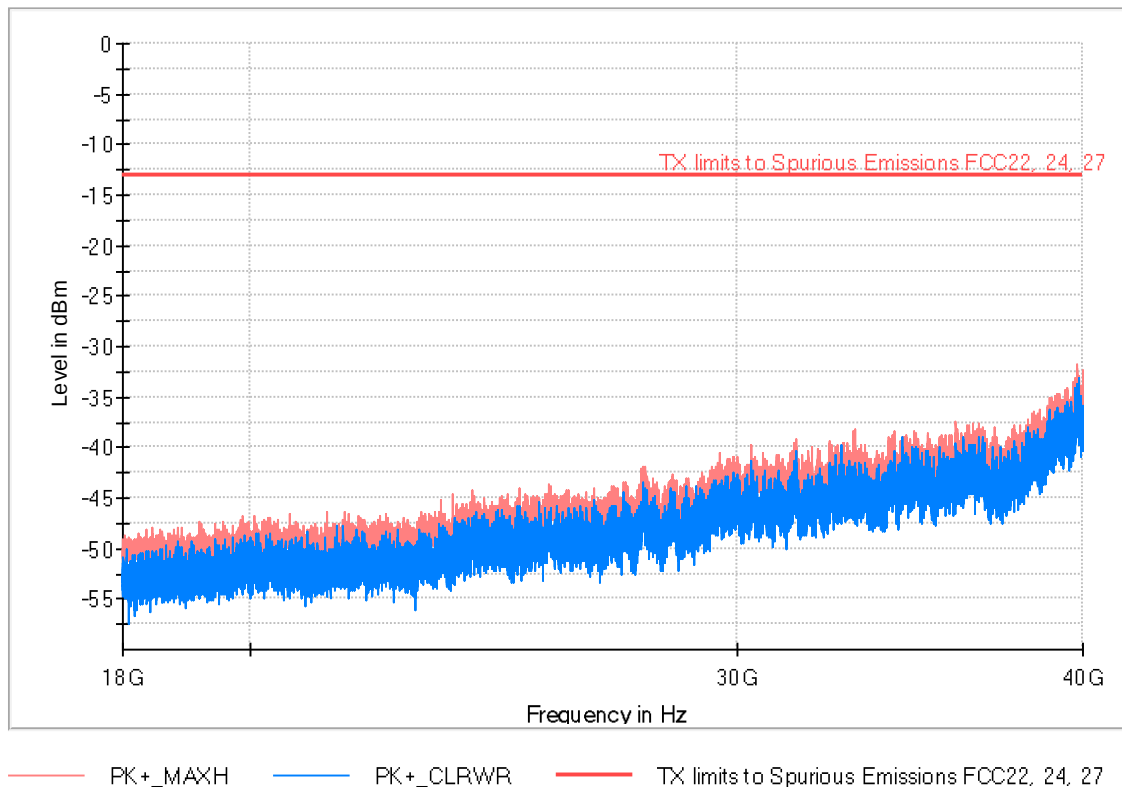


TEST RESULTS (Cont):

Highest Channel

Highest Channel RB = 1. Offset = 0. BW = 15 MHz

FREQUENCY RANGE: 30MHz-1 GHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)
30.485000	-63.59	-59.04
982.443000	-54.77	-49.15

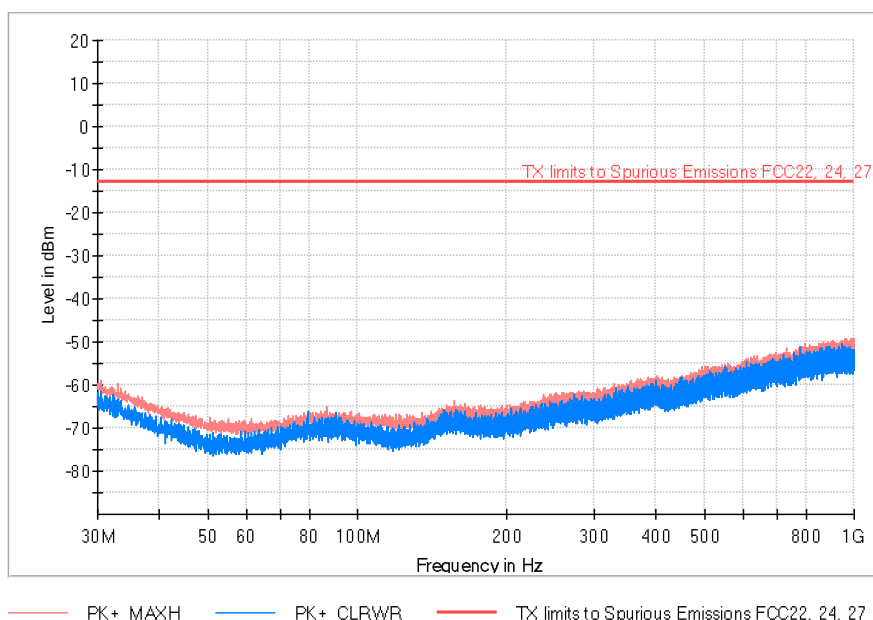


TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 1-18 GHz


Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
2555.866667	-3.96	25.46	Fundamental
2911.533333	-48.95	-40.96	
6986.000000	-40.31	-36.09	
14270.000000	-47.38	-41.22	
17921.000000	-44.00	-39.92	

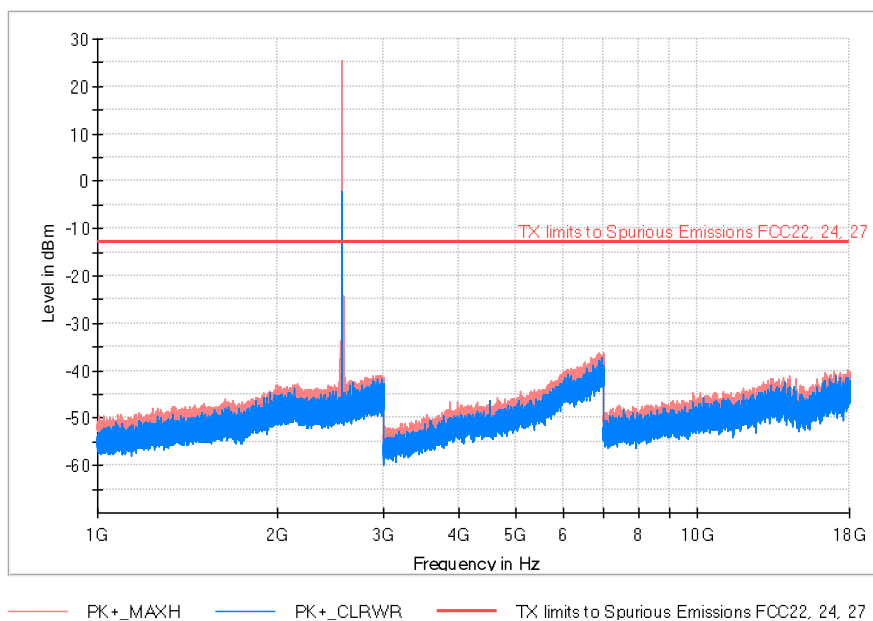

TEST RESULTS(Cont.):

High Channel

FREQUENCY RANGE: 18-40 GHz

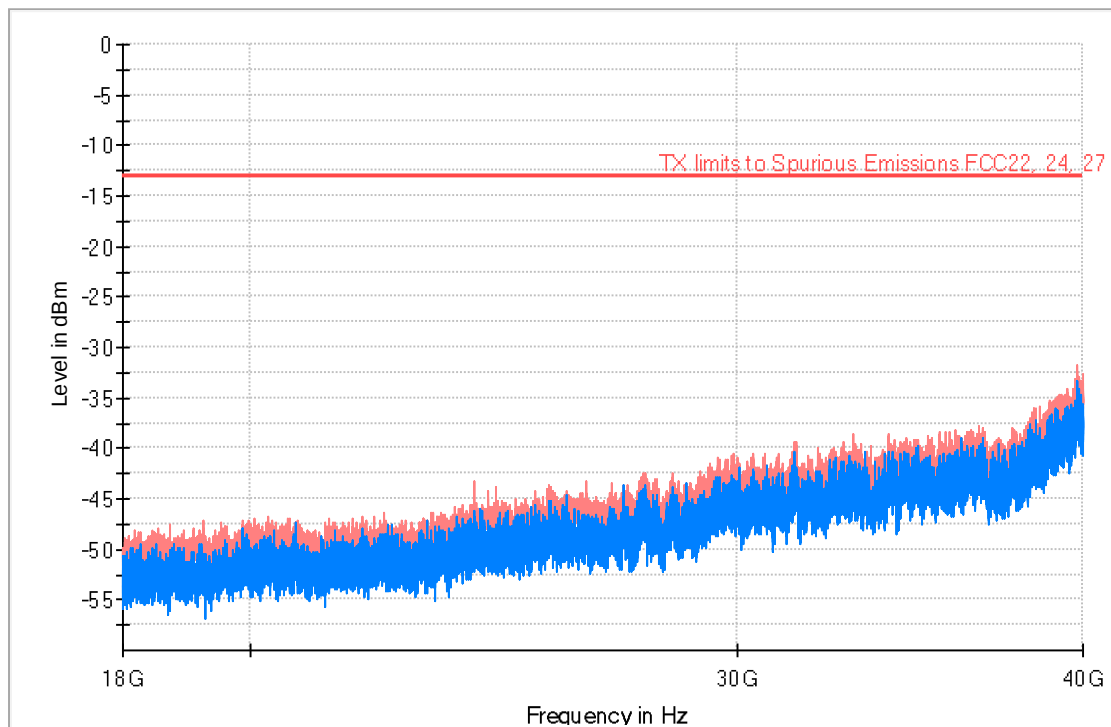

PK+_MAXH PK+_CLRWR TX limits to Spurious Emissions FCC22, 24, 27

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#03 (Band 12)
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 3 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.


No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 3 MHz

TEST RESULTS (Cont):	Low Channel
----------------------	-------------

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
30.452667	-65.09	-59.40	
699.203000	4.33	18.43	Fundamental
731.051333	-47.86	-34.95	
880.948667	-55.21	-48.50	

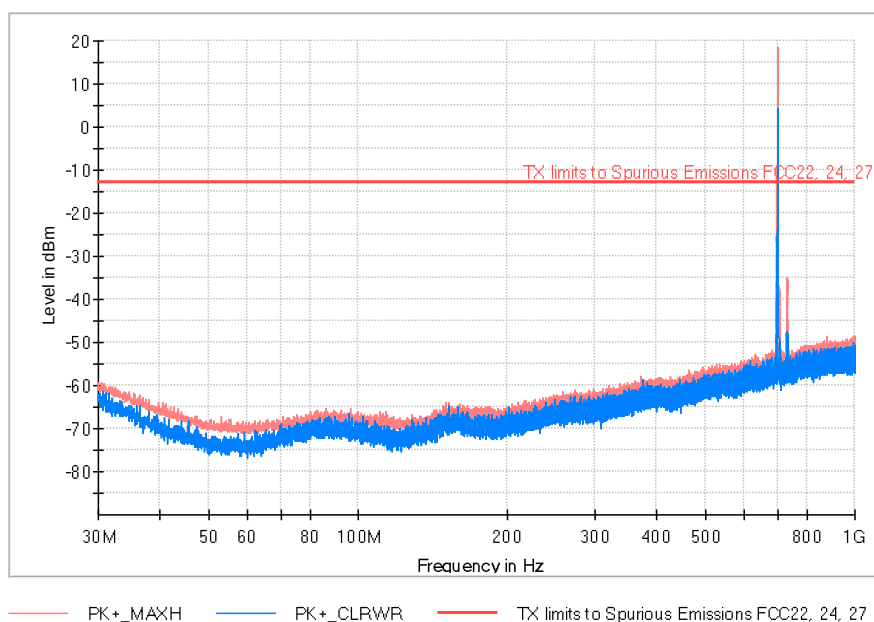


TEST RESULTS (Cont):

Low Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)
2983.200000	-46.36	-40.76
6979.500000	-40.70	-36.50
14269.000000	-45.38	-40.00
17022.000000	-44.60	-39.00

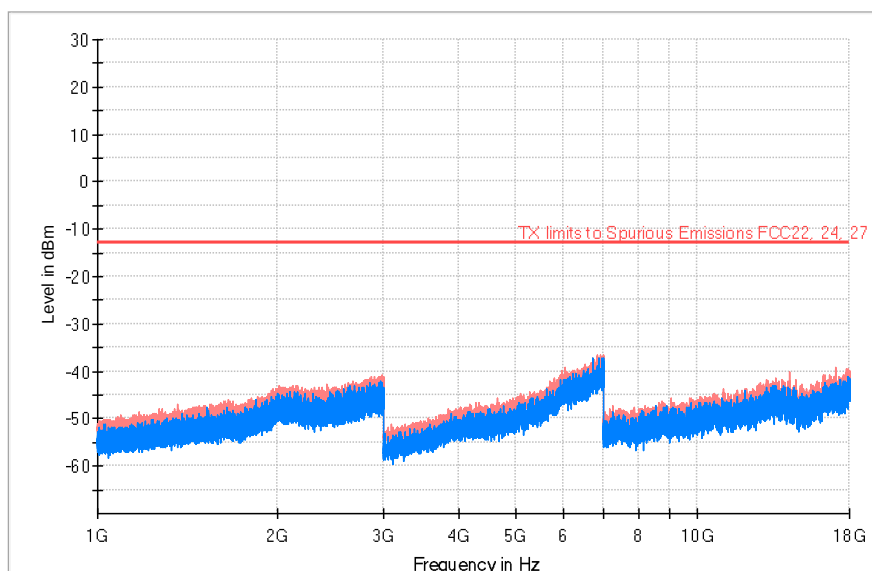


PK+ _MAXH PK+ _CLRWR TX limits to Spurious Emissions FCC22, 24, 27

TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
30.323333	-64.53	-59.95	
444.804333	-62.70	-47.85	Fundamental
706.154667	14.41	18.15	
737.679667	-40.13	-35.36	

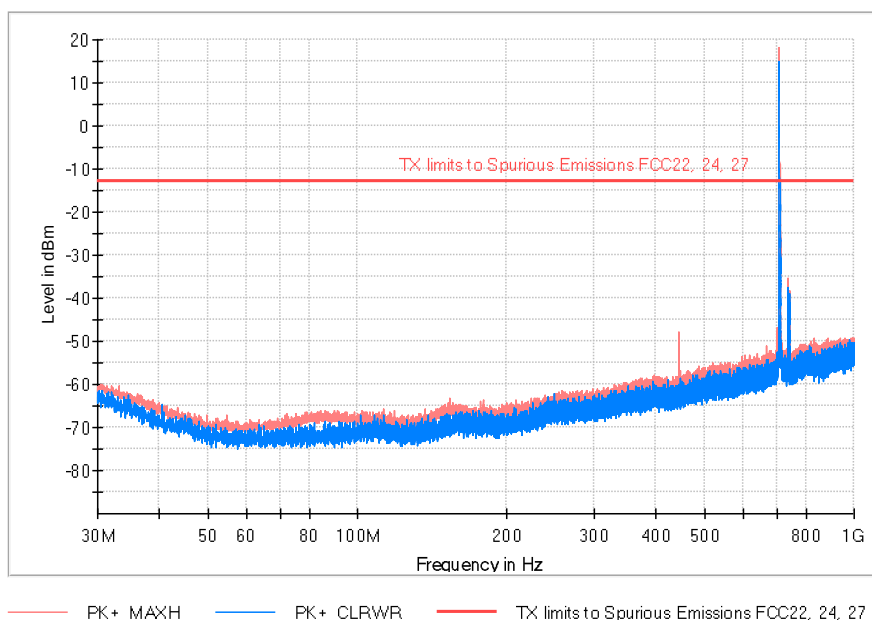


TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)
2991.133333	-45.58	-40.66
6975.500000	-41.85	-36.57
14284.500000	-44.13	-41.66
17949.500000	-43.27	-37.88

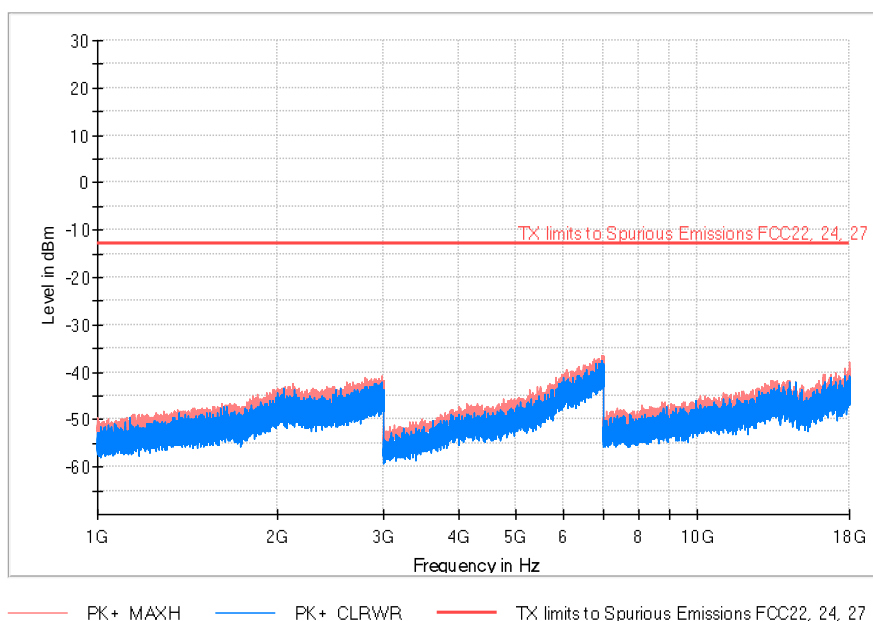


TEST RESULTS(Cont.):

High Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
30.776000	-63.80	-59.33	
263.576000	-65.30	-46.99	
713.203333	15.70	17.35	Fundamental
745.342667	-42.49	-36.29	

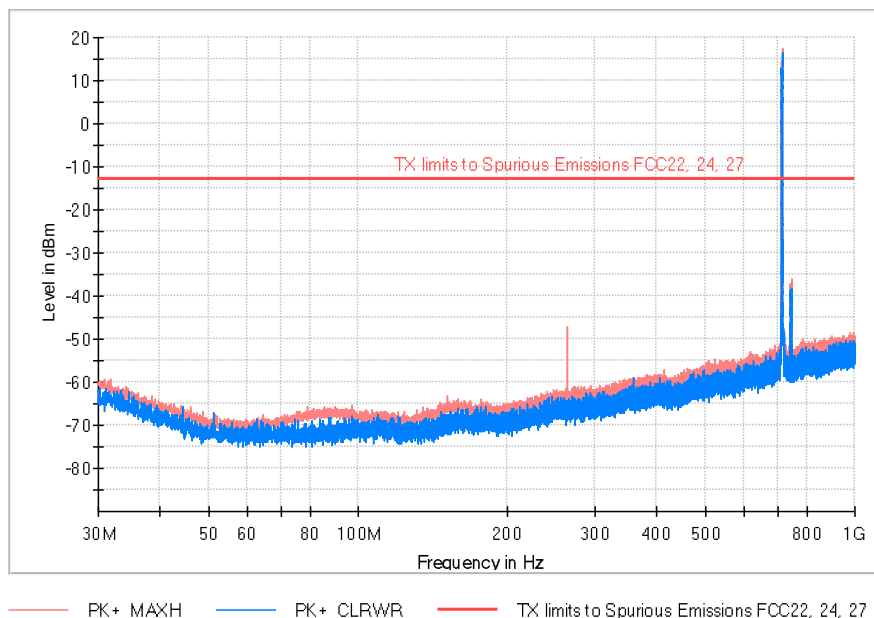


TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2983.200000	-46.36	-40.76
6979.500000	-40.70	-36.50
14269.000000	-45.38	-40.00
17022.000000	-44.60	-39.00

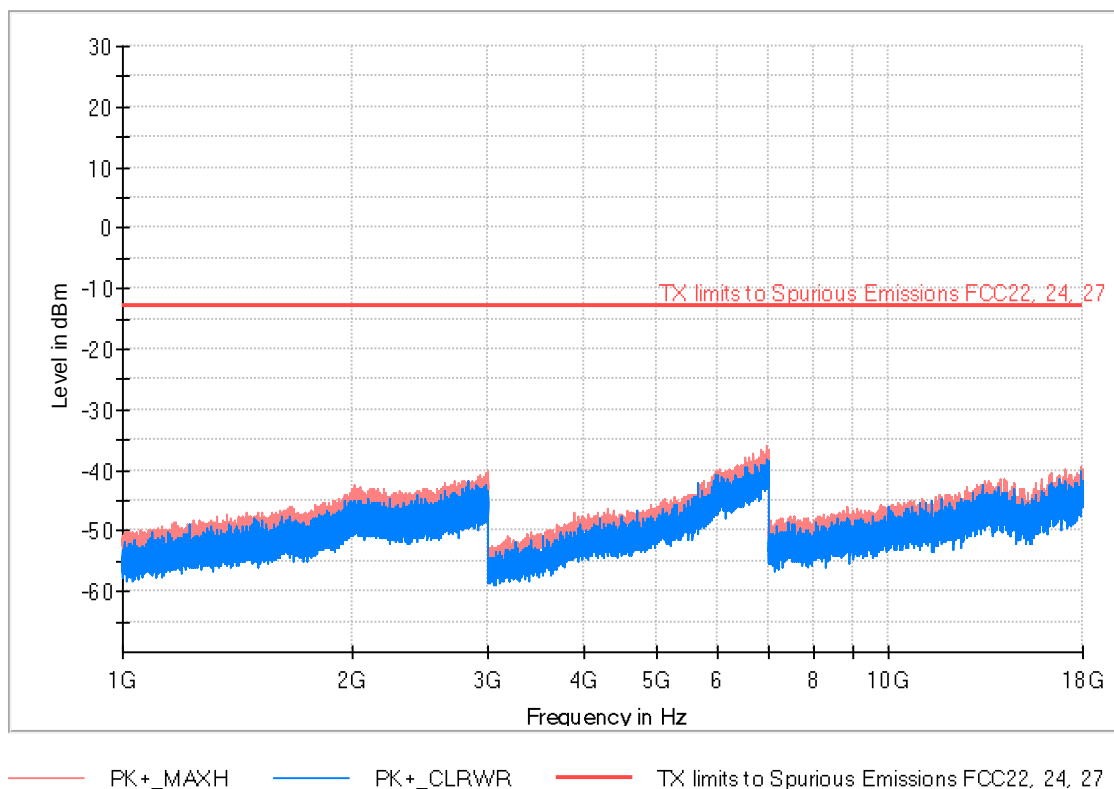

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#04 (Band 13)
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 5 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.


No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 5 MHz

TEST RESULTS (Cont):	Low Channel
-----------------------------	-------------

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
30.161667	-63.79	-58.62	
748.834667	-47.28	-36.12	
777.320333	16.62	17.61	Fundamental
953.698667	-54.32	-48.25	

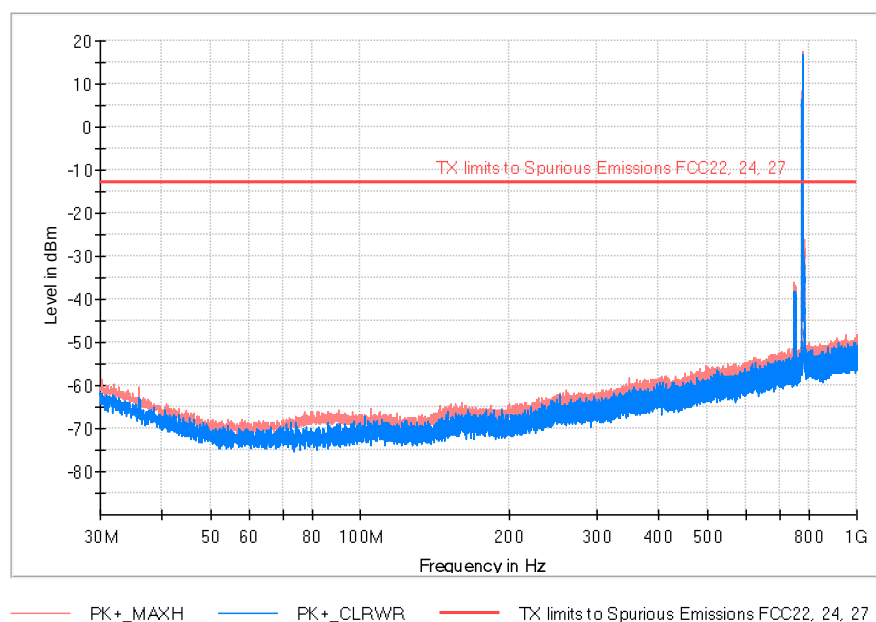


TEST RESULTS (Cont):

Low Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)
2966.666667	-45.88	-40.79
6995.000000	-40.87	-36.64
13390.500000	-46.20	-41.87
17358.000000	-45.47	-39.52

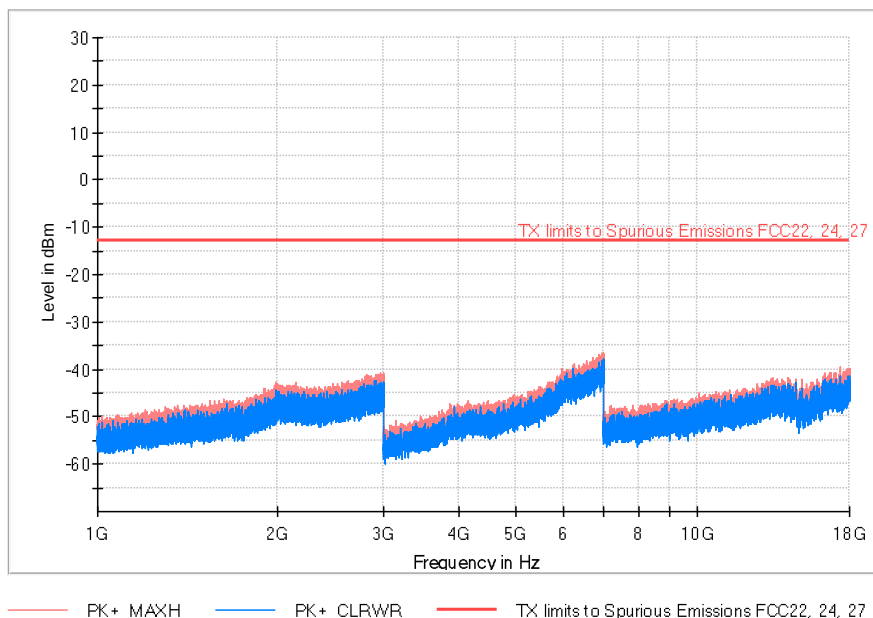


TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
31.713667	-65.74	-59.16	
752.520667	-48.03	-36.61	Fundamental
779.842333	2.93	18.24	
984.641667	-55.54	-48.62	

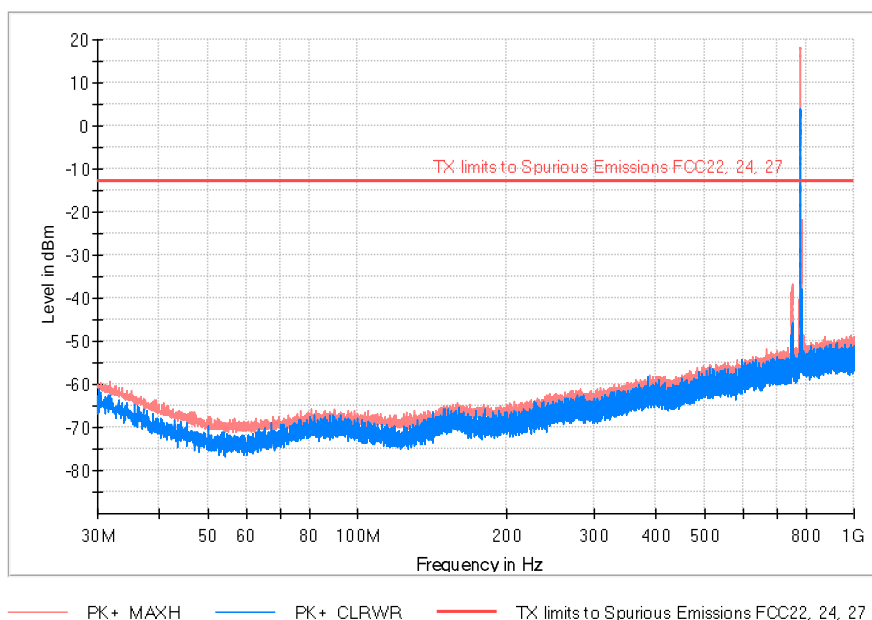


TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2971.533333	-46.96	-40.90
6970.500000	-41.01	-35.06
13395.500000	-45.35	-40.95
17953.000000	-43.86	-39.04

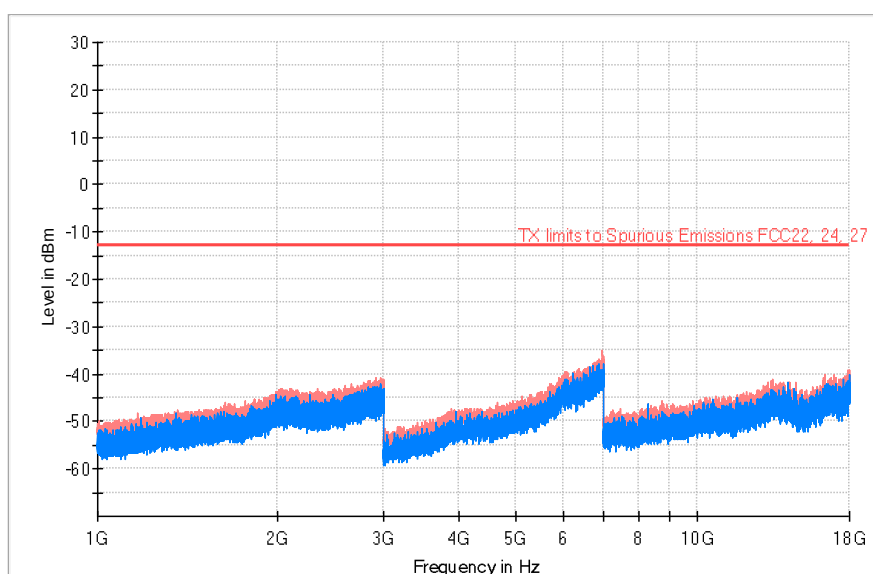


PK+_MAXH PK+_CLRWR TX limits to Spurious Emissions FCC22, 24, 27

TEST RESULTS(Cont.):

High Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
30.646667	-63.28	-59.36	
752.714667	-57.45	-35.51	
782.396667	4.29	19.23	Fundamental
997.413333	-54.32	-48.14	

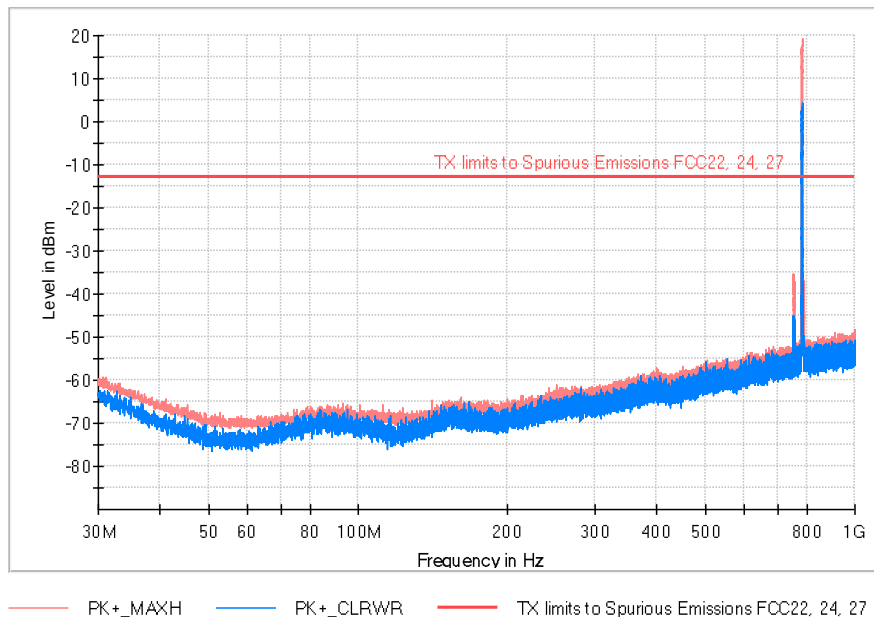


TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)
2960.200000	-46.22	-40.44
6986.000000	-39.04	-36.46
13809.500000	-47.36	-41.42
17948.000000	-42.94	-38.67

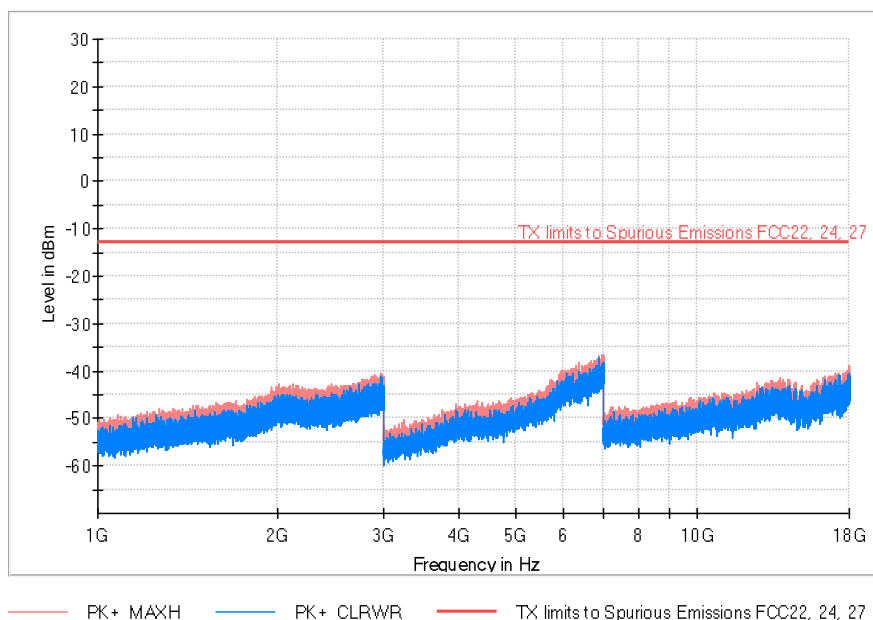

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#05 (Band 66)
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 20 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.


No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 20 MHz

TEST RESULTS (Cont):	Low Channel
-----------------------------	-------------

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
30.420333	-64.54	-58.67	
986.808000	-53.14	-48.23	

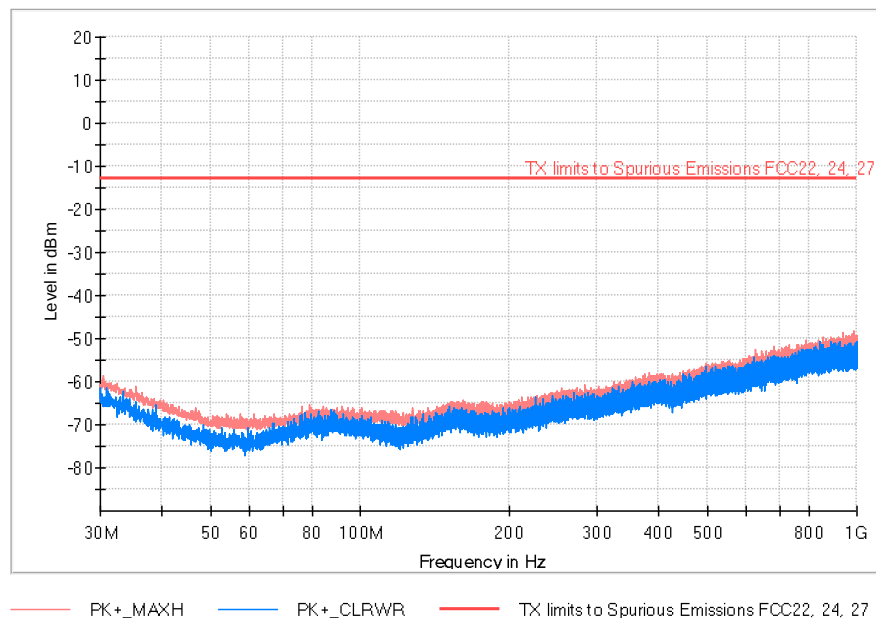


TEST RESULTS (Cont):

Low Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
1711.133333	5.30	25.16	
2116.733333	-44.57	-38.42	Fundamental
2956.200000	-47.42	-40.61	
6991.500000	-41.50	-36.57	
13348.000000	-46.45	-41.36	
17909.000000	-45.84	-38.88	

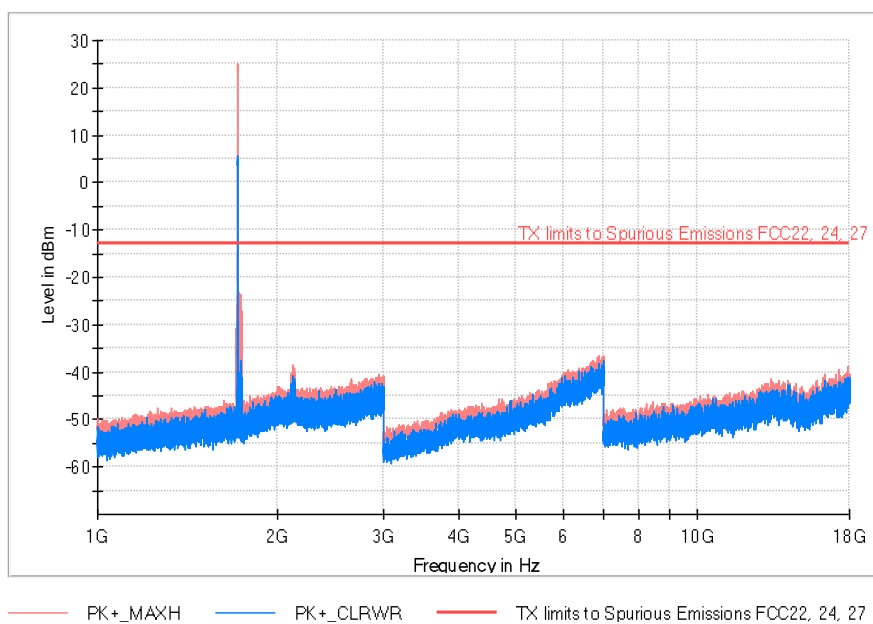


TEST RESULTS(Cont.):

Middle Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
30.129333	-61.55	-59.76	
718.312000	-58.38	-49.97	
990.397000	-54.41	-48.81	

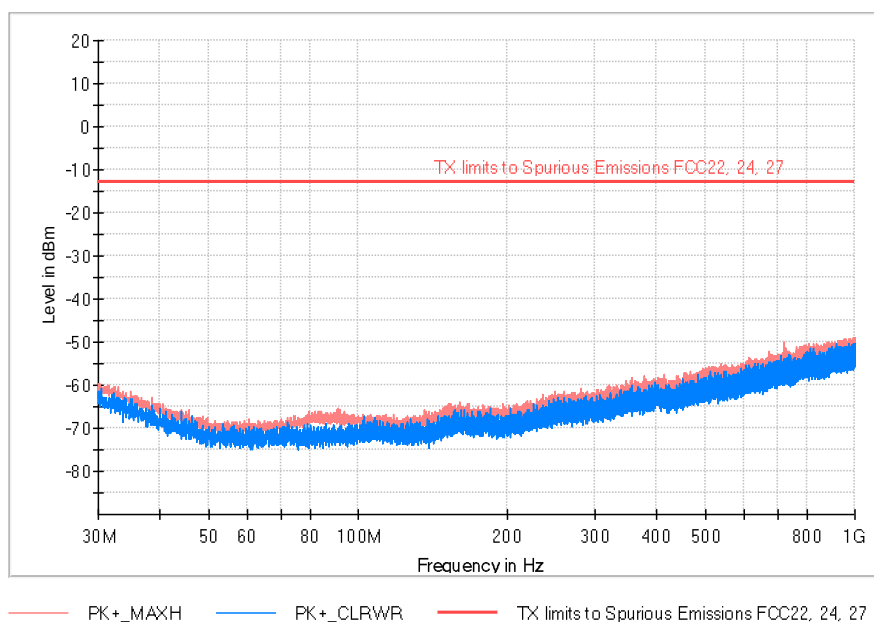


TEST RESULTS (Cont):

Middle Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
1746.000000	11.67	25.96	
2151.600000	-45.52	-39.27	Fundamental
2932.933333	-48.19	-40.78	
6977.500000	-40.68	-36.12	
14015.500000	-46.49	-41.22	
17919.000000	-44.07	-38.62	

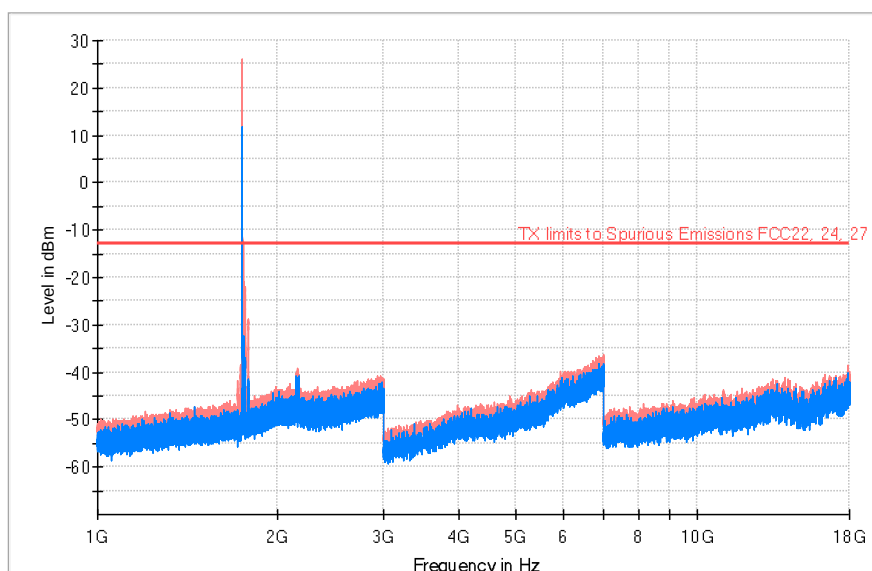


— PK+_MAXH — PK+_CLRWR — TX limits to Spurious Emissions FCC22, 24, 27

TEST RESULTS(Cont.):

High Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+ _CLRWR (dBm)	PK+ _MAXH (dBm)	Comment
30.549667	-64.41	-59.27	
999.967667	-53.61	-48.90	

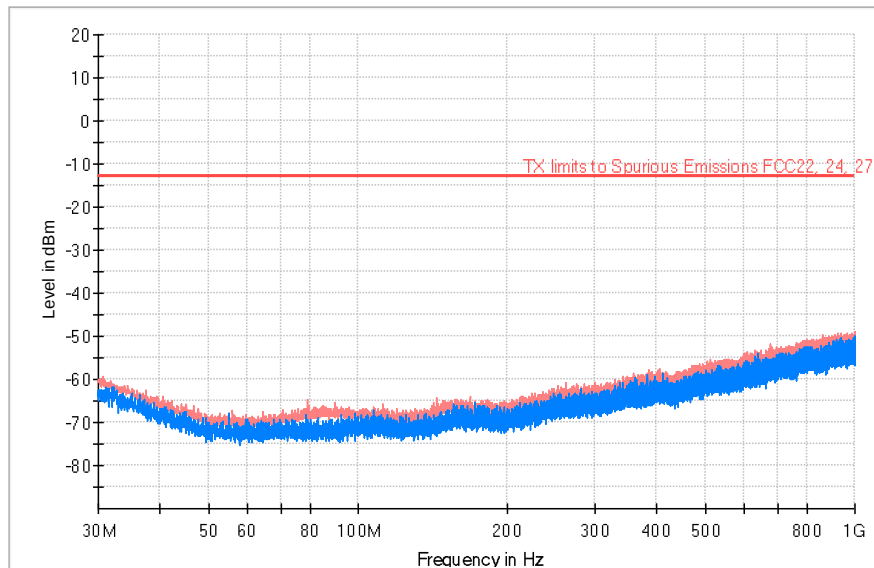


PK+ _MAXH PK+ _CLRWR TX limits to Spurious Emissions FCC22, 24, 27

TEST RESULTS (Cont):

High Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
1761.000000	8.84	25.65	
2167.800000	-42.30	-39.25	Fundamental
2981.600000	-46.05	-40.29	
6857.500000	-41.86	-34.98	
14297.000000	-47.47	-41.22	
17936.000000	-43.37	-39.72	

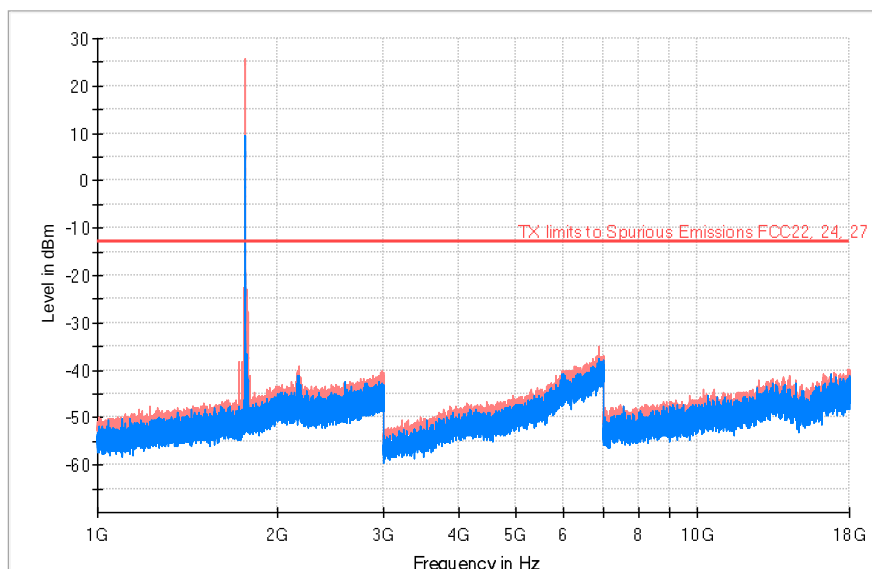

PK+_MAXH PK+_CLRWR TX limits to Spurious Emissions FCC22, 24, 27

Appendix B: Test Results for 3G

Appendix B Content

PRODUCT INFORMATION385

DESCRIPTION OF TEST CONDITIONS386

TEST B.1: RF OUTPUT POWER.....387

TEST B.2: MODULATION CHARACTERISTICS391

TEST B.3: FREQUENCY STABILITY393

TEST B.4: OCCUPIED BANDWIDTH395

TEST B.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....399

TEST B.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES.....403

TEST B.7: RADIATED EMISSIONS.....406

PRODUCT INFORMATION

The following information is provided by the client

Information	Description
Modulation	WCDMA, HSPA
Maximum RF Output Power	24 dBm
Operation mode:	
- Operating Frequency Range	Band 4: 1710-1755 MHz
- Nominal Channel Bandwidth	Band 4: 5 MHz
Extreme operating conditions	
- Temperature range	T _{nom} = +15 to + 35 T _{min} = -30 T _{max} = +50
Antenna type	External attachable Antenna.
Antenna gain	4 dBi
Nominal Voltage	
- Supply Voltage	3.8 Vdc
- Type of power source	DC voltage from power supply.

DESCRIPTION OF TEST CONDITIONS

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

TEST CONDITIONS	DESCRIPTION			
TC#01 Band 4	<u>Power supply (V):</u> V _{nominal} = 3.8 Vdc			
	<u>Test Frequencies for Conducted tests:</u> -Lowest Channel: 1313 (1712.6 MHz) -Middle Channel: 1450 (1740 MHz) -Highest Channel: 1512 (1752.4 MHz)			
	<u>Test Frequencies for Radiated tests:</u>			
	Available Frequencies	Tested Frequency	Channel Bandwidth	Modulation
	1710 to 1755 MHz	1712.6 MHz	5 MHz	WCDMA
		1740 MHz		
1752.4 MHz				
Note: This device was tested under all channels and modulations. The worst case found in WCDMA modulation.				

TEST B.1: RF OUTPUT POWER

LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC §2.1046 and §27.50 / RSS-199 Clause 4.4

LIMITS

Fixed, mobile, and portable (hand-held) stations operating in the band are limited to 1-watt EIRP (30 dBm). Fixed stations operating in the band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.


The peak-to-average ratio (PAR) of the transmission shall not exceed 13 dB.

RSS-199 Clause 6.5

The equivalent isotropically radiated power (e.i.r.p.) for mobile and portable transmitters shall not exceed two watts.

The peak-to-average power ratio (PAPR) of the transmission shall not exceed 13 dB.

TEST SETUP

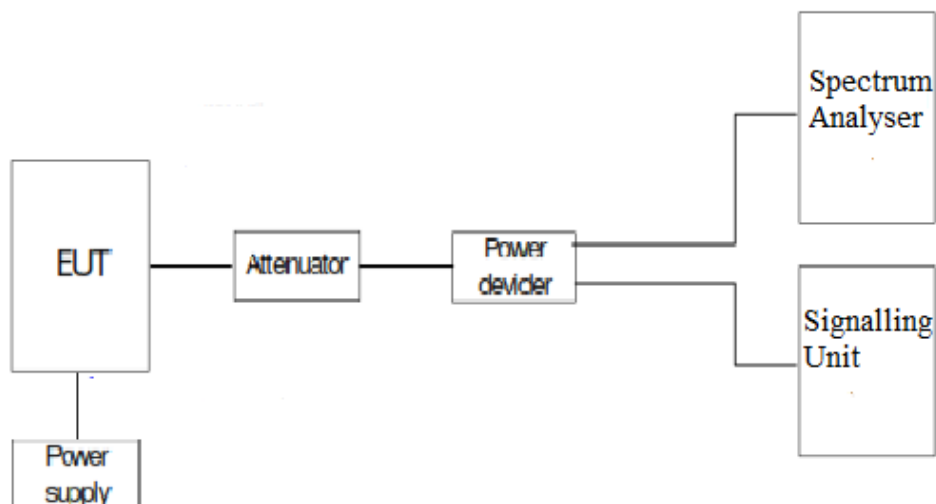

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

WCDMA Modulation:

Channel	Average power at antenna port (dBm)	Maximum declared antenna gain (dBi)	Maximum E.I.R.P. average power (dBm)	PAPR (dB)
Lowest	24.35	4.0	28.35	2.99
Middle	24.29	4.0	28.29	3.33
Highest	24.22	4.0	28.22	3.25
Measurement uncertainty (dB)			<±0.95	


HSPA Modulation:

Channel	Average power at antenna port (dBm)	Maximum declared antenna gain (dBi)	Maximum E.I.R.P. average power (dBm)
Lowest	21.6	4.0	25.6
Middle	22.5	4.0	26.5
Highest	22.29	4.0	26.29
Measurement uncertainty (dB)			<±0.95


TEST RESULTS (Cont):

WCDMA:

Lowest channel

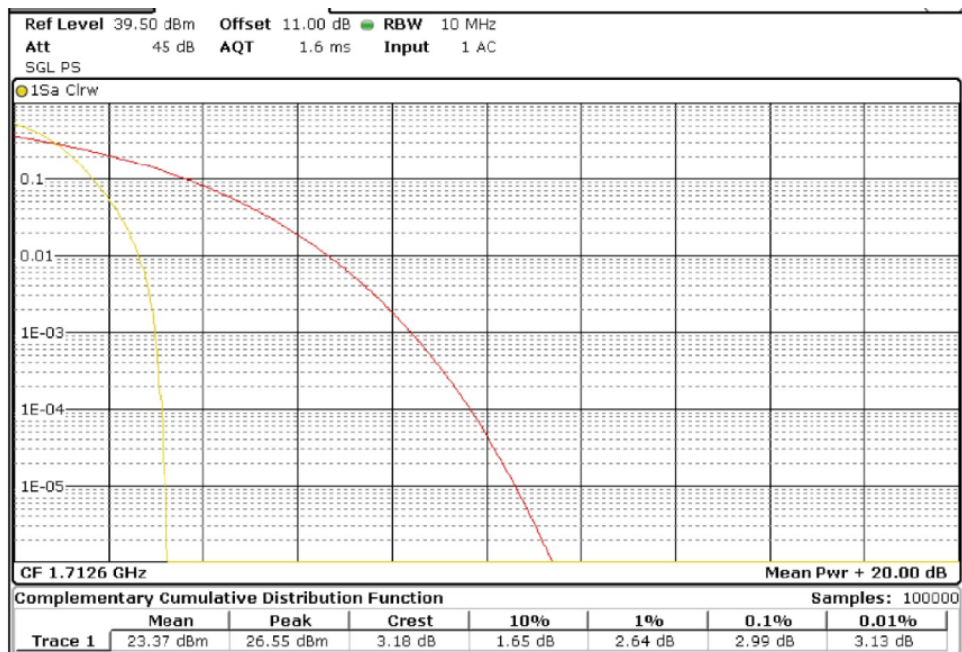


Middle channel

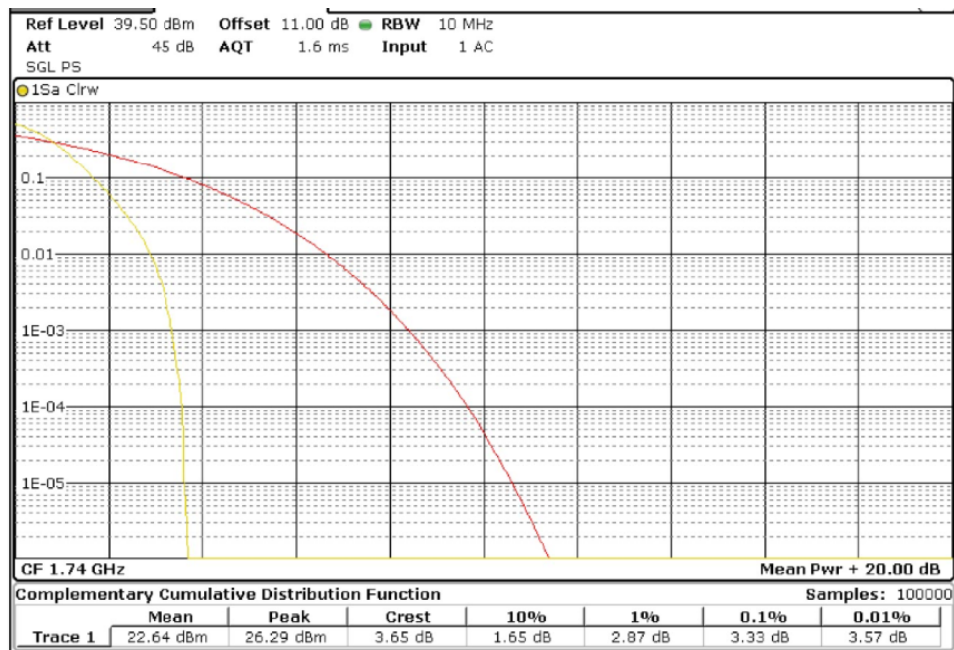

TEST RESULTS (Cont):

Highest channel

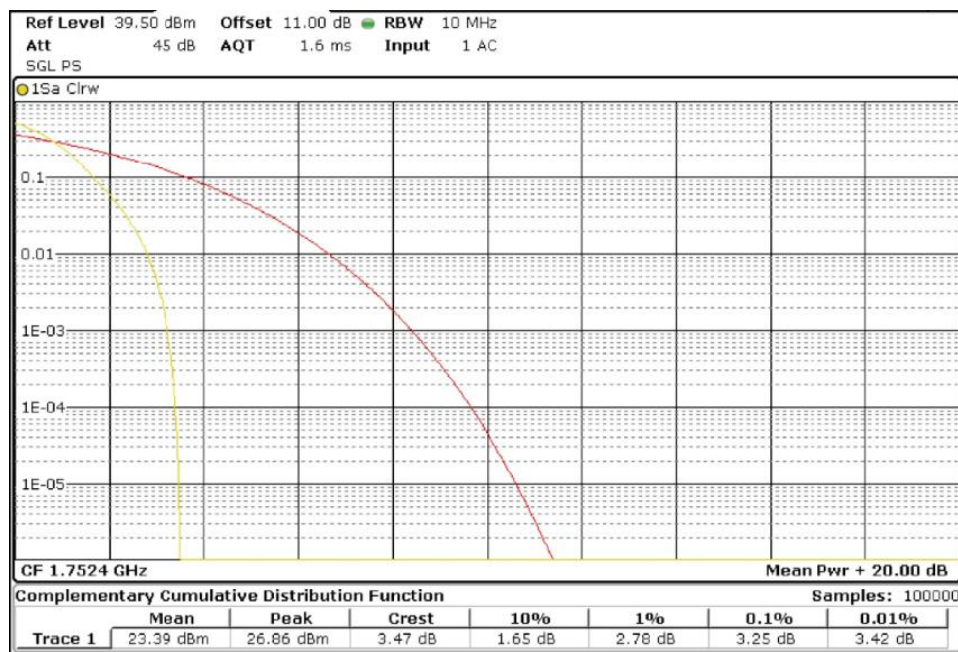

TEST B.2: MODULATION CHARACTERISTICS


LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC §2.1047 and §27.50 / RSS-199 Clause 4.1

LIMITS

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.


The devices shall employ digital modulation techniques.

TEST SETUP

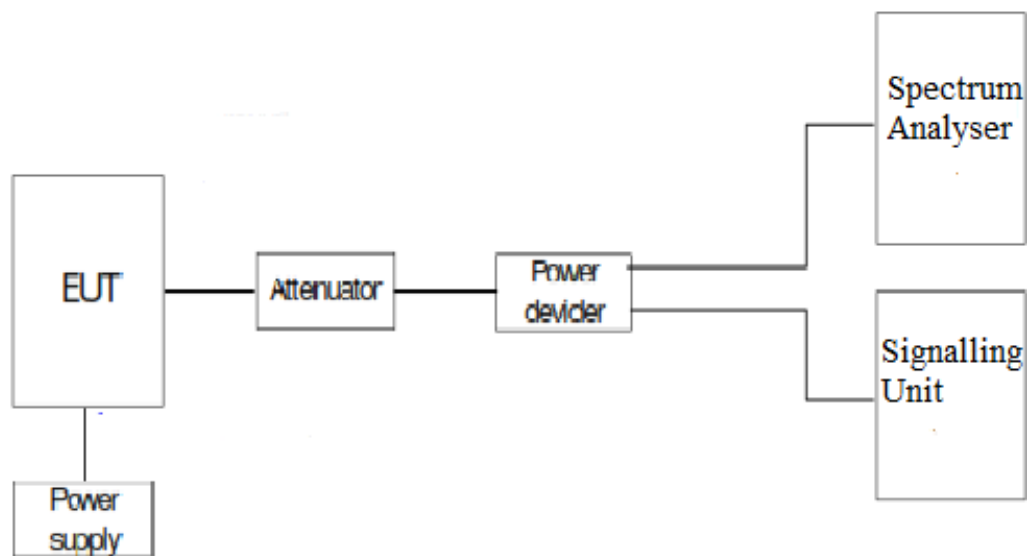


TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

WCDMA Modulation

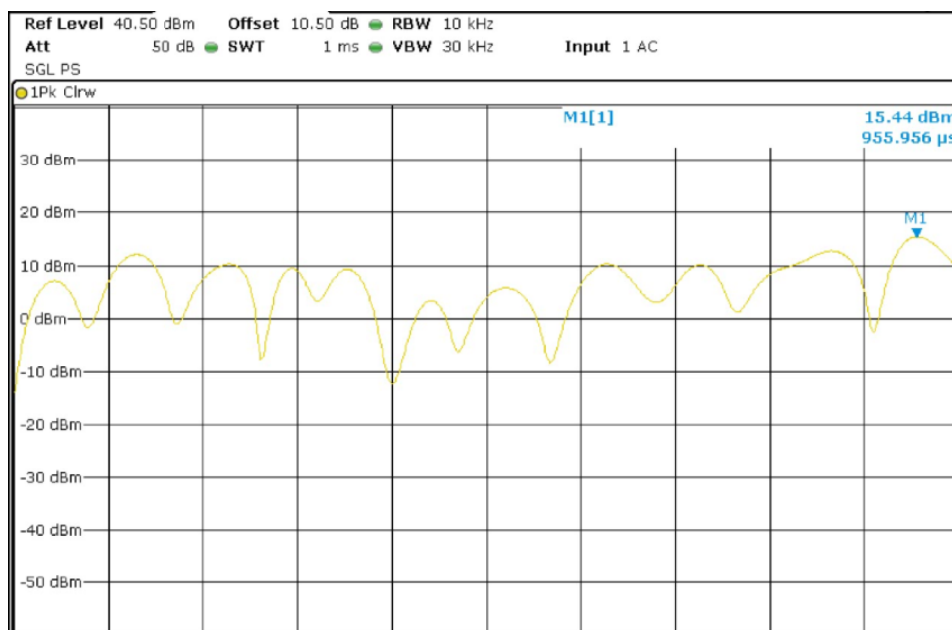

HSPA Modulation

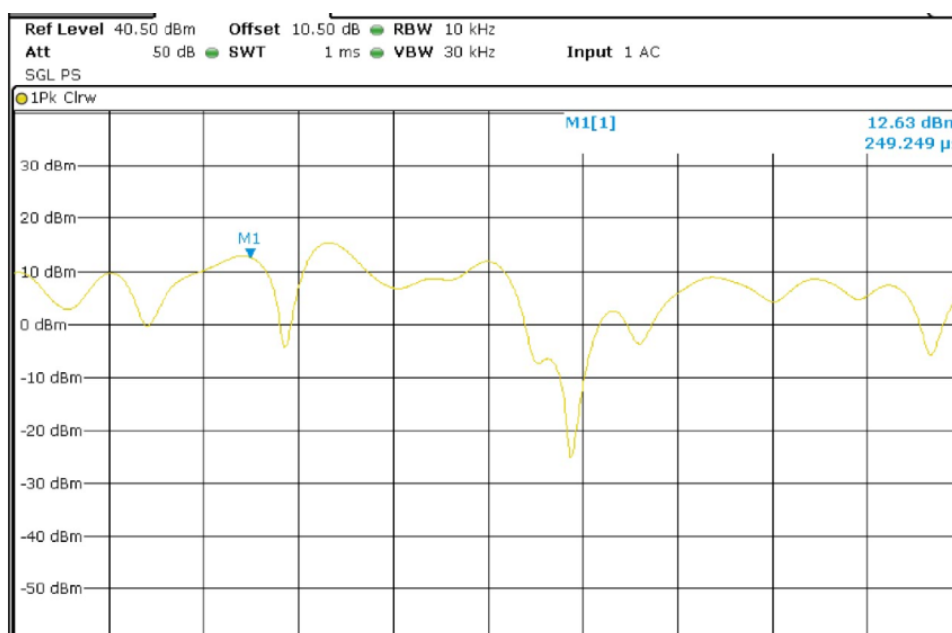

TEST B.3: FREQUENCY STABILITY

LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC §2.1055 and § 27.54 / RSS-199 Clause 4.3

LIMITS

The frequency stability shall be enough to ensure that the fundamental emissions stay within the authorized bands of operation.


TEST SETUP

The frequency tolerance measurements over temperature variations were made over the temperature range of -30°C to $+50^{\circ}\text{C}$. The EUT was placed inside a climatic chamber and the temperature was raised hourly in 10°C steps from -30°C up to $+50^{\circ}\text{C}$.

The supply voltage was varied between 85% and 115% of nominal voltage.

The EUT was set in "call mode" in the middle channel using the Universal Radio Communication tester R&S CMW500 and the maximum frequency error was measured using the built-in calibrated frequency meter.

For LTE mode the QPSK modulation was used for the test as it is the worst case for conducted power.

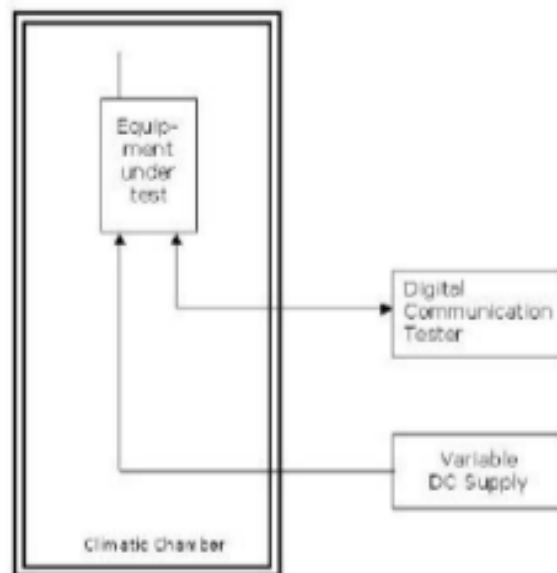

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

GPRS MODULATION.

Frequency stability over temperature variations

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
50	-2.52	-0.0014	-0.00000014
40	3.45	0.0020	0.00000020
30	1.22	0.0007	0.00000007
20	8.61	0.0049	0.00000049
10	10.9	0.0063	0.00000063
0	12.22	0.0070	0.00000070
-10	14.44	0.0083	0.00000083
-20	13.72	0.0079	0.00000079
-30	13.79	0.0079	0.00000079

Frequency stability over voltage variations

Battery Supply voltage	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
Vmax	4.37	11.49	0.0066	0.00000066
Vmin	3.23	7.73	0.0044	0.00000044

TEST B.4: OCCUPIED BANDWIDTH


LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC § 2.1049 / RSS-199 Clause 4.2

LIMITS

Reference only.

TEST SETUP	
-------------------	--

The occupied bandwidth measurement was performed at the output terminals of the EUT using an attenuator, power splitter and spectrum analyzer. The EUT was controlled via the Universal Radio Communication Tester R&S CMW500 selecting maximum transmission power of the EUT and different modes of modulation. The 99% occupied bandwidth and the -26 dBc bandwidth were measured directly using the built-in bandwidth measuring option of spectrum analyzer.

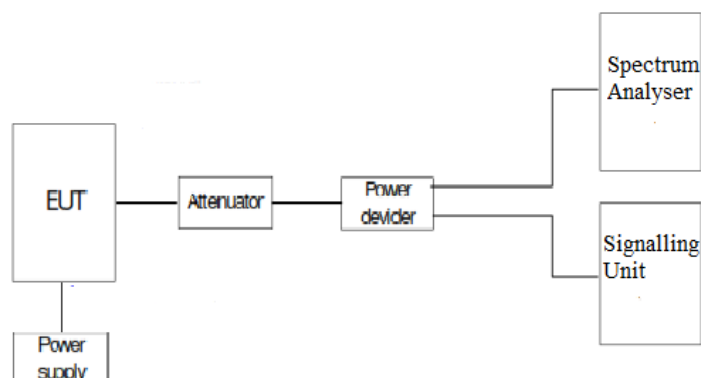

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS


WCDMA MODULATION.

Channel	Lowest	Middle	Highest
99% Occupied bandwidth (kHz)	4.13	4.15	4.15
-26 dBc bandwidth (kHz)	4.72	4.69	4.70


TEST RESULTS (Cont):

WCDMA MODULATION.

Lowest Channel 99% Occupied Bandwidth

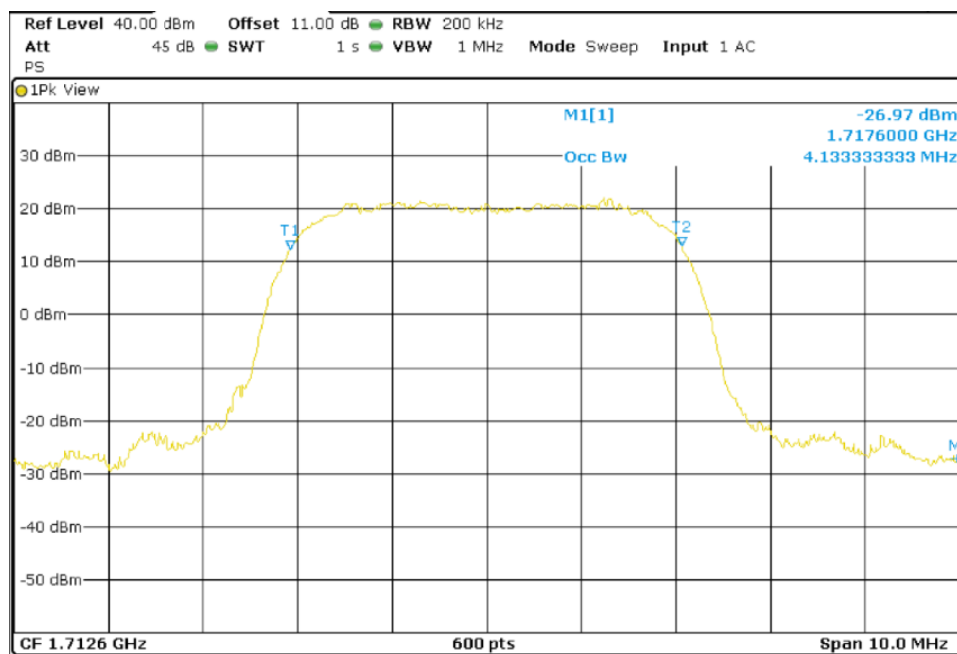


Lowest Channel -26dBc Bandwidth kHz

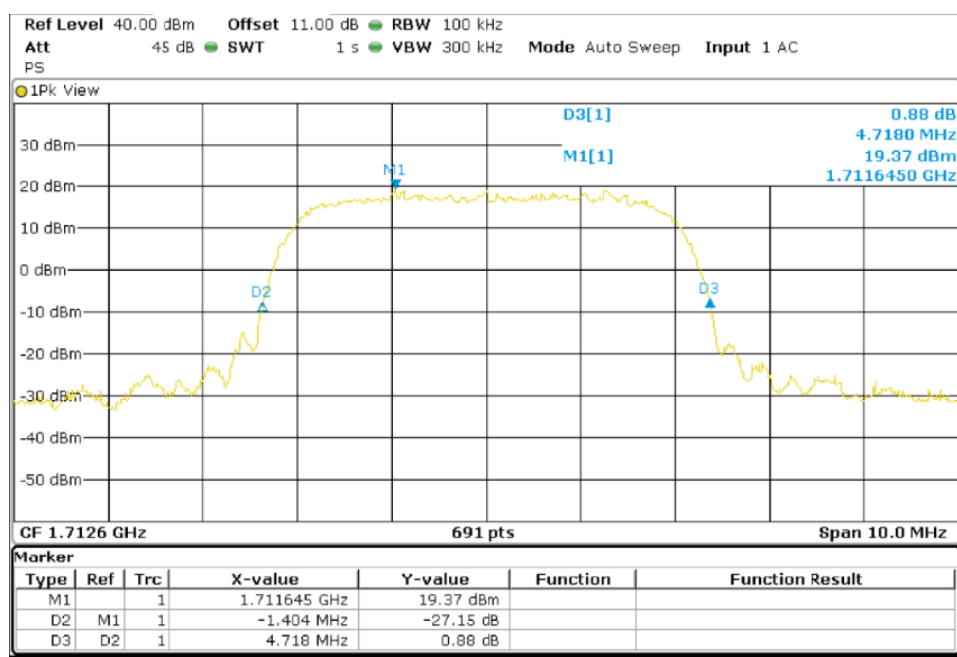


TEST RESULTS (Cont):

Middle Channel 99% Occupied Bandwidth

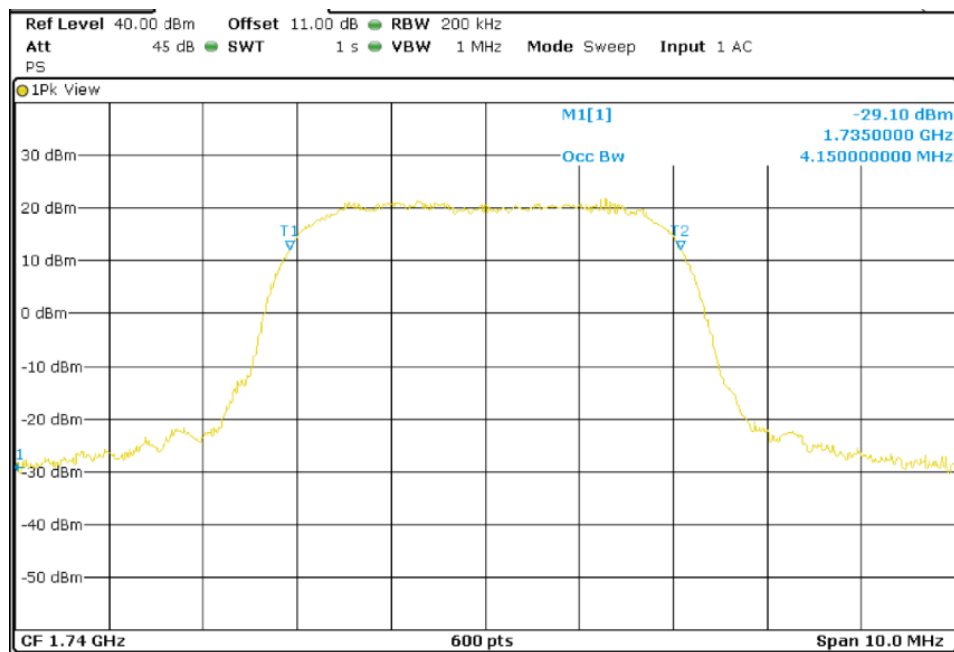


Middle Channel 26dBc Bandwidth kHz

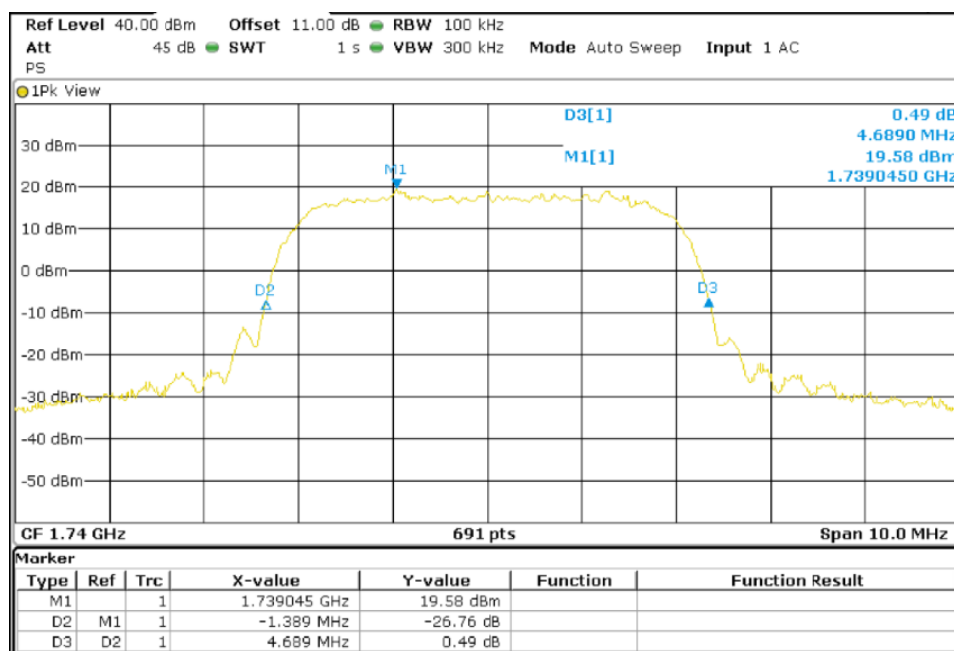


TEST RESULTS (Cont):

Highest Channel 99% Occupied Bandwidth

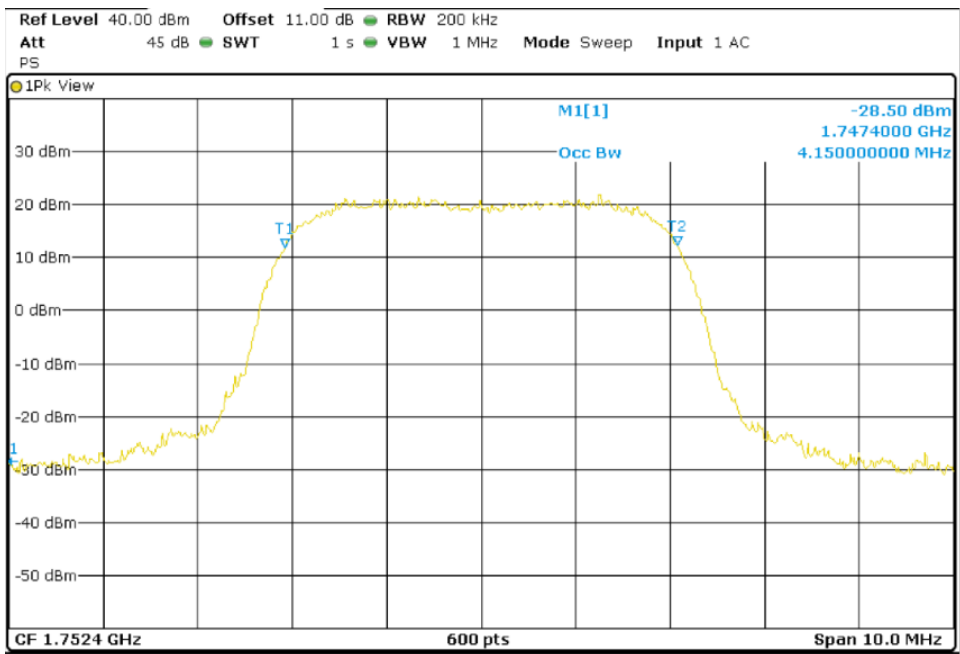

Highest Channel 26dBc Bandwidth kHz

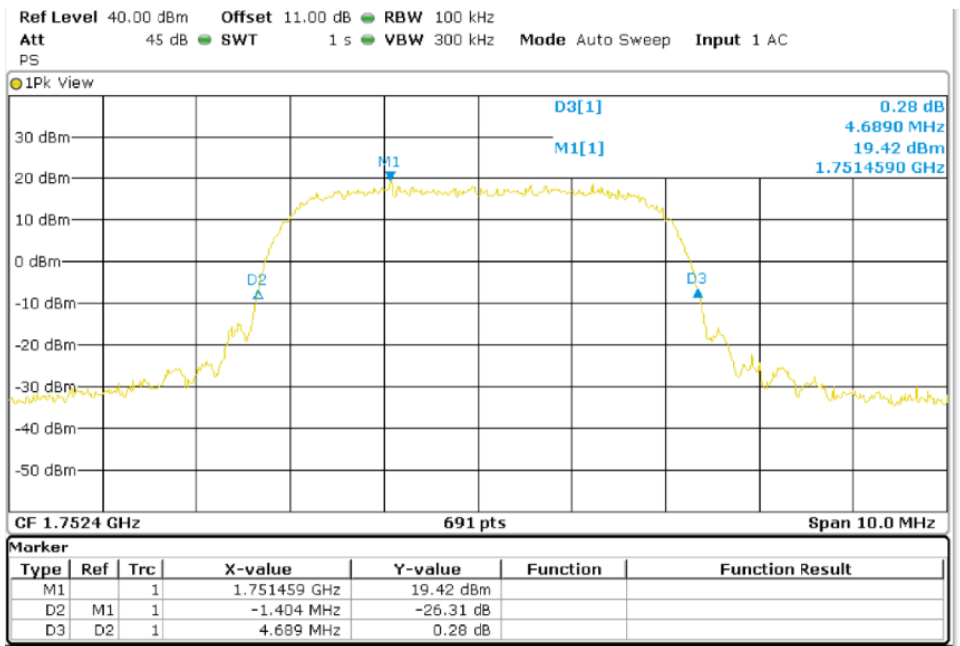

TEST B.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC §2.1051 and § 27.53 / RSS-199 Clause 4.5

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.


At P_o transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes $43 + 10 \log (P_o)$. and the level in dBm relative to P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in watts})] = -13 \text{ dBm}$$

TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

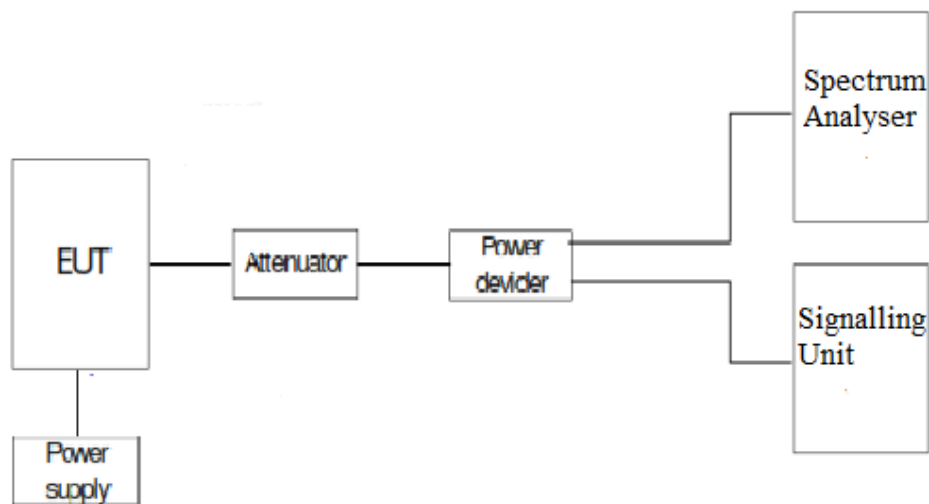

TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

Frequency range 9 KHz – 26 GHz

WCDMA MODULATION.

Lowest Channel

Spurious frequency (MHz)	Level (dBm)	Measurement uncertainty (dB)
2112.84	-30.32	< ± 1.20

Middle Channel

Spurious frequency (MHz)	Level (dBm)	Measurement uncertainty (dB)
2140.46	-30.73	< ± 1.20


Highest Channel

Spurious frequency (MHz)	Level (dBm)	Measurement uncertainty (dB)
2154.28	-30.95	< ± 1.20


TEST RESULTS (Cont.):

WCDMA MODULATION.

Lowest Channel

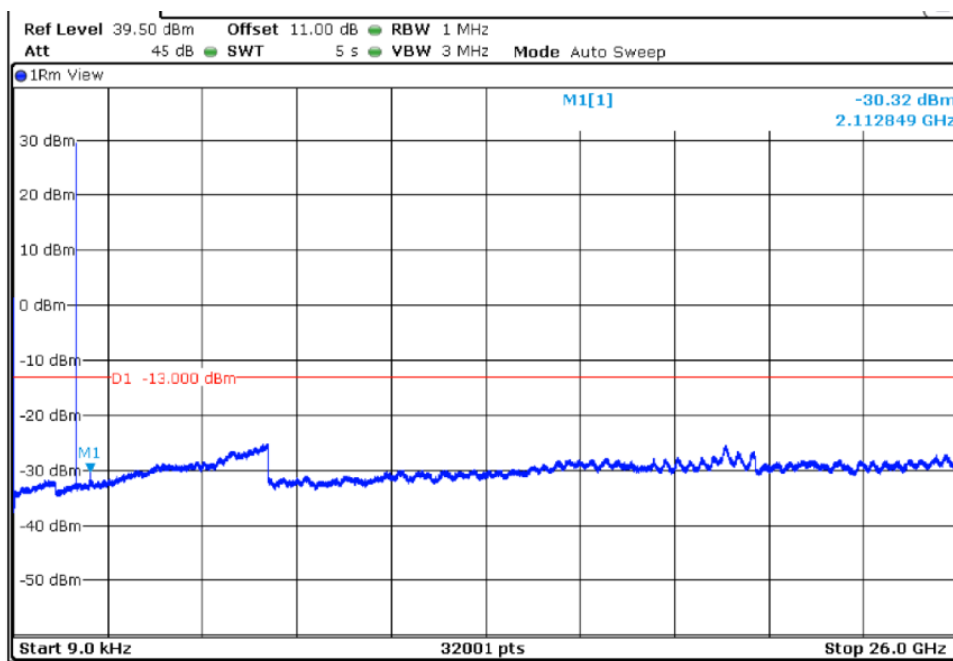


Middle Channel

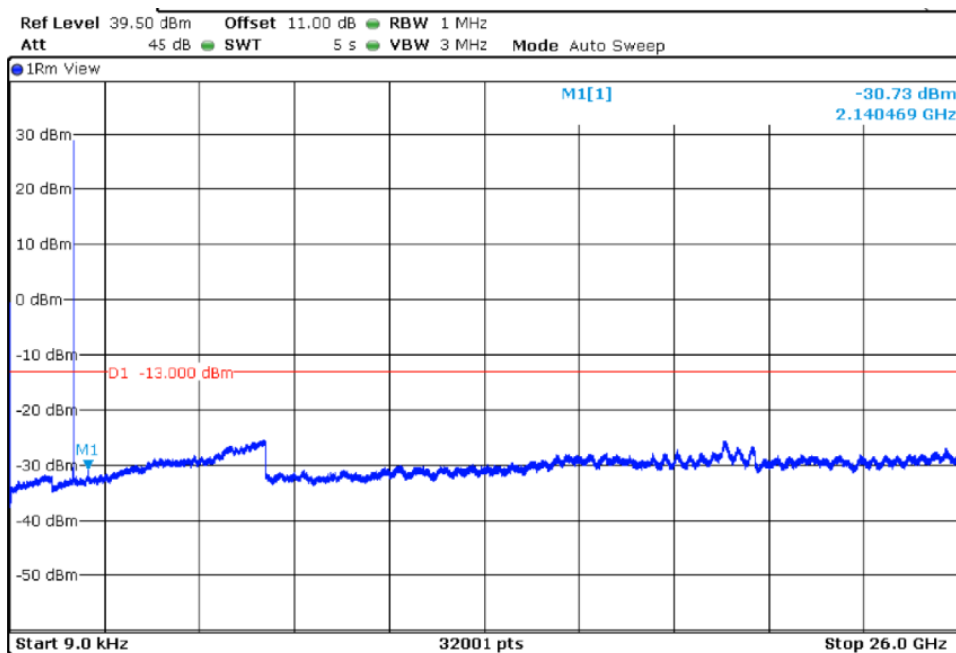

TEST RESULTS (Cont):

Highest Channel

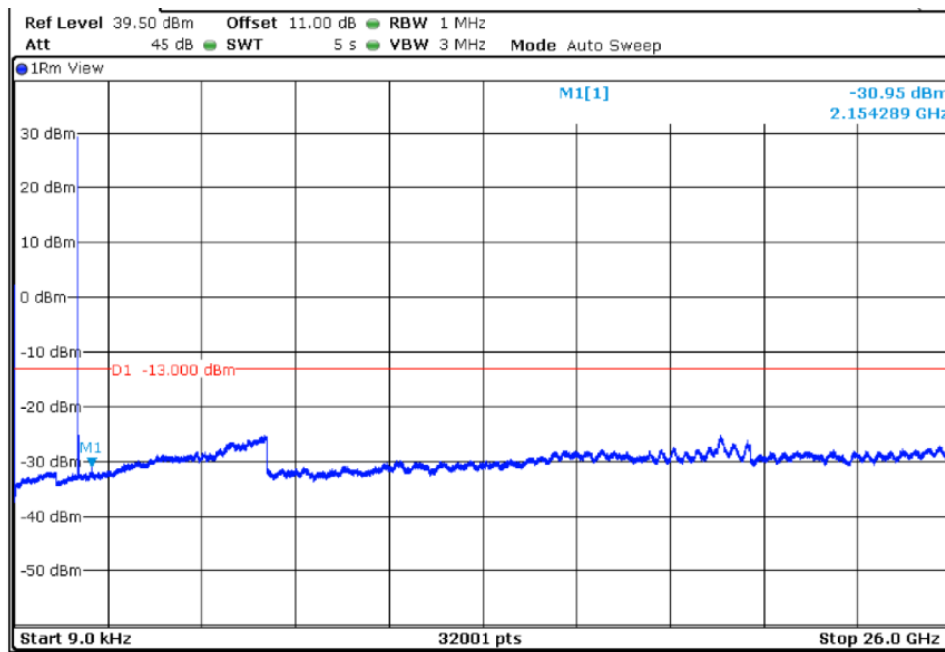

TEST B.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES

LIMITS:	Product standard:	FCC Part 27 / IC RSS-199
	Test standard:	FCC § 27.53 / RSS- Clause 4.5

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. P in watts.

At P_o transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes $43 + 10 \log (P_o)$. and the level in dBm relative to P_o becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in watts})] = -13 \text{ dBm}$$


TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of modulation which is the worst case for conducted power was used.

As indicated in FCC part 27, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

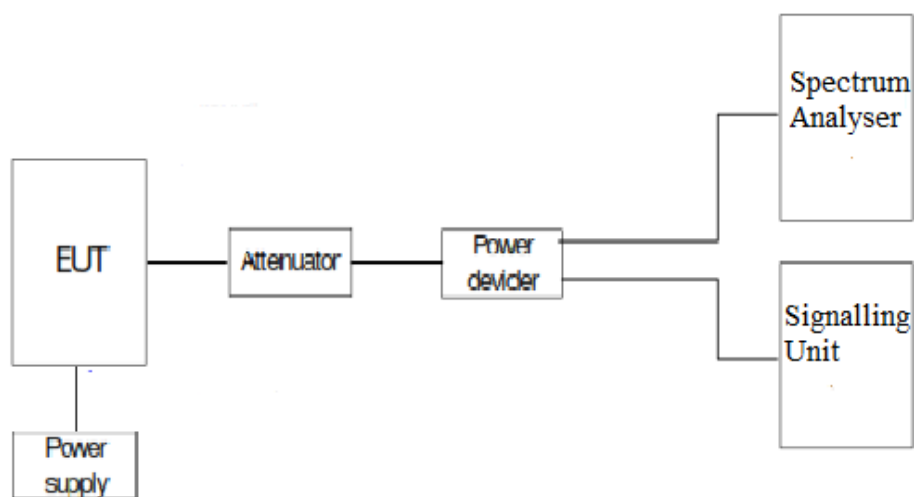

TESTED SAMPLES:	S/01							
TESTED CONDITIONS MODES:	TC#01							
TEST RESULTS:	PASS							
<table><tr><td>WCDMA MODULATION</td><td>Low Channel</td><td>High Channel</td></tr><tr><td>Maximum measured level at lowest and Highest Block Edge at antenna port (dBm)</td><td>-29.78</td><td>-32.96</td></tr></table>			WCDMA MODULATION	Low Channel	High Channel	Maximum measured level at lowest and Highest Block Edge at antenna port (dBm)	-29.78	-32.96
WCDMA MODULATION	Low Channel	High Channel						
Maximum measured level at lowest and Highest Block Edge at antenna port (dBm)	-29.78	-32.96						