

TEST REPORT

FCC/ISED UNII Test for WD-MSOII

APPLICANT
EVERINT CO., LTD.

REPORT NO.
HCT-RF-2108-FI003

DATE OF ISSUE
August 3, 2021

Tested by
Jeong Ho Kim



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJai Huh
BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,
Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

고객비밀
CUSTOMER SECRET

TEST REPORT

FCC/ISED UNII Test
for WD-MSOII

REPORT NO.

HCT-RF-2108-FI003

DATE OF ISSUE

August 03, 2021

Additional Model

-

Applicant

EVERINT Co., Ltd.

(Yongtan-dong) 129, Chungjusandan 1-ro Chungju-si, Chungcheongbuk-do, Korea

**Eut Type
Model Name**

WLAN Module(Data transmission equipment)
WD-MSOII

**FCC ID
IC**

2AKMF-WD-MSOII
22266-WDMSOII

Modulation type

OFDM

FCC Classification

Unlicensed National Information Infrastructure(NII)

FCC Rule

Part 15.407

ISED Rule Part(s)

RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	August 03, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	6
EUT DESCRIPTION	6
2. MAXIMUM OUTPUT POWER	7
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES	9
5.2 EQUIPMENT	9
6. ANTENNA REQUIREMENTS	10
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	32
10. TEST RESULT	34
10.1 DUTY CYCLE	34
10.2 26dB BANDWIDTH & 99 % BANDWIDTH	36
10.3 6 DB BANDWIDTH	41
10.4 OUTPUT POWER MEASUREMENT	43
10.5 POWER SPECTRAL DENSITY	44
10.6 FREQUENCY STABILITY.	48
10.6.1 20 MHz BW	48
10.7 STRADDLE CHANNEL	64
10.7.1 26 dB Bandwidth	64
10.7.2 6 dB Bandwidth	66
10.7.3 Output Power	68
10.7.4 Power Spectral Density	70
10.8 RADIATED SPURIOUS EMISSIONS	72
10.9 RADIATED RESTRICTED BAND EDGE	81
10.10 RECEIVER SPURIOUS EMISSIONS	91
10.11 POWERLINE CONDUCTED EMISSIONS	92
11. LIST OF TEST EQUIPMENT	96



12. ANNEX A_ TEST SETUP PHOTO

98

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	WD-MSOII	
Additional Model	-	
EUT Type	WLAN Module(Data transmission equipment)	
Power Supply	DC 3.30 V	
Modulation Type	OFDM : 802.11a, 802.11n(HT20)	
Frequency Range (MHz)	U-NII-1	20MHz BW : 5180 - 5240
	U-NII-2A	20MHz BW : 5260 - 5320
	U-NII-2C	20MHz BW : 5500 - 5720
	U-NII-3	20MHz BW : 5745 - 5825
Antenna Specification	Antenna type: WI-FI Dual band Chip antenna Peak Gain : UNII-1: 0.38 dBi, UNII-2A: 0.27 dBi UNII-2C: 0.82 dBi, UNII-3: 1.34 dBi	
Straddle channel	Supported	
TDWR Band	Not Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	June 03, 2021 ~ July 29, 2021	
PMN (Product Marketing Number)	WD-MSOII	
HVIN (Hardware Version Identification Number)	WD-MSOII	
FVIN (Firmware Version Identification Number)	V5036	
HMN (Host Marketing Name)	N/A	
EUT serial numbers	Conducted : 2 Radiated : 2	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	RF Output Power (dBm)	RF Output Power (W)
UNII-1	802.11a	14.04	0.025
	802.11n (HT20)	12.59	0.018
UNII-2A	802.11a	13.68	0.023
	802.11n (HT20)	13.12	0.021
UNII-2C	802.11a	11.22	0.013
	802.11n (HT20)	11.09	0.013
UNII-3	802.11a	12.97	0.020
	802.11n (HT20)	12.63	0.018

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407 / RSS-Gen (Issue 5) Section 8:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

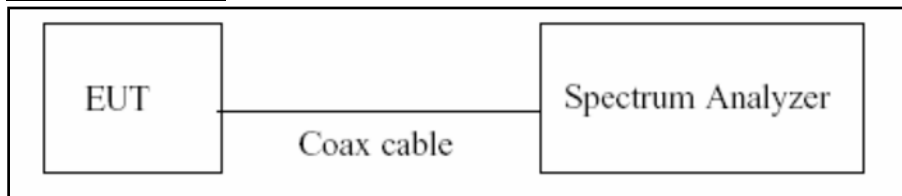

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth & 99 % Bandwidth

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

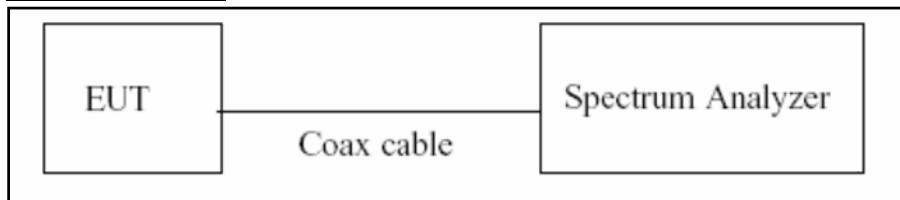

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW \doteq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30 dBm)

Test Configuration

Power Meter

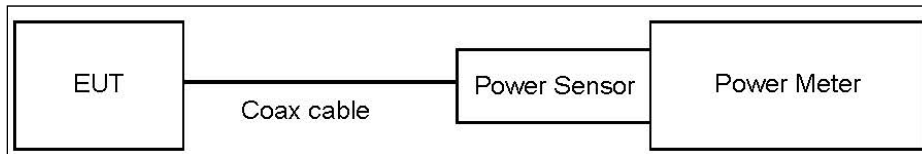

Spectrum Analyzer(Only Straddle Channel)

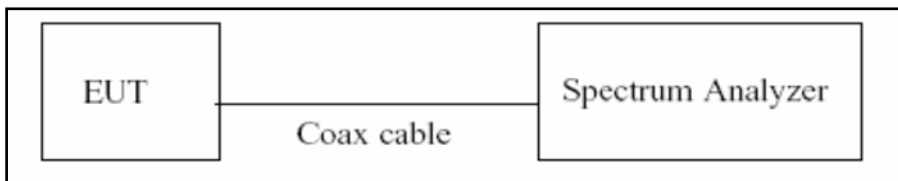

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span/RBW}$.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.12
UNII 2A	22.12
UNII 2C	22.12
UNII 3	22.12


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

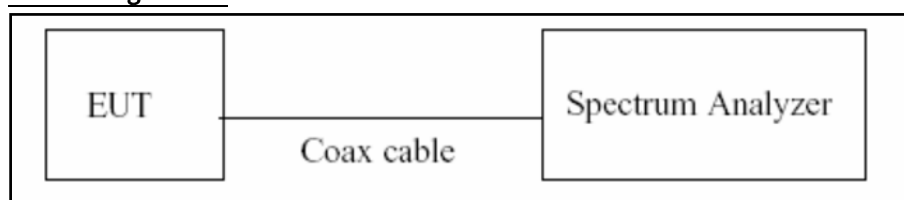

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.12
UNII 2A	22.12
UNII 2C	22.12
UNII 3	22.12


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

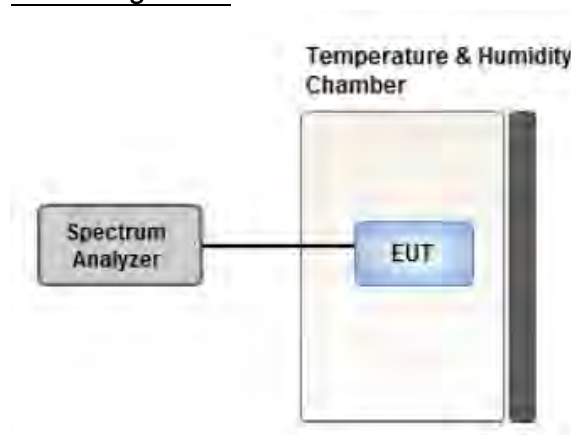

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.7. Radiated Test

Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.

FCC

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	$6.37/F(\text{kHz})$	300
0.490 – 1.705	$63.7/F(\text{kHz})$	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

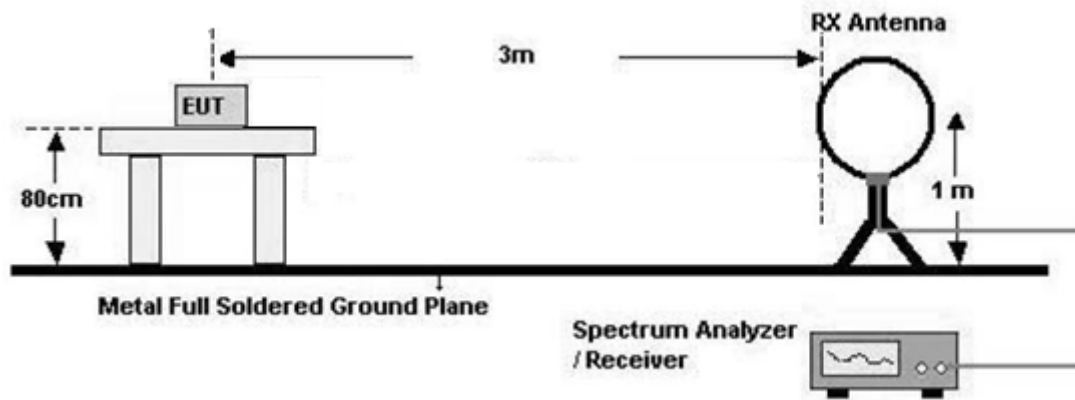

30 MHz - 1 GHz

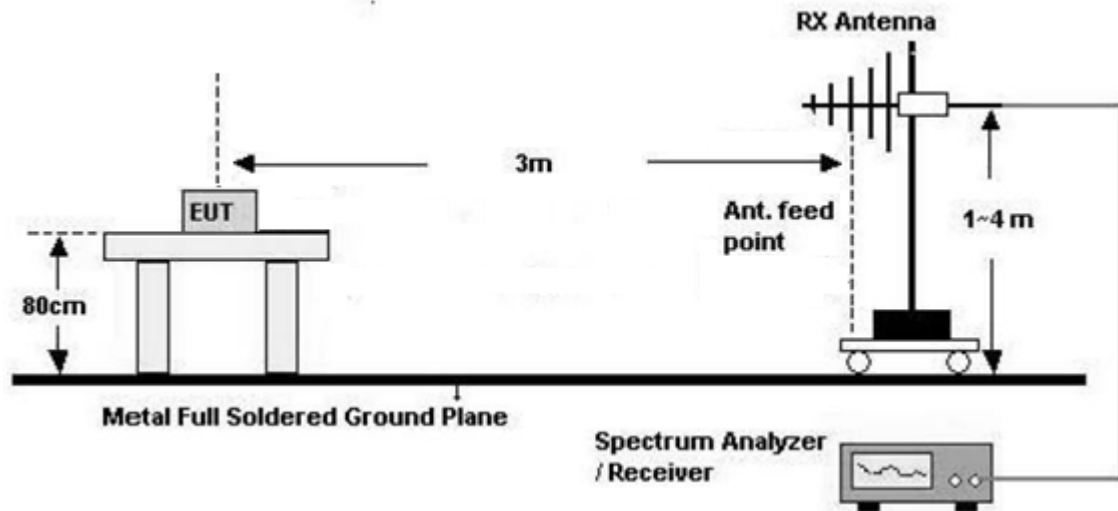

Above 1 GHz

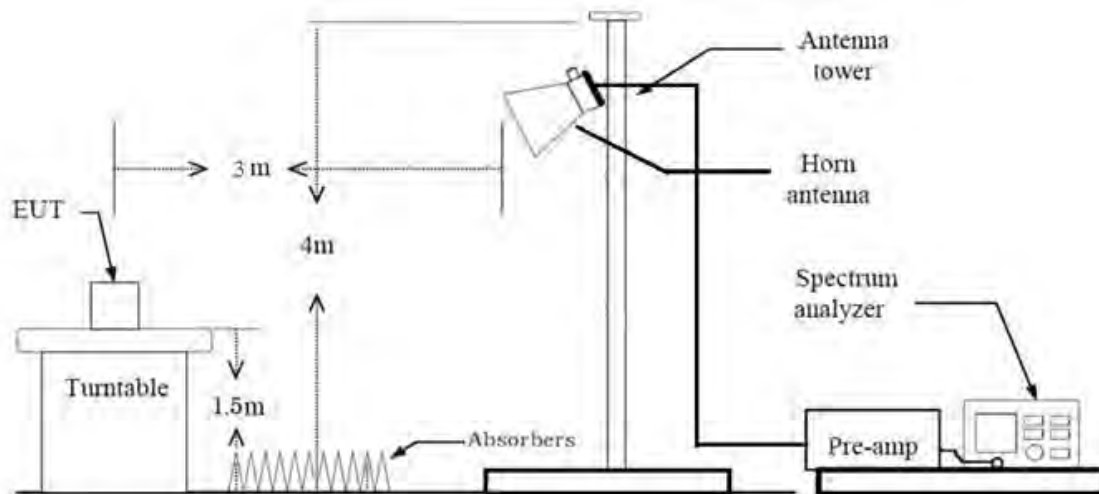

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. .We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the

ground plane in detecting antenna.

5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting**(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):**

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW \geq $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = $\text{VBW} \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a

factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Attenuator
+ Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.987	0.057	1000
802.11n(HT20)	MCS 0(6.5)	0.986	0.060	1000

8.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration

30 MHz - 1 GHz

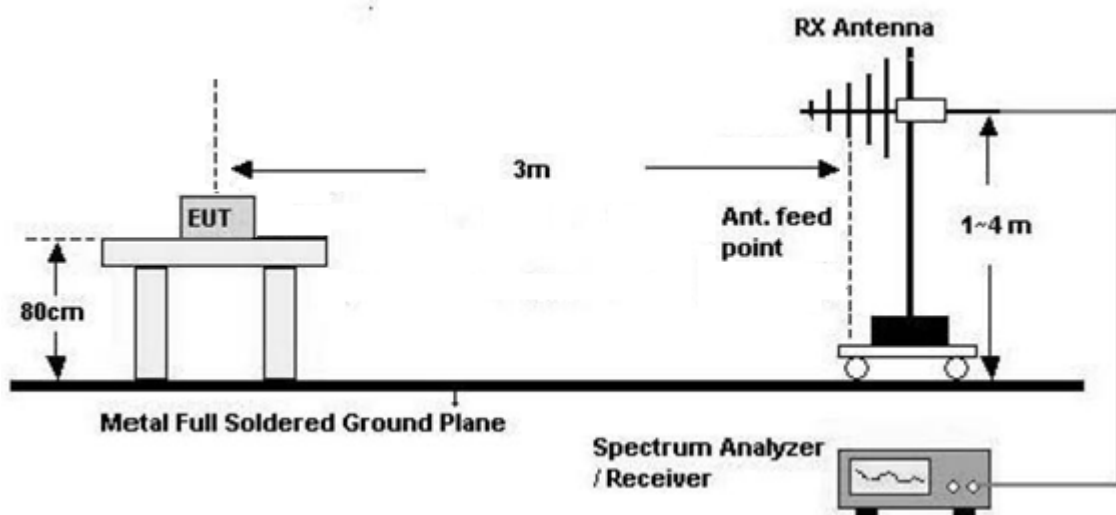

Test Procedure of Receiver Spurious Emissions (Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to

find out the highest emissions.

4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

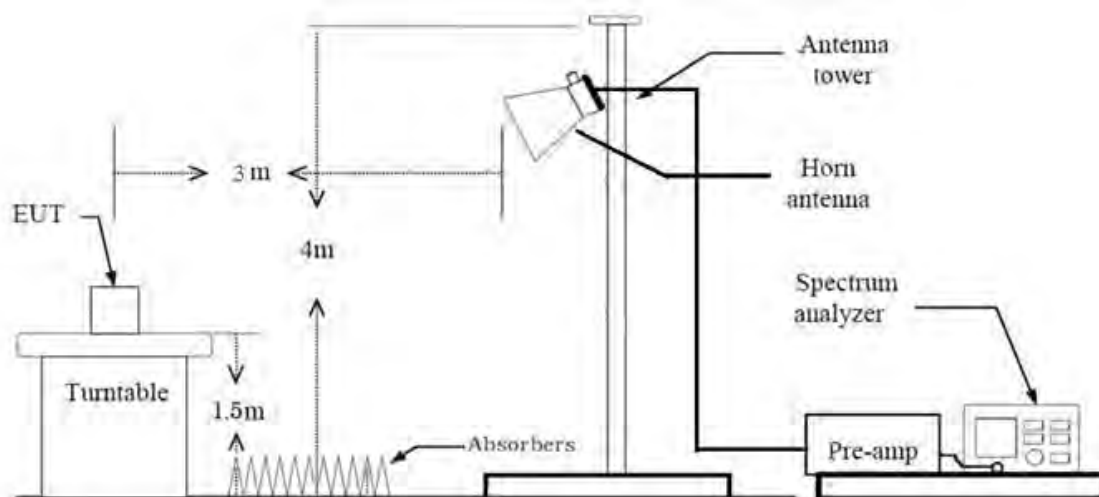

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Z
3. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11a : 6 Mbps
 - 802.11n_HT20 : MCS0
4. Radiated Spurious Emission
 - All modulation of operation were investigated and the worst case modulation results are reported.
(Worstcase : 802.11a_6 Mbps)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Travel Adapter(Normal)
 - Worstcase : Stand alone + Travel Adapter(Normal)

(Note): TA Used Only AC Power line Test. for Module Power supply
 -this module operating obtaining power through another device which is connected to the AC power line.
 -We tested by supplying DC Voltage to the module using an AC power adapter that is commercially available.

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.
2. For different outputs per channel, test up to the channel with the highest output power setting

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§ 15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§ 15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§ 15.407(a)(1),(2),(3)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10log ₁₀ (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Maximum Power Spectral Density	§ 15.407(a)(1),(2),(3)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	§ 15.207 § 15.407(b)(8)	<FCC 15.207 limits		PASS
Undesirable Emissions	§ 15.407(b) (1)(2)(3)(4)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	§ 15.205, 15.407(b)(9), (10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

ISED

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
99% Bandwidth	RSS-GEN, 6.7	N/A	Conducted	PASS
6 dB Bandwidth	RSS-247, 6.2.4.1	> 500 kHz (5725~5850 MHz)		PASS
Maximum Conducted Output Power,	RSS-247, 6.2	< 250 mW or $11+10 \log_{10}$ (BW) dBm (5470-5600, 5650-5725 MHz) Whichever power is less		PASS
	RSS-247, 6.2.4.1	< 1 W (5725-5850 MHz)		
Maximum e.i.r.p	RSS-247, 6.2	< 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5150-5250 MHz) < 30 mW or $1.76+10 \log_{10}$ (BW) dBm (5250-5350 MHz) < 1 W or $17+10 \log_{10}$ (BW) dBm (5470-5725 MHz) Whichever power is less		PASS
Power Spectral Density	RSS-247 6.2	< 10 dBm/ MHz(e.i.r.p.) (5150-5250 MHz) < 11 dBm/MHz(Conducted) (5250-5350 MHz, 5470-5600 MHz, 5650-5725 MHz)		PASS
	RSS-247, 6.2.4.1	< 30 dBm/500 kHz(Conducted) (5725-5850 MHz)		
Frequency Stability	RSS-GEN 8.11	should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation.		PASS
AC Conducted Emissions 150 kHz-30 MHz	RSS-GEN, 8.8	RSS-GEN section 8.8 table 4		PASS
Undesirable Emissions	RSS-247, 6.2.1.2	26 dBc at 5250~5350 MHz (5150~5350 MHz)		PASS
	RSS-247, 6.2	< -27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)	Radiated	PASS
	RSS-247, 6.2.4.2	cf. Section 9.8.1 (UNII 3)		
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	RSS-Gen, 8.9 RSS-Gen, 8.10	RSS-Gen section 8.9 table 5, 6 section 8.10 table 7		PASS
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.3	RSS-GEN section 7.3 table 3		PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	5.355	5.426	0.987	0.057
	9	3.575	3.649	0.980	0.089
	12	2.693	2.761	0.976	0.107
	18	1.802	1.870	0.964	0.161
	24	1.357	1.425	0.952	0.212
	36	0.912	0.981	0.929	0.318
	48	0.688	0.757	0.908	0.417
	54	0.617	0.686	0.899	0.462
Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	5.084	5.154	0.986	0.060
	1	2.559	2.626	0.974	0.113
	2	1.722	1.791	0.961	0.171
	3	1.299	1.368	0.950	0.225
	4	0.880	0.950	0.926	0.332
	5	0.668	0.737	0.906	0.429
	6	0.600	0.669	0.896	0.475
	7	0.544	0.613	0.887	0.521

Note:

In order to simplify the report, attached plots were only lowest datarate.

802.11a



802.11n(HT20)



10.2 26dB BANDWIDTH & 99 % BANDWIDTH

FCC

802.11a Mode		26 dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.75	16.479
5200	40	22.73	16.569
5240	48	21.47	16.578
5260	52	22.48	16.646
5300	60	21.05	16.670
5320	64	21.68	16.766
5500	100	22.31	16.616
5580	116	22.29	16.568
5720	144	23.01	16.579
5745	149	21.98	-
5785	157	22.46	-
5825	165	25.71	-

802.11n(HT20) Mode		26 dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.97	17.661
5200	40	21.75	17.677
5240	48	22.49	17.689
5260	52	22.17	17.660
5300	60	22.87	17.676
5320	64	21.81	17.659
5500	100	22.32	17.648
5580	116	22.93	17.656
5720	144	22.90	17.663
5745	149	23.02	-
5785	157	23.59	-
5825	165	23.25	-

■ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26 dB Bandwidth (CH 40)




802.11a UNII 2A BAND 26 dB Bandwidth (CH 52)

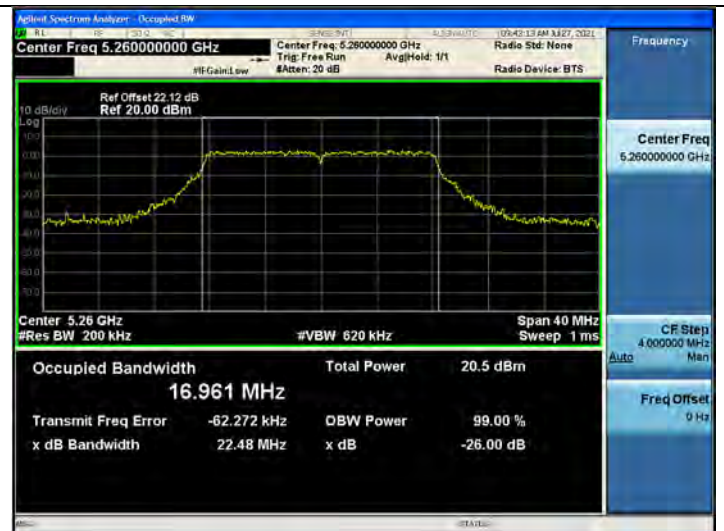

802.11a UNII 2C BAND 26 dB Bandwidth (CH144)



802.11a UNII 3 BAND 26 dB Bandwidth (CH 165)

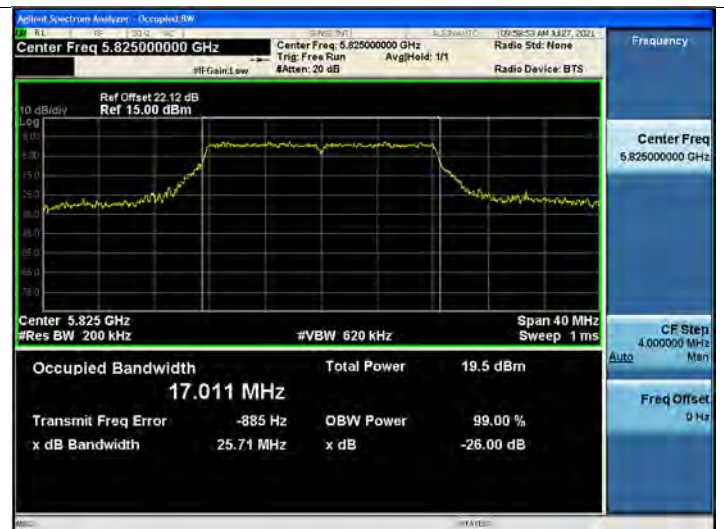

■ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n_HT20 UNII 1 BAND 26 dB Bandwidth(CH 48)




802.11n_HT20 UNII 2A BAND 26 dB Bandwidth(CH 60)



802.11n_HT20 UNII 2C BAND 26 dB Bandwidth(CH 116)



802.11n_HT20 UNII 3 BAND 26 dB Bandwidth(CH 157)

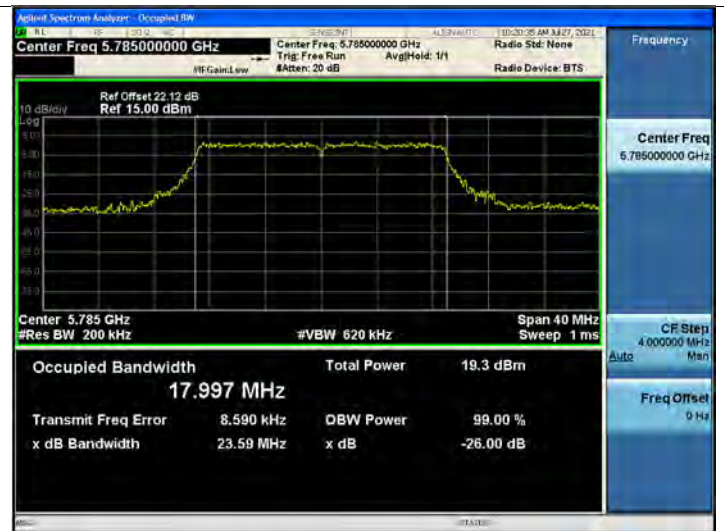

99% bandwidth UNII-3 (ISED)

802.11a Mode		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5745	149	17.475
5785	157	17.585
5825	165	17.588


802.11n(HT20) Mode		99% bandwidth [MHz]
Frequency [MHz]	Channel No.	
5745	149	18.372
5785	157	18.429
5825	165	18.466

■ Test Plots


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 3 BAND 26dB Bandwidth (CH 165)

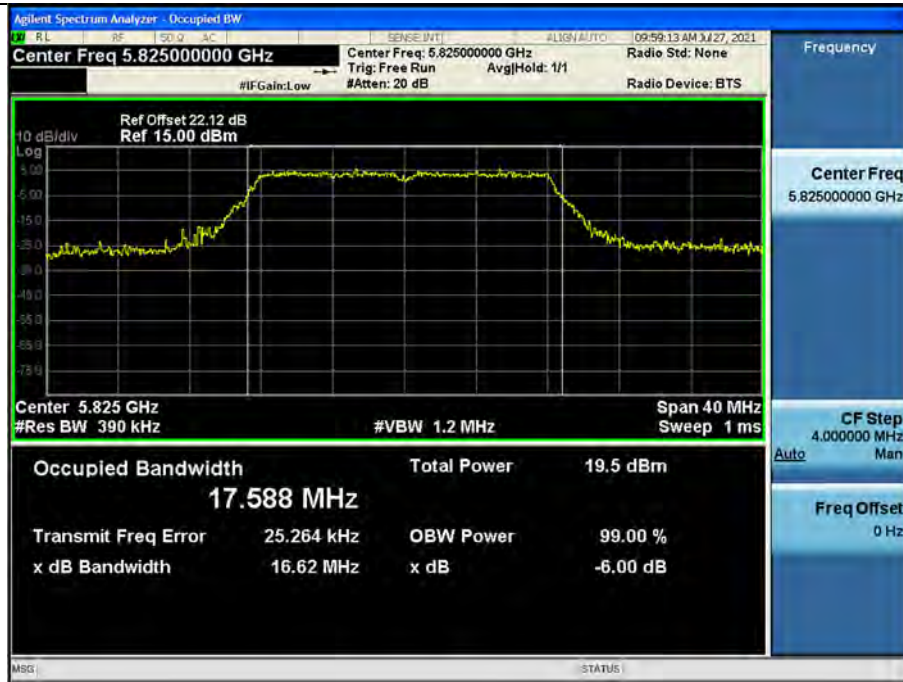

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)

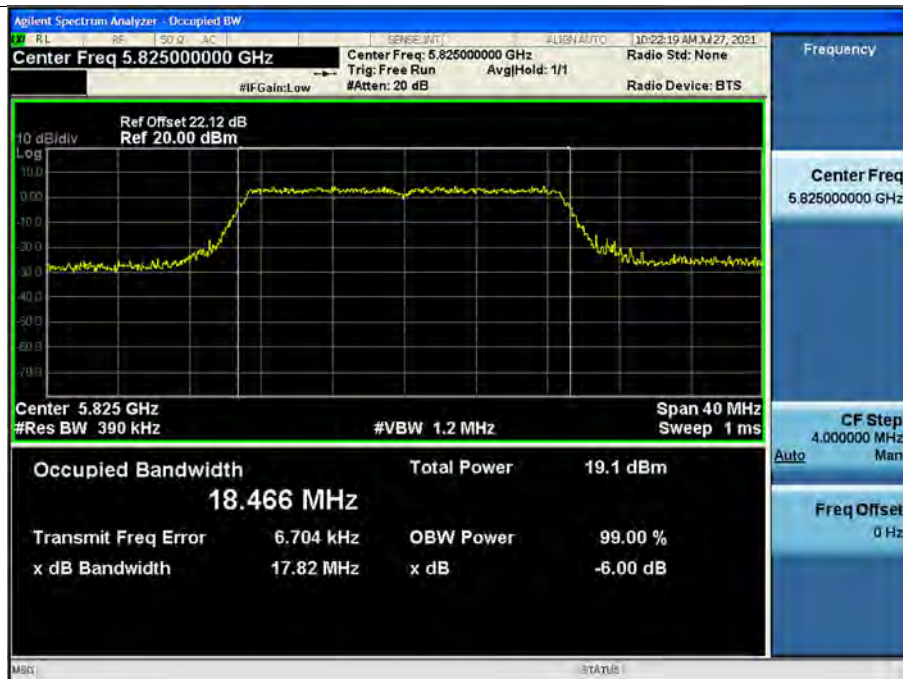

10.3 6 DB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.59	> 0.5	Pass
5785	157	16.44	> 0.5	Pass
5825	165	16.57	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.64	> 0.5	Pass
5785	157	17.64	> 0.5	Pass
5825	165	17.80	> 0.5	Pass


□ Test Plots

Note: In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.157)



802.11n(HT20) (CH.157)

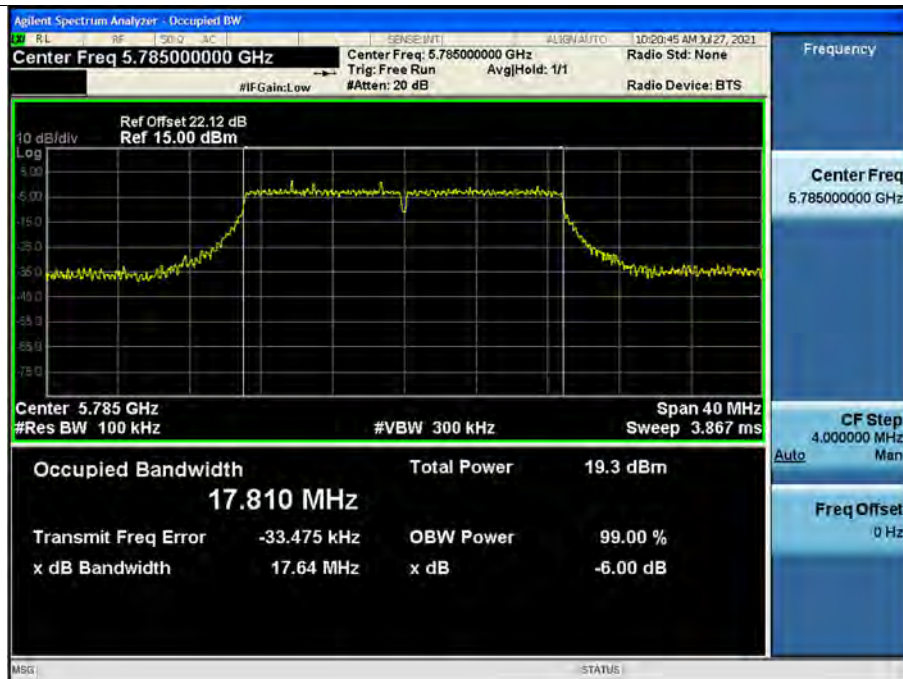

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

802.11a Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Ant Gain [dBi]	EIRP [dBm]	FCC Limit [dBm]	ISED Limit [dBm]
Frequency [MHz]	Channel No.							
5180	36	13.83	0.06	13.89	0.38	14.27	23.98	22.17
5200	40	13.98	0.06	14.04	0.38	14.42		
5240	48	13.74	0.06	13.80	0.38	14.18		
5260	52	13.62	0.06	13.68	0.27	13.95	23.21	23.21
5300	60	13.42	0.06	13.48	0.27	13.75		
5320	64	13.39	0.06	13.45	0.27	13.72		
5500	100	11.16	0.06	11.22	-	-	23.19	23.19
5580	116	11.03	0.06	11.08	-	-		
5720	144	11.09	0.06	11.15	-	-		
5745	149	12.86	0.06	12.92	-	-	30.00	30.00
5785	157	12.79	0.06	12.85	-	-		
5825	165	12.91	0.06	12.97	-	-		

802.11n(20MHz) Mode		Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Ant Gain [dBi]	EIRP [dBm]	FCC Limit [dBm]	ISED Limit [dBm]
Frequency [MHz]	Channel No.							
5180	36	12.26	0.33	12.59	0.38	12.97	23.98	22.17
5200	40	12.02	0.33	12.35	0.38	12.73		
5240	48	11.76	0.33	12.09	0.38	12.47		
5260	52	12.79	0.33	13.12	0.27	13.39	23.47	23.21
5300	60	12.66	0.33	12.99	0.27	13.26		
5320	64	12.68	0.33	13.01	0.27	13.28		
5500	100	10.74	0.33	11.07	-	-	23.47	23.19
5580	116	10.48	0.33	10.81	-	-		
5720	144	10.76	0.33	11.09	-	-		
5745	149	12.04	0.33	12.37	-	-	30.00	30.00
5785	157	12.15	0.33	12.48	-	-		
5825	165	12.30	0.33	12.63	-	-		

10.5 POWER SPECTRAL DENSITY

FCC & ISSED

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	2.751	0.057	2.808	11 dBm/MHz
5200	40	3.248	0.057	3.305	
5240	48	3.252	0.057	3.309	
5260	52	2.781	0.057	2.838	
5300	60	2.730	0.057	2.787	
5320	64	2.433	0.057	2.490	
5500	100	0.295	0.057	0.352	
5580	116	-0.253	0.057	-0.196	
5720	144	0.177	0.057	0.234	
5745	149	-1.024	0.057	-0.967	30 dBm/500kHz
5785	157	-1.132	0.057	-1.075	
5825	165	-1.162	0.057	-1.105	

802.11n(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	1.238	0.332	1.570	11 dBm/MHz
5200	40	1.139	0.332	1.471	
5240	48	1.066	0.332	1.398	
5260	52	2.131	0.332	2.463	
5300	60	1.717	0.332	2.049	
5320	64	1.754	0.332	2.086	
5500	100	-0.295	0.332	0.037	
5580	116	-0.603	0.332	-0.271	
5720	144	-0.368	0.332	-0.036	
5745	149	-1.662	0.332	-1.330	30 dBm/500kHz
5785	157	-1.901	0.332	-1.569	
5825	165	-2.086	0.332	-1.754	

ISED Only

EIRP PSD (UNII-1) # NOTE : Only UNII1 bands were calculated as EIRP.

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Ant. Gain (dBi)	EIRP PSD (dBm)	EIRP PSD Limit
Frequency [MHz]	Channel No.						
5180	36	2.751	0.057	2.808	0.38	3.188	10 dBm/MHz
5200	40	3.248	0.057	3.305	0.38	3.685	
5240	48	3.252	0.057	3.309	0.38	3.689	

802.11n(HT20) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Ant. Gain (dBi)	EIRP PSD (dBm)	EIRP PSD Limit
Frequency [MHz]	Channel No.						
5180	36	1.238	0.332	1.570	0.38	1.950	10 dBm/MHz
5200	40	1.139	0.332	1.471	0.38	1.851	
5240	48	1.066	0.332	1.398	0.38	1.778	

■ Test Plots(802.11a)

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 48)



UNII 2A (Ch. 52)



UNII 2C (Ch. 100)



UNII 3 (Ch. 149)



□ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.

UNII 1 (Ch. 36)



UNII 2A (Ch. 52)



UNII 2C (Ch. 100)



UNII 3 (Ch. 149)



10.6 FREQUENCY STABILITY.

10.6.1 20 MHz BW

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
OPERATING FREQUENCY: 5,180,000,000 Hz
CHANNEL: 36
REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5180029.77	29.77
100%		-30	5180052.77	52.77
100%		-20	5180045.62	45.62
100%		-10	5180040.16	40.16
100%		0	5180035.65	35.65
100%		+10	5180032.08	32.08
100%		+30	5180031.90	31.90
100%		+40	5180040.87	40.87
100%		+50	5180045.52	45.52
LOW	3.00	+20	5180048.12	48.12
HIGH	3.60	+20	5180044.93	44.93

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5260022.71	22.71
100%		-30	5260047.41	47.41
100%		-20	5260041.22	41.22
100%		-10	5260034.73	34.73
100%		0	5260029.65	29.65
100%		+10	5260025.57	25.57
100%		+30	5260025.40	25.40
100%		+40	5260035.80	35.80
100%		+50	5260040.74	40.74
LOW	3.00	+20	5260040.77	40.77
HIGH	3.60	+20	5260036.92	36.92

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5500019.22	19.22
100%		-30	5500042.39	42.39
100%		-20	5500034.74	34.74
100%		-10	5500029.12	29.12
100%		0	5500024.70	24.70
100%		+10	5500021.43	21.43
100%		+30	5500022.73	22.73
100%		+40	5500031.19	31.19
100%		+50	5500037.10	37.10
LOW	3.00	+20	5500036.31	36.31
HIGH	3.60	+20	5500033.35	33.35

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5745031.60	31.60
100%		-30	5745054.95	54.95
100%		-20	5745047.50	47.50
100%		-10	5745040.92	40.92
100%		0	5745037.43	37.43
100%		+10	5745033.66	33.66
100%		+30	5745034.90	34.90
100%		+40	5745045.04	45.04
100%		+50	5745050.69	50.69
LOW	3.00	+20	5745048.95	48.95
HIGH	3.60	+20	5745045.46	45.46

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5180031.04	31.04
100%		-30	5180054.80	54.80
100%		-20	5180047.71	47.71
100%		-10	5180041.97	41.97
100%		0	5180038.62	38.62
100%		+10	5180035.14	35.14
100%		+30	5180034.95	34.95
100%		+40	5180043.06	43.06
100%		+50	5180046.30	46.30
LOW	3.00	+20	5180050.80	50.80
HIGH	3.60	+20	5180045.82	45.82

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5260024.93	24.93
100%		-30	5260049.21	49.21
100%		-20	5260042.83	42.83
100%		-10	5260037.34	37.34
100%		0	5260032.48	32.48
100%		+10	5260028.58	28.58
100%		+30	5260028.12	28.12
100%		+40	5260037.48	37.48
100%		+50	5260041.02	41.02
LOW	3.00	+20	5260044.39	44.39
HIGH	3.60	+20	5260040.11	40.11

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5500032.05	32.05
100%		-30	5500049.36	49.36
100%		-20	5500043.13	43.13
100%		-10	5500037.75	37.75
100%		0	5500033.25	33.25
100%		+10	5500029.90	29.90
100%		+30	5500027.98	27.98
100%		+40	5500037.73	37.73
100%		+50	5500043.40	43.40
LOW	3.00	+20	5500042.10	42.10
HIGH	3.60	+20	5500042.32	42.32

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5745042.56	42.56
100%		-30	5745066.90	66.90
100%		-20	5745059.96	59.96
100%		-10	5745053.73	53.73
100%		0	5745048.63	48.63
100%		+10	5745044.93	44.93
100%		+30	5745045.72	45.72
100%		+40	5745054.83	54.83
100%		+50	5745058.19	58.19
LOW	3.00	+20	5745062.20	62.20
HIGH	3.60	+20	5745056.61	56.61

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5180022.91	22.91
100%		-30	5180046.96	46.96
100%		-20	5180040.56	40.56
100%		-10	5180034.71	34.71
100%		0	5180030.92	30.92
100%		+10	5180027.54	27.54
100%		+30	5180025.65	25.65
100%		+40	5180035.52	35.52
100%		+50	5180039.88	39.88
LOW	3.00	+20	5180041.55	41.55
HIGH	3.60	+20	5180038.34	38.34

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5260031.44	31.44
100%		-30	5260047.07	47.07
100%		-20	5260039.67	39.67
100%		-10	5260033.46	33.46
100%		0	5260030.13	30.13
100%		+10	5260026.66	26.66
100%		+30	5260026.19	26.19
100%		+40	5260033.98	33.98
100%		+50	5260037.13	37.13
LOW	3.00	+20	5260037.56	37.56
HIGH	3.60	+20	5260041.22	41.22

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5500031.85	31.85
100%		-30	5500056.33	56.33
100%		-20	5500049.31	49.31
100%		-10	5500042.69	42.69
100%		0	5500038.55	38.55
100%		+10	5500036.23	36.23
100%		+30	5500034.79	34.79
100%		+40	5500043.89	43.89
100%		+50	5500048.98	48.98
LOW	3.00	+20	5500049.76	49.76
HIGH	3.60	+20	5500045.36	45.36

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5745027.58	27.58
100%		-30	5745056.61	56.61
100%		-20	5745050.03	50.03
100%		-10	5745043.22	43.22
100%		0	5745039.85	39.85
100%		+10	5745036.46	36.46
100%		+30	5745035.45	35.45
100%		+40	5745044.50	44.5
100%		+50	5745048.94	48.94
LOW	3.00	+20	5745047.79	47.79
HIGH	3.60	+20	5745049.15	49.15

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
OPERATING FREQUENCY: 5,180,000,000 Hz
CHANNEL: 36
REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5180037.67	37.67
100%		-30	5180062.19	62.19
100%		-20	5180055.68	55.68
100%		-10	5180048.58	48.58
100%		0	5180043.64	43.64
100%		+10	5180040.48	40.48
100%		+30	5180041.33	41.33
100%		+40	5180051.87	51.87
100%		+50	5180055.95	55.95
LOW	3.00	+20	5180056.59	56.59
HIGH	3.60	+20	5180051.40	51.40

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5260022.95	22.95
100%		-30	5260047.80	47.80
100%		-20	5260041.29	41.29
100%		-10	5260034.27	34.27
100%		0	5260029.59	29.59
100%		+10	5260027.20	27.20
100%		+30	5260026.17	26.17
100%		+40	5260035.12	35.12
100%		+50	5260040.36	40.36
LOW	3.00	+20	5260040.71	40.71
HIGH	3.60	+20	5260038.52	38.52

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C
 OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5500027.93	27.93
100%		-30	5500051.47	51.47
100%		-20	5500043.38	43.38
100%		-10	5500038.13	38.13
100%		0	5500033.79	33.79
100%		+10	5500031.68	31.68
100%		+30	5500030.51	30.51
100%		+40	5500039.86	39.86
100%		+50	5500042.93	42.93
LOW	3.00	+20	5500047.81	47.81
HIGH	3.60	+20	5500042.87	42.87

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.3 VDC

Voltage	Power	Temp.	Frequency	Frequency
(%)	(AC)	(°C)	(kHz)	Error (kHz)
100%	3.30	+20(Ref)	5745035.46	35.46
100%		-30	5745052.54	52.54
100%		-20	5745046.13	46.13
100%		-10	5745040.78	40.78
100%		0	5745036.97	36.97
100%		+10	5745034.48	34.48
100%		+30	5745030.52	30.52
100%		+40	5745039.76	39.76
100%		+50	5745043.07	43.07
LOW	3.00	+20	5745042.74	42.74
HIGH	3.60	+20	5745045.99	45.99

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.7 STRADDLE CHANNEL

10.7.1 26 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5708.96	16.04
802.11n(HT20)				5708.96	16.04
802.11a	UNII 3	5720	144	5730.96	5.96
802.11n(HT20)				5731.08	6.08

Note:

[UNII 2C] 26 dB Bandwidth = 5725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] -5725 MHz

■ Test Plots (26 dB Bandwidth)

802.11a UNII Band



802.11n(HT20) UNII Band



10.7.2 6 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII 3	5720	144	5728.24	3.24	> 0.5
802.11n(HT20)				5728.84	3.84	> 0.5

Note:


6 dB Bandwidth = Measured Frequency[MHz] – 5725 MHz

■ Test Plots(UNII 3 Band 6 dB Bandwidth)

802.11a CH.144



802.11n_HT20 CH.144

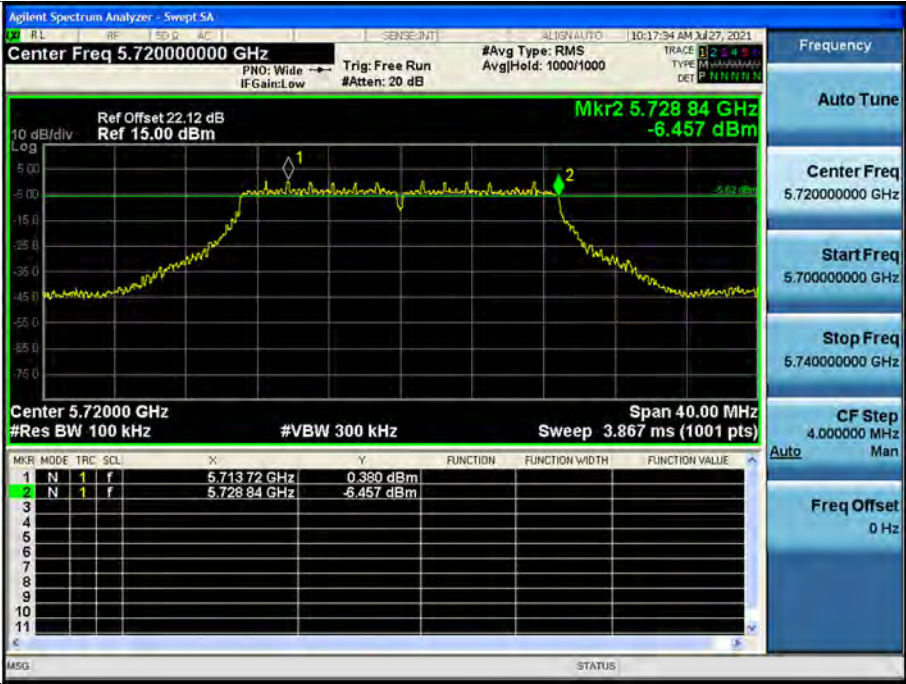


10.7.3 Output Power


Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Total Power (dBm)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	10.47	0.057	10.53	23.05
802.11n(HT20)			10.09	0.332	10.43	23.05
802.11a	5720 (UNII 3 Band)	144	4.35	0.057	4.41	30.00
802.11n(HT20)			4.58	0.332	4.91	30.00

Test Plots_

802.11a UNII 2C Band

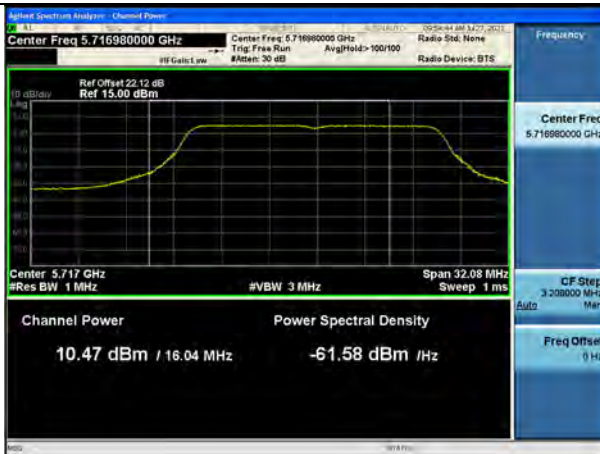

802.11a UNII 3 Band

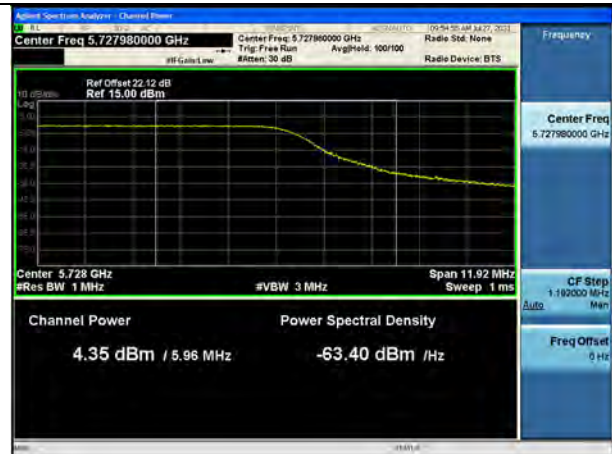

802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band



10.7.4 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	0.109	0.057	0.166	11 dBm/ MHz
802.11n(HT20)			-0.367	0.332	-0.035	
802.11a	5720 (UNII 3 Band)	144	-2.875	0.057	-2.818	30 dBm/ 500kHz
802.11n(HT20)			-3.500	0.332	-3.168	

Test Plots

802.11a UNII 2C Band



802.11a UNII 3 Band



802.11n(HT20) UNII 2C Band



802.11n(HT20) UNII 3 Band



10.8 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin	Frequency
MHz	dB μ V/m	dB/m	(H/V)	dB μ V/m	dB μ V/m	dB	MHz

No Critical peaks found

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log$ (specific distance / test distance) (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L+D.F	Ant. POL	Total	Limit	Margin	Frequency
MHz	dB μ V/m	dB/m	(H/V)	dB μ V/m	dB μ V/m	dB	MHz

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

Band : UNII 1
Operation Mode: 802.11 a
Transfer Rate: 6 Mbps
Operating Frequency 5180 MHz
Channel No. 36 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10360	54.82	8.90	V	63.72	68.20	4.48	PK
15540	40.05	13.15	V	53.20	73.98	20.78	PK
15540	27.41	13.15	V	40.56	53.98	13.42	AV
10360	53.11	8.90	H	62.01	68.20	6.19	PK
15540	41.55	13.15	H	54.70	73.98	19.28	PK
15540	27.56	13.15	H	40.71	53.98	13.27	AV

Band : UNII 1
Operation Mode: 802.11 a
Transfer Rate: 6 Mbps
Operating Frequency 5200 MHz
Channel No. 40 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10400	55.99	9.11	V	65.10	68.20	3.10	PK
15600	41.01	13.41	V	54.42	73.98	19.56	PK
15600	25.91	13.41	V	39.32	53.98	14.66	AV
10400	54.38	9.11	H	63.49	68.20	4.71	PK
15600	39.11	13.41	H	52.52	73.98	21.46	PK
15600	25.74	13.41	H	39.15	53.98	14.83	AV

Band : UNII 1
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5240 MHz
 Channel No. 48 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10480	52.96	9.54	V	62.50	68.20	5.70	PK
15720	40.05	13.05	V	53.10	73.98	20.88	PK
15720	25.64	13.05	V	38.69	53.98	15.29	AV
10480	52.05	9.54	H	61.59	68.20	6.61	PK
15720	38.97	13.05	H	52.02	73.98	21.96	PK
15720	25.03	13.05	H	38.08	53.98	15.90	AV

Band : UNII 2A
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5260 MHz
 Channel No. 52 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10520	55.21	9.80	V	65.01	68.20	3.19	PK
15780	39.26	13.51	V	52.77	73.98	21.21	PK
15780	26.75	13.51	V	40.26	53.98	13.72	AV
10520	54.10	9.80	H	63.90	68.20	4.30	PK
15780	40.26	13.51	H	53.77	73.98	20.21	PK
15780	27.01	13.51	H	40.52	53.98	13.46	AV



Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10600	52.83	10.27	V	63.10	73.98	10.88	PK
10600	39.69	10.27	V	49.96	53.98	4.02	AV
15900	40.68	13.01	V	53.69	73.98	20.29	PK
15900	27.23	13.01	V	40.24	53.98	13.74	AV
10600	53.57	10.27	H	63.84	73.98	10.14	PK
10600	39.32	10.27	H	49.59	53.98	4.39	AV
15900	40.87	13.01	H	53.88	73.98	20.10	PK
15900	27.44	13.01	H	40.45	53.98	13.53	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10640	51.64	10.41	V	62.05	73.98	11.93	PK
10640	37.83	10.41	V	48.24	53.98	5.74	AV
15960	39.59	13.53	V	53.12	73.98	20.86	PK
15960	26.66	13.53	V	40.19	53.98	13.79	AV
10640	50.02	10.41	H	60.43	73.98	13.55	PK
10640	37.26	10.41	H	47.67	53.98	6.31	AV
15960	40.63	13.53	H	54.16	73.98	19.82	PK
15960	27.01	13.53	H	40.54	53.98	13.44	AV

Band : UNII 2C
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11000	52.89	10.99	V	63.88	73.98	10.10	PK
11000	39.10	10.99	V	50.09	53.98	3.89	AV
16500	41.54	12.68	V	54.22	68.20	13.98	PK
11000	52.16	10.99	H	63.15	73.98	10.83	PK
11000	38.36	10.99	H	49.35	53.98	4.63	AV
16500	42.50	12.68	H	55.18	68.20	13.02	PK

Band : UNII 2C
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5580 MHz
 Channel No. 116 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11160	53.61	10.82	V	64.43	73.98	9.55	PK
11160	39.61	10.82	V	50.43	53.98	3.55	AV
16740	40.98	13.47	V	54.45	68.20	13.75	PK
11160	53.03	10.82	H	63.85	73.98	10.13	PK
11160	39.16	10.82	H	49.98	53.98	4.00	AV
16740	41.36	13.47	H	54.83	68.20	13.37	PK

Band : UNII 2C
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5720 MHz
 Channel No. 144 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11440	49.93	11.37	V	61.30	73.98	12.68	PK
11440	36.71	11.37	V	48.08	53.98	5.90	AV
17160	40.72	15.11	V	55.83	68.20	12.37	PK
11440	49.41	11.37	H	60.78	73.98	13.20	PK
11440	36.00	11.37	H	47.37	53.98	6.61	AV
17160	40.84	15.11	H	55.95	68.20	12.25	PK

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5745MHz
 Channel No. 149 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11490	48.96	11.29	V	60.25	73.98	13.73	PK
11490	35.89	11.29	V	47.18	53.98	6.80	AV
17235	41.09	15.41	V	56.50	68.20	11.70	PK
11490	48.50	11.29	H	59.79	73.98	14.19	PK
11490	34.78	11.29	H	46.07	53.98	7.91	AV
17235	40.93	15.41	H	56.34	68.20	11.86	PK

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5785 MHz
 Channel No. 157 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11570	47.06	10.65	V	57.71	73.98	16.27	PK
11570	33.31	10.65	V	43.96	53.98	10.02	AV
17355	40.57	16.11	V	56.68	68.20	11.52	PK
11570	48.68	10.65	H	59.33	73.98	14.65	PK
11570	34.77	10.65	H	45.42	53.98	8.56	AV
17355	40.35	16.11	H	56.46	68.20	11.74	PK

Band : UNII 3
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5825 MHz
 Channel No. 165 Ch

Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
11650	46.21	10.20	V	56.41	73.98	17.57	PK
11650	32.65	10.20	V	42.85	53.98	11.13	AV
17475	40.20	17.45	V	57.65	68.20	10.55	PK
11650	45.70	10.20	H	55.90	73.98	18.08	PK
11650	31.93	10.20	H	42.13	53.98	11.85	AV
17475	40.51	17.45	H	57.96	68.20	10.24	PK

Note:

All Modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

- Worstcase : UNII 1, 2A, 2C, 3 : 802.11a

Band :	UNII 1
Operation Mode:	802.11 n_HT20
Transfer Rate:	0
Operating Frequency	5200 MHz
Channel No.	40 Ch


Frequency	Measured	A.F+C.L-A.G+D.F	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
10400	55.59	9.11	V	64.70	68.20	3.50	PK
15600	39.22	13.41	V	52.63	73.98	21.35	PK
15600	26.46	13.41	V	39.87	53.98	14.11	AV
10400	54.98	9.11	H	64.09	68.20	4.11	PK
15600	38.85	13.41	H	52.26	73.98	21.72	PK
15600	26.03	13.41	H	39.44	53.98	14.54	AV

Note:

All Modes of operation were investigated and the worst case configuration results are reported.

Test Plots

Peak Measured (802.11a, Ch.40 2nd Harmonic, Z-V)

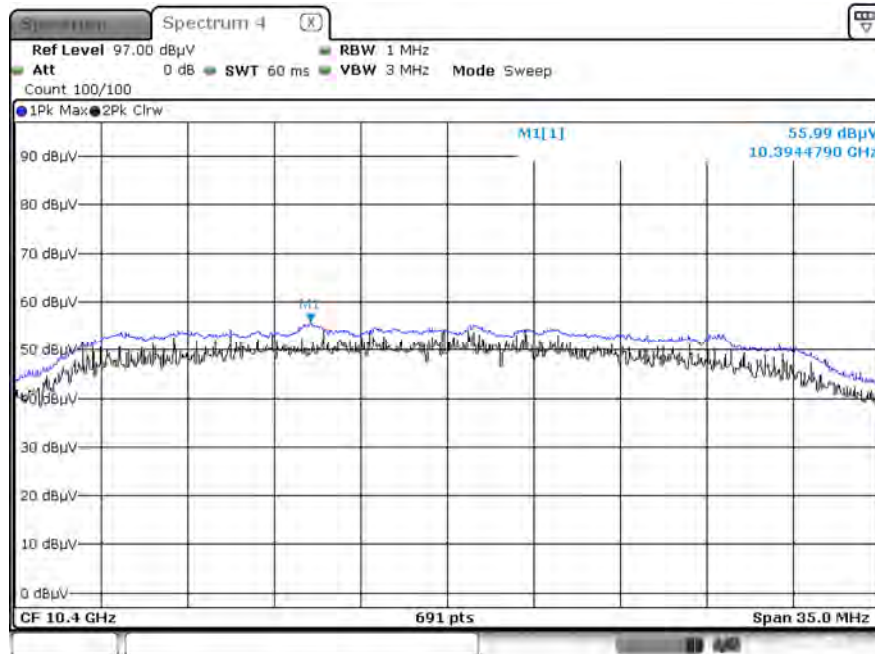

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.9 RADIATED RESTRICTED BAND EDGE

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	50.17	7.81	H	57.98	73.98	16.00	PK
5150	38.61	7.81	H	46.42	53.98	7.56	AV
5150	50.62	7.81	V	58.43	73.98	15.55	PK
5150	38.43	7.81	V	46.24	53.98	7.74	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	46.55	7.81	H	54.36	73.98	19.62	PK
5150	38.83	7.81	H	46.64	53.98	7.34	AV
5150	46.20	7.81	V	54.01	73.98	19.97	PK
5150	34.41	7.81	V	42.22	53.98	11.76	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	52.61	7.51	H	60.12	73.98	13.86	PK
5350	38.67	7.51	H	46.18	53.98	7.80	AV
5350	51.64	7.51	V	59.15	73.98	14.83	PK
5350	37.72	7.51	V	45.23	53.98	8.75	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	48.90	8.15	H	57.05	73.98	16.93	PK
5460	36.51	8.15	H	44.66	53.98	9.32	AV
5470	53.21	8.21	H	61.42	68.20	6.78	PK
5460	49.48	8.15	V	57.63	73.98	16.35	PK
5460	35.85	8.15	V	44.00	53.98	9.98	AV
5470	51.55	8.21	V	59.76	68.20	8.44	PK

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5520 MHz
Channel No.	104 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	47.46	8.15	H	55.61	73.98	18.37	PK
5460	34.51	8.15	H	42.66	53.98	11.32	AV
5470	48.19	8.21	H	56.40	68.20	11.80	PK
5460	46.55	8.15	V	54.70	73.98	19.28	PK
5460	33.91	8.15	V	42.06	53.98	11.92	AV
5470	47.56	8.21	V	55.77	68.20	12.43	PK

Band : UNII 1
 Operation Mode: 802.11 n_HT20
 Transfer MCS Index: 0
 Operating Frequency 5180 MHz
 Channel No. 36 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	51.54	7.81	H	59.35	73.98	14.63	PK
5150	38.98	7.81	H	46.79	53.98	7.19	AV
5150	50.02	7.81	V	57.83	73.98	16.15	PK
5150	37.40	7.81	V	45.21	53.98	8.77	AV

Band : UNII 1
 Operation Mode: 802.11 n_HT20
 Transfer MCS Index: 0
 Operating Frequency 5200 MHz
 Channel No. 40 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5150	46.31	7.81	H	54.12	73.98	19.86	PK
5150	35.30	7.81	H	43.11	53.98	10.87	AV
5150	45.22	7.81	V	53.03	73.98	20.95	PK
5150	33.72	7.81	V	41.53	53.98	12.45	AV

Band :	UNII 2A
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5350	52.59	7.51	H	60.10	73.98	13.88	PK
5350	38.85	7.51	H	46.36	53.98	7.62	AV
5350	51.93	7.51	V	59.44	73.98	14.54	PK
5350	38.70	7.51	V	46.21	53.98	7.77	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	50.10	8.15	H	58.25	73.98	15.73	PK
5460	36.38	8.15	H	44.53	53.98	9.45	AV
5470	56.13	8.21	H	64.34	68.20	3.86	PK
5460	47.37	8.15	V	55.52	73.98	18.46	PK
5460	35.92	8.15	V	44.07	53.98	9.91	AV
5470	55.06	8.21	V	63.27	68.20	4.93	PK

Band :	UNII 2C
Operation Mode:	802.11 n_HT20
Transfer MCS Index:	0
Operating Frequency	5520 MHz
Channel No.	104 Ch


Frequency	Measured	C.L+A.F+D.F-A.G+ATT	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBμV]	[dB]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	Type
5460	46.77	8.15	H	54.92	73.98	19.06	PK
5460	34.67	8.15	H	42.82	53.98	11.16	AV
5470	49.29	8.21	H	57.50	68.20	10.70	PK
5460	45.68	8.15	V	53.83	73.98	20.15	PK
5460	34.01	8.15	V	42.16	53.98	11.82	AV
5470	48.56	8.21	V	56.77	68.20	11.43	PK

▣ Test Plots(UNII 1, 2A, 2C)

Average Measured (802.11 n_HT20, Ch.36) (X-H)



Average Measured (802.11 n_HT20, Ch.100) (Y-H)

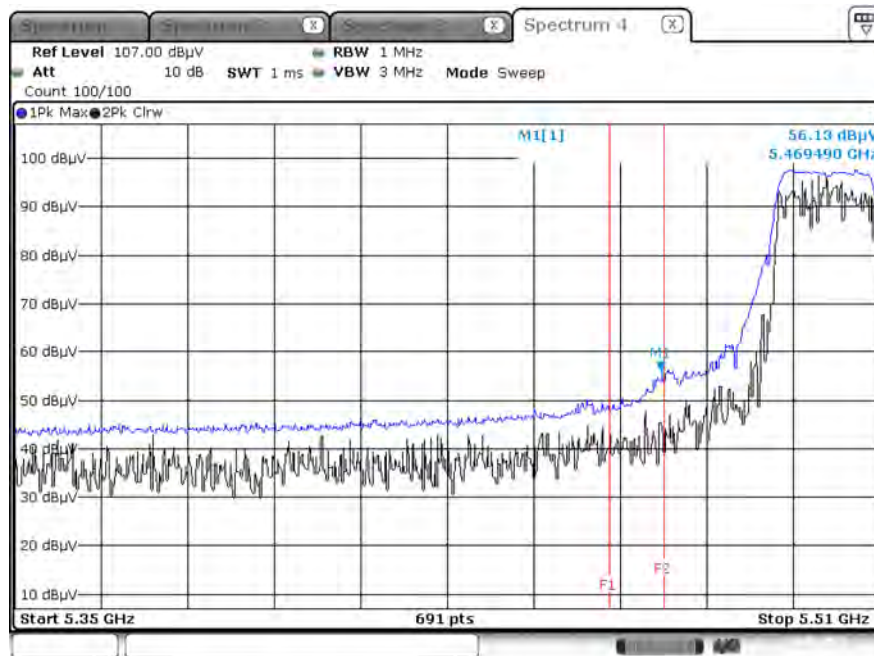


Note:


Only the worst case plots for Radiated Restricted Band Edge.

▣ Test Plots(Staraddle Channel)

Peak Reading (802.11a, Ch.144, X-H)

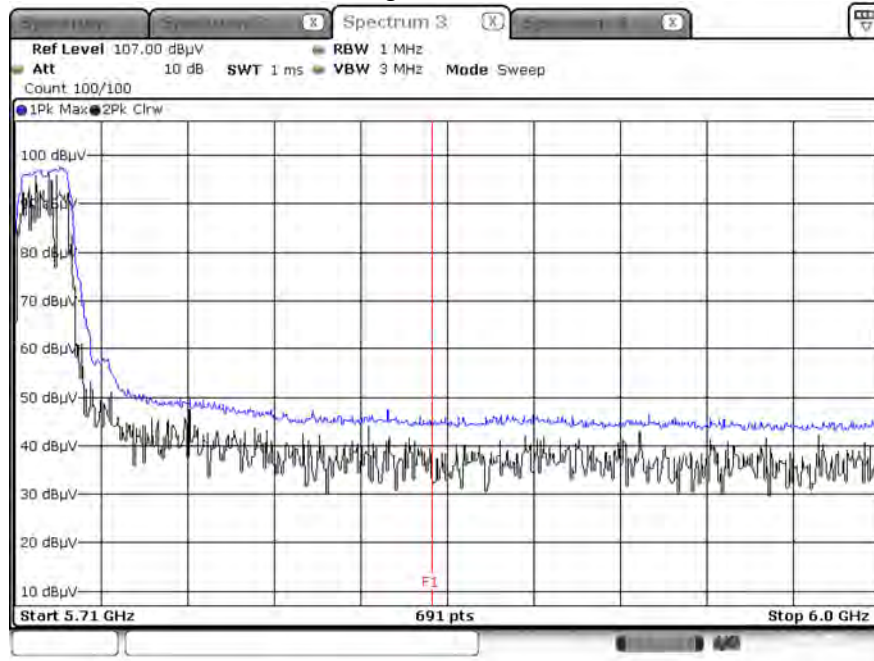

Peak Reading (802.11n_HT20, Ch.144, X-H)

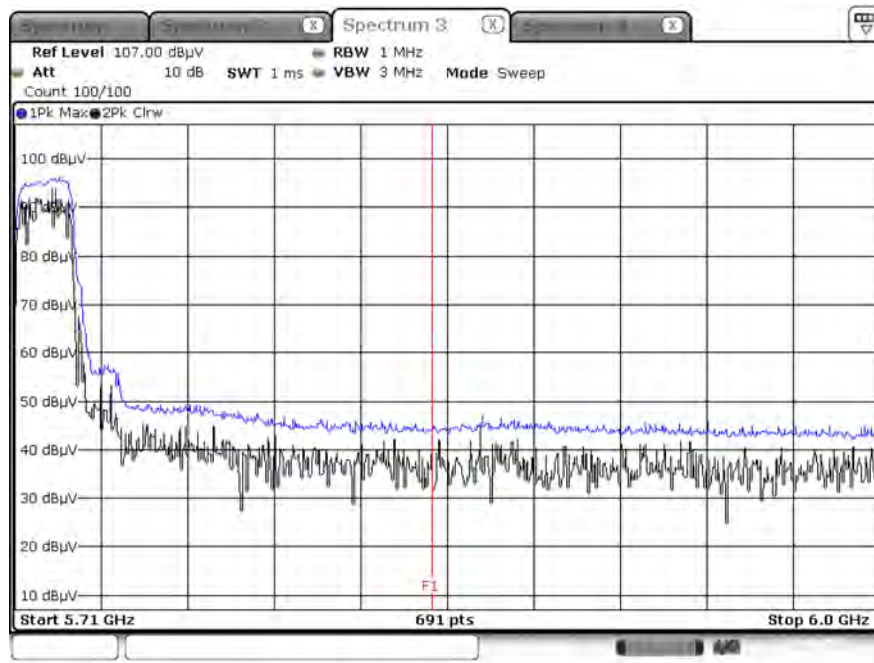


Note :


1. Only the worst case plots for Radiated Restricted Band Edge.
2. Red line : 5 850 MHz
3. Ambient Noise (Because of ambient noise, We attached only the worst plot without a data table)

▣ Test Plots(UNII 3)


Peak Measured (802.11a, Ch.149, X-H)

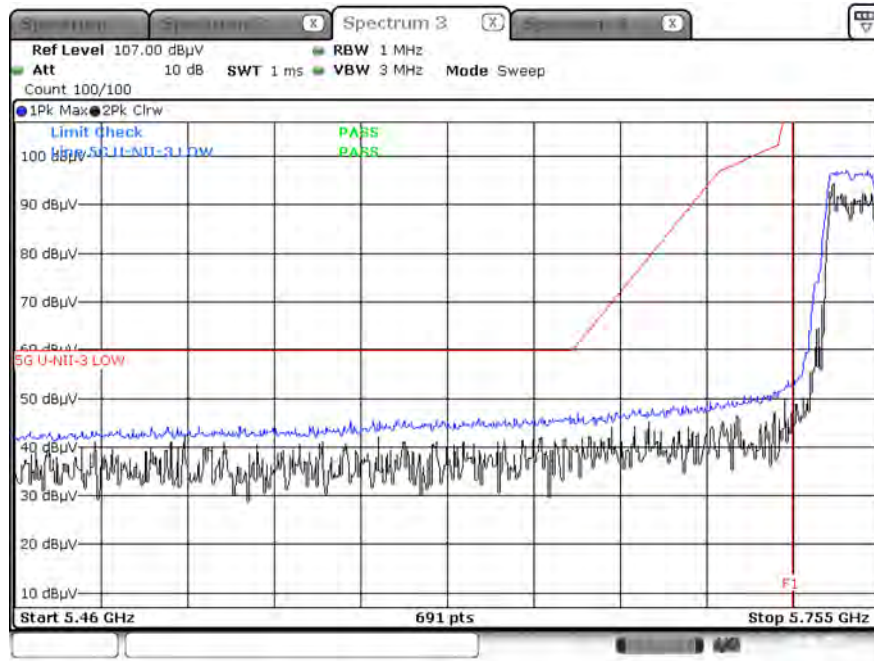


Peak Measured (802.11n_HT20, Ch.149, X-H)

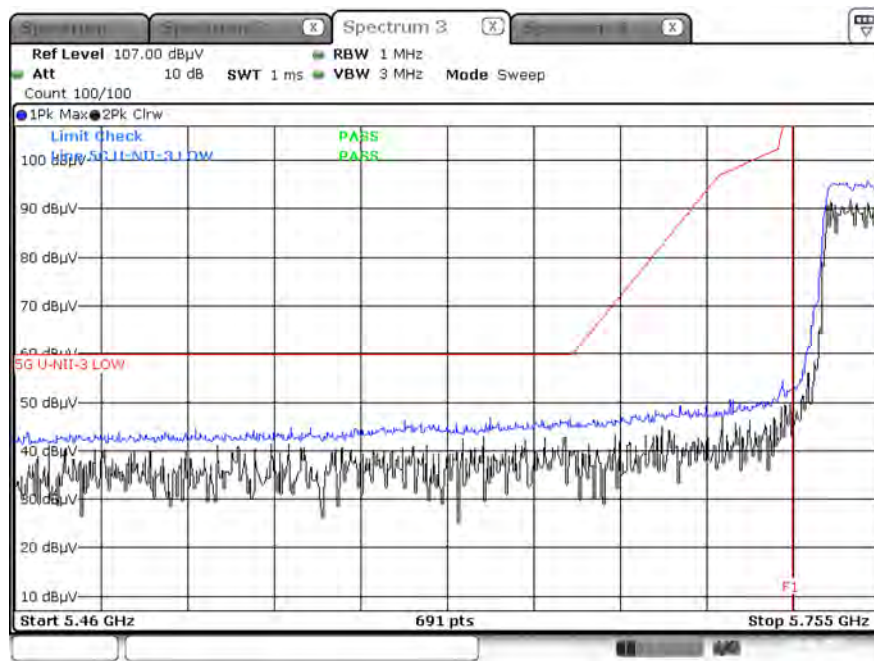

Peak Measured (802.11a, Ch.165, X-H)

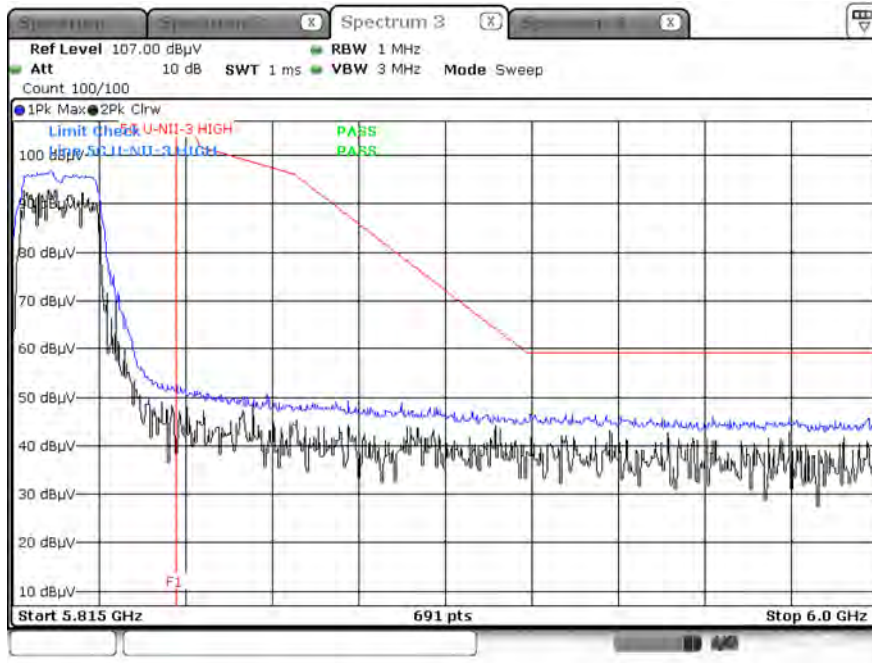

Peak Measured (802.11n_HT20, Ch.165, X-H)

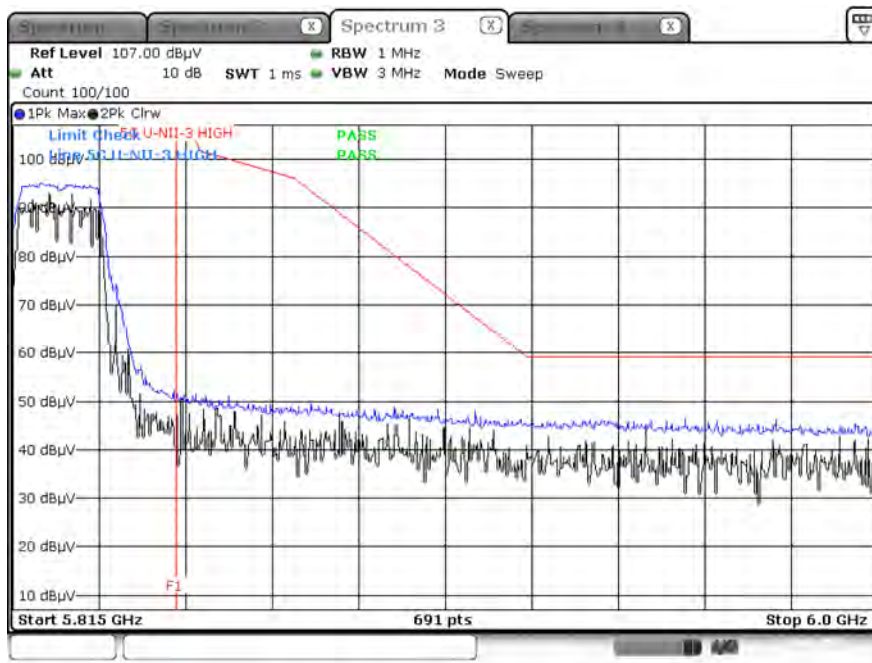

Note :

1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

10.10 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

10.11 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : WD-MS011
Manufacturer : EVERINT Co.Ltd
Test Site: SHIELD ROOM
Operating Conditions : WLAN 5G_L1

Full Spectrum

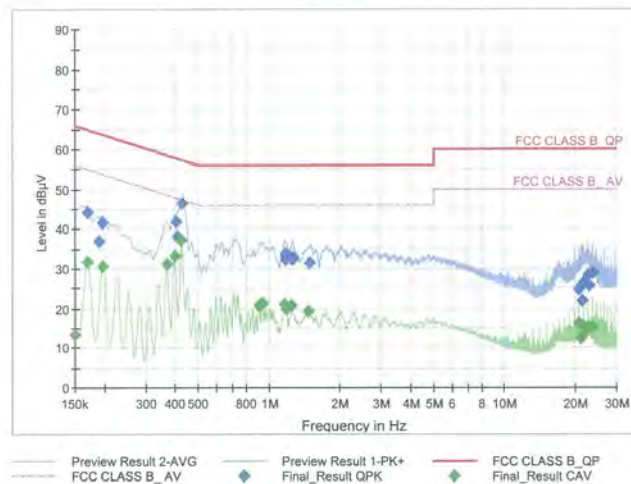

Final Result_QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1703	44.15	64.95	20.80	9.000	L1	OFF	9.6
0.1905	36.97	64.02	27.04	9.000	L1	OFF	9.6
0.1973	41.61	63.73	22.11	9.000	L1	OFF	9.6
0.4020	41.72	57.81	16.10	9.000	L1	OFF	9.6
0.4065	37.94	57.72	19.78	9.000	L1	OFF	9.6
0.4290	46.36	57.27	10.91	9.000	L1	OFF	9.6
1.1728	33.81	56.00	22.19	9.000	L1	OFF	9.7
1.1773	33.08	56.00	22.92	9.000	L1	OFF	9.7
1.1818	32.20	56.00	23.80	9.000	L1	OFF	9.7
1.2560	32.83	56.00	23.17	9.000	L1	OFF	9.7
1.2605	32.26	56.00	23.74	9.000	L1	OFF	9.7
1.4968	31.53	56.00	24.47	9.000	L1	OFF	9.7
20.8063	24.86	60.00	35.14	9.000	L1	OFF	10.4
21.2878	21.89	60.00	38.11	9.000	L1	OFF	10.4
21.7490	26.37	60.00	33.63	9.000	L1	OFF	10.5
22.6940	28.38	60.00	31.62	9.000	L1	OFF	10.5
22.8178	25.59	60.00	34.41	9.000	L1	OFF	10.5
23.6390	28.74	60.00	31.26	9.000	L1	OFF	10.5

2021-07-23

오전 9:19:51

Test

2 / 2

Final_Result_CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	13.41	56.00	42.59	9.000	L1	OFF	9.7
0.1703	31.80	54.95	23.15	9.000	L1	OFF	9.6
0.1973	30.66	53.73	23.06	9.000	L1	OFF	9.6
0.3683	31.29	48.54	17.26	9.000	L1	OFF	9.6
0.3975	33.08	47.91	14.83	9.000	L1	OFF	9.6
0.4245	37.21	47.36	10.15	9.000	L1	OFF	9.6
0.9095	20.76	46.00	25.24	9.000	L1	OFF	9.7
0.9365	21.44	46.00	24.56	9.000	L1	OFF	9.7
1.1638	21.15	46.00	24.85	9.000	L1	OFF	9.7
1.1908	20.04	46.00	25.96	9.000	L1	OFF	9.7
1.2493	20.76	46.00	25.24	9.000	L1	OFF	9.7
1.4743	19.36	46.00	26.64	9.000	L1	OFF	9.7
20.8018	16.14	50.00	33.86	9.000	L1	OFF	10.4
21.0785	12.39	50.00	37.61	9.000	L1	OFF	10.4
21.2878	13.05	50.00	36.95	9.000	L1	OFF	10.4
21.7490	15.66	50.00	34.34	9.000	L1	OFF	10.5
22.6840	15.07	50.00	34.93	9.000	L1	OFF	10.5
23.6390	15.25	50.00	34.75	9.000	L1	OFF	10.5

2021-07-23

오전 9:19:51

Conducted Emissions (Line 2)

Test

1 / 2


Test Report

Common Information

EUT :
Manufacturer :
Test Site:
Operating Conditions :

WD-MS011
EVERINT Co.,Ltd
SHIELD ROOM
WLAN 5G_N

Full Spectrum

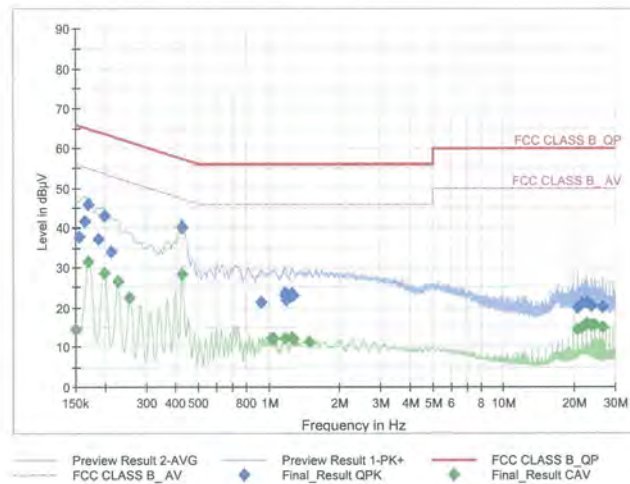

Final Result QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	37.65	65.75	28.10	9.000	N	OFF	9.6
0.1635	41.61	65.28	23.67	9.000	N	OFF	9.6
0.1703	45.96	64.95	18.99	9.000	N	OFF	9.6
0.1883	37.22	64.11	26.90	9.000	N	OFF	9.6
0.1995	43.08	63.63	20.55	9.000	N	OFF	9.6
0.2130	34.11	63.09	28.98	9.000	N	OFF	9.6
0.4268	40.05	57.32	17.27	9.000	N	OFF	9.6
0.9298	21.49	56.00	34.51	9.000	N	OFF	9.7
1.1728	23.70	56.00	32.30	9.000	N	OFF	9.7
1.1773	23.11	56.00	32.89	9.000	N	OFF	9.7
1.1885	21.84	56.00	34.16	9.000	N	OFF	9.7
1.2628	23.24	56.00	32.76	9.000	N	OFF	9.7
1.2673	23.08	56.00	32.92	9.000	N	OFF	9.7
20.8085	19.91	60.00	40.09	9.000	N	OFF	10.6
21.7513	21.17	60.00	38.83	9.000	N	OFF	10.6
22.6963	21.44	60.00	38.56	9.000	N	OFF	10.6
23.6413	20.55	60.00	39.45	9.000	N	OFF	10.7
26.4785	20.25	60.00	39.75	9.000	N	OFF	10.8

2021-07-23

오전 9:13:12

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	14.45	56.00	41.55	9.000	N	OFF	9.6
0.1703	31.41	54.95	23.54	9.000	N	OFF	9.6
0.1995	28.58	53.63	25.05	9.000	N	OFF	9.6
0.2265	26.41	52.58	26.17	9.000	N	OFF	9.6
0.2558	22.50	51.57	29.07	9.000	N	OFF	9.6
0.4268	28.16	47.32	19.15	9.000	N	OFF	9.6
1.0243	12.12	46.00	33.88	9.000	N	OFF	9.7
1.0513	12.22	46.00	33.78	9.000	N	OFF	9.7
1.1705	12.15	46.00	33.85	9.000	N	OFF	9.7
1.2538	12.39	46.00	33.61	9.000	N	OFF	9.7
1.2785	11.91	46.00	34.09	9.000	N	OFF	9.7
1.4900	11.27	46.00	34.73	9.000	N	OFF	9.7
20.8063	14.30	50.00	35.70	9.000	N	OFF	10.6
21.7513	15.11	50.00	34.89	9.000	N	OFF	10.6
22.6963	15.77	50.00	34.23	9.000	N	OFF	10.6
23.6413	15.66	50.00	34.34	9.000	N	OFF	10.7
24.5885	15.65	50.00	34.35	9.000	N	OFF	10.7
26.4785	15.02	50.00	34.98	9.000	N	OFF	10.8

2021-07-23

오전 9:13:12

11. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESR / EMI Test Receiver	06/17/2021	Annual	101910
ESPEC	SU-642 / Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/03/2021	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/09/2021	Annual	MY49432108
Agilent	N1911A / Power Meter	04/08/2021	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/08/2021	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
HP	E3632A / DC Power Supply	09/16/2020	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/18/2021	Annual	07560
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/28/2021	Annual	08285
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/08/2021	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	02/23/2021	Annual	100808

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	TM19050002
Schwarzbeck	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	9168-1039
Schwarzbeck	BBHA 9120D / Horn Antenna	08/01/2019	Biennial	912D-1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/12/2021	Biennial	BBHA9170124
Rohde & Schwarz	FSV(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/14/2021	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	5
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	6
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	04/19/2021	Annual	3000C000175
TNM system	FMSR -05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/20/2021	Annual	F6
TNM system	FMSR -05B / ATT(10dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FMSR -05B / ATT(3dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FMSR -05B / LNA1(1~18GHz)	01/20/2021	Annual	25540
TNM system	FMSR -05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/20/2021	Annual	28550
TNM system	FMSR -05B / Thru(30MHz ~ 18GHz)	01/20/2021	Annual	None

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2108-FI003-P