



SANMINA - SCI

Product Integrity Laboratory

5151-47th Street, NE
Calgary, Alberta
T3J 3R2
Tel: (403) 295 5134
Fax : (403) 295 4091

Radiated Emissions Test Report 30MHz – 18GHz

Lab Project Number- 01NOR013

MTRM 1900MHz (CR) Radio Testing

Revision: 3.0

Date: March 12, 2002

Prepared for: Sanmina Design Solutions on behalf of Nortel Networks

Author: Jacky Wong
EMC Tools Developer

Approved by: Duane Friesen
Technical Advisor

Matthew Buxton
PI Laboratory Manager

PI Project Number: PI29889

Confidentially Statement: The information contained in this document is the property of Sanmina-SCI. Except as specifically authorized in writing by the Director of Sanmina Canada, the holder of this document shall keep all information contained herein confidential and shall protect the same, in whole or in part, from disclosure and dissemination to all third parties.



Summary

Sanmina-SCI

Product Integrity Laboratory
5151-47th Street, N.E. Calgary Alberta T3J 3R2

Accreditation Numbers: FCC 101386
IC 46405-3978

Performed For: Nortel Networks Inc.
5111 47th Street N.E.
Calgary, Alberta T3J 3R2
Tel: (403) 769-2000

EUT Name: Metrocell Radio Rack with 3MFRM
Model: MTRM CR 1900MHz


Test Result Summary

Appendix	Core Standard	Sanmina Test Case	Description & Range	Deviation From Standard	Deviation From Test Plan	Pass / Fail	Notes
	FCC Part 24.238		Spurious Radiated Emissions 30MHz-1GHz				
B		Method No. 2.0A	Radiated Emissions 30MHz - 1GHz	None	No*	Pass	None
B		Method No. 2.0	Radiated Emissions 30MHz - 1GHz	None	No*	Pass	None
B		Method No. 11	Substitution Measure	None	No*	Pass	None
	FCC Part 24.238		Spurious Radiated Emissions 1GHz-20GHz				
C		Method No. 29	Radiated Emissions 1GHz - 20GHz	None	No*	Pass	None
C		Method No. 11	Substitution Measure	None	No*	Pass	None


* Note: Test Plan deviations are listed in Appendix A.

The Pass/Fail column does not imply compliance of the EUT to the core standard in its entirety.

Tested By:


Jacky Wong
EMC Tools Developer

Checked By:


Duane Friesen, CET
EMC Technical Advisor

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



Table of Contents

REGISTER OF REVISIONS	4
1. INTRODUCTION	4
1.1 Purpose	4
1.2 Abbreviations and Definitions	4
1.3 References	4
2. TEST LOG	4
3. EUT	5
3.1 Configuration	5
3.1.1 CONFIGURATION DEVIATIONS	6
3.2 Power	6
3.2.1 POWER DEVIATIONS	6
3.3 Cables	6
3.3.1 CABLE LIST DEVIATIONS	7
3.4 EUT Frequencies	7
3.4.1 FREQUENCY LIST DEVIATIONS	7
3.6 Mode of Operation	7
3.6.1 MODE OF OPERATION DEVIATION	7
3.7 Pass / Fail Criteria	7
4. SUPPORT EQUIPMENT	8
APPENDICES	9
APPENDIX A: TEST PLAN DEVIATION LOG	10
APPENDIX B: MTRM CR 1900MHZ RADIATED EMISSIONS 30MHZ-1GHZ DESCRIPTION AND RESULTS	12
APPENDIX C: MTRM CR 1900MHZ. RADIATED EMISSIONS 1GHZ-18GHZ DESCRIPTION AND RESULTS	22
APPENDIX D: TEST PLAN	33
APPENDIX E: SUPPLEMENTARY INFORMATION	36
END OF DOCUMENT	40

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



REGISTER OF REVISIONS

Issue	Date	Description of Revisions
1.0	January 16, 2002	Initial Release
2.0	February 19, 2002	Update Module list Update Cable list Update Equipment list
3.0	March 12, 2002	Corrected Table Unit Modified Data Table Removed Plots

1. INTRODUCTION

1.1 PURPOSE

The purpose of this document is to describe the tests that will enable Nortel's MTRM 1900MHz CR System to comply with Part 24.238 of the FCC Rules and Regulations for Type Acceptance/Certification prior to market deployment. The system under test was powered by -48VDC.

1.2 ABBREVIATIONS AND DEFINITIONS

No abbreviation and definition are defined in the test plan

1.3 REFERENCES

Standards, test methods and supporting documentation references are noted in section 1.1 and 1.2 of the test plan.

2. TEST LOG

Appendix	Test Case	Start	End
Date Received: 20Dec01			
B	Radiated Emissions (30MHz – 1GHz) – MTRM CR 1900MHz	04Dec01	11Jan02
C	Radiated Emissions (1GHz – 18GHz) – MTRM CR 1900MHz	09Jan02	14Jan02
Date Shipped: N/A			

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



3. EUT

3.1 CONFIGURATION

Refer to section 2 of the project test plan and each specific appendix for more details on the configuration of the EUT.

Table 1 –Description of EUT

Name	MTRM 1900MHz (CR) Radio Testing
Model #	MTRM CR 1900MHz
Revision #	N/A
Physical Description	A Metrocell Radio Rack with 3 MFRM units
Size	N/A
Weight	N/A
Power	2 feeds of –48VDC (current draw: typical 25 A/ feed)
Functional Description	The EUT had each MFRM set to operate on one carrier/one frequency. The carrier frequencies were different for each MFRM. All MFRMs were set to operate on the same sector (beta)

Module List was provided by Nortel Networks.

Table 2 - Module List

Qty	Module Description	PEC	Product Code	Verified
1	DPM	NTGS53JA 05	CLWVCC100A04	☐
1	MTRM	NTGY102A Q8	NNTM533GQDVP	☐
1	MPAM	NTGY80AB 03	NNTM533P0V7Y	☐
1	FAM	NTGY60AE 01	NNTM532VW89F	☐
1	DPM	NTGS53JA 05	CLWVPP201TV7	☐
1	MTRM	NTGY107A Q8	NNTM533GQ49U	☐
1	MPAM	NTGY80AB 03	NNTM532TMKGP	☐
1	FAM	NTGY60AE 01	NNTM532VW84A	☐
1	DPM	NTGS53GA 05	CLWVMM10092G	☐
1	MTRM	NTGY10ZA Q8	NNTM533GQ4AV	☐
1	MPAM	NTGY80AB 03	NNTM532P0MP8	☐
1	FAM	NTGY60AE 01	NNTM532VW87D	☐
1	FRAME	NTGS65AA D6	DEVP01010848	☐
1	CONTROL MODULE	NTGS40AA 48	NNTM5357CDFP	☐
1	CORE MODULE	NTGS30AA 47	NNTM5359PMQM	☐

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



Qty	Module Description	PEC	Product Code	Verified
1	GPSTM	NTGS50AA 08	NNTM74TM2C35	☐
1	CEM	NTGS60BA 78	NNTM5358DMK5	☐
1	CEM	NTGS60BA 74	NNTM5340693R	☐
1	CEM	NTGS60BA 77	NNTM534083J4	☐

Note: This list was provided by Nortel Networks.

☒ Indicates the Module has been checked by Sanmina-SCI.

3.1.1 CONFIGURATION DEVIATIONS

None

3.2 POWER

Refer to section 4 of the project test plan for a more detailed description of the power used.

3.2.1 POWER DEVIATIONS

None

3.3 CABLES

No cables are defined in the test plan.

Table 3 – Cable List

Ref.	Description	Model	Qty	Routing	Length (m)	Shield Type	Backshe II Material	Verified
1	EUT power	NTGS8082	2	EUT to – 48DC power supply	9.1	None	None	☐
2	RF Cable	None	7	EUT to Bulkhead	10	None	None	☐
3	Fiber Optic Cable	None	1	Bulkhead to SmartBits	-	Foil	None	☐
4	Alarm Cable	NTGS3518	1	EUT to ground DR	30	None	None	☐

Note: This list was supplied by Nortel Networks. Please refer to Appendix E.3.: Supplementary Information.

☒ Indicates the Cable has been checked by Sanmina-SCI.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



CABLE LIST DEVIATIONS

None

3.4 EUT FREQUENCIES

No frequency list was provided prior to testing.

3.4.1 FREQUENCY LIST DEVIATIONS

Refer to section Appendix E: Supplementary Information for frequencies provided by Nortel Networks on March 6, 2002.

3.6 MODE OF OPERATION

Refer to section 3 of the project test plan for a more detailed description of the EUT mode of operation.

3.6.1 MODE OF OPERATION DEVIATION

None

3.7 PASS / FAIL CRITERIA

No pass/ fail criteria is described in the project test plan.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



4. SUPPORT EQUIPMENT

No support equipment is defined in the test plan.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



APPENDICES

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



APPENDIX A: TEST PLAN DEVIATION LOG

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



MTRM CR 1.9GHz

[illegible]

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

March 12, 2002



APPENDIX B: MTRM CR 1900MHz Radiated Emissions 30MHz-1GHz Description and Results.

B.1. Test Basis

FCC Rules Part 2 section 2.1053 and 2.1057
FCC CFR 47 Part 24 section 24.238

B.2. Test Specifications

FCC Part 24		
Frequency	ERP Limit	Theoretical Peak Limit @ 10 meters
MHz	dBm	dBμV/m
30MHz – 1 GHz	-13	73.90

* Theoretical field strength based on a dipole

B.3. Test Procedure

EMC Test Method No. 2.0A, Radiated Emissions Automated Method 30MHz – 1GHz Rev 2.0
EMC Test Method No. 11, Substitution Method

B.4. Measurement Uncertainty

Method 2.0A +2.52 / -2.56
Method 11 +2.15 / -2.19

B.5. Deviations

From Standard

There were no deviations from the standard.

From Test Plan

All Test Plan deviations are noted in Appendix A.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

**B.6. Test Results****FCC Part 24****Peak Scan 30MHz – 1GHz (Horizontal Polarization)**



Project Name: 1900MHz MTRM
Model: 1900MHz MTRM
Comments: 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Horizontal

Tester: Jacky Wong
Test ID: RE02-10M-2001-030

Standard	FCC Part 24	Measurement Distance	10	meters
----------	-------------	----------------------	----	--------

Antenna	Frequency	AF	CF	Detector	Peak Measured Value	Corrected Value	Theoretical Limit	Theoretical Margin
	MHz	dB/m	dB		dBuV	dBuV/m	dBuV/m	dB
2261 RX BiCon Hpol	235.92	10.42	-23.27	Peak	41.16	28.30	73.90	45.60
2261 RX BiCon Hpol	314.72	13.20	-22.82	Peak	38.82	29.20	73.90	44.70
2261 RX BiCon Hpol	471.88	17.66	-23.21	Peak	37.25	31.70	73.90	42.20

Corrected Value: Measured Value + AF + CF

AF: Antenna Factors & CF: Correction Factors (LNA Gain + Cable Loss)

Notes:
Positive Margin indicates a pass

Note: Positive Margin indicates a Pass.

Peak Scan 30MHz – 1GHz (Vertical Polarization)



Project Name: 1900MHz MTRM
Model: 1900MHz MTRM
Comments: 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Vertical

Tester: Jacky Wong
Test ID: RE02-10M-2001-030

Standard	FCC Part 24	Measurement Distance	10	meters
----------	-------------	----------------------	----	--------

Antenna	Frequency	AF	CF	Detector	Peak Measured Value	Corrected Value	Theoretical Limit	Theoretical Margin
	MHz	dB/m	dB		dBuV	dBuV/m	dBuV/m	dB
2261 RX Bicon Vpol	235.93	10.92	-23.27	Peak	35.19	22.83	73.90	51.07
2261 RX Bicon Vpol	314.58	13.66	-22.82	Peak	38.85	29.69	73.90	44.21
2261 RX Bicon Vpol	471.87	17.40	-23.21	Peak	36.28	30.47	73.90	43.43

Corrected Value: Measured Value + AF + CF

AF: Antenna Factors & CF: Correction Factors (LNA Gain + Cable Loss)

Notes:
Positive Margin indicates a pass

Note: Positive Margin indicates a Pass.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.



Substitution Data 30MHz – 1GHz



Project Name: 1900MHz MTRM
Model: 1900MHz MTRM
Comments: 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Substitution Method

Tester: Jacky Wong
Test ID: RE02-10M-2001-030

Frequency (MHz)	Polarization (V/H)	Uncorrected Peak Measure level dBuV	Uncorrected Substitution measure level dBuV	Signal Generator dBm	Cable factor dB	Antenna Gain dB	Effective Radiated Power (E.R.P.) dBm	E.R.P Limit dBm	Margin dB
235.92	H	41.16	41.32	-63.60	-1.21	1.35	-63.66	-13	50.66
314.72	H	38.82	38.85	-63.60	-1.58	1.30	-64.08	-13	51.08
471.87	H	37.25	38.07	-60.00	-1.83	3.10	-58.73	-13	45.73
235.93	V	35.19	35.35	-65.00	-1.21	1.35	-64.86	-13	51.86
314.58	V	38.85	38.90	-60.00	-1.58	1.30	-60.28	-13	47.28
471.87	V	36.28	36.64	-59.80	-1.83	3.10	-58.53	-13	45.53

Effective Radiate Power (E.R.P) = Signal Generator + Cable Factor + Antenna Gain

Note: Positive Margin indicates a Pass.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



Measurement Equipment
Radiated Emissions 30MHz – 1GHz

Description	Type/Model	Manufacturer	Serial #	Cal Due	Cal Date
10m ANECHOIC CHAMBER					
Bilog Antenna	2071	Chase	40500566	Oct. 11, 2002	Oct. 11, 2001
Mast Controller	2090	EMCO	40500184	N/A	N/A
Multi Device Controller TT1 (Turntable)	2090	EMCO	40500183	N/A	N/A
RF Cable	Ferrite bead loaded cable	Suhner Succoflex	FBL-1	Dec. 17, 2002	Dec. 17, 2001
RF Cable	106	Suhner Succoflex	9353/6	Dec. 17, 2002	Dec. 17, 2001
RF Cable	104	Suhner Succoflex	115742	Dec. 17, 2002	Dec. 17, 2001
RF Cable	104	Suhner Succoflex	116567/4	Dec. 17, 2002	Dec. 17, 2001
RF Cable	104	Suhner Succoflex	11576/4	Dec. 17, 2002	Dec. 17, 2001
SUPPORT ROOM					
ESMI	1032.5510.23	Rohde & Schwarz	40500119	Mar. 09, 2002	Feb. 09, 2001
Amplifier	HP-8447F OPT H64	Hewlett Packard	40500228	Mar. 04, 2002	Mar. 04, 2001
Switch Matrix Controller	SMC-002	TDL	40500189	Mar. 04, 2002	Mar. 04, 2001
VERIFICATION EQUIPMENT					
RefRad	4630B	EMCO	40500315	N/A	N/A
RefRad (Kit)	Balun A	NA	NA	N/A	N/A
RefRad (Kit)	40cm Dipole	NA	NA	N/A	N/A
RefRad Fixture	NA	Sanmina	RefRad Fixture #1	N/A	N/A

B.7. Deviations from Normal Operating Mode

No deviations from the normal operating mode in the project test plan, are noted in Appendix A of the Test Report.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



B.8. Test Setup Special Considerations

None.

B.9. Sample Calculation

Emission Level = Measured Level + Correction Factors

Margin = Limit – Emission Level

ERP Limit = $P_{dBm} - (43 + 10\log(P_w))$

Example

$P = 20W$

ERP Limit

$= 43dBm - (43 + 10\log(20)) = -13dBm$

Peak Limit = $120 + 20\log(\sqrt{49.2 * P_w} / D)$

Example

$P = -13dBm = 0.00005W$

$D = 10m$

Peak Limit

$= 120 + 20\log(\sqrt{49.2 * 0.00005} / 10)$

$= 73.9 \text{ dBuV/m}$

B.10. Test Data and Pictures

Pictures for Radiated Emissions appear following this page.


B.11. Signature

This testing was conducted in accordance with the ISO 17025:1999 scope of accreditation, table 1; Quality Manual.

Signature/Date:


Name:

Function:


Jacky Wong
EMC Tools Developer

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.


Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

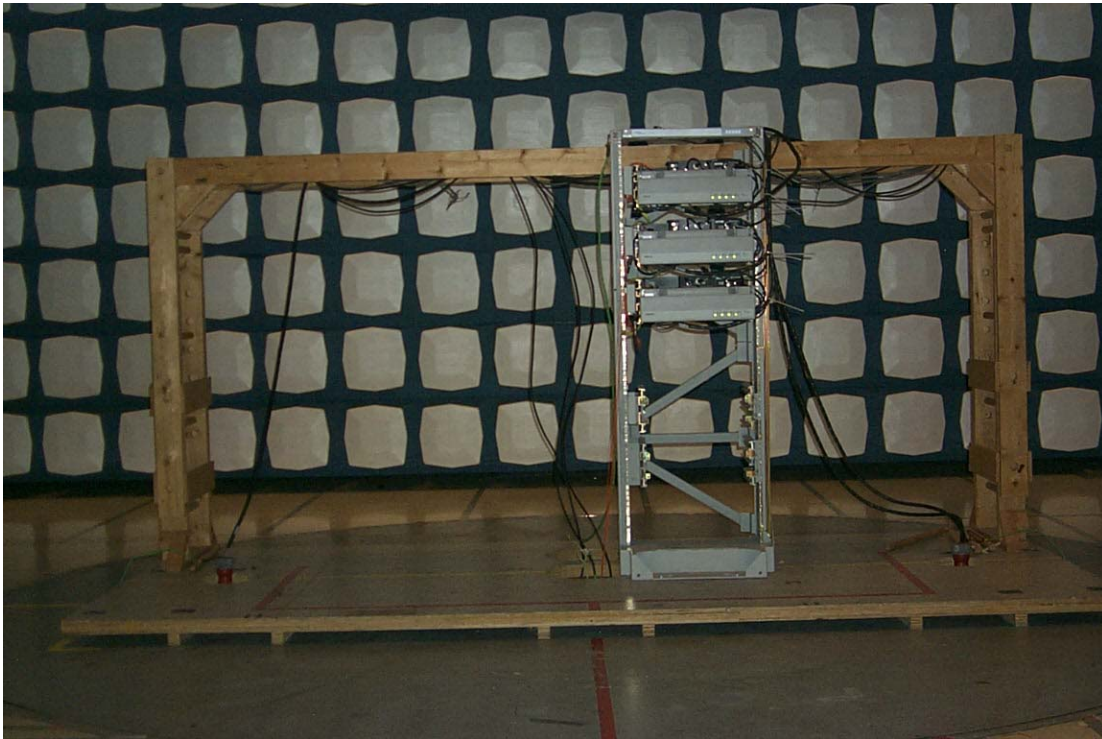

Photograph 1. MTRM CR 1900MHz (Front side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.


Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

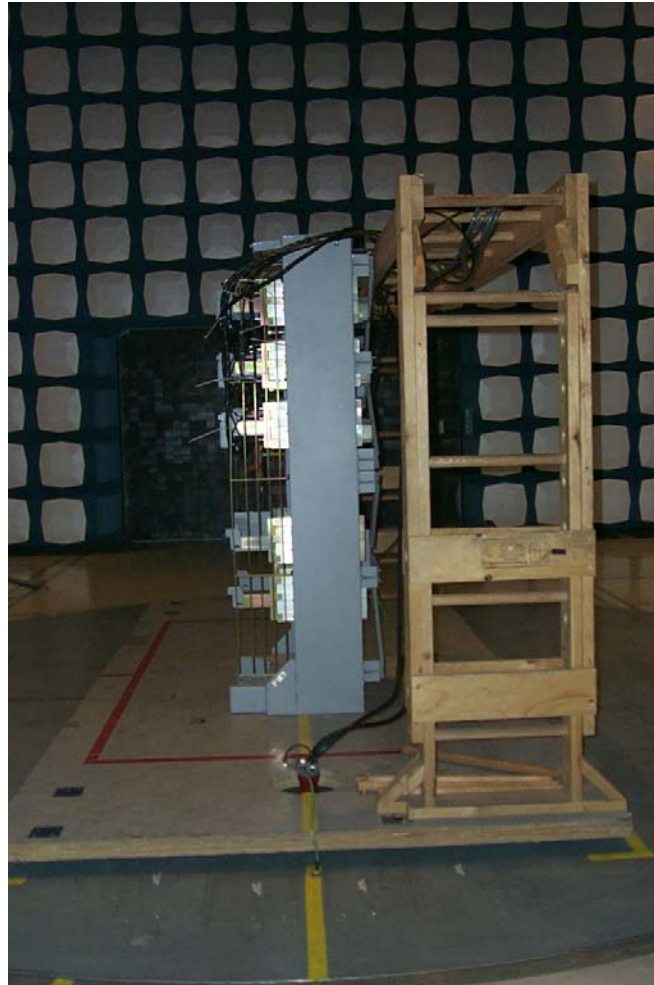

Photograph 2. MTRM CR 1900MHz (Right side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

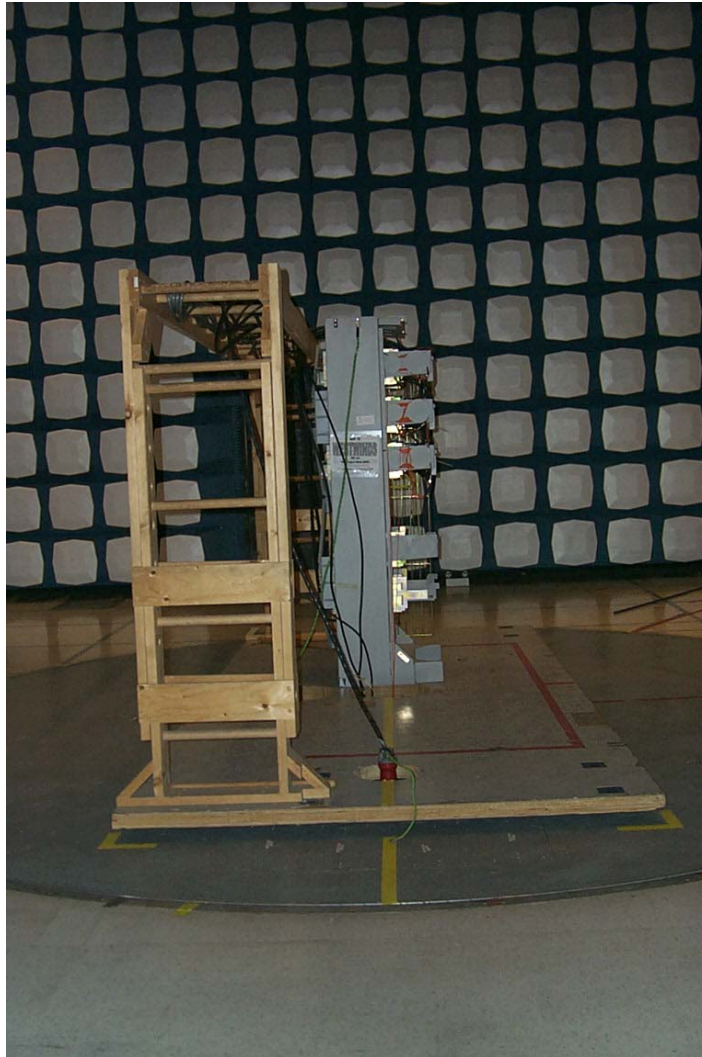

Photograph 3. MTRM CR 1900MHz (Left side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091




Photograph 4. MTRM CR 1900MHz (Back side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



Photograph 4. MTRM CR 1900MHz (Right side of power supply)

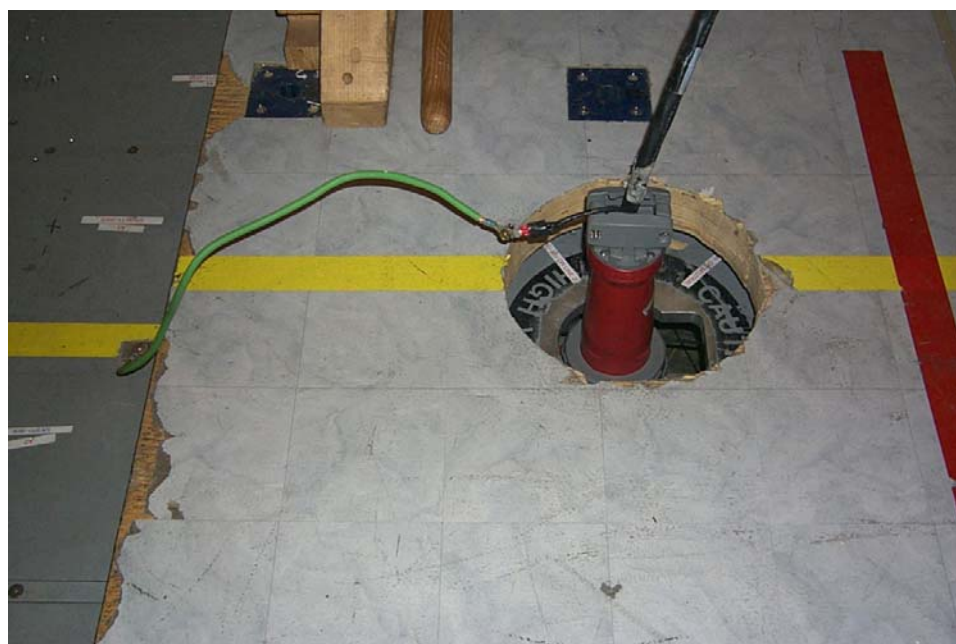

Photograph 5. MTRM CR 1900MHz (Left side of power supply)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



APPENDIX C: MTRM CR 1900MHz. Radiated Emissions 1GHz-18GHz Description and Results

C.1. Test Basis

FCC Rules Part 2 section 2.1053 and 2.1057

C.2. Test Specifications

FCC Part 24		
Frequency	ERP Limit	Peak Limit @ 10 meters
MHz	dBm	dBμV/m
1GHz – 18GHz	-13	73.90

* Theoretical field strength based on a dipole

C.3. Test Procedure

EMC Test Method No. 29, Radiated Emissions Manual Method 1GHz – 20GHz

EMC Test Method No. 11, Substitution Method

C.4. Measurement Uncertainty

Method 29 +2.52 / -2.56

Method 11 + / -2.74

C.5. Deviations

From Standard

There were no deviations from the standard.

From Test Plan

All Test Plan deviations are noted in Appendix A.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.



C.6. Test Results

FCC Part 24

Peak Scan 1GHz - 18GHz (Horizontal Polarization)

	Project Name: 1900MHz MTRM Model: 1900MHz MTRM Comments: 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Horizontal Tester: Jacky Wong Test ID: RE03-10M-2002-001									
Standard	FCC PART 24	10 meters								
Antenna	Band Start Frequency	Band Stop Frequency	Peak Frequency within Band	AF	CL + LNA	Detector	Peak Measured Value	Corrected Value	Theoretical Limit	Theoretical Margin
	MHz	MHz	MHz	dB/m	dB		dBuV	dBuV/m	dBuV/m	dB
EM-6952 Hpol	1000	2000	1966.07	32.18	-62.92	Peak	83.96	53.22	73.90	20.68
EM-6952 Hpol	2000	2600	2497.10	35.38	-62.23	Peak	83.81	56.96	73.90	16.94
EM-6952 Hpol	2600	3000	2607.04	35.42	-62.11	Peak	81.10	54.41	73.90	19.49
EM-6952 Hpol	3000	4000	3875.76	38.35	-60.49	Peak	73.67	51.54	73.90	22.36
EM-6952 Hpol	4000	5000	4913.01	40.16	-59.66	Peak	73.15	53.65	73.90	20.25
EM-6952 Hpol	5000	6000	5813.64	42.73	-58.39	Peak	72.90	57.24	73.90	16.66
EM-6952 Hpol	6000	7000	6661.03	43.00	-56.83	Peak	71.58	57.75	73.90	16.15
EM-6952 Hpol	7000	8000	7751.52	44.49	-55.67	Peak	71.64	60.46	73.90	13.44
EM-6952 Hpol	8000	9000	8817.00	44.69	-54.48	Peak	70.42	60.63	73.90	13.27
EM-6952 Hpol	9000	10000	9689.40	44.91	-53.75	Peak	70.23	61.39	73.90	12.51
EM-6952 Hpol	10000	11000	10946.06	47.07	-53.49	Peak	70.78	64.35	73.90	9.55
EM-6952 Hpol	11000	12000	11627.28	47.16	-54.00	Peak	72.40	65.56	73.90	8.34
EM-6952 Hpol	12000	13000	12747.41	48.50	-54.06	Peak	72.38	66.82	73.90	7.08
3160-08	13000	14000	13565.16	37.10	-54.33	Peak	72.72	55.49	73.90	18.41
3160-08	14000	15000	14056.49	37.10	-54.46	Peak	72.92	55.56	73.90	18.34
3160-08	15000	16000	15503.04	37.20	-54.19	Peak	73.48	56.49	73.90	17.41
3160-08	16000	17000	16963.64	37.20	-53.53	Peak	72.76	56.43	73.90	17.47
3160-08	17000	18000	17440.92	37.20	-54.09	Peak	73.67	56.78	73.90	17.12

Corrected Value: Measured Value + AF + CL + LNA. AF: Antenna Factors & CL: Cable Loss & LNA: Amplifier gain

Notes:
 (1) Positive Margin indicates a pass
 (2) Corrected Value was measured by FSEK Virtual Instrument with all factors loaded

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.



SANMINA-SCI

01NOR013

Test Report

MTRM CR 1.9GHz

Peak Scan 1GHz – 18GHz (Vertical Polarization)



Project Name: 1900MHz MTRM
Model: 1900MHz MTRM
Comments: 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Vertical
Tester: Jacky Wong
Test ID: RE03-10M-2002-001

Standard		FCC PART 24		10		meters				
Antenna	Band Start Frequency	Band Stop Frequency	Peak Frequency within Band	AF	CL + LNA	Detector	Peak Measured Value	Corrected Value	Theoretical Limit	Theoretical Margin
	MHz	MHz	MHz	dB/m	dB		dBuV	dBuV/m	dBuV/m	dB
EM-6952 Vpol	1000	2000	1986.84	32.30	-62.93	Peak	83.98	53.35	73.90	20.55
EM-6952 Vpol	2000	2600	2578.97	35.72	-62.25	Peak	84.17	57.63	73.90	16.27
EM-6952 Vpol	2600	3000	2601.00	35.72	-62.01	Peak	81.49	55.20	73.90	18.70
EM-6952 Vpol	3000	4000	3871.74	38.54	-60.52	Peak	74.38	52.40	73.90	21.50
EM-6952 Vpol	4000	5000	4627.25	39.38	-60.05	Peak	73.95	53.28	73.90	20.62
EM-6952 Vpol	5000	6000	5807.61	42.75	-58.44	Peak	73.43	57.73	73.90	16.17
EM-6952 Vpol	6000	7000	6814.80	42.84	-56.74	Peak	71.52	57.62	73.90	16.28
EM-6952 Vpol	7000	8000	7743.48	44.53	-55.71	Peak	71.64	60.46	73.90	13.44
EM-6952 Vpol	8000	9000	8981.99	45.42	-54.40	Peak	70.71	61.74	73.90	12.16
EM-6952 Vpol	9000	10000	9679.35	44.82	-53.63	Peak	70.27	61.46	73.90	12.44
EM-6952 Vpol	10000	11000	10809.64	46.91	-53.20	Peak	70.50	64.21	73.90	9.69
EM-6952 Vpol	11000	12000	11615.22	47.18	-53.95	Peak	72.87	66.10	73.90	7.80
EM-6952 Vpol	12000	13000	12435.15	48.63	-53.76	Peak	71.67	66.54	73.90	7.36
3160-08	13000	14000	13551.09	37.10	-54.14	Peak	72.23	55.19	73.90	18.71
3160-08	14000	15000	14909.08	37.10	-53.75	Peak	71.77	55.12	73.90	18.78
3160-08	15000	16000	15486.96	37.20	-53.82	Peak	72.82	56.20	73.90	17.70
3160-08	16000	17000	16297.34	37.20	-53.14	Peak	72.84	56.90	73.90	17.00
3160-08	17000	18000	17422.83	37.20	-53.81	Peak	73.51	56.90	73.90	17.00

Corrected Value: Measured Value + AF + CL + LNA

AF: Antenna Factors & CL: Cable Loss & LNA: Amplifier gain

Notes:

- (1) Positive Margin indicates a pass
 (2) Corrected Value was measured
 by FSEK Virtual Instrument
 with all factors loaded

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

Confidential

Page 24 of 40

March 12, 2002



Substitution Data 1GHz – 18GHz

**Project Name:** 1900MHz MTRM**Tester:** Jacky Wong**Model:** 1900MHz MTRM**Test ID:** RE03-10M-2002-001**Comments:** 1900MHz MTRM (X 3). Digital Rack located under 10 meter chamber - Substitution Method

Frequency (MHz)	Polarization (V/H)	Corrected Emission level dBuV/m	Corrected Substitution measure level dBuV/m	Signal Generator dBm	Cable factor dB	Antenna Gain dB	Effective Radiated Power (E.R.P.) dBm	E.R.P. Limit dBm	Margin dB
3875.76	H	51.54	51.17	-55.00	-1.55	7.95	-48.60	-13	35.60
5813.64	H	57.24	57.07	-49.00	-2.00	8.96	-42.04	-13	29.04
7751.52	H	60.46	60.50	-44.00	-2.31	10.05	-36.26	-13	23.26
9689.94	H	61.39	61.06	-45.50	-2.62	10.30	-37.82	-13	24.82
11627.28	H	65.56	65.67	-40.00	-3.36	10.47	-32.89	-13	19.89
13565.16	H	55.49	55.30	-52.00	-2.99	12.84	-42.15	-13	29.15
15503.04	H	56.49	56.51	-50.00	-2.96	11.51	-41.45	-13	26.45
17440.92	H	56.78	56.31	-50.00	-3.55	13.50	-40.05	-13	27.05
3871.74	V	52.40	52.18	-54.50	-1.55	8.00	-48.05	-13	35.05
5807.61	V	57.73	57.54	-51.00	-2.00	9.16	-43.84	-13	30.84
7743.48	V	60.46	60.30	-44.20	-2.31	10.04	-36.47	-13	23.47
9679.35	V	61.46	61.87	-45.00	-2.59	10.36	-37.23	-13	24.23
11615.22	V	66.10	66.36	-39.50	-3.41	10.72	-32.19	-13	19.19
13551.09	V	55.19	55.04	-54.00	-3.00	12.66	-44.34	-13	31.34
15486.96	V	56.20	56.64	-51.00	-2.99	11.20	-42.79	-13	29.79
17422.83	V	56.90	56.69	-49.00	-3.62	12.29	-40.33	-13	27.33

Effective Radiate Power (E.R.P) = Signal Generator + Cable Factor + Antenna Gain

Note: Positive Margin indicates a Pass.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.



C.7. Measurement Equipment

Radiated Emissions 1GHz – 18GHz

Description	Type/Model	Manufacturer	Serial #	Cal Due	Cal Date
10m ANECHOIC CHAMBER					
Antenna	EM6592-314	Electro-metrics	40500395	June 21, 2002	N/A
Horn Antenna	3160-08	EMCO	45000178	N/A	N/A
Mast Controller	2090	EMCO	9711-1266	N/A	N/A
Multi Device Controller TT1 (Turntable)	2090	EMCO	40500183	N/A	N/A
RF Cable	Ferrite bead loaded cable	Suhner Succoflex	FBL-1	Dec. 19, 2002	Dec. 19, 2001
RF Cable	106	Suhner Succoflex	9353/6	Dec. 19, 2002	Dec. 19, 2001
RF Cable	104	Suhner Succoflex	115742	Dec. 19, 2002	Dec. 19, 2001
RF Cable	104	Suhner Succoflex	116567/4	Dec. 19, 2002	Dec. 19, 2001
RF Cable	104	Suhner Succoflex	11576/4	Dec. 19, 2002	Dec. 19, 2001
SUPPORT ROOM					
Spectrum Analyzer 9KHz – 40GHz	FSEK	Rohde & Schwarz	40500210	Feb 15, 2002	N/A
Signal Generator 10MHz – 40GHz	SMP	Rohde & Schwarz	4500125	Mar 27, 2003	N/A
Amplifier	JSD00121	MITEQ	S/N 838621	N/A	N/A
Switch Matrix Controller	SMC-002	TDL	40500189	Mar. 04, 2002	Mar. 04, 2001
VERIFICATION EQUIPMENT					
Horn Antenna	3115	EMCO	40500087	Nov 19, 2002	Nov 19, 2001
Adjustable Dipole Antenna	3121C	EMCO	9611-1233	April 4, 2002	N/A
Quick Box	QBOX-ESD1	EMC	N/A	N/A	N/A

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



C.8. Deviations from Normal Operating Mode

No deviations from the normal operating mode in the project test plan are noted in Appendix A of the Test Report.

C.9. Test Setup Special Considerations

None.

C.10. Sample Calculation

Emission Level = Measured Level + Antenna Factor + Cable Loss + LNA Gain

Margin = Limit - Emission Level

Effective Radiated Power (ERP) = signal generator + cable factor + Antenna Gain

* Negative VE numbers indicate gain.

C.11. Test Data and Pictures

Pictures for Radiated Emissions 1 - 18GHz are following this page.


C.12. Signature

This testing was conducted in accordance with the ISO 17025:1999 scope of accreditation, table 1; Quality Manual.

Signature/Date:


Name:

Function:


Jacky Wong
EMC Tools Developer

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.


Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

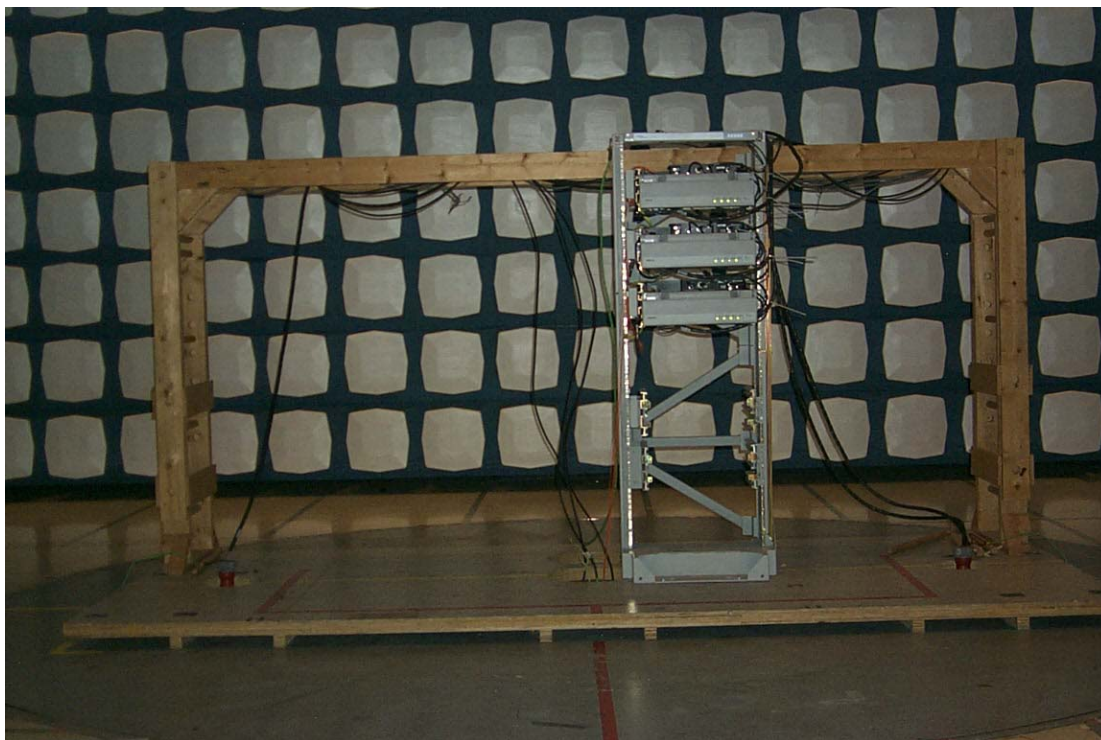

Photograph 1. MTRM CR 1900MHz (Front side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.


Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

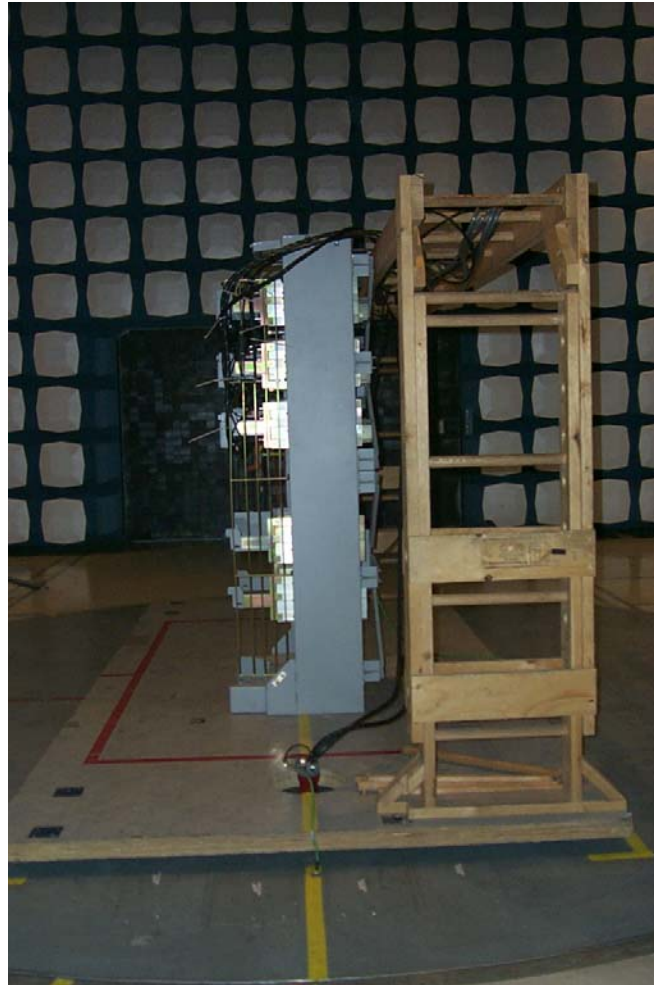

Photograph 2. MTRM CR 1900MHz (Right side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

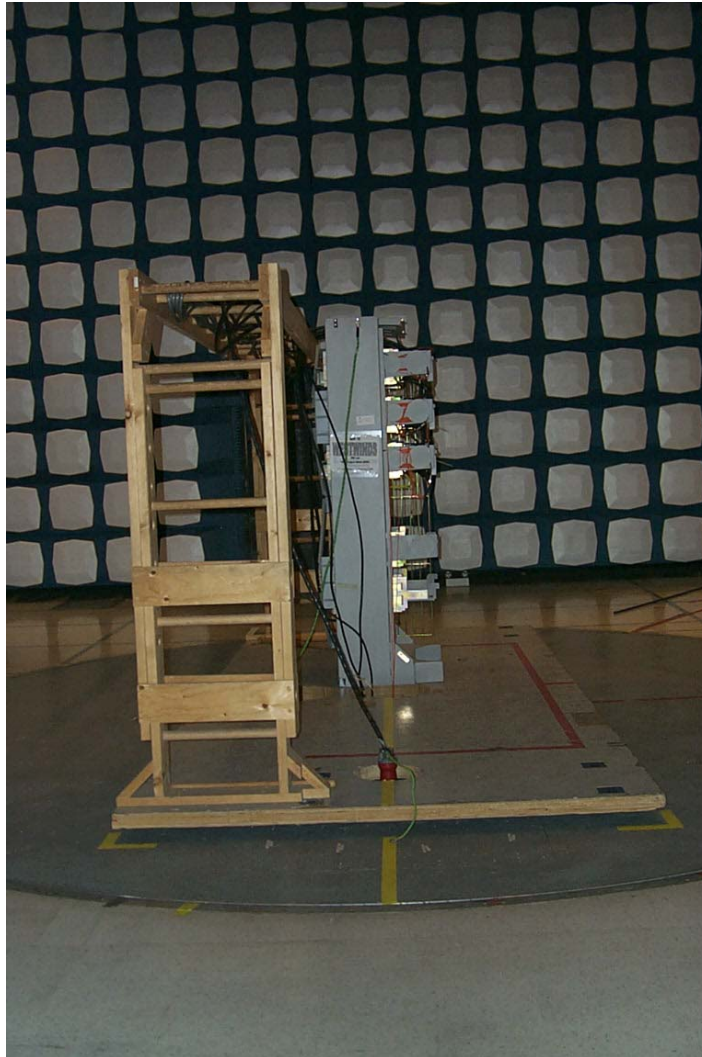

Photograph 3. MTRM CR 1900MHz (Left side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091




Photograph 4. MTRM CR 1900MHz (Back side of EUT)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



Photograph 4. MTRM CR 1900MHz (Right side of power supply)

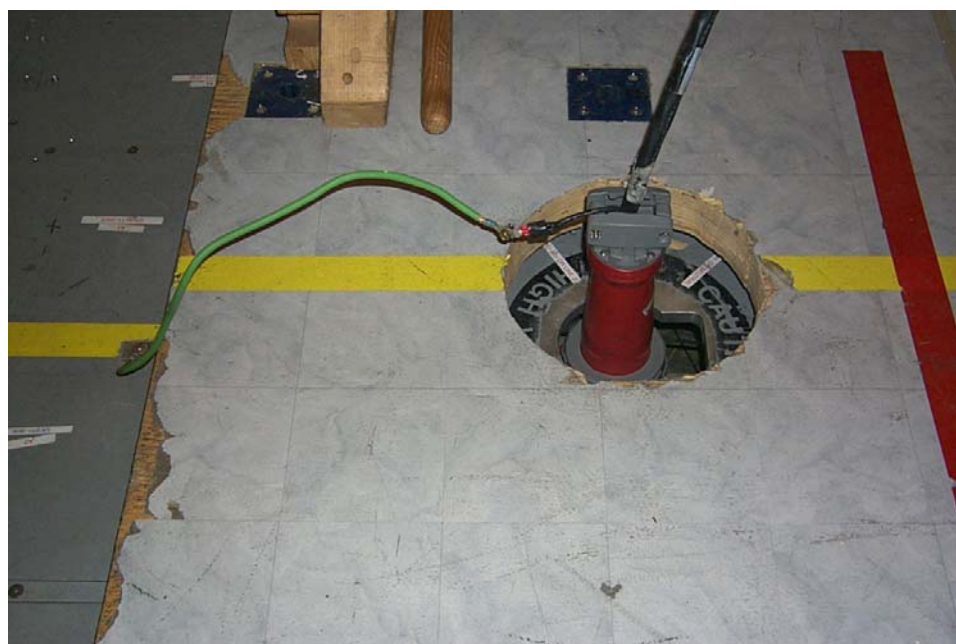

Photograph 5. MTRM CR 1900MHz (Left side of power supply)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091

APPENDIX D: TEST PLAN

Note: The headers, footers, and total number of pages displayed in the footer of the following the test plan pages are relevant to total number of pages for the test report only.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



MTRM 1900 (CR) Radio testing

Test Plan

Document information

Version: 0.2

Status: Draft

Issued : January 8, 2002

1. Test scope

This test plan provides testing information for the test lab. This test is part of the regulatory testing of the MTRM CR. The test will be performed on the Metrocell Radio rack. Initially the test for the 1900 MHz product will be performed.

1.1 Measurements required

The field strength of the spurious radiation as per FCC part 2.1053

Frequency spectrum to be investigated as per FCC part 2.1057

1.2 Emission limits

As per FCC part 24.238

2. Test configuration

- 2.1 A Metrocell radio rack with 3 MFRM units will be tested. Only the radio rack will be installed in the anechoic chamber. The digital rack will be installed outside (basement) of the test chamber.
- 2.2 Digital Rack will have a complete digital shelf (12 CEM /XCEM, 2CM, 2 CORE and 1 or 2 GPSTM). The serial numbers of the equipment under test (EUT) and the rest of the modules will be available before the completion of the test.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



3. System setting and system software

The EUT will have each MFRM set to operate on one carrier/one frequency. The carrier frequencies will be different for each MFRM. All MFRMs will be set to operate on the same sector (beta).

The system software used during the test is based on the 10.x load

4. POWER Requirements

VOLTAGE DC -48 DC

NUMBER OF FEEDS: 2

CURRENT DRAW (AMPS) : typical 25 A/feed

LISN: in place

5. Deliverables

The test lab will provide the official test report for the test performed according to this test plan.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



APPENDIX E: SUPPLEMENTARY INFORMATION

The following supplementary information was provided by Nortel Networks after the release of the original test report.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



E.1. Supplementary Information provided by Nortel Networks March 1, 2002

Subject: FW: MFRM 1900 MHz CR P1 report

-----Original Message-----

From: Thomas Wong [mailto:thomaswg@nortelnetworks.com]

Sent: Friday, March 01, 2002 4:18 PM

To: 'jacky.wong@sanmina.com'

Subject: MFRM 1900 MHz CR P1 report

Jacky,

The report I would like to modify are:

(A) Fill in the key frequencies information in your report section 3.4

<<int freq MFRM.pdf>>

You only need to copy the 1900 MHz MFRM key frequency to the report and NOT the other modules.

(B) Add the Peak Scan plots for 30 MHz to 1 GHz (both V and H) in Appendix B.

(C) Improve the terminology and units that Sanmina used in the substitution method that we talked about.

(D) Since the test setup for both 30 MHz to 1 GHz and 1 GHz to 18 GHz is the same. We don't need to have both set of pictures in the reports. The report is really big in size right now.

<<FCC report for filing>>

Since the report is too big (8Mbyte) for filling (the ATCB expects only 4Mbytes for the complete filing), I am talking to Keys to find a solutions. Therefore, you don't need to send the update report to me right the way. I am going to let you know when I need it.

Thanks.

Thomas Wong

CDMA/TDMA Regulatory Prime

5050-40th St. N.E. Calgary, Alberta, T3J 4P8

Tel: 403-769-2425 (ESN 758-2425)

email: thomaswg@nortelnetworks.com

The Contents of this Email are Nortel Networks Confidential

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



E.2. Attachment to the supplementary information provided by Nortel Networks March 1, 2002

Signal	Frequency	Units
Transmit Band	1930-1990	MHz
Receive Band	1850-1910	MHz
RF LO Range	1776-1836	MHz
RF LO Resolution	50	MHz
Carrier Spacing	1.25	MHz
Tx IF LO	143.7696	MHz
Rx IF (Center)	73.6	MHz
Tx IF (Center)	153.6	MHz
26Fc	31.9488	MHz
32Fc	39.3216	MHz
52Fc	63.8976	MHz
64Fc	78.6432	MHz
520Fc	638.9760	MHz

Table: Key Frequencies for MFRM

Note: Fc = CDMA single channel spreading rate = 1.2288 MHz

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



E.3. Supplementary information provided by Nortel Networks February 4, 2002

-----Original Message-----

From: Steve Embree [mailto:sembree@nortelnetworks.com]

Sent: Monday, February 04, 2002 2:58 PM

To: 'Keys Low'

Cc: Arif Kurji; Marin Sampaleanu

Subject: Equipment list for 1900 FCC testing

Hi Keys,

Here's the equipment list for the 1900 MTRM FCC testing completed Jan 14/02. I need to get the duplexer information. The Duplexer are under test in the 10 meter chamber. I'll get Mike to get the serial numbers when the chamber is open. If you require more information let me know. You should be able to get a good start on the lab report. The Lab report is becoming important.

<<MFRM's 1900_FCC_equipment.xls>>

Best regards,

Steve Embree

Project Management, Wireless Access Development

Phone: 403 769 4181, **ESN** 758 4181

Mobile: 403 510 2274

Fax: 403 769 7680

E-mail: sembree@nortelnetworks.com

**THE CONTENTS OF THIS E-MAIL ARE NORTEL NETWORKS
CONFIDENTIAL**

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091



END OF DOCUMENT

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in part without permission of the testing body.

Sanmina-SCI Product Integrity, 5151-47th Street N.E. Tel: 403-295-5134, Fax: 403-295-4091