

FCC Test Report

Report No.: RFBAOZ-WTW-P20080227

FCC ID: WT8DNWAP840

Test Model: AP840

Received Date: Aug. 12, 2020

Test Date: Aug. 21 to Sep. 15, 2020

Issued Date: Oct. 30, 2020

Applicant: Datto, Inc.

Address: 101 Merritt 7, Norwalk, CT 06851 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards and references	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement.....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures.....	21
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup.....	22
4.1.6 EUT Operating Conditions.....	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	38
4.2.1 Limits of Conducted Emission Measurement	38
4.2.2 Test Instruments	38
4.2.3 Test Procedures.....	39
4.2.4 Deviation from Test Standard	39
4.2.5 Test Setup.....	39
4.2.6 EUT Operating Conditions.....	39
4.2.7 Test Results	40
4.3 6dB Bandwidth Measurement	42
4.3.1 Limits of 6dB Bandwidth Measurement.....	42
4.3.2 Test Setup.....	42
4.3.3 Test Instruments	42
4.3.4 Test Procedure	42
4.3.5 Deviation from Test Standard	42
4.3.6 EUT Operating Conditions.....	42
4.3.7 Test Result.....	43
4.4 Occupied Bandwidth Measurement	45
4.4.1 Test Setup.....	45
4.4.2 Test Instruments	45
4.4.3 Test Procedure	45
4.4.4 Deviation from Test Standard	45
4.4.5 EUT Operating Conditions.....	45
4.4.6 Test Results	46
4.5 Conducted Output Power Measurement.....	48
4.5.1 Limits of Conducted Output Power Measurement	48
4.5.2 Test Setup.....	48
4.5.3 Test Instruments	48
4.5.4 Test Procedures.....	48
4.5.5 Deviation from Test Standard	48
4.5.6 EUT Operating Conditions.....	48
4.5.7 Test Results	49

4.6	Power Spectral Density Measurement.....	53
4.6.1	Limits of Power Spectral Density Measurement	53
4.6.2	Test Setup.....	53
4.6.3	Test Instruments	53
4.6.4	Test Procedure	53
4.6.5	Deviation from Test Standard	53
4.6.6	EUT Operating Condition	53
4.6.7	Test Results	54
4.7	Conducted Out of Band Emission Measurement.....	57
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	57
4.7.2	Test Setup.....	57
4.7.3	Test Instruments	57
4.7.4	Test Procedure	57
4.7.5	Deviation from Test Standard	57
4.7.6	EUT Operating Condition	57
4.7.7	Test Results	57
5	Pictures of Test Arrangements.....	74
	Annex A - Band-Edge Measurement.....	75
	Appendix – Information of the Testing Laboratories	79

Release Control Record

Issue No.	Description	Date Issued
RFBAOZ-WTW-P20080227	Original release.	Oct. 30, 2020

1 Certificate of Conformity

Product: WiFi6 indoor Access Point

Brand: datto

Test Model: AP840

Sample Status: Engineering Sample

Applicant: Datto, Inc.

Test Date: Aug. 21 to Sep. 15, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo , **Date:** Oct. 30, 2020
Cherry Chuo / Specialist

Approved by : Clark Lin , **Date:** Oct. 30, 2020
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.49 dB at 7.83984 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.2 dB at 2491.24MHz and 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.
-	Occupied Bandwidth Measurement	-	Reference only

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted Emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WiFi6 indoor Access Point
Brand	datto
Test Model	AP840
Status of EUT	Engineering Sample
Power Supply Rating	48 Vdc / 0.625A from power adapter, 48-54 Vdc / 0.5A from POE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2402 Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18~ 5.24 GHz, 5.745 ~ 5.825 GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	CDD Mode: 2.412 ~ 2.462 GHz: 952.722 mW 5.18 ~ 5.24 GHz: 610.7 mW 5.745 ~ 5.825 GHz: 963.3 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 427.044 mW 5.18 ~ 5.24 GHz: 293.152 mW 5.745 ~ 5.825 GHz: 293.193 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN 2.4GHz	WLAN 5GHz	Bluetooth	2.4GHz /5GHz Background Scanning (RX only)

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz)	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The antenna provided to the EUT, please refer to the following table:

Antenna No.	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	290-20458	3.97	2.4~2.4835	PIFA	i-pex(MHF)	210
2	290-20458	3.4	2.4~2.4835	PIFA	i-pex(MHF)	45
3	290-20458	3.79	2.4~2.4835	PIFA	i-pex(MHF)	130
4	290-20458	3.01	2.4~2.4835	PIFA	i-pex(MHF)	225
5	290-20458	5.22	5.15~5.85	PIFA	i-pex(MHF)	250
6	290-20458	5.71	5.15~5.85	PIFA	i-pex(MHF)	150
7	290-20458	5.45	5.15~5.85	PIFA	i-pex(MHF)	60
8	290-20458	4.69	5.15~5.85	PIFA	i-pex(MHF)	200
9 (Background Ant. RX only)	290-20458	6.45 4.5	2.4~2.4835 5.15~5.85	PIFA	i-pex(MHF)	140
10 (BT Ant.)	-	3.28	2.4~2.4835	PCB	i-pex(MHF)	None

4. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	With adapter mode
Mode B	With POE mode

Note: From the above modes, radiated emission the worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

5. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
 2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
 3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ VHT mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)
6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
7. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of laying-flat and wall-mount. The worst case was found when positioned of on laying-flat.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1 Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6 Mb/s

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6 Mb/s

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	25deg. C, 74%RH	DC 48V	Eric Peng
RE<1G	25deg. C, 64%RH	DC 48V	Eric Peng
PLC	25deg. C, 75%RH	DC 48V	Sampson Chen
APCM	25deg. C, 60%RH	DC 48V	Kevin Ko

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = 0.687 ms/1.2 ms= 0.573, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 2.42 \text{ dB}$

802.11g: Duty cycle = 1.972 ms/2.104 ms= 0.937, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.28 \text{ dB}$

802.11ax (HE20): Duty cycle = 5.445 ms/5.76 ms= 0.945, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.24 \text{ dB}$

802.11ax (HE40): Duty cycle = 5.437 ms/ 5.815 ms= 0.935, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.29 \text{ dB}$

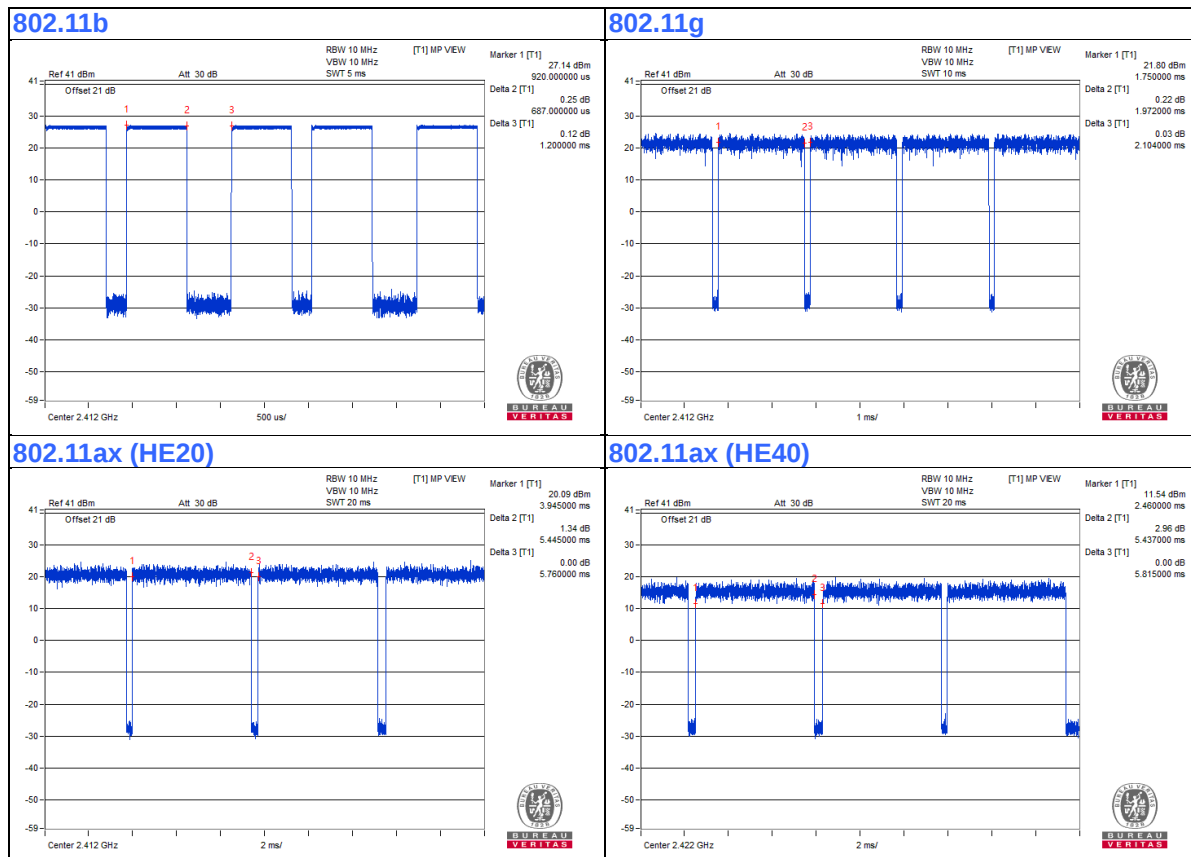

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
C.	iPod	Apple	MD778TA/A	CC4JMH7LF4T1	NA	Provided by Lab
D.	Adapter	Channel well	KPS-030S-VI	NA	NA	Supplied by client

Note:


1. All power cords of the above support units are non-shielded (1.5m).

ID	Descriptions (Cables)	Qty	Length (m)	Shielding (Yes/No)	Cores (Number)	Remarks
1	RJ-45 Cable	1	10	No	0	Provided by Lab
2	DC Cable	1	1	No	1	Supplied by client
3	RJ-45 Cable	1	10	No	0	Provided by Lab
4	AC Cable	1	0.8	No	0	Supplied by client
5	USB Cable	1	0.1	Yes	0	Provided by Lab


Note: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

For conducted test:

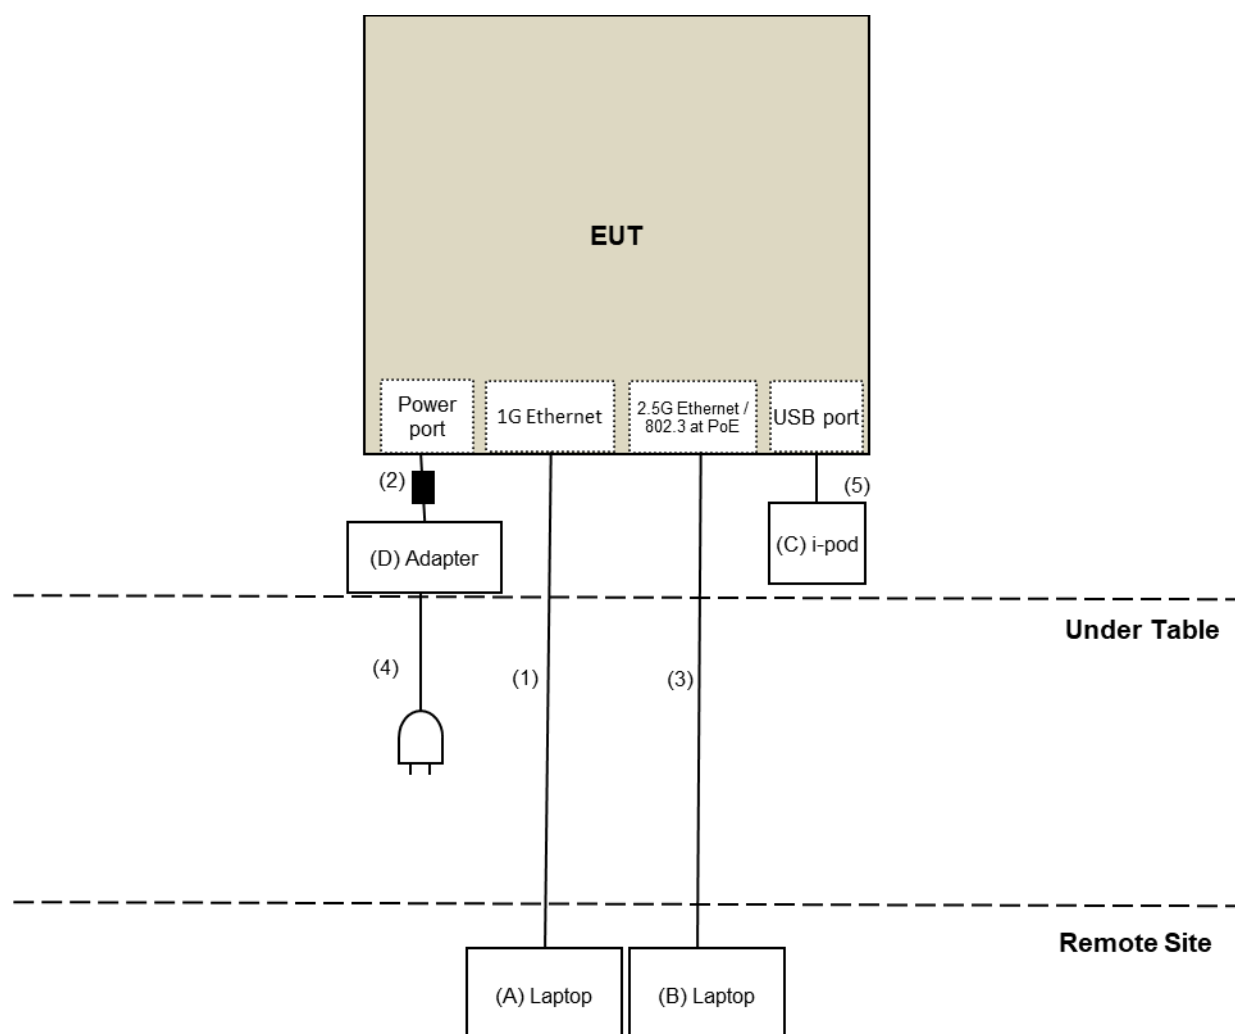

For other test items:

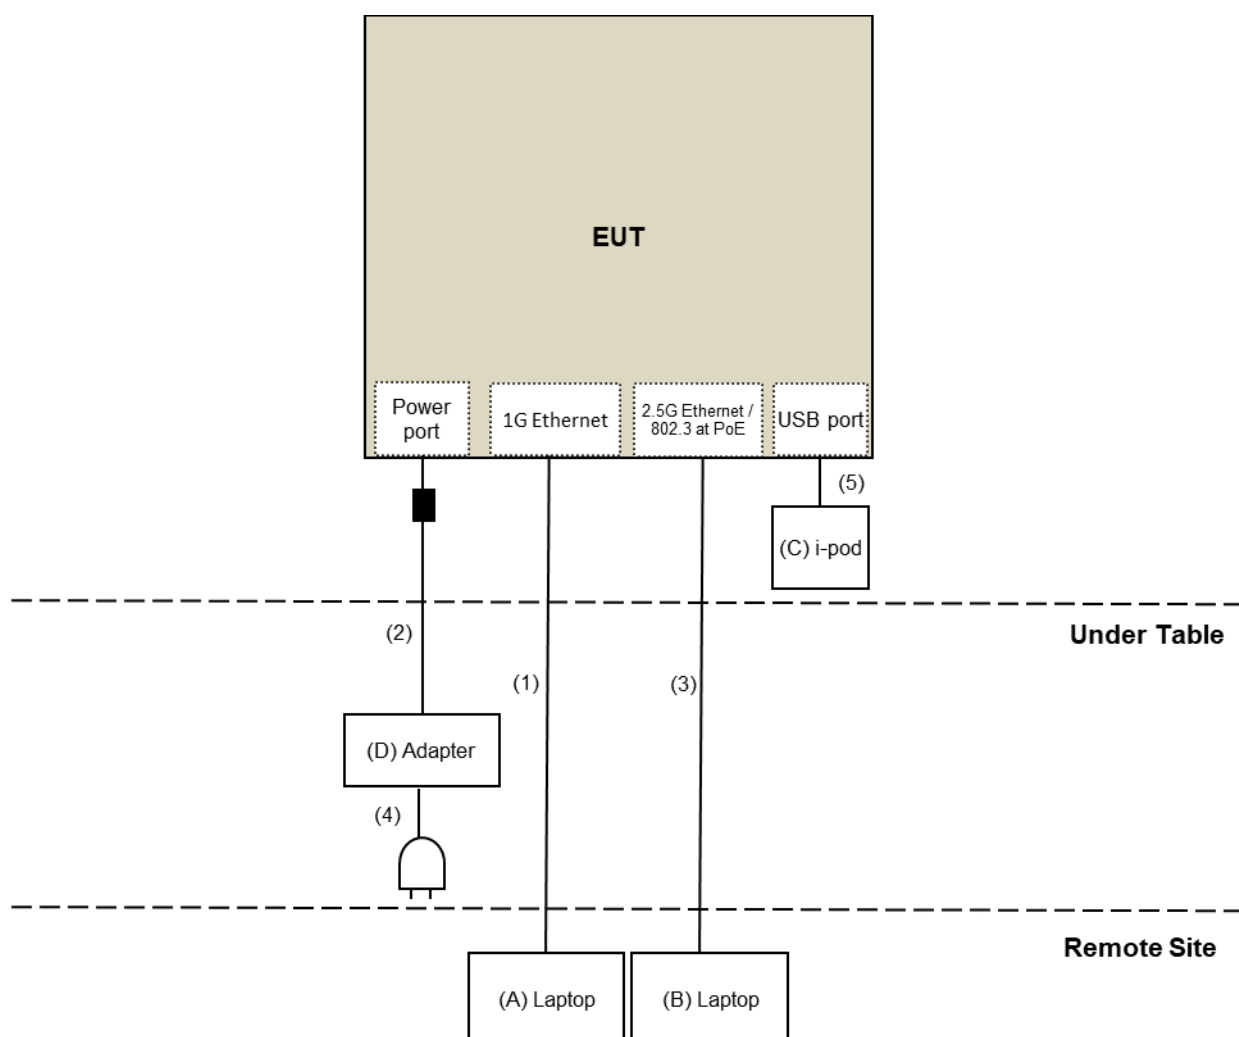

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance :

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Radiated Emission & Bangedge test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCi	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	Apr. 28, 2020	Apr. 27, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCi	EMC12630SE	980384	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-1200	160922	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCi	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: Sep. 04 to 12, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 15, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

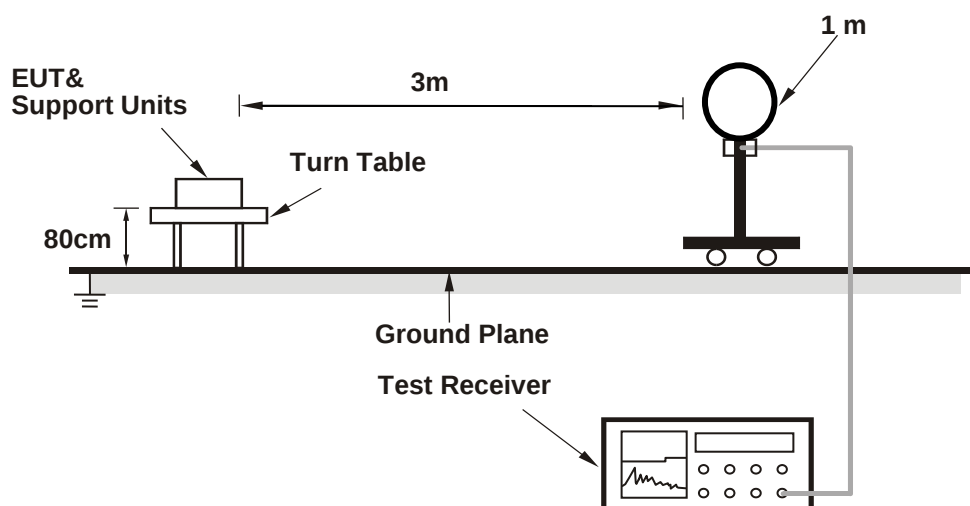

For Radiated emission 30MHz to 1GHz

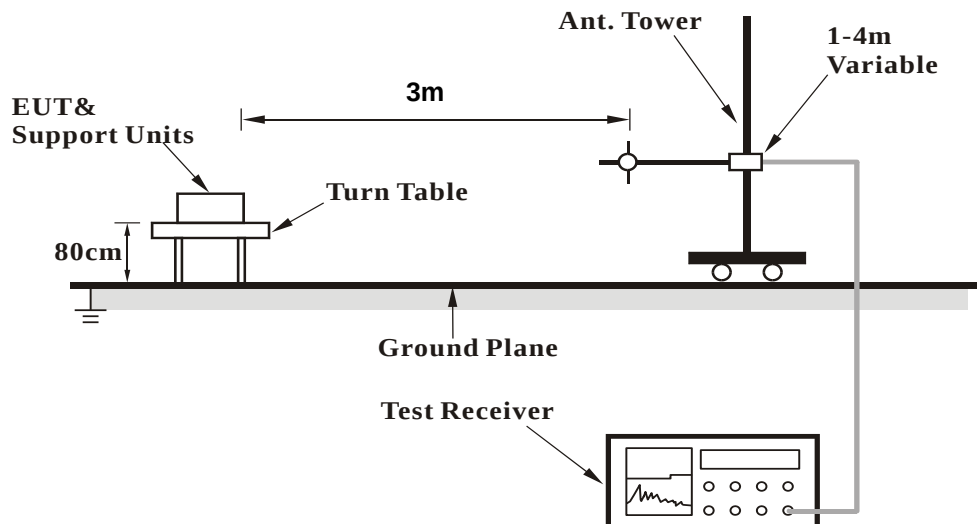

For Radiated emission above 1GHz

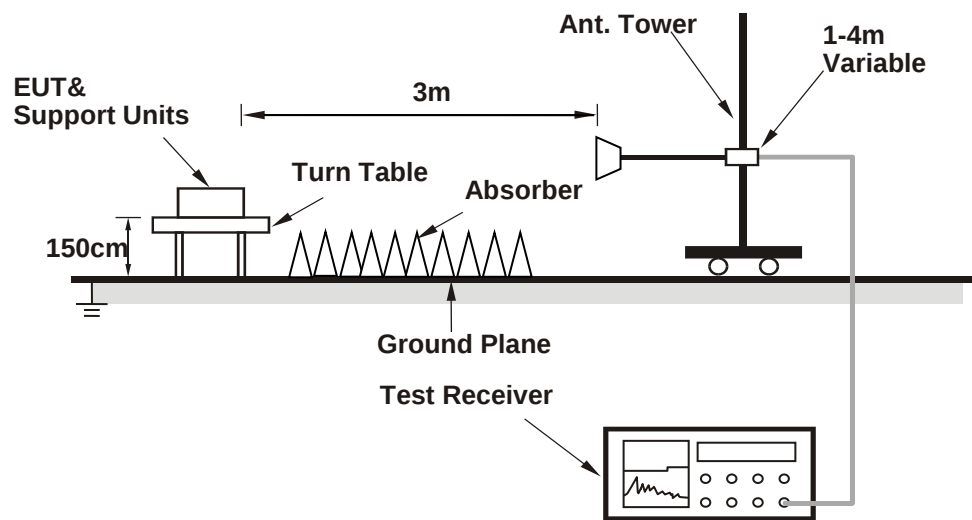

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QDART_4.0.00156.0) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.26	57.6 PK	74.0	-16.4	1.02 H	49	59.5	-1.9
2	2387.26	53.6 AV	54.0	-0.4	1.02 H	49	55.5	-1.9
3	*2412.00	115.2 PK			1.02 H	49	117.1	-1.9
4	*2412.00	113.8 AV			1.02 H	49	115.7	-1.9
5	4824.00	44.3 PK	74.0	-29.7	1.43 H	320	41.4	2.9
6	4824.00	40.6 AV	54.0	-13.4	1.43 H	320	37.7	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.28	58.3 PK	74.0	-15.7	2.52 V	305	60.2	-1.9
2	2387.28	52.1 AV	54.0	-1.9	2.52 V	305	54.0	-1.9
3	*2412.00	114.3 PK			2.52 V	305	116.2	-1.9
4	*2412.00	112.3 AV			2.52 V	305	114.2	-1.9
5	4824.00	43.6 PK	74.0	-30.4	1.51 V	84	40.7	2.9
6	4824.00	39.2 AV	54.0	-14.8	1.51 V	84	36.3	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2318.02	52.9 PK	74.0	-21.1	1.86 H	94	54.5	-1.6
2	2318.02	46.1 AV	54.0	-7.9	1.86 H	94	47.7	-1.6
3	*2437.00	115.5 PK			1.86 H	94	117.5	-2.0
4	*2437.00	114.1 AV			1.86 H	94	116.1	-2.0
5	2487.25	50.8 PK	74.0	-23.2	1.86 H	94	52.7	-1.9
6	2487.25	42.3 AV	54.0	-11.7	1.86 H	94	44.2	-1.9
7	4874.00	43.3 PK	74.0	-30.7	1.47 H	328	40.5	2.8
8	4874.00	39.0 AV	54.0	-15.0	1.47 H	328	36.2	2.8
9	7311.00	54.0 PK	74.0	-20.0	1.32 H	0	45.1	8.9
10	7311.00	49.6 AV	54.0	-4.4	1.32 H	0	40.7	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	34.8 PK	74.0	-39.2	1.83 V	134	36.7	-1.9
2	2390.00	22.6 AV	54.0	-31.4	1.83 V	134	24.5	-1.9
3	*2437.00	114.3 PK			1.83 V	134	116.3	-2.0
4	*2437.00	111.2 AV			1.83 V	134	113.2	-2.0
5	2483.50	34.3 PK	74.0	-39.7	1.83 V	134	36.2	-1.9
6	2483.50	22.4 AV	54.0	-31.6	1.83 V	134	24.3	-1.9
7	4874.00	42.9 PK	74.0	-31.1	1.50 V	8	40.1	2.8
8	4874.00	38.6 AV	54.0	-15.4	1.50 V	8	35.8	2.8
9	7311.00	52.8 PK	74.0	-21.2	1.46 V	21	43.9	8.9
10	7311.00	48.5 AV	54.0	-5.5	1.46 V	21	39.6	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.4 PK			1.00 H	58	117.3	-1.9
2	*2462.00	113.5 AV			1.00 H	58	115.4	-1.9
3	2485.03	58.9 PK	74.0	-15.1	1.00 H	58	60.8	-1.9
4	2485.03	50.7 AV	54.0	-3.3	1.00 H	58	52.6	-1.9
5	2491.24	58.4 PK	74.0	-15.6	1.00 H	58	60.3	-1.9
6	2491.24	53.8 AV	54.0	-0.2	1.00 H	58	55.7	-1.9
7	4924.00	43.3 PK	74.0	-30.7	2.34 H	87	40.6	2.7
8	4924.00	38.8 AV	54.0	-15.2	2.34 H	87	36.1	2.7
9	7386.00	52.6 PK	74.0	-21.4	1.68 H	28	43.6	9.0
10	7386.00	48.3 AV	54.0	-5.7	1.68 H	28	39.3	9.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.6 PK			2.52 V	305	116.5	-1.9
2	*2462.00	112.5 AV			2.52 V	305	114.4	-1.9
3	2483.50	57.5 PK	74.0	-16.5	2.52 V	305	59.4	-1.9
4	2483.50	50.8 AV	54.0	-3.2	2.52 V	305	52.7	-1.9
5	4924.00	42.4 PK	74.0	-31.6	1.36 V	253	39.7	2.7
6	4924.00	38.1 AV	54.0	-15.9	1.36 V	253	35.4	2.7
7	7386.00	51.2 PK	74.0	-22.8	1.34 V	170	42.2	9.0
8	7386.00	47.6 AV	54.0	-6.4	1.34 V	170	38.6	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.05 H	50	67.6	-1.9
2	2390.00	53.8 AV	54.0	-0.2	1.05 H	50	55.7	-1.9
3	*2412.00	114.3 PK			1.05 H	50	116.2	-1.9
4	*2412.00	105.0 AV			1.05 H	50	106.9	-1.9
5	4824.00	45.6 PK	74.0	-28.4	1.11 H	308	42.7	2.9
6	4824.00	38.7 AV	54.0	-15.3	1.11 H	308	35.8	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	2.49 V	305	66.5	-1.9
2	2390.00	53.2 AV	54.0	-0.8	2.49 V	305	55.1	-1.9
3	*2412.00	112.4 PK			2.49 V	305	114.3	-1.9
4	*2412.00	103.2 AV			2.49 V	305	105.1	-1.9
5	4824.00	43.8 PK	74.0	-30.2	1.54 V	174	40.9	2.9
6	4824.00	36.9 AV	54.0	-17.1	1.54 V	174	34.0	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.00 H	46	68.3	-1.9
2	2390.00	50.2 AV	54.0	-3.8	1.00 H	46	52.1	-1.9
3	*2437.00	118.1 PK			1.00 H	46	120.1	-2.0
4	*2437.00	108.6 AV			1.00 H	46	110.6	-2.0
5	2483.50	65.3 PK	74.0	-8.7	1.00 H	46	67.2	-1.9
6	2483.50	47.1 AV	54.0	-6.9	1.00 H	46	49.0	-1.9
7	4874.00	48.1 PK	74.0	-25.9	1.13 H	314	45.3	2.8
8	4874.00	40.8 AV	54.0	-13.2	1.13 H	314	38.0	2.8
9	7311.00	50.8 PK	74.0	-23.2	1.66 H	294	41.9	8.9
10	7311.00	42.9 AV	54.0	-11.1	1.66 H	294	34.0	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.7 PK	74.0	-9.3	2.49 V	305	66.6	-1.9
2	2390.00	49.5 AV	54.0	-4.5	2.49 V	305	51.4	-1.9
3	*2437.00	115.2 PK			2.49 V	305	117.2	-2.0
4	*2437.00	106.3 AV			2.49 V	305	108.3	-2.0
5	2483.50	62.8 PK	74.0	-11.2	2.49 V	305	64.7	-1.9
6	2483.50	46.3 AV	54.0	-7.7	2.49 V	305	48.2	-1.9
7	4874.00	45.1 PK	74.0	-28.9	1.57 V	166	42.3	2.8
8	4874.00	38.2 AV	54.0	-15.8	1.57 V	166	35.4	2.8
9	7311.00	47.9 PK	74.0	-26.1	1.42 V	288	39.0	8.9
10	7311.00	40.4 AV	54.0	-13.6	1.42 V	288	31.5	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.8 PK			1.05 H	50	113.7	-1.9
2	*2462.00	102.3 AV			1.05 H	50	104.2	-1.9
3	2483.50	62.8 PK	74.0	-11.2	1.05 H	50	64.7	-1.9
4	2483.50	53.6 AV	54.0	-0.4	1.05 H	50	55.5	-1.9
5	4924.00	47.2 PK	74.0	-26.8	1.15 H	306	44.5	2.7
6	4924.00	40.3 AV	54.0	-13.7	1.15 H	306	37.6	2.7
7	7386.00	49.3 PK	74.0	-24.7	1.93 H	274	40.3	9.0
8	7386.00	41.8 AV	54.0	-12.2	1.93 H	274	32.8	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#86.00	47.3 PK	74.0	-26.7	1.45 V	290	47.3	0.0
2	#86.00	40.1 AV	54.0	-13.9	1.45 V	290	40.1	0.0
3	*2462.00	110.8 PK			2.49 V	305	112.7	-1.9
4	*2462.00	102.0 AV			2.49 V	305	103.9	-1.9
5	2483.50	61.5 PK	74.0	-12.5	2.49 V	305	63.4	-1.9
6	2483.50	51.3 AV	54.0	-2.7	2.49 V	305	53.2	-1.9
7	4924.00	44.2 PK	74.0	-29.8	1.60 V	170	41.5	2.7
8	4924.00	37.3 AV	54.0	-16.7	1.60 V	170	34.6	2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE20)

Channel	TX Channel 1	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.0 PK	74.0	-11.0	1.03 H	83	64.9	-1.9
2	2390.00	53.5 AV	54.0	-0.5	1.03 H	83	55.4	-1.9
3	*2412.00	116.3 PK			1.03 H	83	118.2	-1.9
4	*2412.00	103.9 AV			1.03 H	83	105.8	-1.9
5	4824.00	40.3 PK	74.0	-33.7	1.58 H	318	37.4	2.9
6	4824.00	30.2 AV	54.0	-23.8	1.58 H	318	27.3	2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.84 V	134	67.1	-1.9
2	2390.00	52.5 AV	54.0	-1.5	1.84 V	134	54.4	-1.9
3	*2412.00	111.7 PK			1.84 V	134	113.6	-1.9
4	*2412.00	99.3 AV			1.84 V	134	101.2	-1.9
5	4824.00	41.9 PK	74.0	-32.1	1.45 V	12	39.0	2.9
6	4824.00	30.5 AV	54.0	-23.5	1.45 V	12	27.6	2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2378.45	65.8 PK	74.0	-8.2	1.05 H	79	67.6	-1.8
2	2378.45	53.6 AV	54.0	-0.4	1.05 H	79	55.4	-1.8
3	*2437.00	120.2 PK			1.05 H	79	122.2	-2.0
4	*2437.00	108.3 AV			1.05 H	79	110.3	-2.0
5	2483.50	63.6 PK	74.0	-10.4	1.05 H	79	65.5	-1.9
6	2483.50	48.2 AV	54.0	-5.8	1.05 H	79	50.1	-1.9
7	4874.00	39.3 PK	74.0	-34.7	1.51 H	324	36.5	2.8
8	4874.00	27.4 AV	54.0	-26.6	1.51 H	324	24.6	2.8
9	7311.00	64.5 PK	74.0	-9.5	1.49 H	47	55.6	8.9
10	7311.00	50.3 AV	54.0	-3.7	1.49 H	47	41.4	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.84 V	135	64.0	-1.9
2	2390.00	44.8 AV	54.0	-9.2	1.84 V	135	46.7	-1.9
3	*2437.00	116.6 PK			1.84 V	135	118.6	-2.0
4	*2437.00	103.8 AV			1.84 V	135	105.8	-2.0
5	2483.50	59.8 PK	74.0	-14.2	1.84 V	135	61.7	-1.9
6	2483.50	44.8 AV	54.0	-9.2	1.84 V	135	46.7	-1.9
7	4874.00	42.1 PK	74.0	-31.9	1.48 V	360	39.3	2.8
8	4874.00	30.7 AV	54.0	-23.3	1.48 V	360	27.9	2.8
9	7311.00	63.2 PK	74.0	-10.8	1.56 V	360	54.3	8.9
10	7311.00	49.7 AV	54.0	-4.3	1.56 V	360	40.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 11	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.7 PK			1.03 H	84	116.6	-1.9
2	*2462.00	101.5 AV			1.03 H	84	103.4	-1.9
3	2483.50	62.7 PK	74.0	-11.3	1.03 H	84	64.6	-1.9
4	2483.50	53.7 AV	54.0	-0.3	1.03 H	84	55.6	-1.9
5	4924.00	42.7 PK	74.0	-31.3	1.58 H	302	40.0	2.7
6	4924.00	31.4 AV	54.0	-22.6	1.58 H	302	28.7	2.7
7	7386.00	62.7 PK	74.0	-11.3	1.47 H	60	53.7	9.0
8	7386.00	49.4 AV	54.0	-4.6	1.47 H	60	40.4	9.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.1 PK			1.83 V	136	111.0	-1.9
2	*2462.00	96.5 AV			1.83 V	136	98.4	-1.9
3	2483.50	62.3 PK	74.0	-11.7	1.83 V	136	64.2	-1.9
4	2483.50	49.5 AV	54.0	-4.5	1.83 V	136	51.4	-1.9
5	4924.00	42.5 PK	74.0	-31.5	1.41 V	8	39.8	2.7
6	4924.00	31.1 AV	54.0	-22.9	1.41 V	8	28.4	2.7
7	7386.00	60.6 PK	74.0	-13.4	1.64 V	28	51.6	9.0
8	7386.00	48.3 AV	54.0	-5.7	1.64 V	28	39.3	9.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

Channel	TX Channel 3	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.7 PK	74.0	-9.3	1.04 H	83	66.6	-1.9
2	2390.00	53.7 AV	54.0	-0.3	1.04 H	83	55.6	-1.9
3	*2422.00	110.6 PK			1.04 H	83	112.5	-1.9
4	*2422.00	99.6 AV			1.04 H	83	101.5	-1.9
5	4844.00	44.6 PK	74.0	-29.4	1.66 H	290	41.7	2.9
6	4844.00	33.5 AV	54.0	-20.5	1.66 H	290	30.6	2.9
7	7266.00	49.3 PK	74.0	-24.7	1.38 H	63	40.5	8.8
8	7266.00	38.4 AV	54.0	-15.6	1.38 H	63	29.6	8.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.69	55.7 PK	74.0	-18.3	1.83 V	140	57.6	-1.9
2	2383.69	47.4 AV	54.0	-6.6	1.83 V	140	49.3	-1.9
3	2390.00	56.6 PK	74.0	-17.4	1.83 V	140	58.5	-1.9
4	2390.00	44.5 AV	54.0	-9.5	1.83 V	140	46.4	-1.9
5	*2422.00	106.9 PK			1.83 V	140	108.8	-1.9
6	*2422.00	95.0 AV			1.83 V	140	96.9	-1.9
7	4844.00	43.4 PK	74.0	-30.6	1.42 V	12	40.5	2.9
8	4844.00	32.0 AV	54.0	-22.0	1.42 V	12	29.1	2.9
9	7266.00	48.7 PK	74.0	-25.3	1.90 V	31	39.9	8.8
10	7266.00	37.5 AV	54.0	-16.5	1.90 V	31	28.7	8.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 6	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.04 H	86	68.6	-1.9
2	2390.00	53.6 AV	54.0	-0.4	1.04 H	86	55.5	-1.9
3	*2437.00	114.0 PK			1.04 H	86	116.0	-2.0
4	*2437.00	102.2 AV			1.04 H	86	104.2	-2.0
5	2483.50	65.4 PK	74.0	-8.6	1.04 H	86	67.3	-1.9
6	2483.50	52.4 AV	54.0	-1.6	1.04 H	86	54.3	-1.9
7	4874.00	46.6 PK	74.0	-27.4	1.66 H	275	43.8	2.8
8	4874.00	35.9 AV	54.0	-18.1	1.66 H	275	33.1	2.8
9	7311.00	51.3 PK	74.0	-22.7	1.39 H	64	42.4	8.9
10	7311.00	40.8 AV	54.0	-13.2	1.39 H	64	31.9	8.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.84 V	140	62.5	-1.9
2	2390.00	47.6 AV	54.0	-6.4	1.84 V	140	49.5	-1.9
3	*2437.00	108.9 PK			1.84 V	140	110.9	-2.0
4	*2437.00	97.9 AV			1.84 V	140	99.9	-2.0
5	2483.50	62.8 PK	74.0	-11.2	1.84 V	140	64.7	-1.9
6	2483.50	48.2 AV	54.0	-5.8	1.84 V	140	50.1	-1.9
7	4874.00	44.2 PK	74.0	-29.8	1.36 V	124	41.4	2.8
8	4874.00	33.1 AV	54.0	-20.9	1.36 V	124	30.3	2.8
9	7311.00	49.6 PK	74.0	-24.4	2.52 V	58	40.7	8.9
10	7311.00	38.7 AV	54.0	-15.3	2.52 V	58	29.8	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Channel	TX Channel 9	Detector Function	Peak (PK)
Frequency Range	1GHz ~ 25GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	112.3 PK			1.05 H	85	114.2	-1.9
2	*2452.00	99.2 AV			1.05 H	85	101.1	-1.9
3	2483.50	67.6 PK	74.0	-6.4	1.05 H	85	69.5	-1.9
4	2483.50	53.6 AV	54.0	-0.4	1.05 H	85	55.5	-1.9
5	4904.00	45.7 PK	74.0	-28.3	1.70 H	278	43.0	2.7
6	4904.00	34.3 AV	54.0	-19.7	1.70 H	278	31.6	2.7
7	7356.00	50.2 PK	74.0	-23.8	1.34 H	64	41.3	8.9
8	7356.00	39.6 AV	54.0	-14.4	1.34 H	64	30.7	8.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.8 PK			1.84 V	138	107.7	-1.9
2	*2452.00	94.3 AV			1.84 V	138	96.2	-1.9
3	2483.50	65.6 PK	74.0	-8.4	1.84 V	138	67.5	-1.9
4	2483.50	51.8 AV	54.0	-2.2	1.84 V	138	53.7	-1.9
5	4904.00	43.5 PK	74.0	-30.5	1.36 V	154	40.8	2.7
6	4904.00	32.4 AV	54.0	-21.6	1.36 V	154	29.7	2.7
7	7356.00	48.5 PK	74.0	-25.5	2.50 V	60	39.6	8.9
8	7356.00	37.9 AV	54.0	-16.1	2.50 V	60	29.0	8.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11g

Channel	TX Channel 6	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.11	29.5 QP	40.0	-10.5	2.00 H	360	37.2	-7.7
2	148.53	26.9 QP	43.5	-16.6	2.00 H	301	33.8	-6.9
3	250.00	28.2 QP	46.0	-17.8	1.50 H	282	36.2	-8.0
4	325.58	28.2 QP	46.0	-17.8	1.00 H	341	33.1	-4.9
5	427.24	29.9 QP	46.0	-16.1	1.50 H	226	31.9	-2.0
6	597.69	31.5 QP	46.0	-14.5	3.00 H	162	29.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

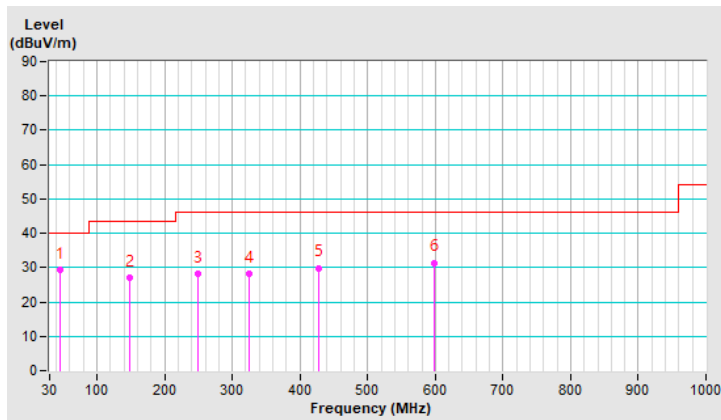


Channel	TX Channel 6	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.95	31.7 QP	40.0	-8.3	2.00 V	0	39.9	-8.2
2	131.68	25.6 QP	43.5	-17.9	2.50 V	274	33.7	-8.1
3	250.02	25.9 QP	46.0	-20.1	2.50 V	360	33.9	-8.0
4	342.92	26.2 QP	46.0	-19.8	2.00 V	29	30.7	-4.5
5	470.50	29.2 QP	46.0	-16.8	2.00 V	0	30.3	-1.1
6	650.05	32.9 QP	46.0	-13.1	2.00 V	1	29.8	3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

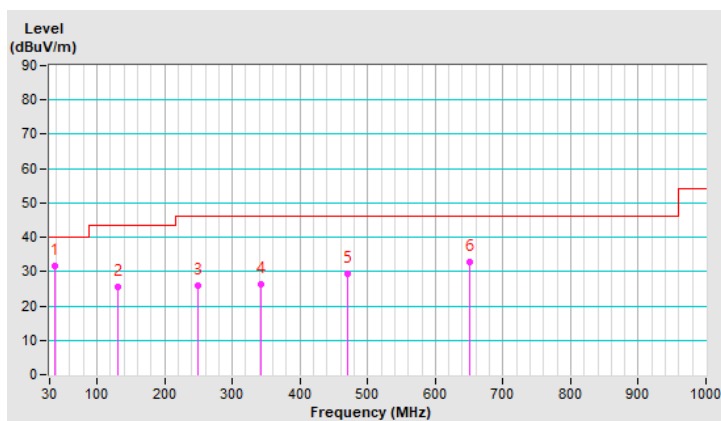

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Sep. 14, 2020

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

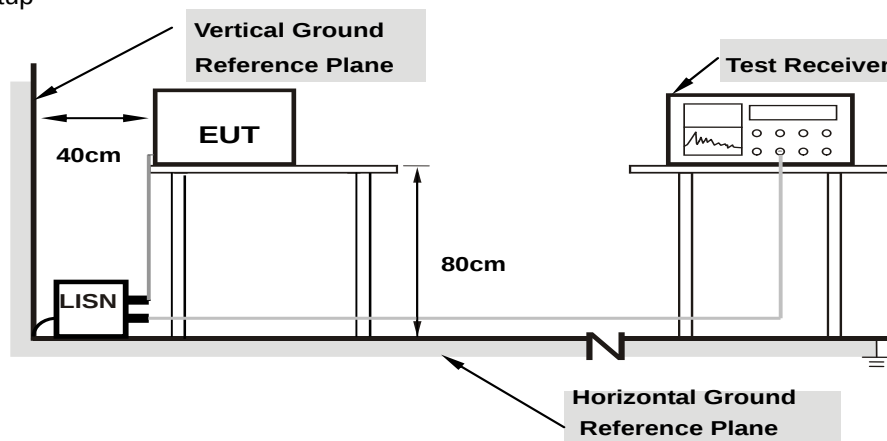

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.91	34.16	17.00	44.07	26.91	66.00	56.00	-21.93	-29.09
2	0.16172	9.91	33.69	20.46	43.60	30.37	65.38	55.38	-21.78	-25.01
3	0.17734	9.92	30.17	15.26	40.09	25.18	64.61	54.61	-24.52	-29.43
4	0.34531	9.94	36.89	30.27	46.83	40.21	59.07	49.07	-12.24	-8.86
5	7.83984	10.32	33.07	33.00	43.39	43.32	60.00	50.00	-16.61	-6.68
6	18.96875	10.95	24.82	22.86	35.77	33.81	60.00	50.00	-24.23	-16.19

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

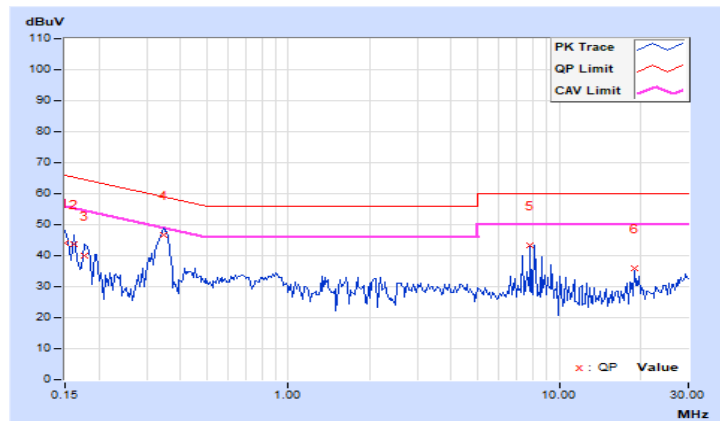


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.91	34.34	16.68	44.25	26.59	66.00	56.00	-21.75	-29.41
2	0.16953	9.92	30.58	16.53	40.50	26.45	64.98	54.98	-24.48	-28.53
3	0.34922	9.94	36.96	30.60	46.90	40.54	58.98	48.98	-12.08	-8.44
4	7.83984	10.26	33.33	33.25	43.59	43.51	60.00	50.00	-16.41	-6.49
5	8.09375	10.27	32.27	32.20	42.54	42.47	60.00	50.00	-17.46	-7.53
6	18.96875	10.72	24.04	23.26	34.76	33.98	60.00	50.00	-25.24	-16.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

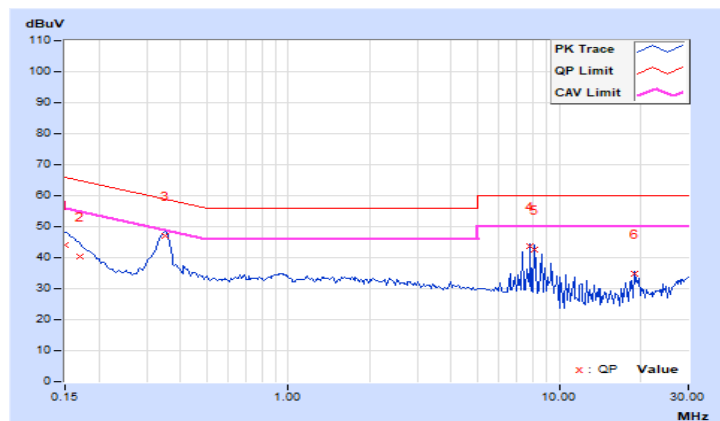


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	10.11	10.08	10.08	9.07	0.5	Pass
6	2437	10.11	10.1	10.1	10.1	0.5	Pass
11	2462	8.59	10.03	10.1	9.62	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.11	16.1	16.35	16.35	0.5	Pass
6	2437	16.29	15.94	16.36	16.35	0.5	Pass
11	2462	16.34	16.33	16.36	16.36	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	18.92	18.97	18.81	18.86	0.5	Pass
6	2437	18.79	18.94	18.69	18.62	0.5	Pass
11	2462	18.9	18.99	18.69	18.93	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	38.05	38.08	37.78	38.11	0.5	Pass
6	2437	37.9	37.62	38.05	38.06	0.5	Pass
9	2452	37.16	37.77	37.73	38.21	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH11

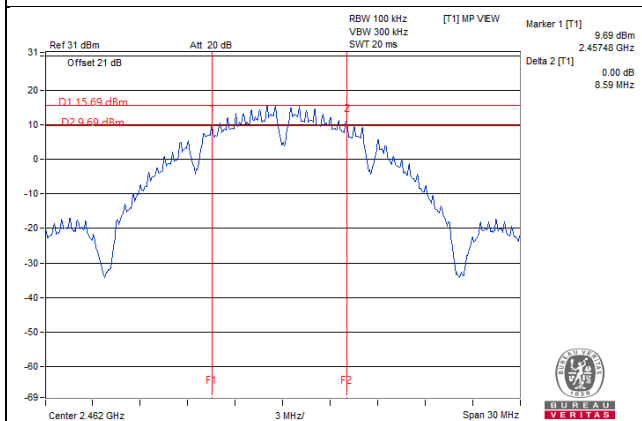


802.11g / Chain 1 : CH6

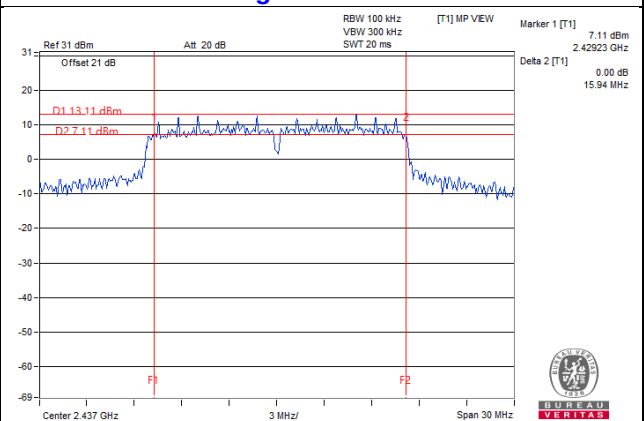

802.11ax (HE20) / Chain 3 : CH6

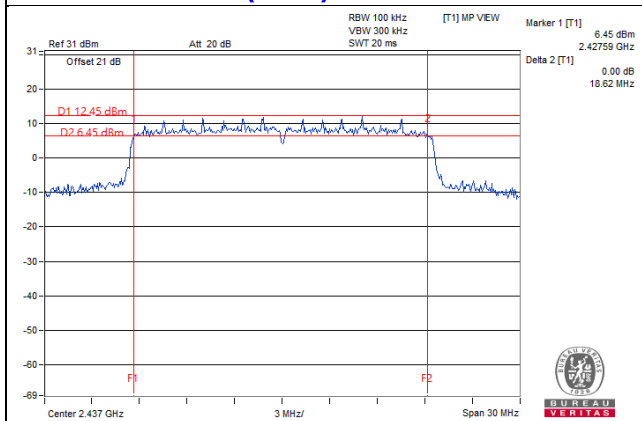


802.11ax (HE40) / Chain 0 : CH9

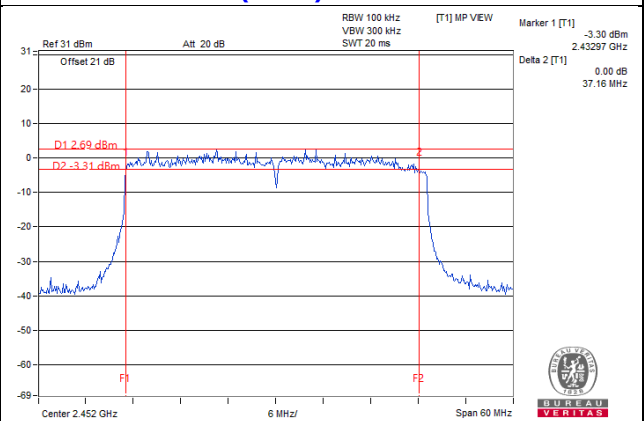

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

Same as Item 4.3.6.

4.4.6 Test Results

CDD Mode

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain0	Chain1	Chain2	Chain3
1	2412	15.48	16.8	16.92	15.12
6	2437	16.92	18.36	16.2	15.48
11	2462	16.44	16.32	16.44	15.96

802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain0	Chain1	Chain2	Chain3
1	2412	16.56	16.56	16.68	16.68
6	2437	19.44	26.64	19.44	28.56
11	2462	16.44	16.44	16.68	16.44

802.11ax (HE20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain0	Chain1	Chain2	Chain3
1	2412	19.08	19.08	18.84	18.96
6	2437	20.4	23.76	23.52	21.48
11	2462	19.08	18.96	18.96	19.08

802.11ax (HE40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain0	Chain1	Chain2	Chain3
3	2422	38.16	38.16	37.92	38.16
6	2437	38.16	38.64	38.4	38.16
9	2452	37.92	38.16	38.16	38.16

Spectrum Plot of Max. Value


802.11b / Chain 1: CH6

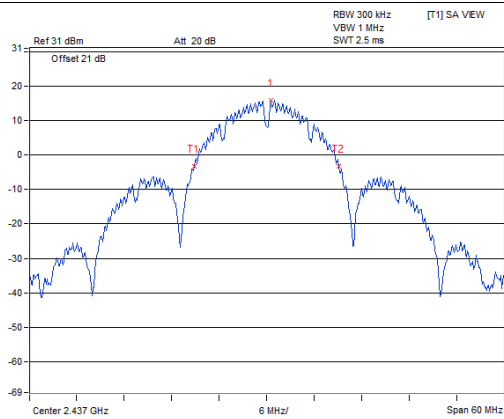


802.11g / Chain 3: CH6

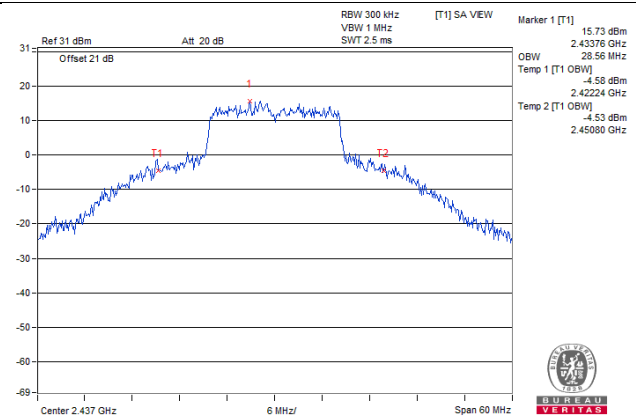

802.11ax (HE20) / Chain 1: CH 6

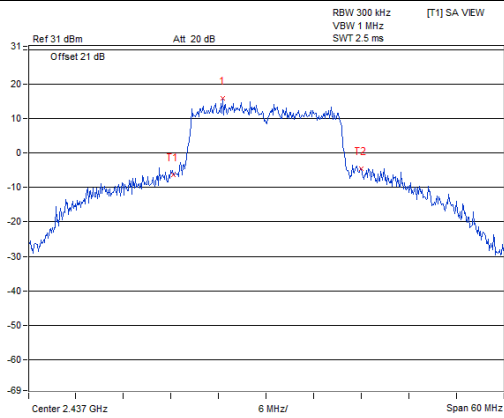

802.11ax (HE40) / Chain 1: CH6

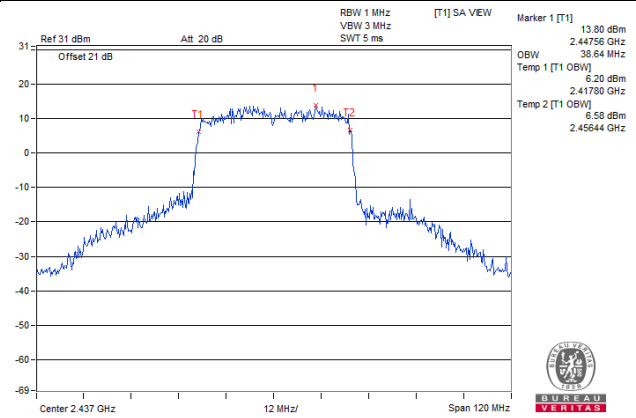

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	22.20	22.55	22.43	22.47	697.434	28.44	30.00	Pass
6	2437	23.80	24.02	23.56	23.47	941.549	29.74	30.00	Pass
11	2462	22.96	23.17	23.03	23.08	809.333	29.08	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	19.51	19.74	19.62	19.59	366.133	25.64	30.00	Pass
6	2437	23.51	24.04	23.76	23.75	952.722	29.79	30.00	Pass
11	2462	17.74	17.96	17.83	17.86	243.714	23.87	30.00	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.90	18.23	17.94	18.15	255.73	24.08	30.00	Pass
6	2437	22.48	23.09	22.53	22.64	743.43	28.71	30.00	Pass
11	2462	16.10	16.28	16.27	16.29	168.124	22.26	30.00	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.15	16.43	16.29	16.08	168.275	22.26	30.00	Pass
6	2437	19.14	19.47	19.27	19.33	340.778	25.32	30.00	Pass
9	2452	16.29	16.40	16.26	16.27	170.843	22.33	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.11	18.50	18.17	18.35	269.515	24.31	30.00	Pass
6	2437	22.76	23.29	22.82	22.84	785.838	28.95	30.00	Pass
11	2462	16.37	16.55	16.47	16.51	177.669	22.50	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.35	16.63	16.51	16.36	177.2	22.48	30.00	Pass
6	2437	19.44	19.67	19.53	19.51	359.659	25.56	30.00	Pass
9	2452	16.48	16.65	16.55	16.52	180.761	22.57	30.00	Pass

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	17.90	18.23	17.94	18.15	255.73	24.08	26.43	Pass
6	2437	19.66	20.82	20.09	19.99	415.115	26.18	26.43	Pass
11	2462	16.10	16.28	16.27	16.29	168.124	22.26	26.43	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (9.57 - 6) = 26.43\text{dBm}$.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.15	16.43	16.29	16.08	168.275	22.26	26.43	Pass
6	2437	19.14	19.47	19.27	19.33	340.778	25.32	26.43	Pass
9	2452	16.29	16.40	16.26	16.27	170.843	22.33	26.43	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (9.57 - 6) = 26.43\text{dBm}$.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	18.11	18.50	18.17	18.35	269.515	24.31	26.43	Pass
6	2437	19.95	20.72	20.25	20.18	427.044	26.30	26.43	Pass
11	2462	16.37	16.55	16.47	16.51	177.669	22.50	26.43	Pass

Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (9.57 - 6) = 26.43\text{dBm}$.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	16.35	16.63	16.51	16.36	177.2	22.48	26.43	Pass
6	2437	19.44	19.67	19.53	19.51	359.659	25.56	26.43	Pass
9	2452	16.48	16.65	16.55	16.52	180.761	22.57	26.43	Pass


Note: Directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (9.57 - 6) = 26.43\text{dBm}$.

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- a) Measure the duty cycle (x).
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least 1.5 times the OBW.
- d) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e) Set VBW $\geq 3 \times \text{RBW}$.
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

CDD Mode

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
1	2412	-6.71	-7.34	-6.66	-6.88	2.42	1.55	4.43	Pass
6	2437	-6.01	-7.58	-7.30	-5.72	2.42	1.86	4.43	Pass
11	2462	-6.44	-6.72	-6.45	-6.45	2.42	1.93	4.43	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-9.57-6 = 4.43\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
1	2412	-11.48	-12.02	-11.36	-11.92	0.28	-5.38	4.43	Pass
6	2437	-8.74	-9.20	-8.17	-8.01	0.28	-2.20	4.43	Pass
11	2462	-13.48	-13.83	-14.06	-14.18	0.28	-7.58	4.43	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-9.57-6 = 4.43\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
1	2412	-14.92	-14.87	-15.41	-15.60	0.24	-8.92	4.43	Pass
6	2437	-11.58	-11.42	-11.31	-10.09	0.24	-4.79	4.43	Pass
11	2462	-16.97	-16.65	-17.30	-17.52	0.24	-10.83	4.43	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-9.57-6 = 4.43\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)				Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
		Chain0	Chain1	Chain2	Chain3				
3	2422	-19.93	-18.77	-19.87	-19.64	0.29	-13.21	4.43	Pass
6	2437	-15.85	-15.62	-16.76	-16.65	0.29	-9.88	4.43	Pass
9	2452	-19.27	-18.81	-19.39	-18.97	0.29	-12.79	4.43	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-9.57-6 = 4.43\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 3 : CH6

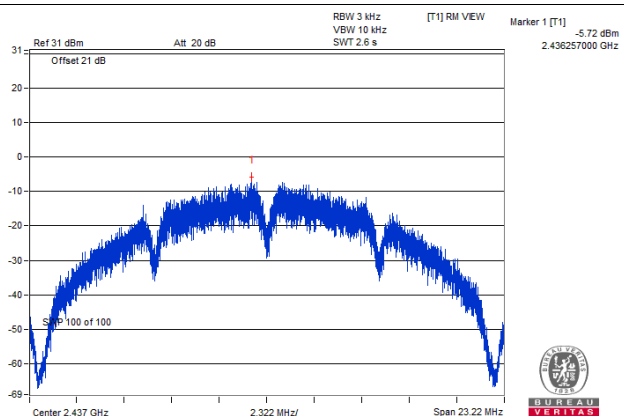


802.11g / Chain 3 : CH6

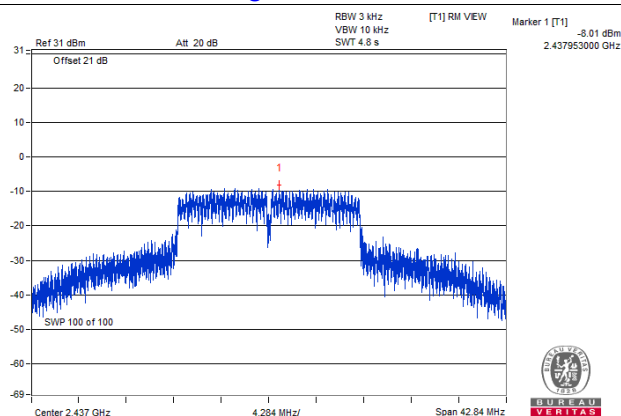

802.11ax (HE20) / Chain 3 : CH6

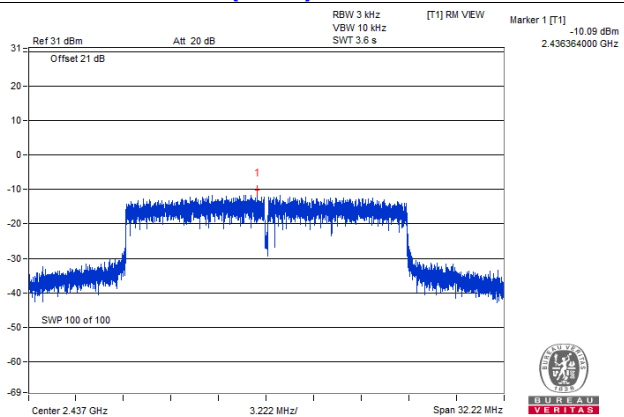

802.11ax (HE40) / Chain 1 : CH6

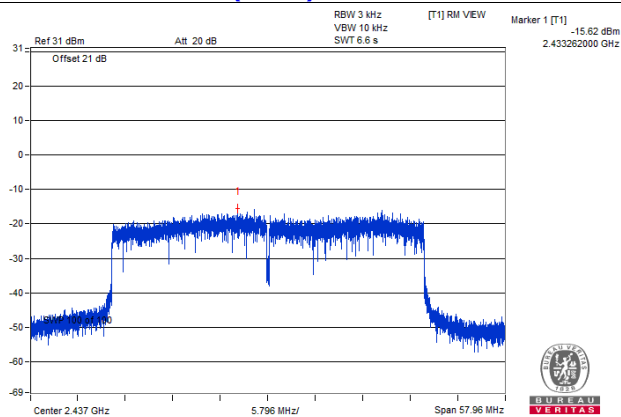


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.


4.7.6 EUT Operating Condition

Same as Item 4.3.6

4.7.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b

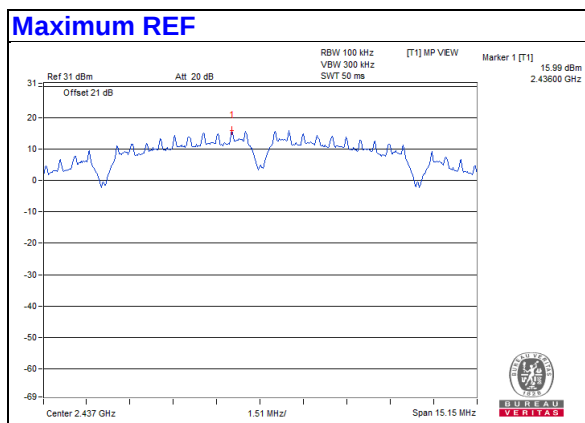


Chain 0


CH 1

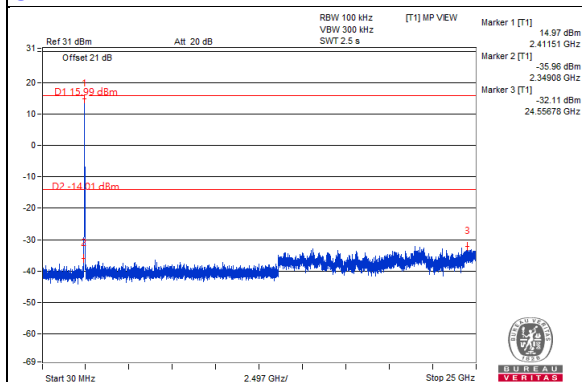


CH 6

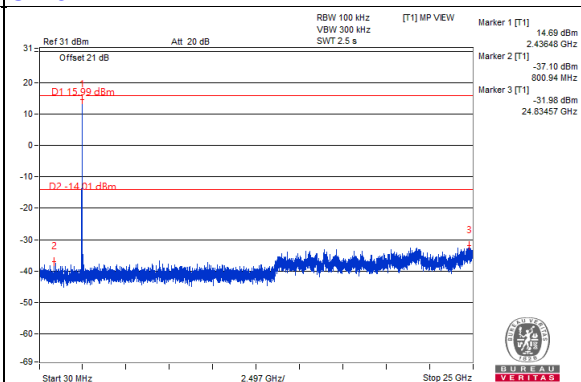


CH 11

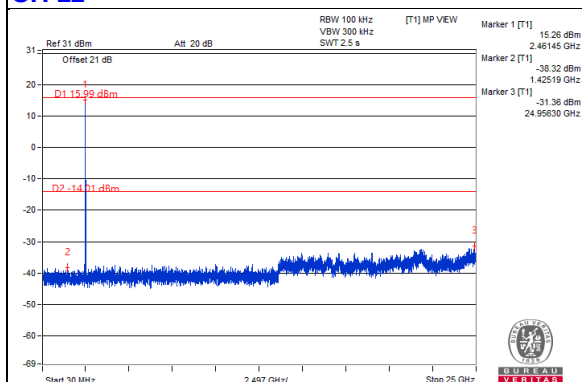

CH 1 Band edge

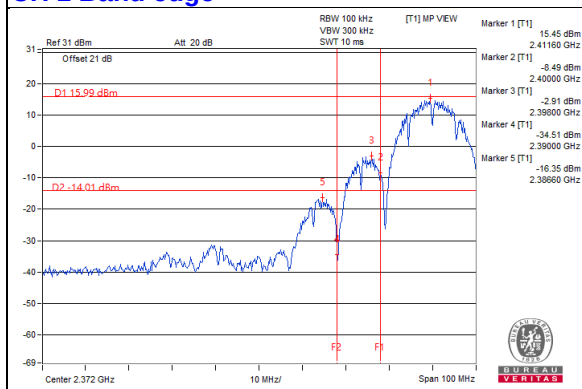


CH 11 Band edge

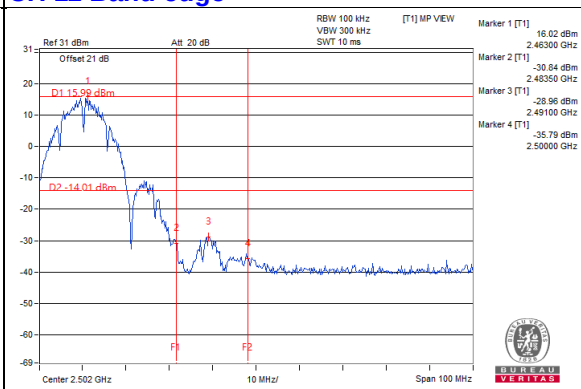


Chain 1


CH 1

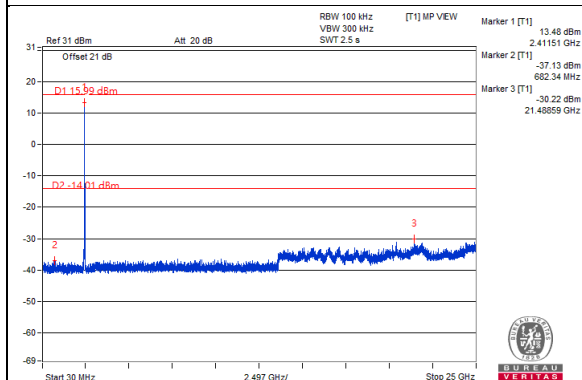


CH 6

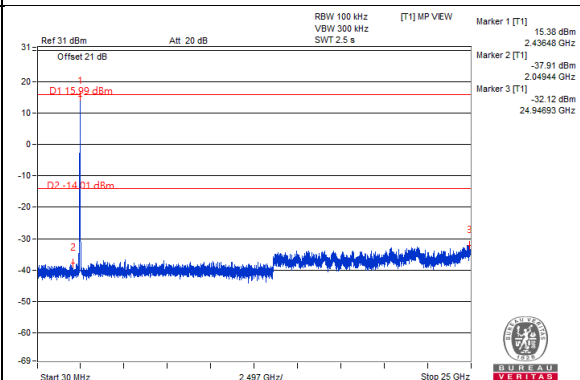


CH 11

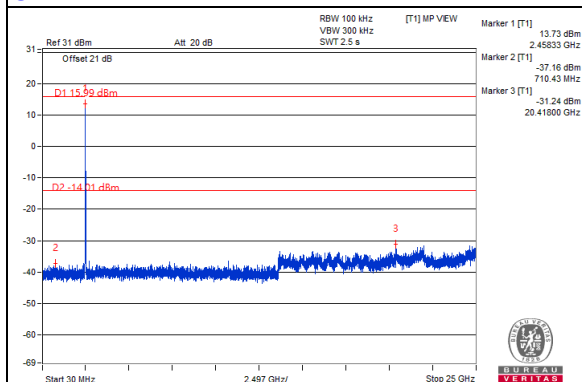

CH 1 Band edge

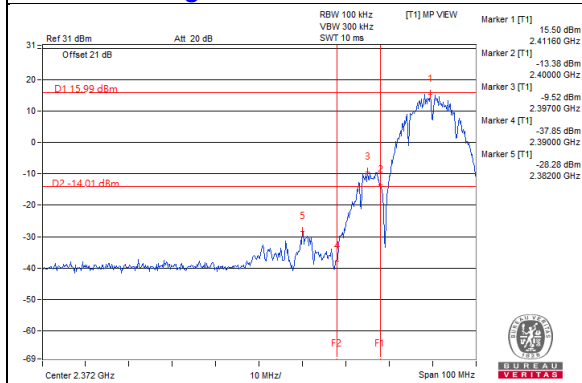


CH 11 Band edge

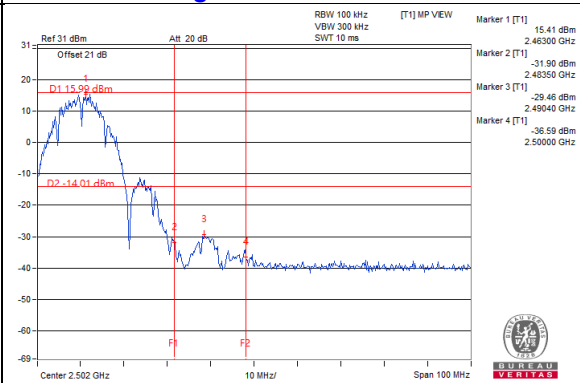


Chain 2


CH 1

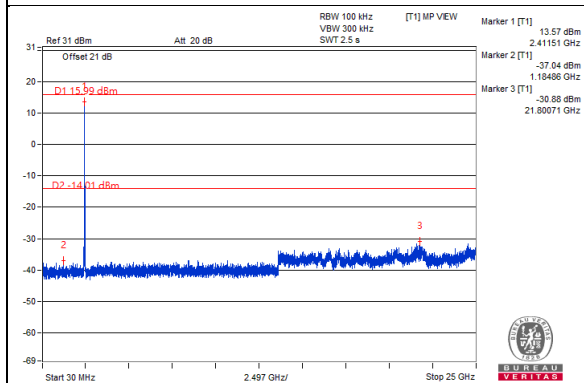


CH 6

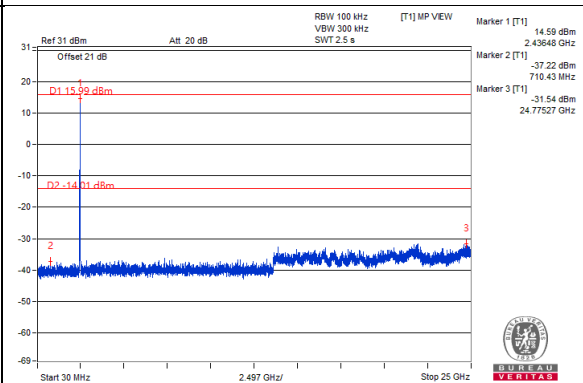


CH 11

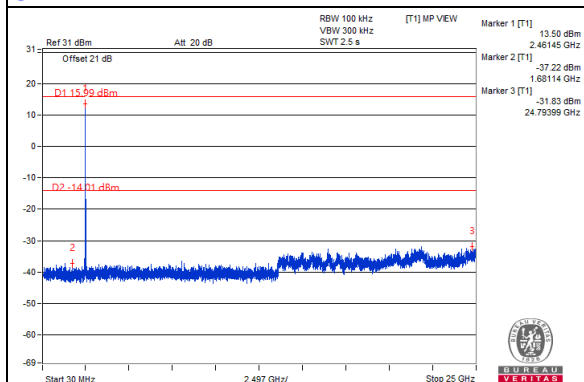

CH 1 Band edge

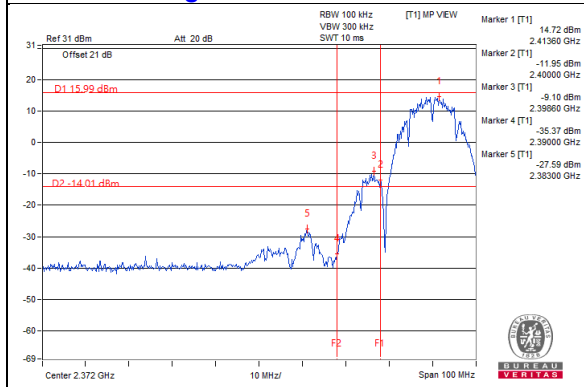


CH 11 Band edge

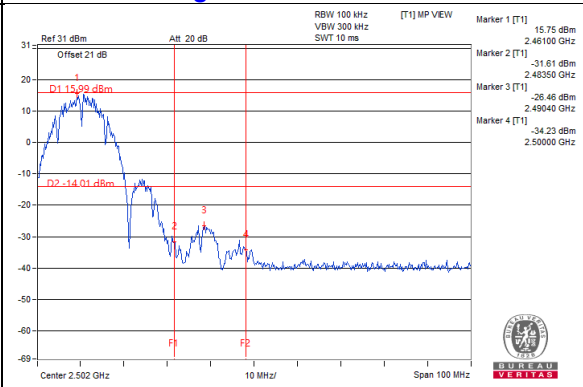


Chain 3


CH 1

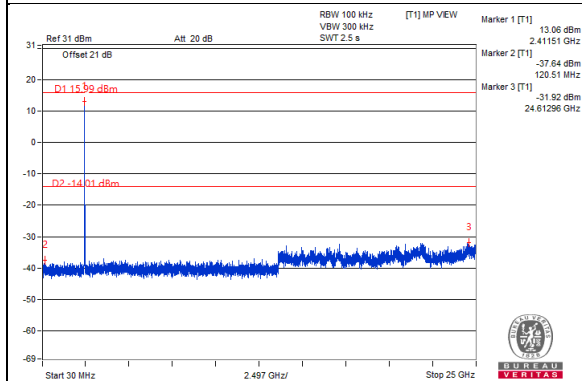


CH 6

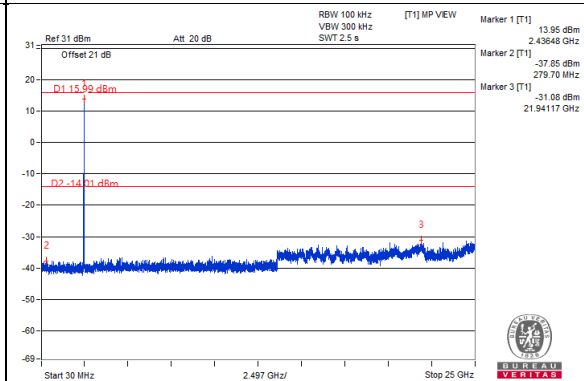


CH 11

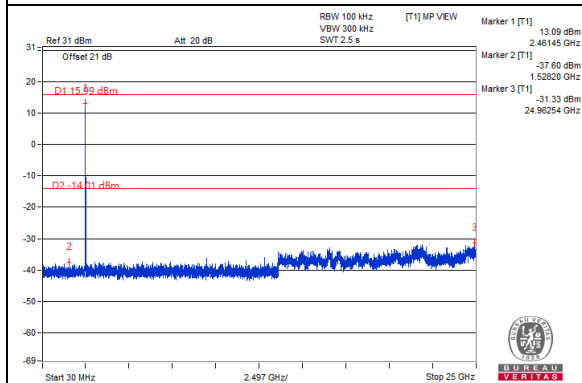


CH 1 Band edge

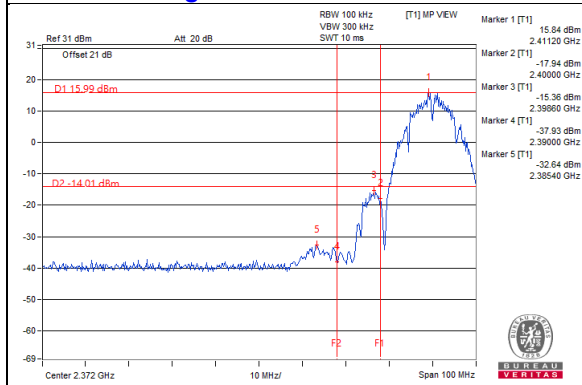

CH 11 Band edge

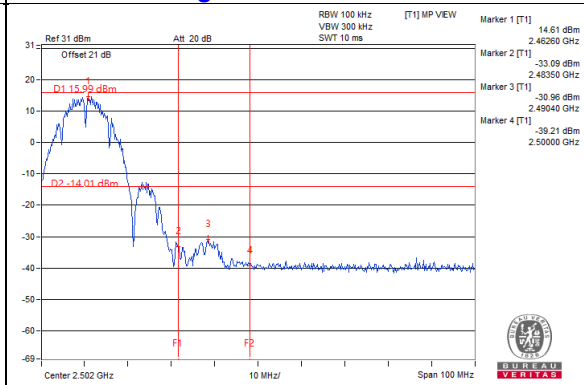


802.11g

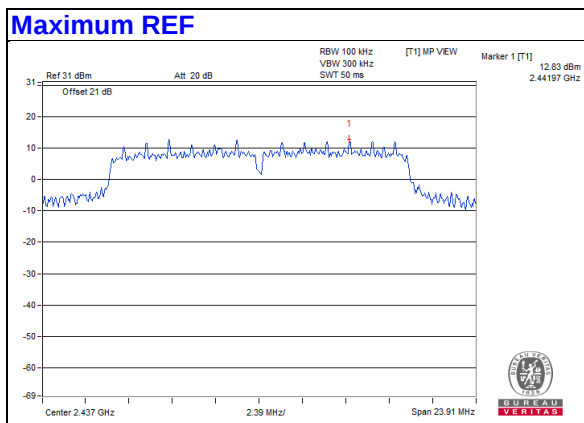


Chain 0


CH 1

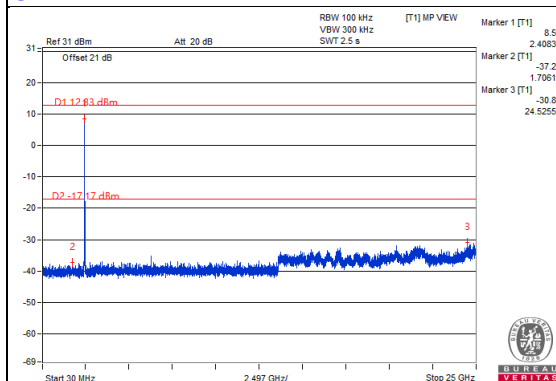


CH 6

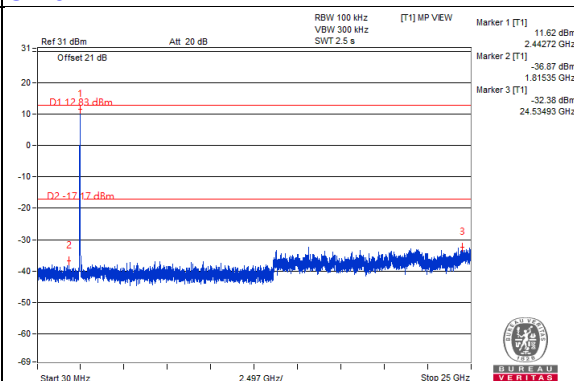


CH 11

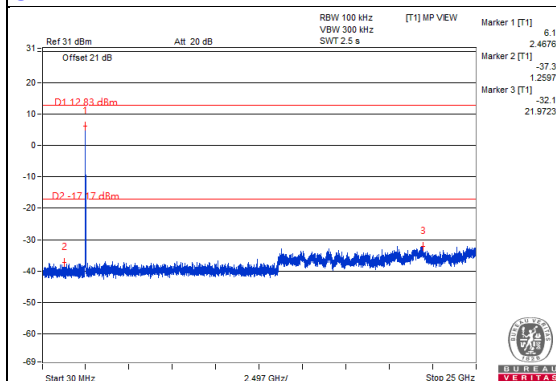

CH 1 Band edge

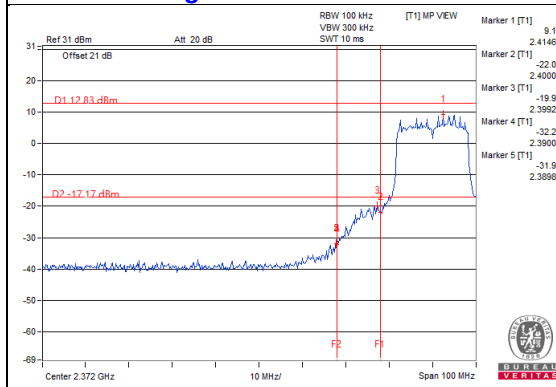


CH 11 Band edge

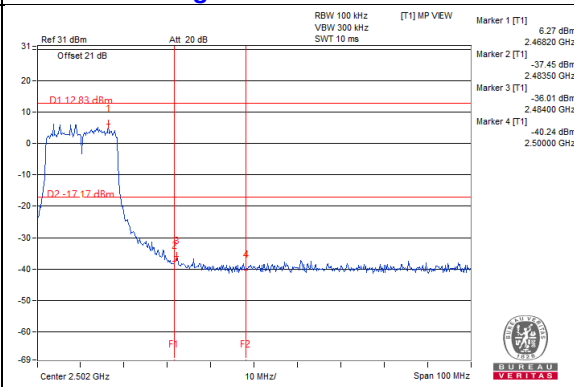


Chain 1


CH 1

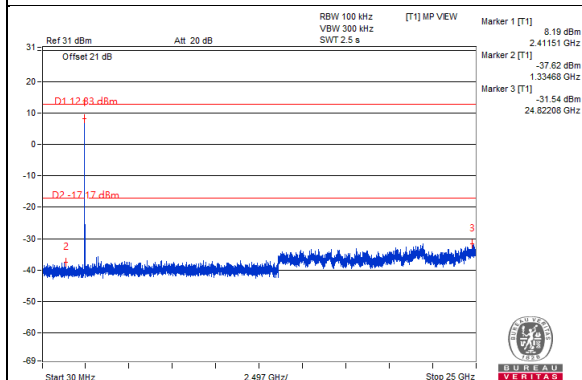


CH 6

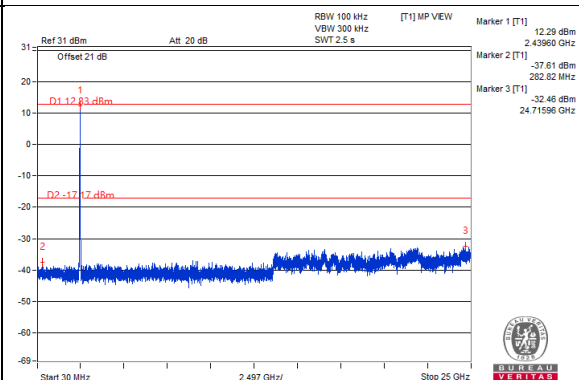


CH 11

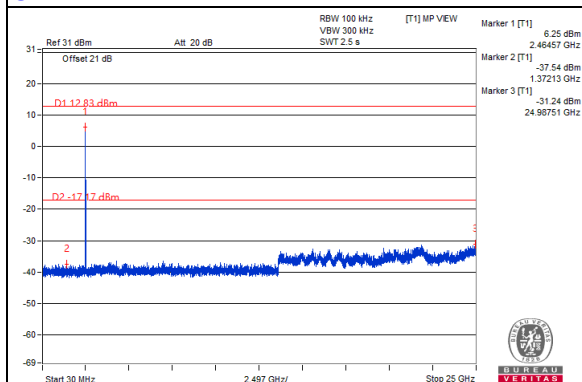

CH 1 Band edge

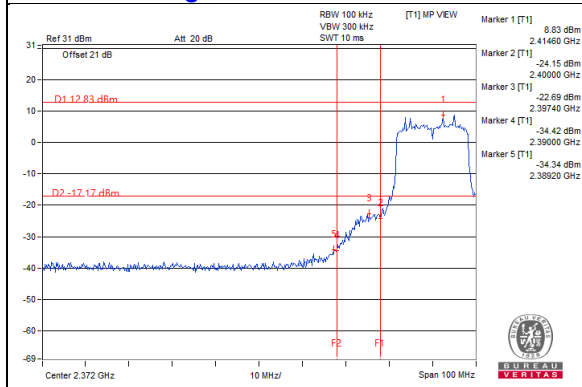


CH 11 Band edge

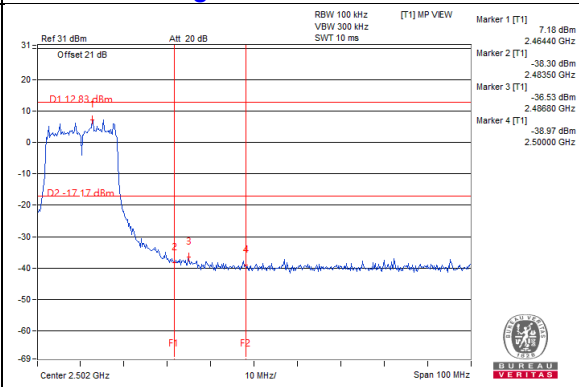


Chain 2


CH 1

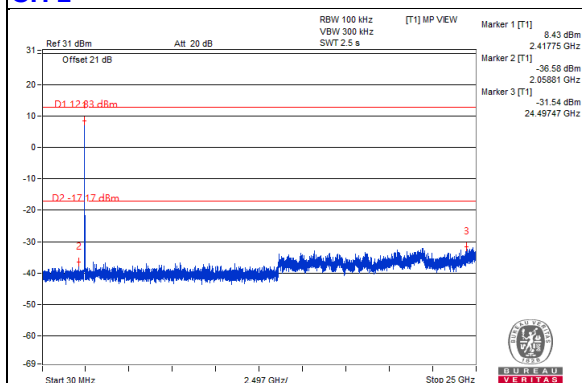


CH 6

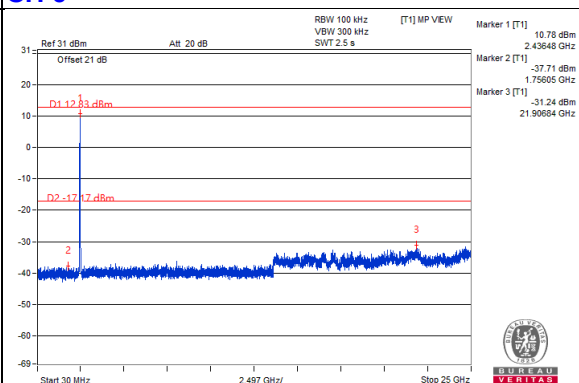


CH 11

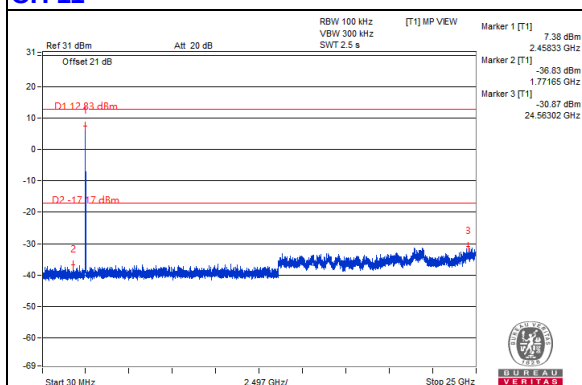

CH 1 Band edge

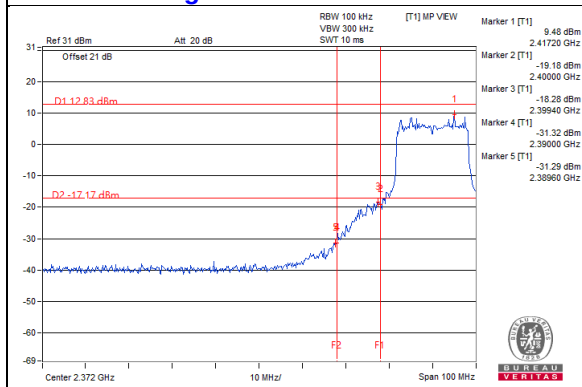


CH 11 Band edge

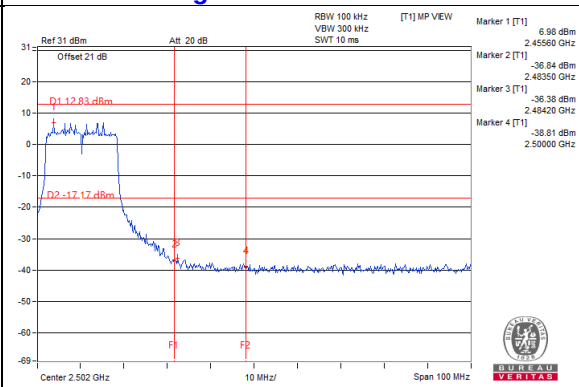


Chain 3


CH 1

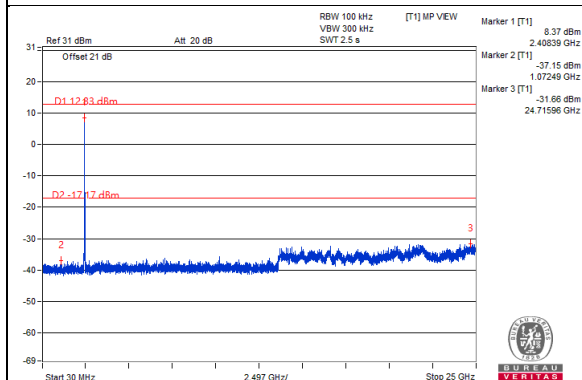


CH 6

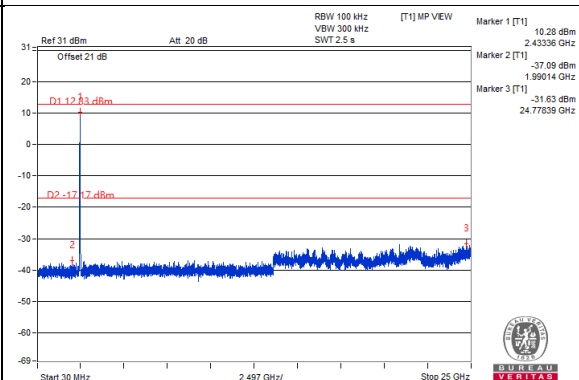


CH 11

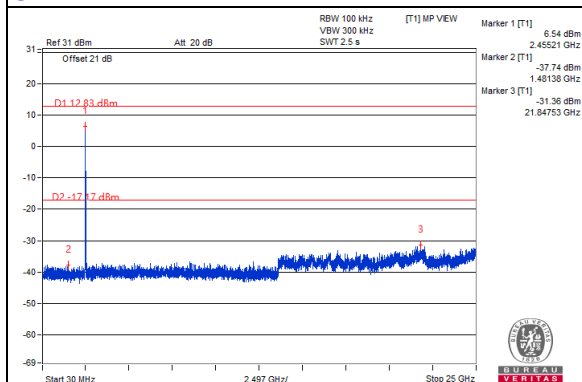

CH 1 Band edge

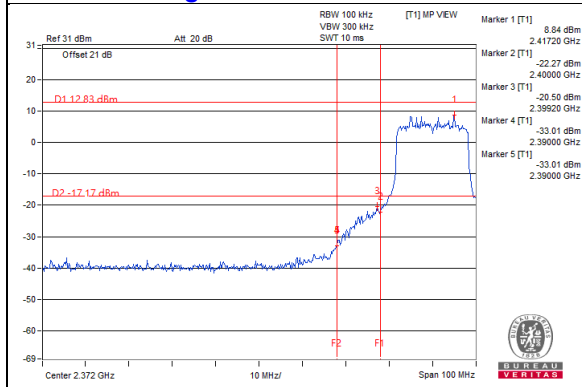


CH 11 Band edge

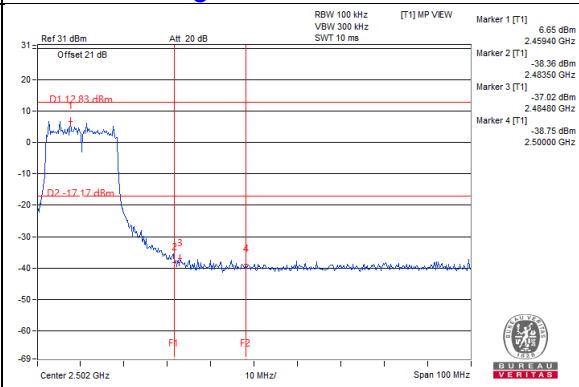


802.11ax (HE20)

Maximum REF

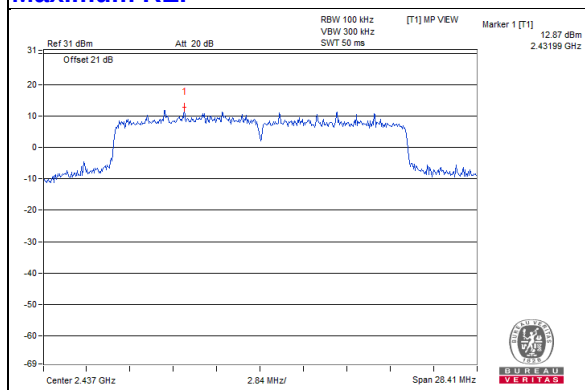


Chain 0


CH 1

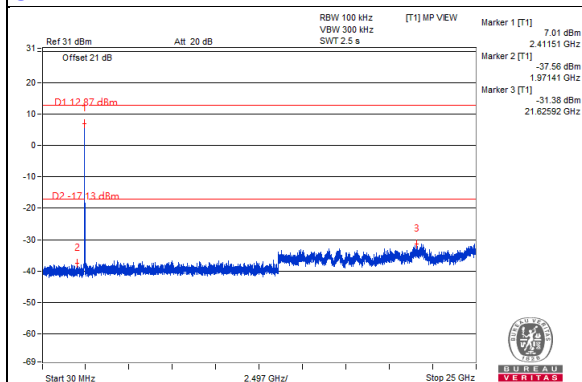


CH 6

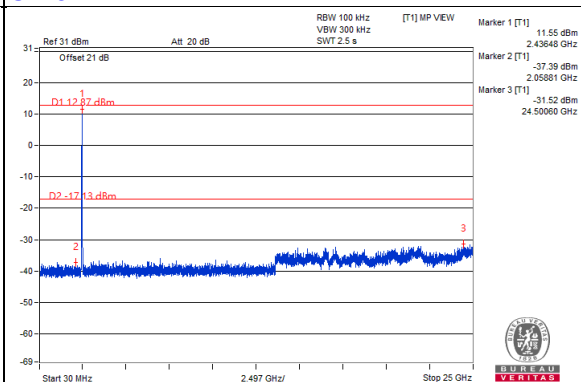


CH 11

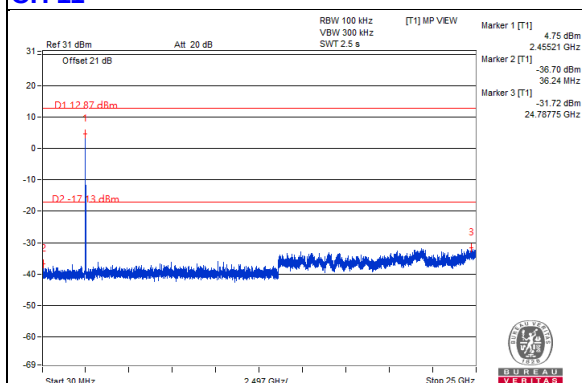

CH 1 Band edge

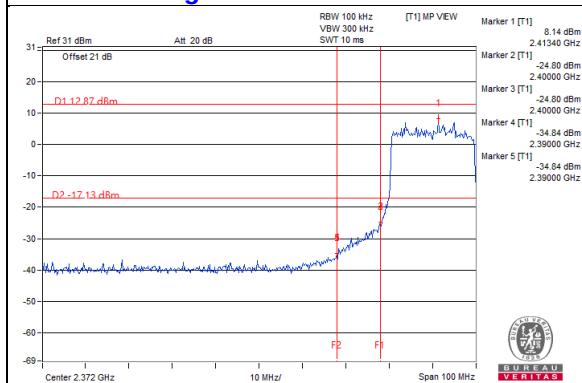


CH 11 Band edge

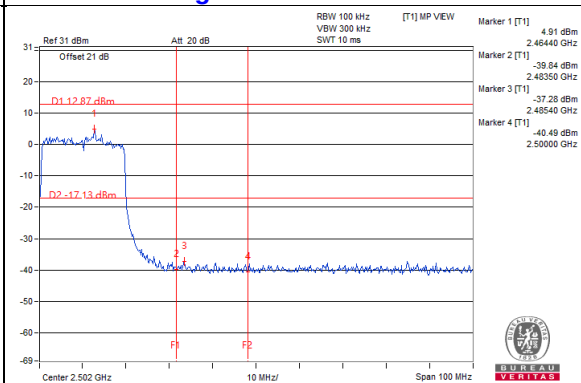


Chain 1


CH 1

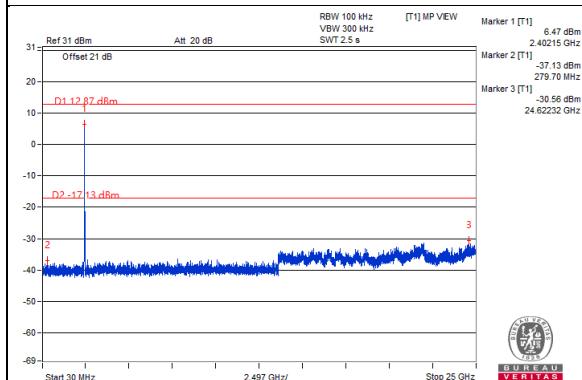


CH 6

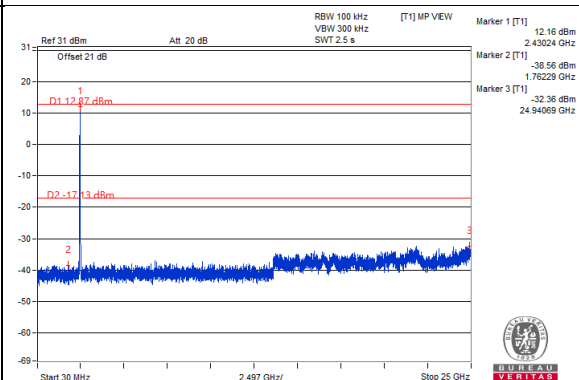


CH 11

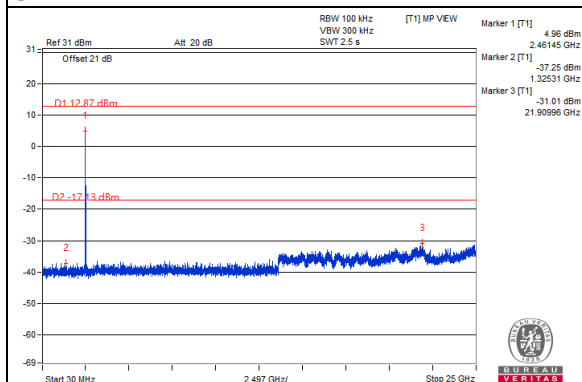

CH 1 Band edge

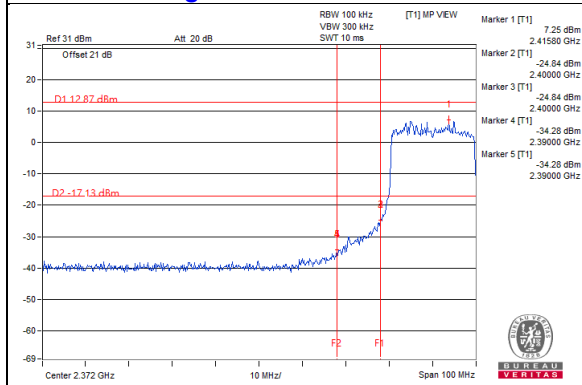


CH 11 Band edge

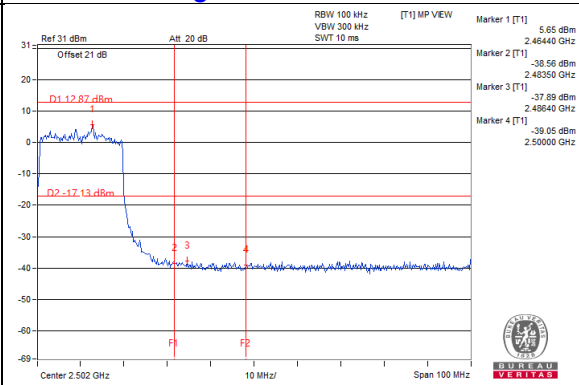


Chain 2



CH 1

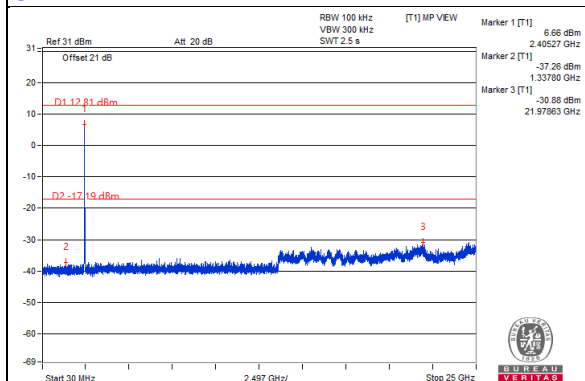


CH 6

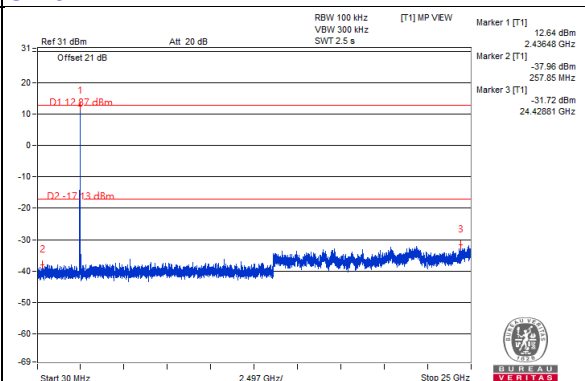


CH 11

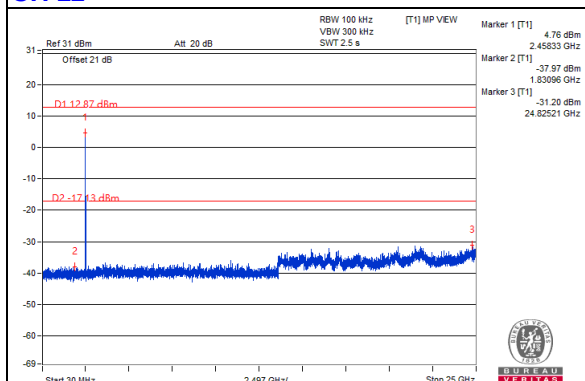

CH 1 Band edge

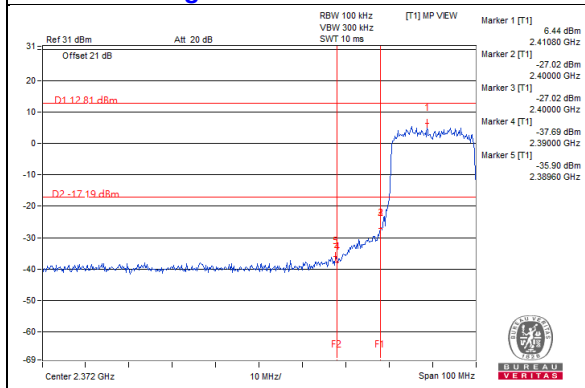


CH 11 Band edge

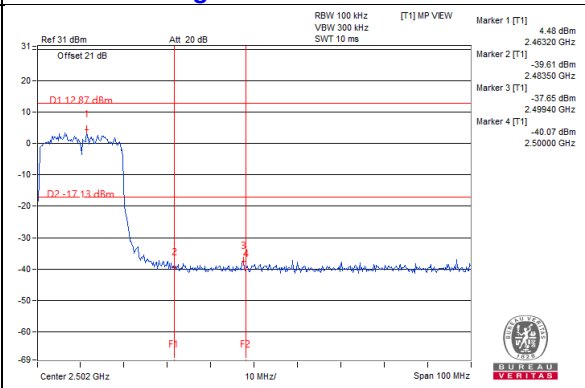


Chain 3


CH 1

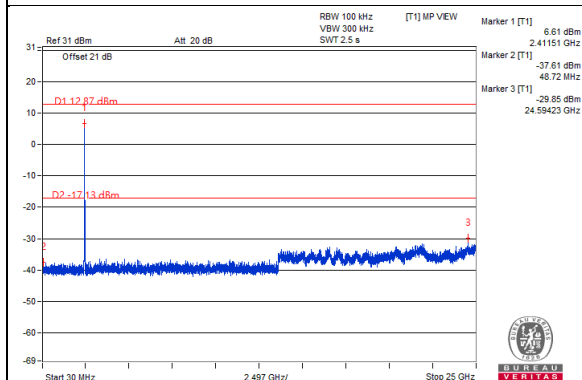


CH 6

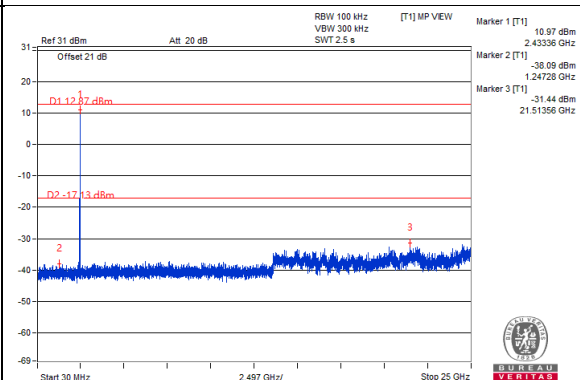


CH 11

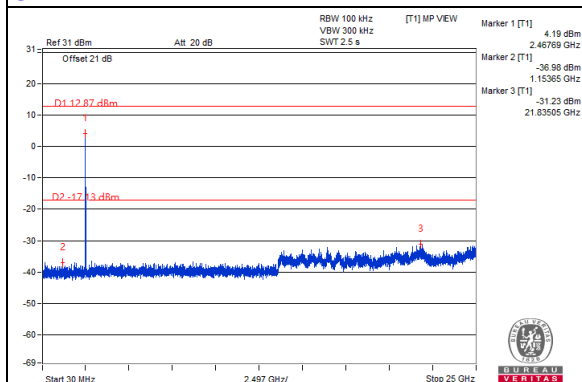

CH 1 Band edge

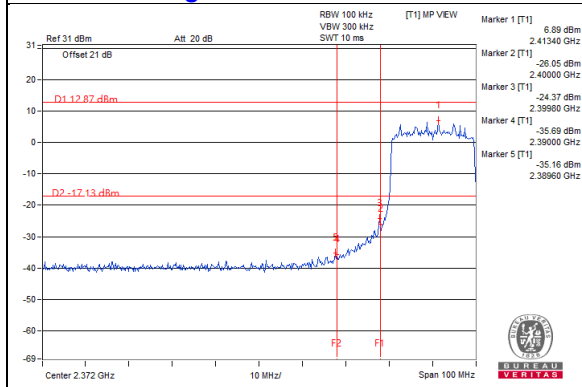


CH 11 Band edge

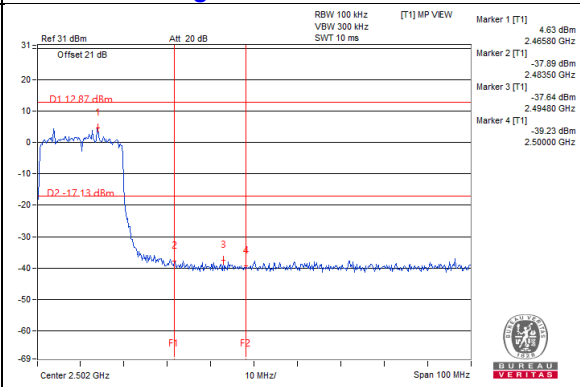


802.11ax (HE40)

Maximum REF

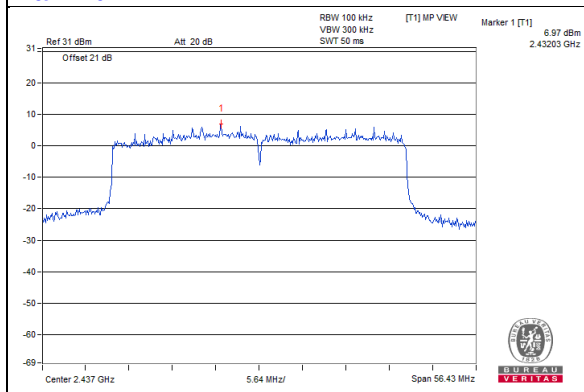


Chain 0


CH 3

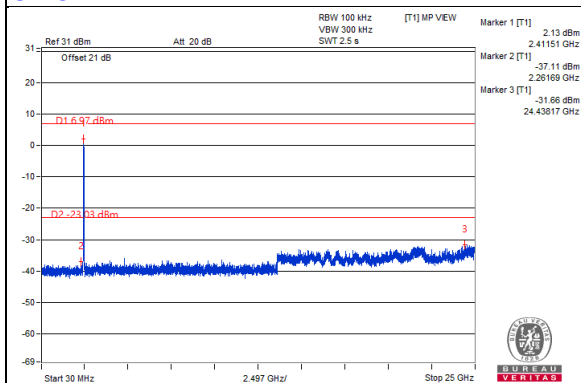


CH 6

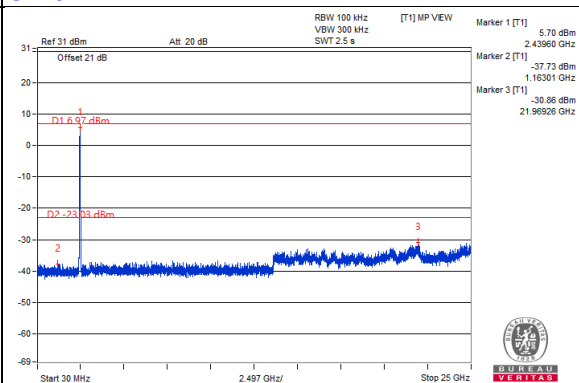


CH 9

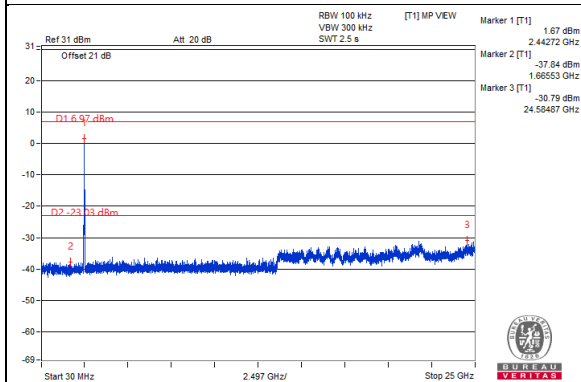

CH 3 Band edge

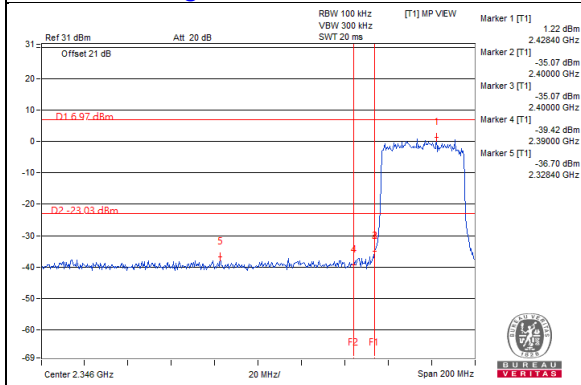


CH 9 Band edge

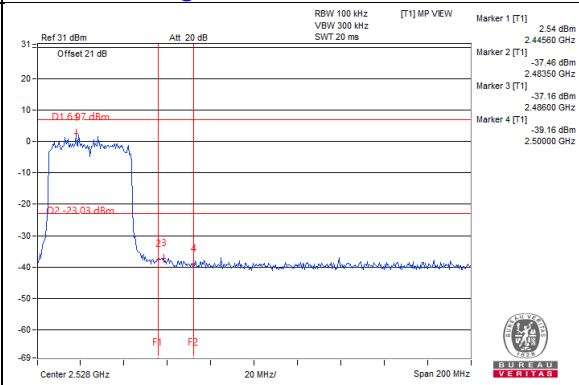


Chain 1


CH 3

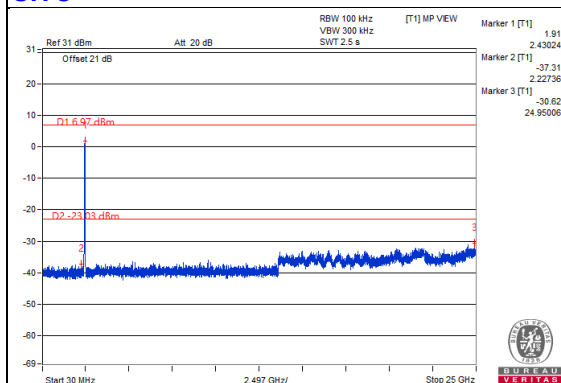


CH 6

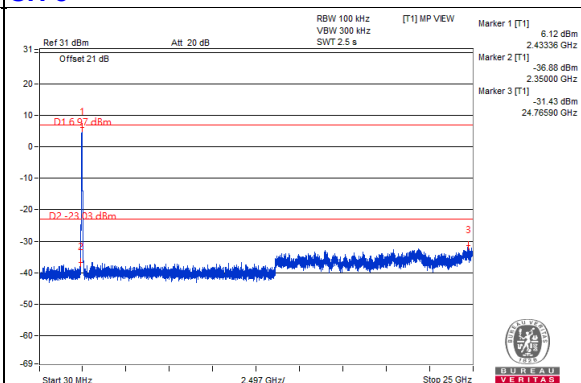


CH 9

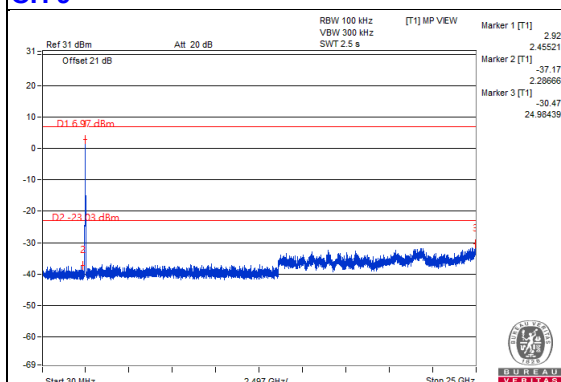

CH 3 Band edge

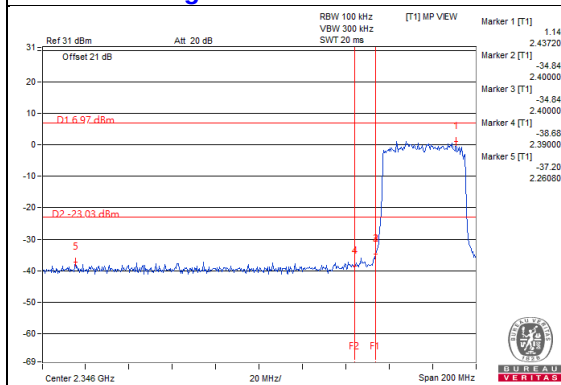


CH 9 Band edge

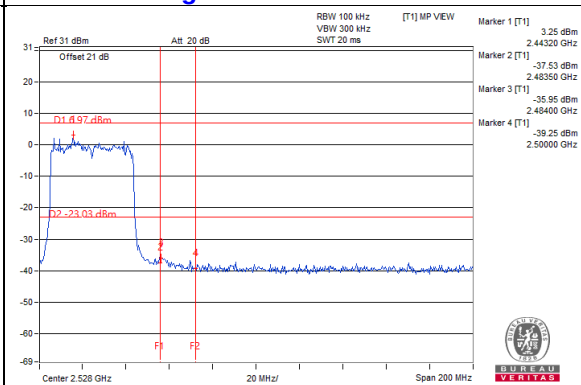


Chain 2



CH 3

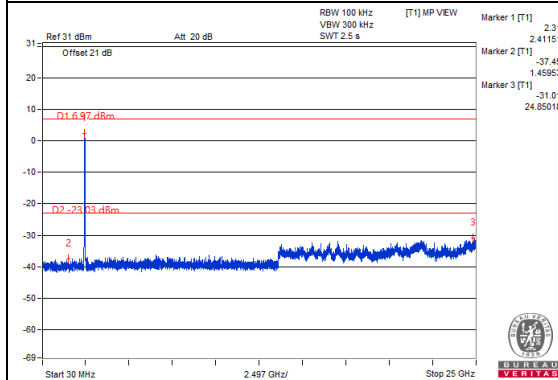


CH 6

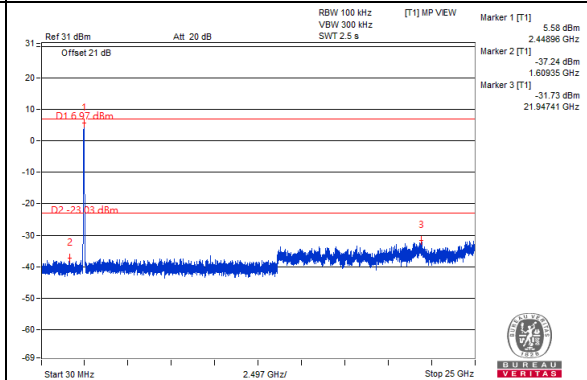


CH 9

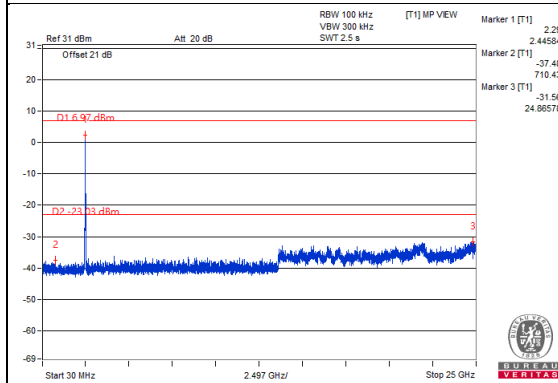

CH 3 Band edge

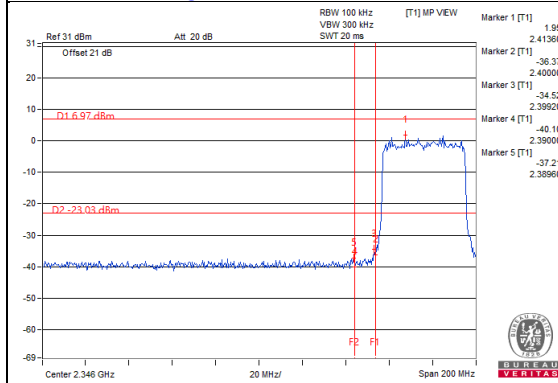


CH 9 Band edge

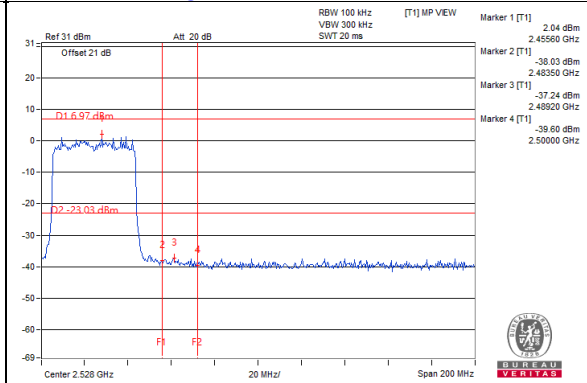


Chain 3



CH 3

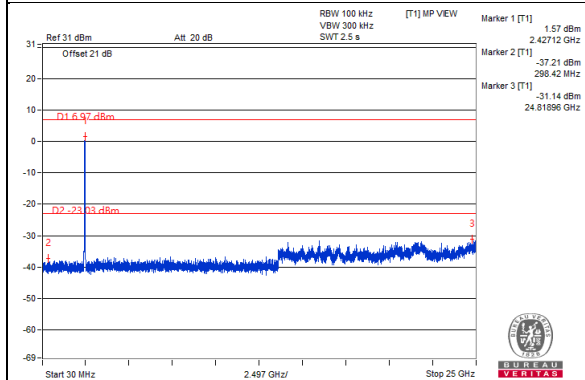


CH 6

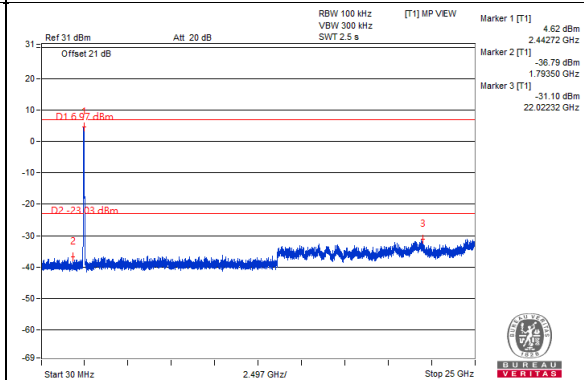


CH 9

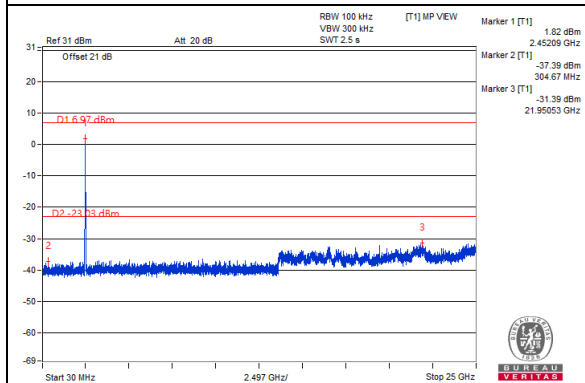

CH 3 Band edge

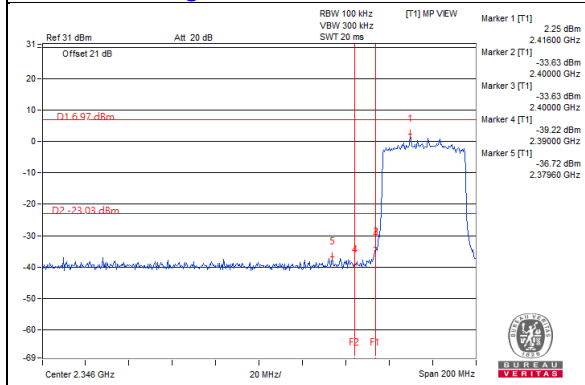

CH 9 Band edge

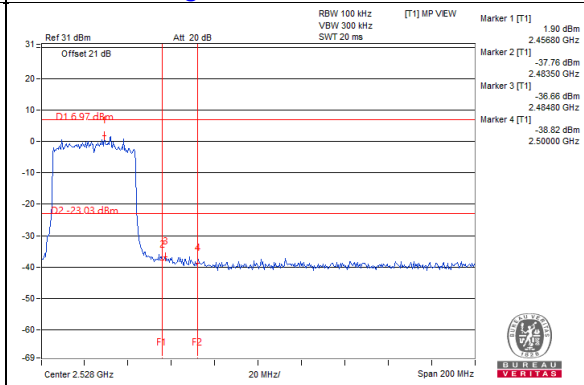


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Band-Edge Measurement


802.11b

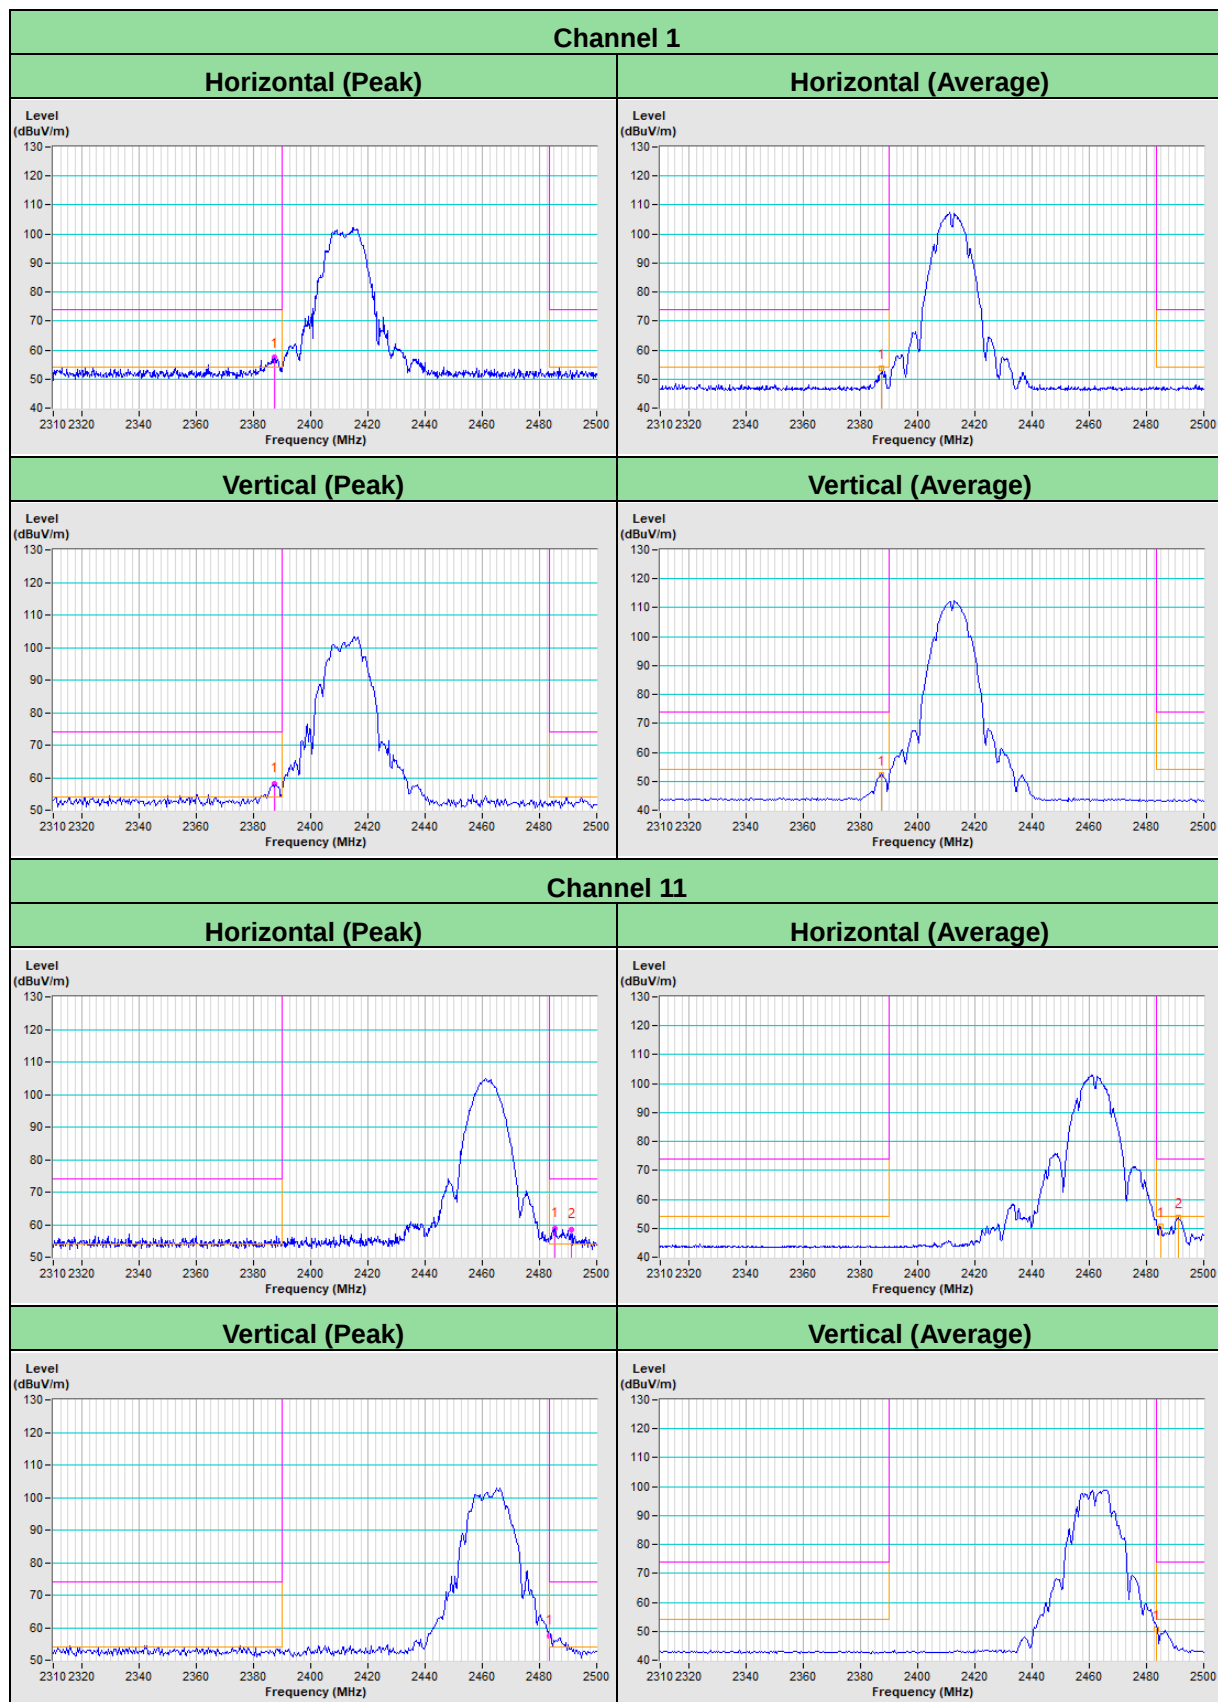


802.11g

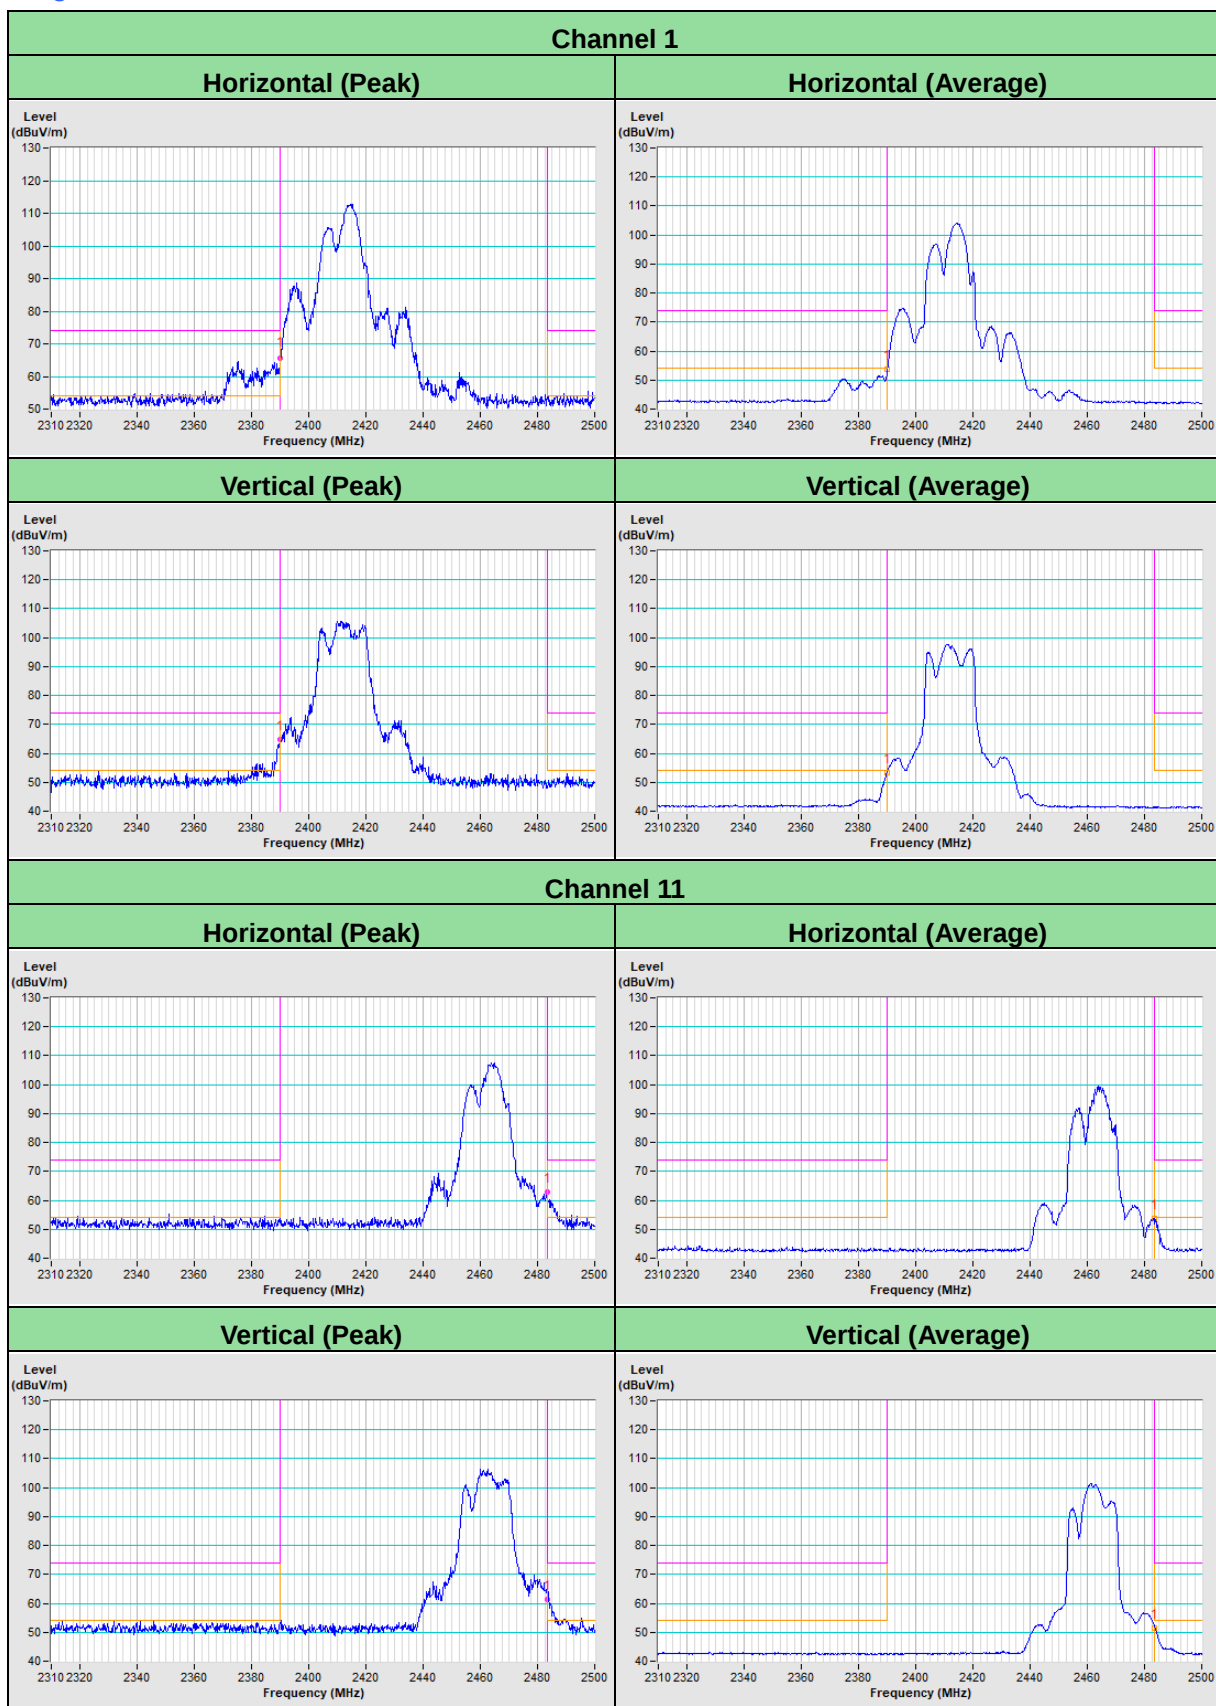

802.11ax (HE20)

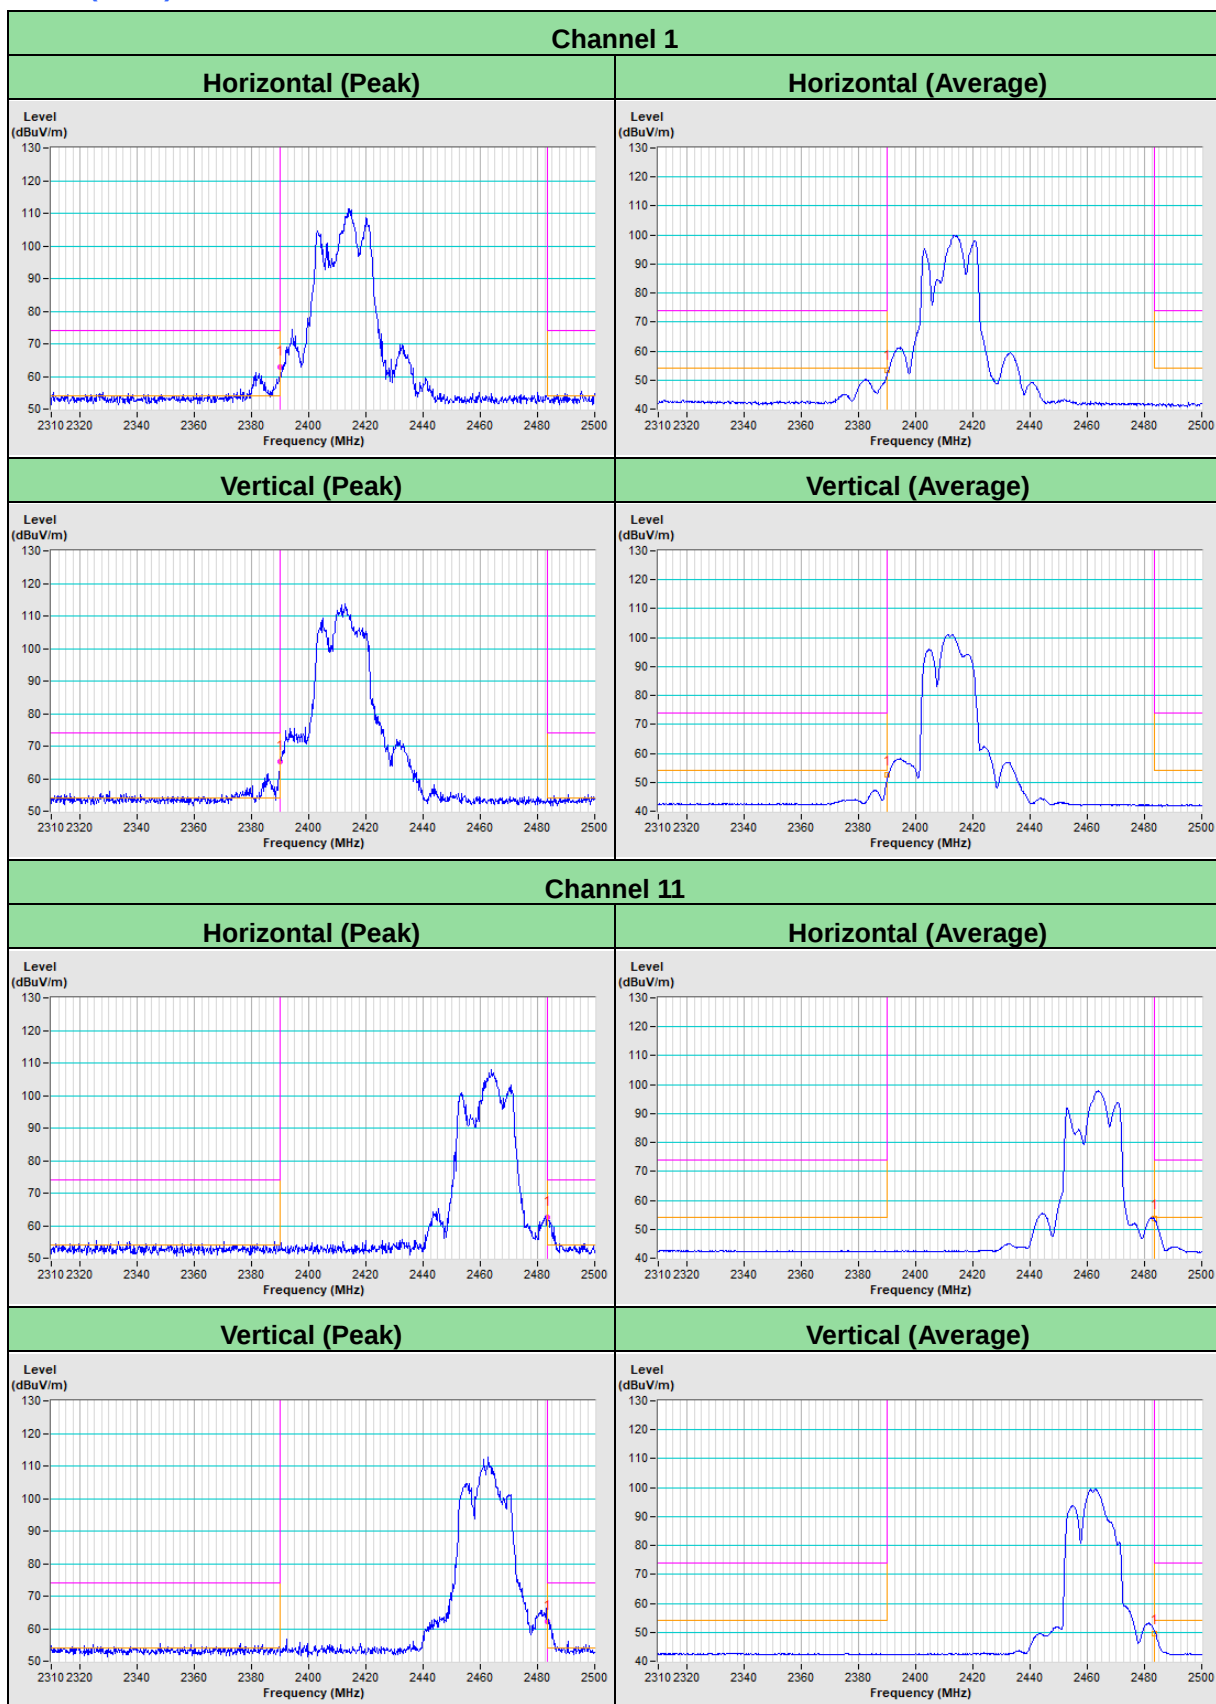

802.11ax (HE40)

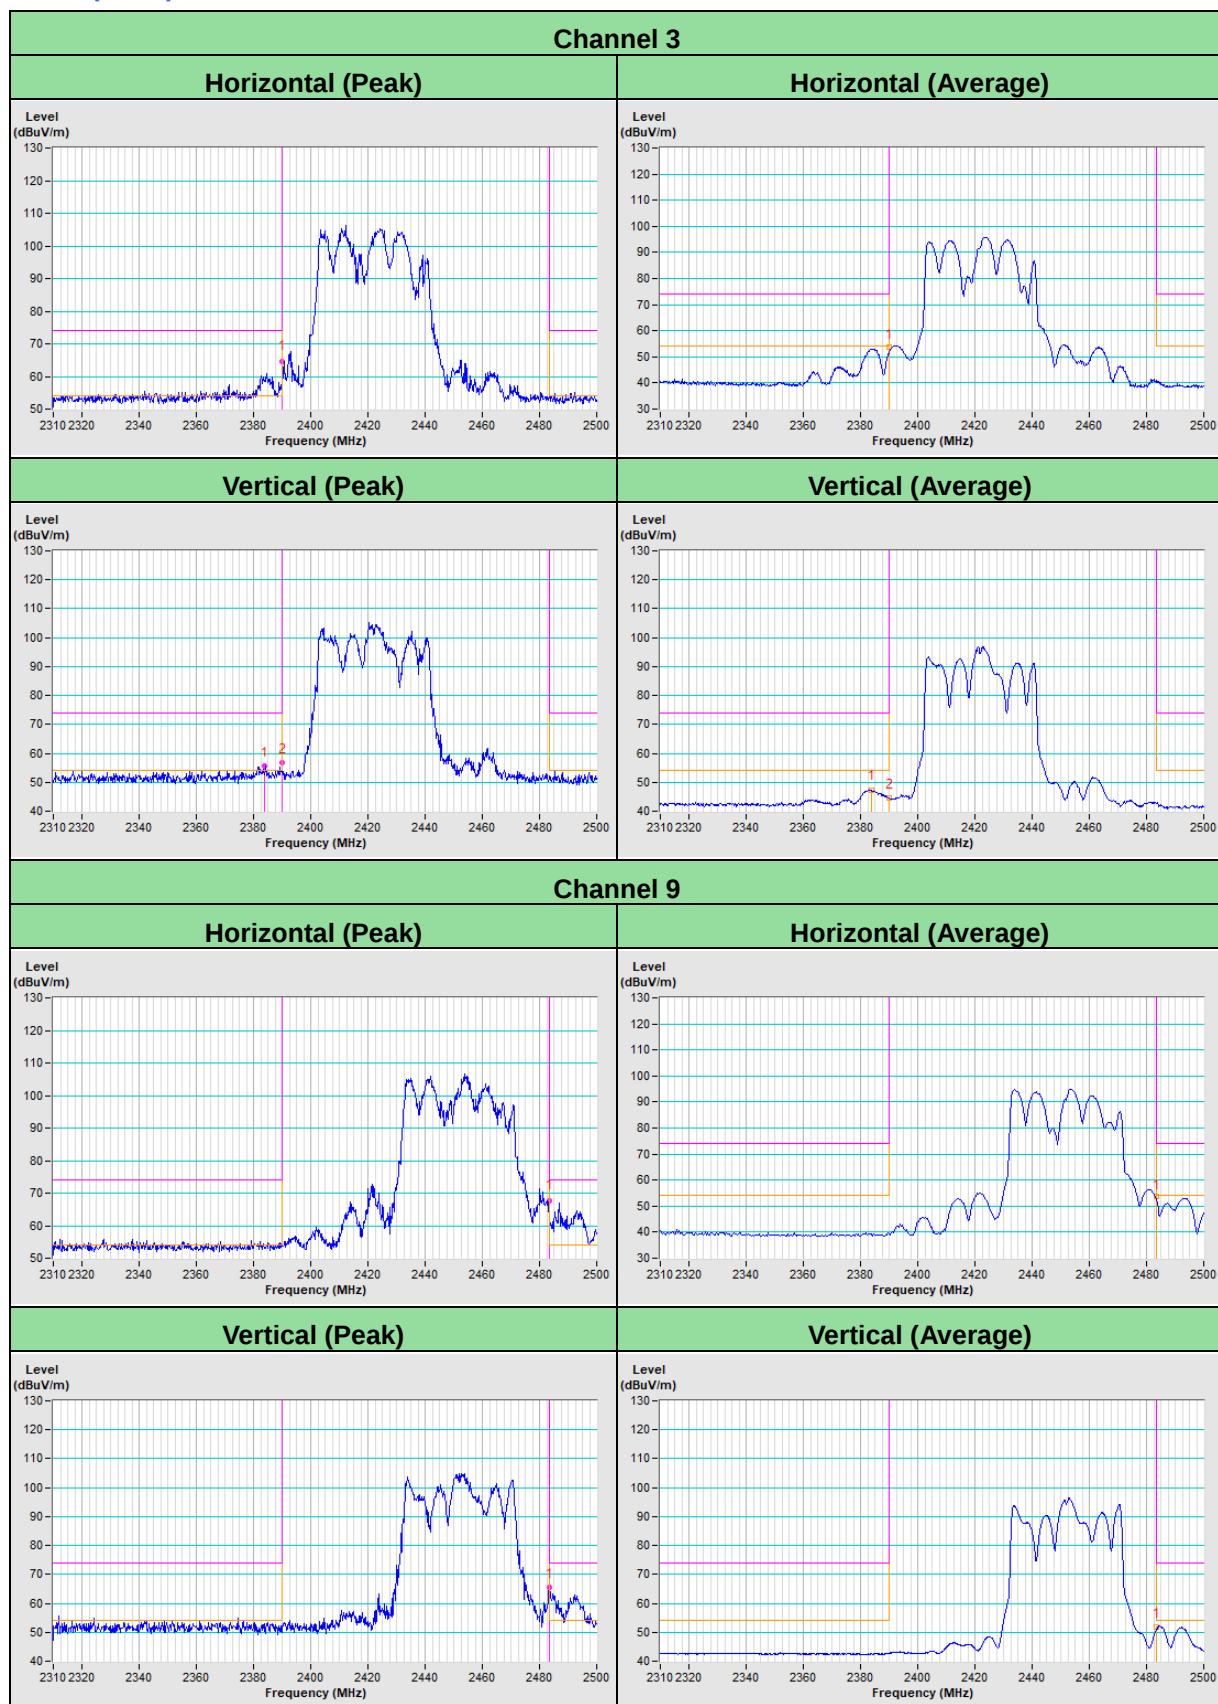

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---