





FCC Co-Location Test Report

FCC ID : P27RP582B

Equipment : WiFi 6 Tri-Band Router

Model No. : RP582B

Brand Name : Sercomm

Applicant : Sercomm Corporation

Address : 8F, No. 3-1, YuanQu St., NanKang, Taipei 115,

Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

Received Date : Jan. 11, 2022

Tested Date : Jan. 27 ~ Feb. 15, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cheld/ Assistant Manager Gary Chang / Manager

Report No.: FR211102CO Page: 1 of 17



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	The Equipment List	
1.3	Test Standards	8
1.4	Reference Guidance	8
1.5	Deviation from Test Standard and Measurement Procedure	8
1.6	Measurement Uncertainty	8
2	TEST CONFIGURATION	9
2.1	Testing Facility	g
2.2	The Worst Test Modes and Channel Details	9
3	TRANSMITTER TEST RESULTS	10
3.1	Unwanted Emissions into Restricted Frequency Bands	10
4	TEST LABORATORY INFORMATION	17



Release Record

Report No.	Version	Description	Issued Date
FR211102CO	Rev. 01	Initial issue	Mar. 11, 2022

Report No.: FR211102CO Page: 3 of 17



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 51.34MHz 36.62 (Margin -3.38dB) - PK	Pass
15.209		(

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR211102CO Page: 4 of 17



1 General Description

1.1 Information

1.1.1 Specification

FCC ID	P27RP582B
Operating Frequency	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz, 5745 ~ 5825 MHz
	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM/OFDMA (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.1.2 Antenna Details

Ant. No.	Model	Туре	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	Ant1	Dipole	I-PEX	2.46	4.31	2.16
2	Ant2	Dipole	I-PEX	3.43	2.63	3.85
3	Ant3	Dipole	I-PEX		3.35	3.4
4	Ant4	Dipole	I-PEX		2.19	3.32
5	Ant5	Dipole	I-PEX		2.62	2.69
6	Ant6	Dipole	I-PEX		4.23	4.11

1.1.3 Radio Details

Radio	Function	
1	2.4 GHz, 2T2R	
2	5.15 GHz ~ 5.25 GHz, 4T4R	
3	5.725 GHz ~ 5.85 GHz, 2T2R	

1.1.4 Power Supply Type of Equipment under Test (EUT)

	Power Supply Type	12Vdc from adapter
--	-------------------	--------------------

Report No.: FR211102CO Page: 5 of 17



1.1.5 Accessories

	Accessories				
No. Equipment Description					
1	Brand: Leader Model: MU24D1120200-A1 Power Rating: I/P: 100-240Vac, 50/60Hz, 0.7A O/P: 12Vdc, 2.0A Line: 1.45m non-shielded w/o core.				
Brand: Acbel Model: WAM003 ID:GMAG Power Rating: I/P: 100-240Vac, 50/60Hz, 0.7A. O/P: 12Vdc, 2.0A, 24W Line: 1.45m non-shielded w/o core.		Model: WAM003 ID:GMAG Power Rating: I/P: 100-240Vac, 50/60Hz, 0.7A. O/P: 12Vdc, 2.0A, 24W			

Report No.: FR211102CO Page: 6 of 17



1.2 The Equipment List

Test Item	Radiated Emission	Radiated Emission				
Test Site	966 chamber1 / (03Cl	966 chamber1 / (03CH01-WS)				
Tested Date	Jan. 27 ~ Jan. 29, 202	22				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until	
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022	
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022	
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022	
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022	
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022	
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023	
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022	
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022	
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022	
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022	
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022	
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022	
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022	
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022	
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022	
Measurement Software	AUDIX	e3	6.120210g	NA	NA	
Note: Calibration Inter	rval of instruments liste	d above is one year.				

Test Item	RF Conducted				
Test Site	(TH01-WS)	TH01-WS)			
Tested Date	Feb. 15, 2022	eb. 15, 2022			
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Note: Calibration Interval of instruments listed above is one year.					

Report No.: FR211102CO Page: 7 of 17



1.3 Test Standards

47 CFR FCC Part 15.247 47 CFR FCC Part 15.407 ANSI C63.10-2013

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Parameters	Uncertainty	
Radiated emission ≤ 1GHz	±3.41 dB	
Radiated emission > 1GHz	±4.59 dB	

Report No.: FR211102CO Page: 8 of 17



2 Test Configuration

2.1 Testing Facility

Test Laboratory International Certification Corporation			
Test Site 03CH01-WS, TH01-WS			
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)		

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Test Mode	
Radiated Emissions	2.4G 11B CH6 (Radio 1)+ 5G 11ax20 CH40 (Radio 2)+ 5G 11ax20 CH165 (Radio 3)	

Note

1. The selected channel is the maximum power channel of each Wi-Fi module.

2. Two adapters (Leader and Acbel) had been covered during the pretest, and found that Leader was the worst case and was selected for final test.

Report No.: FR211102CO Page: 9 of 17



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR211102CO Page: 10 of 17




3.1.3 Test Setup

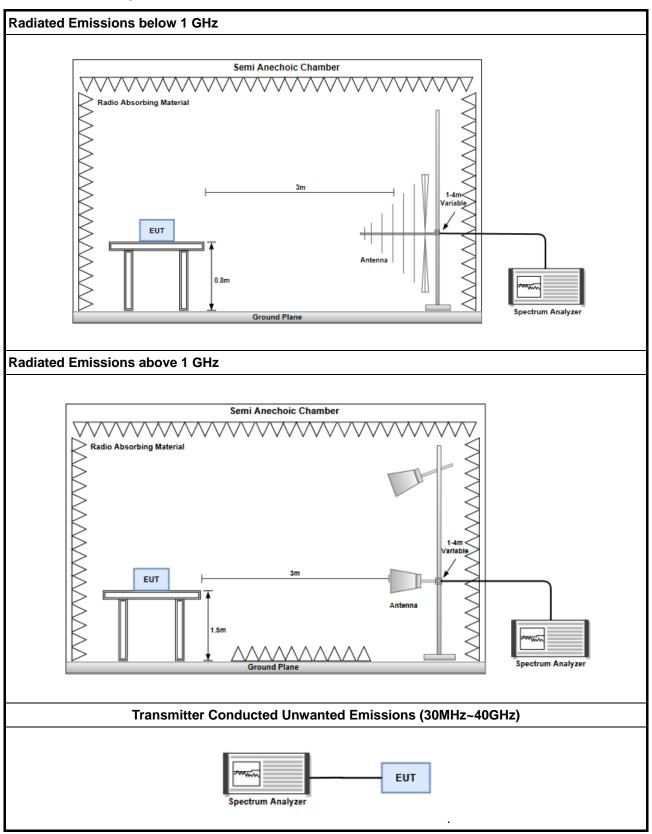

Report No.: FR211102CO Page: 11 of 17



3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

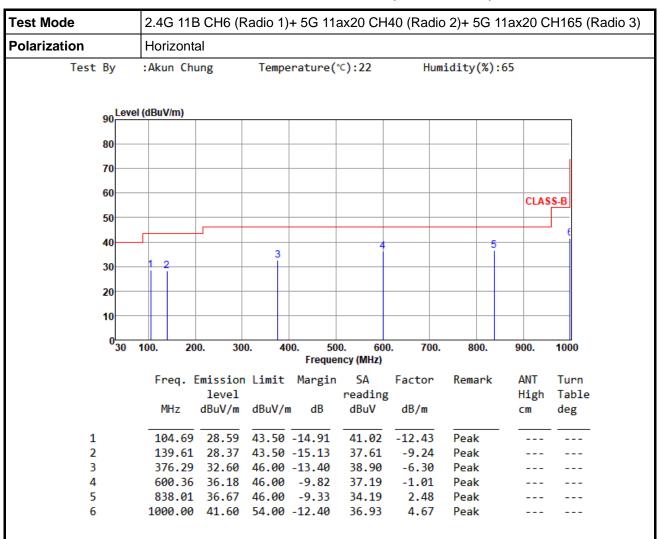

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR211102CO Page: 12 of 17



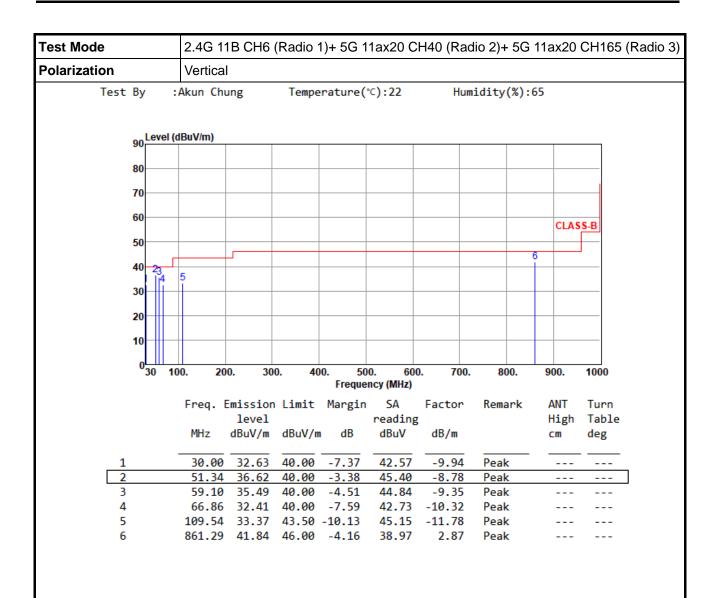

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR211102CO Page: 13 of 17



3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

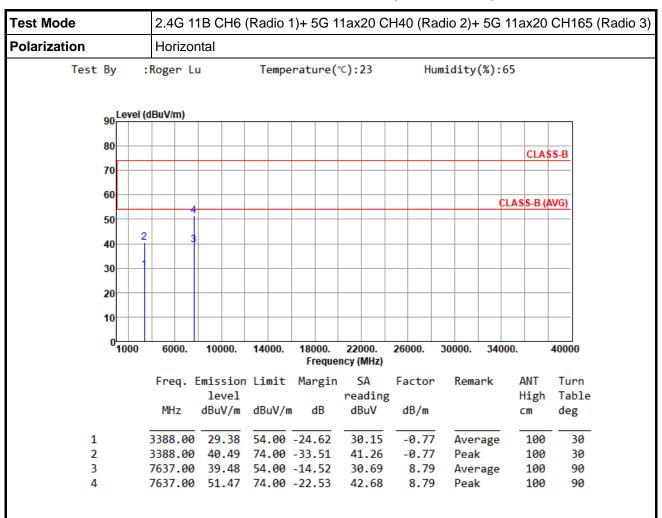


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR211102CO Page: 14 of 17



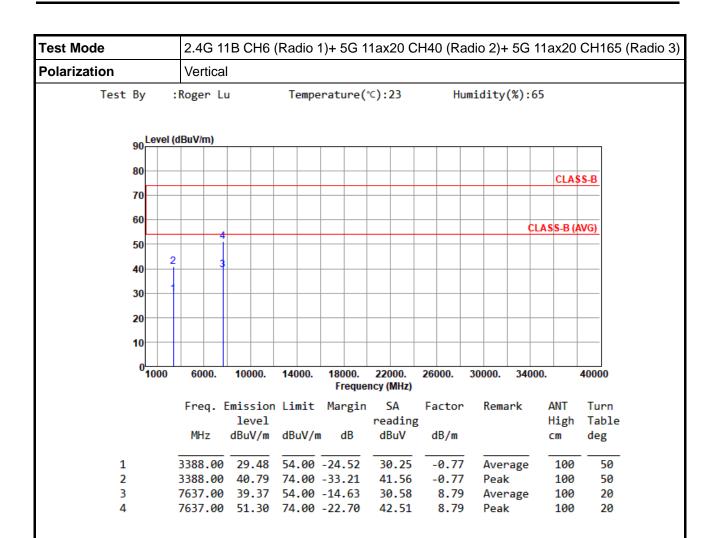

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).


Report No.: FR211102CO Page: 15 of 17



3.1.6 Conducted Emissions (30MHz~40GHz)

Ambient Condition	22°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

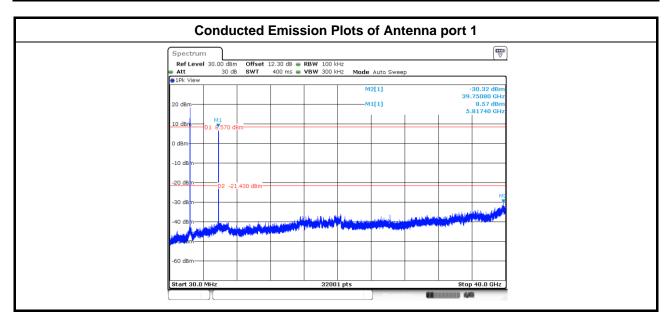

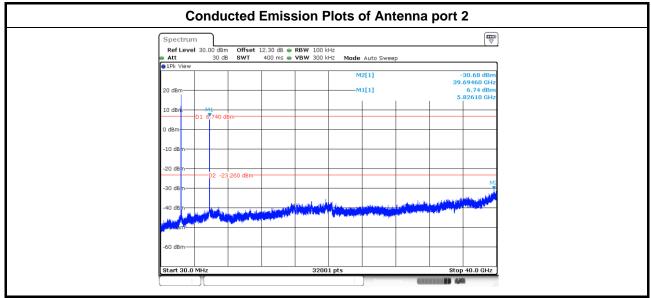

Report No.: FR211102CO Page: 16 of 17



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0345

Email: ICC Service@icertifi.com.tw

==END==

Report No.: FR211102CO Page: 17 of 17