





11.3. APPENDIX C: MIN EMISSION BANDWIDTH

11.3.1. Test Result

Test Mode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.320	5711.840	5728.160		
		5720_UNII-2C	13.16	5711.840	5725		
		5720_UNII-3	3.16	5725	5728.160	≥0.5	PASS
		5745	16.320	5736.840	5753.160	≥0.5	PASS
		5785	16.320	5776.840	5793.160	≥0.5	PASS
		5825	16.280	5816.800	5833.080	≥0.5	PASS
	Ant1	5720	17.640	5711.160	5728.800		
11N20SISO		5720_UNII-2C	13.84	5711.160	5725		
		5720_UNII-3	3.8	5725	5728.800	≥0.5	PASS
		5745	17.560	5736.160	5753.720	≥0.5	PASS
		5785	17.280	5776.200	5793.480	≥0.5	PASS
		5825	17.520	5816.280	5833.800	≥0.5	PASS
11N40SISO	Ant1	5710	36.080	5692.080	5728.160		
		5710_UNII-2C	32.92	5692.080	5725		
		5710_UNII-3	3.16	5725	5728.160	≥0.5	PASS
		5755	35.680	5737.160	5772.840	≥0.5	PASS
		5795	35.440	5777.160	5812.600	≥0.5	PASS
	Ant1	5690	75.200	5652.400	5727.600		
11AC80SISO		5690_UNII-2C	72.6	5652.400	5725		
		5690_UNII-3	2.6	5725	5727.600	≥0.5	PASS
		5775	75.200	5737.400	5812.600	≥0.5	PASS



11.3.2. Test Graphs



UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.



















11.4. APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER 11.4.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	Verdict
11A		5180	12.27	≤23.98	PASS
		5200	12.73	≤23.98	PASS
		5240	13.35	≤23.98	PASS
		5260	13.52	≤23.98	PASS
		5280	13.33	≤23.98	PASS
		5320	13.08	≤23.98	PASS
	A	5500	13.68	≤23.98	PASS
	Ant1	5580	14.28	≤23.98	PASS
		5700	13.66	≤23.98	PASS
		5720_UNII-2C	13.27	≤22.93	PASS
		5720_UNII-3	5.64	≤30.00	PASS
		5745	13.51	≤30.00	PASS
		5785	13.47	≤30.00	PASS
		5825	13.57	≤30.00	PASS
		5180	13.92	≤23.98	PASS
		5200	14.08	≤23.98	PASS
		5240	14.34	≤23.98	PASS
		5260	13.98	≤23.98	PASS
		5280	13.94	≤23.98	PASS
		5320	13.89	≤23.98	PASS
11N20SISO	Ant1	5500	13.00	≤23.98	PASS
111203130	Anti	5580	12.07	≤23.98	PASS
		5700	12.47	≤23.98	PASS
		5720_UNII-2C	12.46	≤22.88	PASS
		5720_UNII-3	5.68	≤30.00	PASS
		5745	13.75	≤30.00	PASS
		5785	13.65	≤30.00	PASS
		5825	13.88	≤30.00	PASS
11N40SISO	Ant1	5190	12.95	≤23.98	PASS
		5230	13.14	≤23.98	PASS
		5270	12.94	≤23.98	PASS
		5310	12.67	≤23.98	PASS
		5510	11.90	≤23.98	PASS
		5550	12.14	≤23.98	PASS
		5670	12.03	≤23.98	PASS
		5710_UNII-2C	11.87	≤23.98	PASS
		5710_UNII-3	-0.70	≤30.00	PASS
		5755	11.65	≤30.00	PASS
		5795	11.92	≤30.00	PASS
	Ant1	5210	11.75	≤23.98	PASS
11AC80SISO		5290	12.25	≤23.98	PASS
		5530	11.45	≤23.98	PASS
		5610	11.93	≤23.98	PASS
		5690_UNII-2C	11.34	≤23.98	PASS
		5690_UNII-3	-7.97	≤30.00	PASS
		5775	11.13	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.1) had already compensated to the test data.




11.4.2. Test Graphs

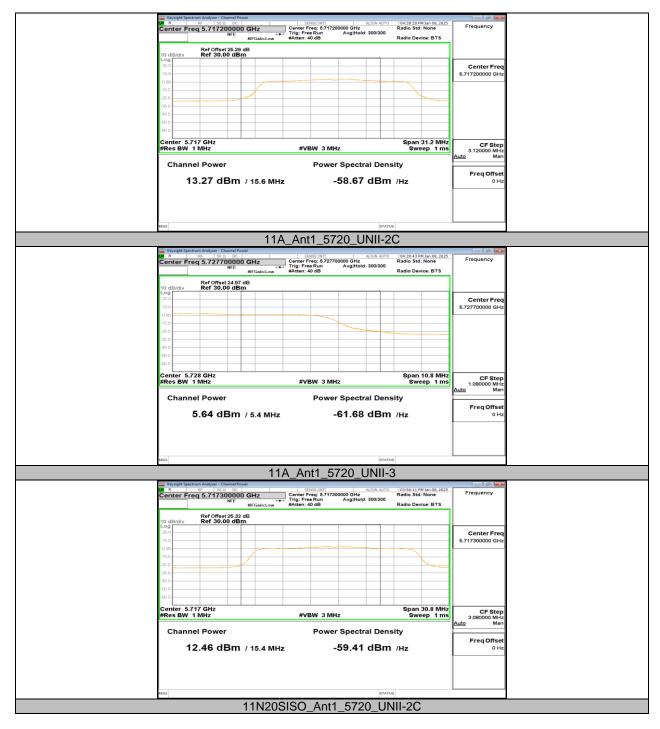


UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.



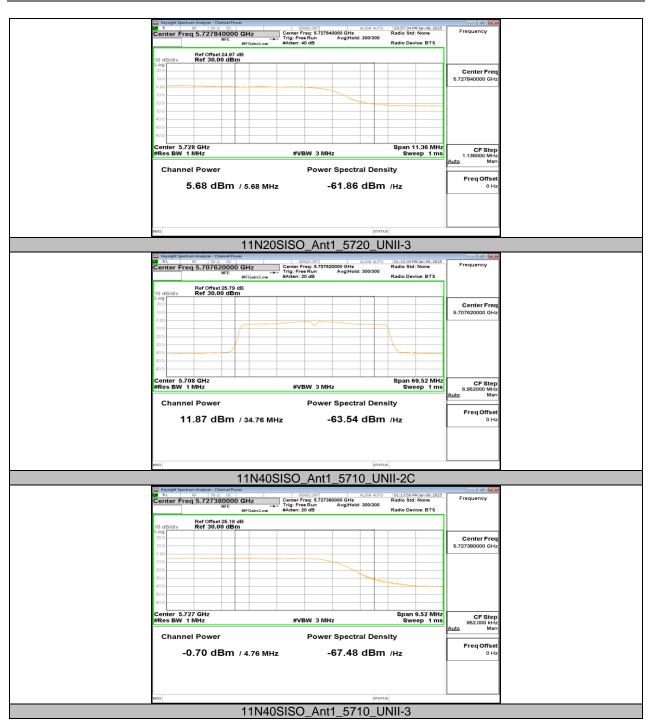



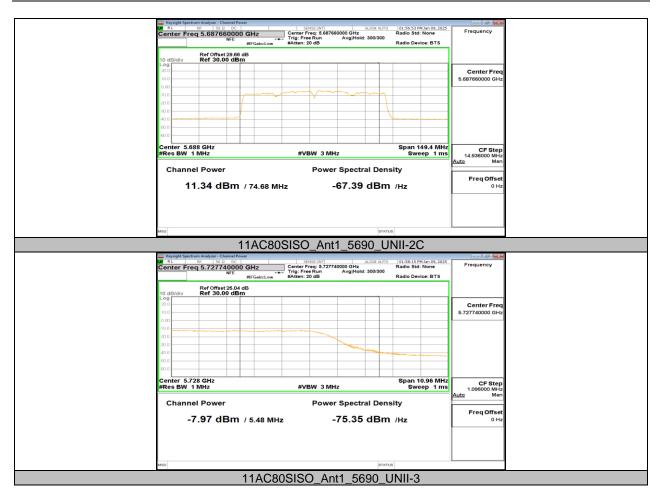




11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY 11.5.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	Verdict
		5180	2.26	≤11.00	PASS
		5200	2.94	≤11.00	PASS
	Ant1	5240	3.05	≤11.00	PASS
		5260	3.43	≤11.00	PASS
		5280	3.54	≤11.00	PASS
		5320	3.11	≤11.00	PASS
44.5		5500	3.81	≤11.00	PASS
11A		5580	4.39	≤11.00	PASS
		5700	3.81	≤11.00	PASS
		5720_UNII-2C	4.10	≤11.00	PASS
		5720_UNII-3	0.10	≤30.00	PASS
		5745	1.34	≤30.00	PASS
		5785	0.00	≤30.00	PASS
		5825	0.24	≤30.00	PASS
		5180	3.65	≤11.00	PASS
		5200	3.50	≤11.00	PASS
		5240	3.97	≤11.00	PASS
		5260	3.77	≤11.00	PASS
		5280	3.72	≤11.00	PASS
		5320	3.95	≤11.00	PASS
11N20SISO	Ant1	5500	2.52	≤11.00	PASS
1111205150		5580	2.23	≤11.00	PASS
		5700	2.46	≤11.00	PASS
		5720_UNII-2C	3.96	≤11.00	PASS
		5720_UNII-3	-0.53	≤30.00	PASS
		5745	0.89	≤30.00	PASS
		5785	0.75	≤30.00	PASS
		5825	-0.21	≤30.00	PASS
		5190	-0.32	≤11.00	PASS
	Ant1	5230	0.02	≤11.00	PASS
11N40SISO		5270	-0.08	≤11.00	PASS
		5310	-0.58	≤11.00	PASS
		5510	-1.43	≤11.00	PASS
		5550	-0.85	≤11.00	PASS
		5670	-1.15	≤11.00	PASS
		5710_UNII-2C	-1.53	≤11.00	PASS
		5710_UNII-3	-8.16	≤30.00	PASS
		5755	-3.32	≤30.00	PASS
		5795	-3.26 ≤3	≤30.00	PASS
	Ant1	5210	-4.24	≤11.00	PASS
		5290	-2.95	≤11.00	PASS
		5530	-4.22	≤11.00	PASS
11AC80SISO		5610	-3.88	≤11.00	PASS
		5690_UNII-2C	-2.36	≤11.00	PASS
		5690_UNII-3	-9.22	≤30.00	PASS
		5775	-7.36	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz. 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.



11.5.2. Test Graphs

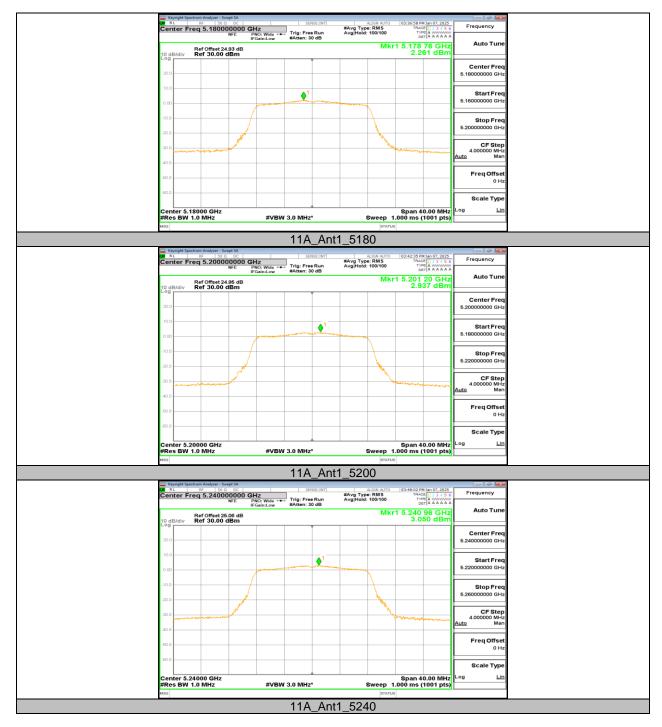

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.



