


Prüfbericht-Nr.: <i>Test Report No.:</i>	17056805 001	Auftrags-Nr.: <i>Order No.:</i>	164052855	Seite 1 von 71 <i>Page 1 of 71</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	07.01.2016	
Auftraggeber: <i>Client:</i>	Country Mate Technology Ltd 5/F., Block E, Hing Yip Centre 31 Hing Yip St., Kwun Tong, Kln., H.K.			
Prüfgegenstand: <i>Test item:</i>	Bluetooth Earpods			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	NS-CAHBT02-BK, NS-CAHBT02-BL, NS-CAHBT02-BK-C, NS-CAHBT02-BL-C			
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart B Section 15.109 RSS-247 Issue 1 May 2015 ICES-003 Issue 6 January 2016 CFR47 FCC Part 15: Subpart B Section 15.107 FCC KDB Publication 447498 D01 v06 RSS-Gen Issue 4 November 2014 RSS-102 Issue 5 March 2015			
Wareneingangsdatum: <i>Date of receipt:</i>	12.01.2016			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000307233-005, A000307233-006			
Prüfzeitraum: <i>Testing period:</i>	14.01.2016 - 16.01.2016			
Ort der Prüfung: <i>Place of testing:</i>	Accurate Technology Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
11.03.2016 Owen Tian/Senior Project Manager 		11.03.2016 Sam Lin/Technical Certifier 		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
				5 = mangelhaft N/T = nicht getestet
				5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 PEAK OUTPUT POWER***RESULT: Pass***5.1.3 20dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.4 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHz BANDWIDTH***RESULT: Pass***5.1.5 SPURIOUS EMISSION***RESULT: Pass***5.1.6 FREQUENCY SEPARATION***RESULT: Pass***5.1.7 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.8 TIME OF OCCUPANCY***RESULT: Pass***5.1.9 CONDUCTED EMISSIONS***RESULT: Pass***5.1.10 RADIATED EMISSION***RESULT: Pass***1.1.1 ELECTROMAGNETIC FIELDS***RESULT: Pass*

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	Antenna Requirement	14
5.1.2	Peak Output Power	15
5.1.3	20dB Bandwidth and 99% Bandwidth.....	16
5.1.4	Conducted Spurious Emissions measured in 100kHz Bandwidth.....	17
5.1.5	Spurious Emission	24
5.1.6	Frequency Separation.....	56
5.1.7	Number of hopping frequency.....	57
5.1.8	Time of Occupancy	58
5.1.9	Conducted emissions.....	59
5.1.10	Radiated Emission.....	62
1.	SAFETY HUMAN EXPOSURE	67
1.1	RADIO FREQUENCY EXPOSURE COMPLIANCE.....	67
1.1.1	Electromagnetic Fields.....	67
2.	PHOTOGRAPHS OF THE TEST SET-UP	68

Prüfbericht - Nr.: 17056805 001
*Test Report No.***Seite 4 von 71**
Page 4 of 71

3.	LIST OF TABLES	71
4.	LIST OF PHOTOGRAPHS	71

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Accurate Technology Co., Ltd.

(FCC Registration No.: 752051)

(Test site Industry Canada No.: 5077A-2)

F1, Bldg. A, Changyuan New Material Port
Keyuan Rd., Science & Industry Park, Nanshan
Shenzhen, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2017-01-09
Test Receiver	Rohde & Schwarz	ESCS30	100307	2017-01-09
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2017-01-09
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2017-01-09
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2017-01-09
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	2017-01-09
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	2017-01-09
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	2017-01-09
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	2017-01-09
RF Coaxial Cable	SUHNER	N-3m	No.8	2017-01-09
RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	2017-01-09
RF Coaxial Cable	SUHNER	N-6m	No.10	2017-01-09
RF Coaxial Cable	RESENBERGER	N-12m	No.11	2017-01-09
RF Coaxial Cable	RESENBERGER	N-0.5m	No.12	2017-01-09
Radio Spectrum Test				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2017-01-09
Vector Signal Generator	Rohde & Schwarz	SMBV100A	260434	2017-01-09
Signal Generator	Rohde & Schwarz	SMB100A	108362	2017-01-09
Open Switch and Control Unit	Rohde & Schwarz	OSP120 + OSP-B157	101244 + 100866	2017-01-09

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Spectrum	$< \pm 0.60 \text{ dB}$
Radiated emission of transmitter, valid up to 26.5 GHz	$< \pm 4.42 \text{ dB}$
Conducted Emission	$< \pm 2.23 \text{ dB}$
Radiated Emission	$< \pm 4.42 \text{ dB}$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are Bluetooth earphone used for audio entertainment in house or similar environment. It operates at 2.4GHz ISM frequency band.
 These models are identical except the model name.
 For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of Bluetooth (BDR & EDR mode)

Technical Specification	Value
Kind of Equipment	Bluetooth Earpods
Type Designation	NS-CAHBT02-BK, NS-CAHBT02-BL, NS-CAHBT02-BK-C, NS-CAHBT02-BL-C
FCC ID	MV3-CAHBT02
IC	9029A-CAHBT02
Operating Frequency band	2402 – 2480MHz
Channel separation	1MHz
Extreme Temperature Range	-5~+50°C
Operation Voltage	DC 3.7V
Modulation	FHSS, GFSK, 8DPSK, $\pi/4$ DQPSK
Bluetooth version	4.1, Single Mode (BDR+EDR)
Antenna Gain	-1.2dBi

Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	21	2423.00	42	2444.00	63	2465.00
1	2403.00	22	2424.00	43	2445.00	64	2466.00
2	2404.00	23	2425.00	44	2446.00	65	2467.00
3	2405.00	24	2426.00	45	2447.00	66	2468.00
4	2406.00	25	2427.00	46	2448.00	67	2469.00
5	2407.00	26	2428.00	47	2449.00	68	2470.00
6	2408.00	27	2429.00	48	2450.00	69	2471.00
7	2409.00	28	2430.00	49	2451.00	70	2472.00
8	2410.00	29	2431.00	50	2452.00	71	2473.00
9	2411.00	30	2432.00	51	2453.00	72	2474.00
10	2412.00	31	2433.00	52	2454.00	73	2475.00

Prüfbericht - Nr.: 17056805 001

Test Report No.

Seite 9 von 71

Page 9 of 71

11	2413.00	32	2434.00	53	2455.00	74	2476.00
12	2414.00	33	2435.00	54	2456.00	75	2477.00
13	2415.00	34	2436.00	55	2457.00	76	2478.00
14	2416.00	35	2437.00	56	2458.00	77	2479.00
15	2417.00	36	2438.00	57	2459.00	78	2480.00
16	2418.00	37	2439.00	58	2460.00		
17	2419.00	38	2440.00	59	2461.00		
18	2420.00	39	2441.00	60	2462.00		
19	2421.00	40	2442.00	61	2463.00		
20	2422.00	41	2443.00	62	2464.00		

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Bluetooth mode (BDR & EDR mode)
 - a. Transmitting
 - i. Low Channel
 - ii. Middle Channel
 - iii. High Channel
 - b. Receiving
- B. Charging only
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|--------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014 & ANSI C63.10: 2013. According to clause 3.1, all tests were applied on model NS-CAHBT02-BK only.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	S/N
iPhone6	Apple	MG4J2 CH/A	F17NTK2QG5MV
Notebook PC	Lenovo	ThinkPad X240	---
Printer	HP	HP laserjet 1015	CNFG030424

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

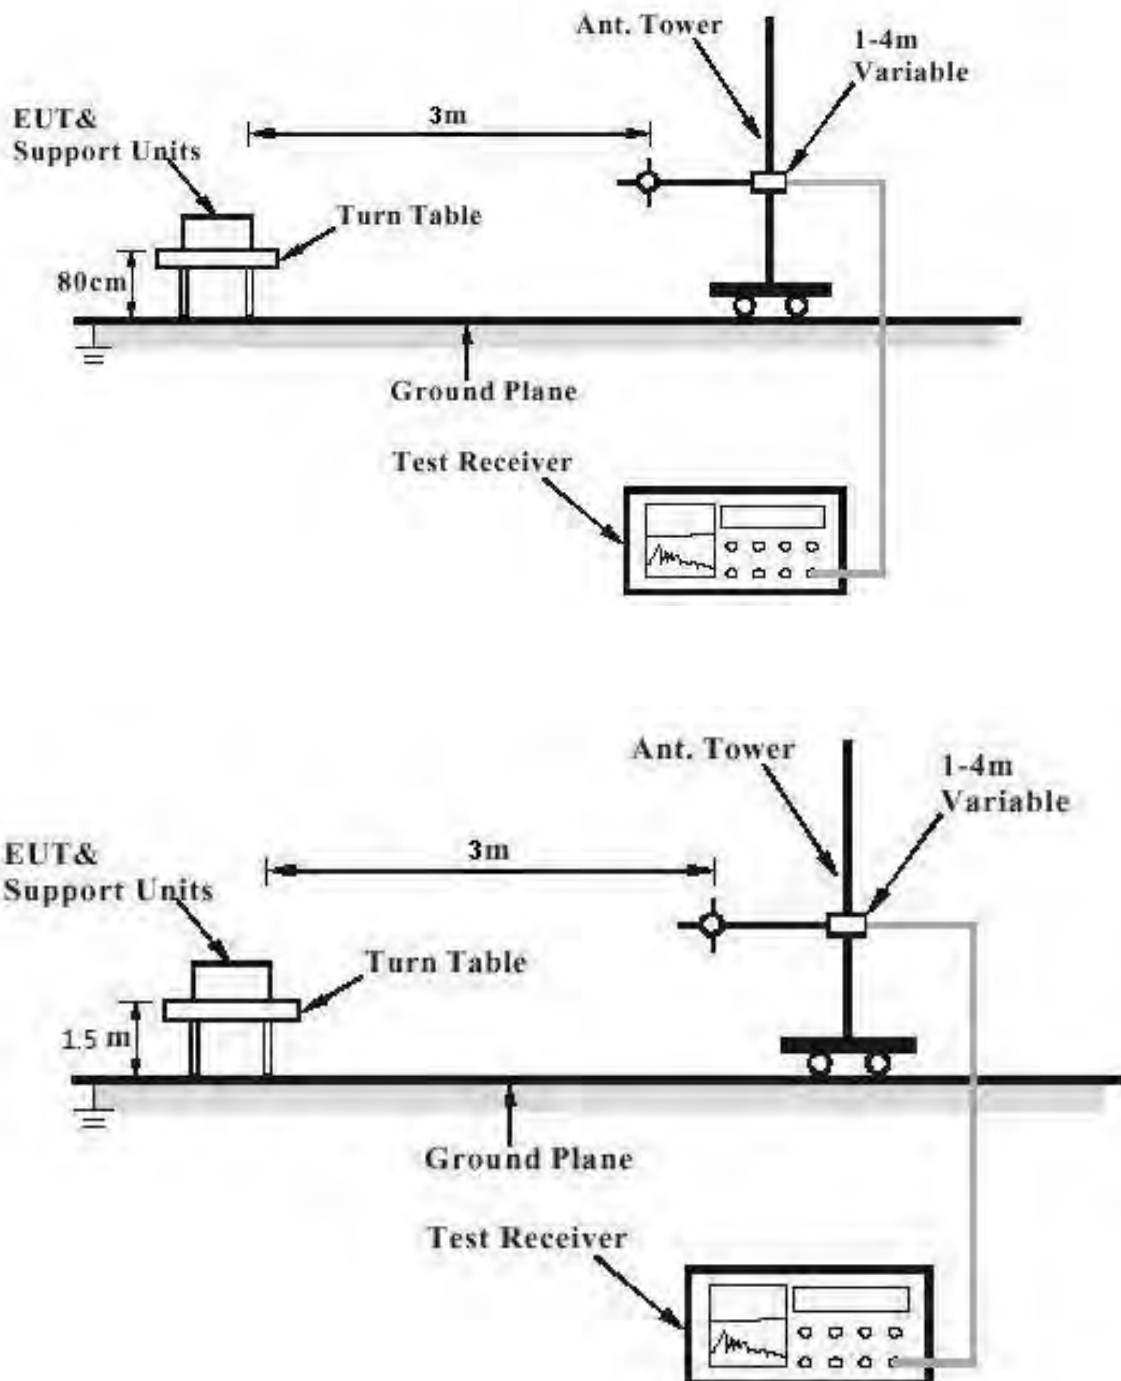


Diagram of Measurement Equipment Configuration for Conduction Measurement


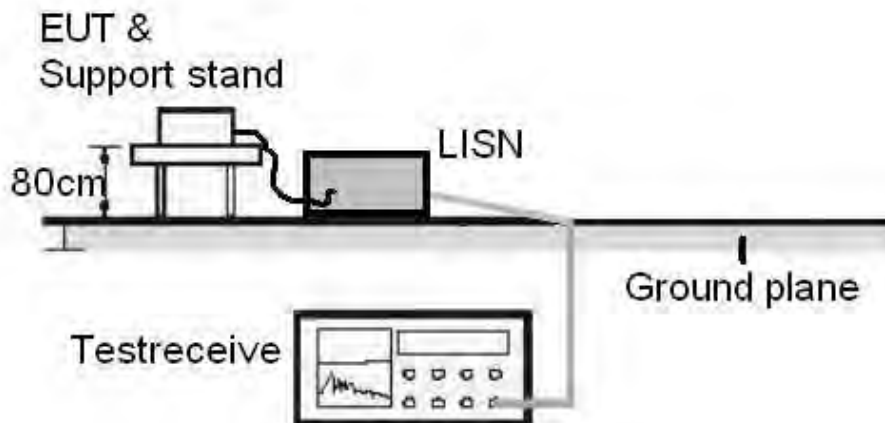


Diagram of Measurement Equipment Configuration for Transmitter Measurement

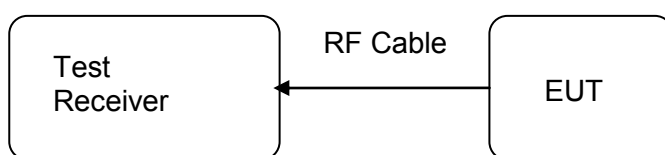

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard	:	Part 15.203 RSS-Gen Clause 8.3
Limit		The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is -1.2dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

5.1.2 Peak Output Power

RESULT:**Pass**

Test date : 2016-01-14
Test standard : FCC Part 15.247(b)(1)
RSS-247 clause 5.4(2)
Basic standard : ANSI C63.10: 2013
Clause 9.1 of KDB 558074 v03r01
Limit : 1W
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 50%
Atmospheric pressure : 101kPa

Table 5: Test result of Peak Output Power of Bluetooth (BDR mode)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	-0.27	30
Middle Channel	2441	-0.33	30
High Channel	2480	-0.28	30

Table 6: Test result of Peak Output Power of Bluetooth (EDR mode)

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	1.03	30
Middle Channel	2441	1.12	30
High Channel	2480	1.10	30

5.1.3 20dB Bandwidth and 99% Bandwidth

RESULT:

Pass

Date of testing	:	2016-01-14
Test standard	:	FCC Part 15.247(a)(1) RSS-247 clause 5.1(2) RSS-Gen clause 6.6
Basic standard	:	ANSI C63.10: 2013 Clause 8 of KDB 558074 v03r01
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa

Table 7: Test result of 20dB & 99% Bandwidth of BDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	0.877	0.946
Mid Channel	2441	0.877	0.946
High Channel	2480	0.877	0.946

Table 8: Test result of 20dB & 99% Bandwidth of EDR mode

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.203	1.190
Mid Channel	2441	1.203	1.190
High Channel	2480	1.203	1.194

Prüfbericht - Nr.: 17056805 001

Test Report No.

Seite 17 von 71

Page 17 of 71

5.1.4 Conducted Spurious Emissions measured in 100kHz Bandwidth**RESULT:****Pass**

Date of testing	:	2016-01-14
Test standard	:	FCC part 15.247(d) RSS-247 clause 5.5
Basic standard	:	ANSI C63.10: 2013
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power);
Kind of test site	:	Shield room


Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa

For details refer to following test plot.


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of BDR mode

Low Channel

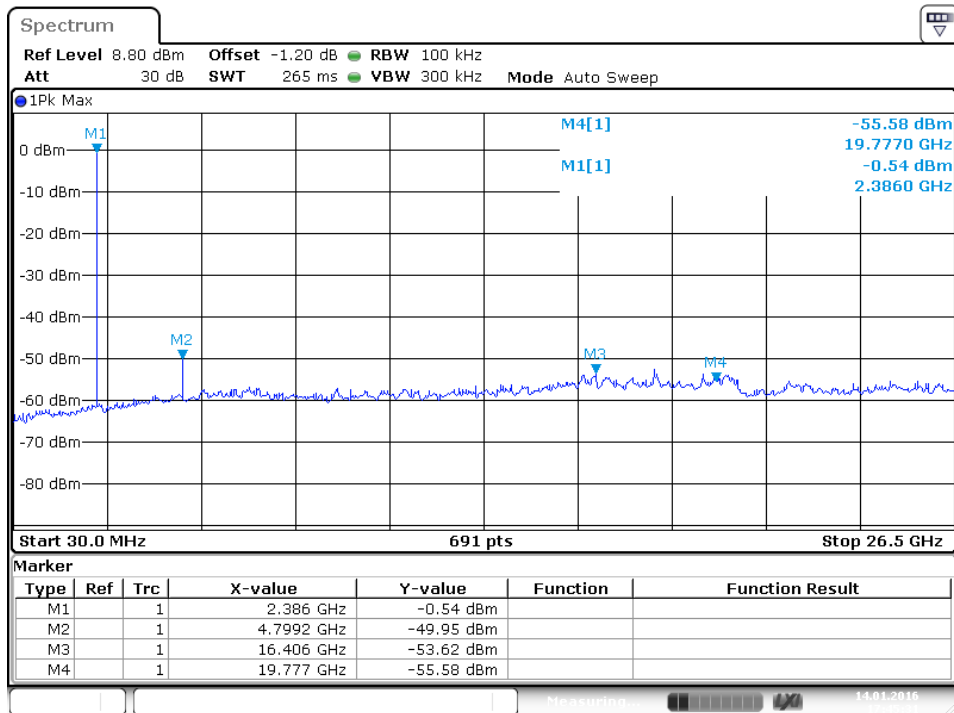


Date: 14.JAN.2016 17:45:31

Middle Channel

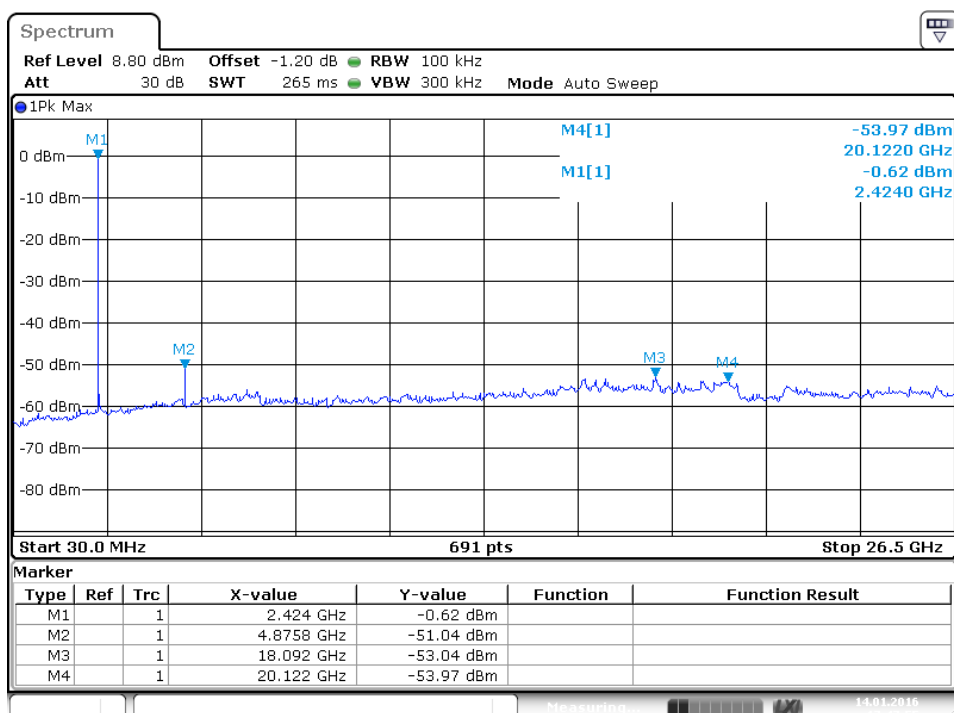


Date: 14.JAN.2016 17:47:56


High Channel

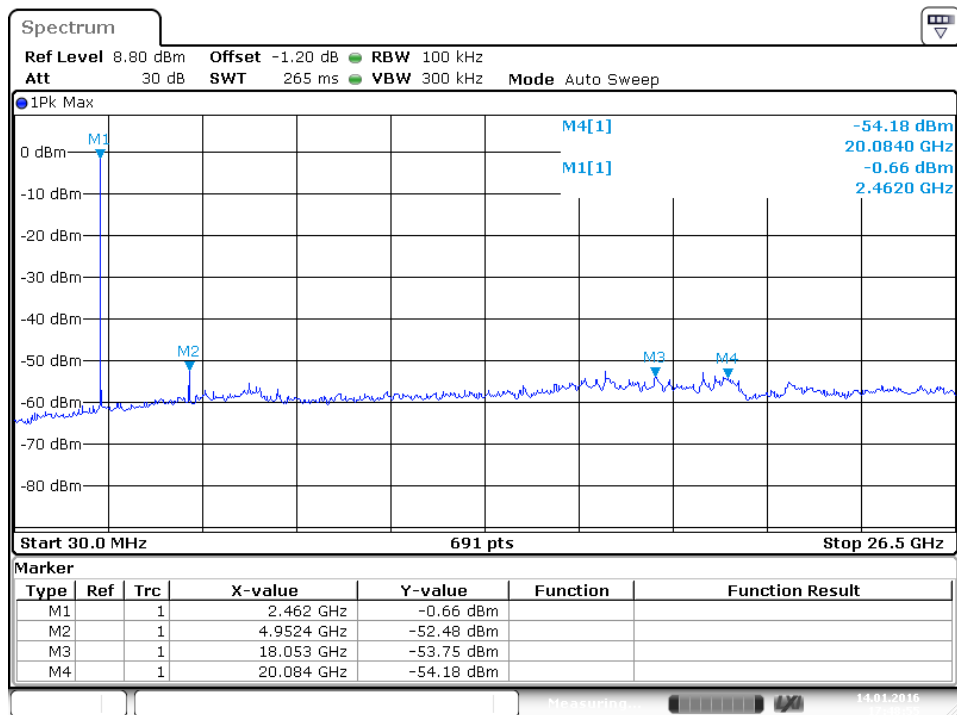

Date: 14.JAN.2016 17:48:56

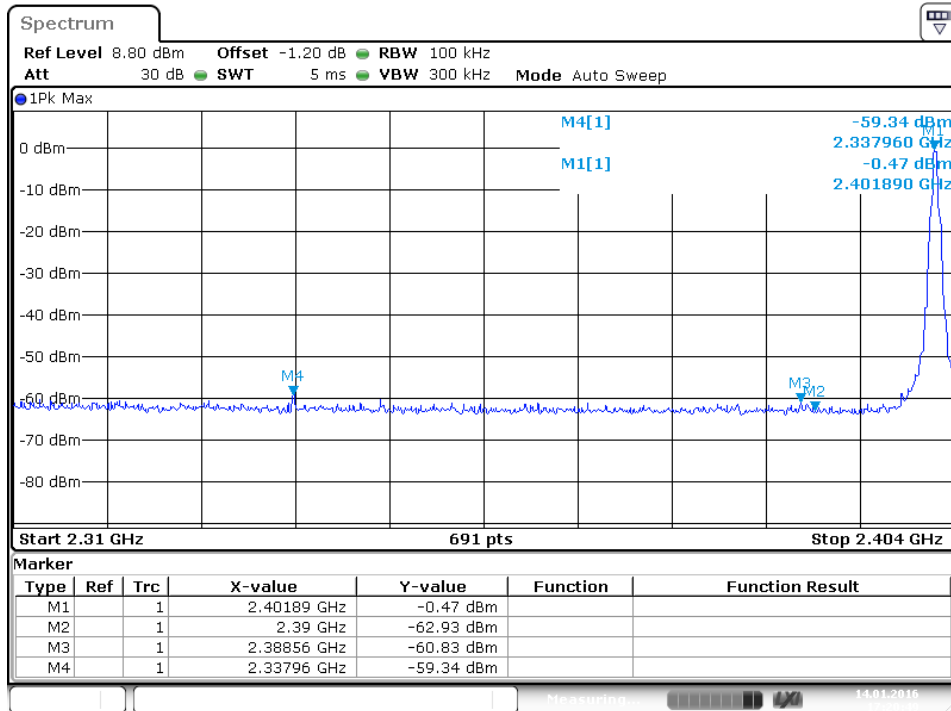Band Edge


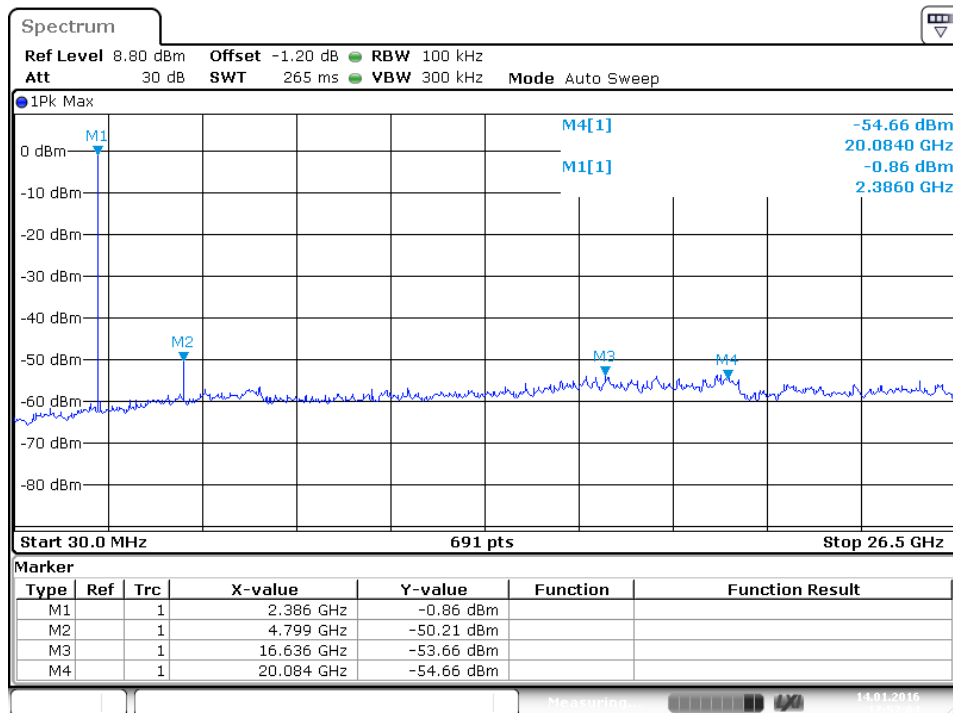
Date: 14.JAN.2016 17:20:50

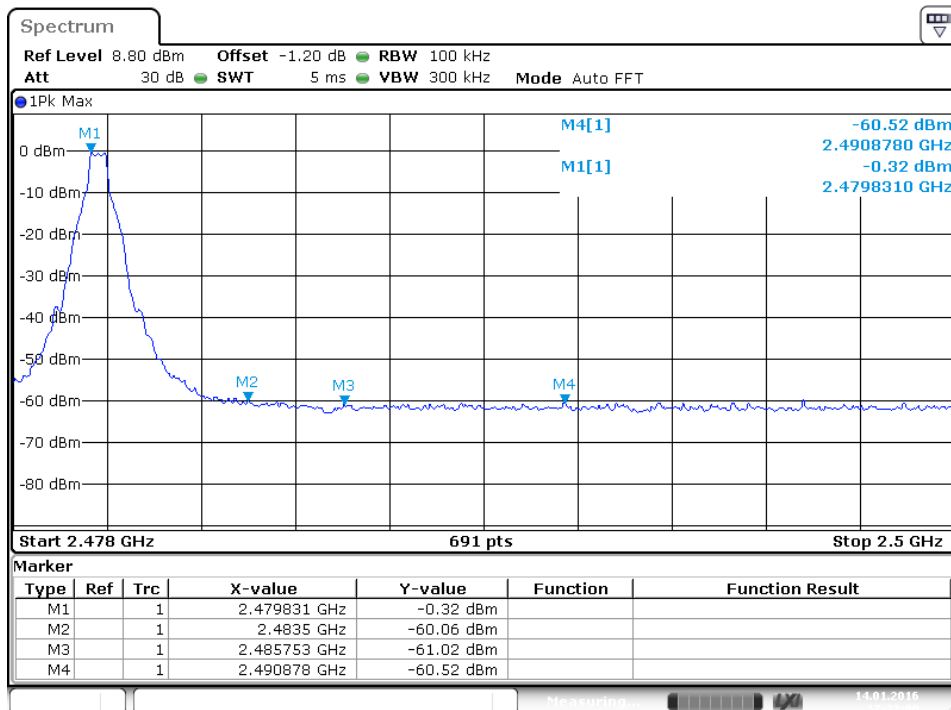

Date: 14.JAN.2016 17:22:00


Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of EDR mode

Low Channel




Date: 14.JAN.2016 17:52:04

Middle Channel

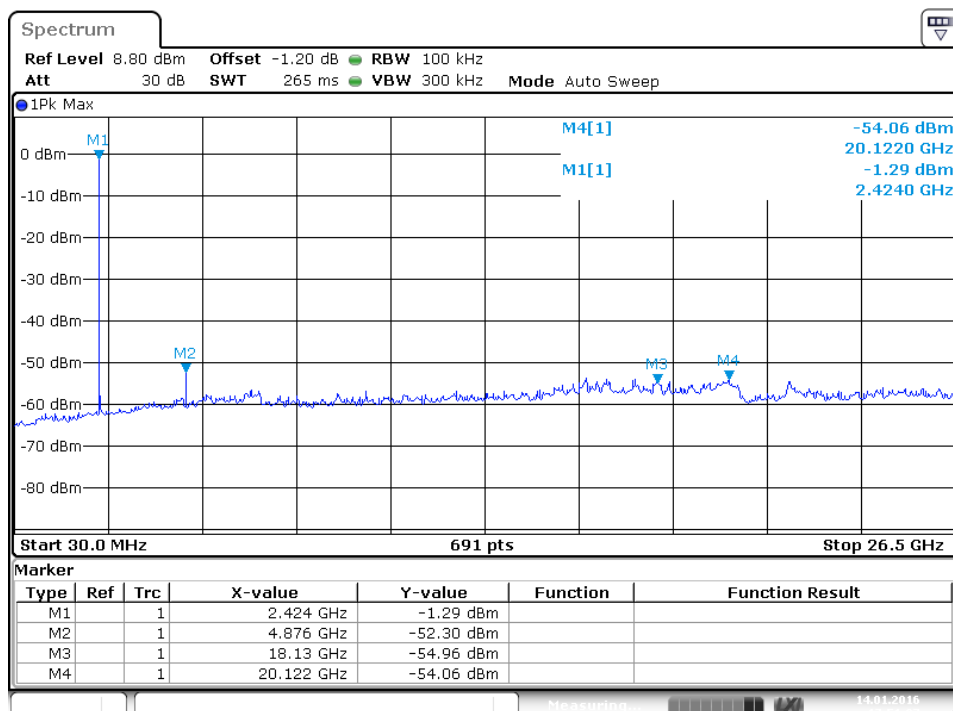


Date: 14.JAN.2016 17:51:08


High Channel

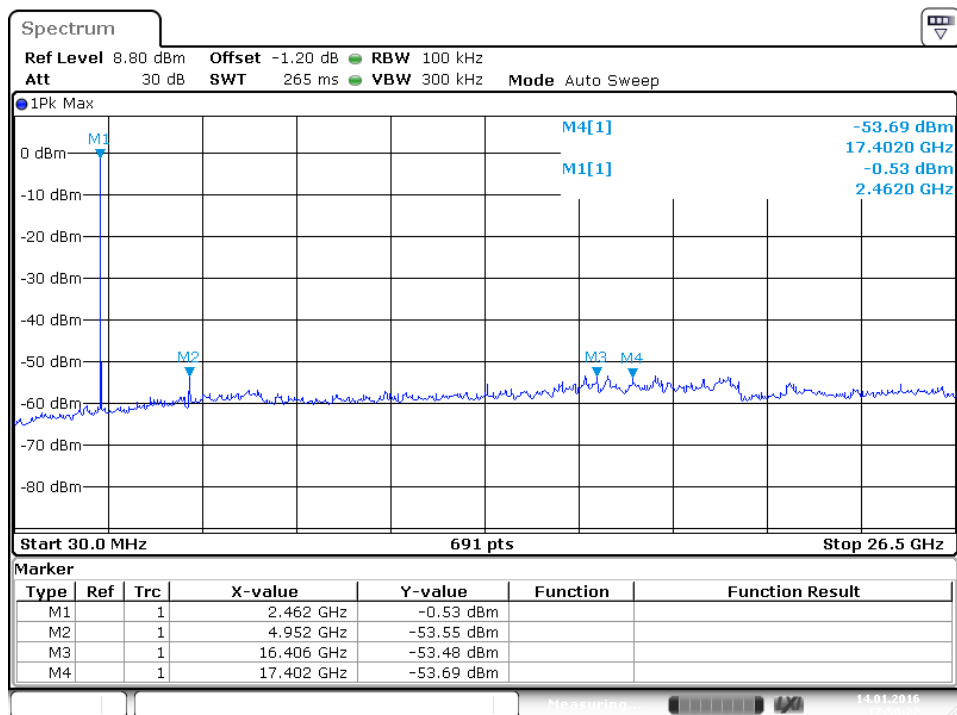

Date: 14.JAN.2016 17:50:23

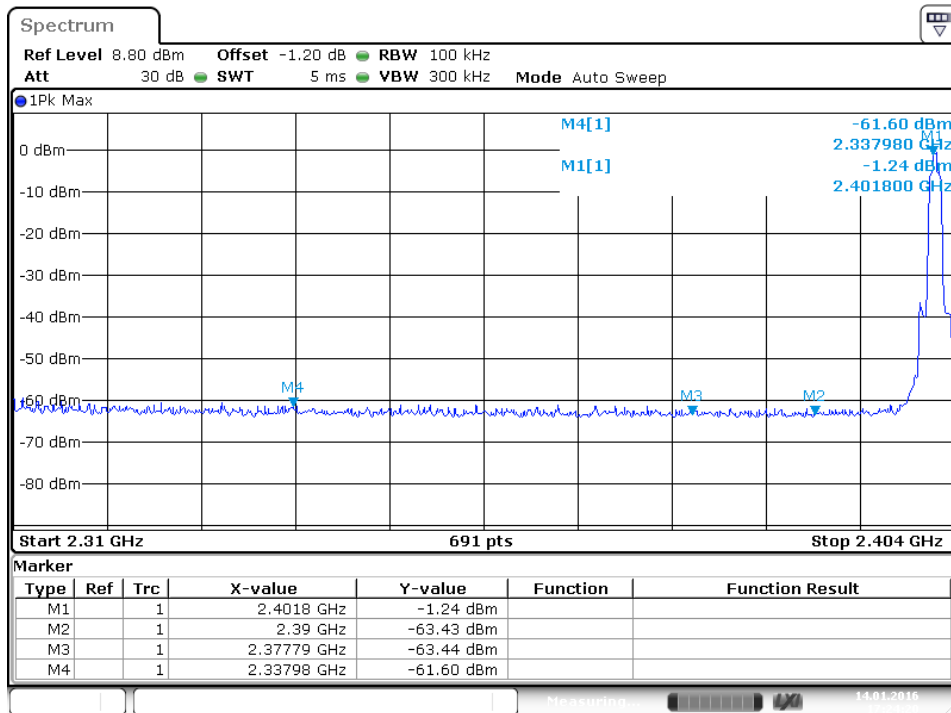Band Edge


Date: 14.JAN.2016 17:24:20

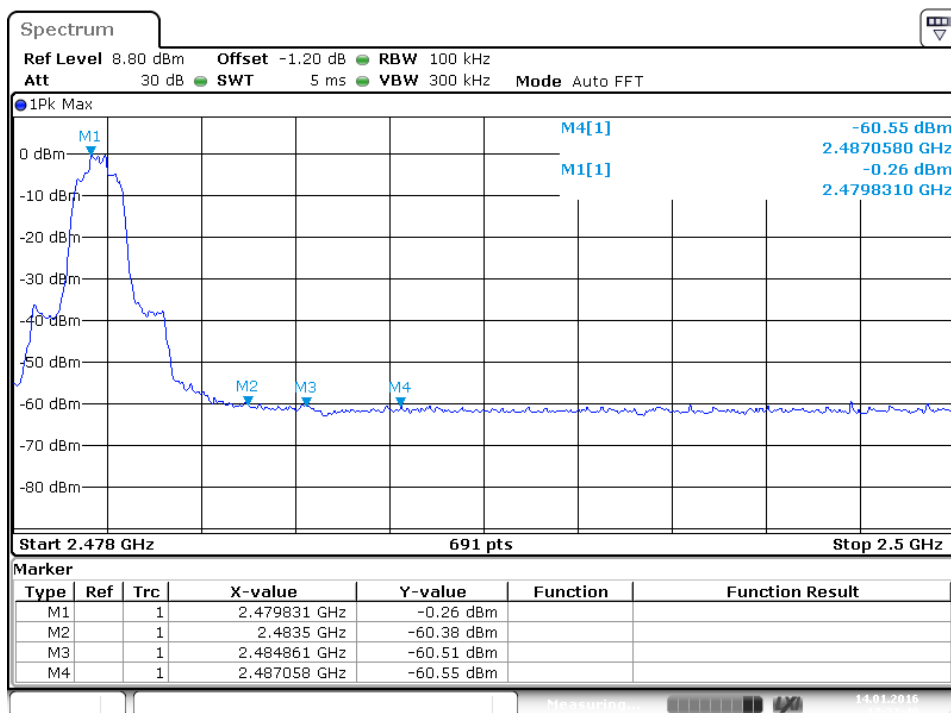

Date: 14.JAN.2016 17:22:50

Prüfbericht - Nr.: 17056805 001

Test Report No.

Seite 24 von 71

Page 24 of 71

5.1.5 Spurious Emission

RESULT:**Pass**

Date of testing	:	2016-01-15
Test standard	:	FCC part 15.247(d) RSS-Gen
Basic standard	:	ANSI C63.10: 2013 Clause 11 of KDB 558074 v03r01
Limits	:	FCC part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber & Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1.a
Ambient temperature	:	23°C
Relative humidity	:	48%
Atmospheric pressure	:	101kPa

For details refer to following test plot.

Test Plot of Spurious Emission


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N: NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

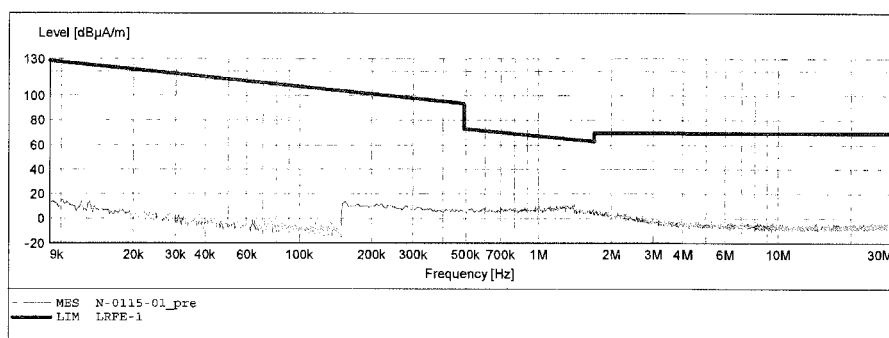


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

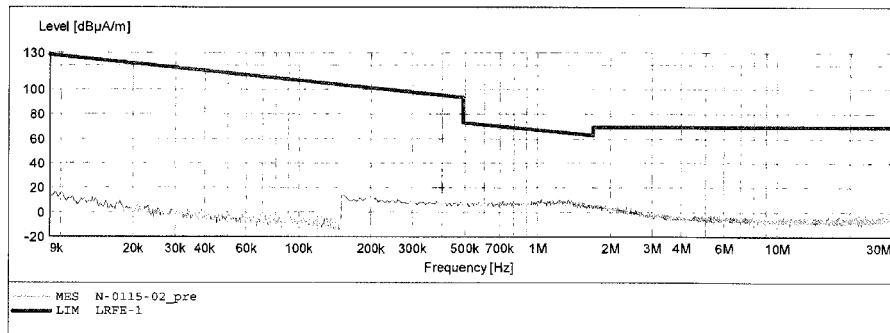


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N: NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2402MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Z
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70						
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

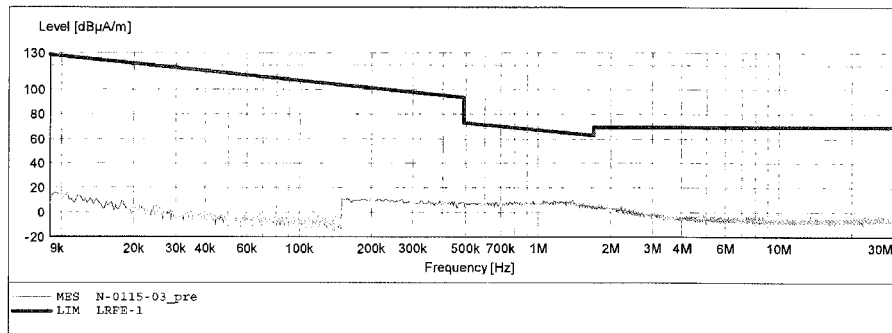


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

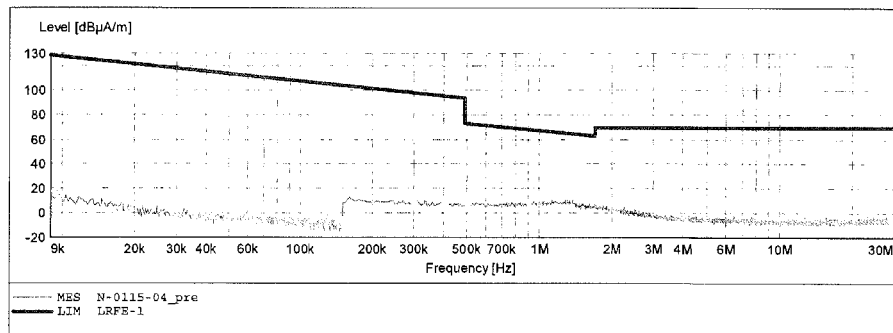


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N: NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70				Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width					
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

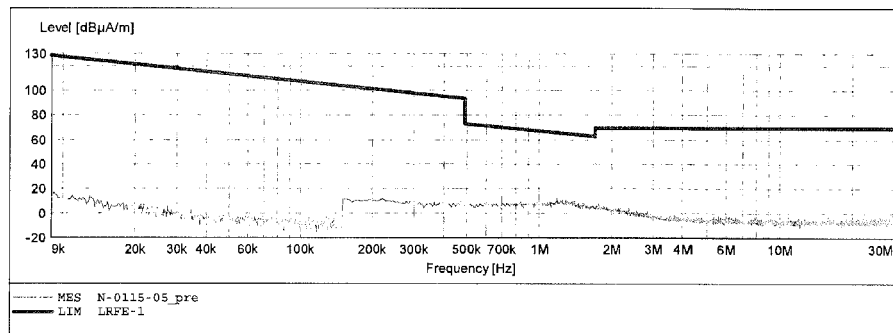


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N: NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2441MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Z
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

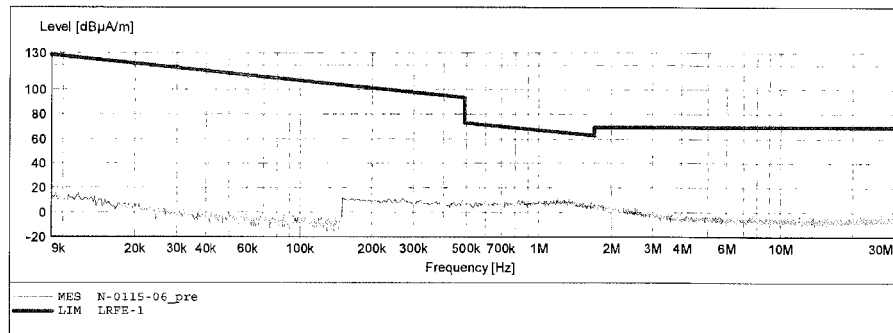


ACCURATE TECHNOLOGY CO.,LTD
FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

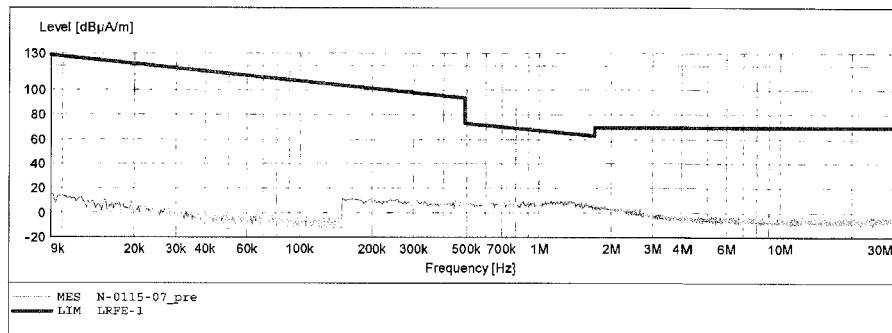


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N: NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Y
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

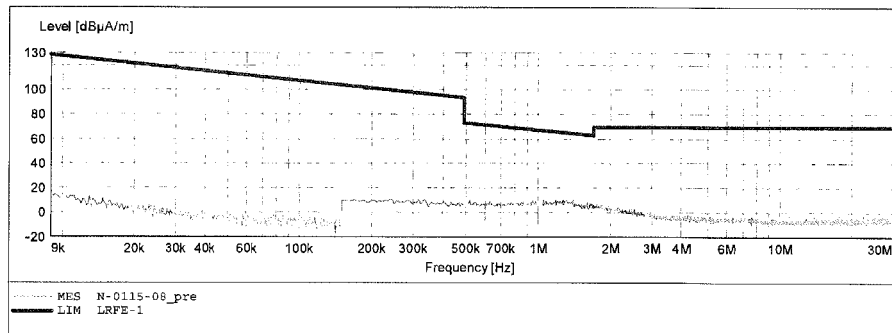


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: PEI
 Test Specification: DC 3.7V
 Comment: Z
 Start of Test: 2016-1-15 /

SCAN TABLE: "LFRE Fin"

Short Description: _SUB_STD_VTERM2 1.70						
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

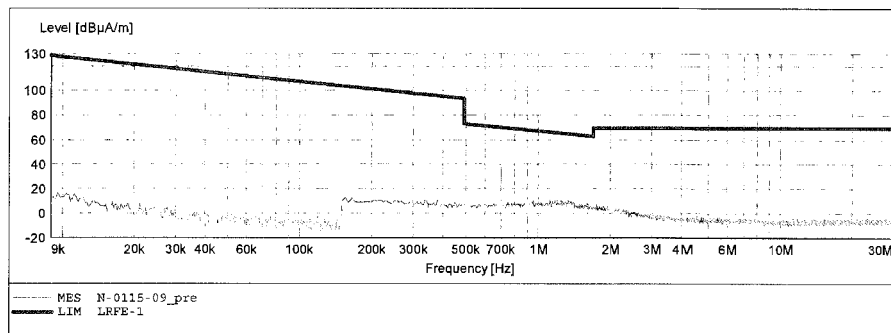


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2315

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

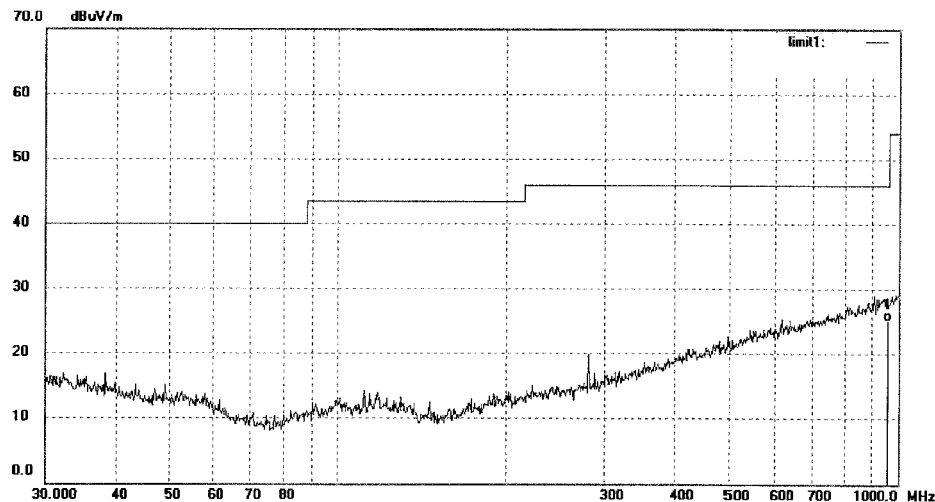

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	955.4381	22.76	2.29	25.05	46.00	-20.95	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2314

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

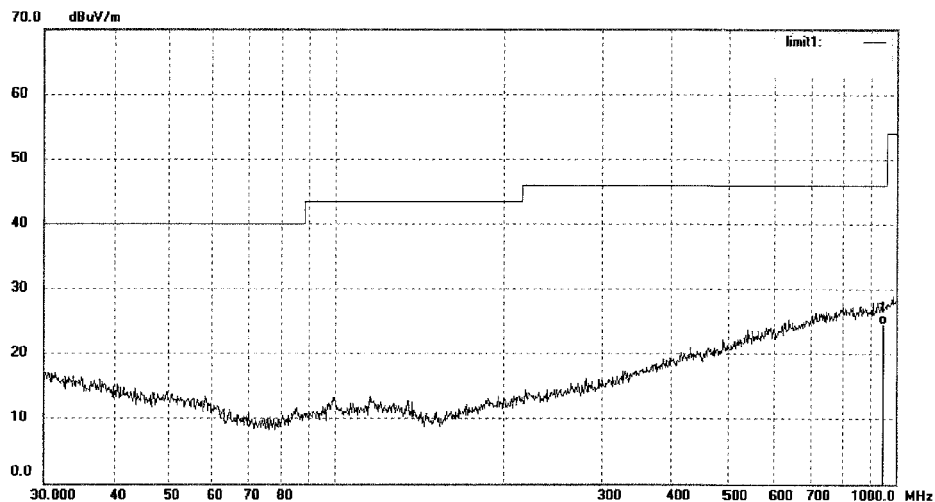

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	948.7610	22.42	2.13	24.55	46.00	-21.45	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2316

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

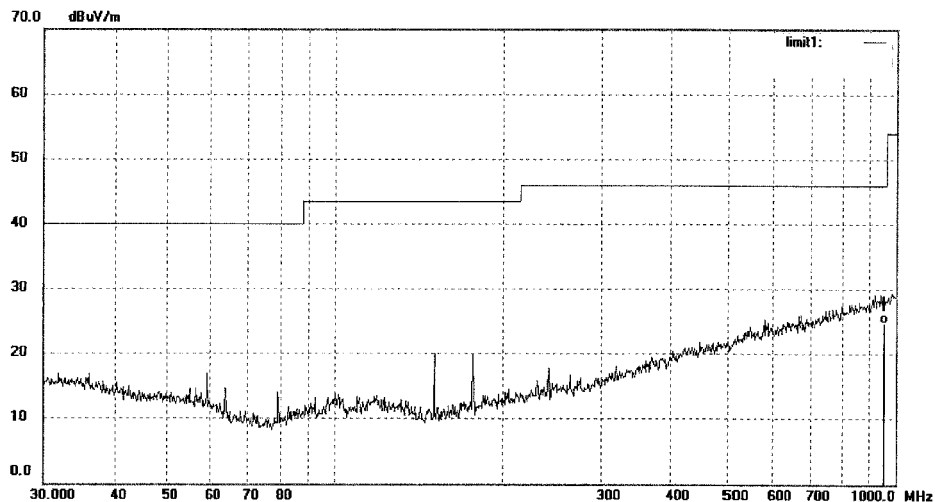

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	955.4381	22.44	2.29	24.73	46.00	-21.27	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2317

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

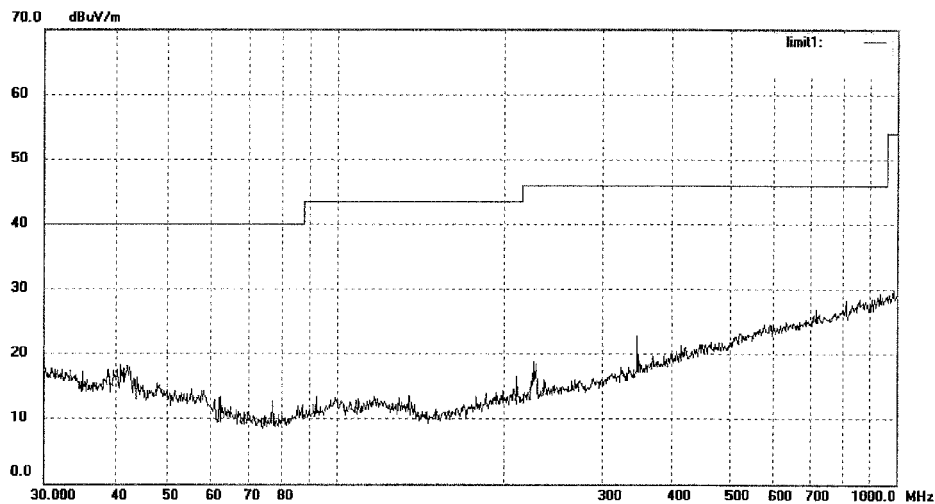

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2319

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

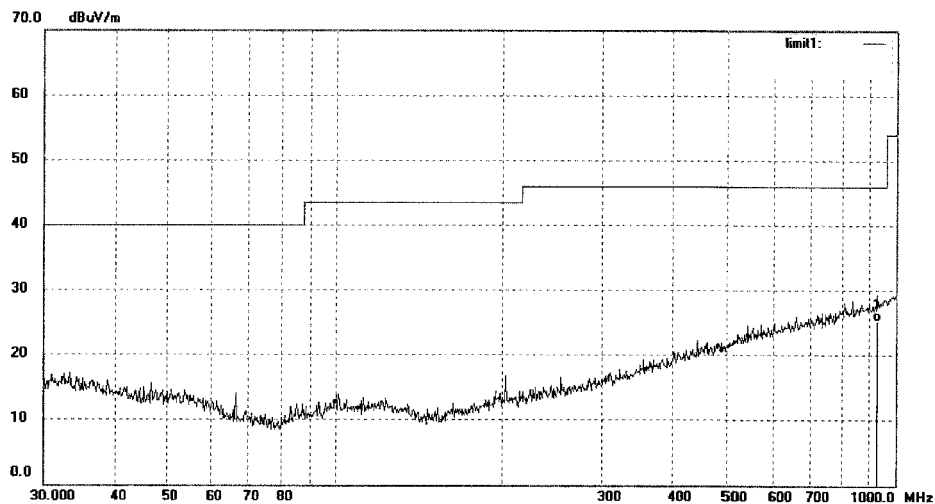

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	925.7563	23.56	1.74	25.30	46.00	-20.70	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2318

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

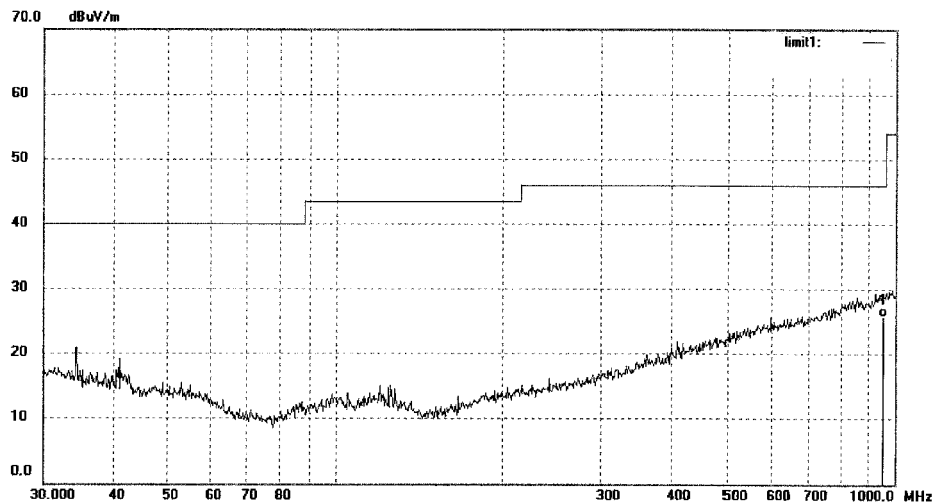

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	955.4379	23.51	2.29	25.80	46.00	-20.20	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2285

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

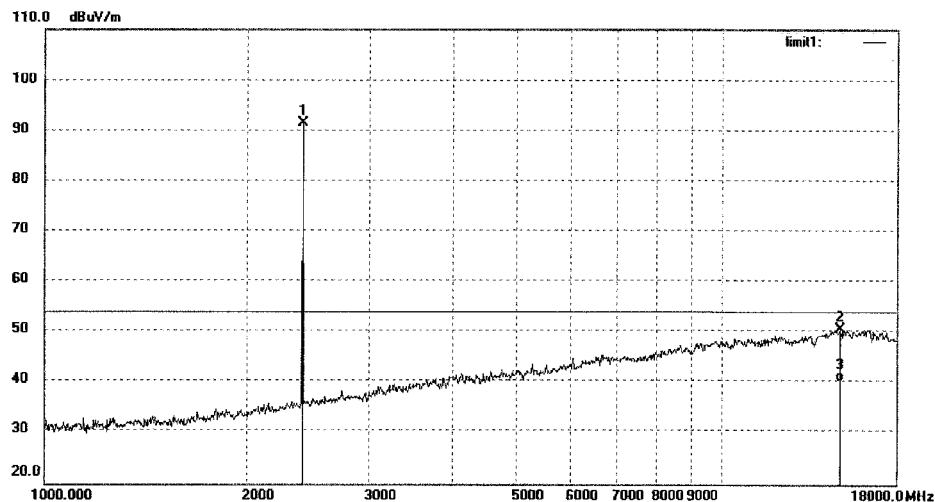

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	98.87	-7.45	91.42	/	/	peak			
2	14873.888	9.14	41.48	50.62	74.00	-23.38	peak			
3	14873.888	-1.21	41.48	40.27	54.00	-13.73	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2284

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

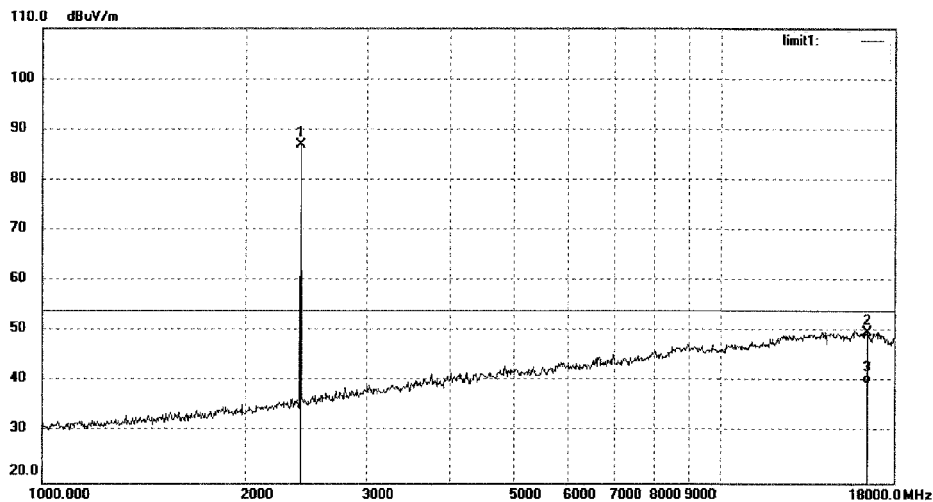

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	94.35	-7.45	86.90	/	/	peak			
2	16457.318	9.49	40.27	49.76	74.00	-24.24	peak			
3	16457.318	-0.66	40.27	39.61	54.00	-14.39	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2289

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

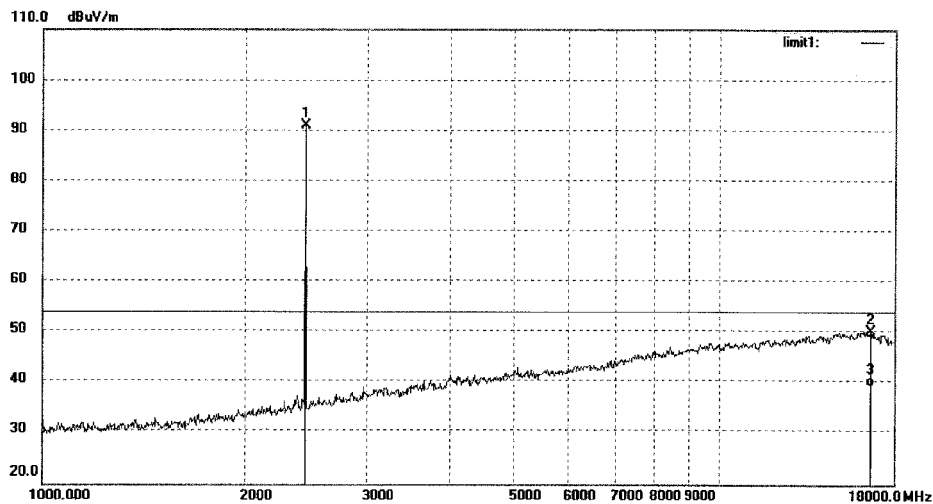

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	98.45	-7.36	91.09	/	/	peak			
2	16648.693	9.47	40.72	50.19	74.00	-23.81	peak			
3	16648.693	-1.25	40.72	39.47	54.00	-14.53	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2288

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

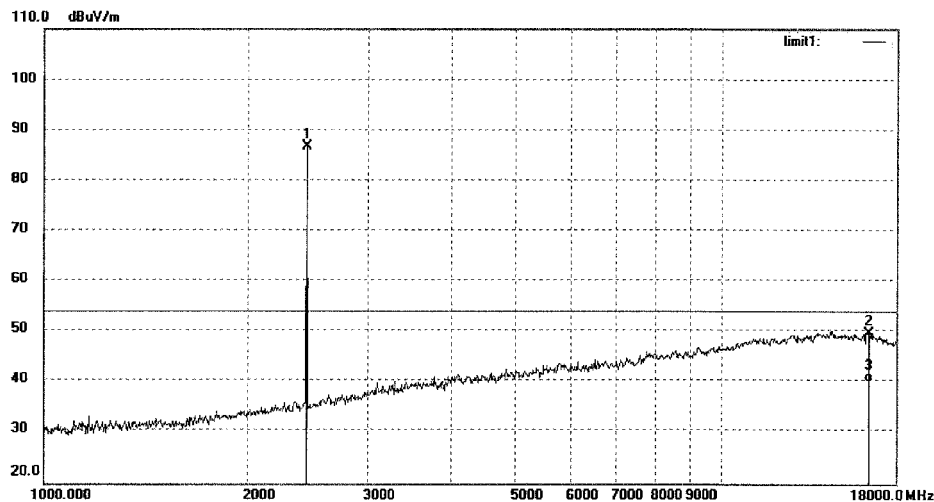

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	94.03	-7.35	86.68	/	/	peak			
2	16362.457	9.60	40.22	49.82	74.00	-24.18	peak			
3	16362.457	-0.13	40.22	40.09	54.00	-13.91	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2290

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

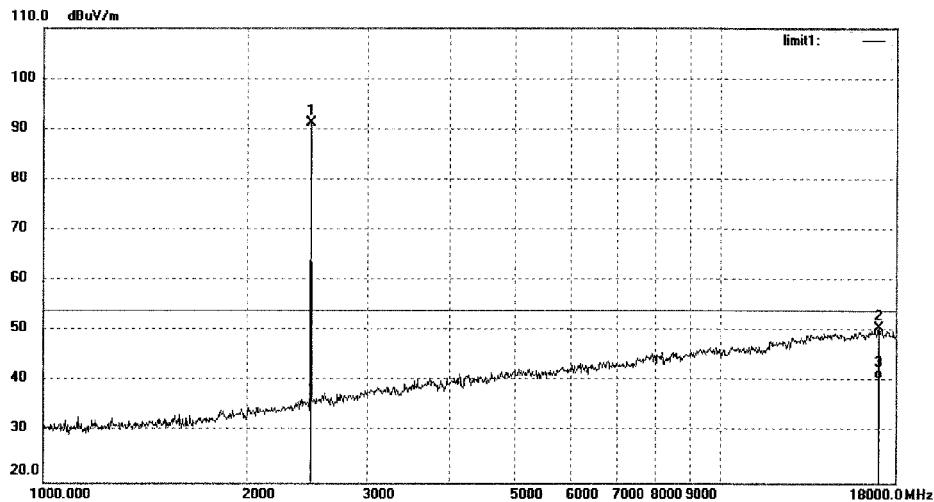

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	98.69	-7.37	91.32	/	/	peak			
2	16988.970	8.96	41.67	50.63	74.00	-23.37	peak			
3	16988.970	-1.05	41.67	40.62	54.00	-13.38	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2291

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

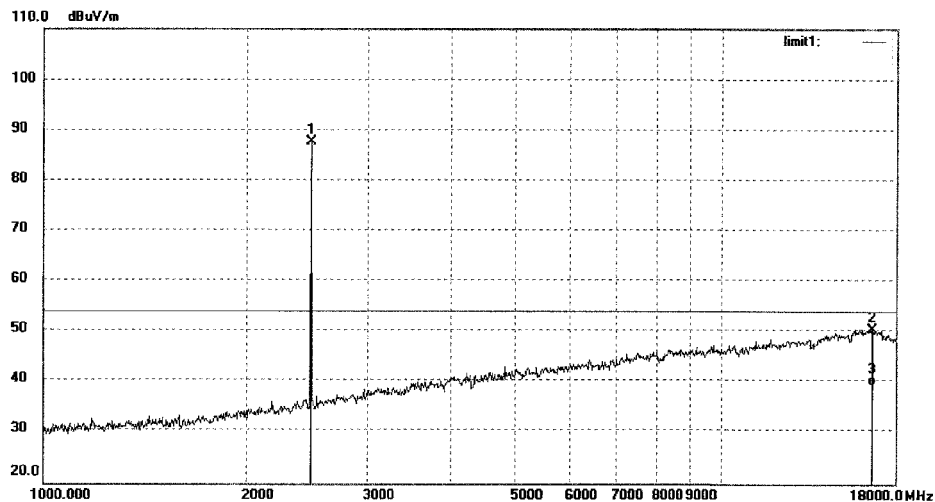

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	94.96	-7.37	87.59	/	/	peak			
2	16648.693	9.76	40.72	50.48	74.00	-23.52	peak			
3	16648.693	-1.26	40.72	39.46	54.00	-14.54	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2345

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

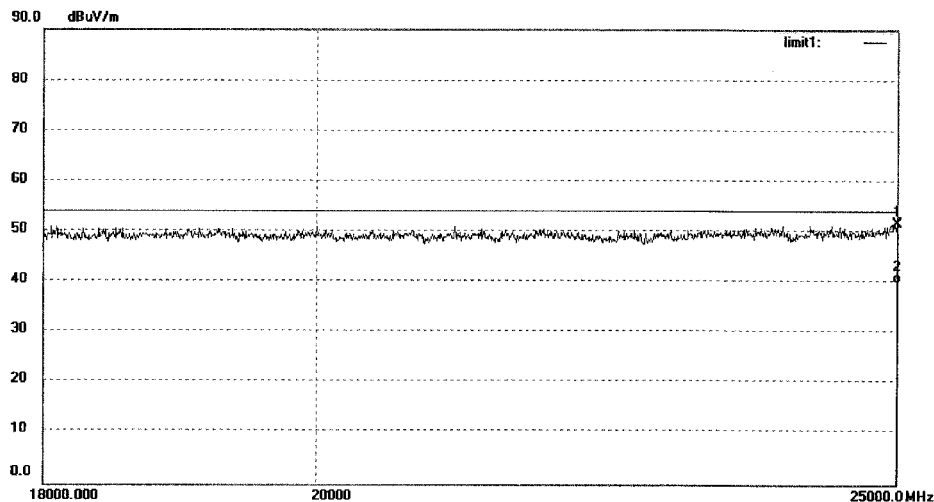

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25000.000	32.66	18.90	51.56	74.00	-22.44	peak			
2	25000.000	21.11	18.90	40.01	54.00	-13.99	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2344

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

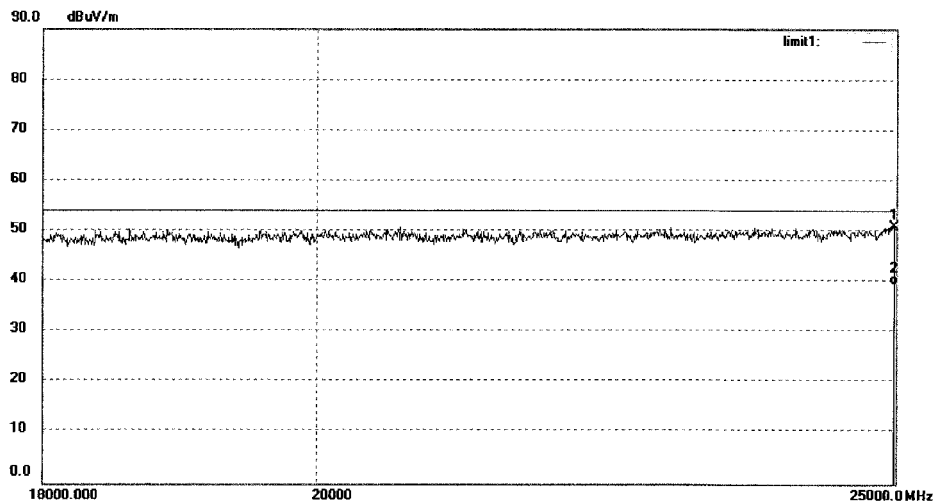

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24983.547	32.06	18.88	50.94	74.00	-23.06	peak			
2	24983.547	20.68	18.88	39.56	54.00	-14.44	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2346

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

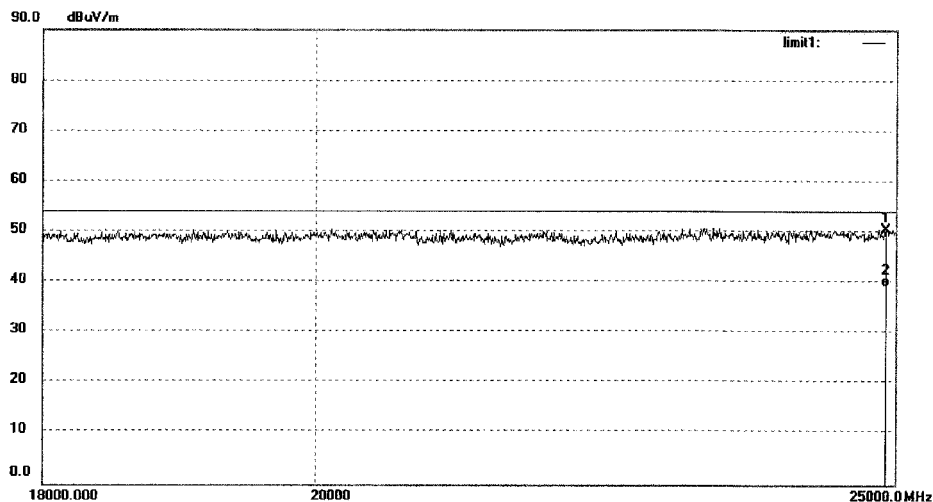

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24909.644	31.73	18.77	50.50	74.00	-23.50	peak			
2	24909.644	20.57	18.77	39.34	54.00	-14.66	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2347

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2441MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

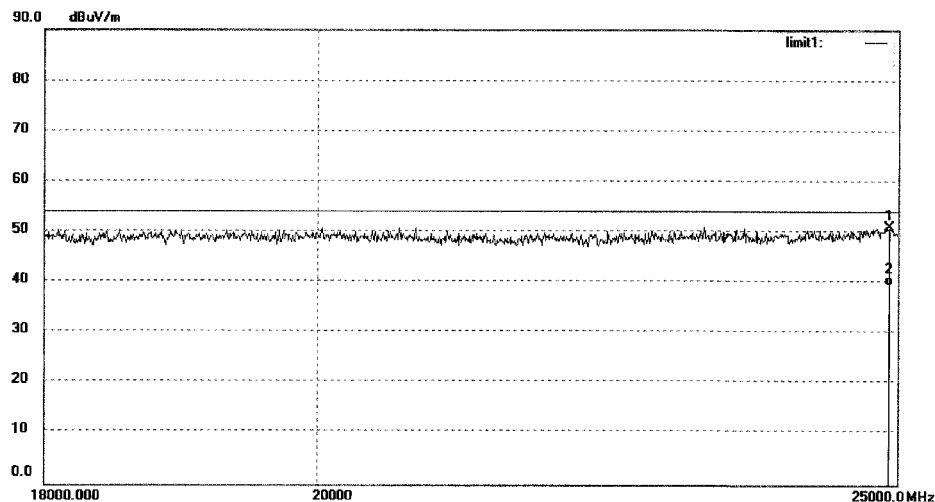

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24917.845	32.07	18.78	50.85	74.00	-23.15	peak			
2	24917.845	20.81	18.78	39.59	54.00	-14.41	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2349

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

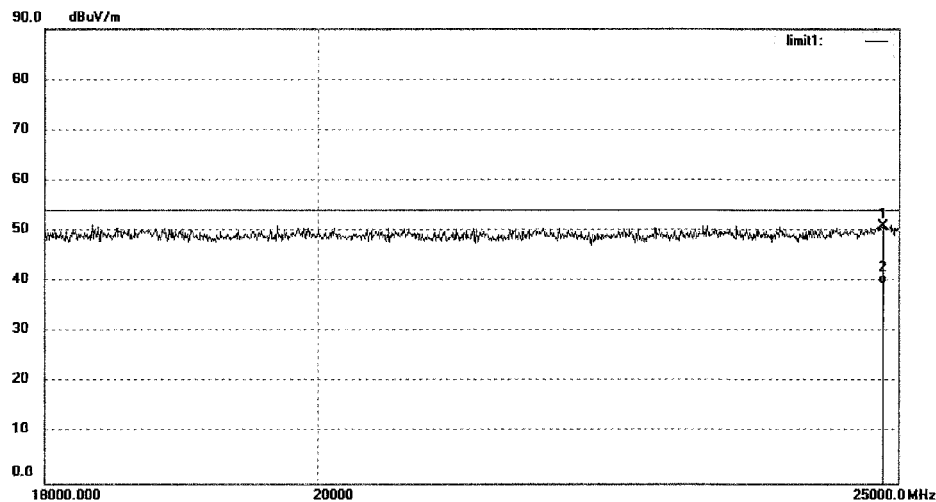

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24852.315	32.28	18.69	50.97	74.00	-23.03	peak			
2	24852.315	20.83	18.69	39.52	54.00	-14.48	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2348

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 16/01/14/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Bluetooth Earpods

Engineer Signature: PEI


Mode: TX 2480MHz

Distance: 3m

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Note:

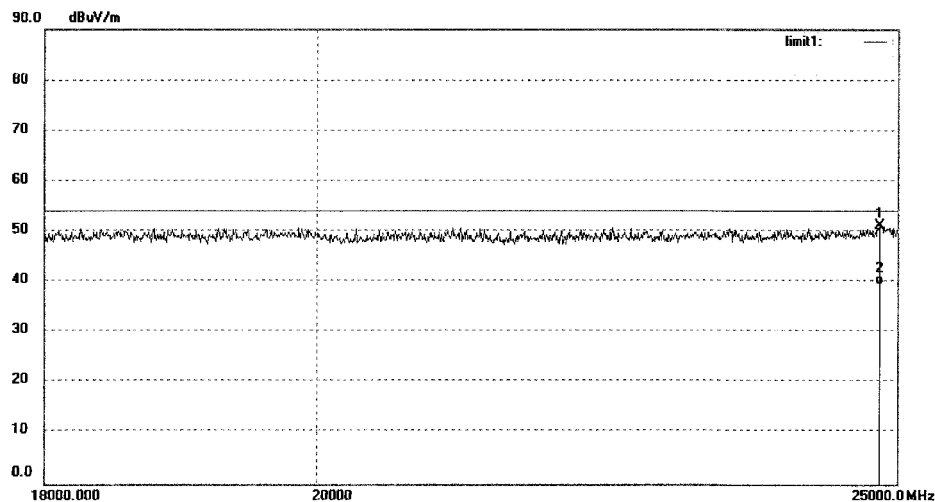

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24835.959	32.45	18.67	51.12	74.00	-22.88	peak			
2	24835.959	20.74	18.67	39.41	54.00	-14.59	AVG			

Prüfbericht - Nr.: 17056805 001
Test Report No.
Seite 52 von 71
Page 52 of 71

Test Plot of Band Edge


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2286

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

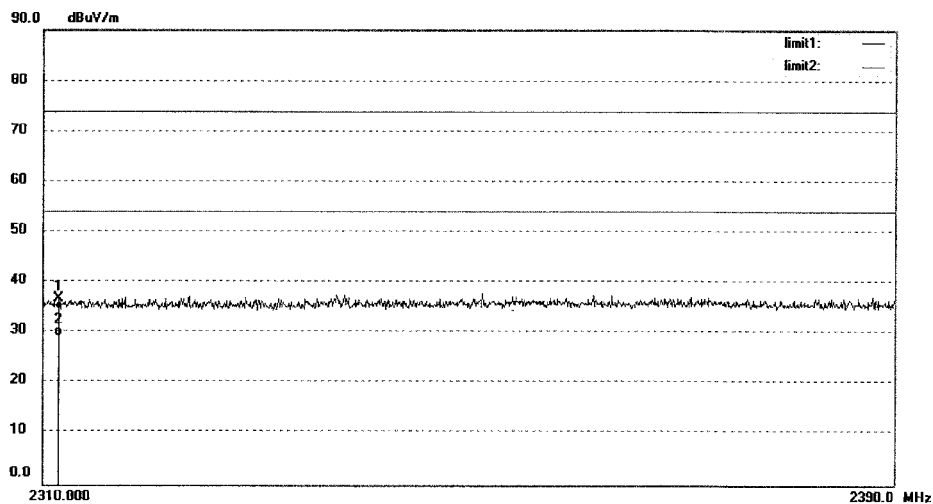

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2311.440	44.52	-7.82	36.70	74.00	-37.30	peak			
2	2311.440	37.16	-7.82	29.34	54.00	-24.66	AVG			

Prüfbericht - Nr.: 17056805 001
Test Report No.
Seite 53 von 71
Page 53 of 71

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2287

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2402MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

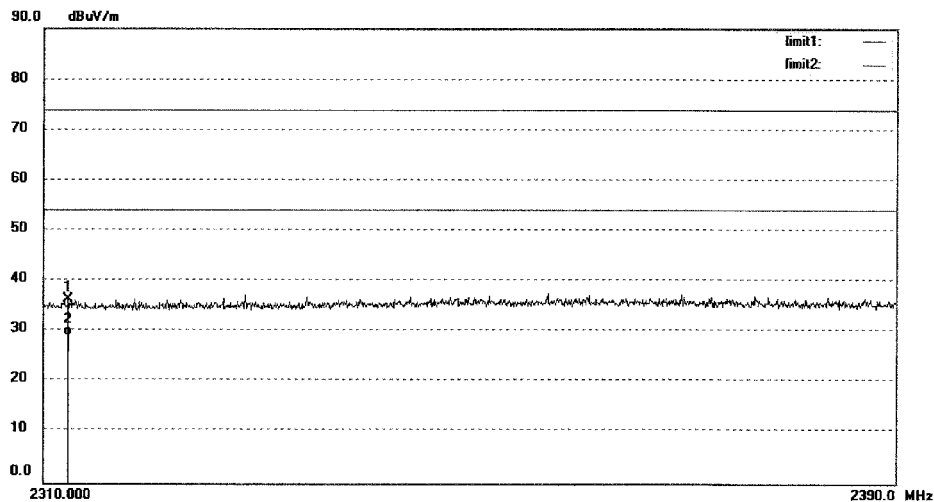

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2312.320	44.20	-7.82	36.38	74.00	-37.62	peak			
2	2312.320	37.00	-7.82	29.18	54.00	-24.82	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2293

Polarization: Horizontal

Standard: FCC (Band Edge)

Power Source: DC 3.7V

Test item: Radiation Test

Date: 16/01/14/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Bluetooth Earpods

Engineer Signature: PEI


Mode: TX 2480MHz

Distance: 3m

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Note:

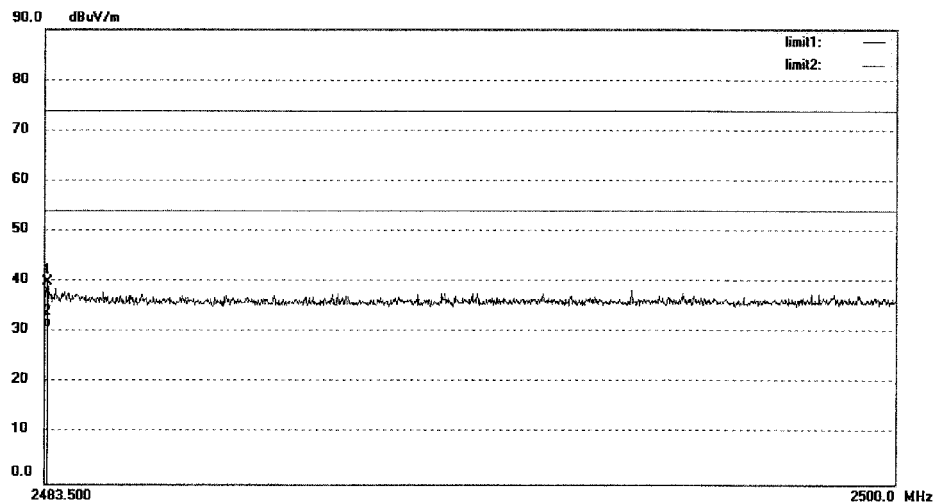

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.550	47.40	-7.37	40.03	74.00	-33.97	peak			
2	2483.550	38.28	-7.37	30.91	54.00	-23.09	AVG			

Prüfbericht - Nr.: 17056805 001
Test Report No.
Seite 55 von 71
Page 55 of 71

ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2292

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: TX 2480MHz

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 3.7V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

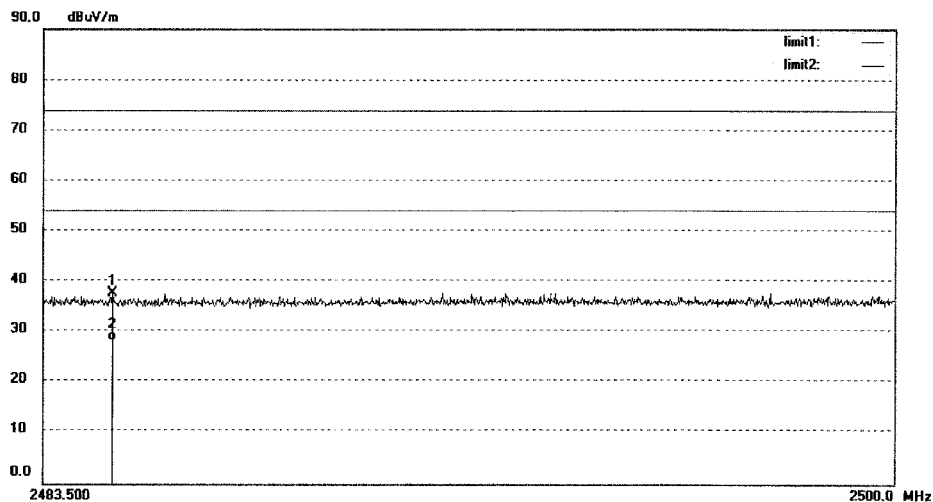

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.853	45.05	-7.38	37.67	74.00	-36.33	peak			
2	2484.853	35.58	-7.38	28.20	54.00	-25.80	AVG			

5.1.6 Frequency Separation

RESULT:

Pass

Date of testing	:	2016-01-14
Test standard	:	FCC part 15.247(a)(1) RSS-247 clause 5.1(2)
Basic standard	:	ANSI C63.10: 2013
Limit	:	≥ 25kHz or two-thirds of 20dB bandwidth, whichever is greater
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa

Table 9: Test result of Frequency Separation

Channel	Channel Frequency (MHz)	Measured Channel Separation (MHz)	Limit (kHz)	Result
Low Channel	2402	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2403			
Mid Channel	2441	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2442			
High Channel	2479	1.0029	≥ 25kHz or two-thirds of 20dB bandwidth	Pass
Adjacency Channel	2480			

Prüfbericht - Nr.: 17056805 001

Test Report No.

Seite 57 von 71

Page 57 of 71

5.1.7 Number of hopping frequency**RESULT:****Pass**

Date of testing : 2016-01-14
Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 clause 5.1(4)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A.1.a
Ambient temperature : 25°C
Relative humidity : 50%
Atmospheric pressure : 101kPa

Table 10: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2402 to 2480MHz	79	≥ 15	Pass

5.1.8 Time of Occupancy

RESULT:

Pass

Date of testing	:	2016-01-14
Test standard	:	FCC part 15.247(a)(1)(iii) RSS-247 clause 5.1(4)
Basic standard	:	ANSI C63.10: 2013
Limits	:	0.4s
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A.1.a
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa

Table 11: Test result of Time of Occupancy

Mode	Packet Type	Channel Frequency (MHz)	Packet Duration [ms]	Number of Hops per Channel	Dwell Time (ms)	Limit [ms]
BDR	DH1	2402	0.420	283	118.860	400
		2441	0.428	282	120.696	400
		2480	0.420	283	118.860	400
	DH3	2402	1.688	154	259.952	400
		2441	1.674	153	256.122	400
		2480	1.688	153	258.264	400
	DH5	2402	2.964	96	284.544	400
		2441	2.964	103	305.292	400
		2480	2.964	101	299.364	400
EDR	DH1	2402	0.428	286	122.408	400
		2441	0.428	283	121.124	400
		2480	0.428	284	121.552	400
	DH3	2402	1.696	154	261.184	400
		2441	1.696	153	259.488	400
		2480	1.696	153	259.488	400
	DH5	2402	2.964	101	299.364	400
		2441	2.964	117	346.788	400
		2480	2.964	117	346.788	400

Prüfbericht - Nr.: 17056805 001

Test Report No.

Seite 59 von 71

Page 59 of 71

5.1.9 Conducted emissions

RESULT:**Pass**

Date of testing	:	2016-01-16
Test standard	:	FCC Part 15.107 (a)
	:	ICES-003 Issue 6 January 2016
Basic standard	:	ANSI C63.4: 2014
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.107
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz
Operation Mode	:	B
Earthing	:	Not Connected
Ambient temperature	:	25°C
Relative humidity	:	52%
Atmospheric pressure	:	101kPa


For details refer to following test plot.

ACCURATE TECHNOLOGY CO.,LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 1/16/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Frequency Stop Step Detector Meas. IF Transducer
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 150.0 kHz 30.0 MHz 5.0 kHz Average QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

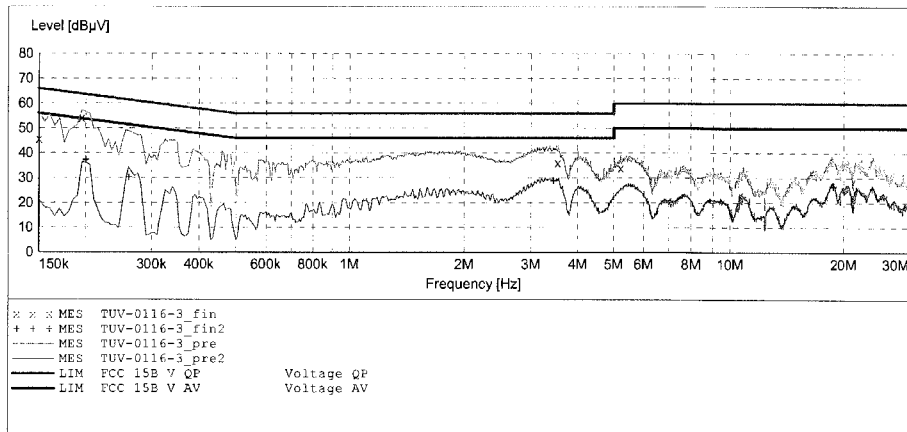
MEASUREMENT RESULT: "TUV-0116-3_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	45.70	10.5	66	20.3	QP	L1	GND
0.195000	54.20	10.5	64	9.6	QP	L1	GND
3.540000	36.00	11.1	56	20.0	QP	L1	GND
5.220000	34.00	11.2	60	26.0	QP	L1	GND

MEASUREMENT RESULT: "TUV-0116-3_fin2"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.200000	37.00	10.5	54	16.6	AV	L1	GND
0.260000	30.10	10.6	51	21.3	AV	L1	GND
3.440000	28.70	11.1	46	17.3	AV	L1	GND
18.760000	26.50	11.4	50	23.5	AV	L1	GND

ACCURATE TECHNOLOGY CO.,LTD
CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Bluetooth Earpods M/N:NS-CAHBT02-BK
 Manufacturer: Country Mate Technology Ltd
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 1/16/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 150.0 kHz 30.0 MHz 5.0 kHz Average QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

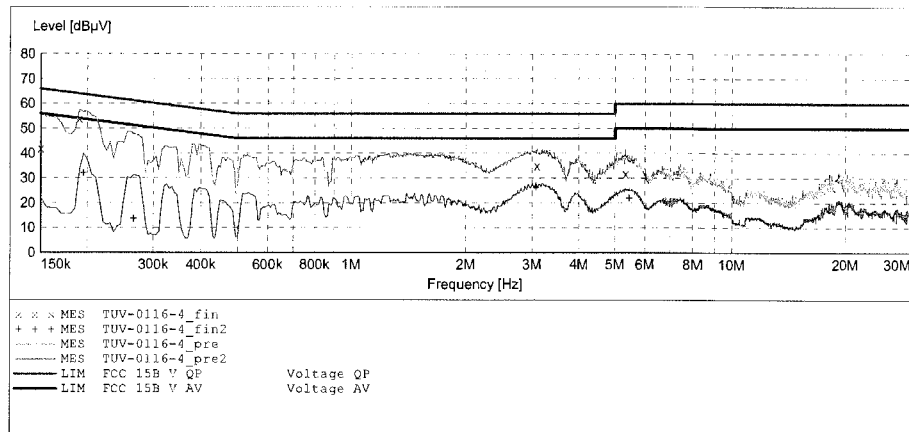
MEASUREMENT RESULT: "TUV-0116-4_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	41.90	10.5	66	24.1	QP	N	GND
0.190000	54.00	10.5	64	10.0	QP	N	GND
3.090000	35.00	11.1	56	21.0	QP	N	GND
5.330000	31.80	11.2	60	28.2	QP	N	GND

MEASUREMENT RESULT: "TUV-0116-4_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	32.00	10.5	54	21.8	AV	N	GND
0.265000	13.60	10.6	51	37.7	AV	N	GND
3.070000	26.20	11.1	46	19.8	AV	N	GND
5.450000	21.90	11.2	50	28.1	AV	N	GND

5.1.10 Radiated Emission**RESULT:****Pass**

Date of testing	:	2015-10-19
Test standard	:	FCC Part 15.109 (a) ICES-003 Issue 5 August 2012
Test procedure	:	ANSI C63.4: 2014
Frequency range	:	30 - 6000MHz
Equipment Classification	:	Class B
Limits	:	FCC Part 15.109(a) ICES-003 Issue 6 January 2016
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Input Voltage	:	AC 120V, 60Hz
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	23°C
Relative humidity	:	48%
Atmospheric pressure	:	101kPa

For details refer to following test plot.


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2320

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 5V

Test item: Radiation Test

Date: 16/01/14/

Temp.(C)/Hum.(%) 23 C / 48 %

Time:

EUT: Bluetooth Earpods

Engineer Signature: PEI


Mode: Charging

Distance: 3m

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Note:

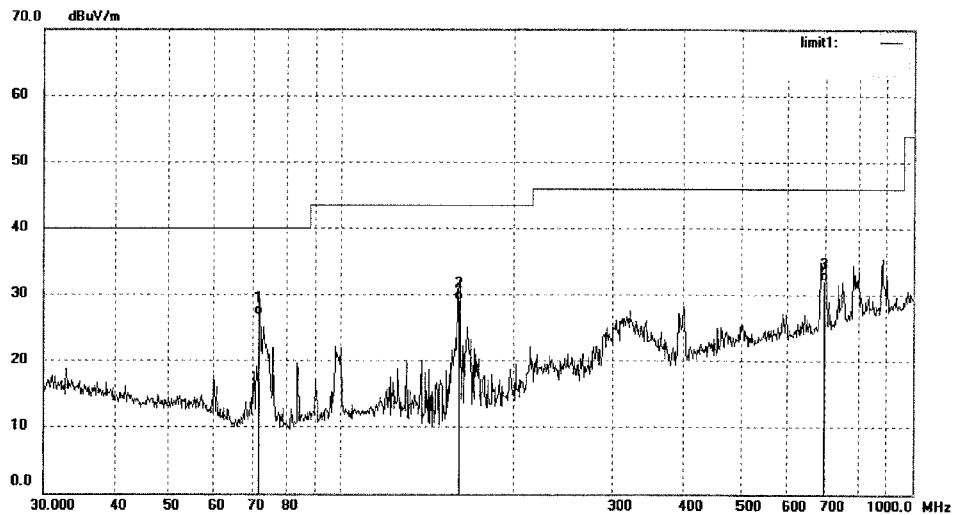

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	71.8320	42.67	-15.75	26.92	40.00	-13.08	QP			
2	160.9089	43.34	-14.25	29.09	43.50	-14.41	QP			
3	696.8567	33.87	-1.84	32.03	46.00	-13.97	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2321

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: Charging

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 5V


Date: 16/01/14/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

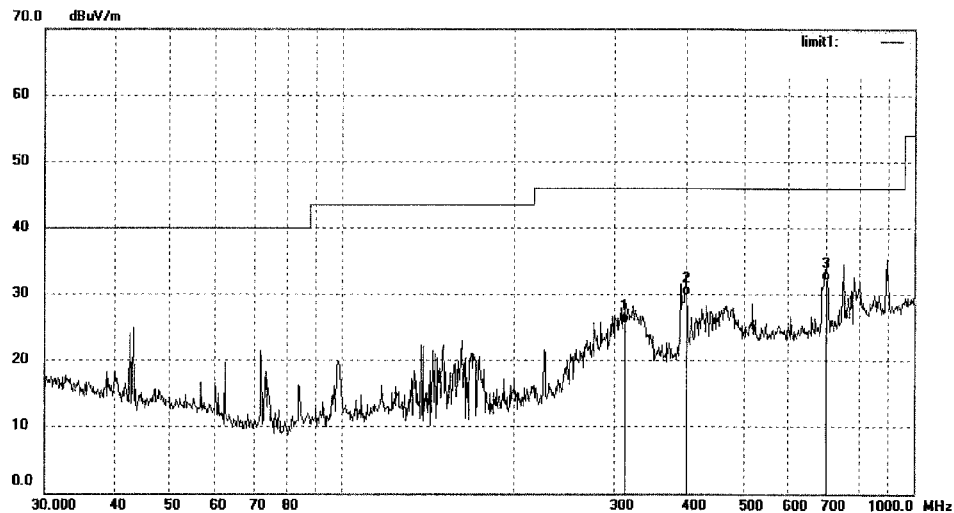

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	313.2760	34.62	-8.93	25.69	46.00	-20.31	QP			
2	400.4319	36.66	-6.80	29.86	46.00	-16.14	QP			
3	699.3046	33.92	-1.77	32.15	46.00	-13.85	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2389

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: Charging

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Horizontal

Power Source: DC 5V


Date: 16/01/16/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

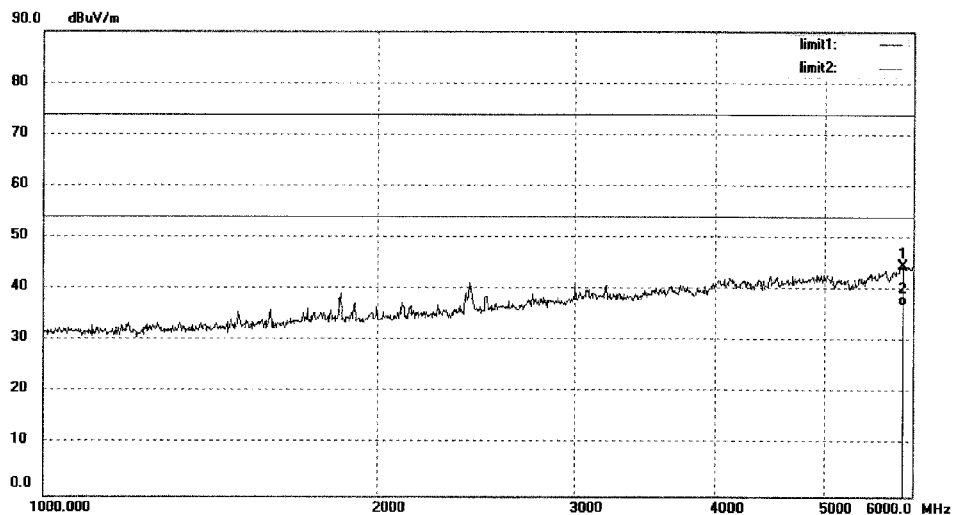

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5872.370	42.73	1.95	44.68	74.00	-29.32	peak			
2	5872.370	35.07	1.95	37.02	54.00	-16.98	AVG			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: tuv2015 #2390

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Bluetooth Earpods

Mode: Charging

Model: NS-CAHBT02-BK

Manufacturer: Country Mate Technology Ltd

Polarization: Vertical

Power Source: DC 5V


Date: 16/01/16/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

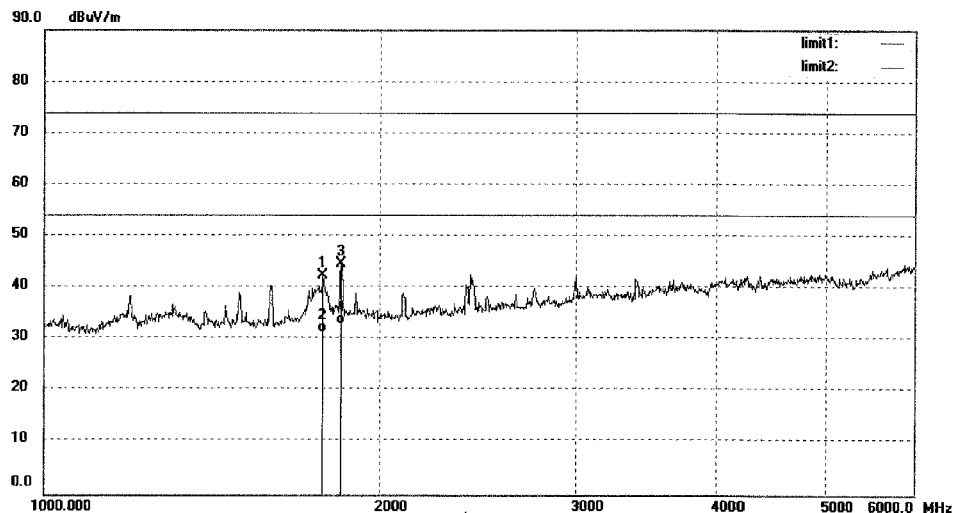

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1777.406	52.56	-10.23	42.33	74.00	-31.67	peak			
2	1777.406	41.53	-10.23	31.30	54.00	-22.70	AVG			
3	1845.558	54.14	-9.58	44.56	74.00	-29.44	peak			
4	1845.558	42.58	-9.58	33.00	54.00	-21.00	AVG			

1. Safety Human exposure

1.1 Radio Frequency Exposure Compliance

1.1.1 Electromagnetic Fields

RESULT:**Pass**

Test standard : RSS-102 Issue 5 March 2015
FCC KDB Publication 447498 D01 v06

The maximum radiated power of the transmitter is 1.294mW (1.12dBm) only, which less than 4mW. Hence the EUT is exempted from routine evaluation limits (SAR Evaluation) according to clause 2.5.1 of RSS-102 Issue 5.


Since maximum radiated power of the transmitter is $1.294\text{mW} < 10\text{mW}$, and the distance from EUT to human is $\geq 5\text{mm}$, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01 General RF Exposure Guidance v06.

2. Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emissions




Photograph 2: Set-up for Spurious Emissions for below 30MHz

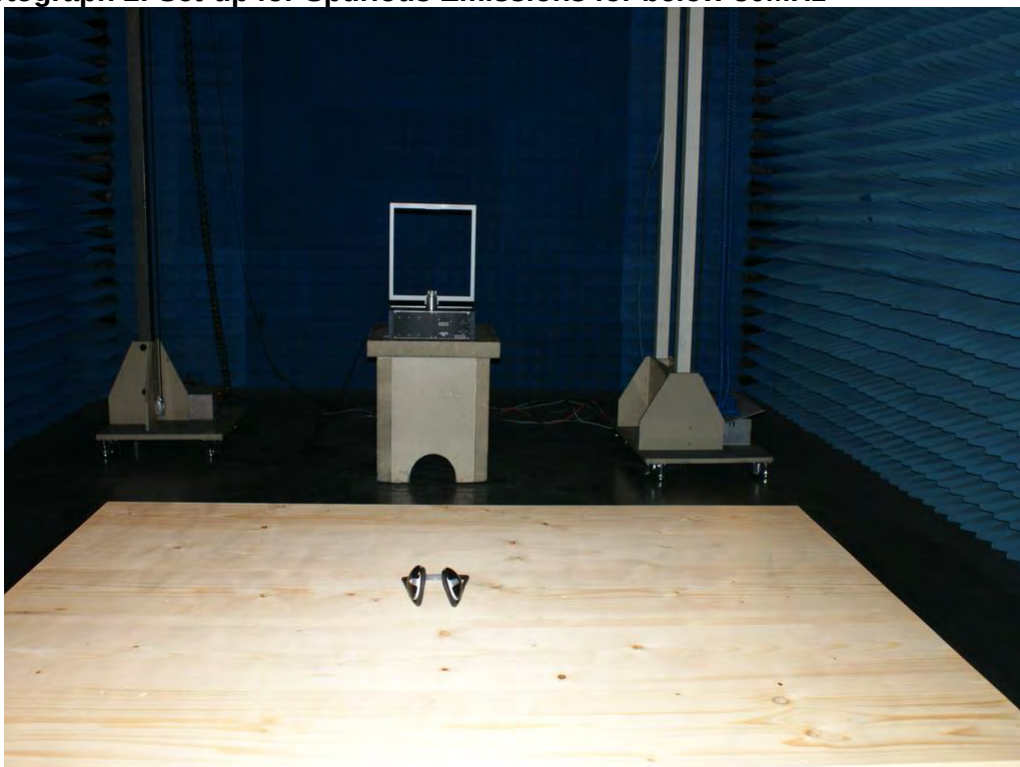

Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz



Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz

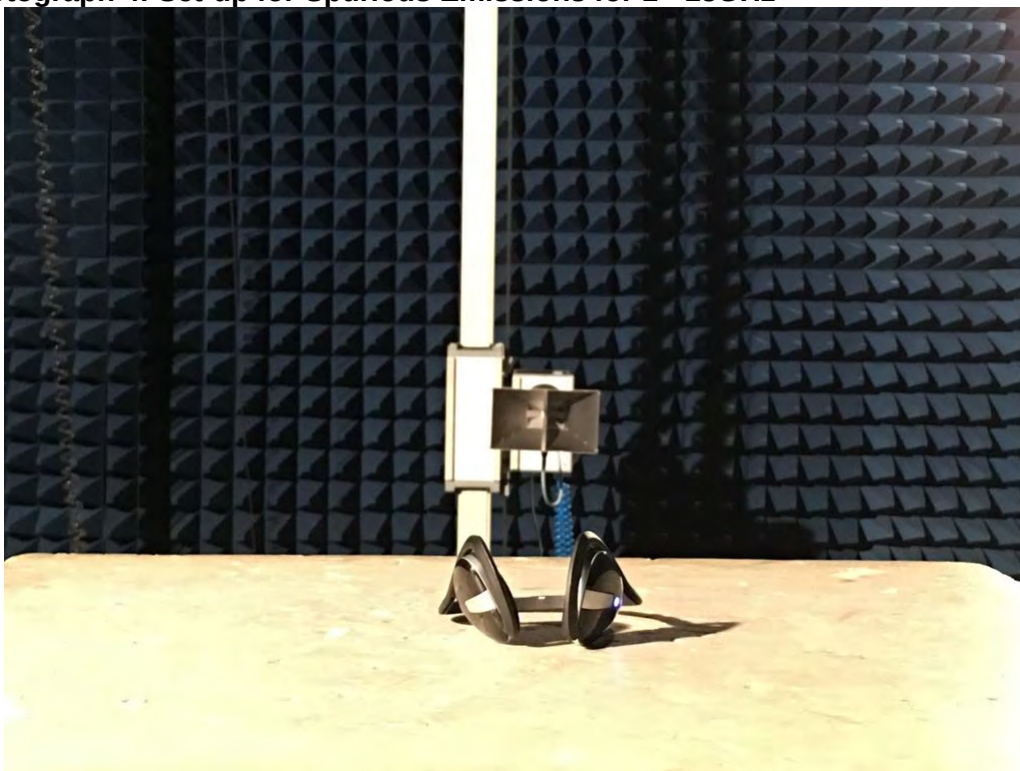

Photograph 5: Set-up for Spurious Emissions for 18 - 25GHz



3. List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of Bluetooth (BDR & EDR mode)	8
Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode).....	8
Table 5: Test result of Peak Output Power of Bluetooth (BDR mode).....	15
Table 6: Test result of Peak Output Power of Bluetooth (EDR mode).....	15
Table 7: Test result of 20dB & 99% Bandwidth of BDR mode	16
Table 8: Test result of 20dB & 99% Bandwidth of EDR mode	16
Table 9: Test result of Frequency Separation	56
Table 10: Test result of Number of hopping frequency	57
Table 11: Test result of Time of Occupancy.....	58

4. List of Photographs

Photograph 1: Set-up for Conducted Emissions	68
Photograph 2: Set-up for Spurious Emissions for below 30MHz	68
Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz	69
Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz.....	69
Photograph 5: Set-up for Spurious Emissions for 18 - 25GHz.....	70