



TESTING LABORATORY  
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019

RSS-247, ISSUE 2, FEBRUARY 2017

## TEST REPORT

For

**Autel Robotics Co., Ltd.**

9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd. Xili, Nanshan, Shenzhen, China

**FCC ID: 2AGNTEF9RC2409A**  
**IC: 20910-EF9RC2409A**

|                                                                                                                                                                                                                                                                                     |                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                              | <b>Product Name:</b><br>Autel Smart Controller |
| <b>Report Number:</b> RSZ201027002-00A                                                                                                                                                                                                                                              |                                                |
| <b>Report Date:</b> 2021-04-28                                                                                                                                                                                                                                                      |                                                |
| <b>Reviewed By:</b> Ivan Cao<br>Assistant Manager                                                                                                                                                                                                                                   |                                                |
| <b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan,<br>Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                                |

## **TABLE OF CONTENTS**

|                                                                                                                                  |           |
|----------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                                                  | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                                         | 4         |
| OBJECTIVE .....                                                                                                                  | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                                               | 4         |
| TEST METHODOLOGY .....                                                                                                           | 4         |
| MEASUREMENT UNCERTAINTY .....                                                                                                    | 5         |
| TEST FACILITY .....                                                                                                              | 5         |
| DECLARATIONS.....                                                                                                                | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                                            | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                                                          | 6         |
| EUT EXERCISE SOFTWARE .....                                                                                                      | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                                                    | 8         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                                                | 9         |
| <b>SUMMARY OF TEST RESULTS.....</b>                                                                                              | <b>10</b> |
| <b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093, RSS-102 CLAUSE 4- RF Exposure.....</b>                                           | <b>11</b> |
| APPLICABLE STANDARD .....                                                                                                        | 11        |
| <b>FCC §15.203, RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT .....</b>                                                               | <b>12</b> |
| APPLICABLE STANDARD .....                                                                                                        | 12        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                                                             | 13        |
| <b>FCC §15.207 (a), RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS .....</b>                                                   | <b>14</b> |
| APPLICABLE STANDARD .....                                                                                                        | 14        |
| EUT SETUP.....                                                                                                                   | 14        |
| EMI TEST RECEIVER SETUP.....                                                                                                     | 14        |
| TEST PROCEDURE .....                                                                                                             | 15        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                                                                   | 15        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                             | 15        |
| TEST DATA .....                                                                                                                  | 16        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS.....</b>                  | <b>18</b> |
| APPLICABLE STANDARD .....                                                                                                        | 18        |
| EUT SETUP.....                                                                                                                   | 18        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                                                                | 19        |
| TEST PROCEDURE .....                                                                                                             | 19        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                                                                   | 19        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                             | 20        |
| TEST DATA .....                                                                                                                  | 20        |
| <b>FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) &amp;RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</b> | <b>30</b> |
| APPLICABLE STANDARD .....                                                                                                        | 30        |
| TEST PROCEDURE .....                                                                                                             | 31        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                             | 31        |
| TEST DATA .....                                                                                                                  | 31        |
| <b>FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>                                     | <b>42</b> |
| APPLICABLE STANDARD .....                                                                                                        | 42        |
| TEST PROCEDURE .....                                                                                                             | 42        |

|                                                                                            |           |
|--------------------------------------------------------------------------------------------|-----------|
| TEST EQUIPMENT LIST AND DETAILS.....                                                       | 42        |
| TEST DATA .....                                                                            | 43        |
| <b>FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE .....</b> | <b>44</b> |
| APPLICABLE STANDARD .....                                                                  | 44        |
| TEST PROCEDURE .....                                                                       | 44        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                       | 45        |
| TEST DATA .....                                                                            | 45        |
| <b>FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY .....</b>                 | <b>52</b> |
| APPLICABLE STANDARD .....                                                                  | 52        |
| TEST PROCEDURE .....                                                                       | 52        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                       | 52        |
| TEST DATA .....                                                                            | 52        |

FINAL

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                               |                |                                                                                              |
|-----------------------------------------------|----------------|----------------------------------------------------------------------------------------------|
| <b>EUT Name:</b>                              |                | Autel Smart Controller                                                                       |
| <b>EUT Model:</b>                             |                | EF9-1                                                                                        |
| <b>Operation Frequency:</b>                   |                | 2412-2462 MHz(802.11b/g/n ht20)                                                              |
| <b>Maximum Peak Output Power (Conducted):</b> |                | 25.55 dBm                                                                                    |
| <b>Modulation Type:</b>                       |                | DSSS, OFDM                                                                                   |
| <b>Rated Input Voltage:</b>                   |                | DC 11.55V from battery                                                                       |
| <b>Adapter Information:</b>                   | <b>Model:</b>  | GaN-001                                                                                      |
|                                               | <b>Input:</b>  | 100-240VAC~50/60Hz 1.5A                                                                      |
|                                               | <b>Output:</b> | USB-C1/C2:5V=3A,9V=3A,12V=3A,15V=3A,20V=3.25A<br>USB-A:3.4-5.5V=5A,5V=3A,9V=3A,12V=3A,20V=3A |
| <b>Serial Number:</b>                         |                | RSZ201027002-RF -S4                                                                          |
| <b>EUT Received Date:</b>                     |                | 2020.10.27                                                                                   |
| <b>EUT Received Status:</b>                   |                | Good                                                                                         |

### Objective

This report is prepared on behalf of **Autel Robotics Co., Ltd.** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

### Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: 2AGNTEF9RC2409A.  
RSS-247 LE-LANs submissions with IC: 20910-EF9RC2409A

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

| Parameter                         | Measurement Uncertainty                                                                                              |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                                 |
| RF output power, conducted        | ±0.61dB                                                                                                              |
| Power Spectral Density, conducted | ±0.61 dB                                                                                                             |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | ±1.5 dB                                                                                                              |
| Temperature                       | ±1 °C                                                                                                                |
| Humidity                          | ±5%                                                                                                                  |
| DC and low frequency voltages     | ±0.4%                                                                                                                |
| Duty Cycle                        | 1%                                                                                                                   |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)                                                                                          |

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2412            | 7       | 2442            |
| 2       | 2417            | 8       | 2447            |
| 3       | 2422            | 9       | 2452            |
| 4       | 2427            | 10      | 2457            |
| 5       | 2432            | 11      | 2462            |
| 6       | 2437            | /       | /               |

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO in 802.11n modes, per pretest, MIMO mode was the worst mode and reported.

### EUT Exercise Software


The software “RF test tool” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

| Mode            | Channel | Frequency (MHz) | Data rate | Power level Setting |         |
|-----------------|---------|-----------------|-----------|---------------------|---------|
|                 |         |                 |           | Chain 0             | Chain 1 |
| 802.11b         | Low     | 2412            | 1 Mbps    | default             | default |
|                 | Middle  | 2437            | 1 Mbps    | default             | default |
|                 | High    | 2462            | 1 Mbps    | default             | default |
| 802.11g         | Low     | 2412            | 6 Mbps    | default             | default |
|                 | Middle  | 2437            | 6 Mbps    | default             | default |
|                 | High    | 2462            | 6 Mbps    | default             | default |
| 802.11n<br>ht20 | Low     | 2412            | MCS8      | default             | default |
|                 | Middle  | 2437            | MCS8      | default             | default |
|                 | High    | 2462            | MCS8      | default             | default |

The maximum duty cycle as following table:


| Test mode    | T <sub>on</sub> (ms) | T <sub>on+off</sub> (ms) | Duty Cycle (%) |
|--------------|----------------------|--------------------------|----------------|
| 802.11b      | 100                  | 100                      | 100            |
| 802.11g      | 1.420                | 1.438                    | 98.75          |
| 802.11n ht20 | 0.695                | 0.726                    | 95.73          |

## 802.11b

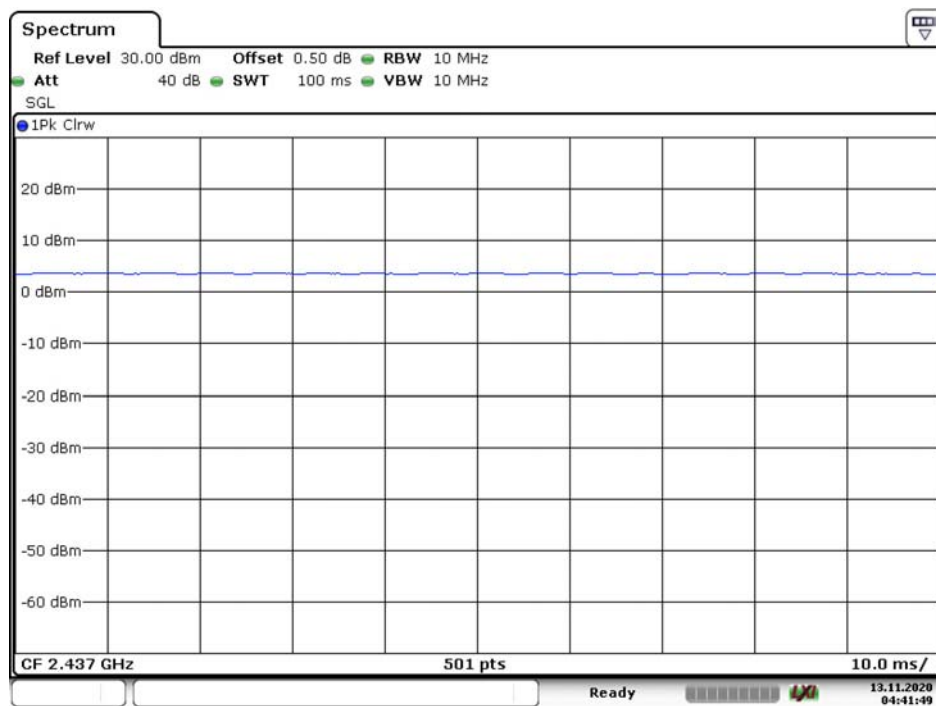

Date: 13.NOV.2020 04:41:49

## 802.11g

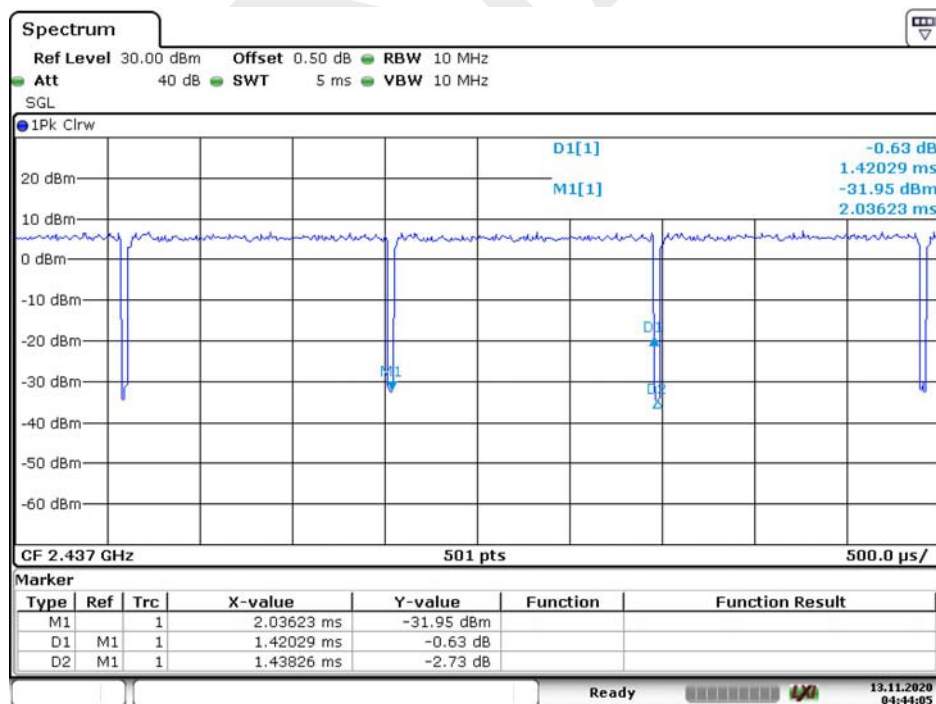


Date: 13.NOV.2020 04:44:05





## Block Diagram of Test Setup

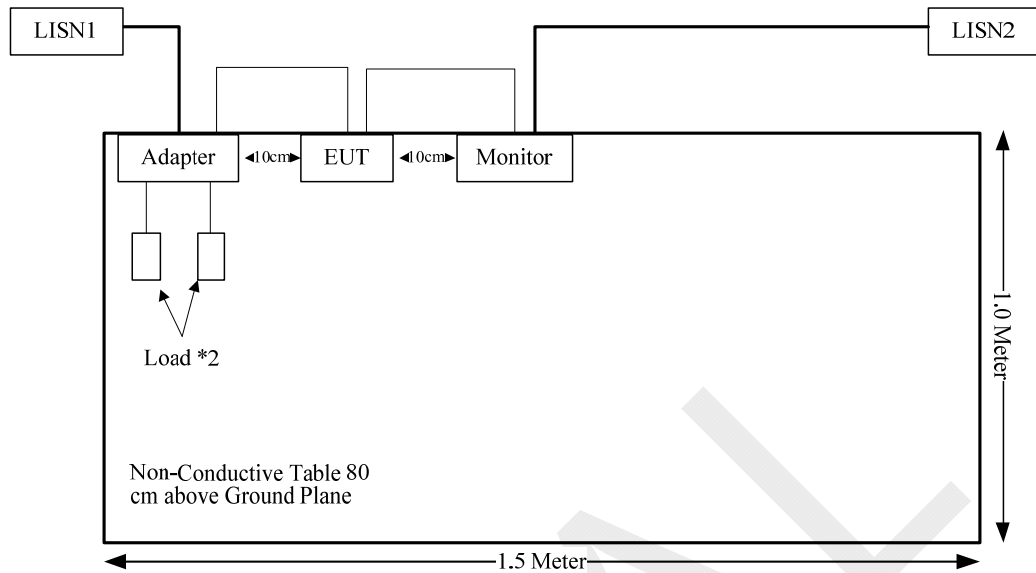

## SUMMARY OF TEST RESULTS

| Rules                                                                             | Description of Test                       | Result     |
|-----------------------------------------------------------------------------------|-------------------------------------------|------------|
| §15.247 (i) & §1.1310 &<br>§2.1093<br>RSS-102 Clause 4                            | RF Exposure                               | Compliance |
| FCC §15.203,<br>RSS-GEN Clause 6.8                                                | Antenna Requirement                       | Compliance |
| FCC §15.207 (a);<br>RSS-Gen Clause 8.8                                            | AC Line Conducted Emissions               | Compliance |
| FCC §15.205, §15.209,<br>§15.247(d);<br>RSS-247 Clause 5.5<br>RSS-Gen Clause 8.10 | Spurious Emissions                        | Compliance |
| FCC §15.247 (a)(2);<br>RSS-247 Clause 5.2 a)<br>RSS-Gen Clause 6.7                | 6 dB Bandwidth and 99% Occupied Bandwidth | Compliance |
| FCC §15.247(b)(3);<br>RSS-247 Clause 5.4 d)                                       | Maximum Conducted Output Power            | Compliance |
| FCC §15.247(d);<br>RSS-247 Clause 5.5                                             | 100 kHz Bandwidth of Frequency Band Edge  | Compliance |
| FCC §15.247(e)<br>RSS-247 Clause 5.2 b)                                           | Power Spectral Density                    | Compliance |

**FCC §15.247 (i) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF Exposure****Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public.

| Body Region                    | Average SAR<br>(W/Kg) | Averaging Time<br>(minutes) | Mass Average<br>(g) |
|--------------------------------|-----------------------|-----------------------------|---------------------|
| Whole Body                     | 0.08                  | 6                           | Whole Body          |
| Localized Head, Neck and Trunk | 1.6                   | 6                           | 1                   |
| Localized Limbs                | 4                     | 6                           | 10                  |

**Test Result**

**Compliance,** Please refer to the SAR report: RSZ201027002-20.

---

**FCC §15.203, RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

## Antenna Connector Construction

The EUT has two internal antennas for Wi-Fi 0, two internal antennas for Wi-Fi 1, two external antennas permanently attached to the unit for SRD, all of them fulfill the requirement of this section. Please refer to the EUT photos.

| Usage   | Antenna Chain | Antenna Type | input impedance (Ohm) | Antenna Gain <sup>Δ</sup> /Frequency Range                        |
|---------|---------------|--------------|-----------------------|-------------------------------------------------------------------|
| Wi-Fi 0 | 0             | FPC          | 50                    | 2.1 dBi/2.4~2.5GHz<br>3.5 dBi/5.15~5.85GHz                        |
|         | 1             | FPC          | 50                    | 2.1 dBi/2.4~2.5GHz<br>4.1dBi/5.15~5.85GHz                         |
| Wi-Fi 1 | 0             | FPC          | 50                    | 4.4 dBi/5.15~5.85GHz                                              |
|         | 1             | FPC          | 50                    | 4.5 dBi/5.15~5.85GHz                                              |
| SRD     | 0             | PCB          | 50                    | 2.2 dBi/902-928 MHz<br>1.3 dBi/2.4~2.5GHz<br>4.0 dBi/5.15~5.85GHz |
|         | 1             | PCB          | 50                    | 2.2 dBi/902-928 MHz<br>1.3 dBi/2.4~2.5GHz<br>4.0 dBi/5.15~5.85GHz |


**Result:** Compliance.

## FCC §15.207 (a), RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a), RSS-Gen§8.8.

### EUT Setup

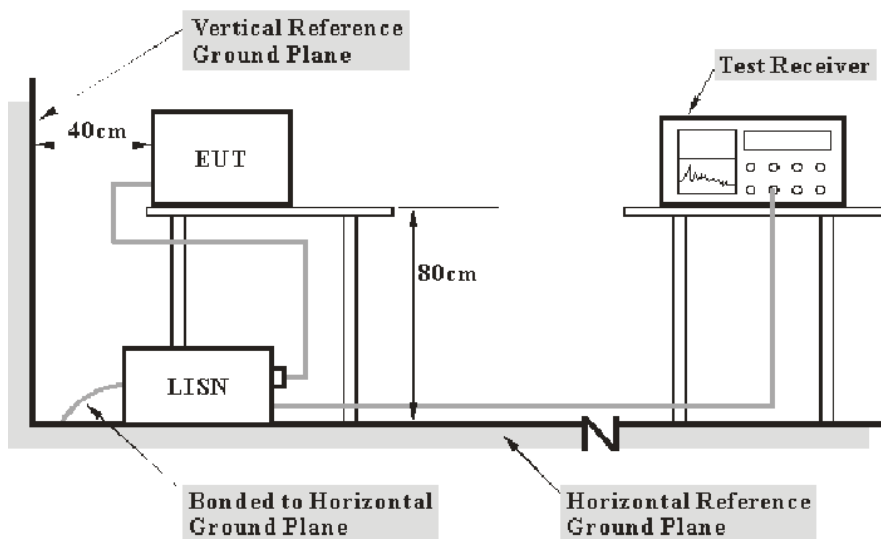

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and the RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer | Description       | Model     | Serial Number   | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------|-----------------|------------------|----------------------|
| R&S          | LISN              | ENV 216   | 101614          | 2020-09-12       | 2021-09-12           |
| R&S          | EMI Test Receiver | ESCI      | 101121          | 2020-07-07       | 2021-07-07           |
| MICRO-COAX   | Coaxial Cable     | C-NJNJ-50 | C-0200-01       | 2020-09-05       | 2021-09-05           |
| R&S          | Test Software     | EMC32     | Version 9.10.00 | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


## Test Data

### Environmental Conditions

|                    |             |
|--------------------|-------------|
| Temperature:       | 25.1°C      |
| Relative Humidity: | 60%         |
| ATM Pressure:      | 101.2kPa    |
| Tester:            | Walker Chen |
| Test Date:         | 2021-04-21  |

Test Mode: Transmitting (Wi-Fi mode 802.11b middle channel was the worst)


### AC120 V, 60 Hz, Line:

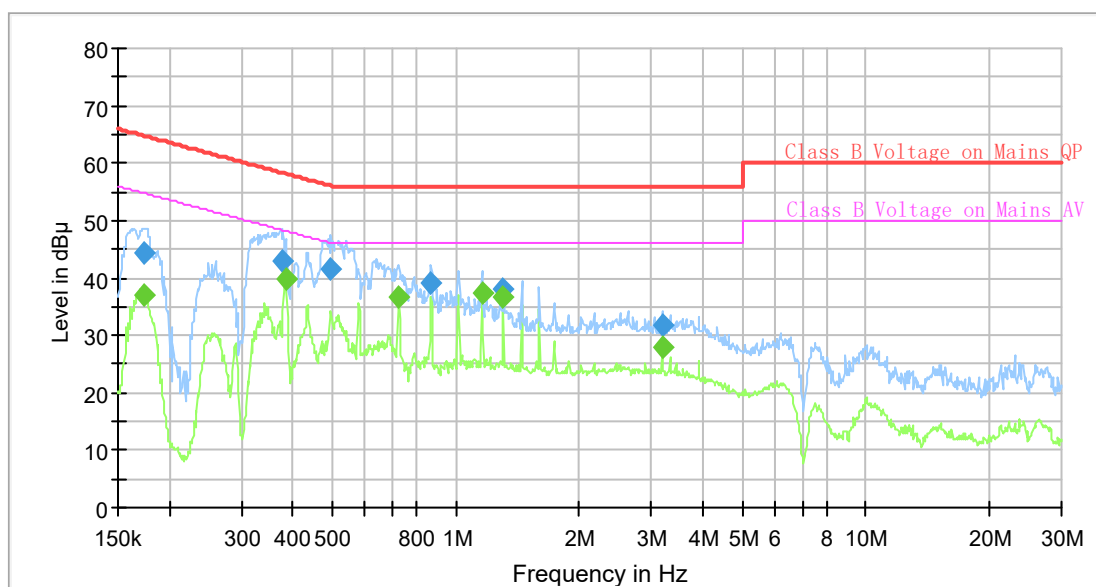

## Final Result

| Frequency (MHz) | QuasiPeak (dB μV) | Average (dB μV) | Limit (dB μV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.173343        | ---               | 37.12           | 54.80         | 17.68       | 9.000           | L1   | 9.6        |
| 0.174210        | 44.33             | ---             | 64.76         | 20.43       | 9.000           | L1   | 9.6        |
| 0.375532        | 43.00             | ---             | 58.38         | 15.38       | 9.000           | L1   | 9.6        |
| 0.385014        | ---               | 39.71           | 48.17         | 8.46        | 9.000           | L1   | 9.6        |
| 0.496531        | 41.74             | ---             | 56.06         | 14.32       | 9.000           | L1   | 9.6        |
| 0.725382        | ---               | 36.62           | 46.00         | 9.38        | 9.000           | L1   | 9.7        |
| 0.868051        | 39.17             | ---             | 56.00         | 16.83       | 9.000           | L1   | 9.7        |
| 1.159249        | ---               | 37.32           | 46.00         | 8.68        | 9.000           | L1   | 9.7        |
| 1.306658        | 38.20             | ---             | 56.00         | 17.80       | 9.000           | L1   | 9.7        |
| 1.306658        | ---               | 36.54           | 46.00         | 9.46        | 9.000           | L1   | 9.7        |
| 3.190708        | ---               | 27.81           | 46.00         | 18.19       | 9.000           | L1   | 9.7        |
| 3.190708        | 31.94             | ---             | 56.00         | 24.06       | 9.000           | L1   | 9.7        |

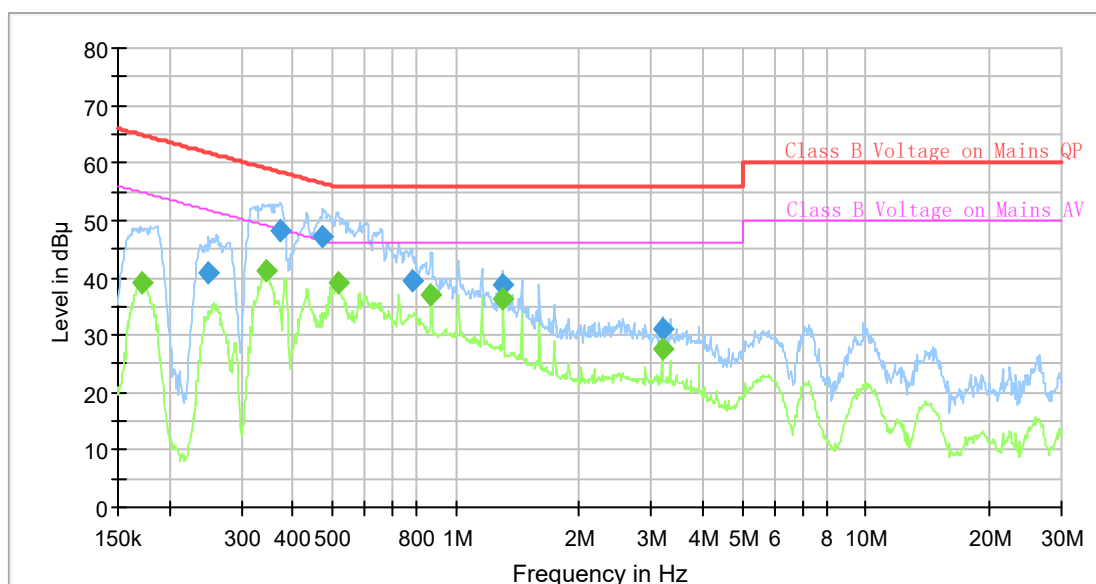

**AC120 V, 60 Hz, Neutral:****Final Result**

| Frequency (MHz) | QuasiPeak (dB μV) | Average (dB μV) | Limit (dB μV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.170769        | ---               | 39.10           | 54.92         | 15.82       | 9.000           | N    | 9.6        |
| 0.249476        | 40.75             | ---             | 61.77         | 21.02       | 9.000           | N    | 9.6        |
| 0.343287        | ---               | 41.11           | 49.12         | 8.01        | 9.000           | N    | 9.6        |
| 0.373663        | 48.18             | ---             | 58.42         | 10.24       | 9.000           | N    | 9.6        |
| 0.474735        | 47.27             | ---             | 56.43         | 9.16        | 9.000           | N    | 9.6        |
| 0.516743        | ---               | 39.20           | 46.00         | 6.80        | 9.000           | N    | 9.6        |
| 0.781732        | 39.38             | ---             | 56.00         | 16.62       | 9.000           | N    | 9.6        |
| 0.868051        | ---               | 37.11           | 46.00         | 8.89        | 9.000           | N    | 9.6        |
| 1.306658        | 38.89             | ---             | 56.00         | 17.11       | 9.000           | N    | 9.6        |
| 1.306658        | ---               | 36.37           | 46.00         | 9.63        | 9.000           | N    | 9.6        |
| 3.190708        | ---               | 27.65           | 46.00         | 18.35       | 9.000           | N    | 9.6        |
| 3.190708        | 31.09             | ---             | 56.00         | 24.91       | 9.000           | N    | 9.6        |


## FCC §15.209, §15.205 & §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.

### EUT Setup

#### Below 1GHz:

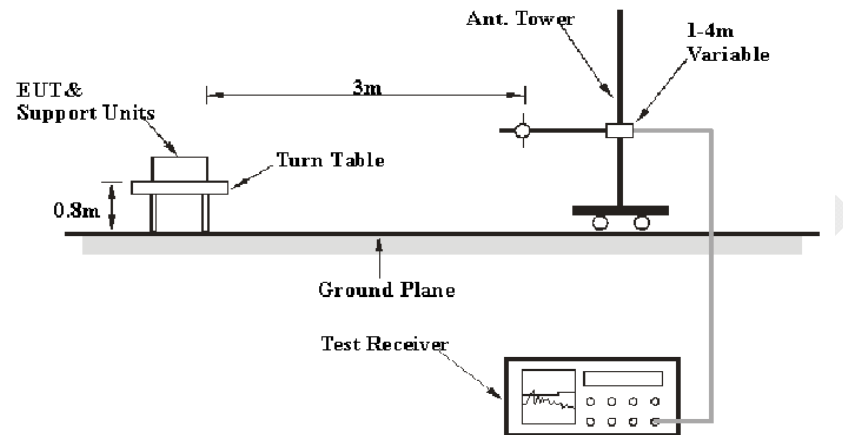

#### Above 1GHz:

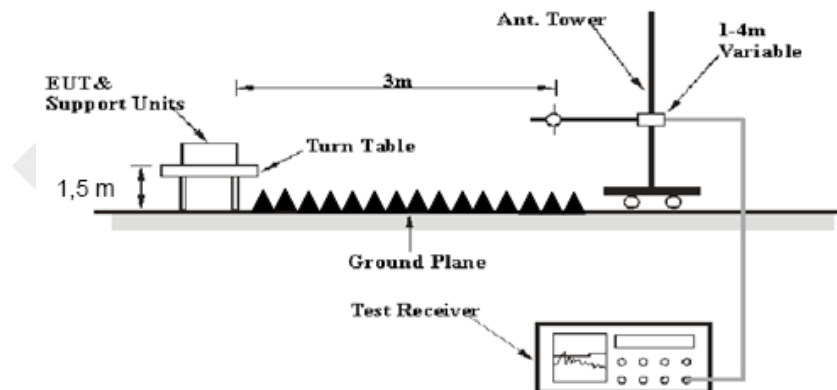

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

| Measurement | RBW     | Video B/W | IF B/W |
|-------------|---------|-----------|--------|
| QP          | 120 kHz | 300 kHz   | 120kHz |

1GHz- 25GHz:

| Measurement | Duty cycle | RBW  | Video B/W |
|-------------|------------|------|-----------|
| PK          | Any        | 1MHz | 3 MHz     |
| AV          | >98%       | 1MHz | 10 Hz     |
|             | <98%       | 1MHz | 1/T       |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

| Manufacturer          | Description       | Model              | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|--------------------|--------------------|------------------|----------------------|
| Radiation Below 1GHz  |                   |                    |                    |                  |                      |
| Sunol Sciences        | Antenna           | JB3                | A060611-1          | 2020-11-10       | 2023-11-10           |
| R&S                   | EMI Test Receiver | ESR3               | 102453             | 2020-09-12       | 2021-09-12           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-0075-01          | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-0400-01          | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-1400-01          | 2020-05-06       | 2021-05-06           |
| HP                    | Amplifier         | 8447D              | 2727A05902         | 2020-09-05       | 2021-09-05           |
| Farad                 | Test Software     | EZ-EMC             | V1.1.4.2           | N/A              | N/A                  |
| Radiation Above 1GHz  |                   |                    |                    |                  |                      |
| TDK RF                | Horn Antenna      | HRN-0118           | 130 084            | 2018-10-12       | 2021-10-12           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02        | 1007726-01<br>1304 | 2020-12-05       | 2023-12-04           |
| R&S                   | Spectrum Analyzer | FSP 38             | 100478             | 2020-07-07       | 2021-07-07           |
| HUBER+SUHNER          | Coaxial Cable     | SUCOFLEX 126EA     | MY369/26/26E<br>A  | 2020-09-25       | 2021-09-25           |
| Mini                  | Pre-amplifier     | ZVA-183-S+         | 5969001149         | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-0200-02          | 2020-09-05       | 2021-09-05           |
| Quinstar              | Amplifier         | QLW-18405536-JO    | 15964001001        | 2020-06-27       | 2021-06-27           |
| Farad                 | Test Software     | EZ-EMC             | V1.1.4.2           | N/A              | N/A                  |
| E-Microwave           | Band-stop Filters | OBSF-2400-2483.5-S | OE01601525         | 2020-06-16       | 2021-06-16           |
| Micro-tronics         | High Pass Filter  | HPM50111           | S/N-G217           | 2020-06-16       | 2021-06-16           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


| Test Items         | Radiation Below 1GHz | Radiation Above 1GHz |
|--------------------|----------------------|----------------------|
| Temperature:       | 25.8°C               | 26.8°C               |
| Relative Humidity: | 51%                  | 47%                  |
| ATM Pressure:      | 101.3kPa             | 101.2 kPa            |
| Tester:            | Joker Chen           | Lee Li               |
| Test Date:         | 2021-04-20           | 2021-04-21           |

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

## 1) 30MHz-1GHz(802.11b mode low channel was the worst)

## Horizontal:

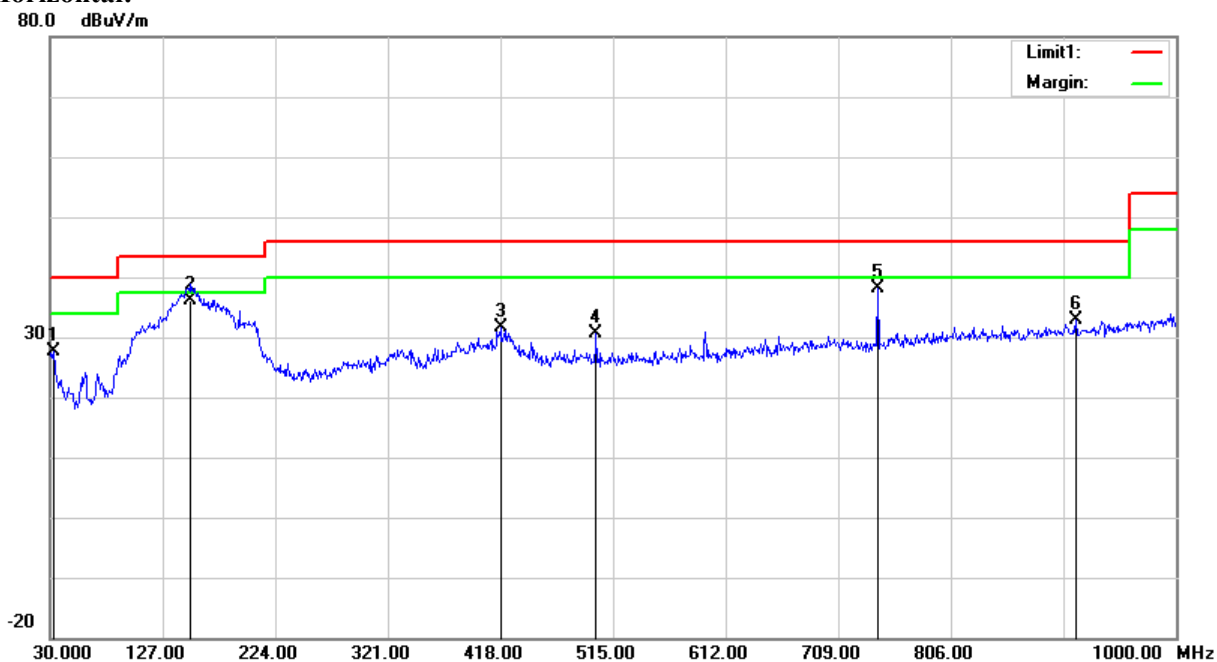

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 32.9100         | 28.32                   | peak     | -0.76                    | 27.56               | 40.00          | 12.44       |
| 151.2500        | 42.35                   | QP       | -6.18                    | 36.17               | 43.50          | 7.33        |
| 418.0000        | 33.38                   | peak     | -1.74                    | 31.64               | 46.00          | 14.36       |
| 500.4500        | 31.09                   | peak     | -0.39                    | 30.70               | 46.00          | 15.30       |
| 742.9500        | 35.28                   | peak     | 2.92                     | 38.20               | 46.00          | 7.80        |
| 913.6700        | 27.37                   | peak     | 5.56                     | 32.93               | 46.00          | 13.07       |

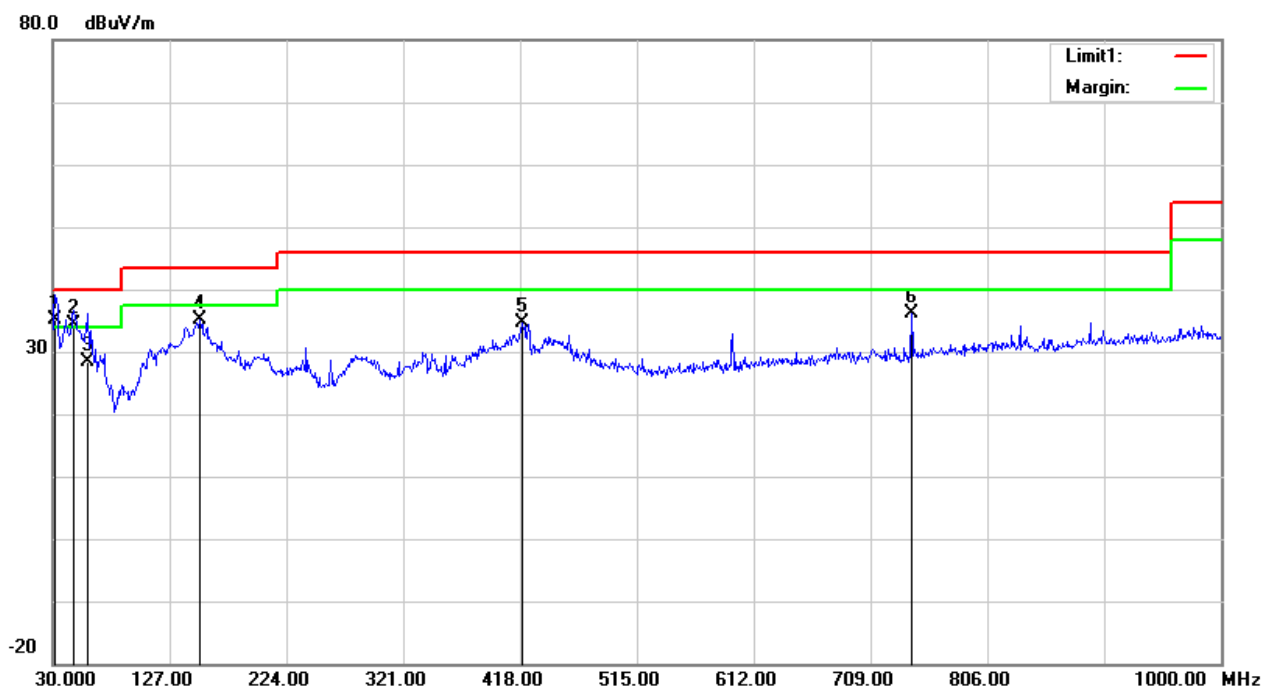**Vertical:**

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 31.9400         | 35.12                   | QP       | 0.01                     | 35.13               | 40.00          | 4.87        |
| 47.4600         | 44.97                   | QP       | -10.56                   | 34.41               | 40.00          | 5.59        |
| 59.1000         | 40.70                   | QP       | -12.42                   | 28.28               | 40.00          | 11.72       |
| 152.2200        | 41.37                   | peak     | -6.18                    | 35.19               | 43.50          | 8.31        |
| 419.9400        | 36.33                   | peak     | -1.65                    | 34.68               | 46.00          | 11.32       |
| 742.9500        | 33.24                   | peak     | 2.92                     | 36.16               | 46.00          | 9.84        |

## 2) 1-25GHz:

## 802.11b Mode, Chain 0:

| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2412.00                  | 65.91             | PK       | H              | 28.12            | 1.81                  | 0.00                      | 95.84                              | N/A               | N/A            |
| 2412.00                  | 62.95             | AV       | H              | 28.12            | 1.81                  | 0.00                      | 92.88                              | N/A               | N/A            |
| 2412.00                  | 69.67             | PK       | V              | 28.12            | 1.81                  | 0.00                      | 99.60                              | N/A               | N/A            |
| 2412.00                  | 65.40             | AV       | V              | 28.12            | 1.81                  | 0.00                      | 95.33                              | N/A               | N/A            |
| 2390.00                  | 27.46             | PK       | V              | 28.08            | 1.80                  | 0.00                      | 57.34                              | 74.00             | 16.66          |
| 2390.00                  | 16.97             | AV       | V              | 28.08            | 1.80                  | 0.00                      | 46.85                              | 54.00             | 7.15           |
| 4824.00                  | 37.67             | PK       | V              | 32.95            | 3.19                  | 25.62                     | 48.19                              | 74.00             | 25.81          |
| 4824.00                  | 28.45             | AV       | V              | 32.95            | 3.19                  | 25.62                     | 38.97                              | 54.00             | 15.03          |
| 7236.00                  | 35.72             | PK       | V              | 35.81            | 4.77                  | 25.64                     | 50.66                              | 74.00             | 23.34          |
| 7236.00                  | 22.44             | AV       | V              | 35.81            | 4.77                  | 25.64                     | 37.38                              | 54.00             | 16.62          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2437.00                  | 65.60             | PK       | H              | 28.17            | 1.82                  | 0.00                      | 95.59                              | N/A               | N/A            |
| 2437.00                  | 63.12             | AV       | H              | 28.17            | 1.82                  | 0.00                      | 93.11                              | N/A               | N/A            |
| 2437.00                  | 71.64             | PK       | V              | 28.17            | 1.82                  | 0.00                      | 101.63                             | N/A               | N/A            |
| 2437.00                  | 68.71             | AV       | V              | 28.17            | 1.82                  | 0.00                      | 98.70                              | N/A               | N/A            |
| 4874.00                  | 36.14             | PK       | V              | 33.05            | 3.26                  | 25.65                     | 46.80                              | 74.00             | 27.20          |
| 4874.00                  | 27.93             | AV       | V              | 33.05            | 3.26                  | 25.65                     | 38.59                              | 54.00             | 15.41          |
| 7311.00                  | 35.17             | PK       | V              | 36.01            | 4.64                  | 25.71                     | 50.11                              | 74.00             | 23.89          |
| 7311.00                  | 21.91             | AV       | V              | 36.01            | 4.64                  | 25.71                     | 36.85                              | 54.00             | 17.15          |
| High Channel: 2462 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2462.00                  | 65.35             | PK       | H              | 28.22            | 1.83                  | 0.00                      | 95.40                              | N/A               | N/A            |
| 2462.00                  | 62.78             | AV       | H              | 28.22            | 1.83                  | 0.00                      | 92.83                              | N/A               | N/A            |
| 2462.00                  | 70.58             | PK       | V              | 28.22            | 1.83                  | 0.00                      | 100.63                             | N/A               | N/A            |
| 2462.00                  | 67.32             | AV       | V              | 28.22            | 1.83                  | 0.00                      | 97.37                              | N/A               | N/A            |
| 2483.50                  | 28.34             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 58.45                              | 74.00             | 15.55          |
| 2483.50                  | 17.21             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 47.32                              | 54.00             | 6.68           |
| 4924.00                  | 39.14             | PK       | V              | 33.15            | 3.27                  | 25.65                     | 49.91                              | 74.00             | 24.09          |
| 4924.00                  | 28.92             | AV       | V              | 33.15            | 3.27                  | 25.65                     | 39.69                              | 54.00             | 14.31          |
| 7386.00                  | 35.18             | PK       | V              | 36.20            | 4.51                  | 25.79                     | 50.10                              | 74.00             | 23.90          |
| 7386.00                  | 21.91             | AV       | V              | 36.20            | 4.51                  | 25.79                     | 36.83                              | 54.00             | 17.17          |

**802.11b Mode, Chain 1:**

| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2412.00                  | 70.16             | PK       | H              | 28.12            | 1.81                  | 0.00                      | 100.09                             | N/A               | N/A            |
| 2412.00                  | 66.63             | AV       | H              | 28.12            | 1.81                  | 0.00                      | 96.56                              | N/A               | N/A            |
| 2412.00                  | 68.54             | PK       | V              | 28.12            | 1.81                  | 0.00                      | 98.47                              | N/A               | N/A            |
| 2412.00                  | 65.14             | AV       | V              | 28.12            | 1.81                  | 0.00                      | 95.07                              | N/A               | N/A            |
| 2390.00                  | 26.89             | PK       | V              | 28.08            | 1.80                  | 0.00                      | 56.77                              | 74.00             | 17.23          |
| 2390.00                  | 17.03             | AV       | V              | 28.08            | 1.80                  | 0.00                      | 46.91                              | 54.00             | 7.09           |
| 4824.00                  | 41.00             | PK       | V              | 32.95            | 3.19                  | 25.62                     | 51.52                              | 74.00             | 22.48          |
| 4824.00                  | 33.31             | AV       | V              | 32.95            | 3.19                  | 25.62                     | 43.83                              | 54.00             | 10.17          |
| 7236.00                  | 35.51             | PK       | V              | 35.81            | 4.77                  | 25.64                     | 50.45                              | 74.00             | 23.55          |
| 7236.00                  | 22.94             | AV       | V              | 35.81            | 4.77                  | 25.64                     | 37.88                              | 54.00             | 16.12          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2437.00                  | 69.78             | PK       | H              | 28.17            | 1.82                  | 0.00                      | 99.77                              | N/A               | N/A            |
| 2437.00                  | 67.05             | AV       | H              | 28.17            | 1.82                  | 0.00                      | 97.04                              | N/A               | N/A            |
| 2437.00                  | 71.41             | PK       | V              | 28.17            | 1.82                  | 0.00                      | 101.40                             | N/A               | N/A            |
| 2437.00                  | 68.05             | AV       | V              | 28.17            | 1.82                  | 0.00                      | 98.04                              | N/A               | N/A            |
| 4874.00                  | 36.52             | PK       | V              | 33.05            | 3.26                  | 25.65                     | 47.18                              | 74.00             | 26.82          |
| 4874.00                  | 25.56             | AV       | V              | 33.05            | 3.26                  | 25.65                     | 36.22                              | 54.00             | 17.78          |
| 7311.00                  | 35.81             | PK       | V              | 36.01            | 4.64                  | 25.71                     | 50.75                              | 74.00             | 23.25          |
| 7311.00                  | 23.65             | AV       | V              | 36.01            | 4.64                  | 25.71                     | 38.59                              | 54.00             | 15.41          |
| High Channel: 2462 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2462.00                  | 70.04             | PK       | H              | 28.22            | 1.83                  | 0.00                      | 100.09                             | N/A               | N/A            |
| 2462.00                  | 67.31             | AV       | H              | 28.22            | 1.83                  | 0.00                      | 97.36                              | N/A               | N/A            |
| 2462.00                  | 71.67             | PK       | V              | 28.22            | 1.83                  | 0.00                      | 101.72                             | N/A               | N/A            |
| 2462.00                  | 68.27             | AV       | V              | 28.22            | 1.83                  | 0.00                      | 98.32                              | N/A               | N/A            |
| 2483.50                  | 27.33             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 57.44                              | 74.00             | 16.56          |
| 2483.50                  | 17.41             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 47.52                              | 54.00             | 6.48           |
| 4924.00                  | 36.26             | PK       | V              | 33.15            | 3.27                  | 25.65                     | 47.03                              | 74.00             | 26.97          |
| 4924.00                  | 25.26             | AV       | V              | 33.15            | 3.27                  | 25.65                     | 36.03                              | 54.00             | 17.97          |
| 7386.00                  | 35.45             | PK       | V              | 36.20            | 4.51                  | 25.79                     | 50.37                              | 74.00             | 23.63          |
| 7386.00                  | 23.39             | AV       | V              | 36.20            | 4.51                  | 25.79                     | 38.31                              | 54.00             | 15.69          |



**802.11g Mode, Chain 0:**

| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2412.00                  | 64.93             | PK       | H              | 28.12            | 1.81                  | 0.00                      | 94.86                              | N/A               | N/A            |
| 2412.00                  | 56.30             | AV       | H              | 28.12            | 1.81                  | 0.00                      | 86.23                              | N/A               | N/A            |
| 2412.00                  | 72.57             | PK       | V              | 28.12            | 1.81                  | 0.00                      | 102.50                             | N/A               | N/A            |
| 2412.00                  | 63.96             | AV       | V              | 28.12            | 1.81                  | 0.00                      | 93.89                              | N/A               | N/A            |
| 2390.00                  | 31.50             | PK       | V              | 28.08            | 1.80                  | 0.00                      | 61.38                              | 74.00             | 12.62          |
| 2390.00                  | 18.67             | AV       | V              | 28.08            | 1.80                  | 0.00                      | 48.55                              | 54.00             | 5.45           |
| 4824.00                  | 36.48             | PK       | V              | 32.95            | 3.19                  | 25.62                     | 47.00                              | 74.00             | 27.00          |
| 4824.00                  | 25.85             | AV       | V              | 32.95            | 3.19                  | 25.62                     | 36.37                              | 54.00             | 17.63          |
| 7236.00                  | 35.51             | PK       | V              | 35.81            | 4.77                  | 25.64                     | 50.45                              | 74.00             | 23.55          |
| 7236.00                  | 23.59             | AV       | V              | 35.81            | 4.77                  | 25.64                     | 38.53                              | 54.00             | 15.47          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2437.00                  | 64.11             | PK       | H              | 28.17            | 1.82                  | 0.00                      | 94.10                              | N/A               | N/A            |
| 2437.00                  | 53.47             | AV       | H              | 28.17            | 1.82                  | 0.00                      | 83.46                              | N/A               | N/A            |
| 2437.00                  | 73.53             | PK       | V              | 28.17            | 1.82                  | 0.00                      | 103.52                             | N/A               | N/A            |
| 2437.00                  | 64.63             | AV       | V              | 28.17            | 1.82                  | 0.00                      | 94.62                              | N/A               | N/A            |
| 4874.00                  | 35.99             | PK       | V              | 33.05            | 3.26                  | 25.65                     | 46.65                              | 74.00             | 27.35          |
| 4874.00                  | 25.05             | AV       | V              | 33.05            | 3.26                  | 25.65                     | 35.71                              | 54.00             | 18.29          |
| 7311.00                  | 35.22             | PK       | V              | 36.01            | 4.64                  | 25.71                     | 50.16                              | 74.00             | 23.84          |
| 7311.00                  | 23.21             | AV       | V              | 36.01            | 4.64                  | 25.71                     | 38.15                              | 54.00             | 15.85          |
| High Channel: 2462 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2462.00                  | 64.32             | PK       | H              | 28.22            | 1.83                  | 0.00                      | 94.37                              | N/A               | N/A            |
| 2462.00                  | 53.68             | AV       | H              | 28.22            | 1.83                  | 0.00                      | 83.73                              | N/A               | N/A            |
| 2462.00                  | 73.71             | PK       | V              | 28.22            | 1.83                  | 0.00                      | 103.76                             | N/A               | N/A            |
| 2462.00                  | 64.84             | AV       | V              | 28.22            | 1.83                  | 0.00                      | 94.89                              | N/A               | N/A            |
| 2483.50                  | 36.25             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 66.36                              | 74.00             | 7.64           |
| 2483.50                  | 22.51             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 52.62                              | 54.00             | 1.38           |
| 4924.00                  | 37.81             | PK       | V              | 33.15            | 3.27                  | 25.65                     | 48.58                              | 74.00             | 25.42          |
| 4924.00                  | 26.73             | AV       | V              | 33.15            | 3.27                  | 25.65                     | 37.50                              | 54.00             | 16.50          |
| 7386.00                  | 34.86             | PK       | V              | 36.20            | 4.51                  | 25.79                     | 49.78                              | 74.00             | 24.22          |
| 7386.00                  | 22.76             | AV       | V              | 36.20            | 4.51                  | 25.79                     | 37.68                              | 54.00             | 16.32          |

**802.11g Mode, Chain 1:**




| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2412.00                  | 72.16             | PK       | H              | 28.12            | 1.81                  | 0.00                      | 102.09                             | N/A               | N/A            |
| 2412.00                  | 63.29             | AV       | H              | 28.12            | 1.81                  | 0.00                      | 93.22                              | N/A               | N/A            |
| 2412.00                  | 73.51             | PK       | V              | 28.12            | 1.81                  | 0.00                      | 103.44                             | N/A               | N/A            |
| 2412.00                  | 64.06             | AV       | V              | 28.12            | 1.81                  | 0.00                      | 93.99                              | N/A               | N/A            |
| 2390.00                  | 29.32             | PK       | V              | 28.08            | 1.80                  | 0.00                      | 59.20                              | 74.00             | 14.80          |
| 2390.00                  | 18.47             | AV       | V              | 28.08            | 1.80                  | 0.00                      | 48.35                              | 54.00             | 5.65           |
| 4824.00                  | 38.99             | PK       | V              | 32.95            | 3.19                  | 25.62                     | 49.51                              | 74.00             | 24.49          |
| 4824.00                  | 27.26             | AV       | V              | 32.95            | 3.19                  | 25.62                     | 37.78                              | 54.00             | 16.22          |
| 7236.00                  | 35.38             | PK       | V              | 35.81            | 4.77                  | 25.64                     | 50.32                              | 74.00             | 23.68          |
| 7236.00                  | 23.75             | AV       | V              | 35.81            | 4.77                  | 25.64                     | 38.69                              | 54.00             | 15.31          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2437.00                  | 72.52             | PK       | H              | 28.17            | 1.82                  | 0.00                      | 102.51                             | N/A               | N/A            |
| 2437.00                  | 63.66             | AV       | H              | 28.17            | 1.82                  | 0.00                      | 93.65                              | N/A               | N/A            |
| 2437.00                  | 73.81             | PK       | V              | 28.17            | 1.82                  | 0.00                      | 103.80                             | N/A               | N/A            |
| 2437.00                  | 64.42             | AV       | V              | 28.17            | 1.82                  | 0.00                      | 94.41                              | N/A               | N/A            |
| 4874.00                  | 39.61             | PK       | V              | 33.05            | 3.26                  | 25.65                     | 50.27                              | 74.00             | 23.73          |
| 4874.00                  | 29.48             | AV       | V              | 33.05            | 3.26                  | 25.65                     | 40.14                              | 54.00             | 13.86          |
| 7311.00                  | 35.25             | PK       | V              | 36.01            | 4.64                  | 25.71                     | 50.19                              | 74.00             | 23.81          |
| 7311.00                  | 24.03             | AV       | V              | 36.01            | 4.64                  | 25.71                     | 38.97                              | 54.00             | 15.03          |
| High Channel: 2462 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2462.00                  | 71.22             | PK       | H              | 28.22            | 1.83                  | 0.00                      | 101.27                             | N/A               | N/A            |
| 2462.00                  | 62.86             | AV       | H              | 28.22            | 1.83                  | 0.00                      | 92.91                              | N/A               | N/A            |
| 2462.00                  | 74.47             | PK       | V              | 28.22            | 1.83                  | 0.00                      | 104.52                             | N/A               | N/A            |
| 2462.00                  | 65.54             | AV       | V              | 28.22            | 1.83                  | 0.00                      | 95.59                              | N/A               | N/A            |
| 2483.50                  | 32.11             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 62.22                              | 74.00             | 11.78          |
| 2483.50                  | 19.04             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 49.15                              | 54.00             | 4.85           |
| 4924.00                  | 38.58             | PK       | V              | 33.15            | 3.27                  | 25.65                     | 49.35                              | 74.00             | 24.65          |
| 4924.00                  | 27.16             | AV       | V              | 33.15            | 3.27                  | 25.65                     | 37.93                              | 54.00             | 16.07          |
| 7386.00                  | 35.97             | PK       | V              | 36.20            | 4.51                  | 25.79                     | 50.89                              | 74.00             | 23.11          |
| 7386.00                  | 24.79             | AV       | V              | 36.20            | 4.51                  | 25.79                     | 39.71                              | 54.00             | 14.29          |

**802.11n ht20 Mode(MIMO was the worst):**




| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2412.00                  | 72.95             | PK       | H              | 28.12            | 1.81                  | 0.00                      | 102.88                             | N/A               | N/A            |
| 2412.00                  | 62.59             | AV       | H              | 28.12            | 1.81                  | 0.00                      | 92.52                              | N/A               | N/A            |
| 2412.00                  | 76.56             | PK       | V              | 28.12            | 1.81                  | 0.00                      | 106.49                             | N/A               | N/A            |
| 2412.00                  | 66.84             | AV       | V              | 28.12            | 1.81                  | 0.00                      | 96.77                              | N/A               | N/A            |
| 2390.00                  | 35.98             | PK       | V              | 28.08            | 1.80                  | 0.00                      | 65.86                              | 74.00             | 8.14           |
| 2390.00                  | 20.70             | AV       | V              | 28.08            | 1.80                  | 0.00                      | 50.58                              | 54.00             | 3.42           |
| 4824.00                  | 36.32             | PK       | V              | 32.95            | 3.19                  | 25.62                     | 46.84                              | 74.00             | 27.16          |
| 4824.00                  | 24.03             | AV       | V              | 32.95            | 3.19                  | 25.62                     | 34.55                              | 54.00             | 19.45          |
| 7236.00                  | 35.08             | PK       | V              | 35.81            | 4.77                  | 25.64                     | 50.02                              | 74.00             | 23.98          |
| 7236.00                  | 23.19             | AV       | V              | 35.81            | 4.77                  | 25.64                     | 38.13                              | 54.00             | 15.87          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2437.00                  | 73.07             | PK       | H              | 28.17            | 1.82                  | 0.00                      | 103.06                             | N/A               | N/A            |
| 2437.00                  | 62.78             | AV       | H              | 28.17            | 1.82                  | 0.00                      | 92.77                              | N/A               | N/A            |
| 2437.00                  | 76.68             | PK       | V              | 28.17            | 1.82                  | 0.00                      | 106.67                             | N/A               | N/A            |
| 2437.00                  | 66.94             | AV       | V              | 28.17            | 1.82                  | 0.00                      | 96.93                              | N/A               | N/A            |
| 4874.00                  | 36.23             | PK       | V              | 33.05            | 3.26                  | 25.65                     | 46.89                              | 74.00             | 27.11          |
| 4874.00                  | 23.98             | AV       | V              | 33.05            | 3.26                  | 25.65                     | 34.64                              | 54.00             | 19.36          |
| 7311.00                  | 34.99             | PK       | V              | 36.01            | 4.64                  | 25.71                     | 49.93                              | 74.00             | 24.07          |
| 7311.00                  | 23.16             | AV       | V              | 36.01            | 4.64                  | 25.71                     | 38.10                              | 54.00             | 15.90          |
| High Channel: 2462 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2462.00                  | 73.22             | PK       | H              | 28.22            | 1.83                  | 0.00                      | 103.27                             | N/A               | N/A            |
| 2462.00                  | 63.56             | AV       | H              | 28.22            | 1.83                  | 0.00                      | 93.61                              | N/A               | N/A            |
| 2462.00                  | 77.25             | PK       | V              | 28.22            | 1.83                  | 0.00                      | 107.30                             | N/A               | N/A            |
| 2462.00                  | 67.32             | AV       | V              | 28.22            | 1.83                  | 0.00                      | 97.37                              | N/A               | N/A            |
| 2483.50                  | 38.82             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 68.93                              | 74.00             | 5.07           |
| 2483.50                  | 23.84             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 53.95                              | 54.00             | 0.05           |
| 4924.00                  | 36.41             | PK       | V              | 33.15            | 3.27                  | 25.65                     | 47.18                              | 74.00             | 26.82          |
| 4924.00                  | 24.15             | AV       | V              | 33.15            | 3.27                  | 25.65                     | 34.92                              | 54.00             | 19.08          |
| 7386.00                  | 35.17             | PK       | V              | 36.20            | 4.51                  | 25.79                     | 50.09                              | 74.00             | 23.91          |
| 7386.00                  | 23.28             | AV       | V              | 36.20            | 4.51                  | 25.79                     | 38.20                              | 54.00             | 15.80          |

Test plots(802.11b chain 1, Low channel was the worst)

Horizontal:

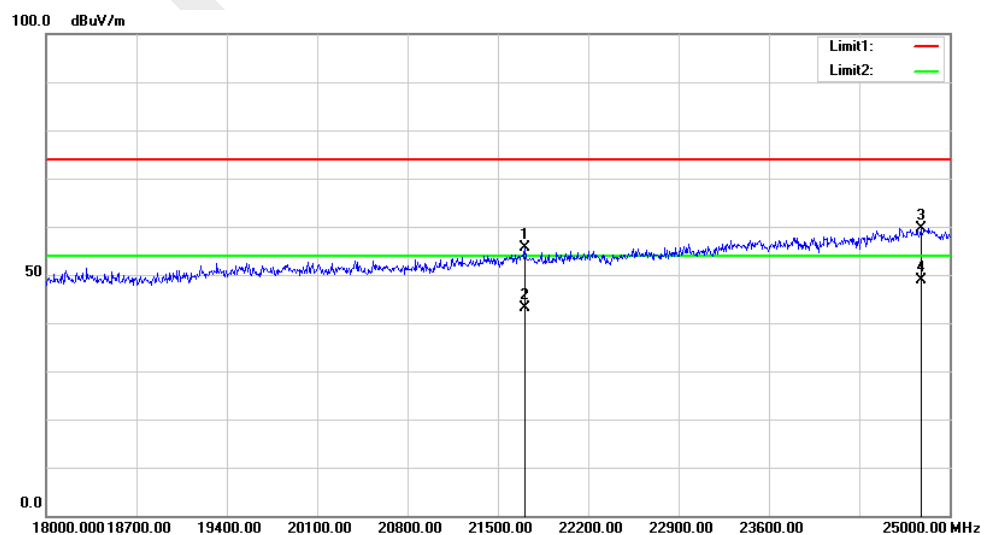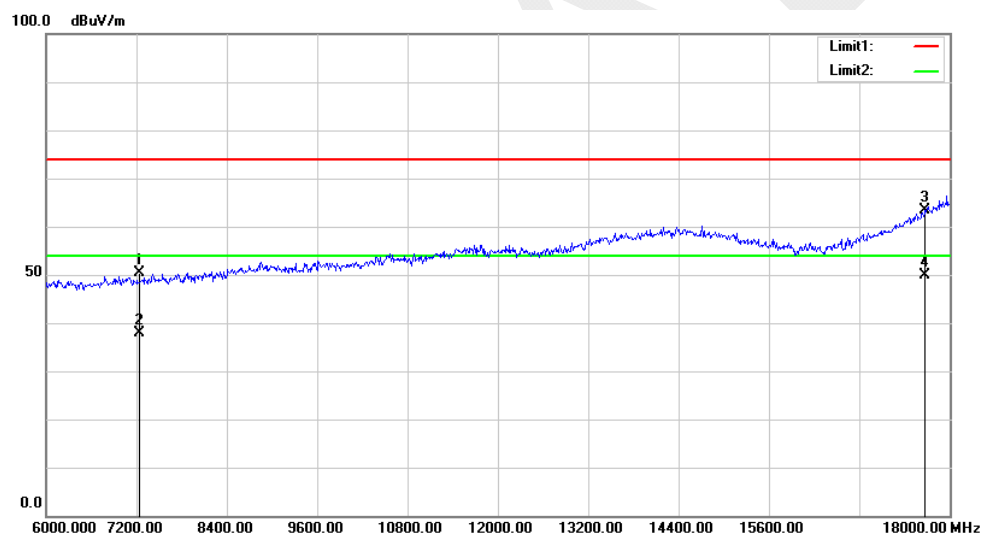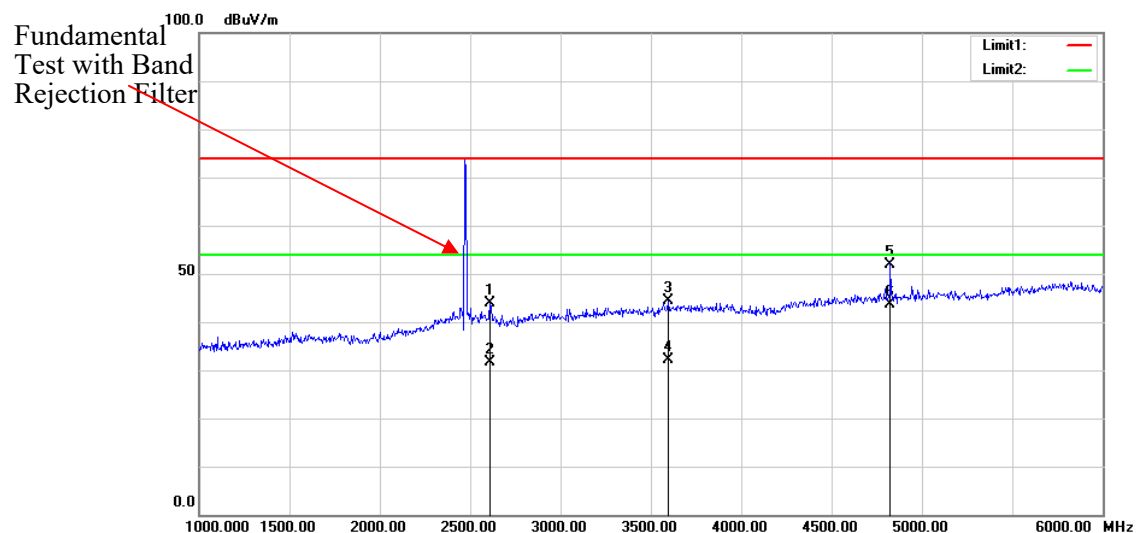

Vertical:

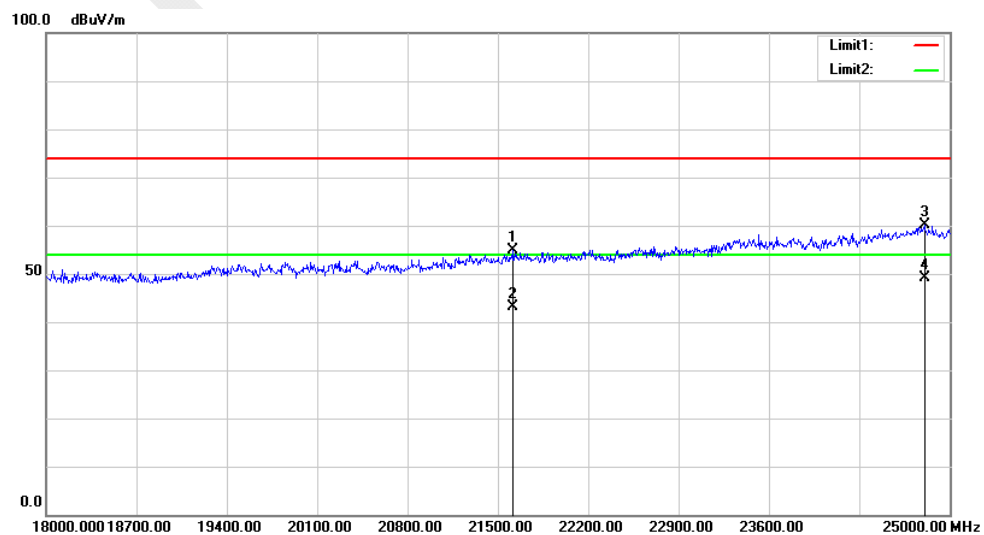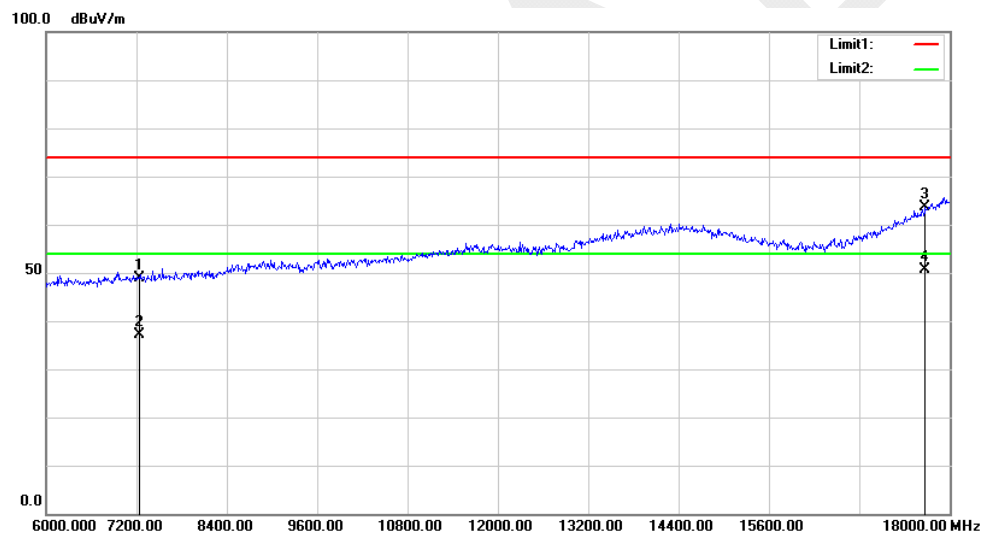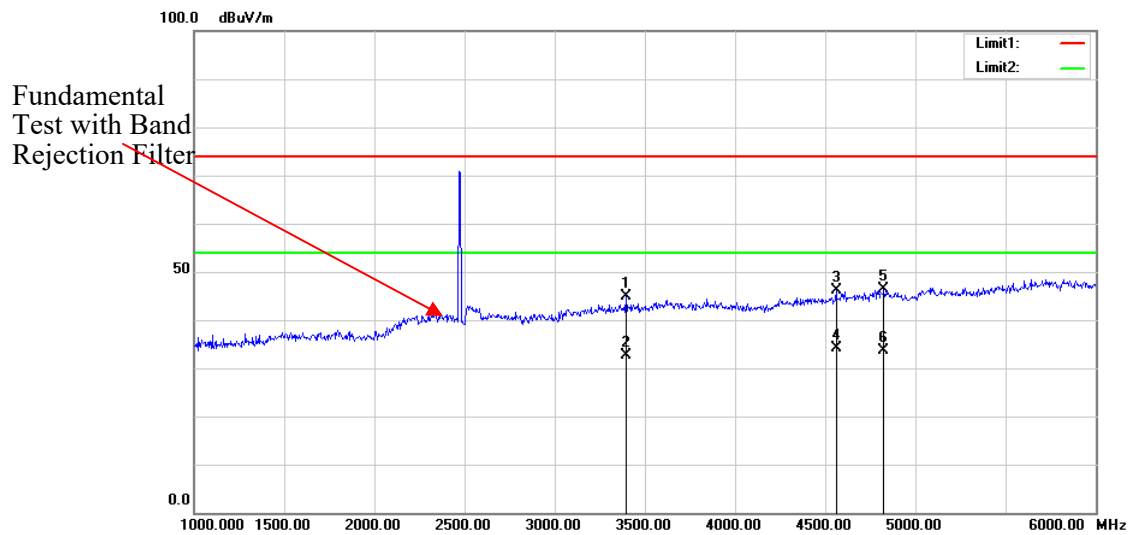

## **FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) & RSS-GEN CLAUSE 6.7– 6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH**

### **Applicable Standard**

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

## Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- h) Test 99% Occupied bandwidth use the function 99% OBW of the test equipment.



## Test Equipment List and Details

| Manufacturer | Description       | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40         | 101474        | 2020-07-07       | 2021-07-07           |
| yzjingcheng  | Coaxial Cable     | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| E-Microwave  | Blocking Control  | EMDCB-00036   | 0E01201048    | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 26.1 °C    |
| Relative Humidity: | 47 %       |
| ATM Pressure:      | 101 kPa    |
| Tester:            | Rennes Guo |
| Test Date:         | 2020-11-07 |


Test Mode: Transmitting

Test Result: Compliant. Test only performed at chain 0. Please refer to the following table and plots.

| Test mode    | Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (MHz) |
|--------------|---------|-----------------|----------------------|---------------------|-------------|
| 802.11b      | Low     | 2412            | 8.640                | 11.816              | $\geq 0.5$  |
|              | Middle  | 2437            | 8.560                | 11.657              | $\geq 0.5$  |
|              | High    | 2462            | 9.040                | 11.737              | $\geq 0.5$  |
| 802.11g      | Low     | 2412            | 16.480               | 17.246              | $\geq 0.5$  |
|              | Middle  | 2437            | 16.480               | 17.166              | $\geq 0.5$  |
|              | High    | 2462            | 16.480               | 17.246              | $\geq 0.5$  |
| 802.11n ht20 | Low     | 2412            | 17.600               | 18.363              | $\geq 0.5$  |
|              | Middle  | 2437            | 17.680               | 18.363              | $\geq 0.5$  |
|              | High    | 2462            | 17.600               | 18.363              | $\geq 0.5$  |


6 dB Bandwidth:

### 802.11b Low Channel

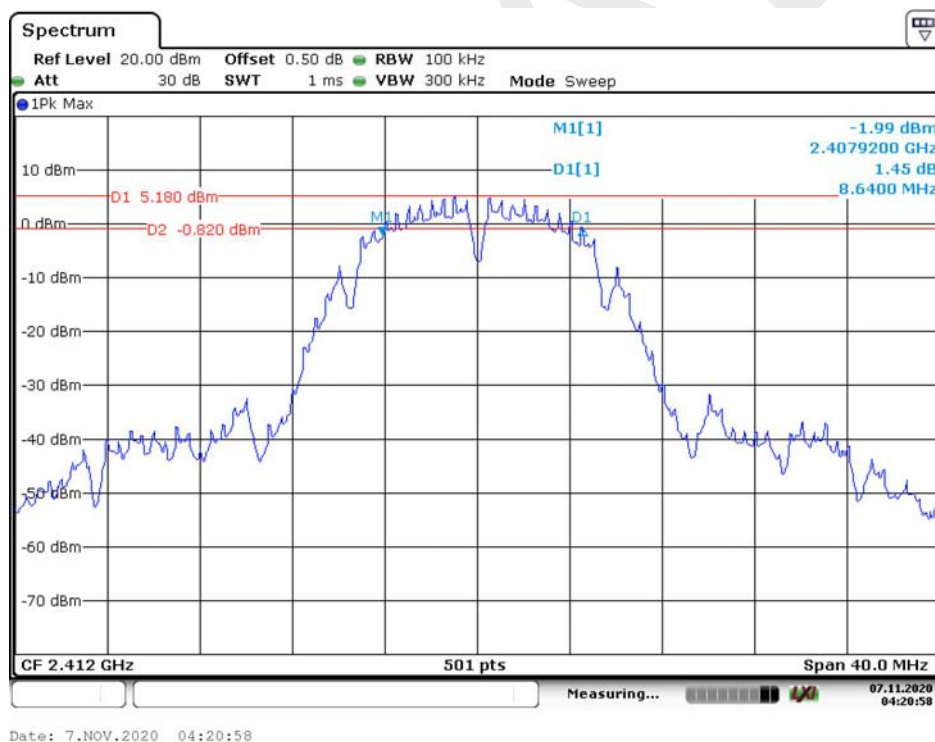




## 802.11b Middle Channel

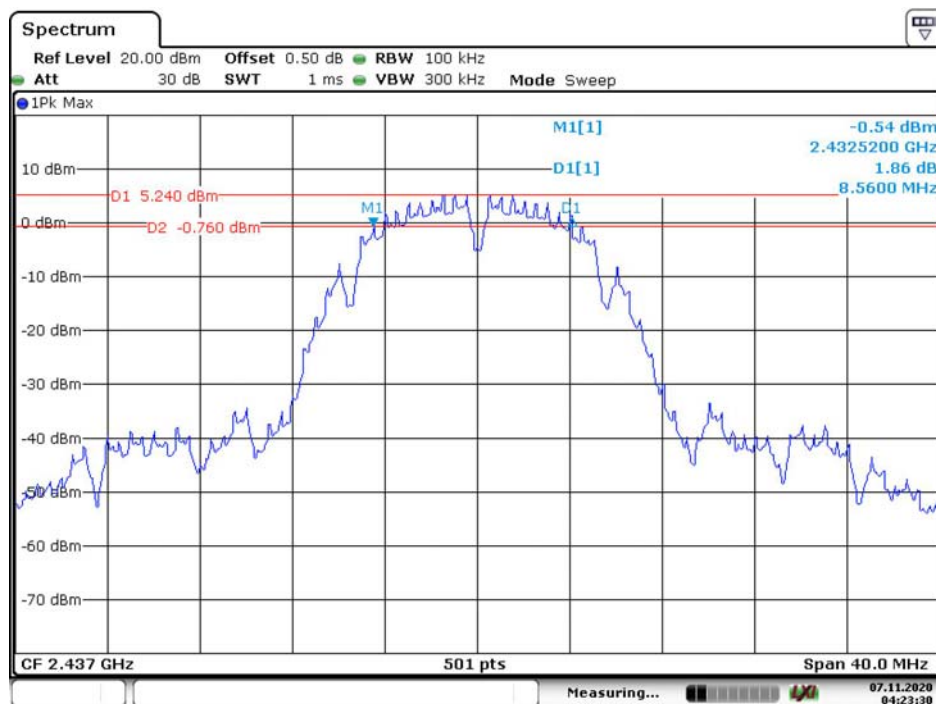


Date: 7.NOV.2020 04:23:30

## 802.11b High Channel

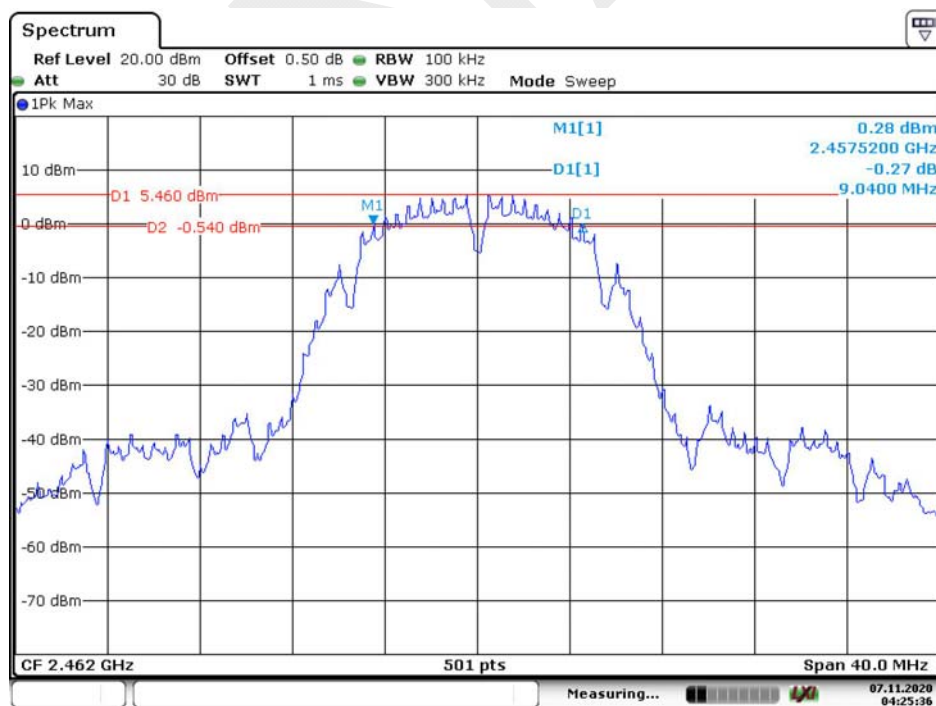


Date: 7.NOV.2020 04:25:36

## 802.11g Low Channel

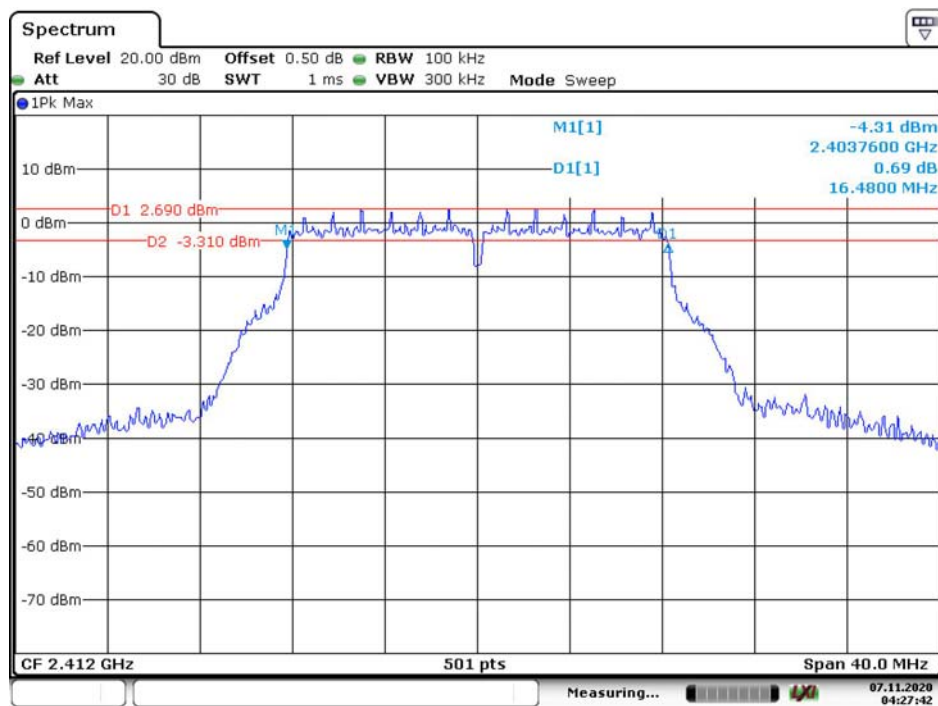


Date: 7.NOV.2020 04:27:42

## 802.11g Middle Channel

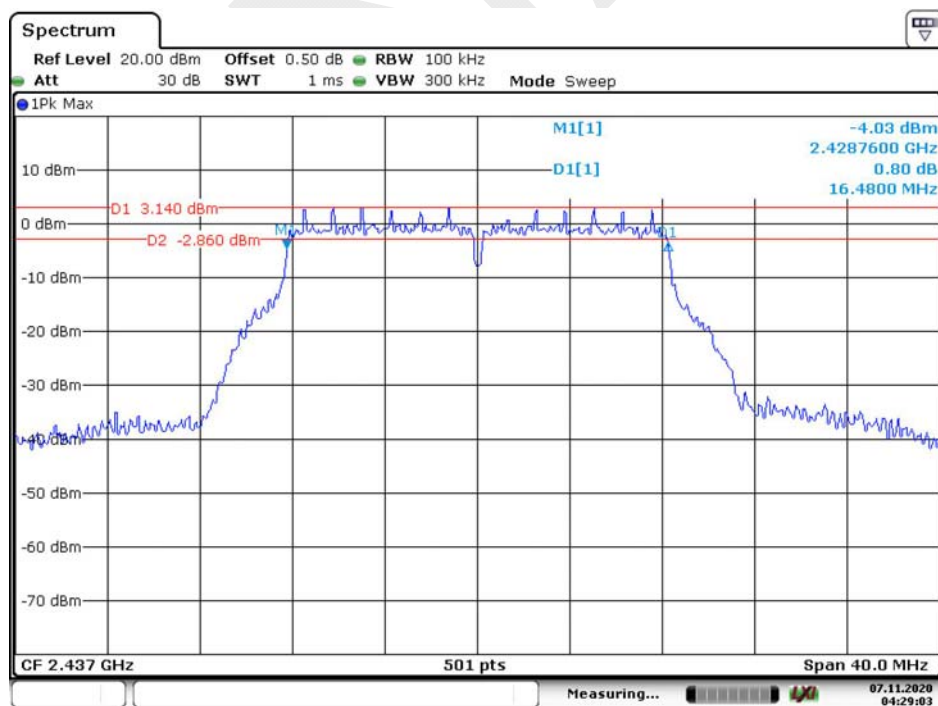


Date: 7.NOV.2020 04:29:03

## 802.11g High Channel

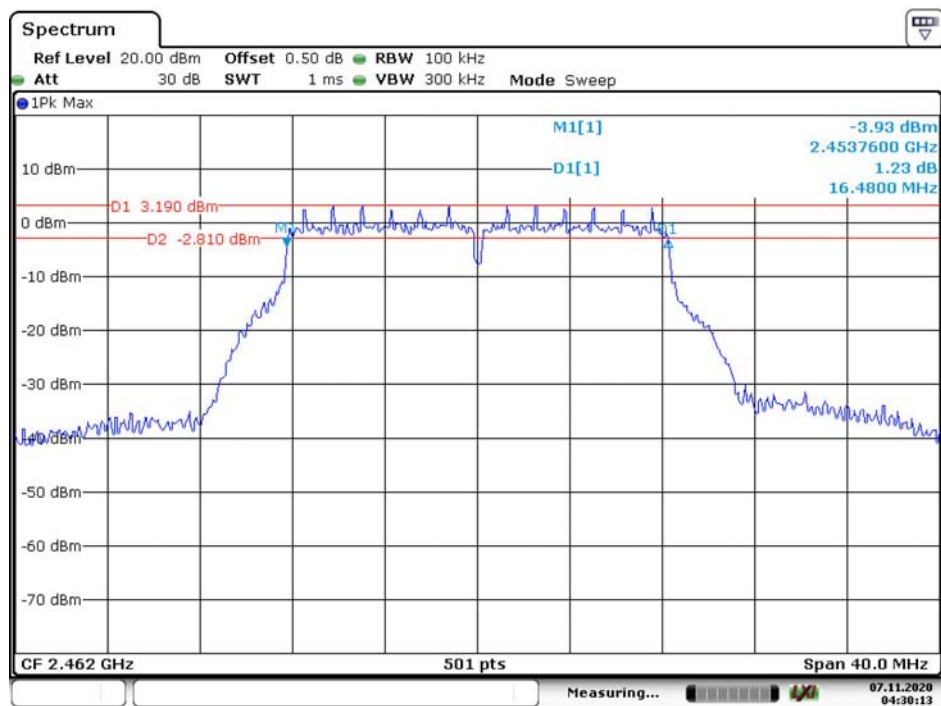


Date: 7.NOV.2020 04:30:14

## 802.11n ht20 Low Channel

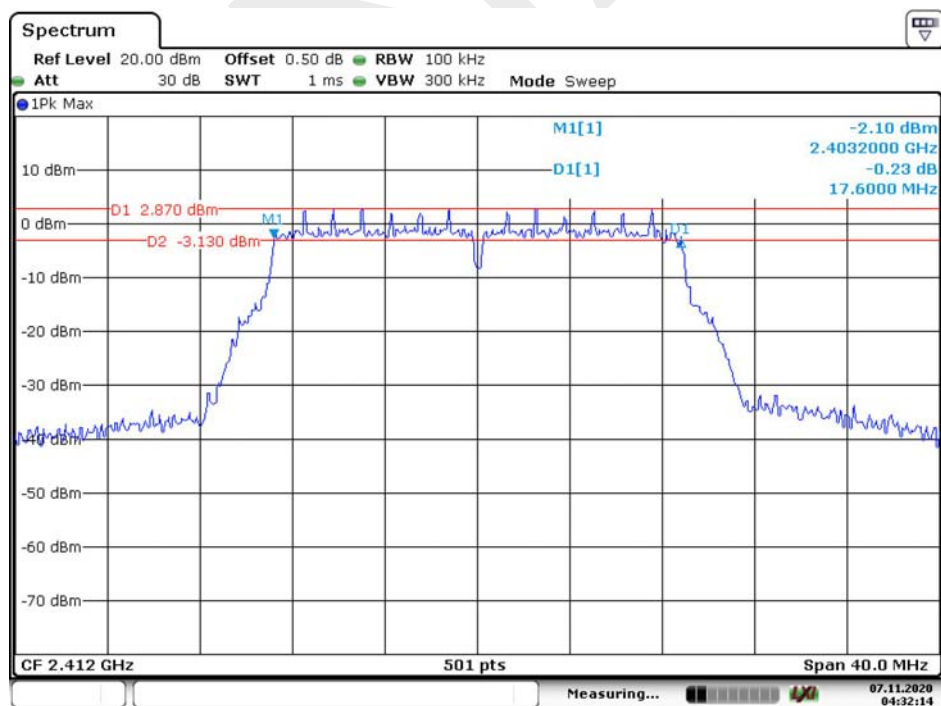


Date: 7.NOV.2020 04:32:15

## 802.11n ht20 Middle Channel

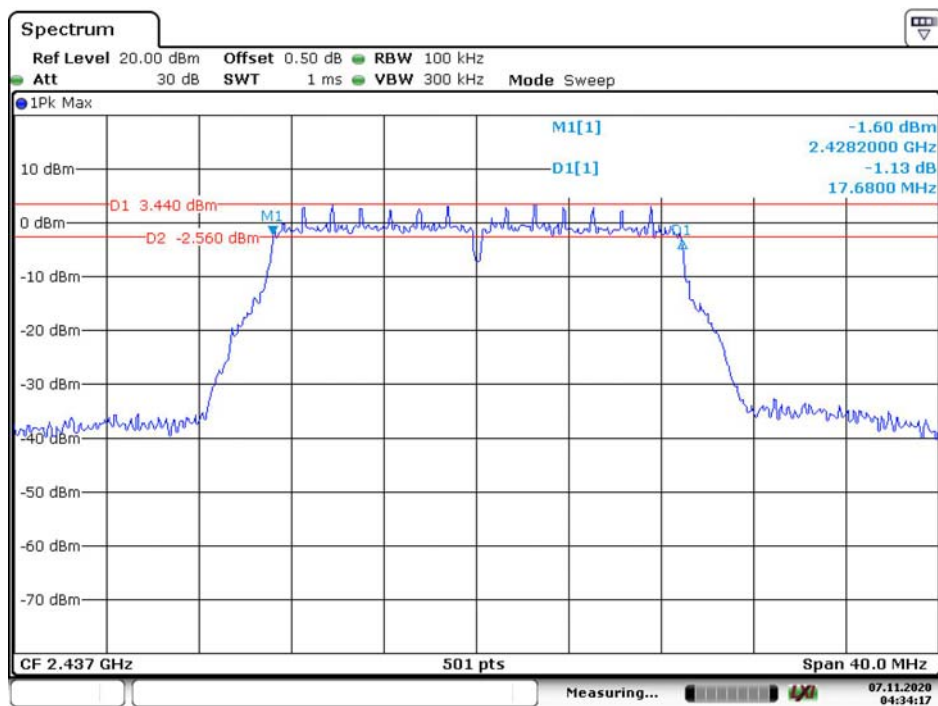

Date: 7.NOV.2020 04:34:17


## 802.11n ht20 High Channel

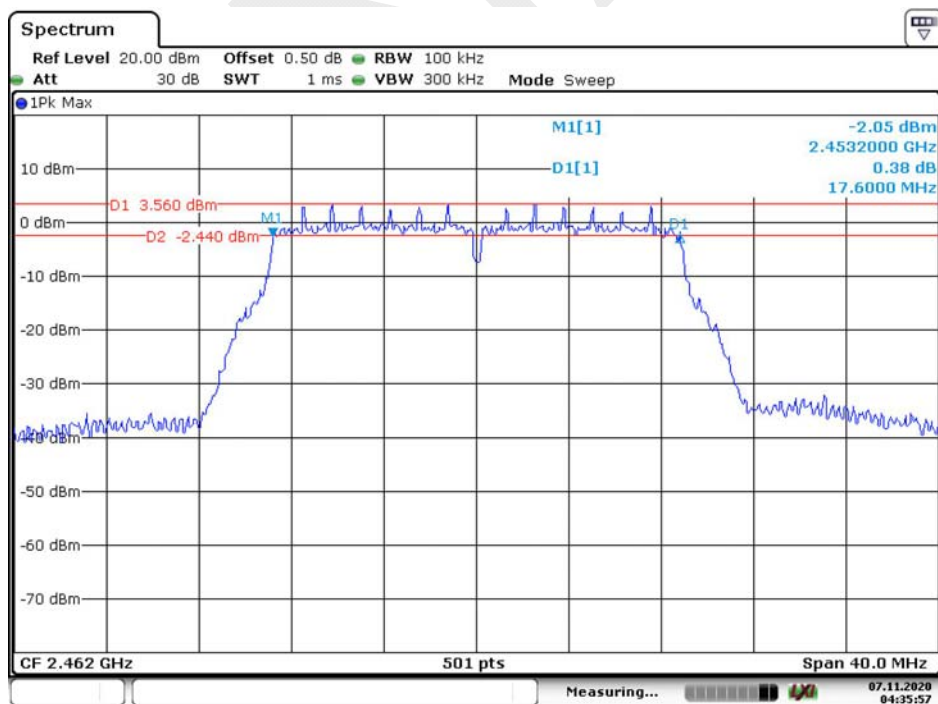


Date: 7.NOV.2020 04:35:57

## 99% occupied Bandwidth

## 802.11b Low Channel

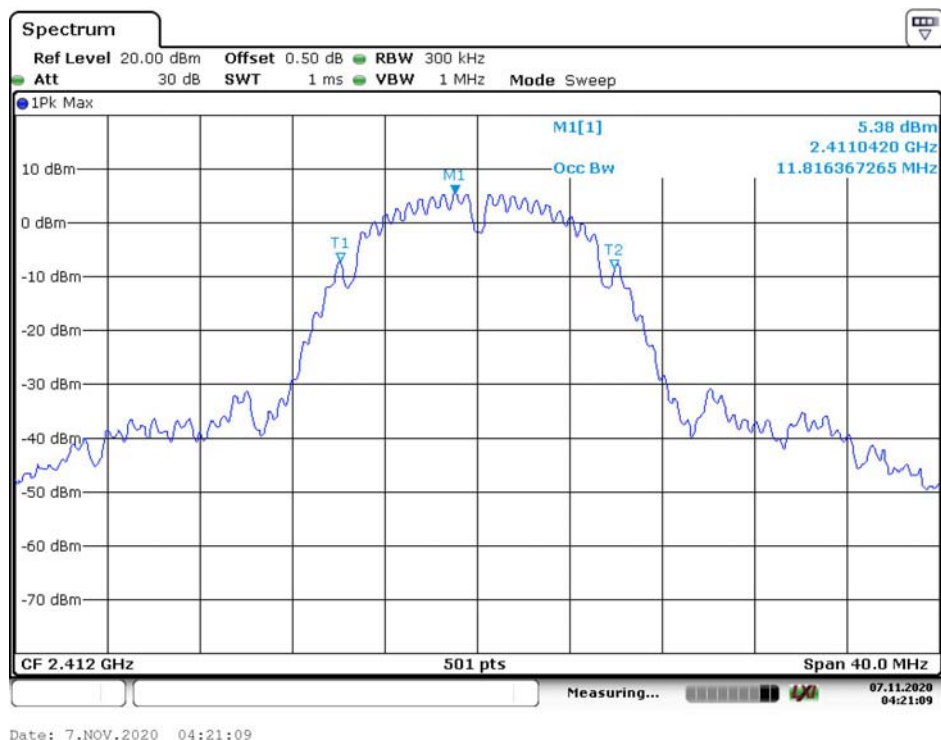

## 802.11b Middle Channel

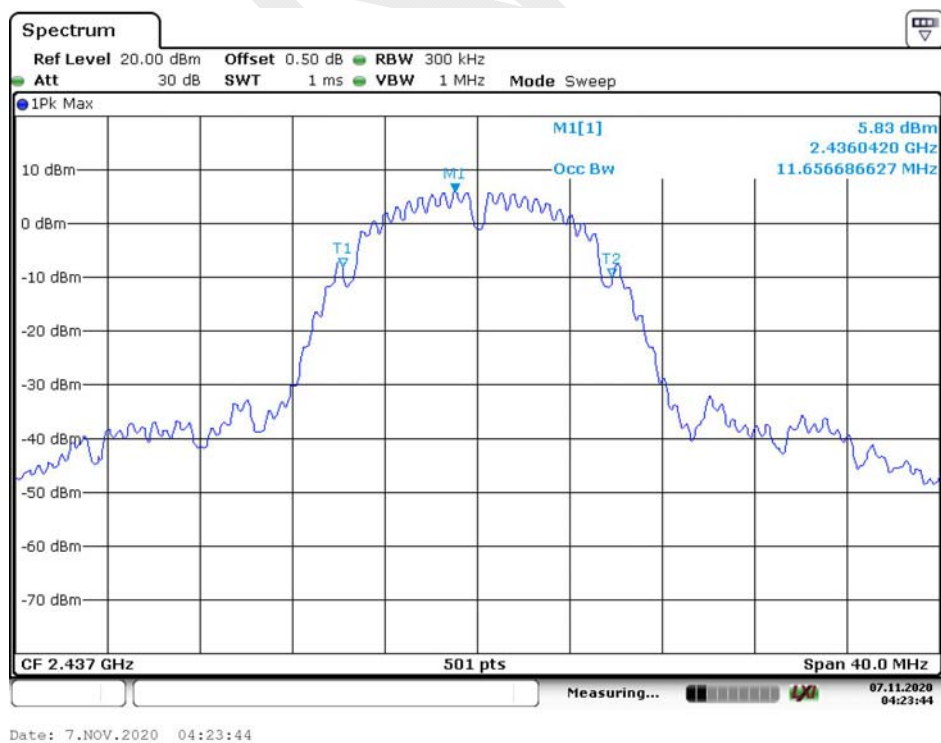


## 802.11b High Channel



Date: 7.NOV.2020 04:25:50

## 802.11g Low Channel

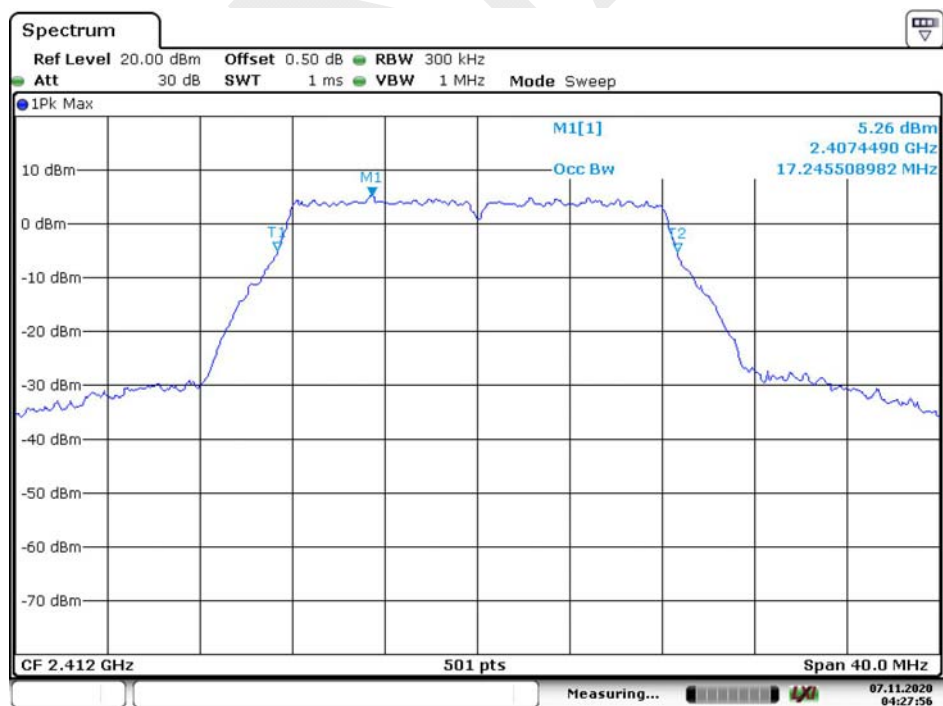


Date: 7.NOV.2020 04:27:56

## 802.11g Middle Channel



Date: 7.NOV.2020 04:29:17

## 802.11g High Channel

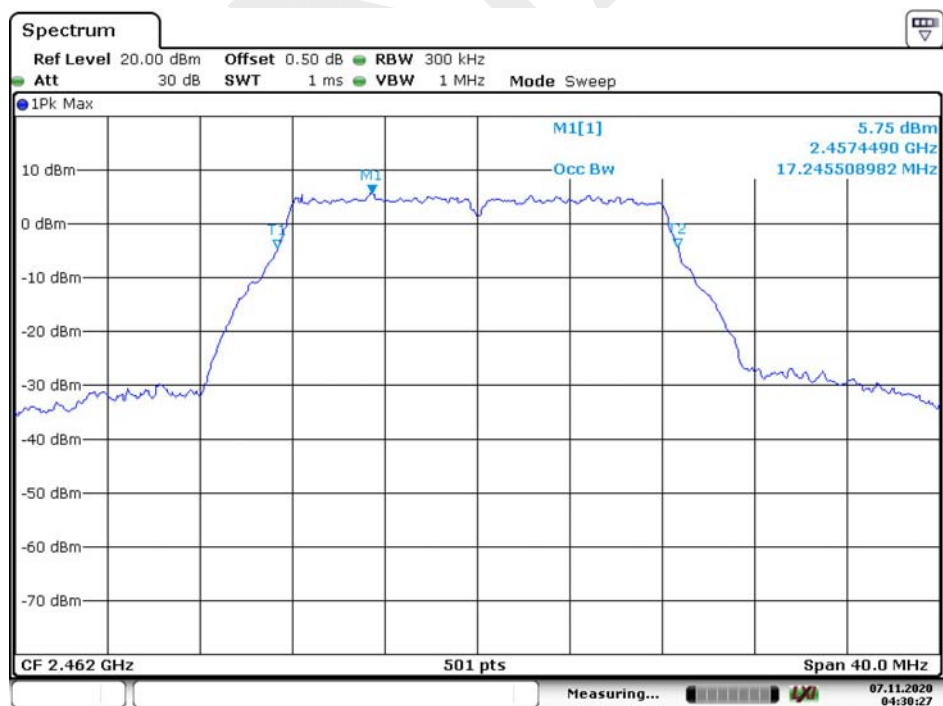

Date: 7.NOV.2020 04:30:27



## 802.11n ht20 Low Channel



Date: 7.NOV.2020 04:32:41

## 802.11n ht20 Middle Channel



Date: 7.NOV.2020 04:34:38



# 802.11n ht20 High Channel



Date: 7.NOV.2020 04:36:20

## FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

### Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



### Test Equipment List and Details

| Manufacturer | Description               | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|---------------------------|---------------|---------------|------------------|----------------------|
| yzjingcheng  | Coaxial Cable             | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| E-Microwave  | Coaxial Attenuators       | EMCA10-5RN-6  | OE01203239    | Each time        | N/A                  |
| Agilent      | USB Wideband Power Sensor | U2021XA       | MY54080014    | 2020-09-12       | 2021-09-12           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 26.1 °C    |
| <b>Relative Humidity:</b> | 41 %       |
| <b>ATM Pressure:</b>      | 101.5 kPa  |
| <b>Tester:</b>            | Rennes Guo |
| <b>Test Date:</b>         | 2020-11-13 |

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

| Mode       | Channel | Frequency (MHz) | Maximum Conducted Peak Output Power (dBm) |         |       |        |
|------------|---------|-----------------|-------------------------------------------|---------|-------|--------|
|            |         |                 | Chain 0                                   | Chain 1 | Total | Limits |
| 802.11 b   | Low     | 2412            | 18.52                                     | 17.61   | /     | ≤30    |
|            | Middle  | 2437            | 19.21                                     | 18.62   | /     | ≤30    |
|            | High    | 2462            | 19.11                                     | 18.49   | /     | ≤30    |
| 802.11 g   | Low     | 2412            | 22.01                                     | 20.92   | /     | ≤30    |
|            | Middle  | 2437            | 22.41                                     | 21.89   | /     | ≤30    |
|            | High    | 2462            | 22.28                                     | 22.02   | /     | ≤30    |
| 802.11 n20 | Low     | 2412            | 22.02                                     | 21.39   | 24.73 | ≤30    |
|            | Middle  | 2437            | 22.75                                     | 22.05   | 25.42 | ≤30    |
|            | High    | 2462            | 22.32                                     | 22.74   | 25.55 | ≤30    |

| Mode       | Channel | Frequency (MHz) | Maximum Conducted Average Output Power (dBm) |         |       |        |
|------------|---------|-----------------|----------------------------------------------|---------|-------|--------|
|            |         |                 | Chain 0                                      | Chain 1 | Total | Limits |
| 802.11 b   | Low     | 2412            | 15.62                                        | 14.12   | /     | ≤30    |
|            | Middle  | 2437            | 15.76                                        | 15.06   | /     | ≤30    |
|            | High    | 2462            | 15.83                                        | 15.02   | /     | ≤30    |
| 802.11 g   | Low     | 2412            | 15.61                                        | 14.31   | /     | ≤30    |
|            | Middle  | 2437            | 16.28                                        | 15.22   | /     | ≤30    |
|            | High    | 2462            | 16.07                                        | 15.34   | /     | ≤30    |
| 802.11 n20 | Low     | 2412            | 15.50                                        | 14.33   | 17.96 | ≤30    |
|            | Middle  | 2437            | 15.74                                        | 15.13   | 18.46 | ≤30    |
|            | High    | 2462            | 16.07                                        | 15.76   | 18.93 | ≤30    |

Note: The data above was tested in conducted mode and the antenna gain is 2.1 dBi, so it meets the EIRP limit of RSS-247.

## **FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

---

### **Applicable Standard**

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Equipment List and Details**

| Manufacturer | Description       | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40         | 101474        | 2020-07-07       | 2021-07-07           |
| yzjingcheng  | Coaxial Cable     | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| E-Microwave  | Blocking Control  | EMDCB-00036   | 0E01201048    | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

|                    |            |
|--------------------|------------|
| Temperature:       | 26.1 °C    |
| Relative Humidity: | 47 %       |
| ATM Pressure:      | 101 kPa    |
| Tester:            | Rennes Guo |
| Test Date:         | 2020-11-07 |

*Test mode: Transmitting*


*Test Result: Compliant. Please refer to following plots.*

## Chain 0, 802.11b: Band Edge, Left Side

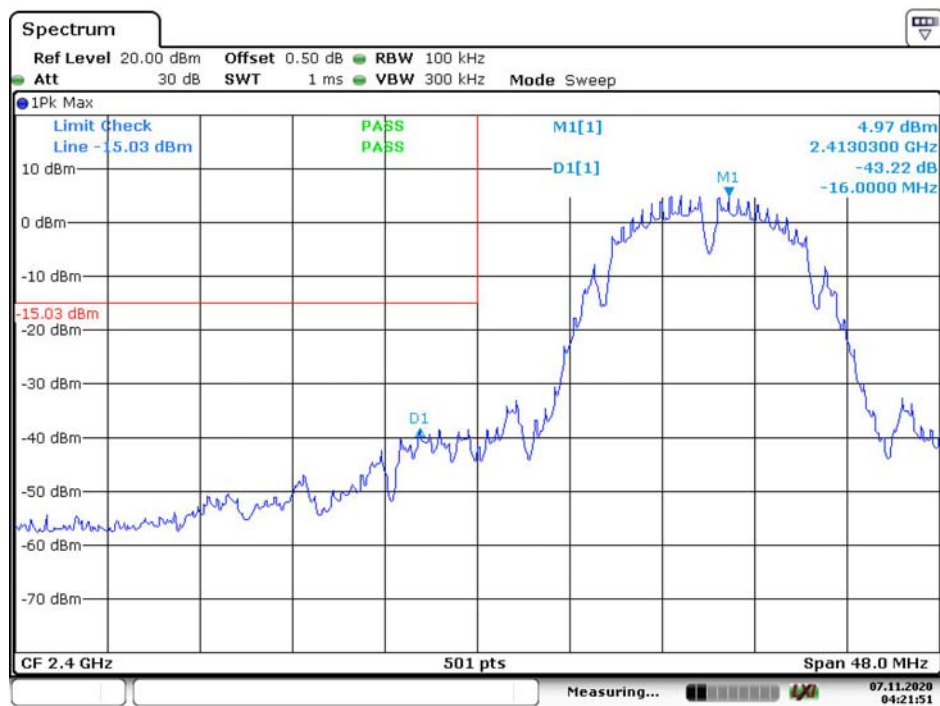


Date: 7.NOV.2020 04:21:51

## Chain 0,802.11b: Band Edge, Right Side

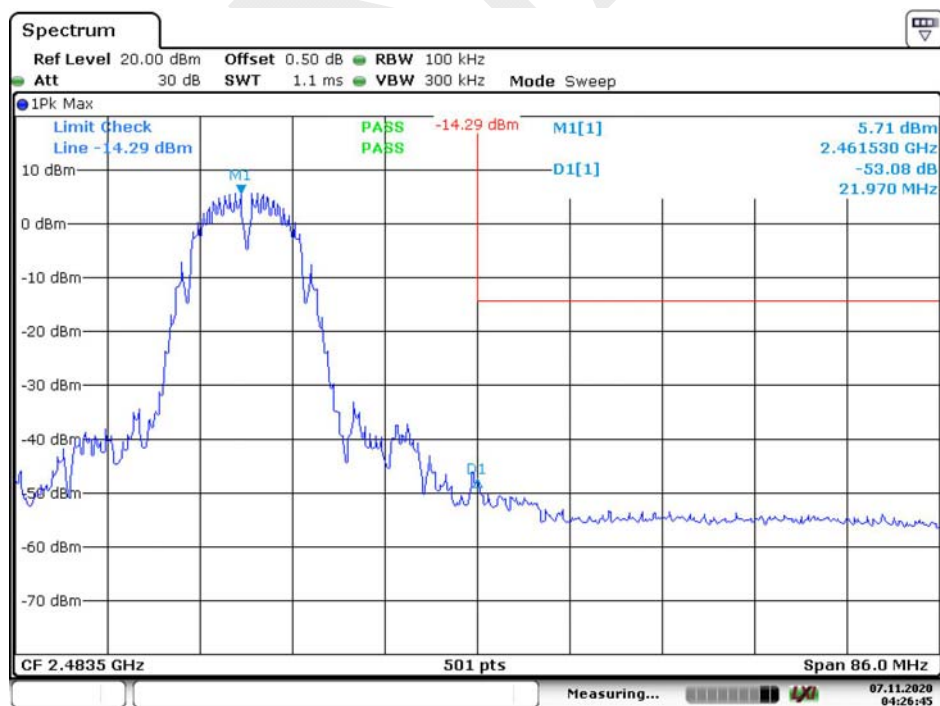


Date: 7.NOV.2020 04:26:45

## Chain 0,802.11g: Band Edge, Left Side

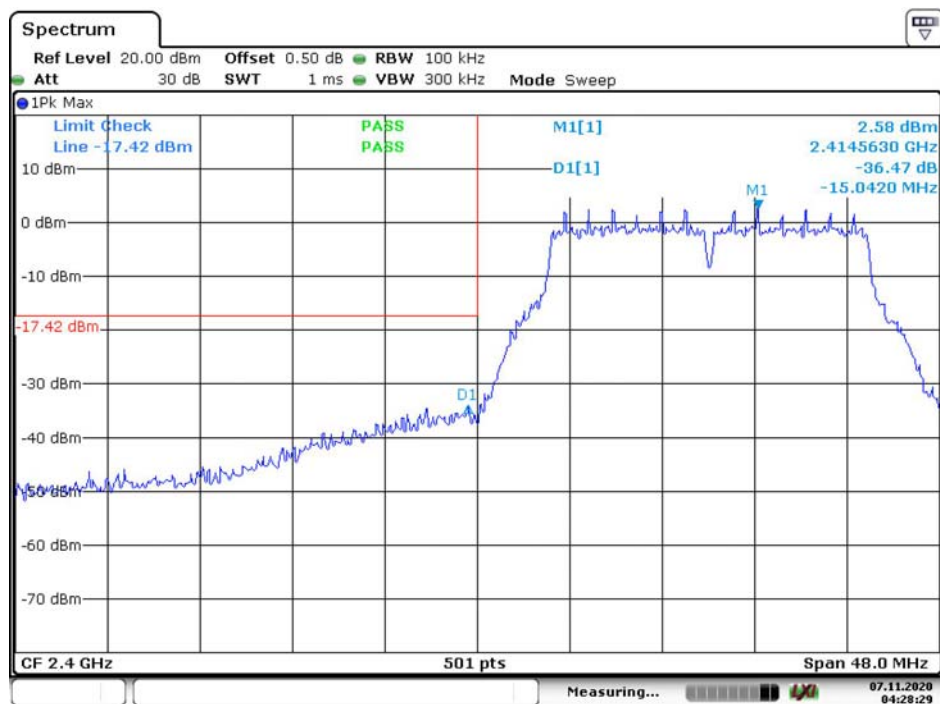


Date: 7.NOV.2020 04:28:29

## Chain 0,802.11g: Band Edge, Right Side

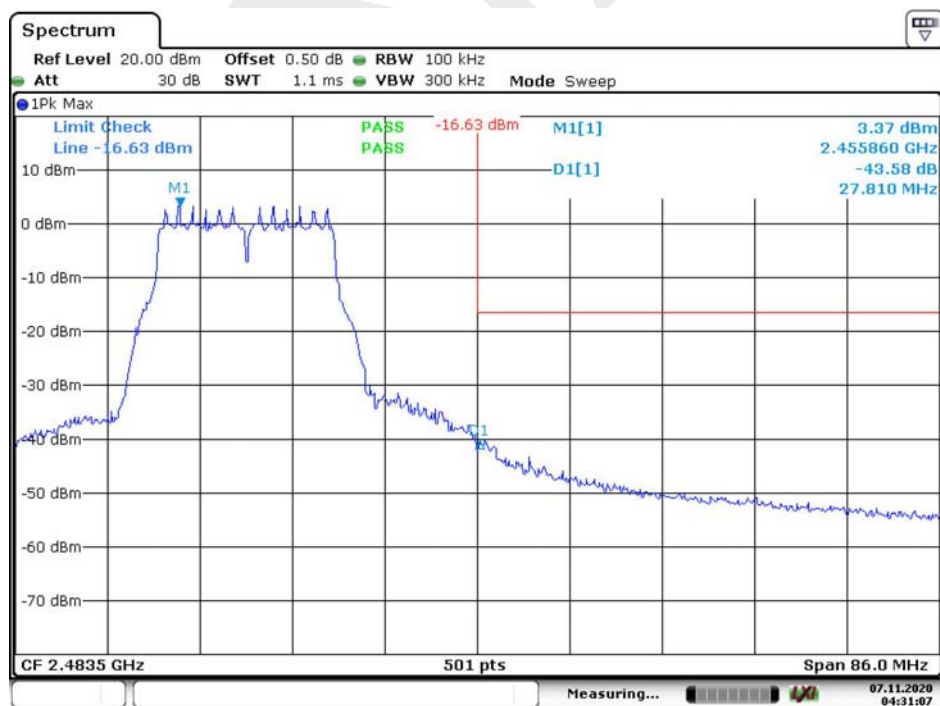


Date: 7.NOV.2020 04:31:07

## Chain 0,802.11n ht20 Band Edge, Left Side

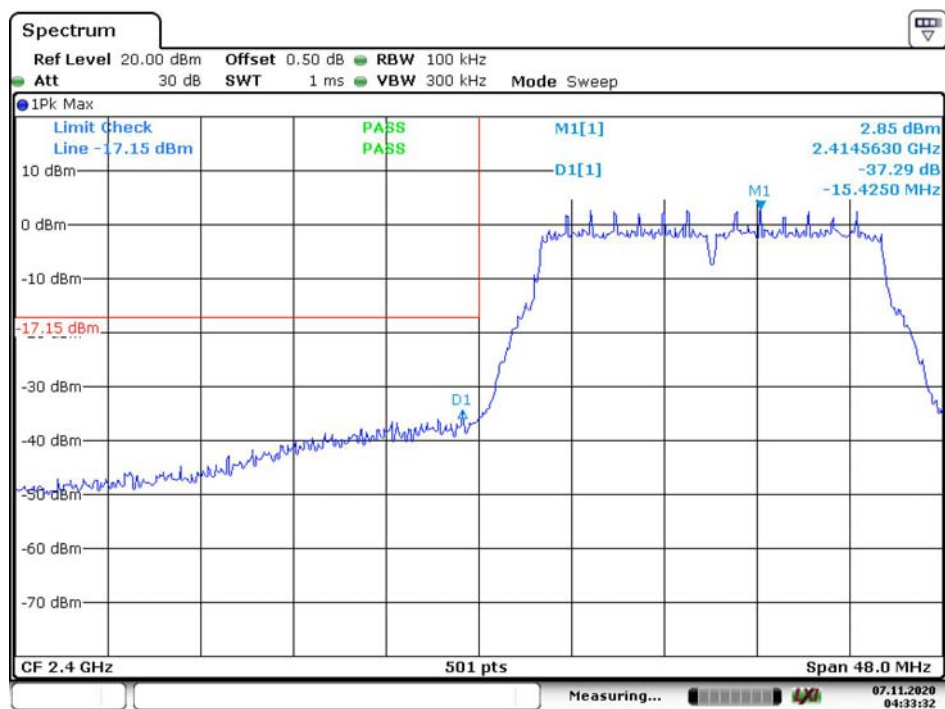

Date: 7.NOV.2020 04:33:33


## Chain 0,802.11n ht20 Band Edge, Right Side

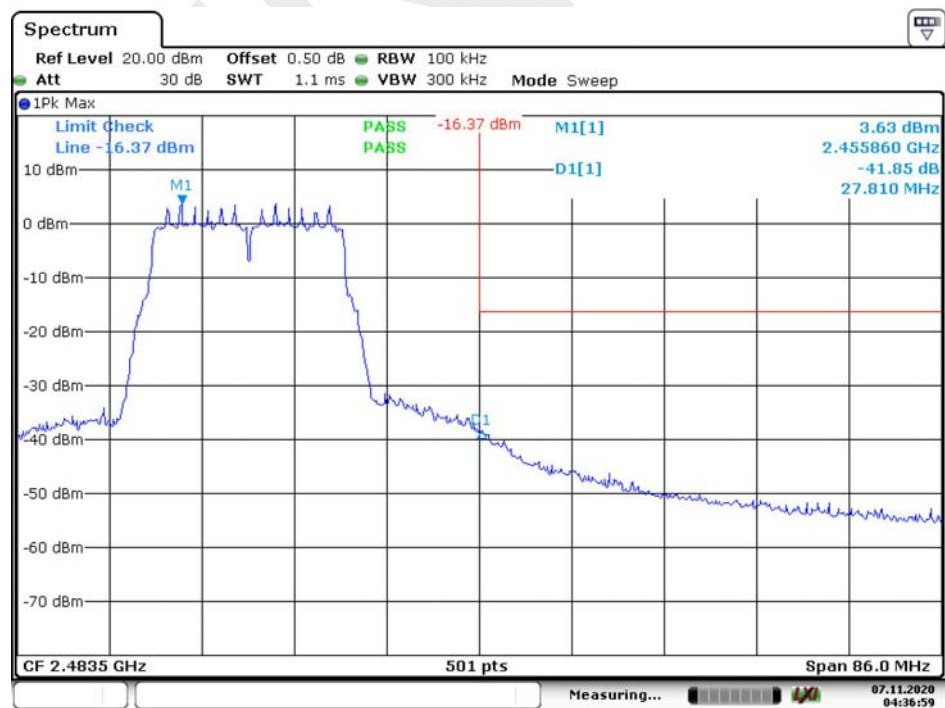

Date: 7.NOV.2020 04:36:59




## Chain 1,802.11b: Band Edge, Left Side

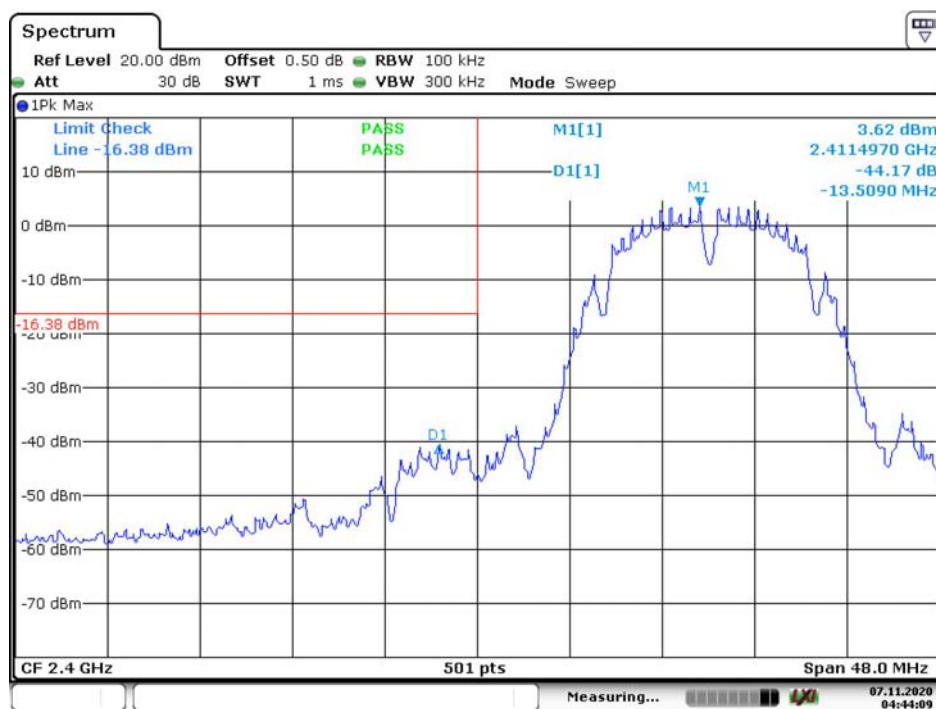


Date: 7.NOV.2020 04:44:09

## Chain 1,802.11b: Band Edge, Right Side

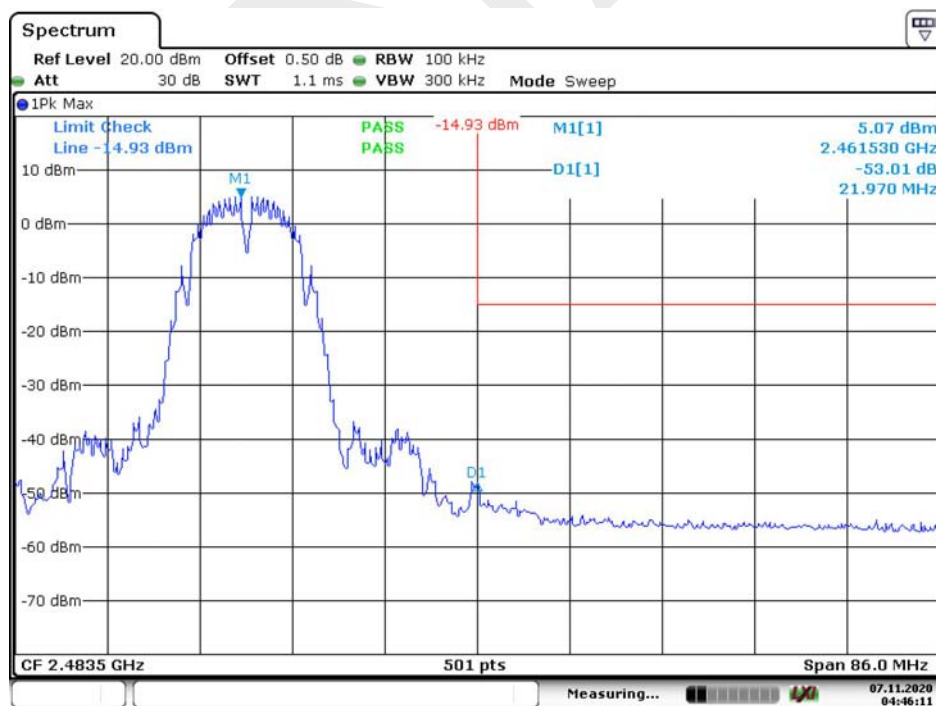


Date: 7.NOV.2020 04:46:11

## Chain 1,802.11g: Band Edge, Left Side

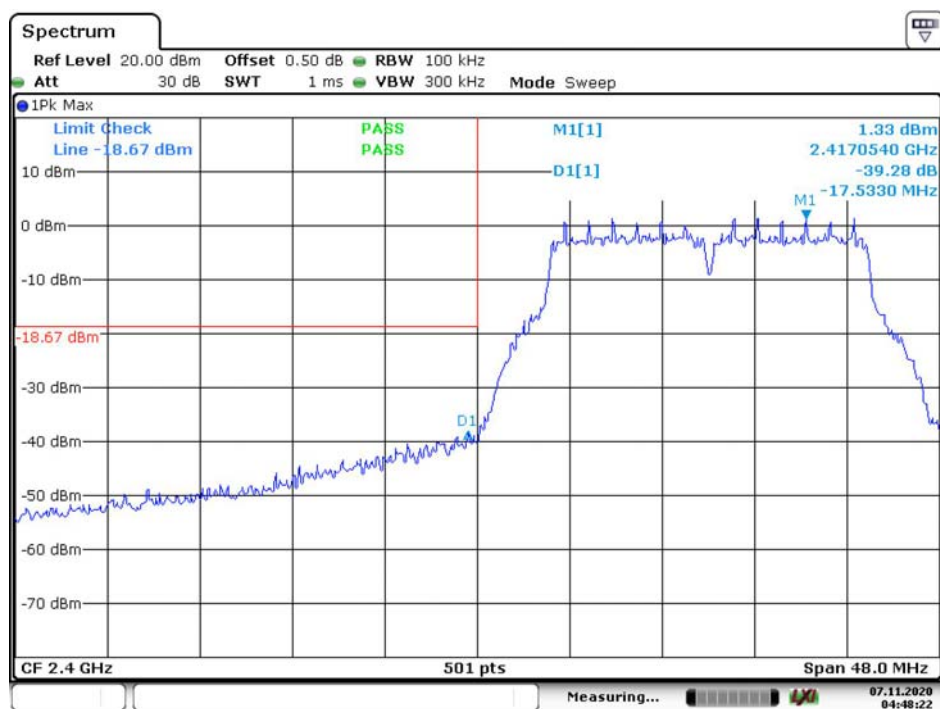


Date: 7.NOV.2020 04:48:22

## Chain 1,802.11g: Band Edge, Right Side

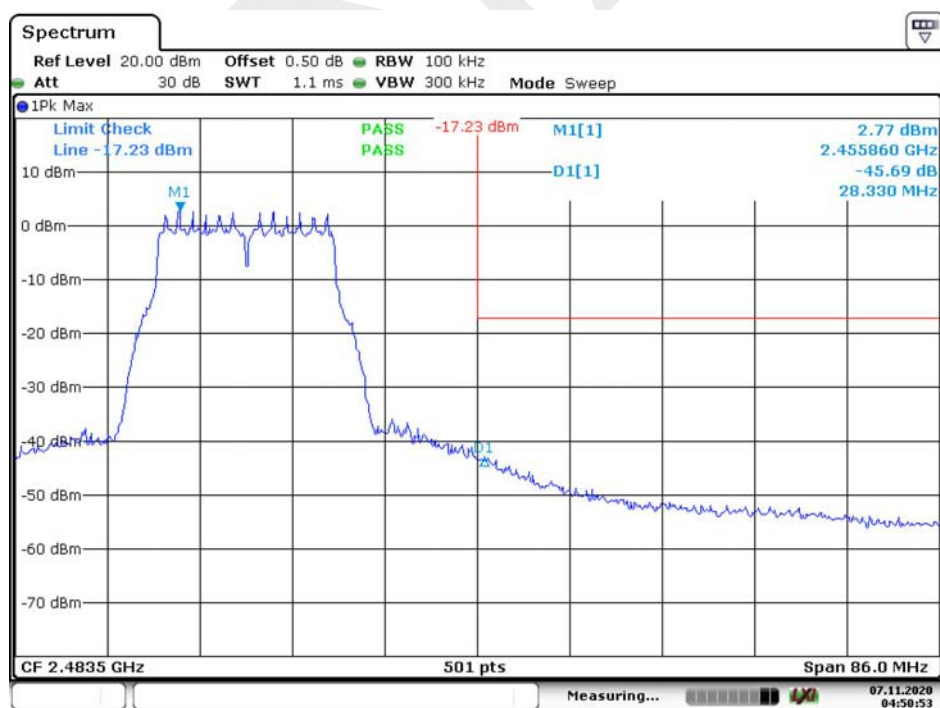


Date: 7.NOV.2020 04:50:53

## Chain 1,802.11n ht20 Band Edge, Left Side

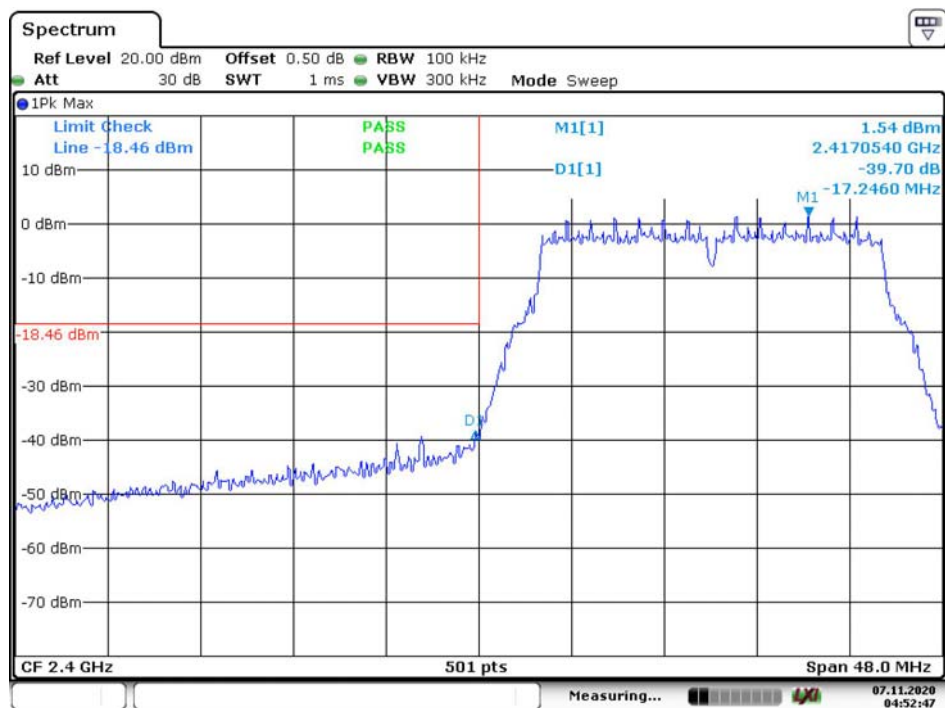

Date: 7.NOV.2020 04:52:47

## Chain 1,802.11n ht20 Band Edge, Right Side

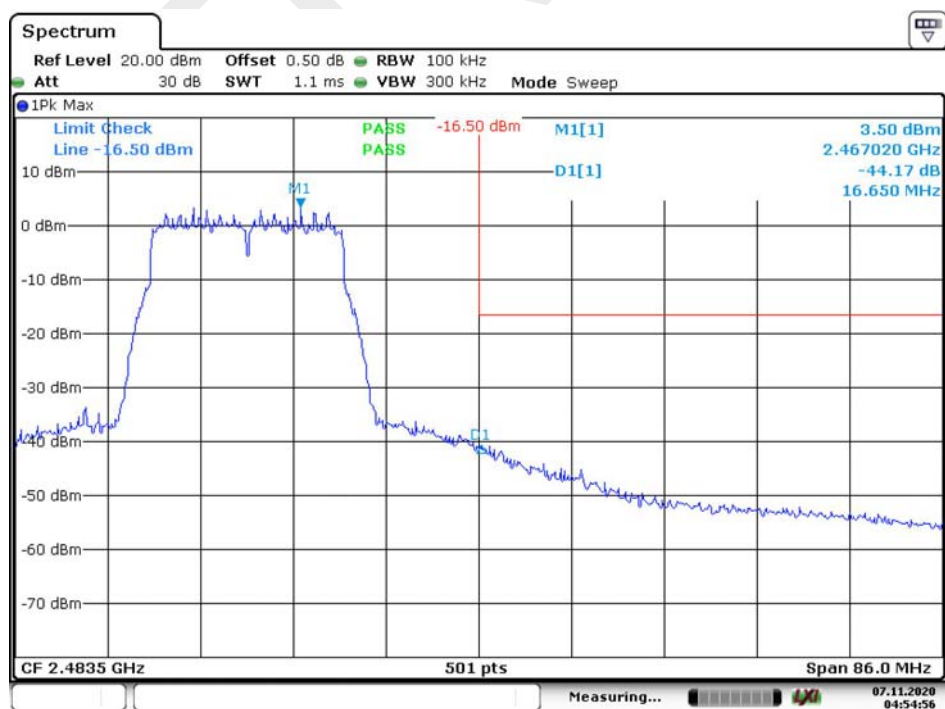

Date: 7.NOV.2020 04:54:57

## FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

### Test Equipment List and Details

| Manufacturer | Description       | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40         | 101474        | 2020-07-07       | 2021-07-07           |
| yzjingcheng  | Coaxial Cable     | KTRFBU-141-50 | 41005012      | 2020-09-05       | 2021-09-05           |
| E-Microwave  | Blocking Control  | EMDCB-00036   | 0E01201048    | 2020-05-06       | 2021-05-06           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


|                    |            |
|--------------------|------------|
| Temperature:       | 26.1°C     |
| Relative Humidity: | 47 %       |
| ATM Pressure:      | 101 kPa    |
| Tester:            | Rennes Guo |
| Test Date:         | 2020-11-07 |

**Test Result:** Compliance. Please refer to the following table and plots

*Test Mode: Transmitting*


| Test mode    | Frequency<br>(MHz) | Power Spectral Density<br>(dBm/3kHz) |         |       | Limit<br>(dBm/3kHz) |
|--------------|--------------------|--------------------------------------|---------|-------|---------------------|
|              |                    | Chain 0                              | Chain 1 | Total |                     |
| 802.11b      | 2412               | -7.12                                | -9.94   | /     | ≤8                  |
|              | 2437               | -7.11                                | -7.87   | /     | ≤8                  |
|              | 2462               | -7.80                                | -8.09   | /     | ≤8                  |
| 802.11g      | 2412               | -10.96                               | -12.20  | /     | ≤8                  |
|              | 2437               | -10.56                               | -11.37  | /     | ≤8                  |
|              | 2462               | -10.51                               | -11.03  | /     | ≤8                  |
| 802.11n ht20 | 2412               | -10.66                               | -12.51  | -8.48 | ≤8                  |
|              | 2437               | -10.33                               | -11.77  | -7.98 | ≤8                  |
|              | 2462               | -10.81                               | -11.43  | -8.1  | ≤8                  |

## Chain 0, Power Spectral Density, 802.11b Low Channel

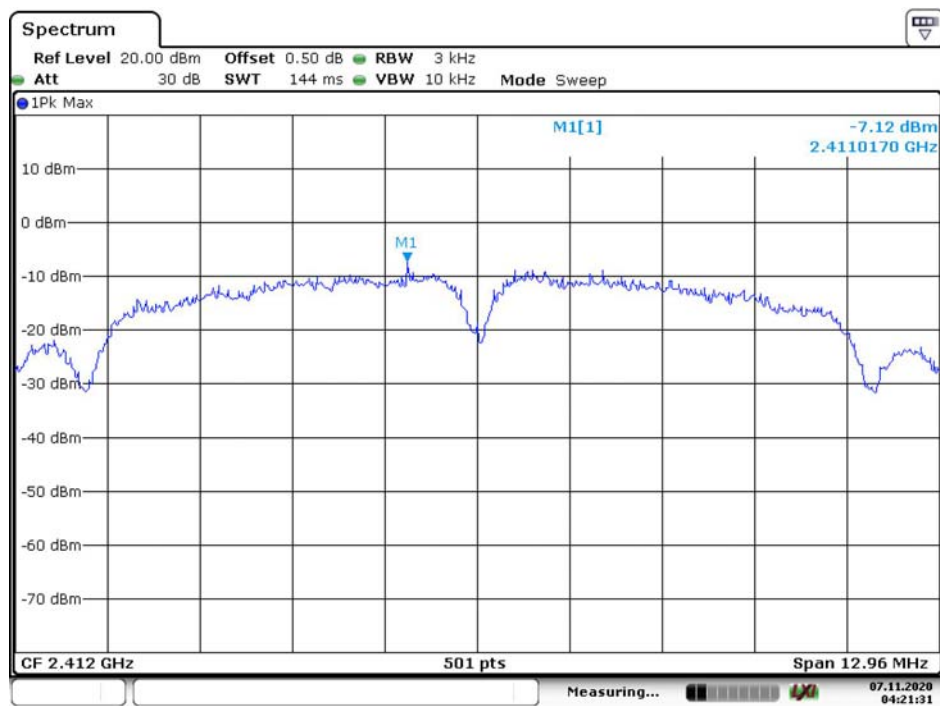


Date: 7.NOV.2020 04:21:31

## Chain 0, Power Spectral Density, 802.11b Middle Channel

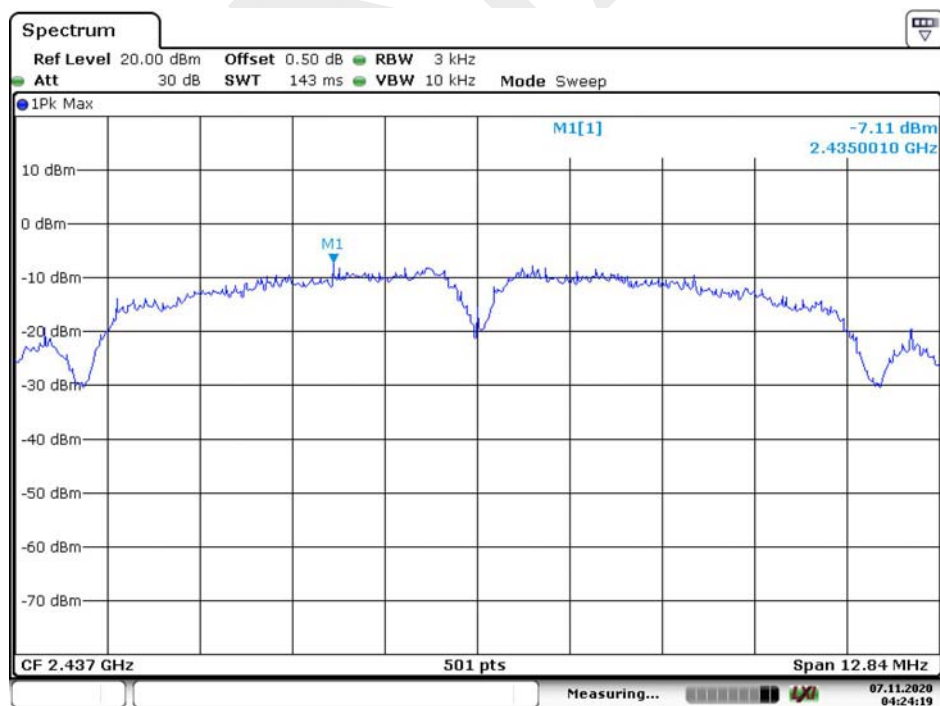


Date: 7.NOV.2020 04:24:19

## Chain 0, Power Spectral Density, 802.11b High Channel

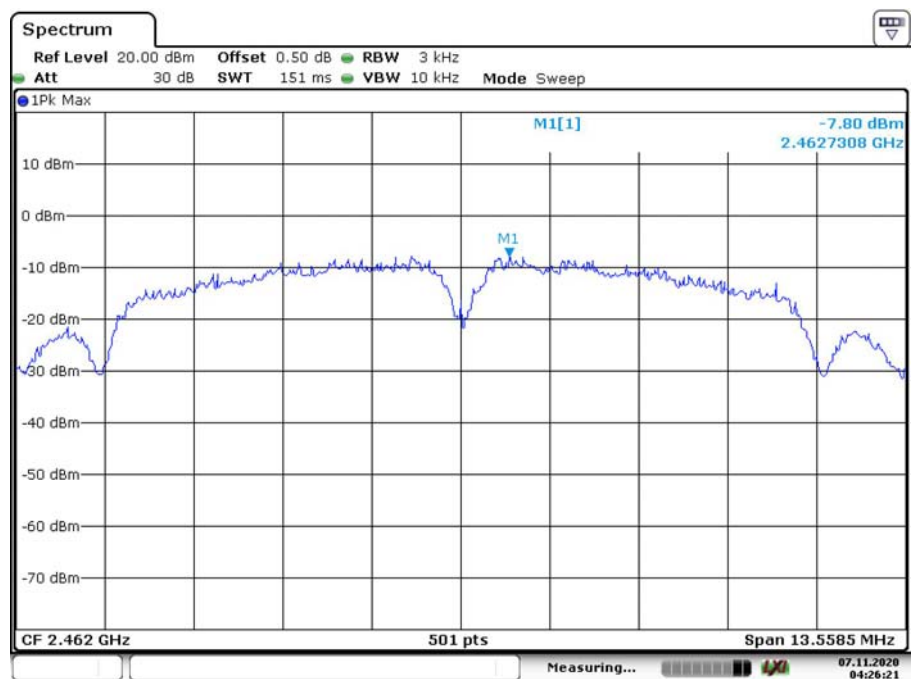

Date: 7.NOV.2020 04:26:21


## Chain 0, Power Spectral Density, 802.11g Low Channel

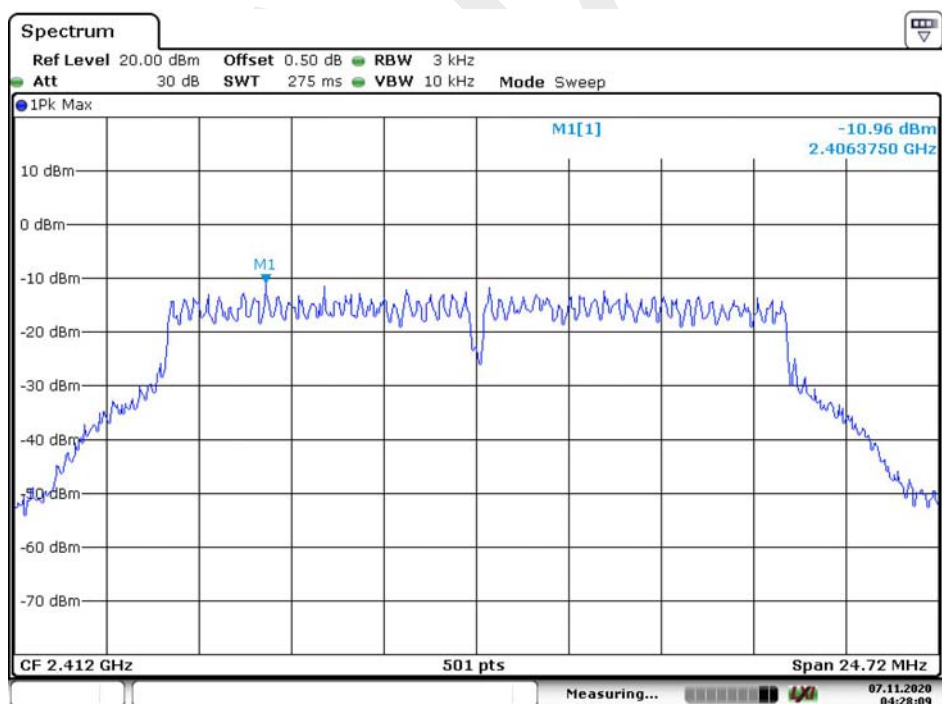

Date: 7.NOV.2020 04:28:09




## Chain 0,Power Spectral Density, 802.11g Middle Channel

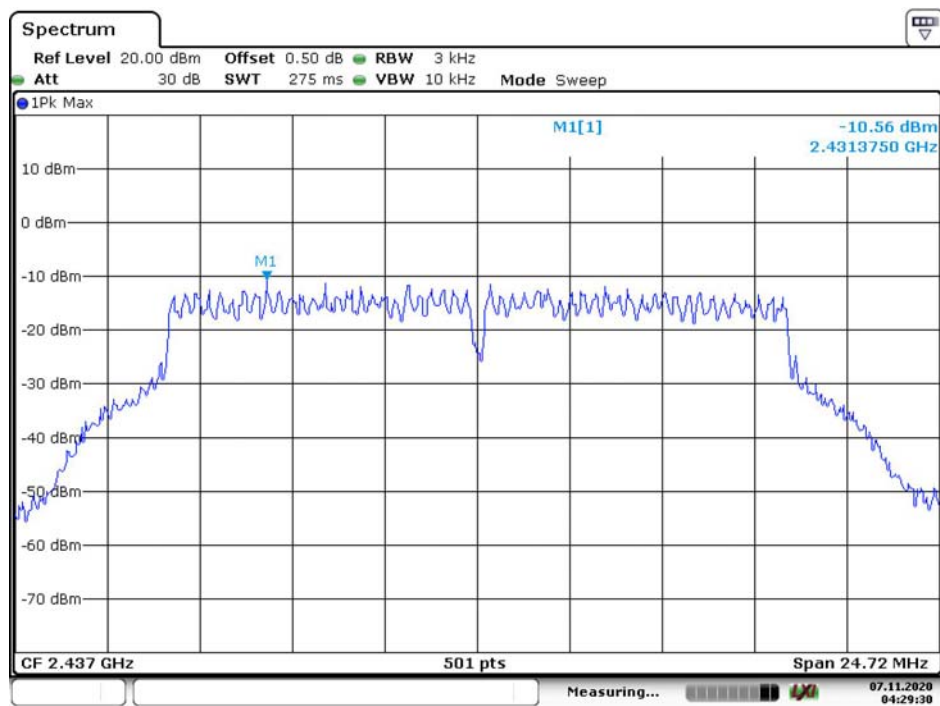

Date: 7.NOV.2020 04:29:30


## Chain 0,Power Spectral Density, 802.11g High Channel

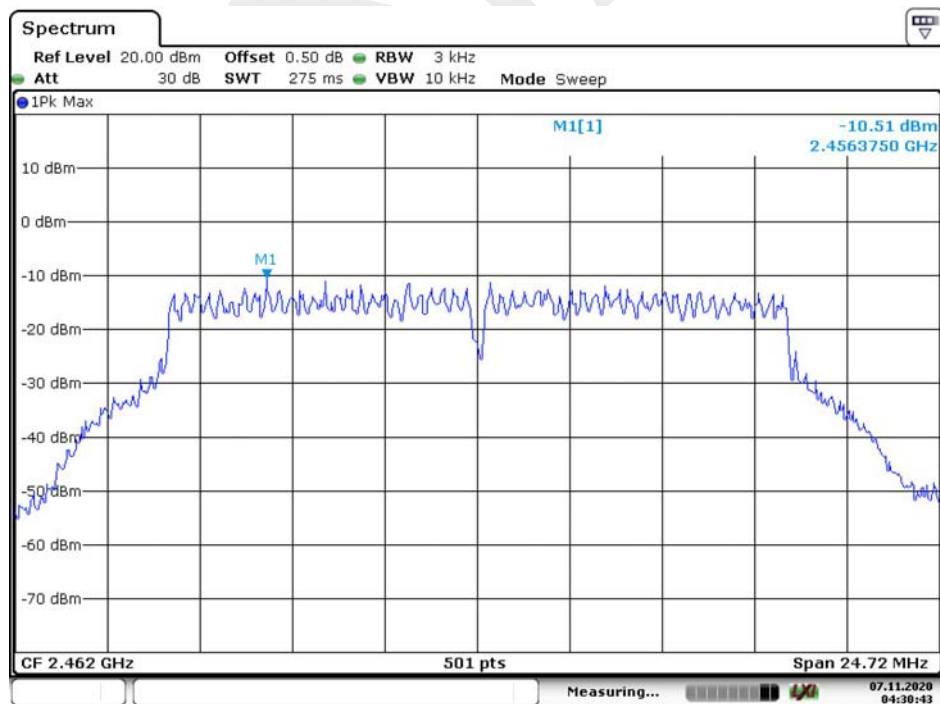

Date: 7.NOV.2020 04:30:44




## Chain 0,Power Spectral Density, 802.11n ht20 Low Channel

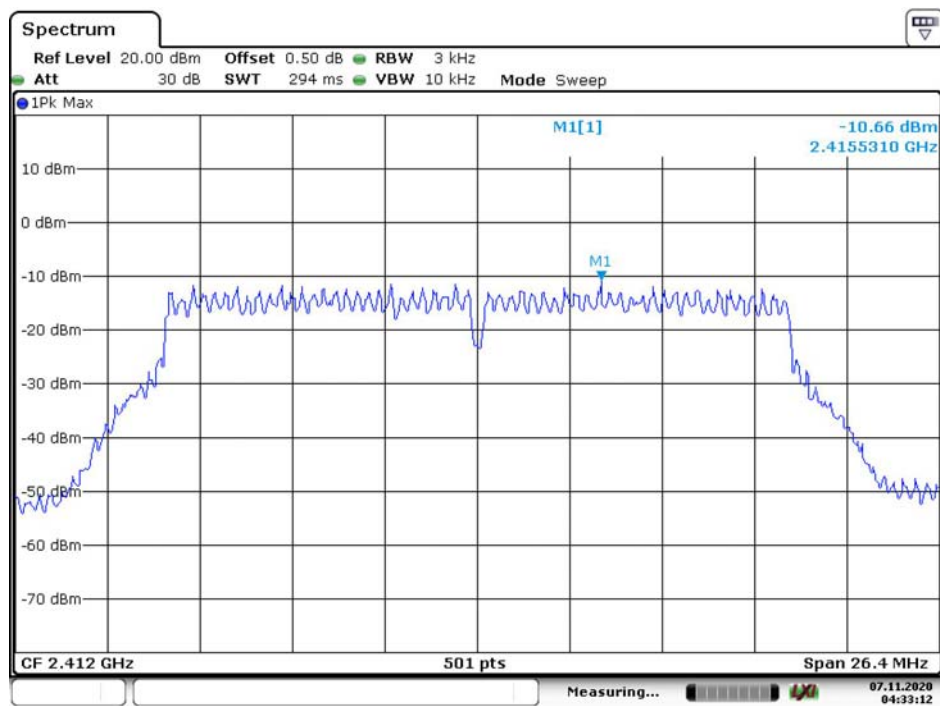


Date: 7.NOV.2020 04:33:13

## Chain 0,Power Spectral Density, 802.11n ht20 Middle Channel

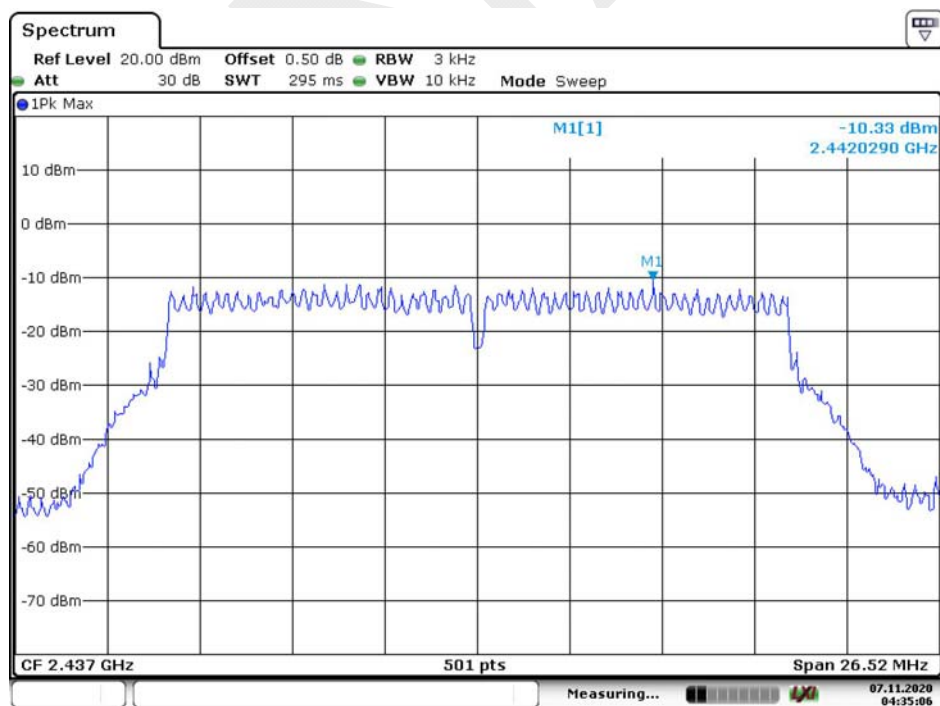

Date: 7.NOV.2020 04:35:06

## Chain 0, Power Spectral Density, 802.11n ht20 High Channel

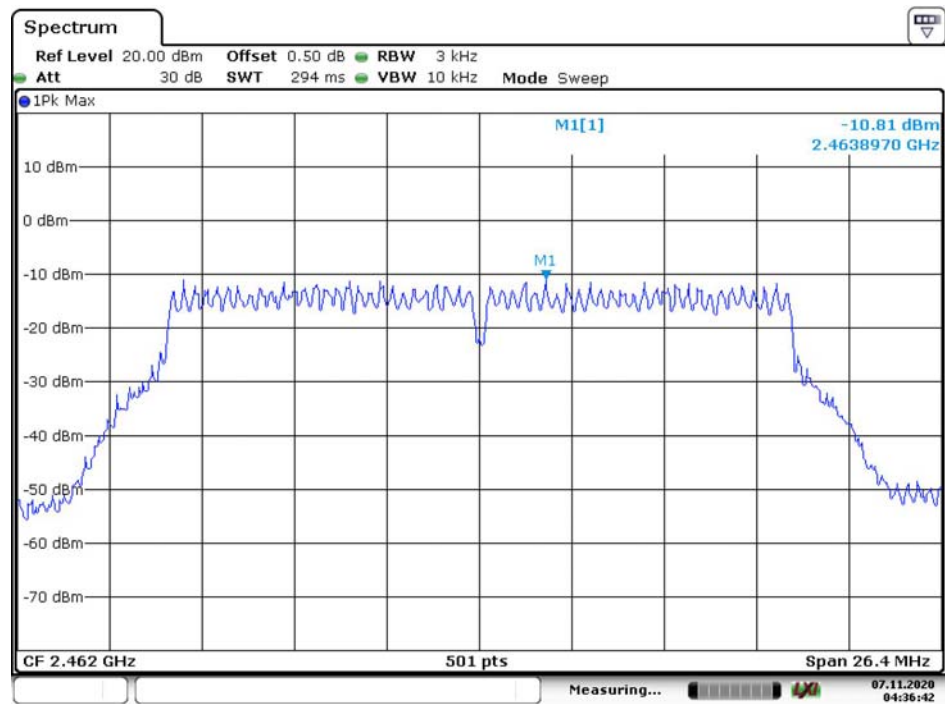


Date: 7.NOV.2020 04:36:43

## Chain 1,Power Spectral Density, 802.11b Low Channel




Date: 7.NOV.2020 04:43:46

## Chain 1,Power Spectral Density, 802.11b Middle Channel

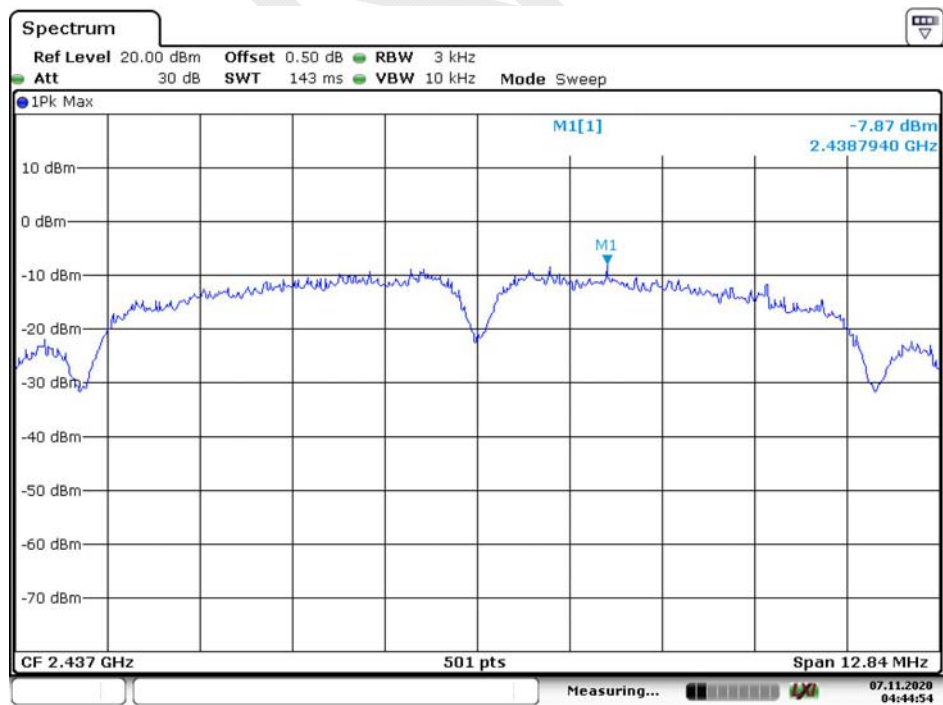


Date: 7.NOV.2020 04:44:54

## Chain 1,Power Spectral Density, 802.11b High Channel

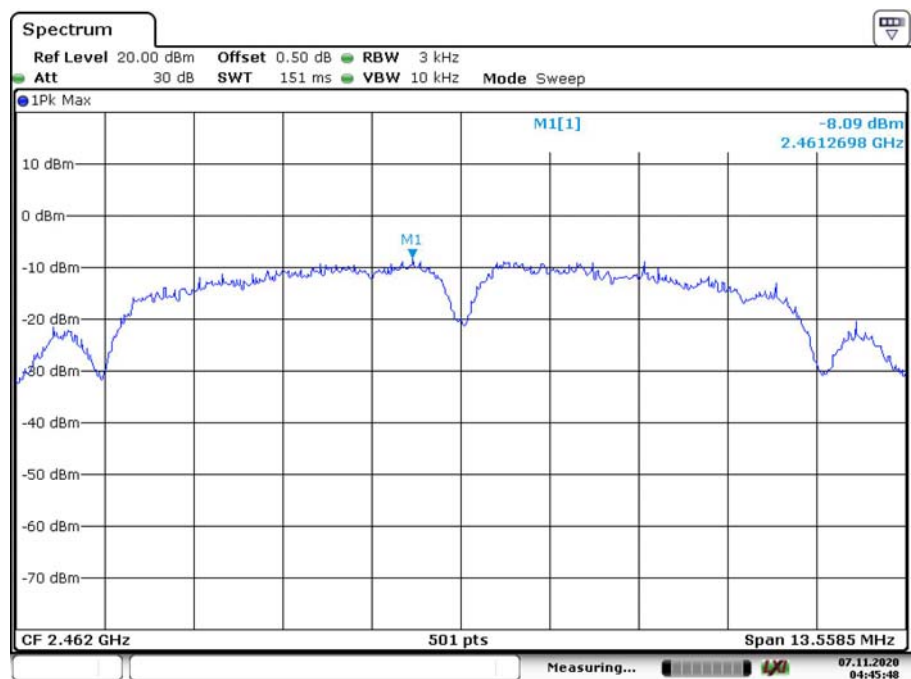


Date: 7.NOV.2020 04:45:48

## Chain1,Power Spectral Density, 802.11g Low Channel

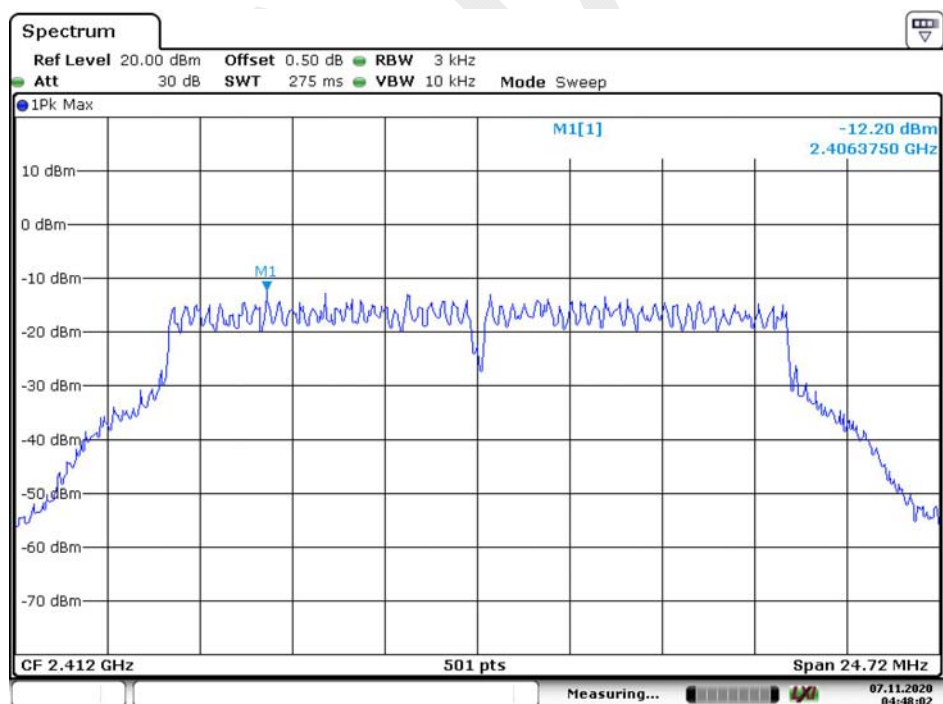


Date: 7.NOV.2020 04:48:02

## Chain 1, Power Spectral Density, 802.11g Middle Channel

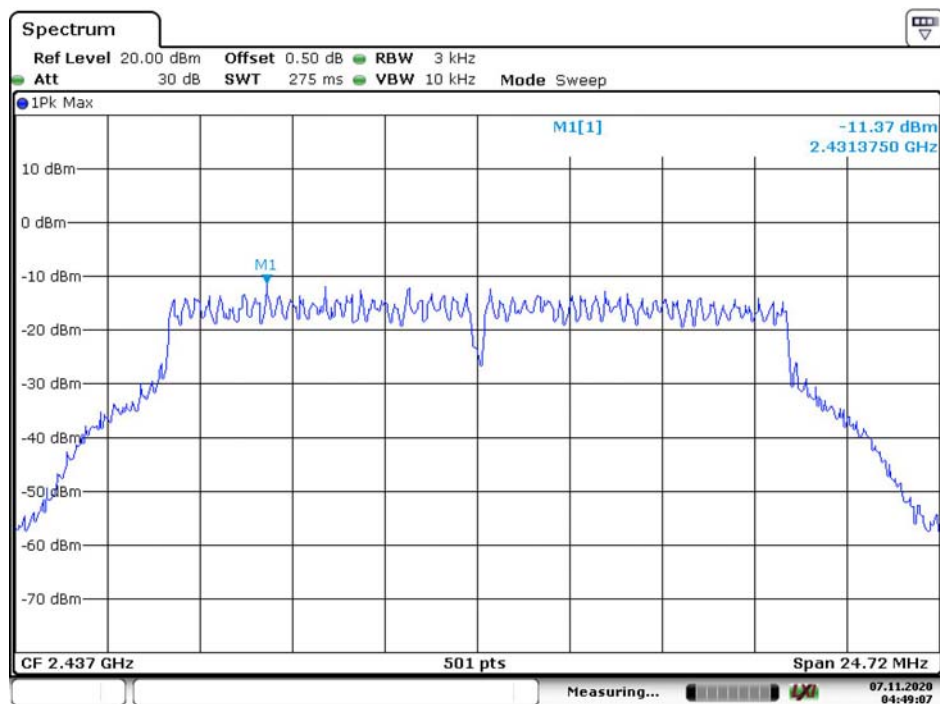


Date: 7.NOV.2020 04:49:07

## Chain1, Power Spectral Density, 802.11g High Channel

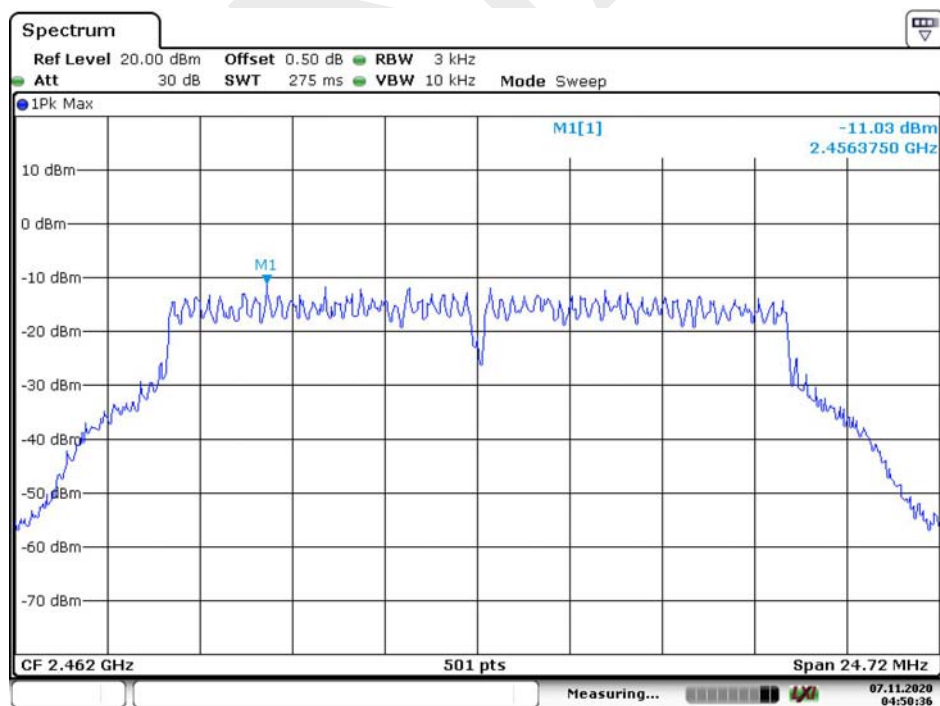


Date: 7.NOV.2020 04:50:36

## Chain1,Power Spectral Density, 802.11n ht20 Low Channel

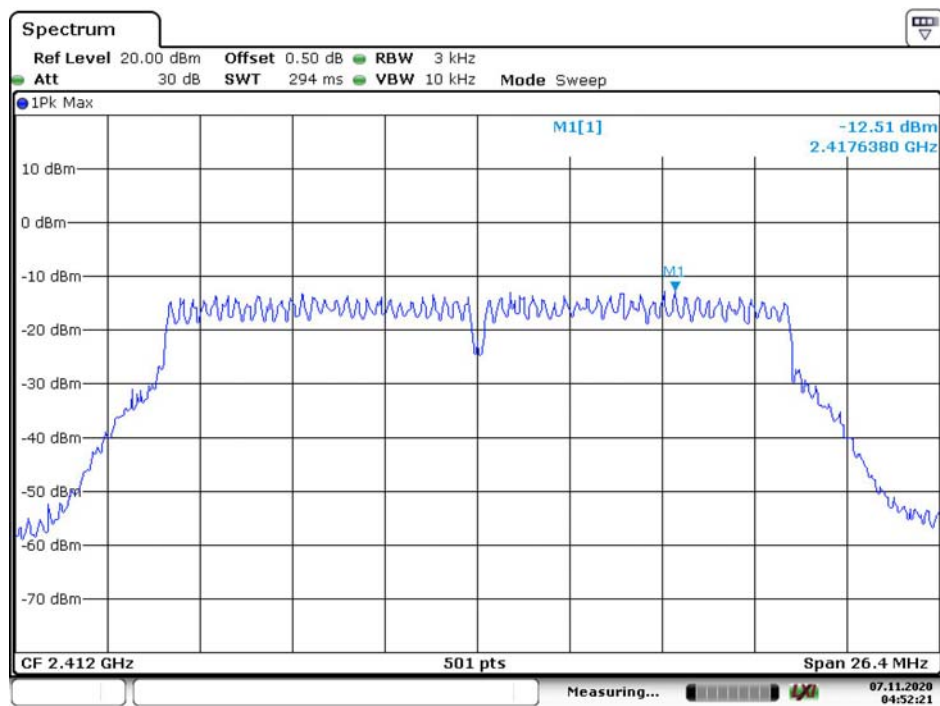


Date: 7.NOV.2020 04:52:21

## Chain 1,Power Spectral Density, 802.11n ht20 Middle Channel

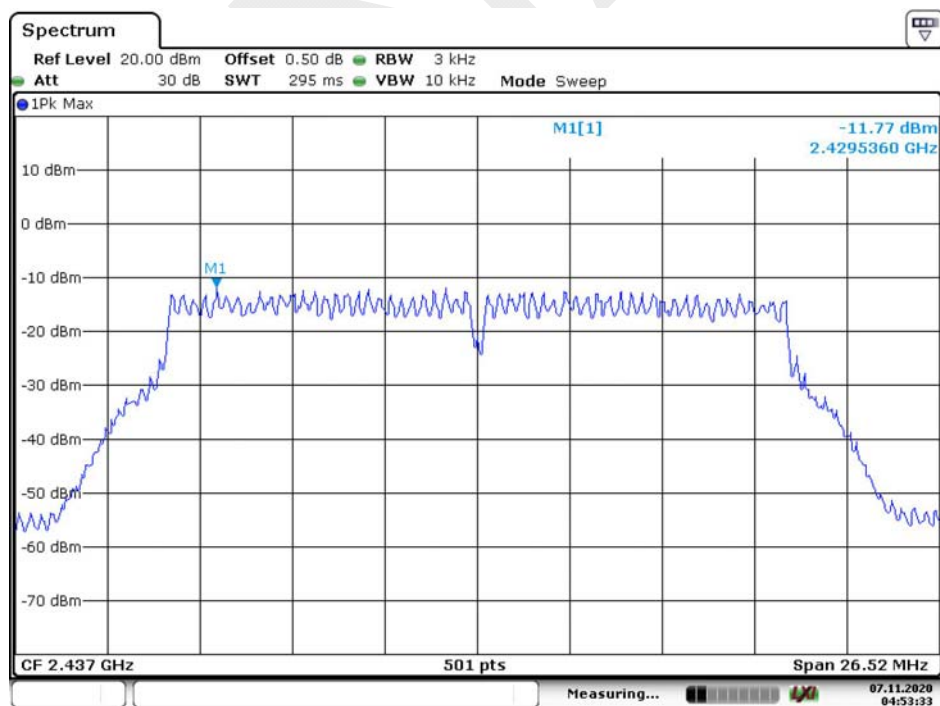

Date: 7.NOV.2020 04:53:33

## Chain 1, Power Spectral Density, 802.11n ht20 High Channel

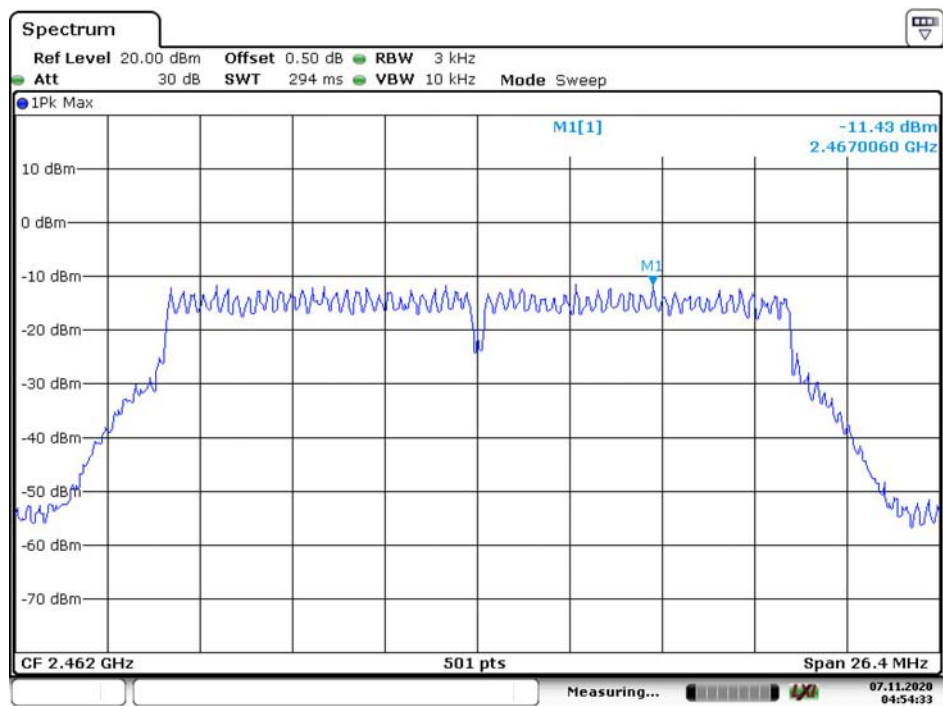

Date: 7.NOV.2020 04:54:33

\*\*\*\*\* END OF REPORT \*\*\*\*\*