

# FCC LTE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

November 06, 2023

**Location:**

HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Address:**

129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Report No.:** HCT-RF-2311-FC009

**FCC ID:**

**A3LSMA155M**

**APPLICANT:**

**SAMSUNG Electronics Co., Ltd.**

Model(s): SM-A155M/DSN  
 Additional Model(s): SM-A155M/N  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §27

|                  | Mode<br>(MHz)      | Tx Frequency<br>(MHz) | Emission<br>Designator | Modulation | EIRP              |                     |
|------------------|--------------------|-----------------------|------------------------|------------|-------------------|---------------------|
|                  |                    |                       |                        |            | Max. Power<br>(W) | Max. Power<br>(dBm) |
| Power<br>Class 3 | LTE – Band 41 (5)  | 2498.5 – 2687.5       | 4M51G7D                | QPSK       | 0.151             | 21.80               |
|                  |                    |                       | 4M51W7D                | 16QAM      | 0.122             | 20.88               |
|                  |                    |                       | 4M51W7D                | 64QAM      | 0.098             | 19.93               |
|                  | LTE – Band 41 (10) | 2501.0 – 2685.0       | 8M96G7D                | QPSK       | 0.160             | 22.03               |
|                  |                    |                       | 8M99W7D                | 16QAM      | 0.123             | 20.90               |
|                  |                    |                       | 8M98W7D                | 64QAM      | 0.098             | 19.92               |
|                  | LTE – Band 41 (15) | 2503.5 – 2682.5       | 13M5G7D                | QPSK       | 0.158             | 22.00               |
|                  |                    |                       | 13M4W7D                | 16QAM      | 0.125             | 20.98               |
|                  |                    |                       | 13M4W7D                | 64QAM      | 0.101             | 20.05               |
|                  | LTE – Band 41 (20) | 2506.0 – 2680.0       | 17M9G7D                | QPSK       | 0.160             | 22.05               |
|                  |                    |                       | 17M9W7D                | 16QAM      | 0.126             | 21.02               |
|                  |                    |                       | 17M9W7D                | 64QAM      | 0.100             | 20.01               |

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2311-FC009

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

| TEST REPORT NO.   | DATE              | DESCRIPTION             |
|-------------------|-------------------|-------------------------|
| HCT-RF-2311-FC009 | November 06, 2023 | - First Approval Report |

## **Table of Contents**

|                                                                  |     |
|------------------------------------------------------------------|-----|
| REVIEWED BY .....                                                | 2   |
| 1. GENERAL INFORMATION .....                                     | 5   |
| 2. INTRODUCTION .....                                            | 6   |
| 2.1. DESCRIPTION OF EUT .....                                    | 6   |
| 2.2. MEASURING INSTRUMENT CALIBRATION .....                      | 6   |
| 2.3. TEST FACILITY .....                                         | 6   |
| 3. DESCRIPTION OF TESTS.....                                     | 7   |
| 3.1 TEST PROCEDURE .....                                         | 7   |
| 3.2 RADIATED POWER.....                                          | 8   |
| 3.3 RADIATED SPURIOUS EMISSIONS .....                            | 9   |
| 3.4 PEAK- TO- AVERAGE RATIO.....                                 | 10  |
| 3.5 OCCUPIED BANDWIDTH. ....                                     | 12  |
| 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....    | 13  |
| 3.7 CHANNEL EDGE.....                                            | 14  |
| 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 16  |
| 3.9 WORST CASE(RADIATED TEST) .....                              | 17  |
| 3.10 WORST CASE(CONDUCTED TEST) .....                            | 18  |
| 4. LIST OF TEST EQUIPMENT .....                                  | 19  |
| 5. MEASUREMENT UNCERTAINTY .....                                 | 20  |
| 6. SUMMARY OF TEST RESULTS .....                                 | 21  |
| 7. SAMPLE CALCULATION .....                                      | 22  |
| 8. TEST DATA .....                                               | 24  |
| 8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....                     | 24  |
| 8.2 RADIATED SPURIOUS EMISSIONS .....                            | 26  |
| 8.3 PEAK-TO-AVERAGE RATIO.....                                   | 30  |
| 8.4 OCCUPIED BANDWIDTH .....                                     | 31  |
| 8.5 CONDUCTED SPURIOUS EMISSIONS .....                           | 32  |
| 8.6 CHANNEL EDGE.....                                            | 33  |
| 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... | 34  |
| 9. TEST PLOTS.....                                               | 46  |
| 10. ANNEX A_ TEST SETUP PHOTO.....                               | 123 |

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

|                             |                                                                                                             |
|-----------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Applicant Name:</b>      | SAMSUNG Electronics Co., Ltd.                                                                               |
| <b>Address:</b>             | 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea                                  |
| <b>FCC ID:</b>              | A3LSMA155M                                                                                                  |
| <b>Application Type:</b>    | Certification                                                                                               |
| <b>FCC Classification:</b>  | PCS Licensed Transmitter Held to Ear (PCE)                                                                  |
| <b>FCC Rule Part(s):</b>    | §27                                                                                                         |
| <b>EUT Type:</b>            | Mobile phone                                                                                                |
| <b>Model(s):</b>            | SM-A155M/DSN                                                                                                |
| <b>Additional Model(s):</b> | SM-A155M/N                                                                                                  |
| <b>Tx Frequency:</b>        | 2498.5 – 2687.5 : 5 MHz<br>2501.0 – 2685.0 : 10 MHz<br>2503.5 – 2682.5 : 15 MHz<br>2506.0 – 2680.0 : 20 MHz |
| <b>Date(s) of Tests:</b>    | October 10, 2023 ~ November 03, 2023                                                                        |
| <b>Serial number:</b>       | Radiated: R38W900BYVR<br>Conducted: R38W900BYRK                                                             |

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

| Test Description                                                | Test Procedure Used                                                                   |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Occupied Bandwidth                                              | - KDB 971168 D01 v03r01 – Section 4.3<br>- ANSI C63.26-2015 – Section 5.4.4           |
| Channel Edge                                                    | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Spurious and Harmonic Emissions at Antenna Terminal             | - KDB 971168 D01 v03r01 – Section 6.0<br>- ANSI C63.26-2015 – Section 5.7             |
| Conducted Output Power                                          | - N/A (See SAR Report)                                                                |
| Peak- to- Average Ratio                                         | - KDB 971168 D01 v03r01 – Section 5.7<br>- ANSI C63.26-2015 – Section 5.2.3.4         |
| Frequency stability                                             | - ANSI C63.26-2015 – Section 5.6                                                      |
| Effective Radiated Power/<br>Effective Isotropic Radiated Power | - KDB 971168 D01 v03r01 – Section 5.2 & 5.8<br>- ANSI/TIA-603-E-2016 – Section 2.2.17 |
| Radiated Spurious and Harmonic Emissions                        | - KDB 971168 D01 v03r01 – Section 6.2<br>- ANSI/TIA-603-E-2016 – Section 2.2.12       |

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed Normal Hz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and Normal Hz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser  
if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit)  
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,  
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven  
by a signal generator and the previously recorded signal was duplicated.  
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

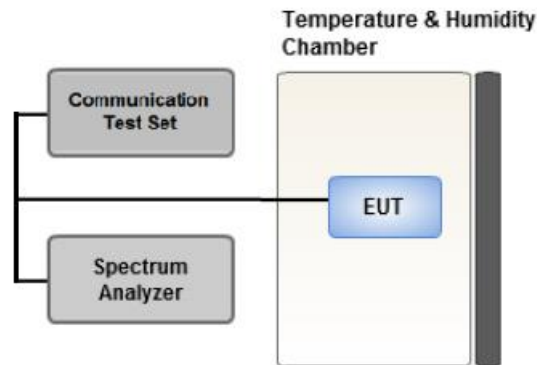

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**


1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:

Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep

(automation-compatible) measurement. The transmission period is the (on + off) time.

6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

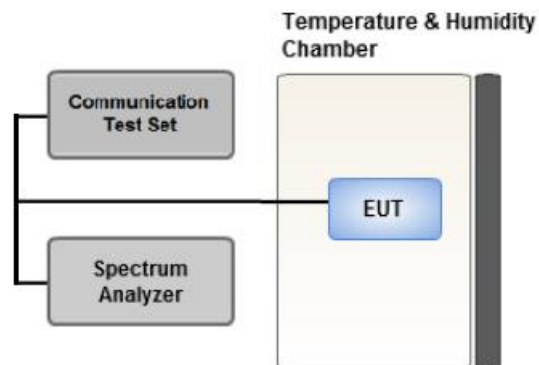

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

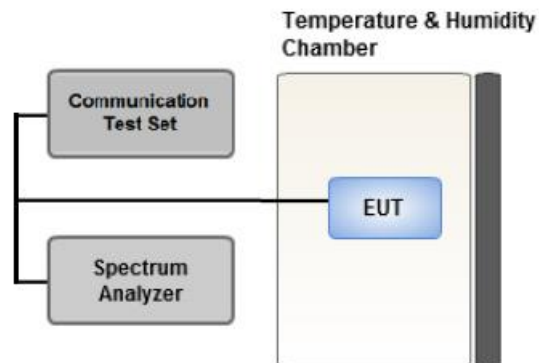

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

### 3.7 CHANNEL EDGE

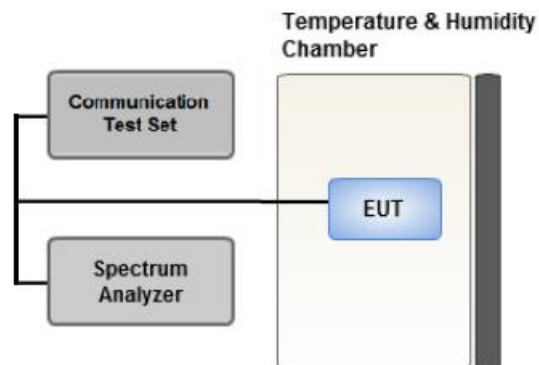

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where  $\text{Margin} < 1$  dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

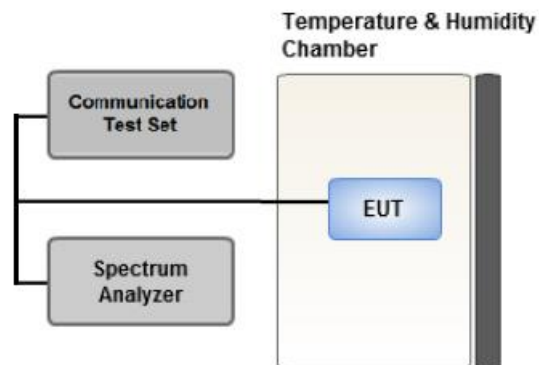

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- SM-A155M/DSN & additional models were tested and the worst case results are reported.  
(Worst case : SM-A155M/DSN)

[ Worst case ]

| Test Description                         | Modulation               | Bandwidth<br>(MHz) | RB size | RB offset | Axis |
|------------------------------------------|--------------------------|--------------------|---------|-----------|------|
| Effective Isotropic Radiated Power       | QPSK,<br>16QAM,<br>64QAM | 5                  | 1       | 13        | Z    |
|                                          |                          | 10                 | 1       | 25        |      |
|                                          |                          | 15                 | 1       | 38        |      |
|                                          |                          | 20                 | 1       | 50        |      |
| Radiated Spurious and Harmonic Emissions | QPSK                     | 5                  | 1       | 13        | Y    |
|                                          |                          | 10                 | 1       | 25        |      |
|                                          |                          | 15                 | 1       | 38        |      |
|                                          |                          | 20                 | 1       | 50        |      |

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-A155M/DSN & additional models were tested and the worst case results are reported.  
(Worst case : SM-A155M/DSN)

[ Worst case ]

| Test Description                                    | Modulation               | Bandwidth<br>(MHz) | Frequency            | RB size | RB offset |
|-----------------------------------------------------|--------------------------|--------------------|----------------------|---------|-----------|
| Occupied Bandwidth                                  | QPSK,<br>16QAM,<br>64QAM | 5, 10, 15, 20      | Mid                  | Full RB | 0         |
| Peak-To-Average Ratio                               | QPSK,<br>16QAM,<br>64QAM | 5, 10, 15, 20      | Mid                  | Full RB | 0         |
| Channel Edge                                        | QPSK                     | 5                  | Low                  | 1       | 0         |
|                                                     |                          |                    | High                 | 1       | 24        |
|                                                     |                          | 10                 | Low                  | 1       | 0         |
|                                                     |                          |                    | High                 | 1       | 49        |
|                                                     |                          | 15                 | Low                  | 1       | 0         |
|                                                     |                          |                    | High                 | 1       | 74        |
|                                                     |                          | 20                 | Low                  | 1       | 0         |
|                                                     |                          |                    | High                 | 1       | 99        |
|                                                     |                          | 5, 10, 15, 20      | Low,<br>Mid,<br>High | Full RB | 0         |
| Spurious and Harmonic Emissions at Antenna Terminal | QPSK                     | 5, 10, 15, 20      | Low,<br>Mid,<br>High | 1       | 0         |

#### 4. LIST OF TEST EQUIPMENT

| Equipment                                            | Model                  | Manufacturer     | Serial No.  | Due to Calibration | Calibration Interval |
|------------------------------------------------------|------------------------|------------------|-------------|--------------------|----------------------|
| RF Switching System                                  | FBSR-02B(1.2G HPF+LNA) | T&M SYSTEM       | F1L1        | 01/19/2024         | Annual               |
| RF Switching System                                  | FBSR-02B(3.3G HPF+LNA) | T&M SYSTEM       | F1L2        | 01/19/2024         | Annual               |
| Power Splitter(DC ~ 26.5 GHz)                        | 11667B                 | Hewlett Packard  | 5001        | 04/19/2024         | Annual               |
| DC Power Supply                                      | E3632A                 | Agilent          | MY40010147  | 06/23/2024         | Annual               |
| Dipole Antenna                                       | UHAP                   | Schwarzbeck      | 557         | 03/09/2025         | Biennial             |
| Dipole Antenna                                       | UHAP                   | Schwarzbeck      | 558         | 03/09/2025         | Biennial             |
| Chamber                                              | SU-642                 | ESPEC            | 93008124    | 02/22/2024         | Annual               |
| Horn Antenna(1 ~ 18 GHz)                             | BBHA 9120D             | Schwarzbeck      | 147         | 08/17/2025         | Biennial             |
| Horn Antenna(1 ~ 18 GHz)                             | BBHA 9120D             | Schwarzbeck      | 9120D-1298  | 09/11/2025         | Biennial             |
| Horn Antenna(15 ~ 40 GHz)                            | BBHA 9170              | Schwarzbeck      | BBHA9170342 | 09/29/2024         | Biennial             |
| Horn Antenna(15 ~ 40 GHz)                            | BBHA 9170              | Schwarzbeck      | BBHA9170124 | 03/28/2025         | Biennial             |
| Signal Analyzer(10 Hz ~ 26.5 GHz)                    | N9020A                 | Agilent          | MY52090906  | 04/20/2024         | Annual               |
| ATTENUATOR(20 dB)                                    | 8493C                  | Hewlett Packard  | 17280       | 04/19/2024         | Annual               |
| Spectrum Analyzer(10 Hz ~ 40 GHz)                    | FSV40                  | REOHDE & SCHWARZ | 100931      | 08/17/2024         | Annual               |
| Base Station                                         | 8960 (E5515C)          | Agilent          | MY48360800  | 08/10/2024         | Annual               |
| Loop Antenna(9 kHz ~ 30 MHz)                         | FMZB1513               | Schwarzbeck      | 1513-333    | 03/17/2024         | Biennial             |
| Trilog Broadband Antenna                             | VULB9168               | Schwarzbeck      | 895         | 08/16/2024         | Biennial             |
| Trilog Broadband Antenna                             | VULB9168               | Schwarzbeck      | 1135        | 03/21/2024         | Biennial             |
| Wideband Radio Communication Tester                  | MT8821C                | Anritsu Corp.    | 6262094331  | 12/01/2023         | Annual               |
| Wideband Radio Communication Tester                  | MT8820C                | Anritsu Corp.    | 6201026545  | 01/05/2024         | Annual               |
| SIGNAL GENERATOR (100 kHz ~ 40 GHz)                  | SMB100A                | REOHDE & SCHWARZ | 177633      | 06/22/2024         | Annual               |
| Signal Analyzer(5 Hz ~ 40.0 GHz)                     | N9030B                 | KEYSIGHT         | MY55480167  | 05/24/2024         | Annual               |
| FCC LTE Mobile Conducted RF Automation Test Software | -                      | HCT CO., LTD.,   | -           | -                  | -                    |

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty ( $\pm$ dB)           |
|------------------------------------------|--------------------------------------------|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.90 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 4.14 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 5.16 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.57 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.76 (Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (Above 40 GHz)      | 5.52 (Confidence level about 95 %, $k=2$ ) |

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

| Test Description                                                 | FCC Part Section(s)      | Test Limit                                                                                                                                                                                                                                                                                                                                                                                                                                  | Test Result      |
|------------------------------------------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Occupied Bandwidth                                               | §2.1049                  | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                         | PASS             |
| Band Edge / Spurious and Harmonic Emissions at Antenna Terminal. | §2.1051,<br>§27.53(m)(4) | <ul style="list-style-type: none"> <li>■ <math>&lt; 40 + 10\log_{10} (P[\text{Watts}])</math> at Channel edges</li> <li>■ <math>&lt; 43 + 10\log_{10} (P[\text{Watts}])</math> between 5 and X MHz from Channel edges</li> <li>■ <math>&lt; 55 + 10\log_{10} (P[\text{Watts}])</math> beyond X MHz beyond from Channel edges</li> <li>■ <math>&lt; 43 + 10 \log (P)</math> dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul> | PASS             |
| Conducted Output Power                                           | §2.1046                  | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                         | <u>See Note1</u> |
| Frequency stability / variation of ambient temperature           | §2.1055,<br>§27.54       | Emission must remain in band                                                                                                                                                                                                                                                                                                                                                                                                                | PASS             |

Note:

1. See SAR Report

### 6.2 Test Condition: Radiated Test

| Test Description                         | FCC Part Section(s)      | Test Limit                             | Test Result |
|------------------------------------------|--------------------------|----------------------------------------|-------------|
| Equivalent Isotropic Radiated Power      | §27.50(h)(2)             | $< 2$ Watts max. EIRP                  | PASS        |
| Radiated Spurious and Harmonic Emissions | §2.1053,<br>§27.53(m)(4) | $< 55 + 10\log_{10} (P[\text{Watts}])$ | PASS        |

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

| Ch./ Freq. |            | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant. Gain<br>(dBd) | C.L  | Pol. | ERP   |       |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                         |                           |                    |      |      | W     | dBm   |
| 128        | 824.20     | -21.37                  | 38.40                     | -10.61             | 0.95 | H    | 0.483 | 26.84 |

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

| Ch./ Freq. |            | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant. Gain<br>(dBi) | C.L  | Pol. | EIRP  |       |
|------------|------------|-------------------------|---------------------------|--------------------|------|------|-------|-------|
| channel    | Freq.(MHz) |                         |                           |                    |      |      | W     | dBm   |
| 40620      | 2593.0     | -15.75                  | 18.45                     | 9.90               | 1.76 | H    | 0.456 | 26.59 |

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

| Freq<br>(MHz) | Bandwidth         | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBi) | C.L  | Pol | Limit  | EIRP  |       |
|---------------|-------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                   |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 2498.5        | LTE B41/<br>5 MHz | QPSK       | -22.98                  | 13.84                     | 10.51             | 2.57 | V   | < 2.00 | 0.151 | 21.78 |
|               |                   | 16-QAM     | -24.24                  | 12.58                     | 10.51             | 2.57 | V   |        | 0.113 | 20.52 |
|               |                   | 64-QAM     | -25.13                  | 11.69                     | 10.51             | 2.57 | V   |        | 0.092 | 19.63 |
| 2593.0        |                   | QPSK       | -23.35                  | 13.87                     | 10.64             | 2.71 | V   |        | 0.151 | 21.80 |
|               |                   | 16-QAM     | -24.27                  | 12.95                     | 10.64             | 2.71 | V   |        | 0.122 | 20.88 |
|               |                   | 64-QAM     | -25.22                  | 12.00                     | 10.64             | 2.71 | V   |        | 0.098 | 19.93 |
| 2687.5        |                   | QPSK       | -24.41                  | 12.64                     | 10.74             | 2.75 | V   |        | 0.116 | 20.63 |
|               |                   | 16-QAM     | -25.34                  | 11.71                     | 10.74             | 2.75 | V   |        | 0.093 | 19.70 |
|               |                   | 64-QAM     | -26.28                  | 10.77                     | 10.74             | 2.75 | V   |        | 0.075 | 18.76 |

| Freq<br>(MHz) | Bandwidth          | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBi) | C.L  | Pol | Limit  | EIRP  |       |
|---------------|--------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                    |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 2501.0        | LTE B41/<br>10 MHz | QPSK       | -22.73                  | 14.09                     | 10.51             | 2.57 | V   | < 2.00 | 0.160 | 22.03 |
|               |                    | 16-QAM     | -23.91                  | 12.91                     | 10.51             | 2.57 | V   |        | 0.122 | 20.85 |
|               |                    | 64-QAM     | -24.84                  | 11.98                     | 10.51             | 2.57 | V   |        | 0.098 | 19.92 |
| 2593.0        |                    | QPSK       | -23.34                  | 13.88                     | 10.64             | 2.71 | V   |        | 0.152 | 21.81 |
|               |                    | 16-QAM     | -24.25                  | 12.97                     | 10.64             | 2.71 | V   |        | 0.123 | 20.90 |
|               |                    | 64-QAM     | -25.24                  | 11.98                     | 10.64             | 2.71 | V   |        | 0.098 | 19.91 |
| 2685.0        |                    | QPSK       | -24.43                  | 12.81                     | 10.73             | 2.75 | V   |        | 0.120 | 20.79 |
|               |                    | 16-QAM     | -25.33                  | 11.91                     | 10.73             | 2.75 | V   |        | 0.097 | 19.89 |
|               |                    | 64-QAM     | -26.31                  | 10.93                     | 10.73             | 2.75 | V   |        | 0.078 | 18.91 |

| Freq<br>(MHz) | Bandwidth          | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBi) | C.L  | Pol | Limit  | EIRP  |       |
|---------------|--------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                    |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 2503.5        | LTE B41/<br>15 MHz | QPSK       | -22.84                  | 13.99                     | 10.58             | 2.57 | V   | < 2.00 | 0.158 | 22.00 |
|               |                    | 16-QAM     | -23.98                  | 12.85                     | 10.58             | 2.57 | V   |        | 0.122 | 20.86 |
|               |                    | 64-QAM     | -24.89                  | 11.94                     | 10.58             | 2.57 | V   |        | 0.099 | 19.95 |
| 2593.0        |                    | QPSK       | -23.25                  | 13.97                     | 10.64             | 2.71 | V   |        | 0.155 | 21.90 |
|               |                    | 16-QAM     | -24.17                  | 13.05                     | 10.64             | 2.71 | V   |        | 0.125 | 20.98 |
|               |                    | 64-QAM     | -25.10                  | 12.12                     | 10.64             | 2.71 | V   |        | 0.101 | 20.05 |
| 2682.5        |                    | QPSK       | -24.39                  | 13.04                     | 10.72             | 2.75 | V   |        | 0.126 | 21.01 |
|               |                    | 16-QAM     | -25.33                  | 12.10                     | 10.72             | 2.75 | V   |        | 0.102 | 20.07 |
|               |                    | 64-QAM     | -26.27                  | 11.16                     | 10.72             | 2.75 | V   |        | 0.082 | 19.13 |

| Freq<br>(MHz) | Bandwidth          | Modulation | Measured<br>Level (dBm) | Substitute<br>Level (dBm) | Ant.<br>Gain(dBi) | C.L  | Pol | Limit  | EIRP  |       |
|---------------|--------------------|------------|-------------------------|---------------------------|-------------------|------|-----|--------|-------|-------|
|               |                    |            |                         |                           |                   |      |     | W      | W     | dBm   |
| 2506.0        | LTE B41/<br>20 MHz | QPSK       | -22.79                  | 14.04                     | 10.58             | 2.57 | V   | < 2.00 | 0.160 | 22.05 |
|               |                    | 16-QAM     | -23.82                  | 13.01                     | 10.58             | 2.57 | V   |        | 0.126 | 21.02 |
|               |                    | 64-QAM     | -24.83                  | 12.00                     | 10.58             | 2.57 | V   |        | 0.100 | 20.01 |
| 2593.0        |                    | QPSK       | -23.34                  | 13.88                     | 10.64             | 2.71 | V   |        | 0.152 | 21.81 |
|               |                    | 16-QAM     | -24.26                  | 12.96                     | 10.64             | 2.71 | V   |        | 0.123 | 20.89 |
|               |                    | 64-QAM     | -25.22                  | 12.00                     | 10.64             | 2.71 | V   |        | 0.098 | 19.93 |
| 2680.0        |                    | QPSK       | -24.54                  | 12.89                     | 10.72             | 2.75 | V   |        | 0.122 | 20.86 |
|               |                    | 16-QAM     | -25.46                  | 11.97                     | 10.72             | 2.75 | V   |        | 0.099 | 19.94 |
|               |                    | 64-QAM     | -26.44                  | 10.99                     | 10.72             | 2.75 | V   |        | 0.079 | 18.96 |

## 8.2 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY : 2593.0 MHz  
 □ MEASURED OUTPUT POWER: 21.80 dBm = 0.151 W  
 □ MODE: LTE B41  
 □ MODULATION SIGNAL: 5 MHz QPSK  
 □ DISTANCE: 1 meter  
 □ LIMIT:  $55 + 10 \log_{10}(W) =$  46.80 dBc

| Ch                | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L  | Pol | Result (dBm) | dBc   |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|-------|
| 39675<br>(2498.5) | 4 997.00   | -56.68               | 12.56           | -66.49                 | 3.81 | H   | -57.74       | 79.54 |
|                   | 7 495.50   | -53.64               | 10.78           | -53.25                 | 4.71 | V   | -47.18       | 68.98 |
|                   | 9 994.00   | -55.04               | 11.18           | -50.62                 | 5.52 | H   | -44.96       | 66.76 |
|                   | 12 492.50  | -57.44               | 13.08           | -53.03                 | 6.29 | H   | -46.24       | 68.04 |
|                   | 14 991.00  | -57.72               | 11.40           | -47.21                 | 6.99 | H   | -42.80       | 64.60 |
| 40620<br>(2593.0) | 5 186.00   | -54.20               | 12.55           | -62.97                 | 3.82 | V   | -54.25       | 76.05 |
|                   | 7 779.00   | -56.11               | 11.41           | -56.28                 | 4.79 | V   | -49.66       | 71.46 |
|                   | 10 372.00  | -59.23               | 11.43           | -53.78                 | 5.59 | H   | -47.94       | 69.74 |
| 41565<br>(2687.5) | 5 375.00   | -44.40               | 13.06           | -53.58                 | 3.85 | V   | -44.36       | 66.16 |
|                   | 8 062.50   | -57.01               | 10.74           | -55.20                 | 4.86 | V   | -49.32       | 71.12 |
|                   | 10 750.00  | -59.26               | 11.31           | -54.25                 | 5.65 | V   | -48.59       | 70.39 |

■ OPERATING FREQUENCY : 2501.0 MHz  
 ■ MEASURED OUTPUT POWER: 22.03 dBm = 0.160 W  
 ■ MODE: LTE B41  
 ■ MODULATION SIGNAL: 10 MHz QPSK  
 ■ DISTANCE: 1 meter  
 ■ LIMIT:  $55 + 10 \log_{10}(W) =$  47.03 dBc

| Ch                | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L  | Pol | Result (dBm) | dBc   |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|-------|
| 39700<br>(2501.0) | 5 002.00   | -55.21               | 12.56           | -65.02                 | 3.81 | H   | -56.27       | 78.30 |
|                   | 7 503.00   | -54.58               | 10.78           | -54.50                 | 4.71 | H   | -48.43       | 70.46 |
|                   | 10 004.00  | -55.62               | 11.22           | -51.43                 | 5.52 | H   | -45.74       | 67.77 |
|                   | 12 505.00  | -55.49               | 13.11           | -51.33                 | 6.25 | V   | -44.47       | 66.50 |
|                   | 15 006.00  | -59.40               | 11.45           | -49.13                 | 6.99 | H   | -44.67       | 66.70 |
| 40620<br>(2593.0) | 5 186.00   | -55.45               | 12.55           | -64.22                 | 3.82 | V   | -55.50       | 77.53 |
|                   | 7 779.00   | -57.81               | 11.41           | -57.98                 | 4.79 | H   | -51.36       | 73.39 |
|                   | 10 372.00  | -59.60               | 11.43           | -54.15                 | 5.59 | V   | -48.31       | 70.34 |
| 41540<br>(2685.0) | 5 370.00   | -43.84               | 13.07           | -52.94                 | 3.85 | H   | -43.72       | 65.75 |
|                   | 8 055.00   | -55.17               | 10.74           | -53.35                 | 4.87 | H   | -47.48       | 69.51 |
|                   | 10 740.00  | -55.67               | 11.32           | -50.96                 | 5.71 | H   | -45.35       | 67.38 |

□ OPERATING FREQUENCY : 2503.5 MHz  
 □ MEASURED OUTPUT POWER: 22.00 dBm = 0.158 W  
 □ MODE: LTE B41  
 □ MODULATION SIGNAL: 15 MHz QPSK  
 □ DISTANCE: 1 meter  
 □ LIMIT:  $55 + 10 \log_{10}(W) =$  47.00 dBc

| Ch                | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L  | Pol | Result (dBm) | dBc   |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|-------|
| 39725<br>(2503.5) | 5 007.00   | -54.36               | 12.55           | -64.38                 | 3.88 | V   | -55.71       | 77.71 |
|                   | 7 510.50   | -53.97               | 10.78           | -54.38                 | 4.71 | V   | -48.31       | 70.31 |
|                   | 10 014.00  | -55.02               | 11.25           | -50.78                 | 5.53 | H   | -45.06       | 67.06 |
|                   | 12 517.50  | -54.31               | 13.12           | -50.02                 | 6.21 | V   | -43.11       | 65.10 |
| 40620<br>(2593.0) | 5 186.00   | -55.55               | 12.55           | -64.32                 | 3.82 | V   | -55.60       | 77.59 |
|                   | 7 779.00   | -56.71               | 11.41           | -56.88                 | 4.79 | V   | -50.26       | 72.26 |
|                   | 10 372.00  | -58.54               | 11.43           | -53.09                 | 5.59 | H   | -47.25       | 69.25 |
| 41515<br>(2682.5) | 5 365.00   | -44.35               | 13.08           | -53.34                 | 3.86 | H   | -44.11       | 66.11 |
|                   | 8 047.50   | -56.80               | 10.73           | -54.97                 | 4.87 | H   | -49.11       | 71.11 |
|                   | 10 730.00  | -57.39               | 11.33           | -52.94                 | 5.78 | V   | -47.39       | 69.38 |

□ OPERATING FREQUENCY : 2506.0 MHz  
 □ MEASURED OUTPUT POWER: 22.05 dBm = 0.160 W  
 □ MODE: LTE B41  
 □ MODULATION SIGNAL: 20 MHz QPSK  
 □ DISTANCE: 1 meter  
 □ LIMIT:  $55 + 10 \log_{10}(W) =$  47.05 dBc

| Ch                | Freq (MHz) | Measured Level (dBm) | Ant. Gain (dBi) | Substitute Level (dBm) | C.L  | Pol | Result (dBm) | dBc   |
|-------------------|------------|----------------------|-----------------|------------------------|------|-----|--------------|-------|
| 39750<br>(2506.0) | 5 012.00   | -56.13               | 12.55           | -66.15                 | 3.88 | H   | -57.48       | 79.53 |
|                   | 7 518.00   | -56.05               | 10.82           | -56.75                 | 4.71 | H   | -50.64       | 72.69 |
|                   | 10 024.00  | -56.30               | 11.29           | -52.08                 | 5.54 | H   | -46.32       | 68.37 |
|                   | 12 530.00  | -56.04               | 13.14           | -51.53                 | 6.22 | V   | -44.61       | 66.66 |
| 40620<br>(2593.0) | 5 186.00   | -55.10               | 12.55           | -63.87                 | 3.82 | H   | -55.15       | 77.19 |
|                   | 7 779.00   | -56.45               | 11.41           | -56.62                 | 4.79 | H   | -50.00       | 72.05 |
|                   | 10 372.00  | -58.66               | 11.43           | -53.21                 | 5.59 | H   | -47.37       | 69.42 |
| 41490<br>(2680.0) | 5 360.00   | -45.94               | 13.09           | -54.81                 | 3.86 | H   | -45.58       | 67.63 |
|                   | 8 040.00   | -55.91               | 10.73           | -54.12                 | 4.86 | V   | -48.25       | 70.30 |
|                   | 10 720.00  | -55.96               | 11.33           | -51.59                 | 5.81 | H   | -46.07       | 68.12 |

### 8.3 PEAK-TO-AVERAGE RATIO

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (dB) |
|------|------------|-----------------|------------|---------------------|-----------------------|-----------|
| 41   | 5 MHz      | 2593.0          | QPSK       | 25                  | 0                     | 5.27      |
|      |            |                 | 16-QAM     |                     |                       | 6.43      |
|      |            |                 | 64-QAM     |                     |                       | 6.66      |
|      | 10 MHz     |                 | QPSK       | 50                  |                       | 5.43      |
|      |            |                 | 16-QAM     |                     |                       | 6.13      |
|      |            |                 | 64-QAM     |                     |                       | 6.85      |
|      | 15 MHz     |                 | QPSK       | 75                  |                       | 5.35      |
|      |            |                 | 16-QAM     |                     |                       | 6.13      |
|      |            |                 | 64-QAM     |                     |                       | 6.47      |
|      | 20 MHz     |                 | QPSK       | 100                 |                       | 5.34      |
|      |            |                 | 16-QAM     |                     |                       | 6.08      |
|      |            |                 | 64-QAM     |                     |                       | 6.35      |

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 87 ~ 98.

#### 8.4 OCCUPIED BANDWIDTH

| Band | Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | Data (MHz) |
|------|------------|-----------------|------------|---------------------|-----------------------|------------|
| 41   | 5 MHz      | 2593.0          | QPSK       | 25                  | 0                     | 4.5111     |
|      |            |                 | 16-QAM     |                     |                       | 4.5102     |
|      |            |                 | 64-QAM     |                     |                       | 4.5065     |
|      | 10 MHz     |                 | QPSK       | 50                  |                       | 8.9642     |
|      |            |                 | 16-QAM     |                     |                       | 8.9898     |
|      |            |                 | 64-QAM     |                     |                       | 8.9775     |
|      | 15 MHz     |                 | QPSK       | 75                  |                       | 13.449     |
|      |            |                 | 16-QAM     |                     |                       | 13.442     |
|      |            |                 | 64-QAM     |                     |                       | 13.406     |
|      | 20 MHz     |                 | QPSK       | 100                 |                       | 17.907     |
|      |            |                 | 16-QAM     |                     |                       | 17.886     |
|      |            |                 | 64-QAM     |                     |                       | 17.887     |

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 75 ~ 86.

## 8.5 CONDUCTED SPURIOUS EMISSIONS

| Band | Band Width (MHz) | Frequency (MHz) | Frequency of Maximum Harmonic (GHz) | Factor (dB) | Measurement Maximum Data (dBm) | Result (dBm) | Limit (dBm) |
|------|------------------|-----------------|-------------------------------------|-------------|--------------------------------|--------------|-------------|
| 41   | 5                | 2498.5          | 26.1249                             | 34.110      | -76.502                        | -42.392      | -25.00      |
|      |                  | 2593.0          | 26.1355                             | 34.110      | -76.409                        | -42.299      |             |
|      |                  | 2687.5          | 2.0439                              | 31.955      | -63.536                        | -31.581      |             |
|      | 10               | 2501.0          | 26.3812                             | 34.110      | -76.598                        | -42.488      |             |
|      |                  | 2593.0          | 26.1245                             | 34.110      | -76.561                        | -42.451      |             |
|      |                  | 2685.0          | 26.1453                             | 34.110      | -76.552                        | -42.442      |             |
|      | 15               | 2503.5          | 25.7781                             | 34.110      | -76.590                        | -42.480      |             |
|      |                  | 2593.0          | 26.1292                             | 34.110      | -76.450                        | -42.340      |             |
|      |                  | 2682.5          | 26.1313                             | 34.110      | -76.196                        | -42.086      |             |
|      | 20               | 2506.0          | 26.1768                             | 34.110      | -76.792                        | -42.682      |             |
|      |                  | 2593.0          | 26.1708                             | 34.110      | -76.725                        | -42.615      |             |
|      |                  | 2680.0          | 26.1211                             | 34.110      | -76.420                        | -42.310      |             |

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 99 ~ 122.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

| Frequency Range (GHz) | Factor [dB] |
|-----------------------|-------------|
| 0.03 – 1              | 29.249      |
| 1 – 5                 | 31.955      |
| 5 – 10                | 32.570      |
| 10 – 15               | 33.095      |
| 15 – 20               | 33.468      |
| Above 20              | 34.110      |

## 8.6 CHANNEL EDGE

| Band Width | Frequency (MHz) | Modulation | RB (Size/Offset) | 2 495 MHz ~ 2 496 MHz | C.E ~ (C.E +1MHz) | 2 490.5 MHz ~ 2 495 MHz | (C.E + 1 MHz) ~ (C.E + 5 MHz) | Below 2 490.5 MHz | (C.E + 5 MHz) ~ (C.E + X MHz) | Above (C.E + X MHz) |
|------------|-----------------|------------|------------------|-----------------------|-------------------|-------------------------|-------------------------------|-------------------|-------------------------------|---------------------|
|            |                 |            |                  | Lower                 | Upper             | Lower                   | Upper                         | Lower             | Upper                         | Upper               |
| 5 MHz      | 2498.5          | QPSK       | 25/0             | -28.74                | -29.30            | -22.45                  | -22.81                        | -31.21            | -30.25                        | -33.23              |
| 10 MHz     | 2501.0          | QPSK       | 50/0             | -28.96                | -29.46            | -23.36                  | -23.76                        | -26.86            | -26.62                        | -32.75              |
| 15 MHz     | 2503.5          | QPSK       | 75/0             | -29.28                | -29.75            | -25.11                  | -25.52                        | -26.98            | -26.56                        | -34.14              |
| 20 MHz     | 2506.0          | QPSK       | 100/0            | -29.53                | -29.64            | -26.35                  | -26.45                        | -27.90            | -27.61                        | -35.42              |
| Limit(dBm) |                 |            |                  | -13.0                 | -10.0             | -13.0                   | -10.0                         | -25.0             | -13.0                         | -25.0               |

| Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | C.E ~ (C.E ± 1 MHz) |        | (C.E ± 1 MHz) ~ (C.E ± 5 MHz) |        |
|------------|-----------------|------------|---------------------|-----------------------|---------------------|--------|-------------------------------|--------|
|            |                 |            |                     |                       | Lower               | Upper  | Lower                         | Upper  |
| 5 MHz      | 2593.0          | QPSK       | 25                  | 0                     | -30.09              | -30.01 | -24.86                        | -24.87 |
|            | 2687.5          | QPSK       | 25                  | 0                     | -25.21              | -25.26 | -18.11                        | -18.09 |
| 10 MHz     | 2593.0          | QPSK       | 50                  | 0                     | -32.25              | -31.41 | -26.68                        | -26.70 |
|            | 2685.0          | QPSK       | 50                  | 0                     | -26.00              | -26.33 | -20.23                        | -20.50 |
| 15 MHz     | 2593.0          | QPSK       | 75                  | 0                     | -32.53              | -32.70 | -29.33                        | -28.29 |
|            | 2682.5          | QPSK       | 75                  | 0                     | -26.44              | -27.00 | -22.40                        | -22.56 |
| 20 MHz     | 2593.0          | QPSK       | 100                 | 0                     | -33.73              | -33.11 | -30.77                        | -30.00 |
|            | 2680.0          | QPSK       | 100                 | 0                     | -26.26              | -27.27 | -23.03                        | -23.52 |
| Limit(dBm) |                 |            |                     |                       | -10.0               |        | -10.0                         |        |

| Band Width | Frequency (MHz) | Modulation | Resource Block Size | Resource Block Offset | (C.E ± 5 MHz) ~ (C.E ± X MHz) |        | Above (C.E ± X MHz) |        |
|------------|-----------------|------------|---------------------|-----------------------|-------------------------------|--------|---------------------|--------|
|            |                 |            |                     |                       | Lower                         | Upper  | Lower               | Upper  |
| 5 MHz      | 2593.0          | QPSK       | 25                  | 0                     | -32.30                        | -31.83 | -34.02              | -33.78 |
|            | 2687.5          | QPSK       | 25                  | 0                     | -29.42                        | -29.64 | -32.53              | -32.17 |
| 10 MHz     | 2593.0          | QPSK       | 50                  | 0                     | -30.04                        | -29.10 | -35.82              | -34.80 |
|            | 2685.0          | QPSK       | 50                  | 0                     | -23.88                        | -24.06 | -33.65              | -32.88 |
| 15 MHz     | 2593.0          | QPSK       | 75                  | 0                     | -30.67                        | -30.38 | -37.81              | -36.19 |
|            | 2682.5          | QPSK       | 75                  | 0                     | -24.00                        | -24.82 | -35.51              | -34.61 |
| 20 MHz     | 2593.0          | QPSK       | 100                 | 0                     | -32.32                        | -31.10 | -39.71              | -38.26 |
|            | 2680.0          | QPSK       | 100                 | 0                     | -24.77                        | -25.60 | -37.34              | -35.97 |
| Limit(dBm) |                 |            |                     |                       | -13.0                         |        | -25.0               |        |


**Note:**

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
  - Duty Cycle Factor(dB) = 3.979
6. Plots of the EUT's Channel Edge are shown Page 47 ~ 74. (1RB & Full RB)

## 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2498 500 007   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2498 500 021   | 14.2                 | 0.000 001     | 0.006  |
| 100 %          |             | -20        | 2498 500 020   | 12.8                 | 0.000 001     | 0.005  |
| 100 %          |             | -10        | 2498 499 991   | -15.8                | -0.000 001    | -0.006 |
| 100 %          |             | 0          | 2498 500 018   | 11.4                 | 0.000 000     | 0.005  |
| 100 %          |             | +10        | 2498 500 025   | 18.1                 | 0.000 001     | 0.007  |
| 100 %          |             | +30        | 2498 500 015   | 7.9                  | 0.000 000     | 0.003  |
| 100 %          |             | +40        | 2498 500 020   | 12.6                 | 0.000 001     | 0.005  |
| 100 %          |             | +50        | 2498 499 992   | -15.4                | -0.000 001    | -0.006 |
| Batt. Endpoint | 3.400       | +20        | 2498 500 002   | -5.1                 | 0.000 000     | -0.002 |

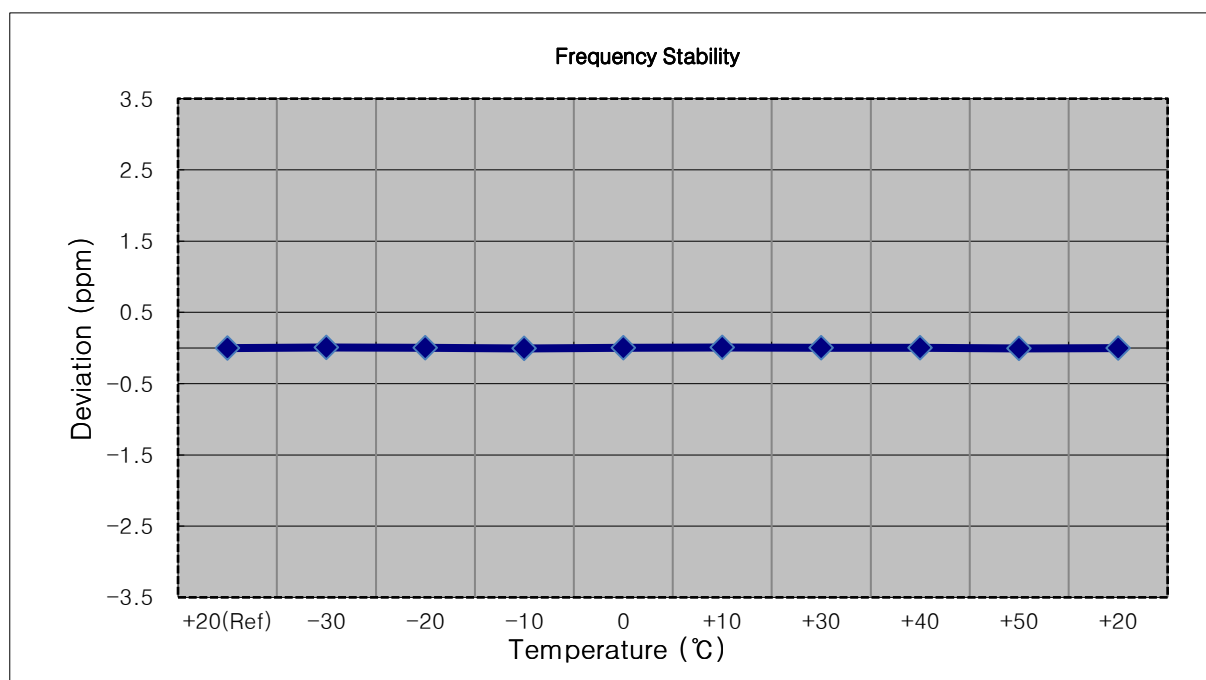


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2501,000,000 Hz  
☐ BANDWIDTH: 39700 (10 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2501 000 016   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2501 000 031   | 14.7                 | 0.000 001     | 0.006  |
| 100 %          |             | -20        | 2501 000 023   | 6.9                  | 0.000 000     | 0.003  |
| 100 %          |             | -10        | 2501 000 019   | 2.3                  | 0.000 000     | 0.001  |
| 100 %          |             | 0          | 2501 000 002   | -14.7                | -0.000 001    | -0.006 |
| 100 %          |             | +10        | 2501 000 012   | -3.9                 | 0.000 000     | -0.002 |
| 100 %          |             | +30        | 2501 000 006   | -9.9                 | 0.000 000     | -0.004 |
| 100 %          |             | +40        | 2501 000 031   | 14.5                 | 0.000 001     | 0.006  |
| 100 %          |             | +50        | 2501 000 000   | -15.9                | -0.000 001    | -0.006 |
| Batt. Endpoint | 3.400       | +20        | 2501 000 030   | 13.8                 | 0.000 001     | 0.006  |

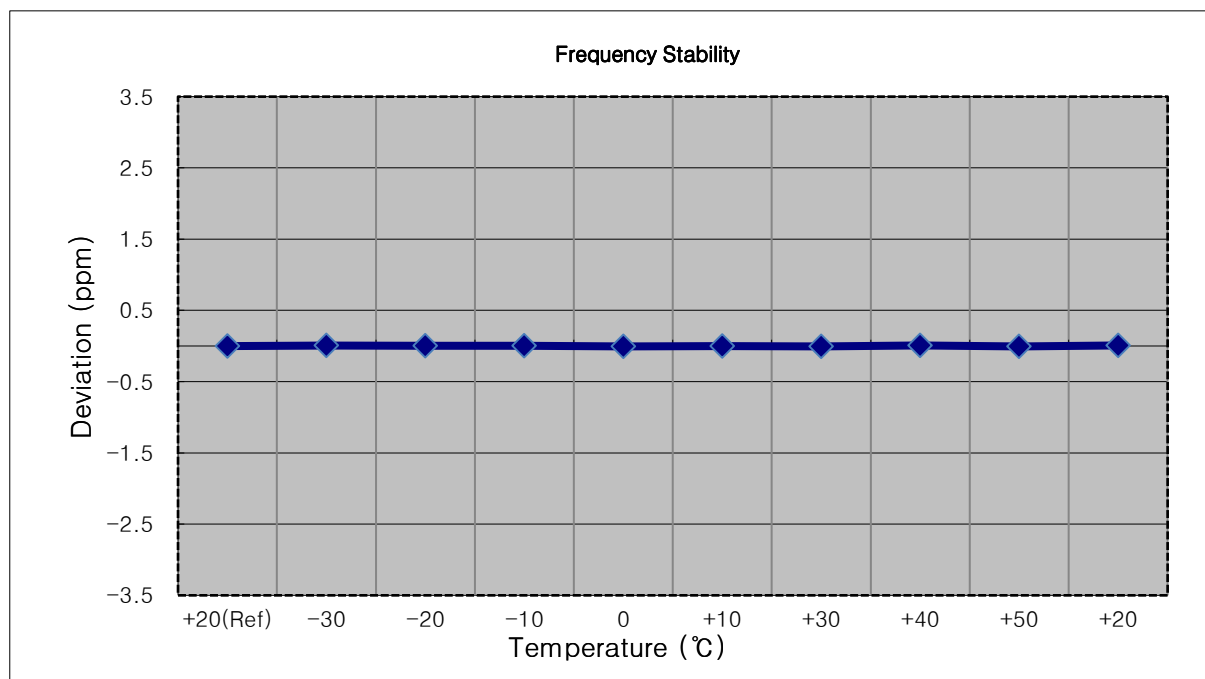


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2503 500 008   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2503 500 004   | -4.3                 | 0.000 000     | -0.002 |
| 100 %          |             | -20        | 2503 499 998   | -10.3                | 0.000 000     | -0.004 |
| 100 %          |             | -10        | 2503 499 986   | -21.5                | -0.000 001    | -0.009 |
| 100 %          |             | 0          | 2503 499 995   | -13.0                | -0.000 001    | -0.005 |
| 100 %          |             | +10        | 2503 499 982   | -26.4                | -0.000 001    | -0.011 |
| 100 %          |             | +30        | 2503 500 012   | 4.5                  | 0.000 000     | 0.002  |
| 100 %          |             | +40        | 2503 500 006   | -1.8                 | 0.000 000     | -0.001 |
| 100 %          |             | +50        | 2503 499 994   | -14.0                | -0.000 001    | -0.006 |
| Batt. Endpoint | 3.400       | +20        | 2503 499 998   | -10.1                | 0.000 000     | -0.004 |

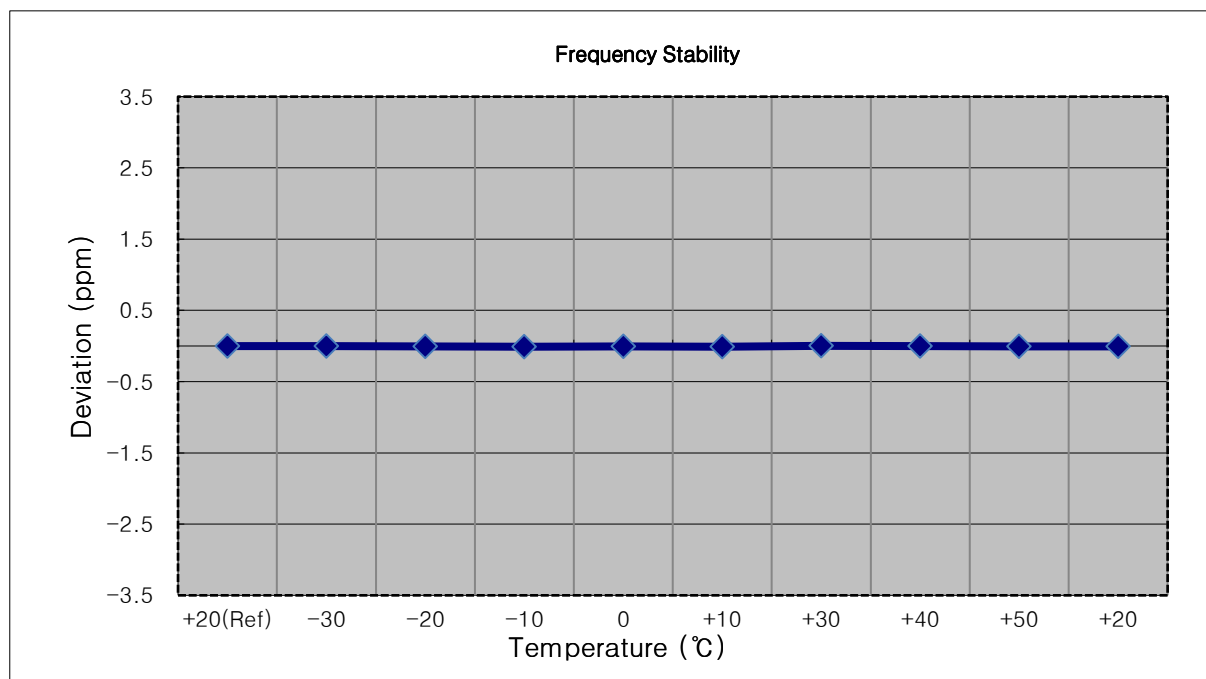


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2505 999 984   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2505 999 973   | -10.4                | 0.000 000     | -0.004 |
| 100 %          |             | -20        | 2505 999 971   | -13.0                | -0.000 001    | -0.005 |
| 100 %          |             | -10        | 2505 999 977   | -6.6                 | 0.000 000     | -0.003 |
| 100 %          |             | 0          | 2505 999 970   | -13.2                | -0.000 001    | -0.005 |
| 100 %          |             | +10        | 2505 999 970   | -13.8                | -0.000 001    | -0.006 |
| 100 %          |             | +30        | 2505 999 980   | -3.7                 | 0.000 000     | -0.001 |
| 100 %          |             | +40        | 2505 999 980   | -3.6                 | 0.000 000     | -0.001 |
| 100 %          |             | +50        | 2505 999 962   | -21.1                | -0.000 001    | -0.008 |
| Batt. Endpoint | 3.400       | +20        | 2505 999 972   | -11.3                | 0.000 000     | -0.005 |

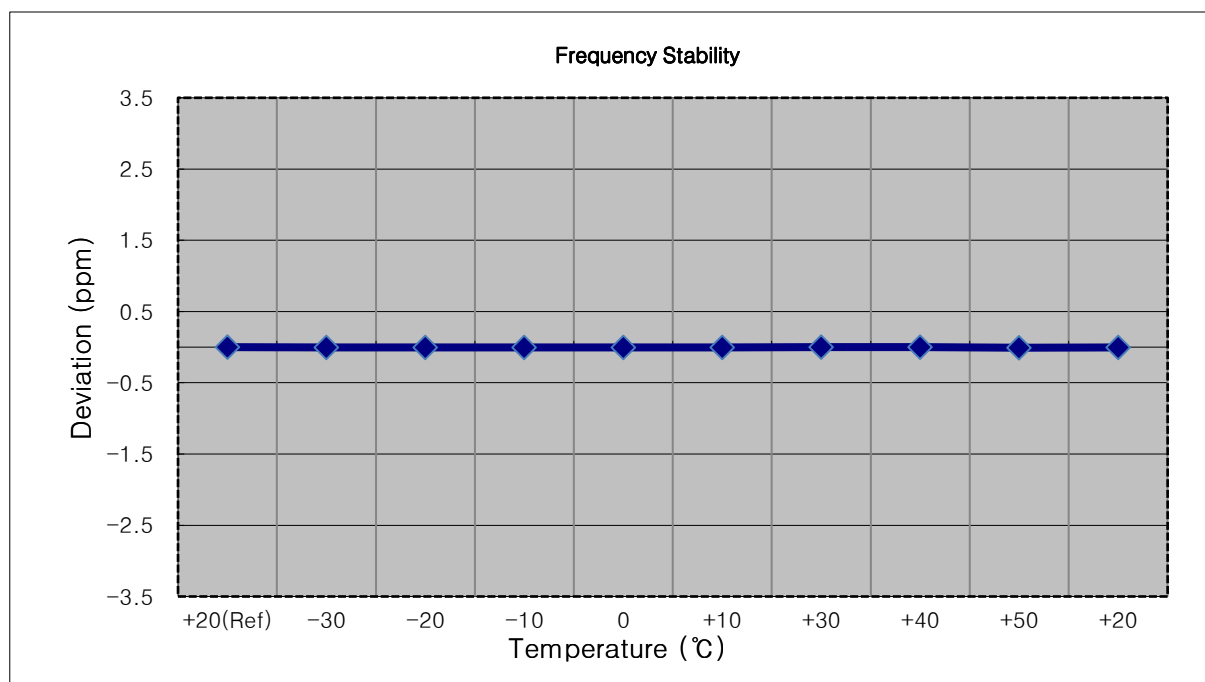


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2593,000,000 Hz  
☐ BANDWIDTH: 40620 (5 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2592 999 976   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2592 999 966   | -9.8                 | 0.000 000     | -0.004 |
| 100 %          |             | -20        | 2592 999 991   | 15.0                 | 0.000 001     | 0.006  |
| 100 %          |             | -10        | 2592 999 956   | -19.6                | -0.000 001    | -0.008 |
| 100 %          |             | 0          | 2592 999 982   | 6.5                  | 0.000 000     | 0.003  |
| 100 %          |             | +10        | 2592 999 993   | 17.5                 | 0.000 001     | 0.007  |
| 100 %          |             | +30        | 2592 999 958   | -17.4                | -0.000 001    | -0.007 |
| 100 %          |             | +40        | 2592 999 984   | 8.4                  | 0.000 000     | 0.003  |
| 100 %          |             | +50        | 2592 999 940   | -35.7                | -0.000 001    | -0.014 |
| Batt. Endpoint | 3.400       | +20        | 2592 999 960   | -15.3                | -0.000 001    | -0.006 |

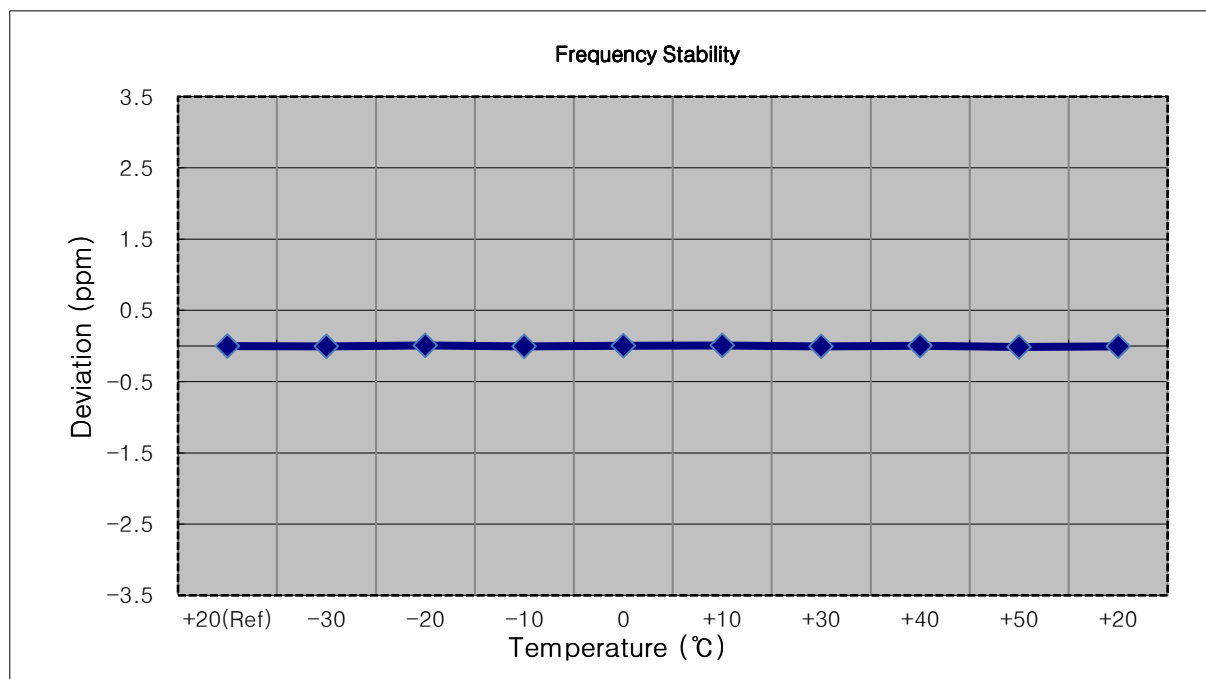


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2593,000,000 Hz  
☐ BANDWIDTH: 40620 (10 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2592 999 982   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2592 999 986   | 4.0                  | 0.000 000     | 0.002  |
| 100 %          |             | -20        | 2592 999 969   | -12.9                | 0.000 000     | -0.005 |
| 100 %          |             | -10        | 2592 999 969   | -12.9                | 0.000 000     | -0.005 |
| 100 %          |             | 0          | 2592 999 969   | -12.9                | 0.000 000     | -0.005 |
| 100 %          |             | +10        | 2592 999 992   | 10.0                 | 0.000 000     | 0.004  |
| 100 %          |             | +30        | 2592 999 980   | -1.7                 | 0.000 000     | -0.001 |
| 100 %          |             | +40        | 2592 999 973   | -8.9                 | 0.000 000     | -0.003 |
| 100 %          |             | +50        | 2592 999 959   | -23.3                | -0.000 001    | -0.009 |
| Batt. Endpoint | 3.400       | +20        | 2592 999 966   | -16.4                | -0.000 001    | -0.006 |

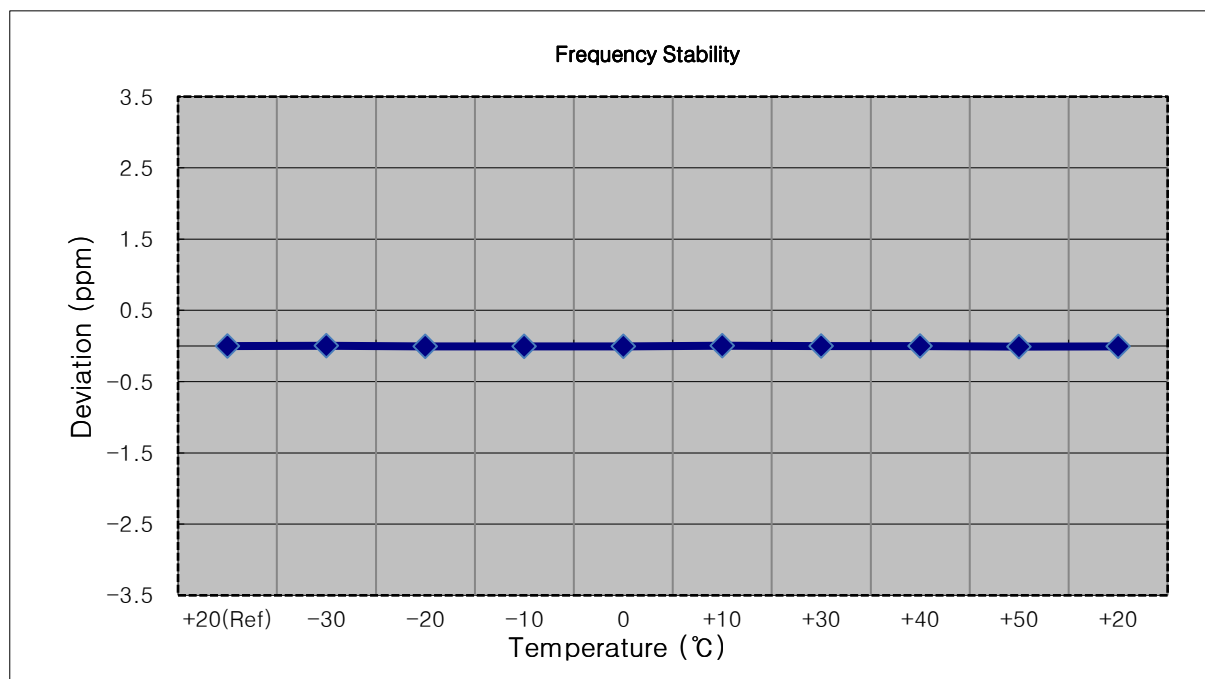


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2593,000,000 Hz  
☐ BANDWIDTH: 40620 (15 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2593 000 017   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2593 000 029   | 12.6                 | 0.000 000     | 0.005  |
| 100 %          |             | -20        | 2593 000 026   | 9.2                  | 0.000 000     | 0.004  |
| 100 %          |             | -10        | 2592 999 998   | -19.0                | -0.000 001    | -0.007 |
| 100 %          |             | 0          | 2593 000 012   | -5.0                 | 0.000 000     | -0.002 |
| 100 %          |             | +10        | 2592 999 996   | -21.2                | -0.000 001    | -0.008 |
| 100 %          |             | +30        | 2593 000 010   | -7.0                 | 0.000 000     | -0.003 |
| 100 %          |             | +40        | 2593 000 042   | 25.6                 | 0.000 001     | 0.010  |
| 100 %          |             | +50        | 2593 000 032   | 15.1                 | 0.000 001     | 0.006  |
| Batt. Endpoint | 3.400       | +20        | 2593 000 006   | -10.8                | 0.000 000     | -0.004 |

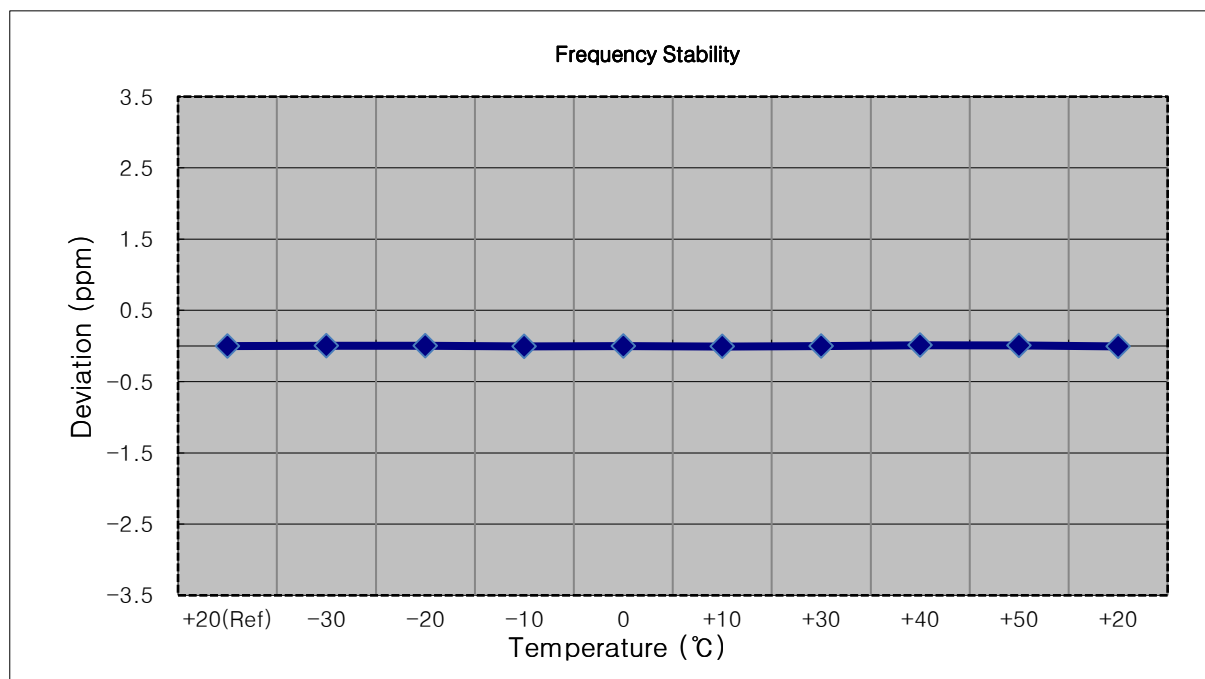


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2592 999 985   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2592 999 976   | -9.1                 | 0.000 000     | -0.004 |
| 100 %          |             | -20        | 2592 999 998   | 13.5                 | 0.000 001     | 0.005  |
| 100 %          |             | -10        | 2592 999 999   | 14.0                 | 0.000 001     | 0.005  |
| 100 %          |             | 0          | 2592 999 996   | 10.6                 | 0.000 000     | 0.004  |
| 100 %          |             | +10        | 2592 999 992   | 7.4                  | 0.000 000     | 0.003  |
| 100 %          |             | +30        | 2592 999 973   | -11.7                | 0.000 000     | -0.005 |
| 100 %          |             | +40        | 2592 999 980   | -5.1                 | 0.000 000     | -0.002 |
| 100 %          |             | +50        | 2592 999 959   | -25.8                | -0.000 001    | -0.010 |
| Batt. Endpoint | 3.400       | +20        | 2592 999 970   | -14.9                | -0.000 001    | -0.006 |

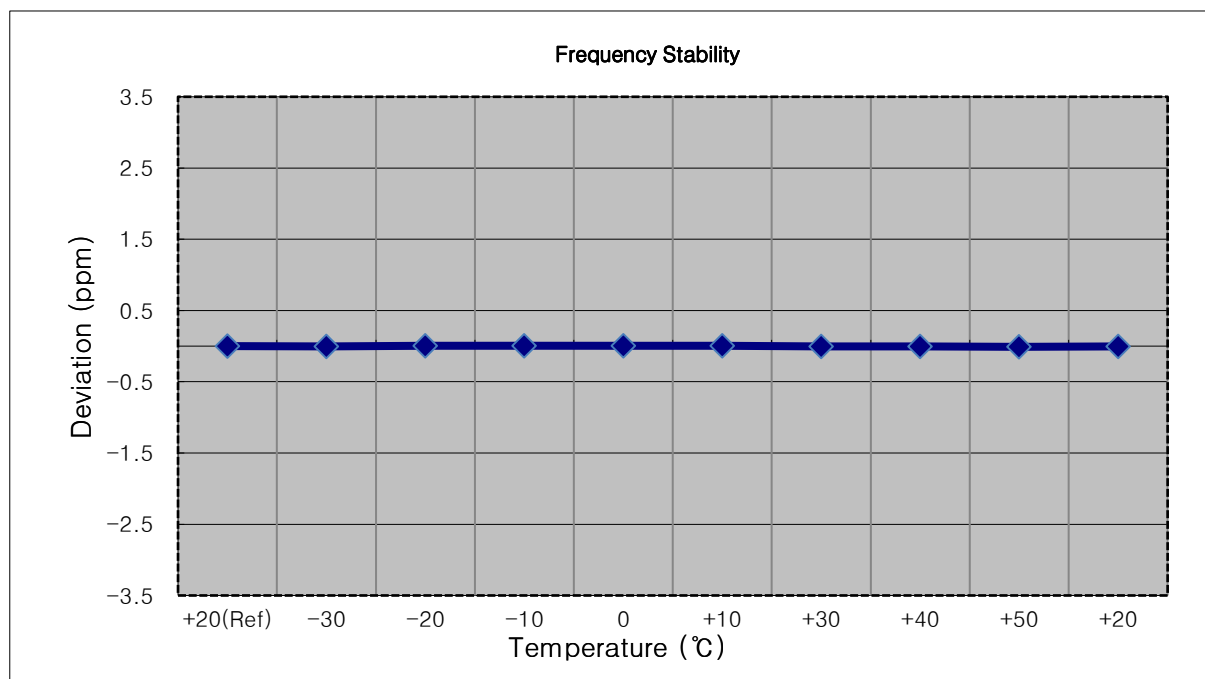


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2687 499 969   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2687 499 938   | -31.0                | -0.000 001    | -0.012 |
| 100 %          |             | -20        | 2687 499 996   | 27.0                 | 0.000 001     | 0.010  |
| 100 %          |             | -10        | 2687 499 979   | 9.6                  | 0.000 000     | 0.004  |
| 100 %          |             | 0          | 2687 499 992   | 23.4                 | 0.000 001     | 0.009  |
| 100 %          |             | +10        | 2687 499 990   | 20.9                 | 0.000 001     | 0.008  |
| 100 %          |             | +30        | 2687 499 940   | -29.0                | -0.000 001    | -0.011 |
| 100 %          |             | +40        | 2687 499 975   | 5.6                  | 0.000 000     | 0.002  |
| 100 %          |             | +50        | 2687 499 979   | 9.8                  | 0.000 000     | 0.004  |
| Batt. Endpoint | 3.400       | +20        | 2687 499 982   | 13.4                 | 0.000 000     | 0.005  |

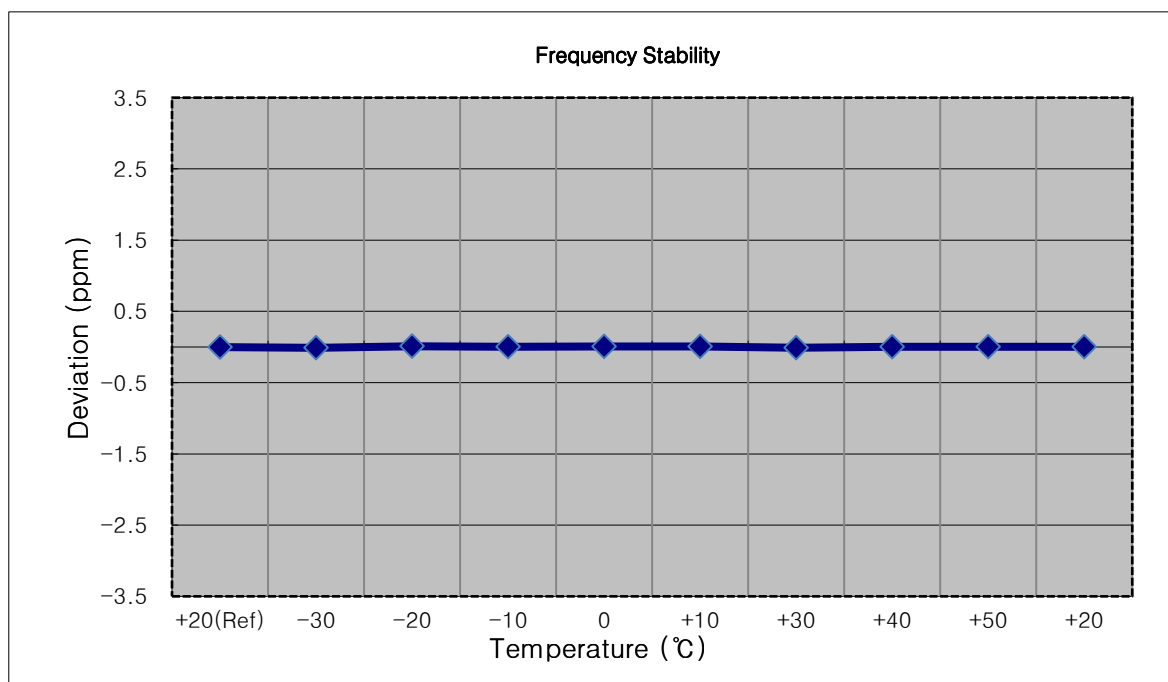


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2685,000,000 Hz  
☐ BANDWIDTH: 41540 (10 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2684 999 988   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2684 999 996   | 8.0                  | 0.000 000     | 0.003  |
| 100 %          |             | -20        | 2684 999 978   | -9.8                 | 0.000 000     | -0.004 |
| 100 %          |             | -10        | 2684 999 994   | 5.9                  | 0.000 000     | 0.002  |
| 100 %          |             | 0          | 2684 999 984   | -3.9                 | 0.000 000     | -0.001 |
| 100 %          |             | +10        | 2684 999 984   | -4.3                 | 0.000 000     | -0.002 |
| 100 %          |             | +30        | 2684 999 994   | 6.1                  | 0.000 000     | 0.002  |
| 100 %          |             | +40        | 2684 999 984   | -4.1                 | 0.000 000     | -0.002 |
| 100 %          |             | +50        | 2684 999 983   | -5.7                 | 0.000 000     | -0.002 |
| Batt. Endpoint | 3.400       | +20        | 2684 999 981   | -7.3                 | 0.000 000     | -0.003 |

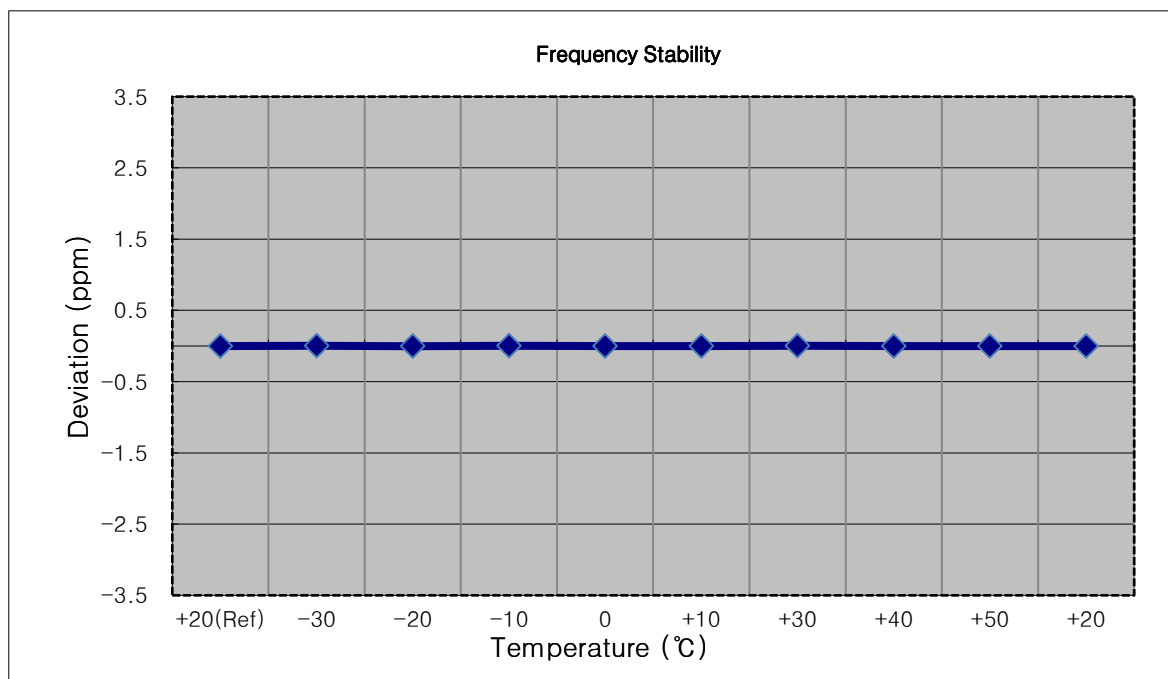


- ☐ MODE: LTE 41  
☐ OPERATING FREQUENCY: 2682,500,000 Hz  
☐ BANDWIDTH: 41515 (15 MHz)  
☐ REFERENCE VOLTAGE: 3.880 VDC  
☐ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2682 499 983   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2682 499 976   | -6.6                 | 0.000 000     | -0.002 |
| 100 %          |             | -20        | 2682 499 989   | 6.1                  | 0.000 000     | 0.002  |
| 100 %          |             | -10        | 2682 500 003   | 19.7                 | 0.000 001     | 0.007  |
| 100 %          |             | 0          | 2682 499 976   | -6.7                 | 0.000 000     | -0.002 |
| 100 %          |             | +10        | 2682 499 969   | -14.0                | -0.000 001    | -0.005 |
| 100 %          |             | +30        | 2682 499 979   | -3.8                 | 0.000 000     | -0.001 |
| 100 %          |             | +40        | 2682 499 988   | 5.3                  | 0.000 000     | 0.002  |
| 100 %          |             | +50        | 2682 499 959   | -24.2                | -0.000 001    | -0.009 |
| Batt. Endpoint | 3.400       | +20        | 2682 499 994   | 11.2                 | 0.000 000     | 0.004  |

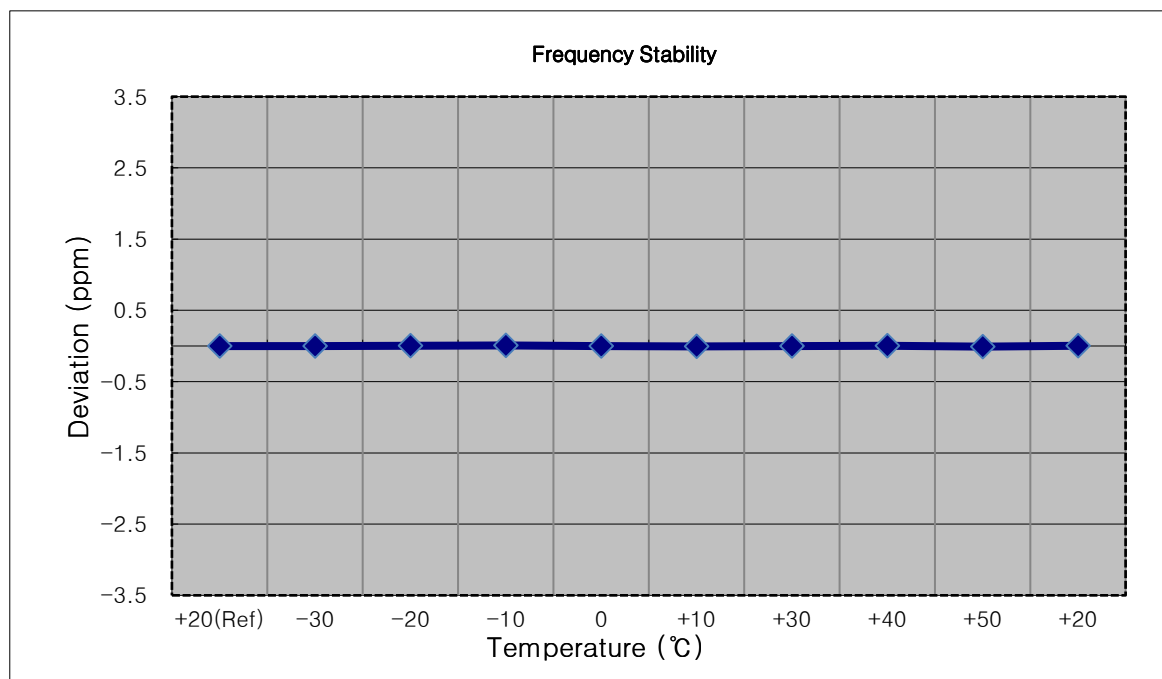


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

| Voltage (%)    | Power (VDC) | Temp. (°C) | Frequency (Hz) | Frequency Error (Hz) | Deviation (%) | ppm    |
|----------------|-------------|------------|----------------|----------------------|---------------|--------|
| 100 %          | 3.880       | +20(Ref)   | 2680 000 009   | 0.0                  | 0.000 000     | 0.000  |
| 100 %          |             | -30        | 2680 000 002   | -6.8                 | 0.000 000     | -0.003 |
| 100 %          |             | -20        | 2679 999 987   | -21.9                | -0.000 001    | -0.008 |
| 100 %          |             | -10        | 2679 999 998   | -10.5                | 0.000 000     | -0.004 |
| 100 %          |             | 0          | 2680 000 015   | 6.8                  | 0.000 000     | 0.003  |
| 100 %          |             | +10        | 2679 999 989   | -19.1                | -0.000 001    | -0.007 |
| 100 %          |             | +30        | 2679 999 984   | -24.9                | -0.000 001    | -0.009 |
| 100 %          |             | +40        | 2680 000 003   | -5.6                 | 0.000 000     | -0.002 |
| 100 %          |             | +50        | 2680 000 012   | 3.2                  | 0.000 000     | 0.001  |
| Batt. Endpoint | 3.400       | +20        | 2680 000 018   | 9.8                  | 0.000 000     | 0.004  |

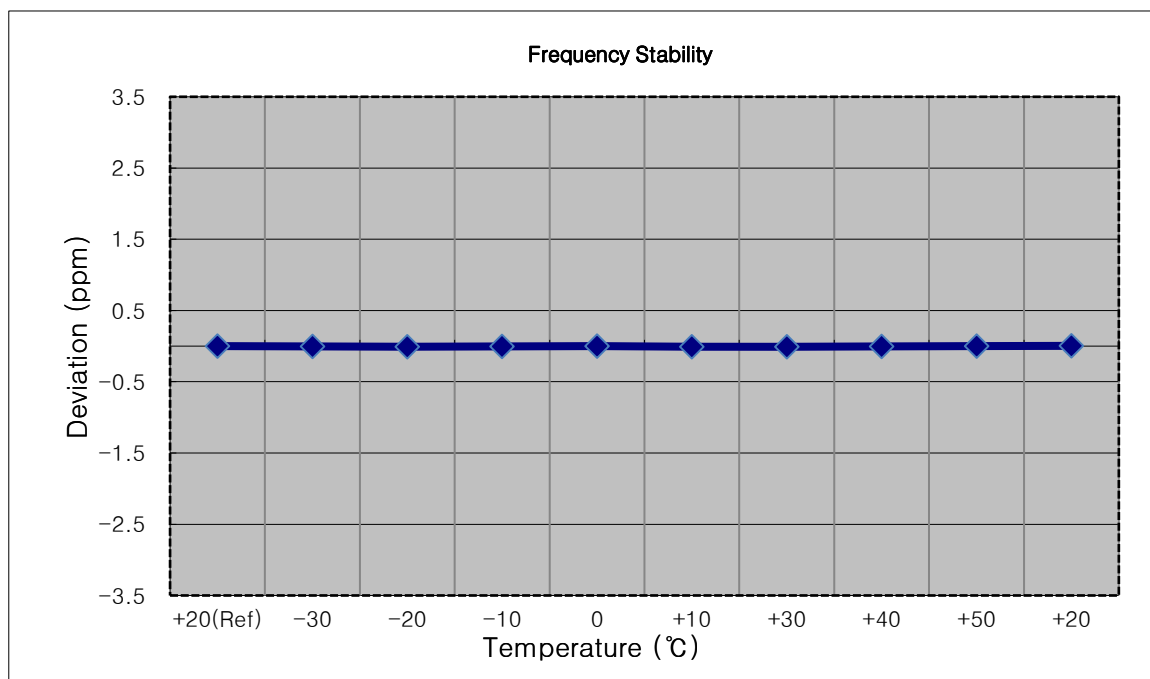


## 9. TEST PLOTS


LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_FullIRB

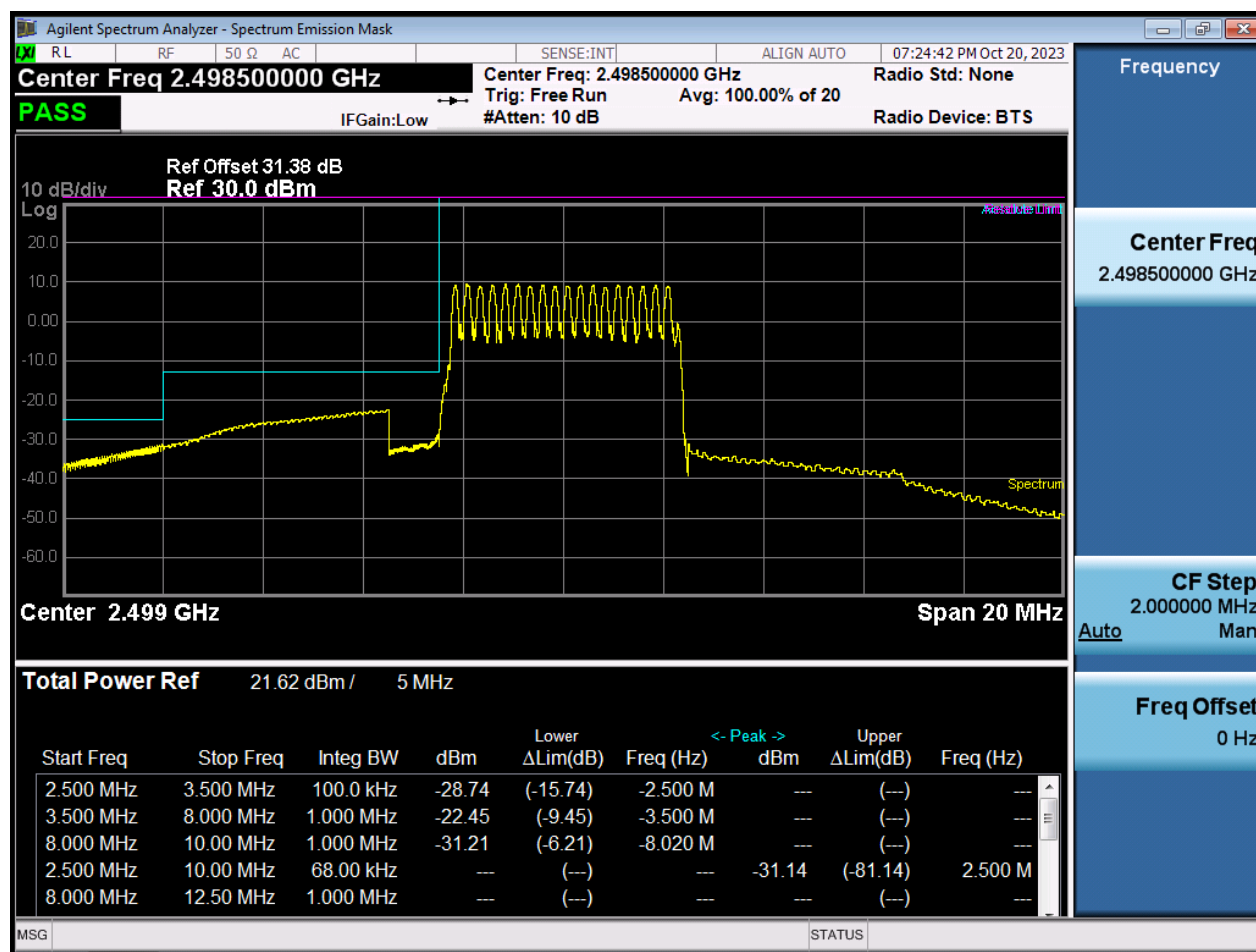


LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_FullIRB

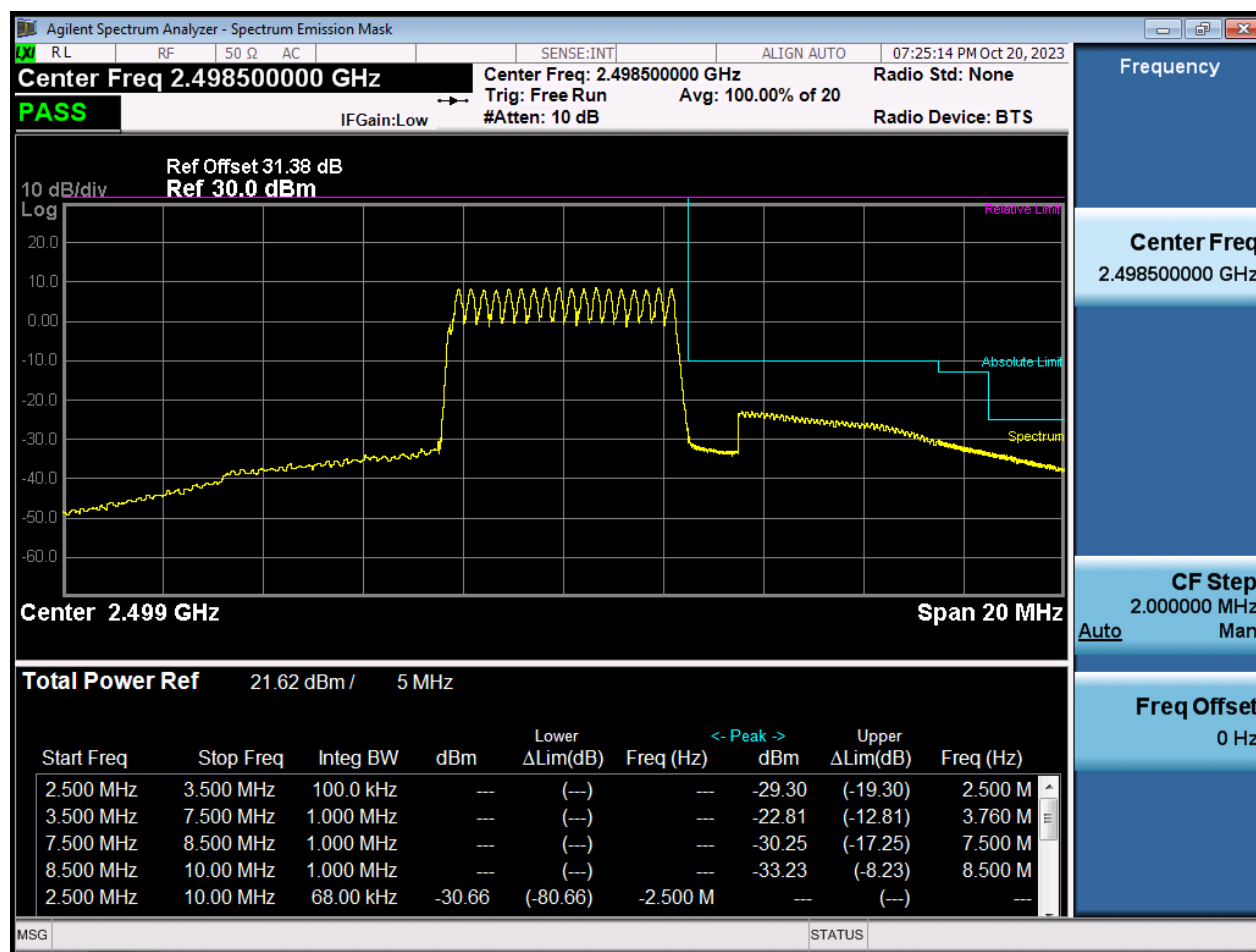


LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_1RB

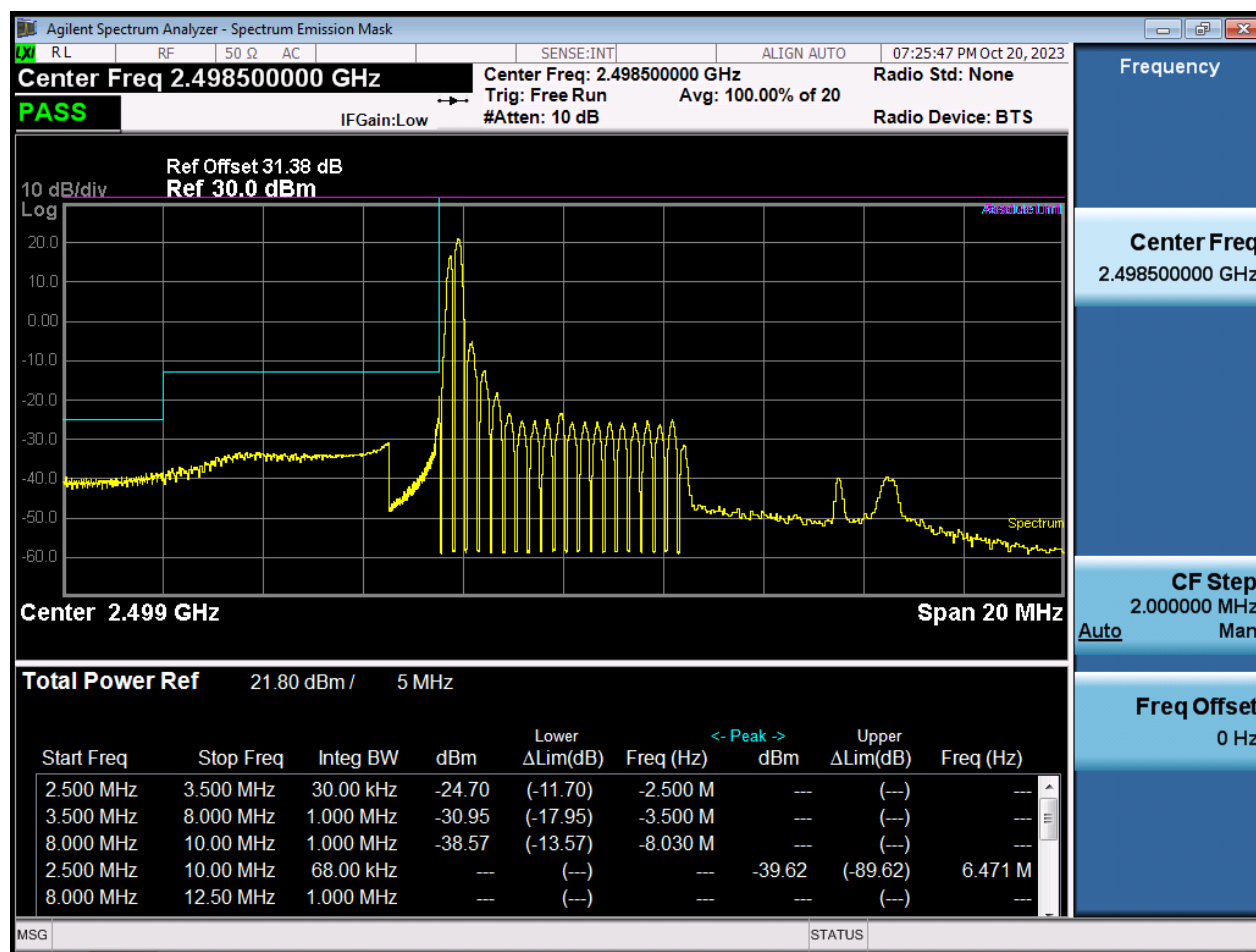


LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_1RB

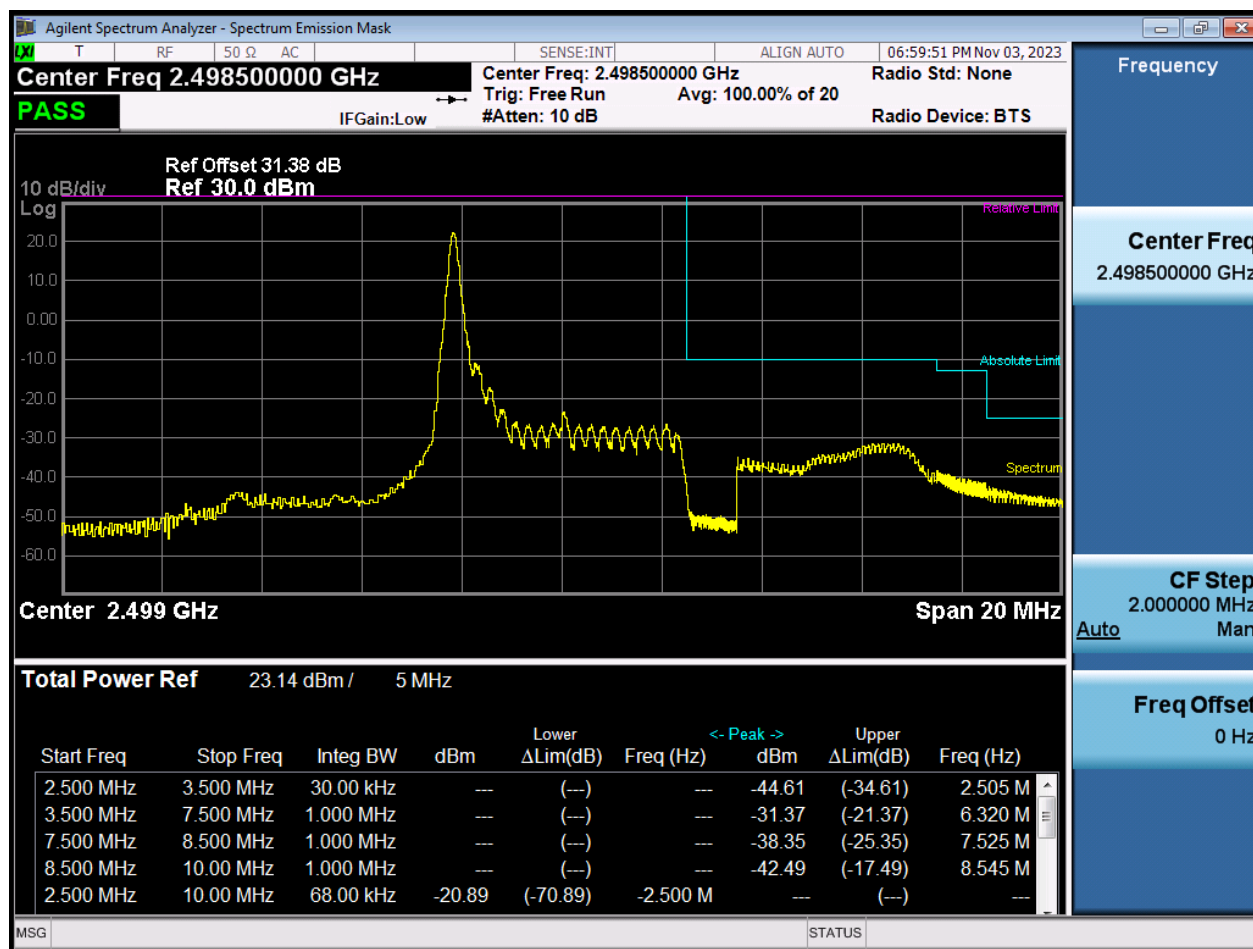


LTE41\_5 M\_BandEdge\_Mid\_2593MHz\_QPSK\_FullIRB

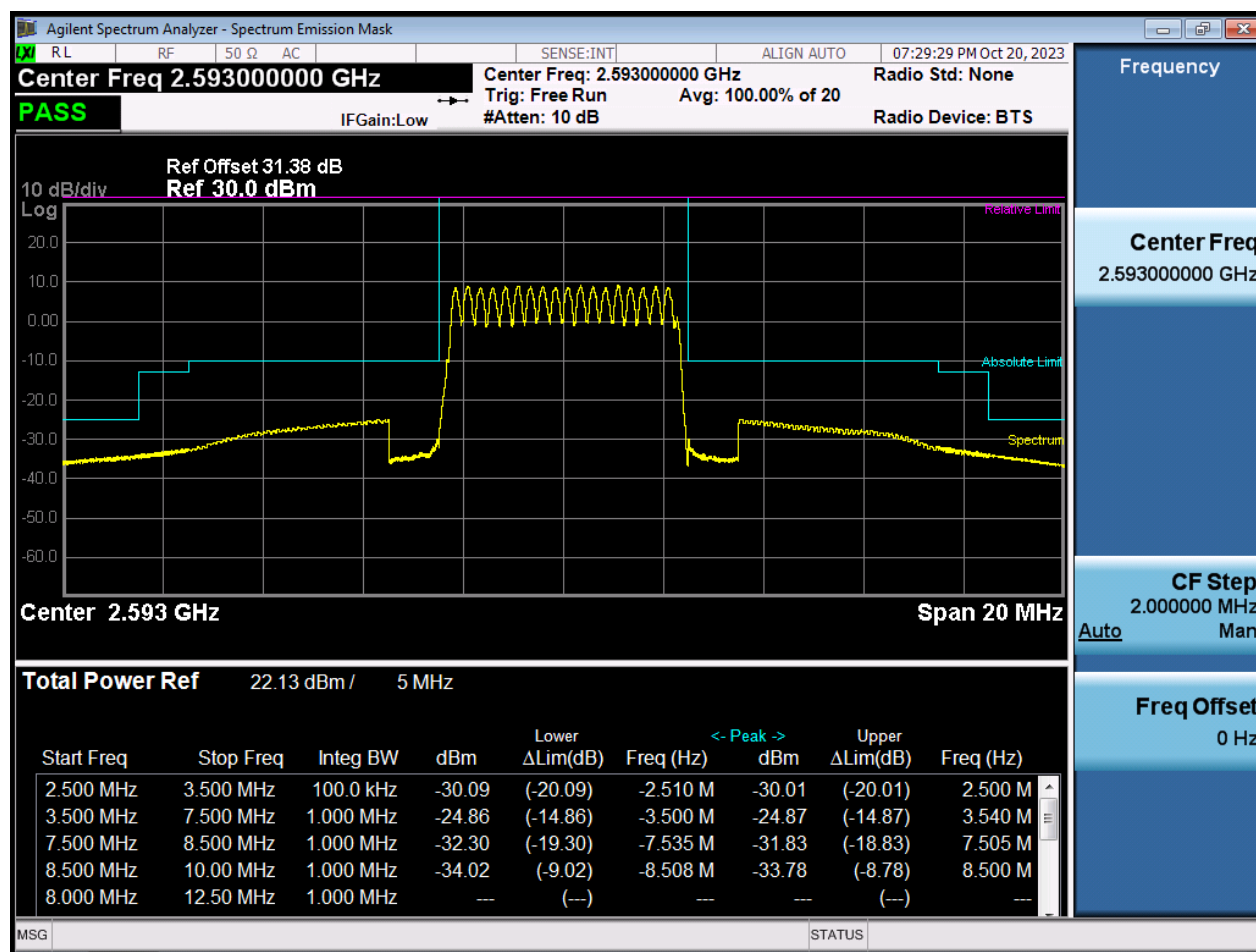


LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_FullIRB

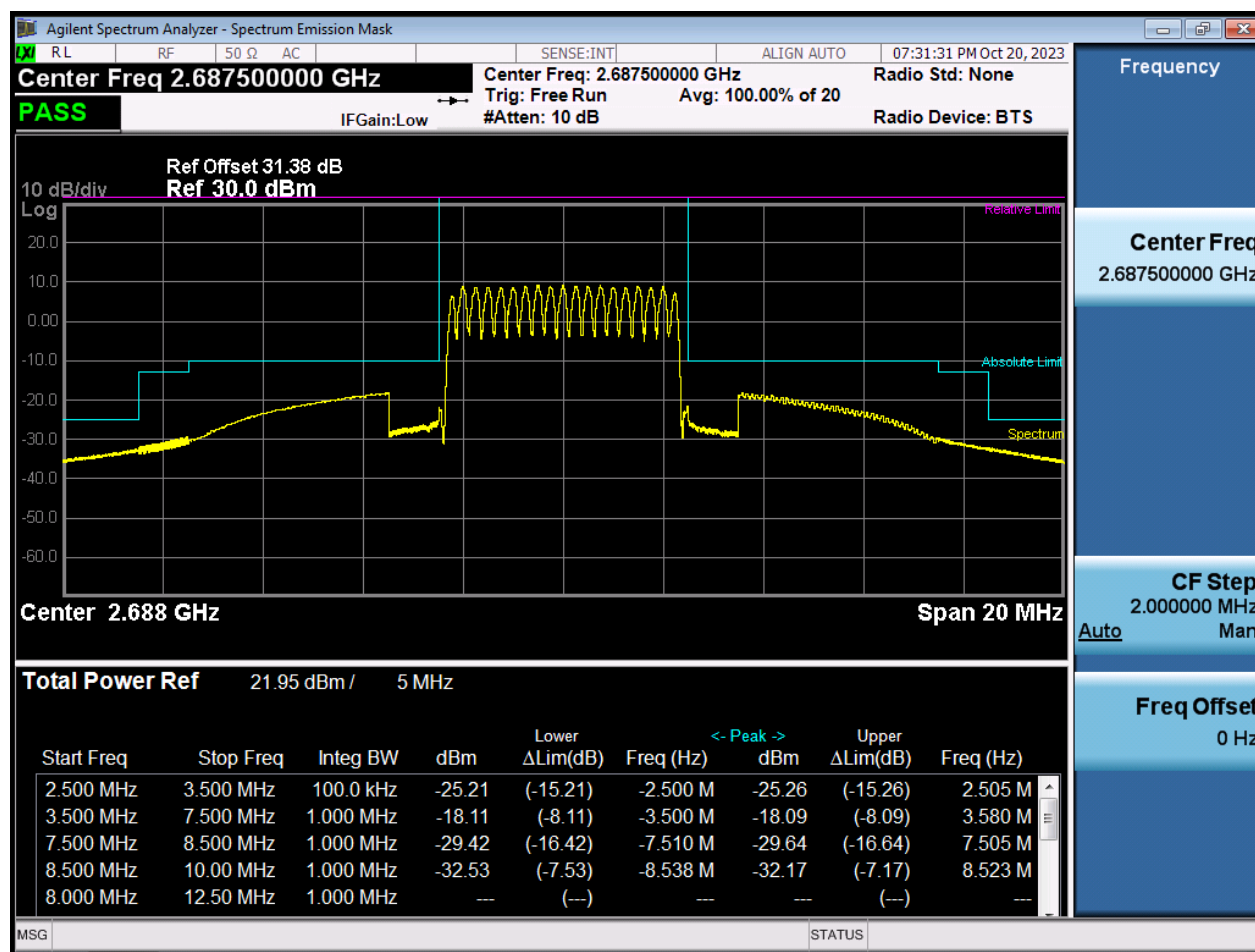


LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_1RB

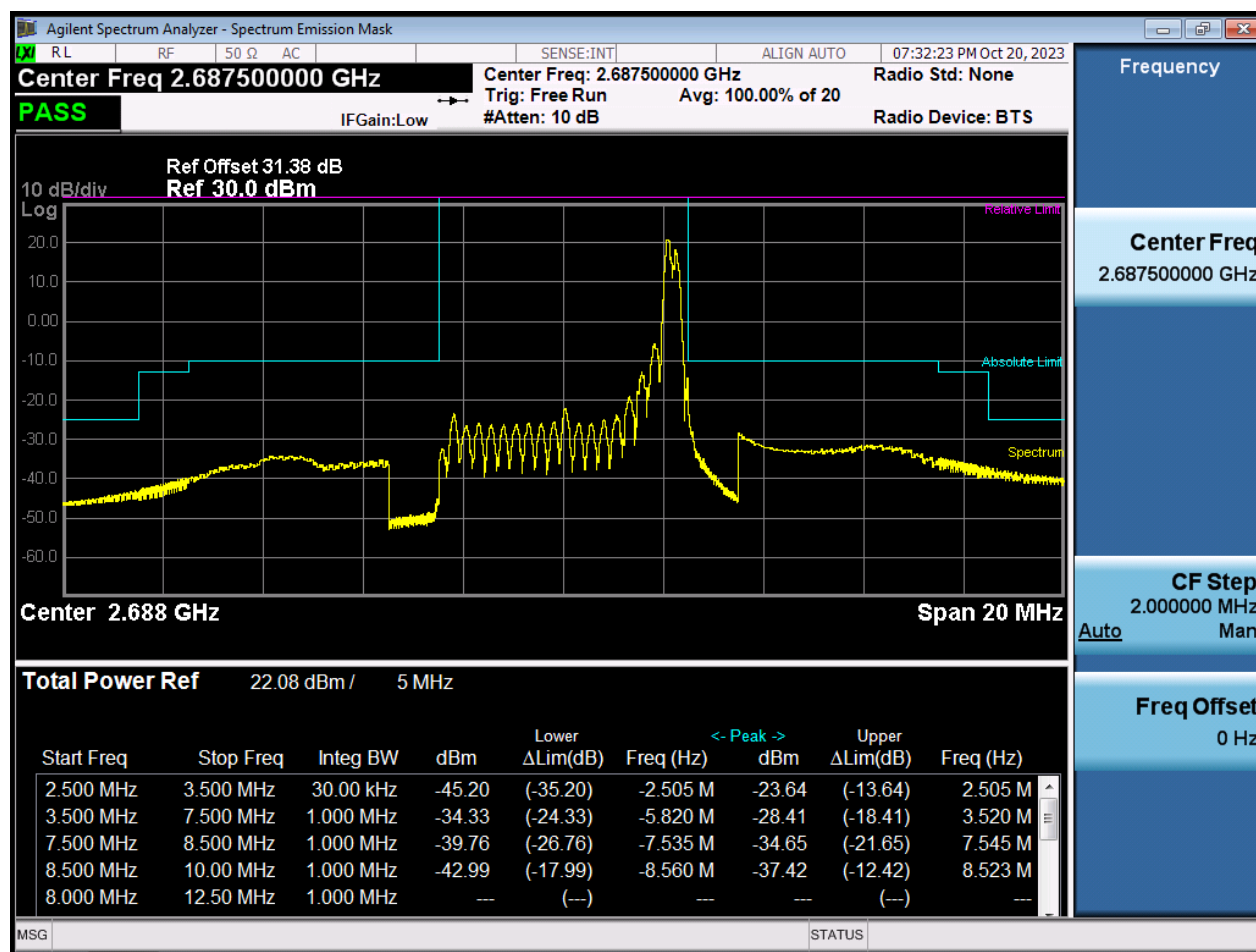

LTE41\_10 M\_BandEdge\_Lower\_Low\_2501MHz\_QPSK\_FullIRB

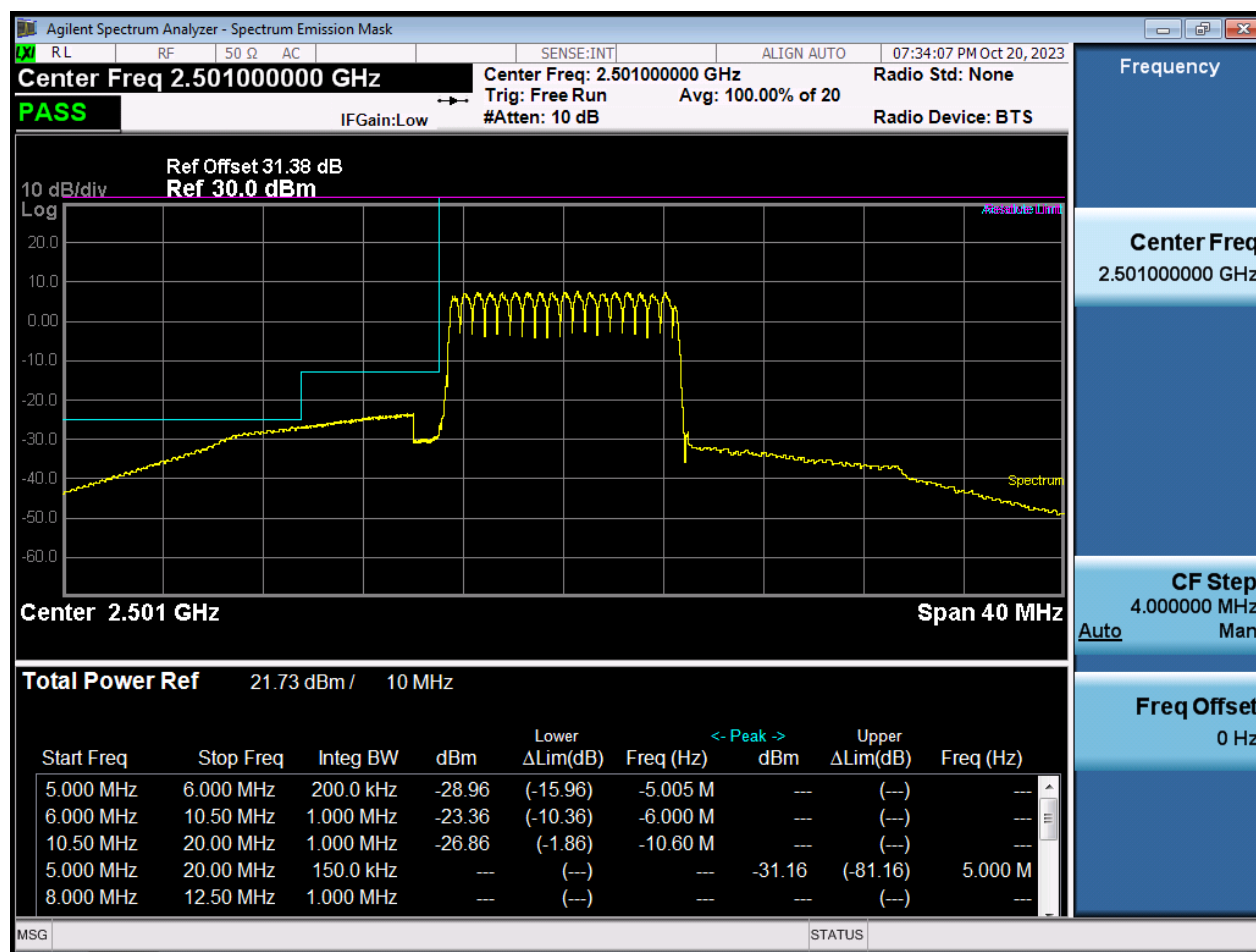


LTE41\_10 M\_BandEdge\_Upper\_Low\_2501MHz\_QPSK\_FullIRB

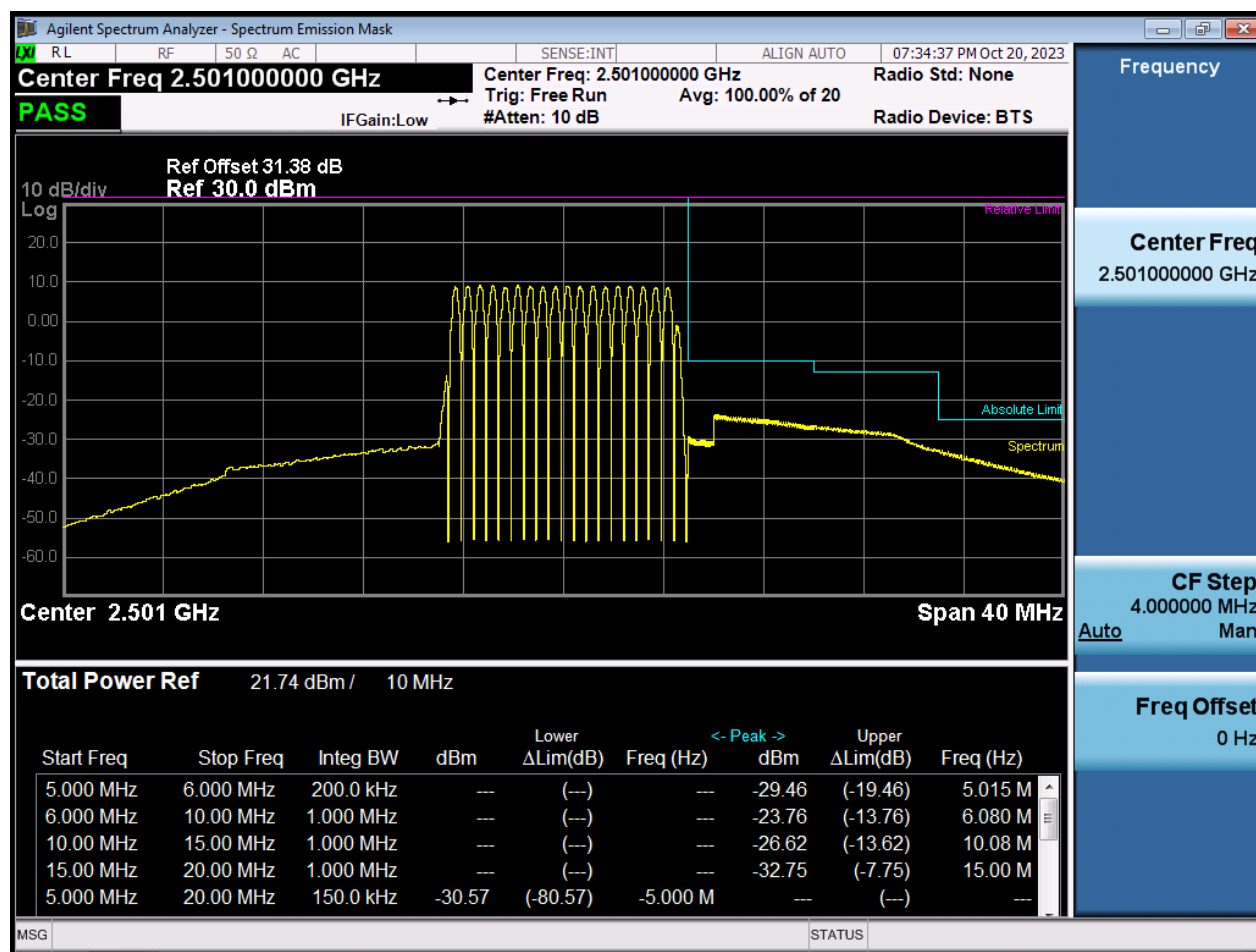


LTE41\_10 M\_BandEdge\_Lower\_Low\_2501MHz\_QPSK\_1RB




LTE41\_10 M\_BandEdge\_Upper\_Low\_2501MHz\_QPSK\_1RB

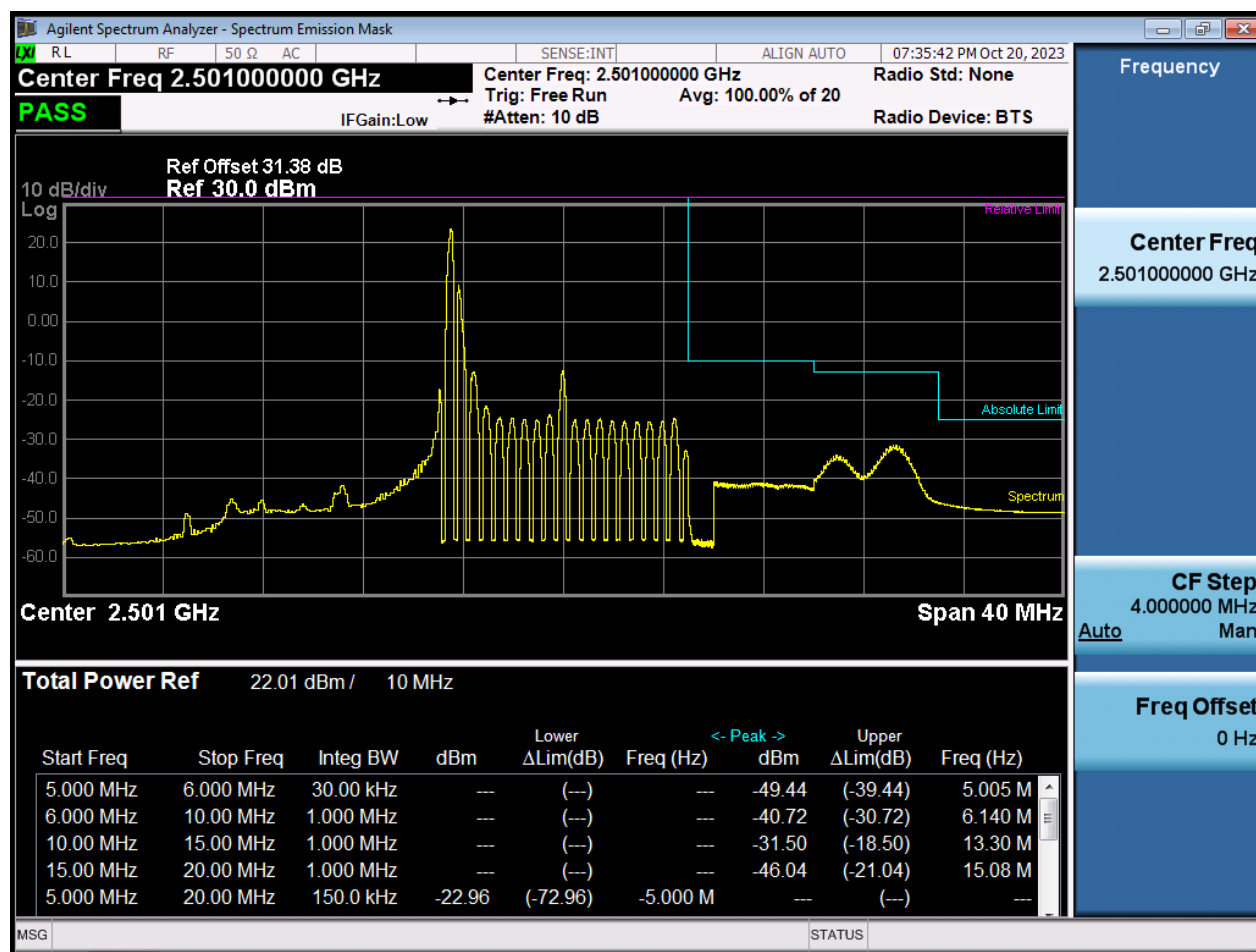


LTE41\_10 M\_BandEdge\_Mid\_2593MHz\_QPSK\_FullIRB

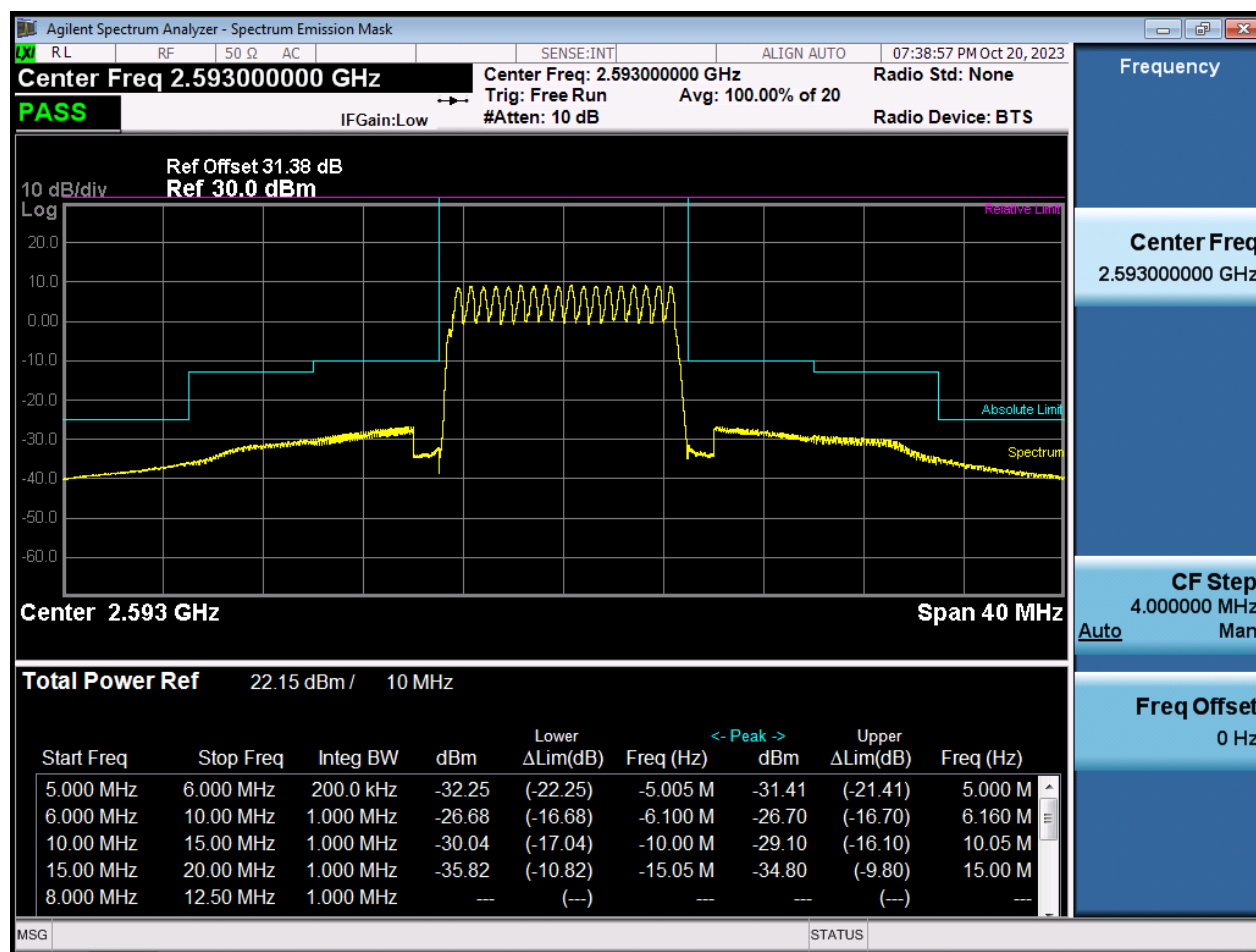


LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_FullIRB

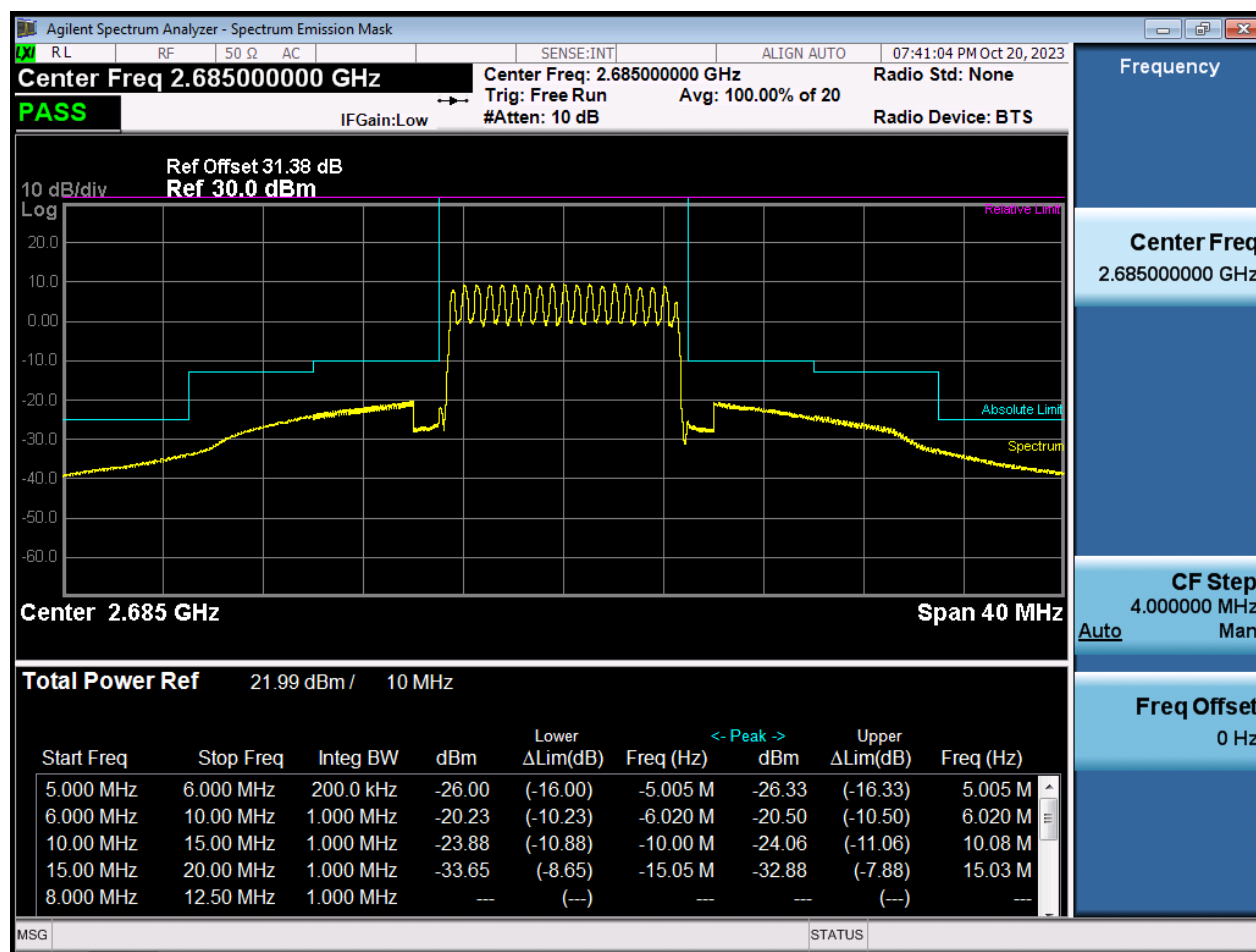


LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_1RB

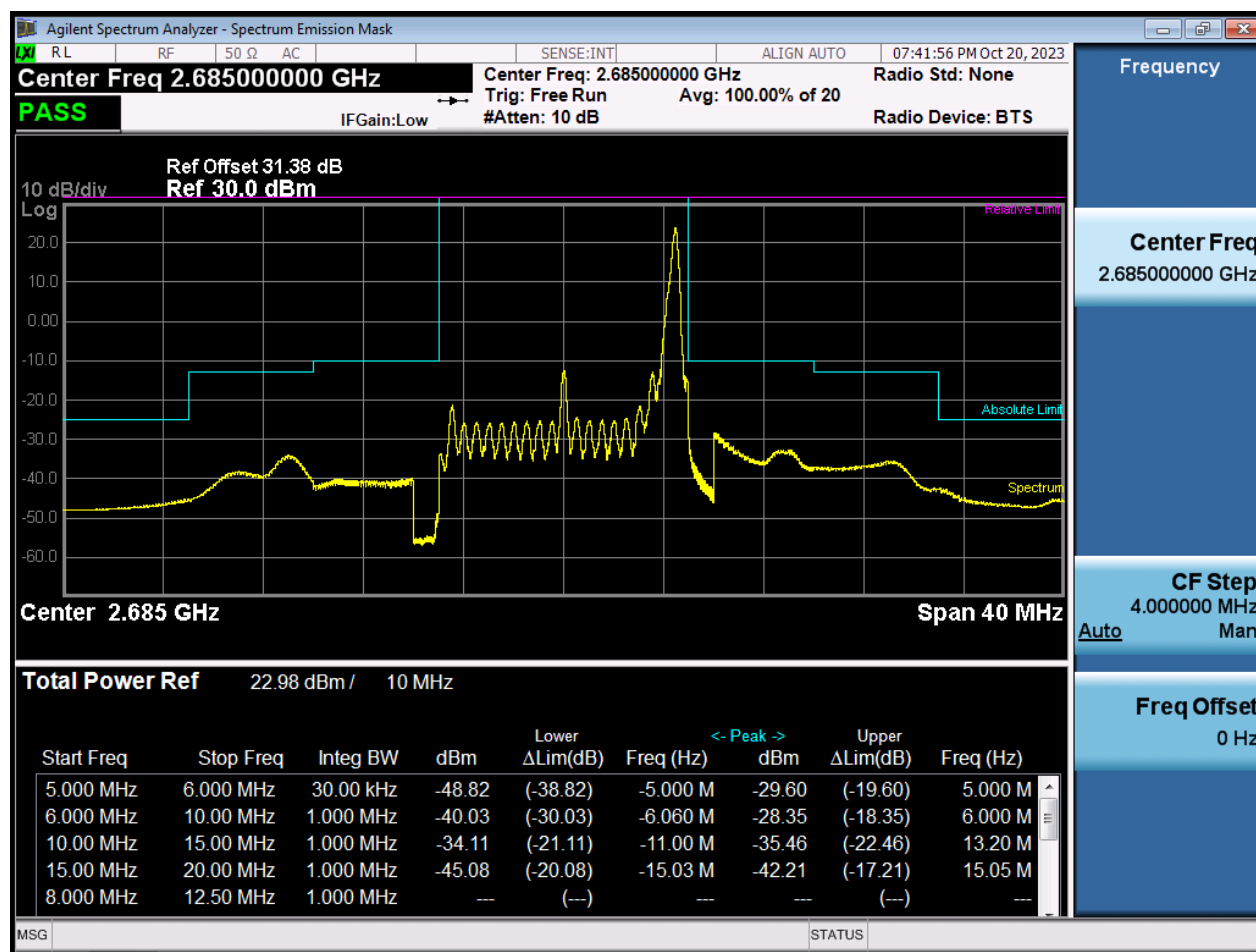

LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_FullIRB

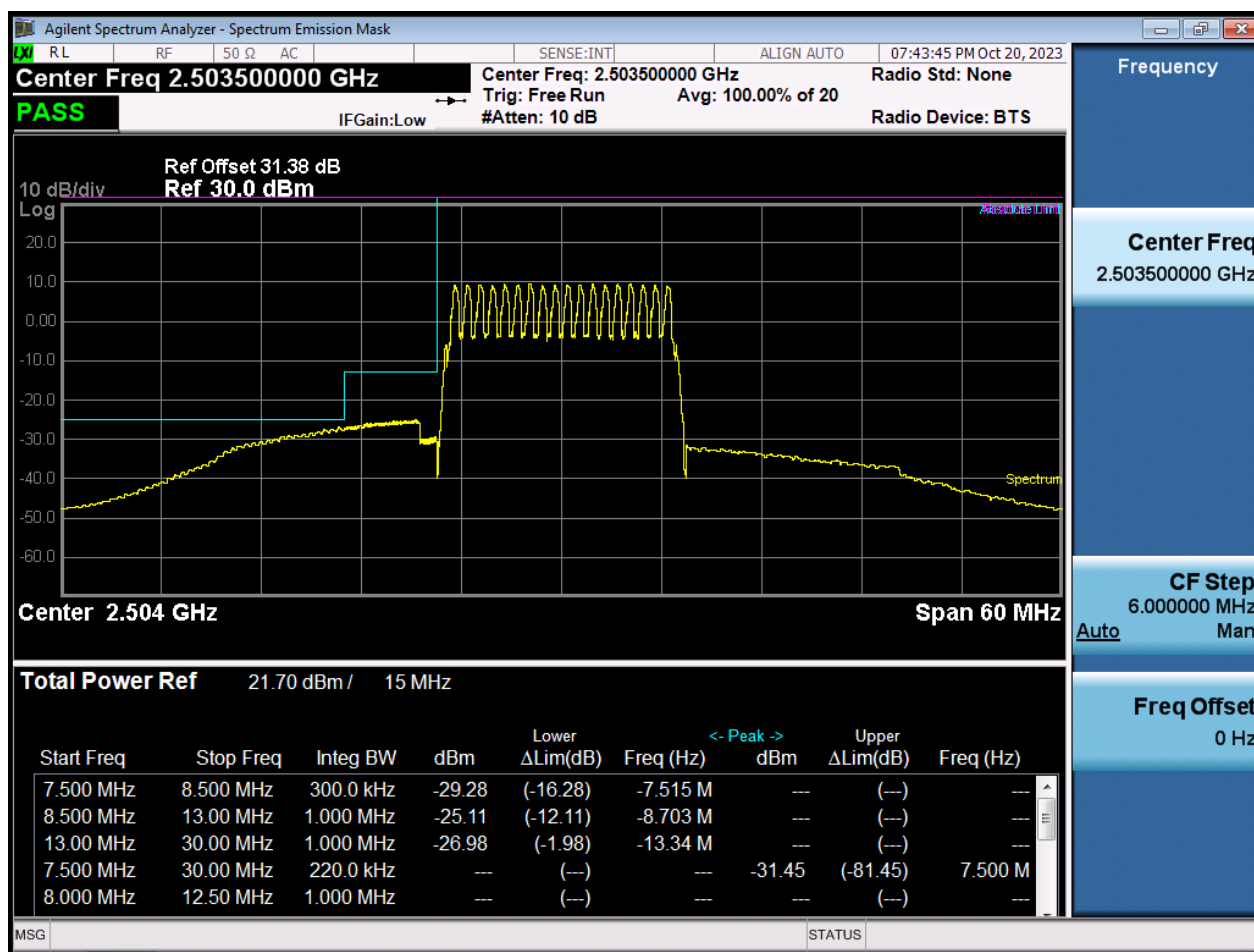


LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_FullIRB

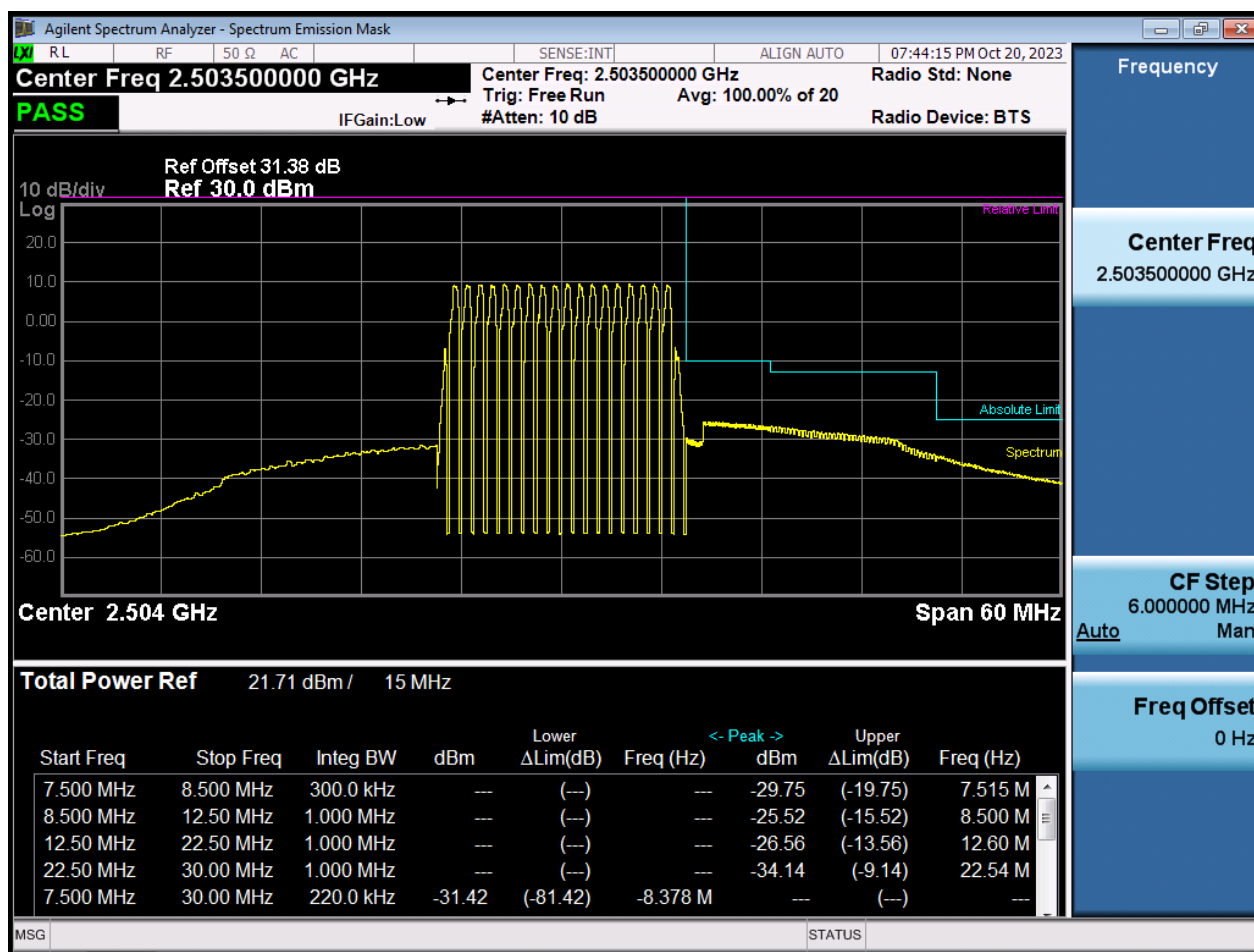


LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_1RB




LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_1RB

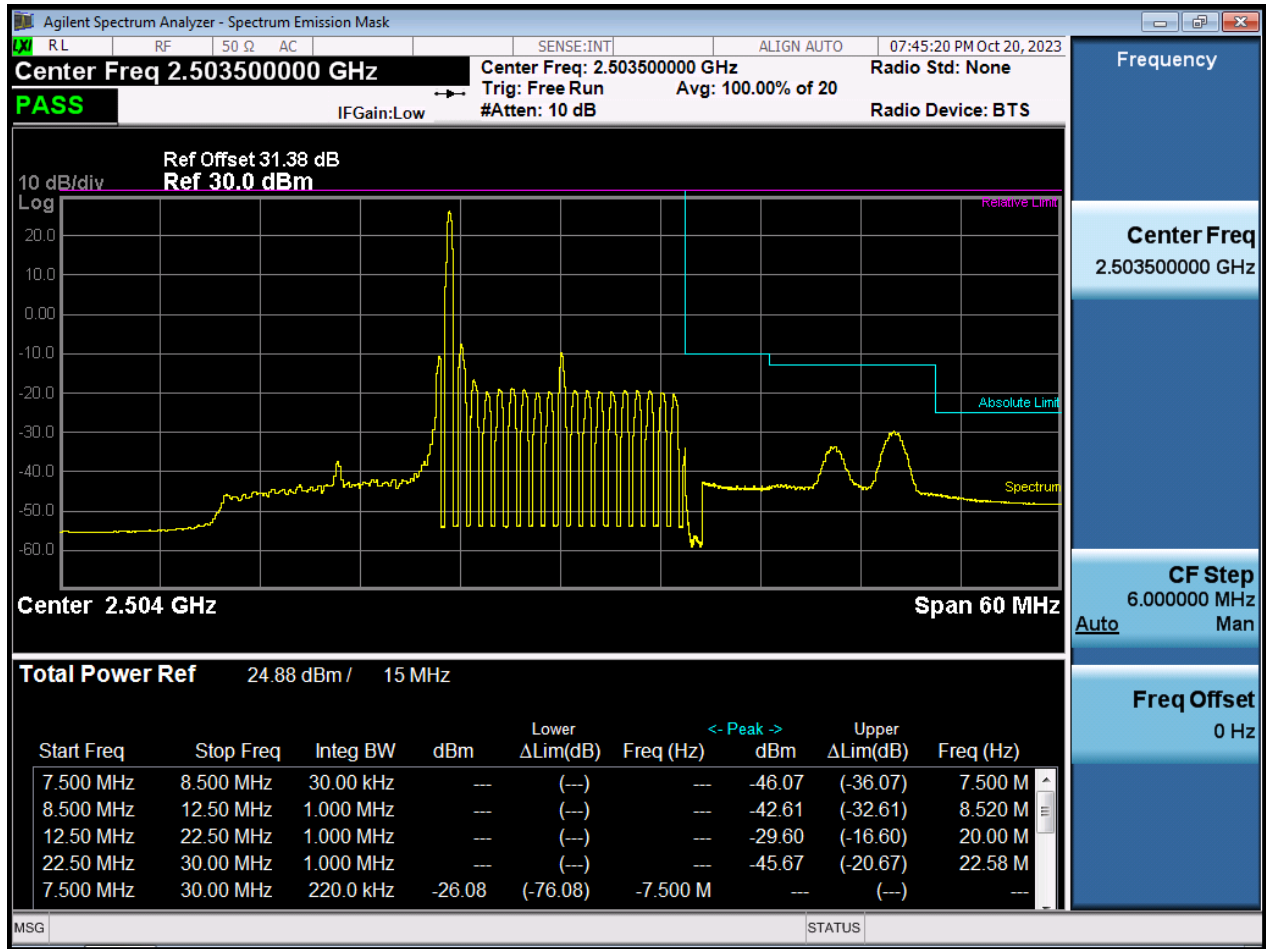


LTE41\_15 M\_BandEdge\_Mid\_2593MHz\_QPSK\_FullIRB

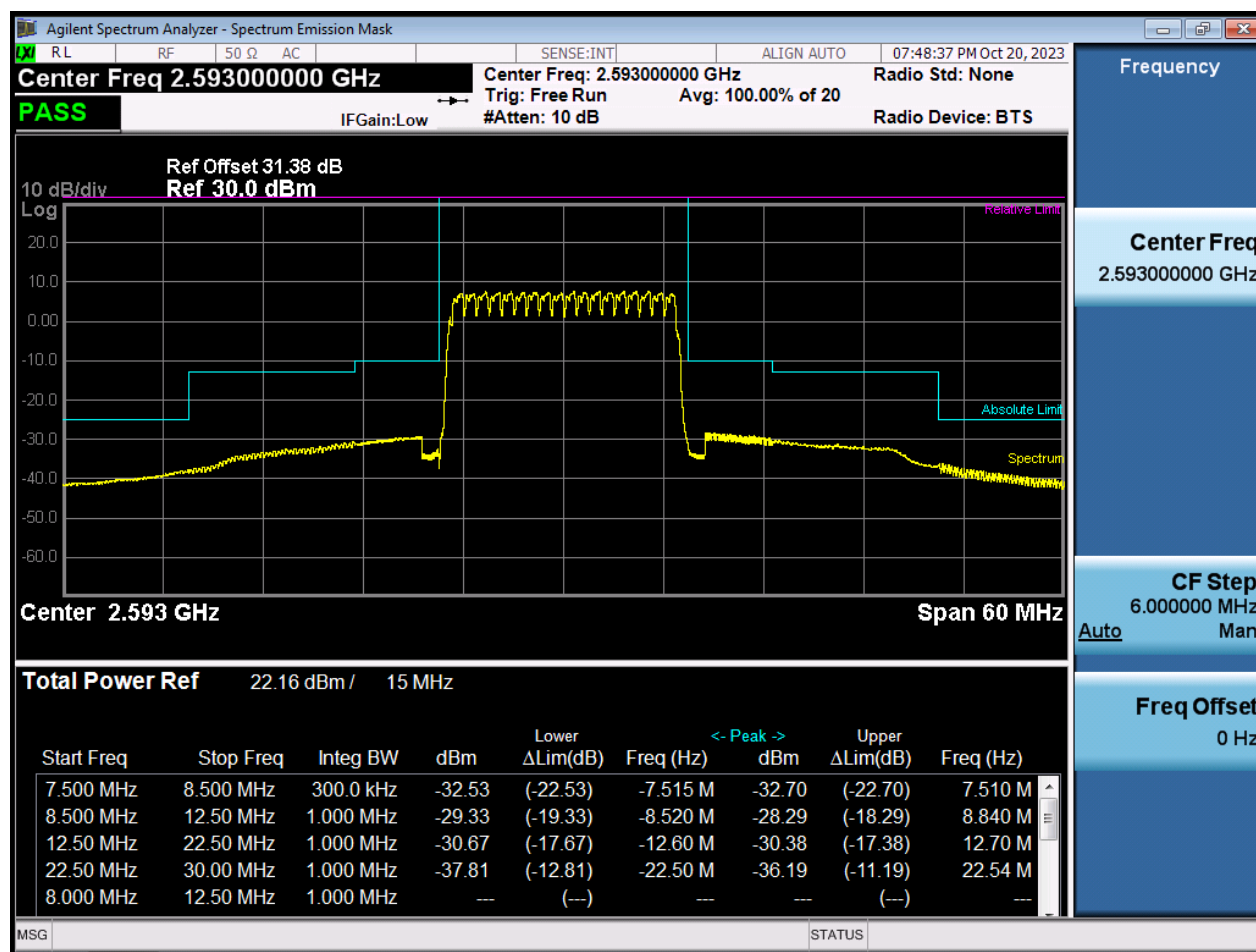


LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_FullIRB

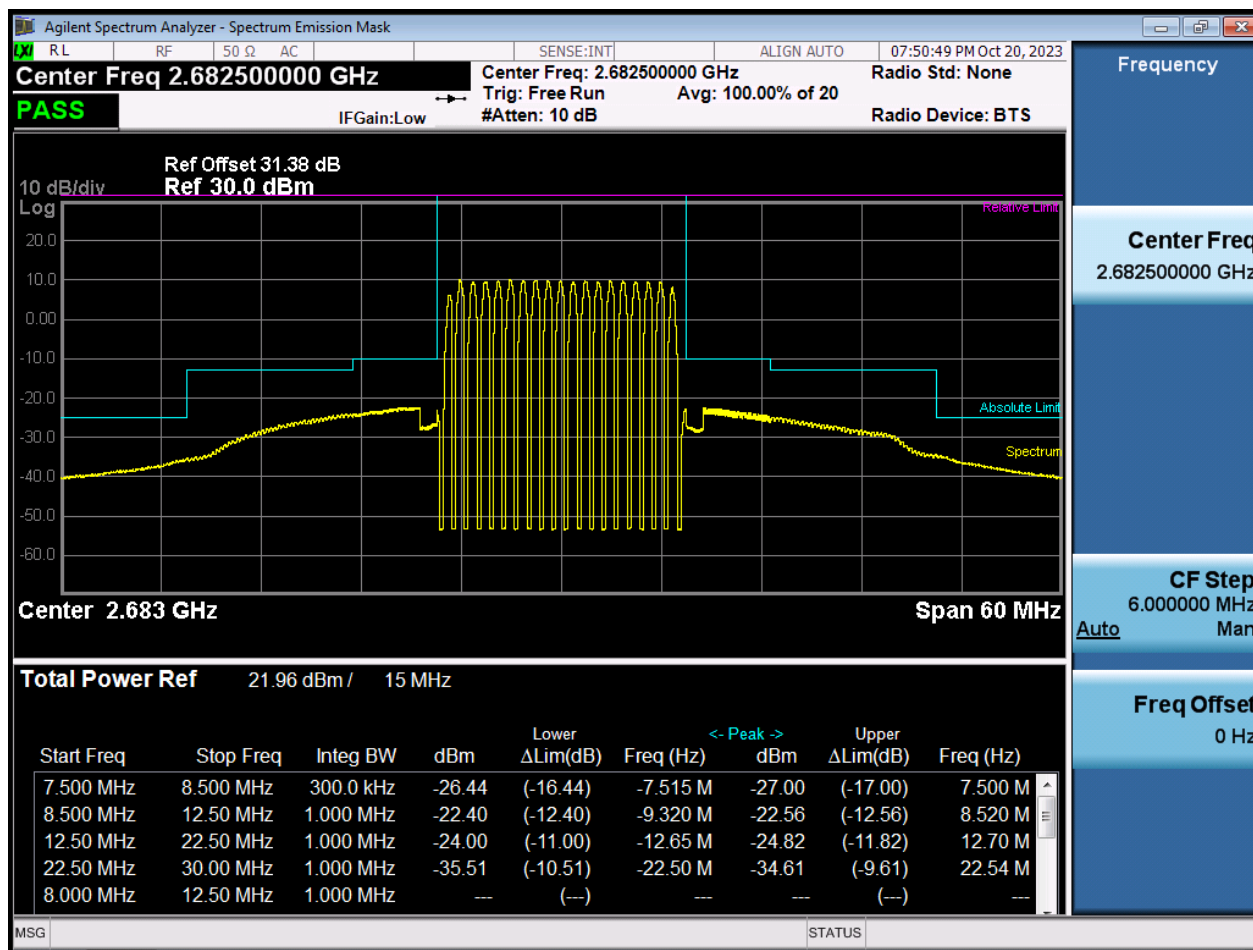

LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_1RB

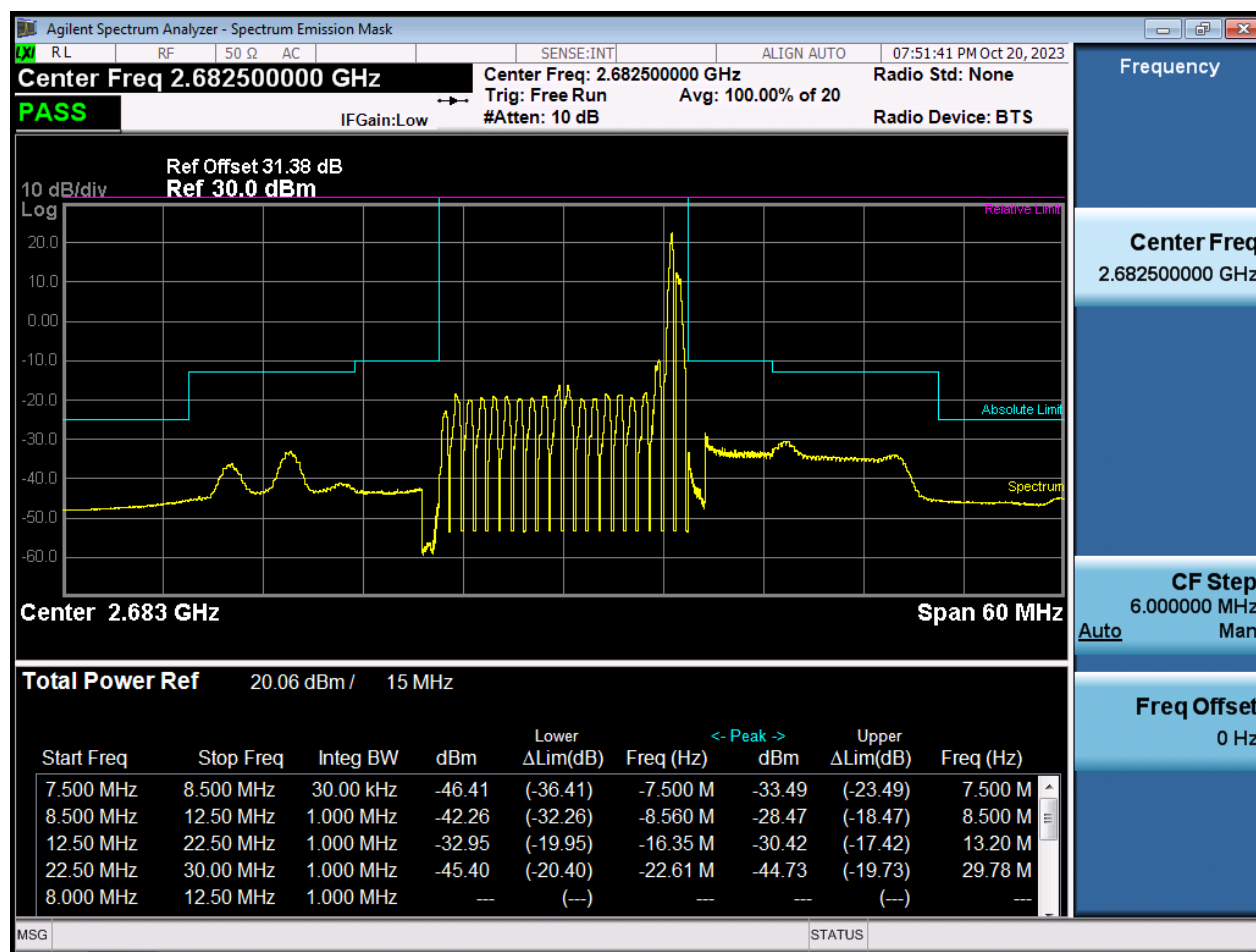


LTE41\_20 M\_BandEdge\_Lower\_Low\_2506MHz\_QPSK\_FullIRB

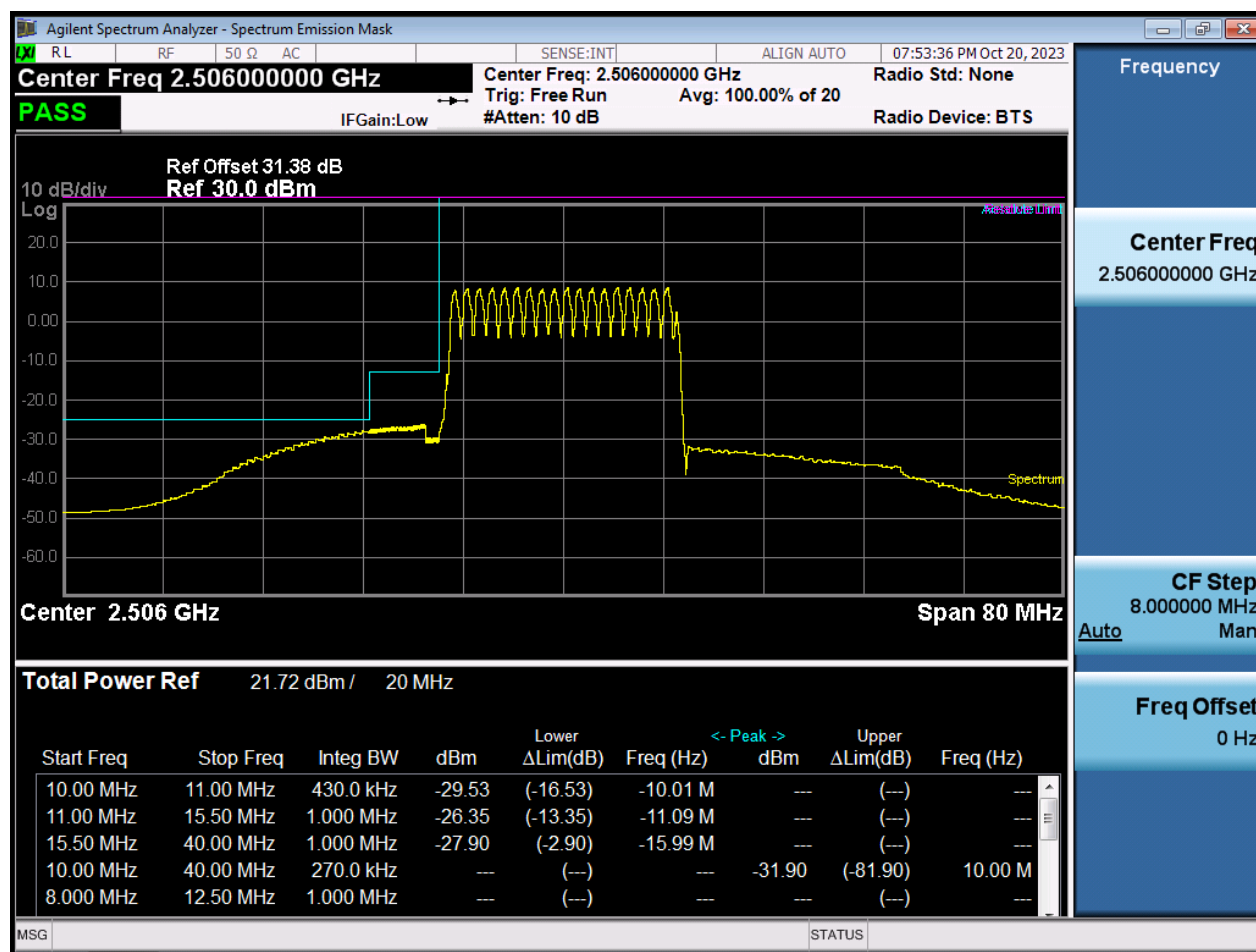


LTE41\_20 M\_BandEdge\_Upper\_Low\_2506MHz\_QPSK\_FullIRB




LTE41\_20 M\_BandEdge\_Lower\_Low\_2506MHz\_QPSK\_1RB

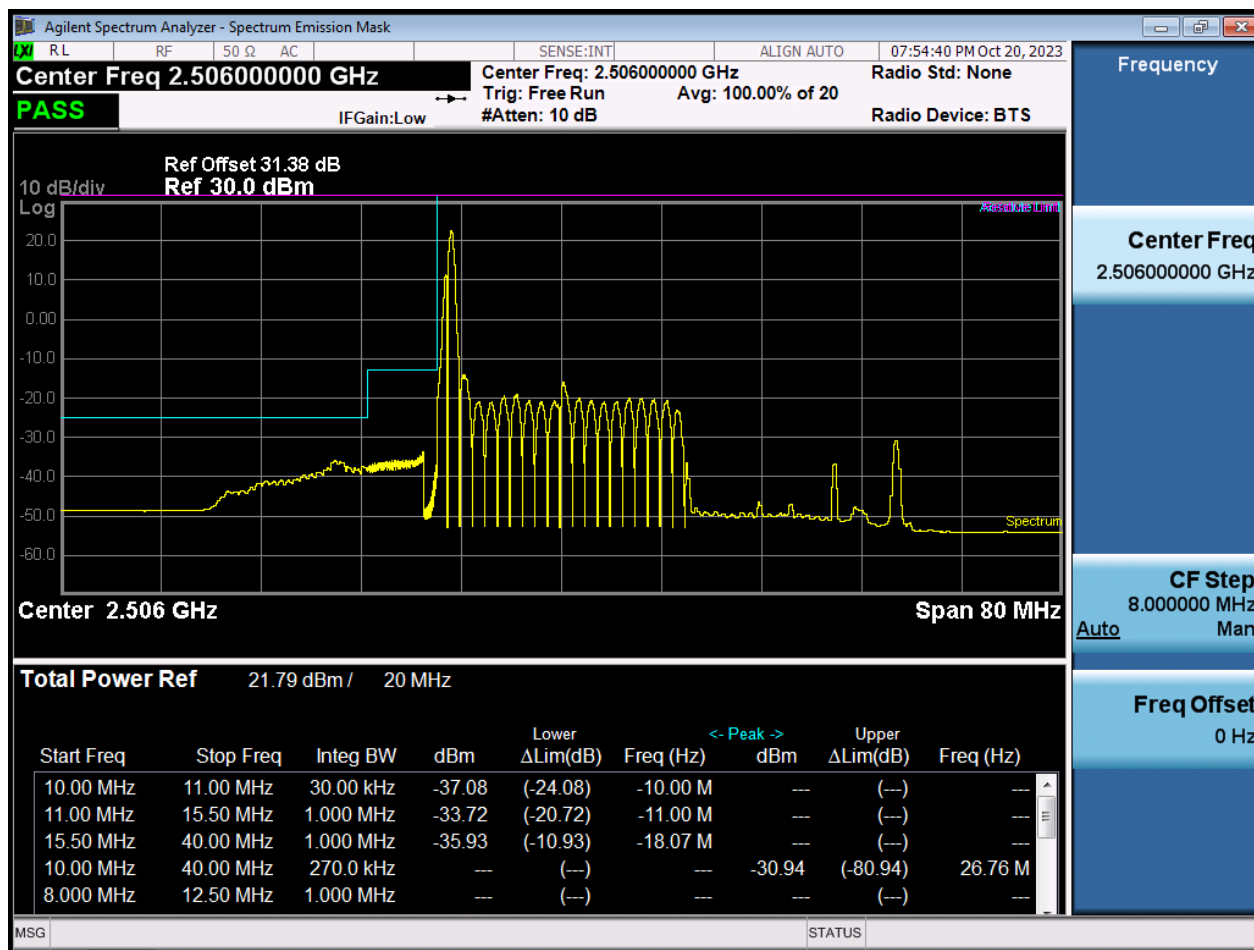


LTE41\_20 M\_BandEdge\_Upper\_Low\_2506MHz\_QPSK\_1RB

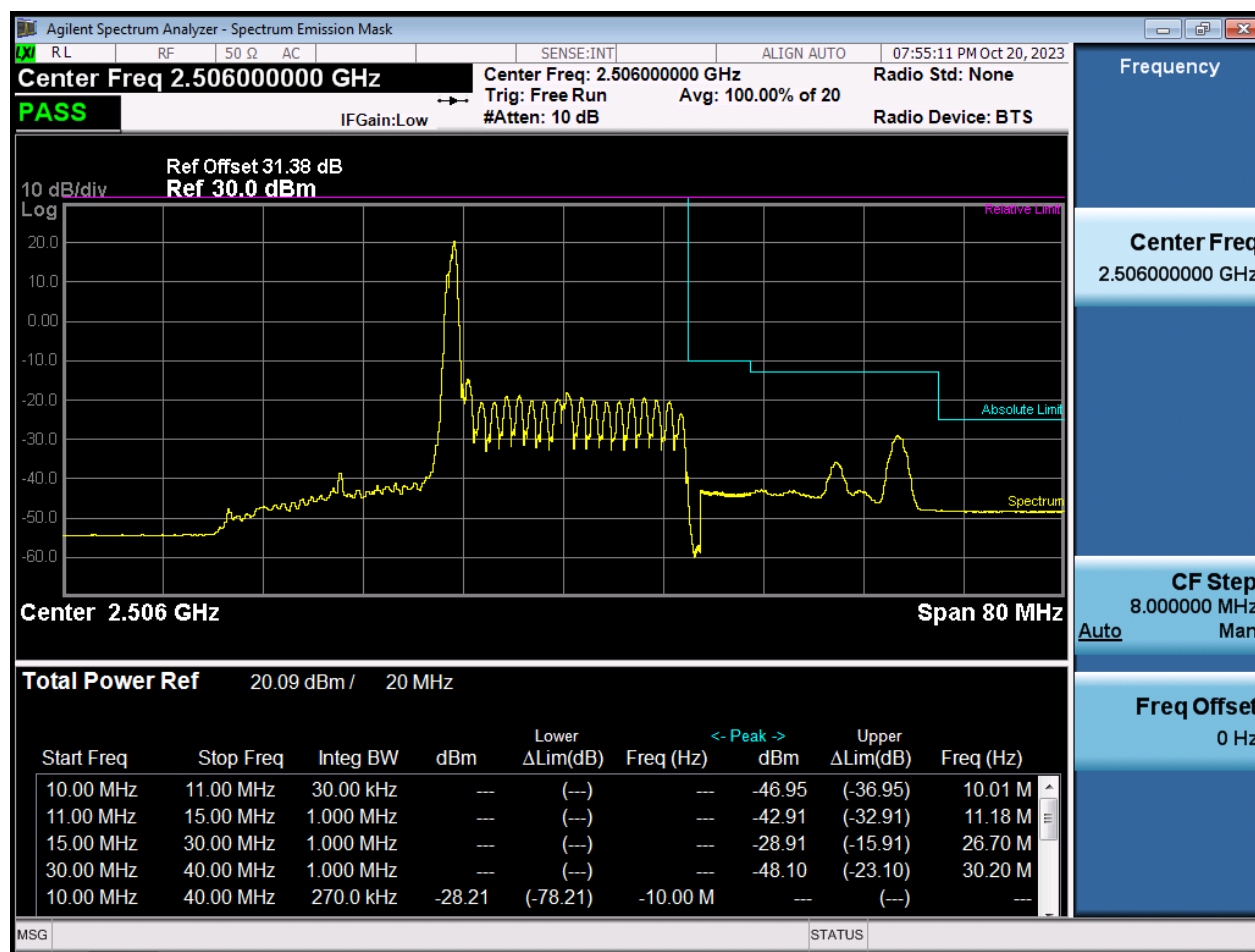


LTE41\_20 M\_BandEdge\_Mid\_2593MHz\_QPSK\_FullRB

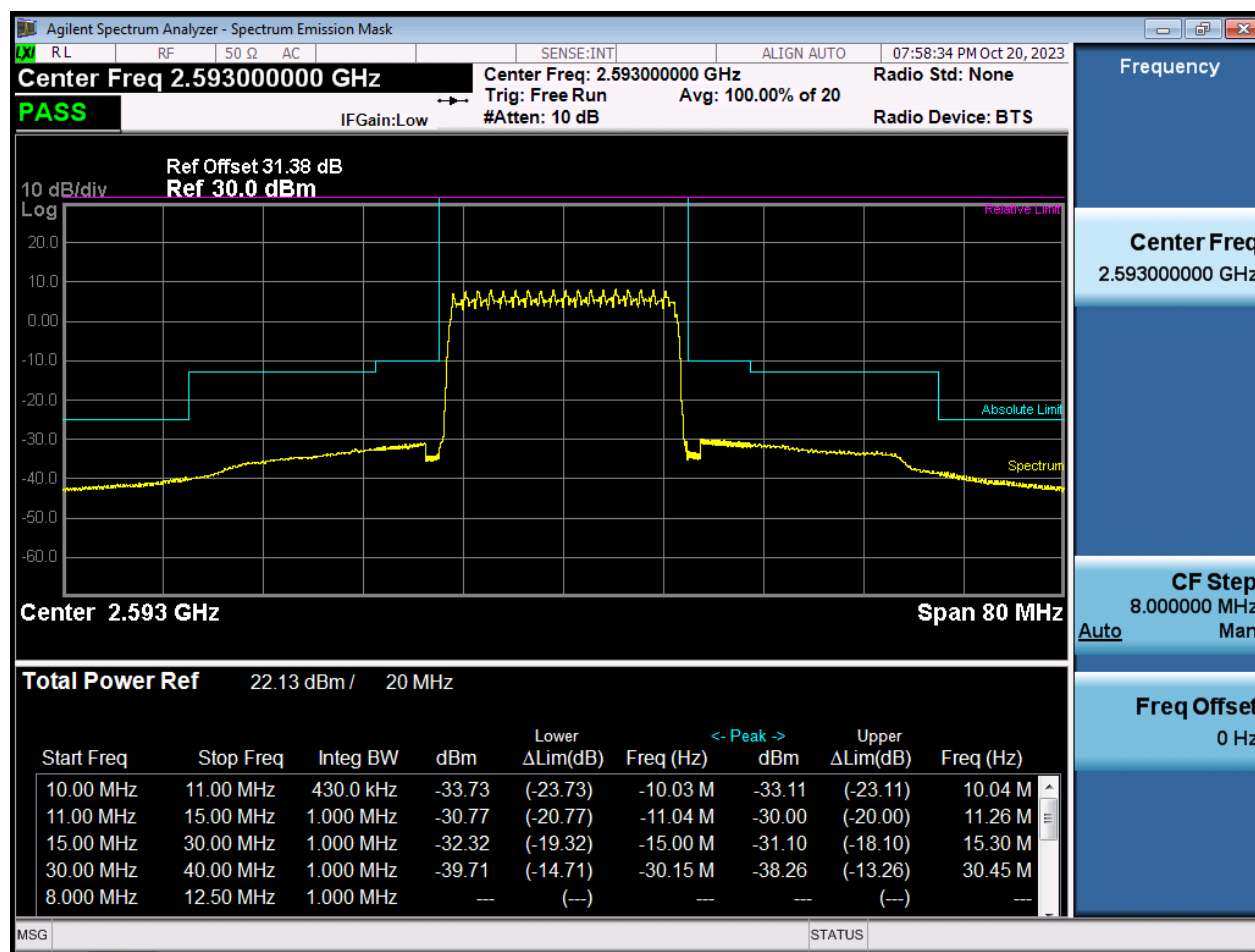


LTE41\_20 M\_BandEdge\_High\_2680 MHz\_QPSK\_FullIRB

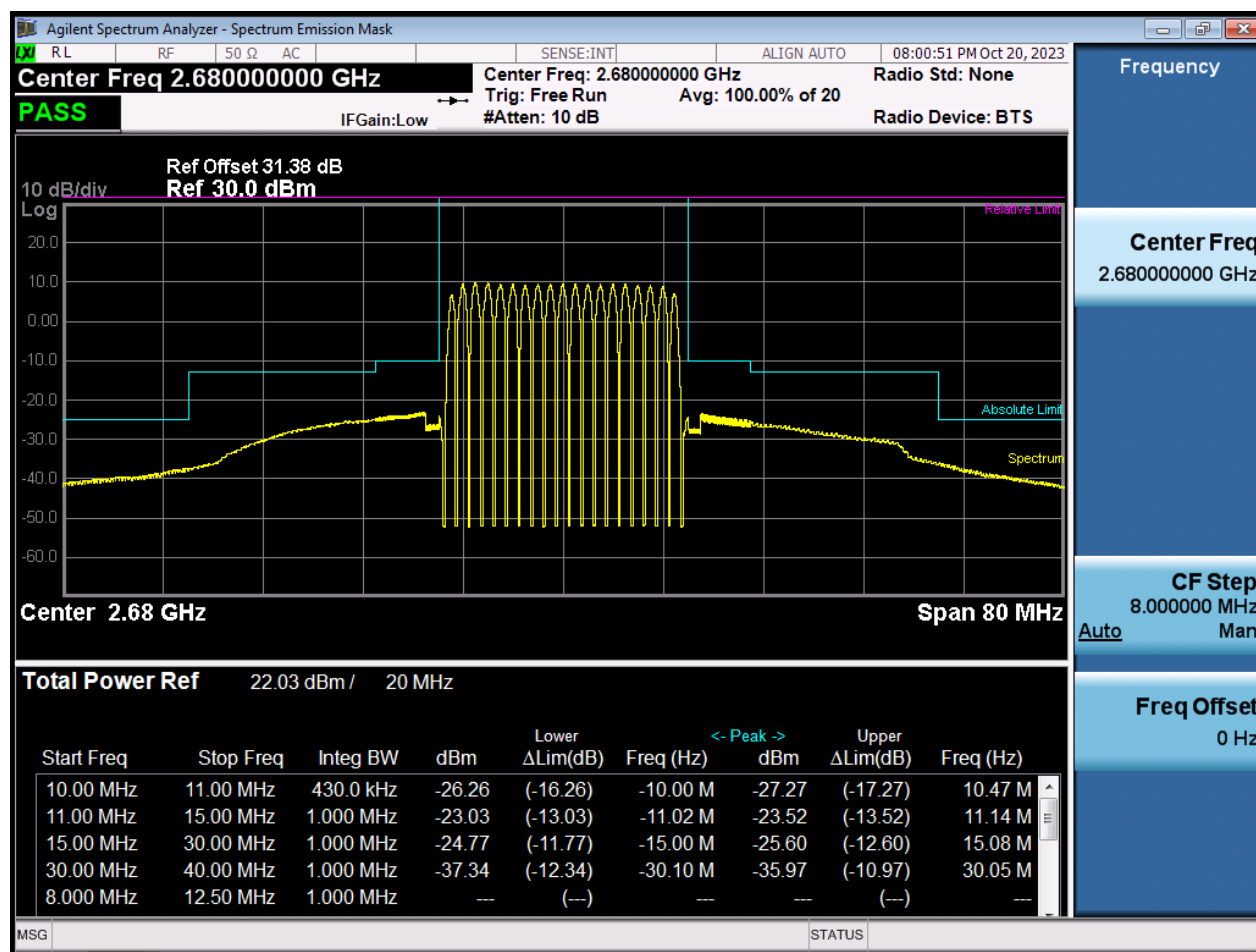


LTE41\_20 M\_BandEdge\_High\_2680 MHz\_QPSK\_1RB

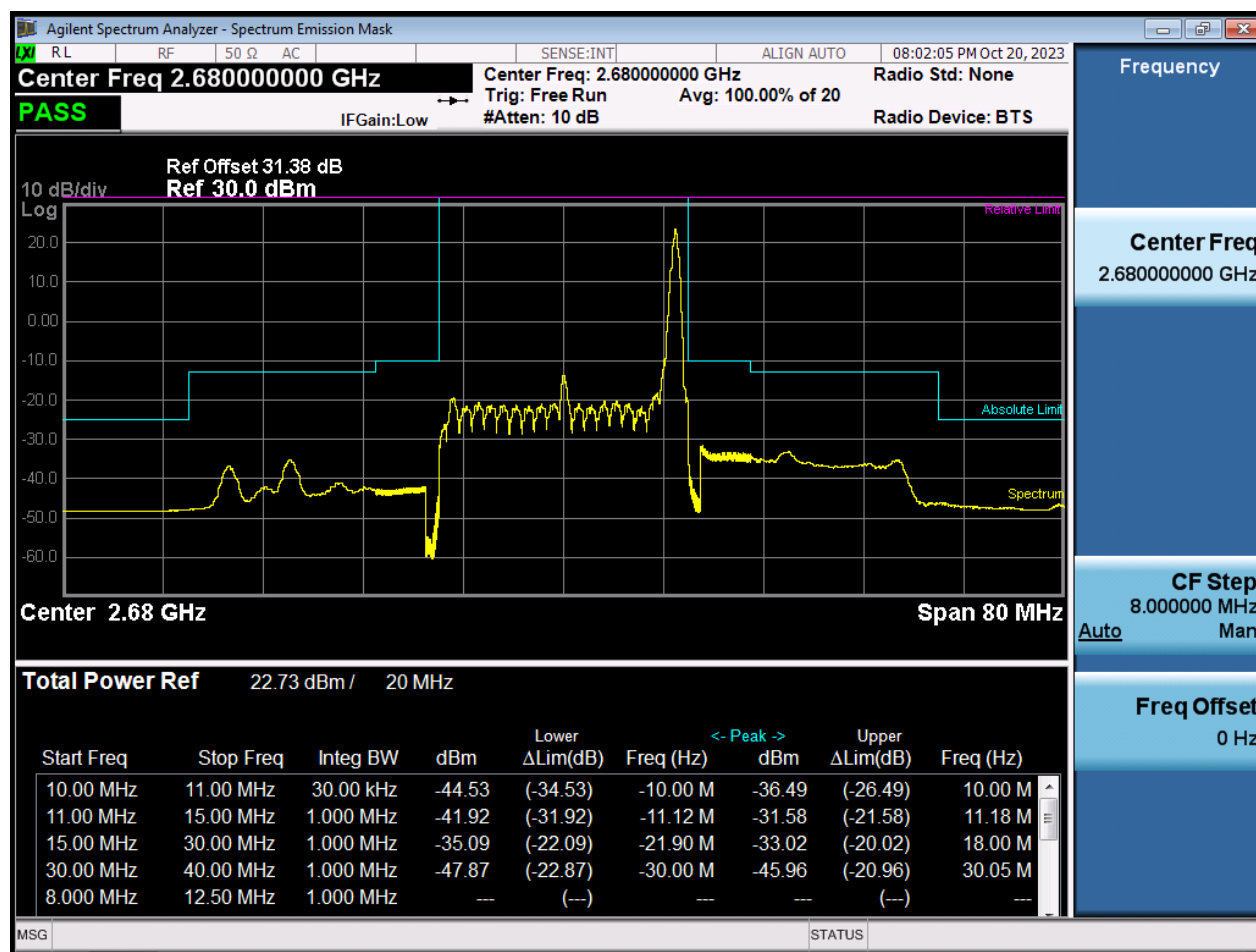


LTE41\_5 M\_OBW\_Mid Channel\_QPSK\_FullRB

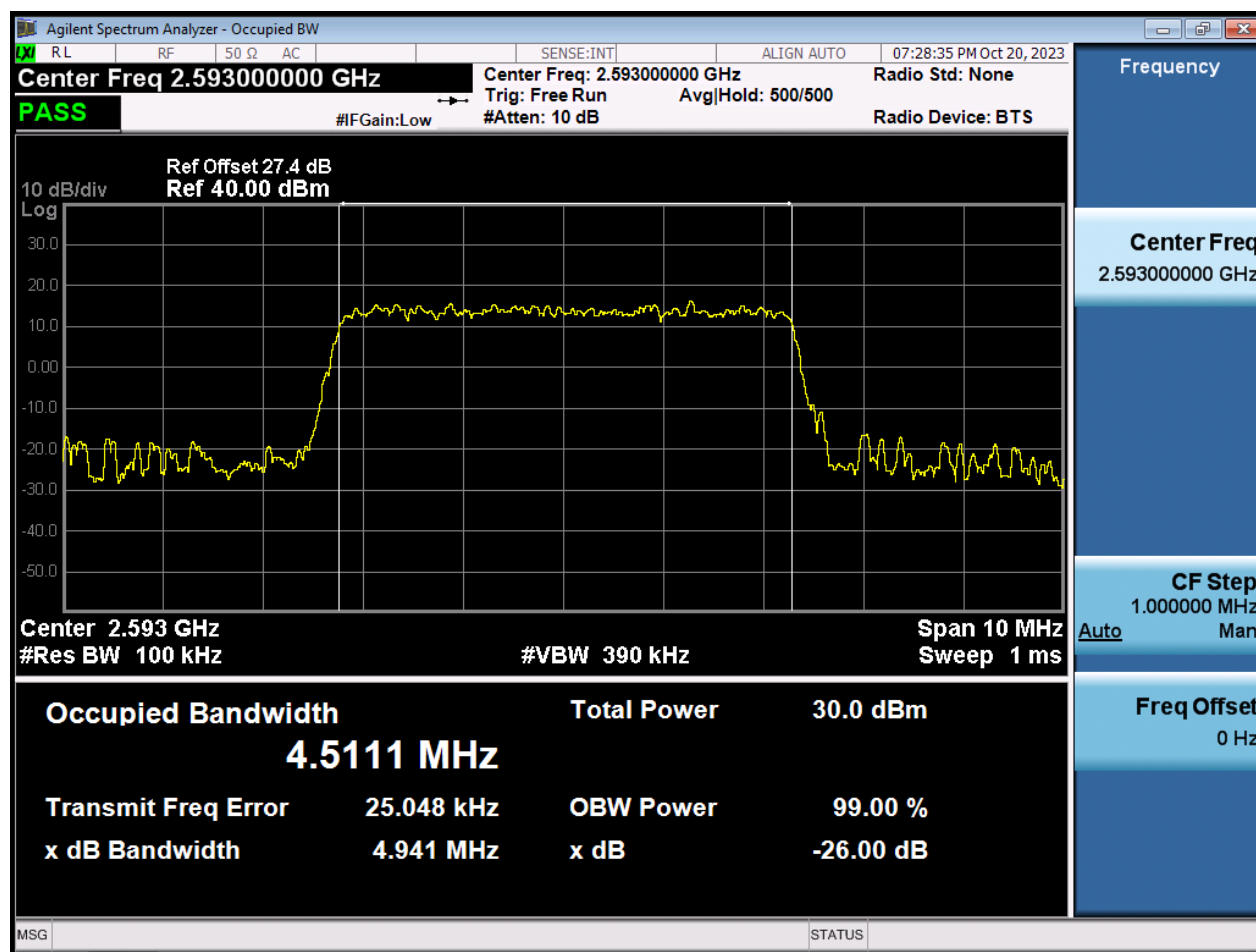


LTE41\_5 M\_OBW\_Mid Channel\_16QAM\_FullIRB

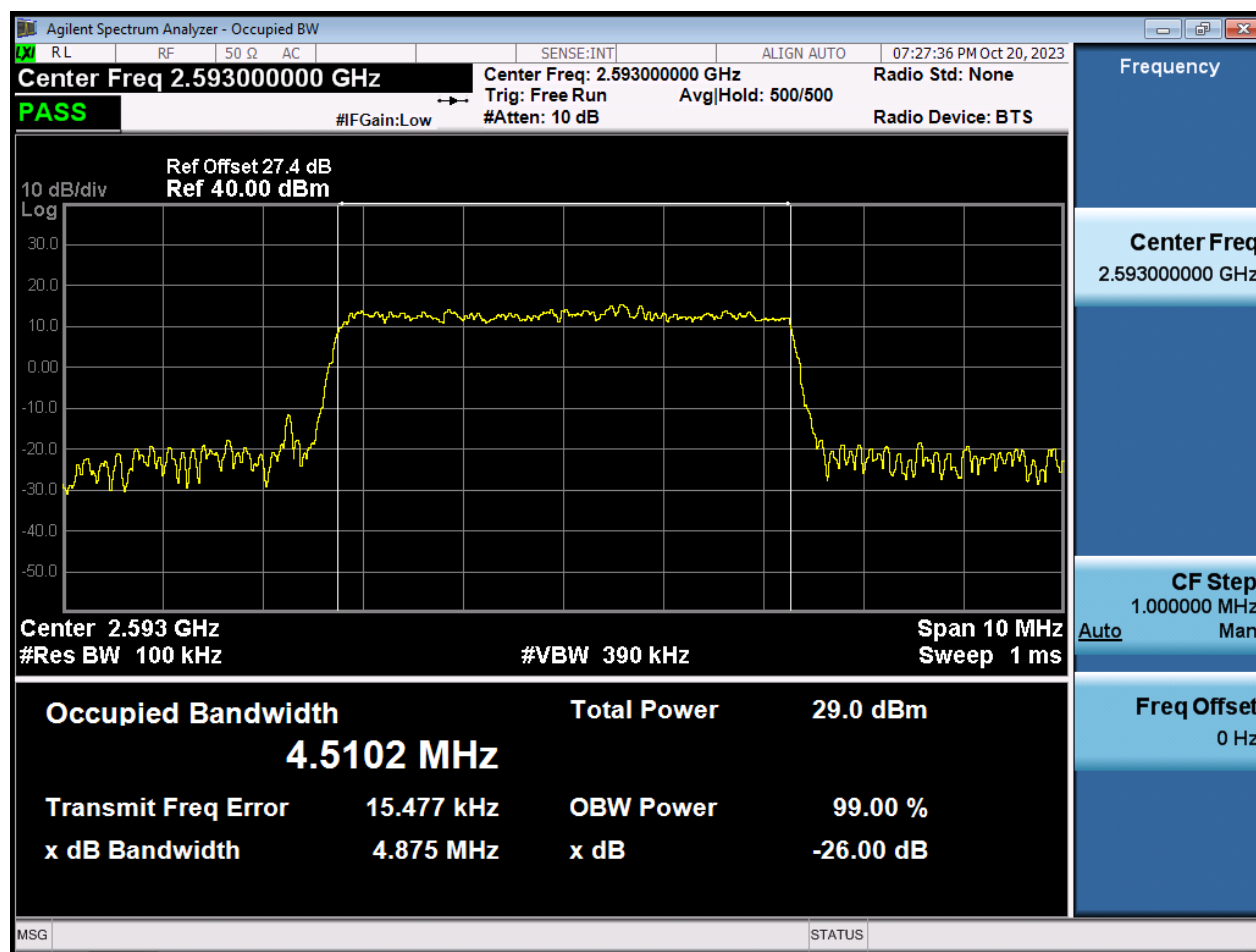


LTE41\_5 M\_OBW\_Mid Channel\_64QAM\_FullIRB

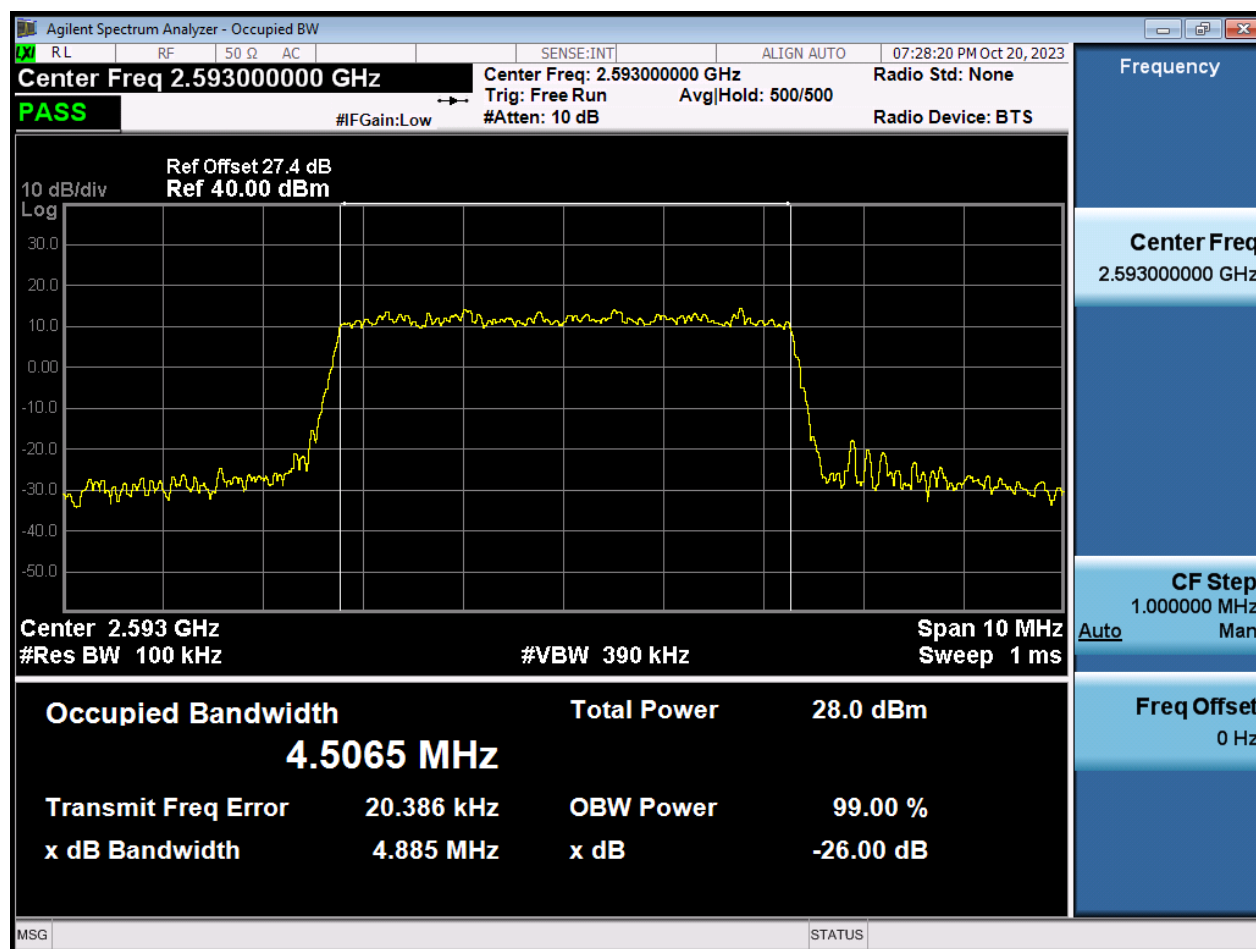


LTE41\_10 M\_OBW\_Mid Channel\_QPSK\_FullIRB

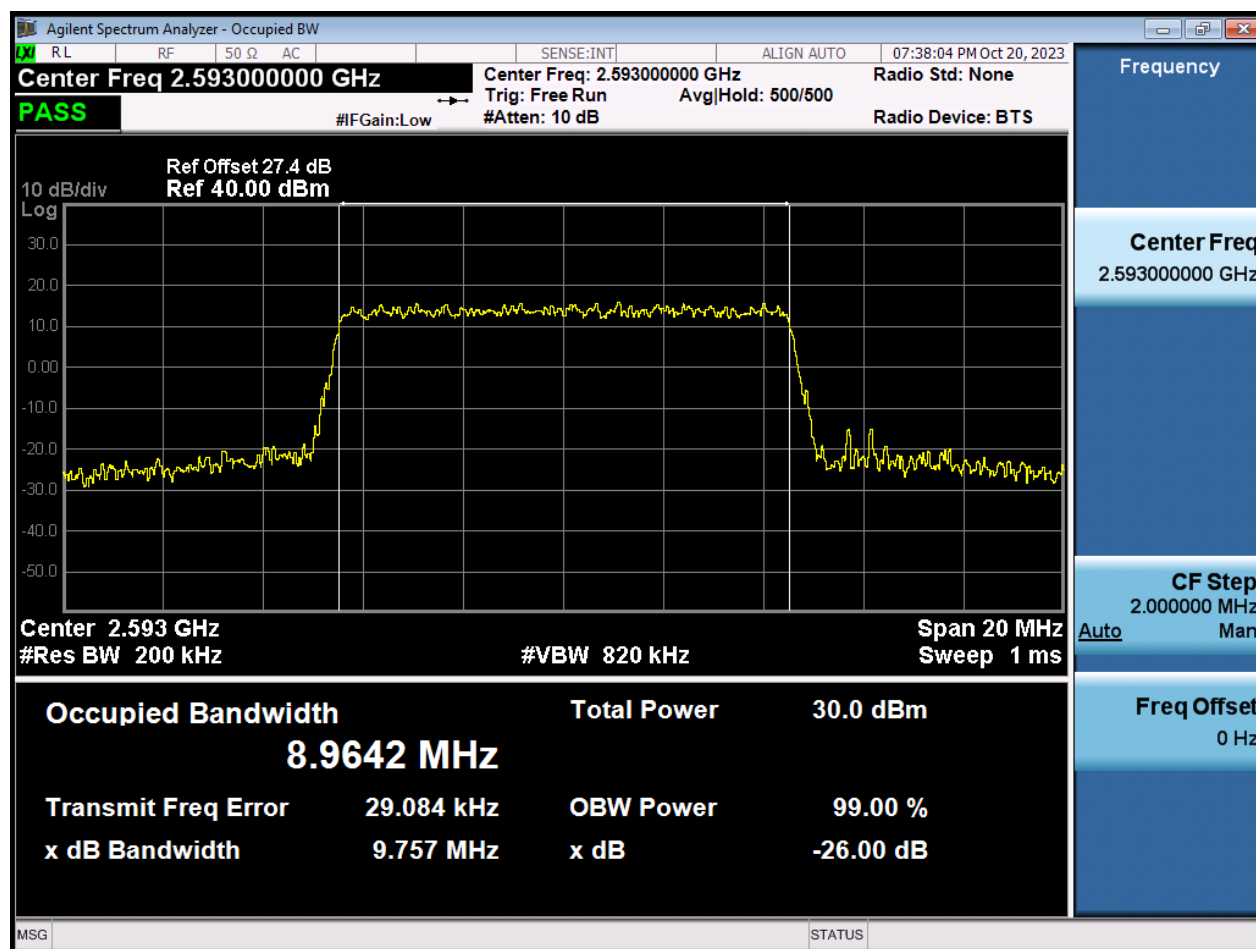


LTE41\_10 M\_OBW\_Mid Channel\_16QAM\_FullRB

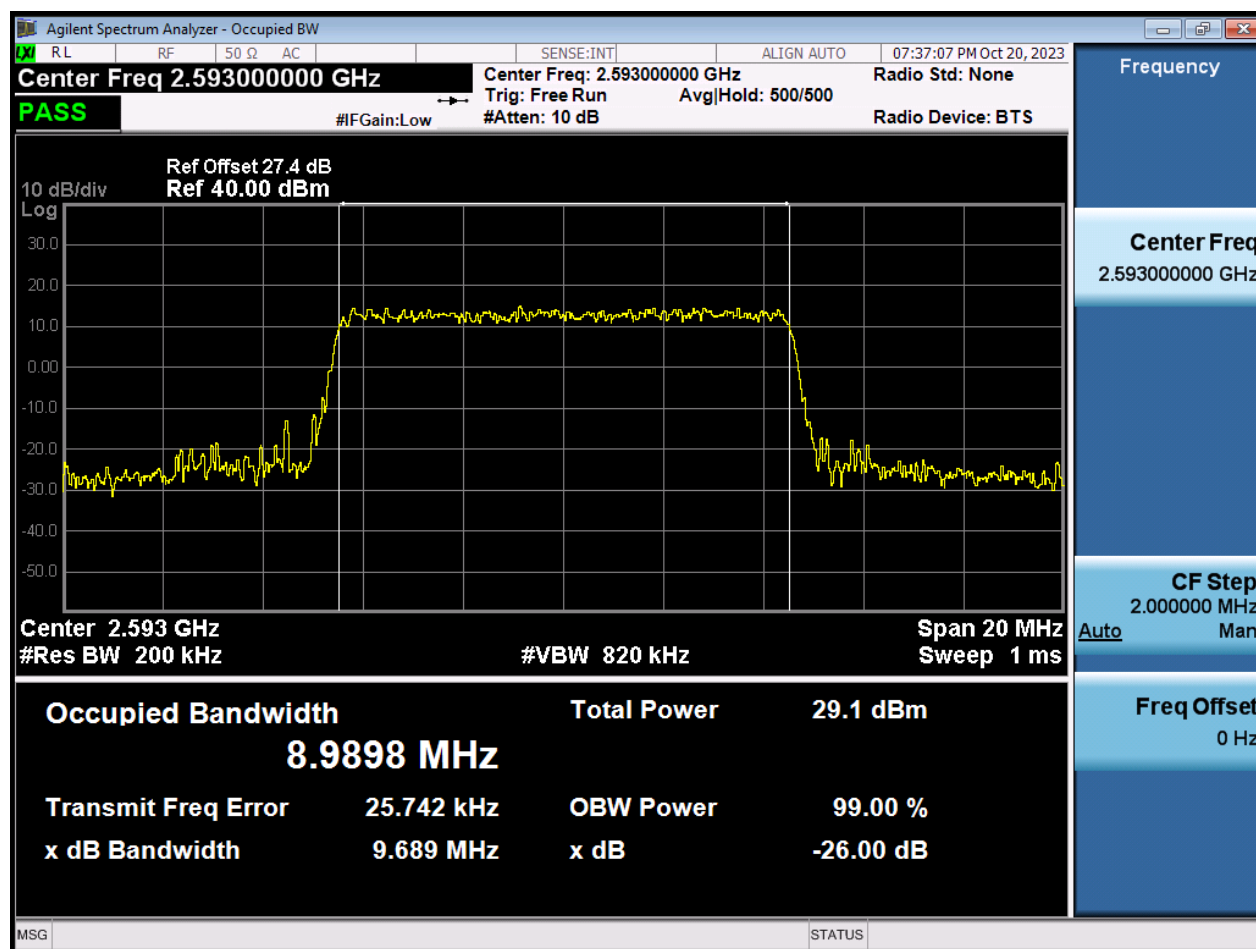


LTE41\_10 M\_OBW\_Mid Channel\_64QAM\_FullRB

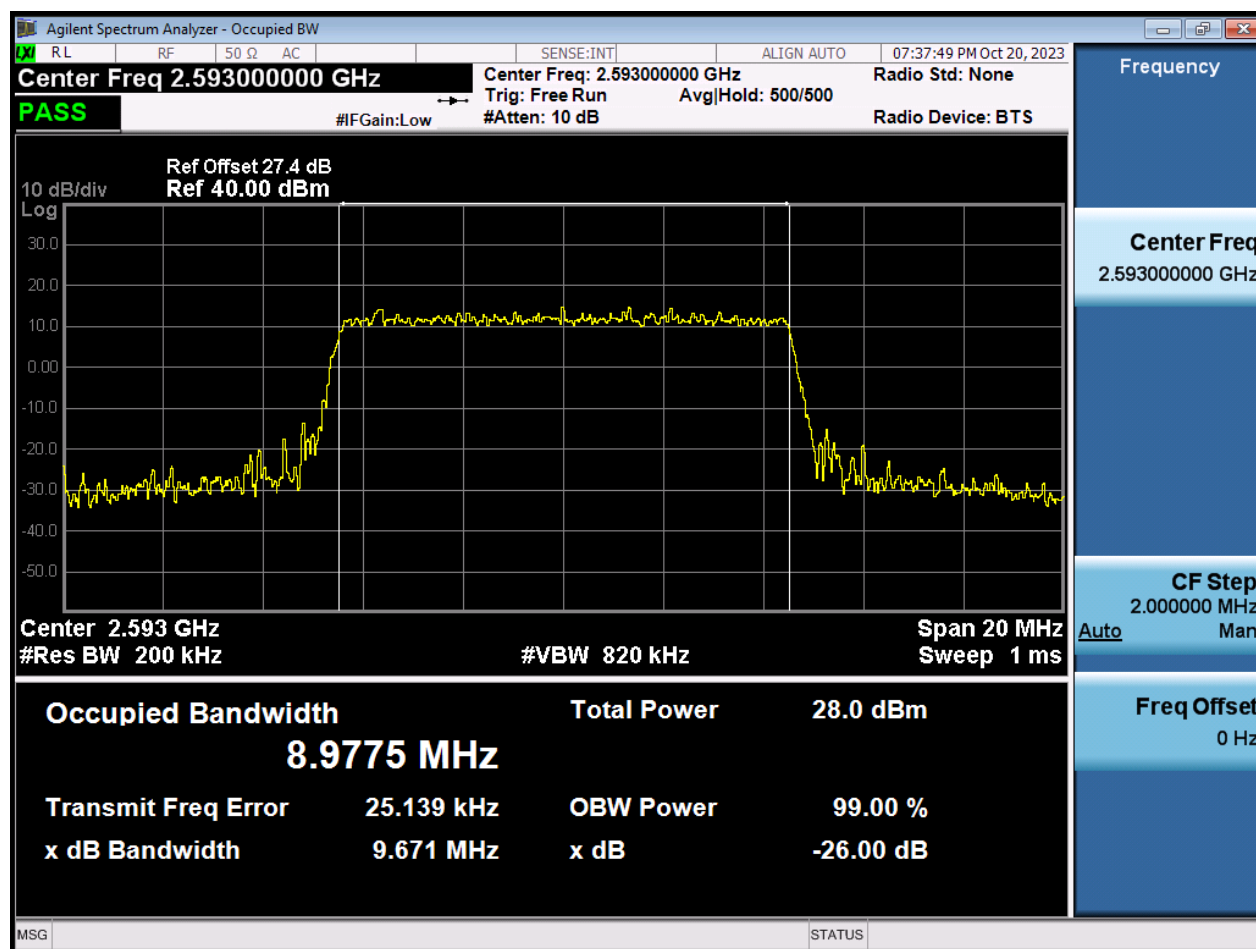


LTE41\_15 M\_OBW\_Mid Channel\_QPSK\_FullIRB

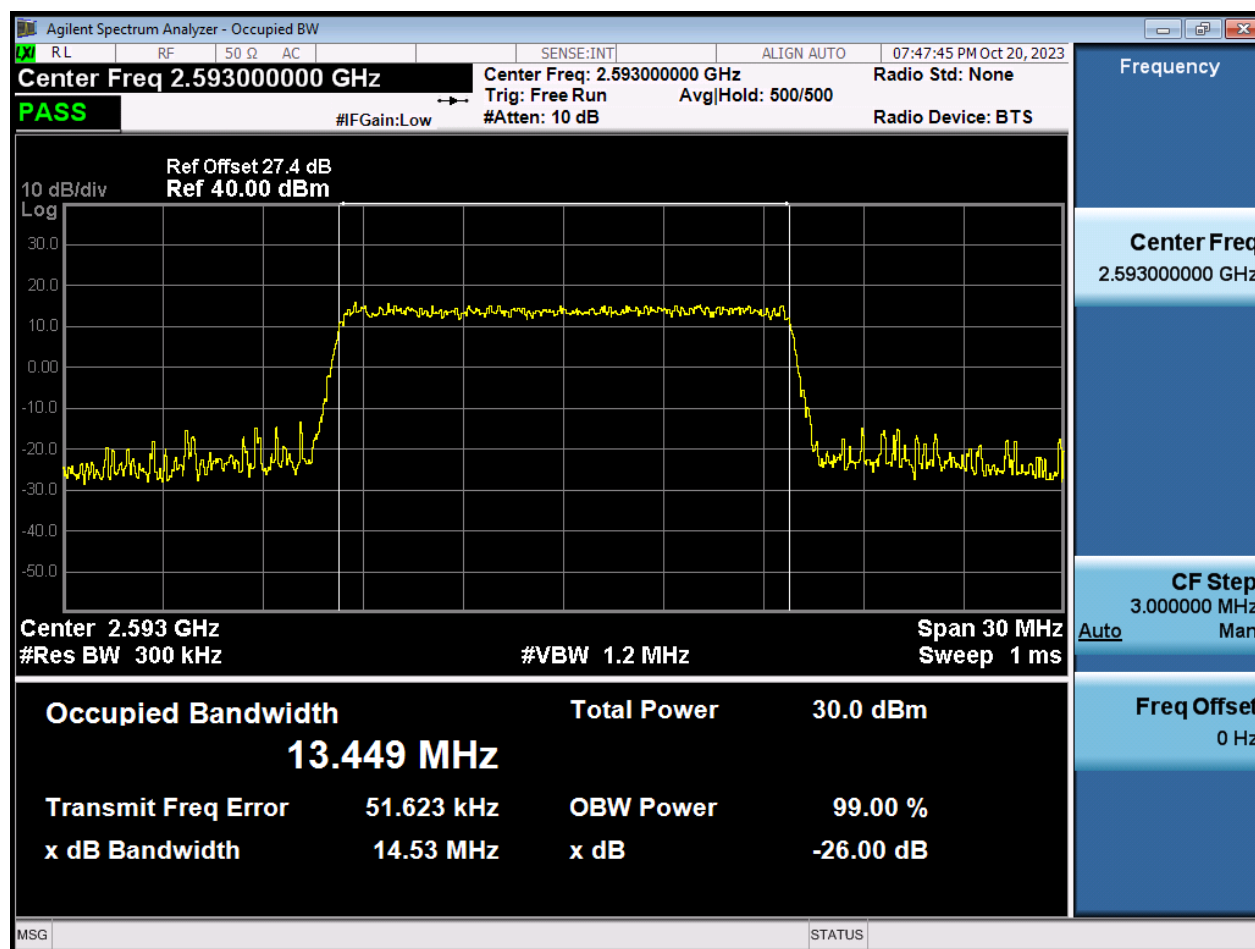


LTE41\_15 M\_OBW\_Mid Channel\_16QAM\_FullRB

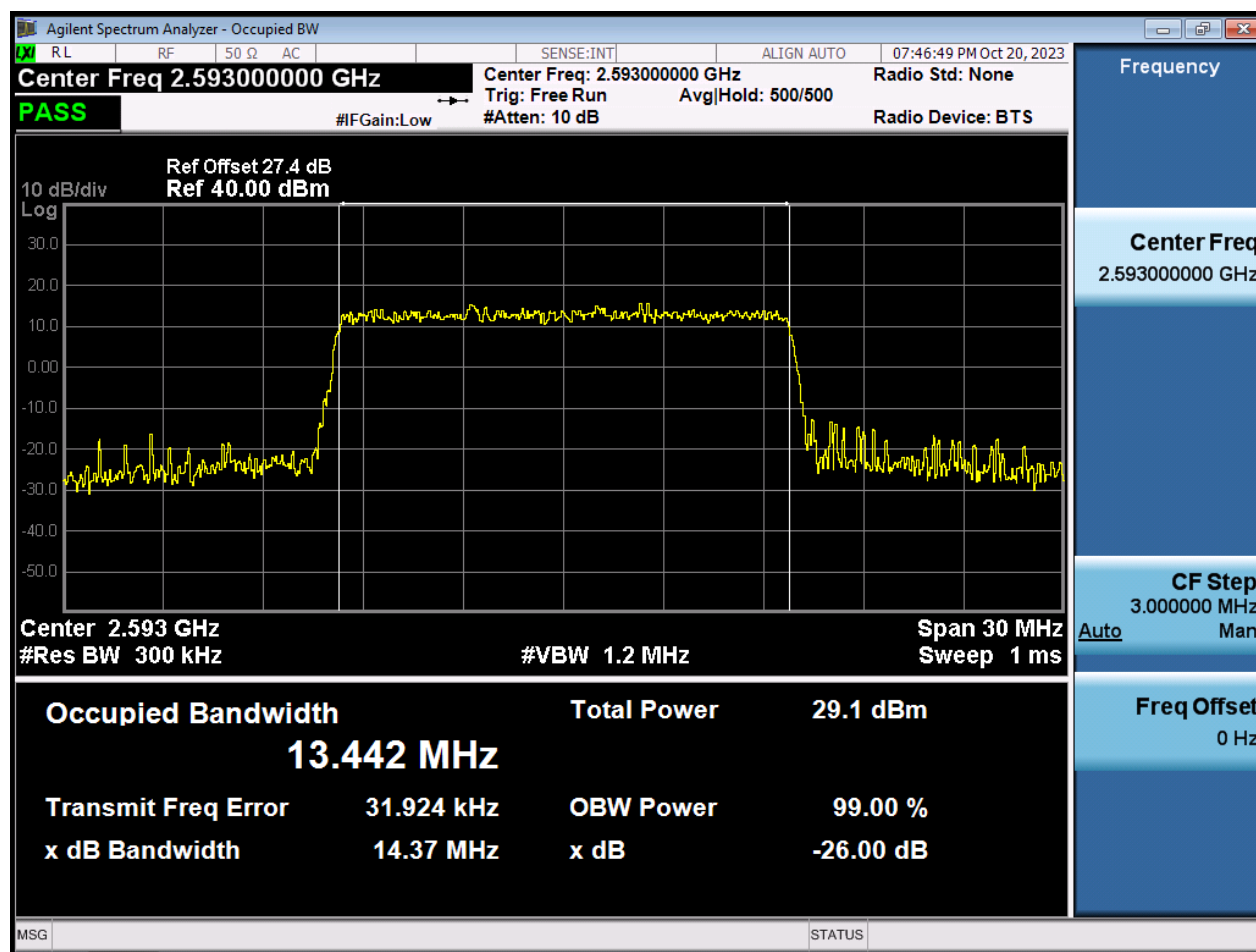


LTE41\_15 M\_OBW\_Mid Channel\_64QAM\_FullRB

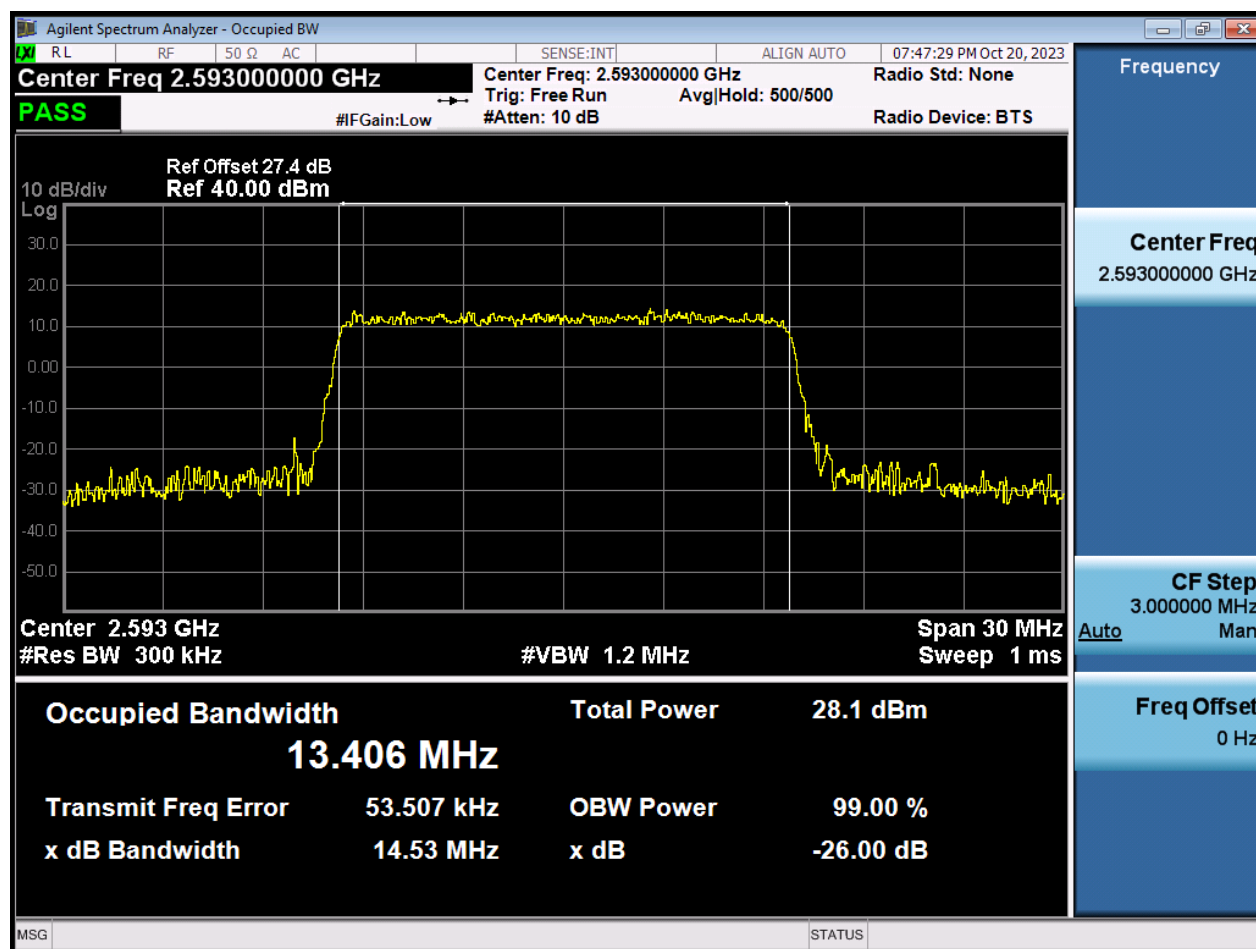


LTE41\_20 M\_OBW\_Mid Channel\_QPSK\_FullIRB

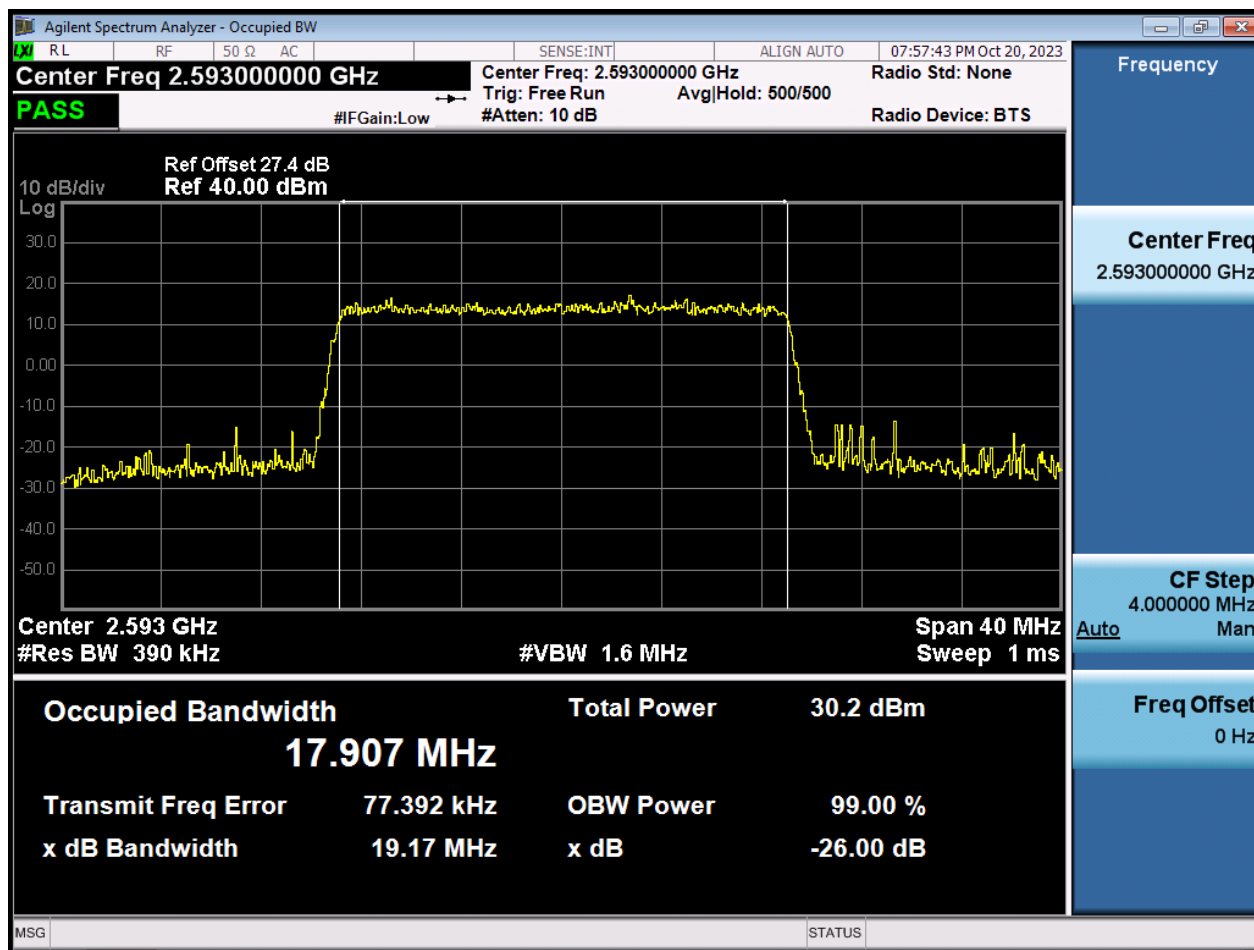


LTE41\_20 M\_OBW\_Mid Channel\_16QAM\_FullRB

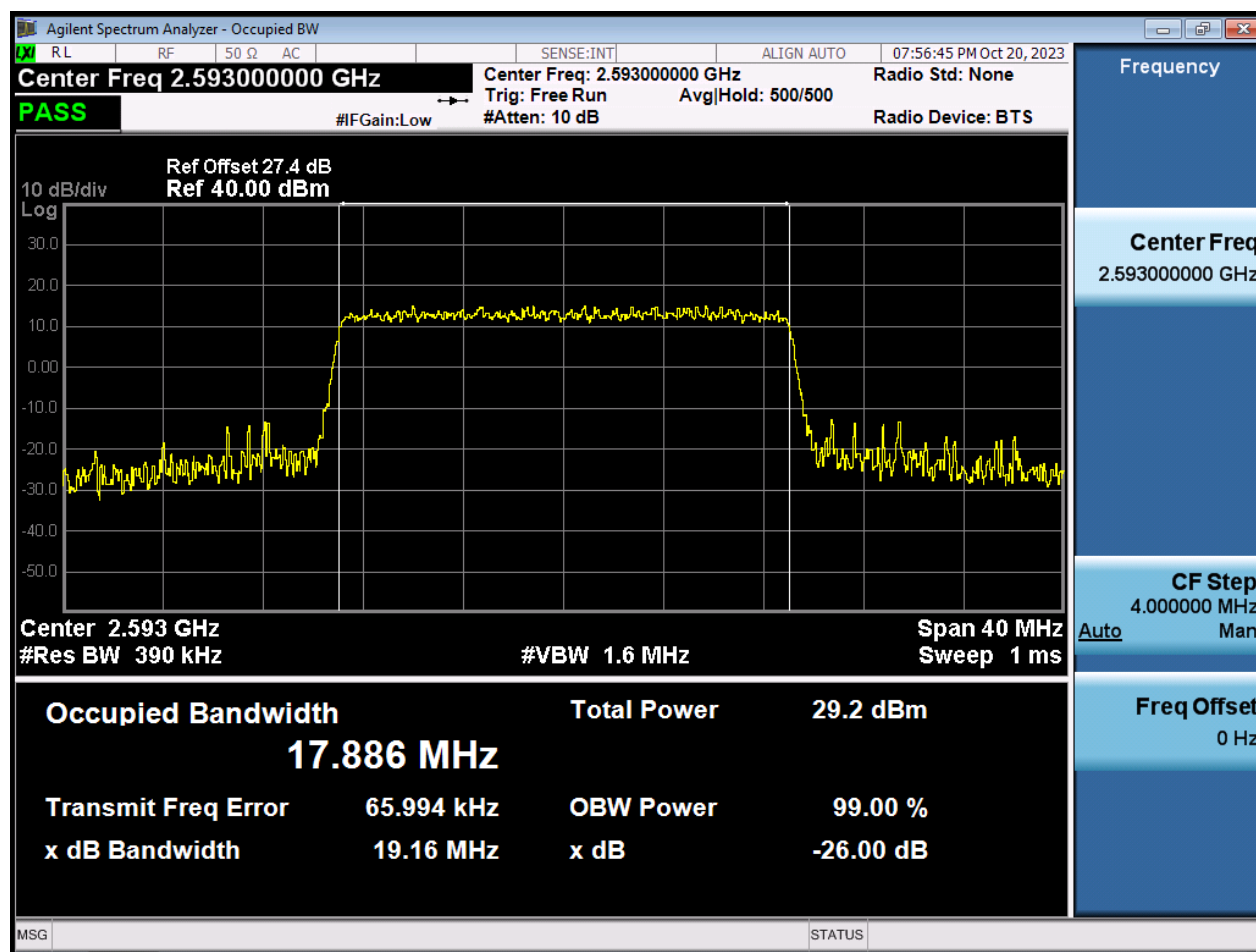


LTE41\_20 M\_OBW\_Mid Channel\_64QAM\_FullRB

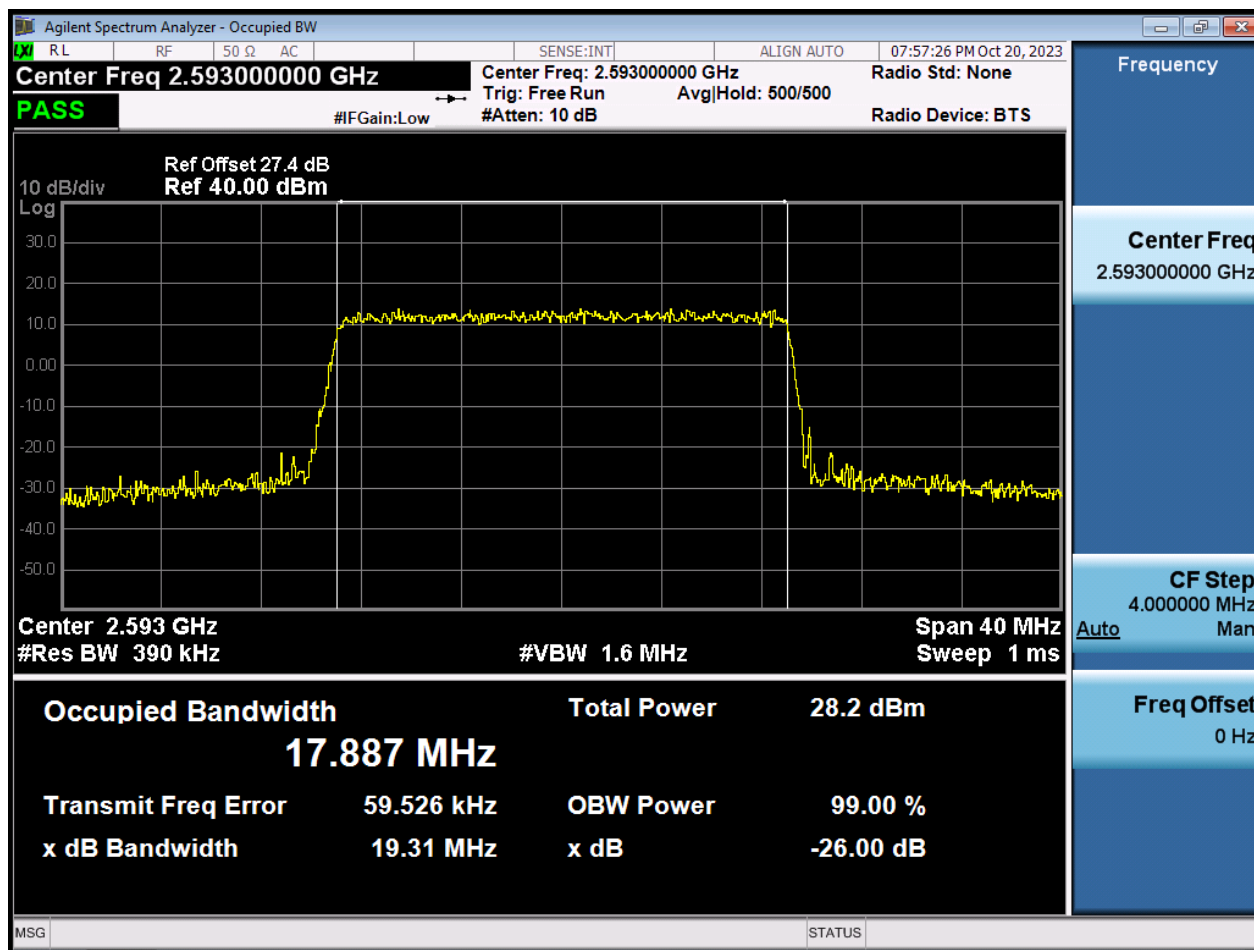


LTE41\_5 M\_PAR\_Mid Channel\_QPSK\_FullIRB

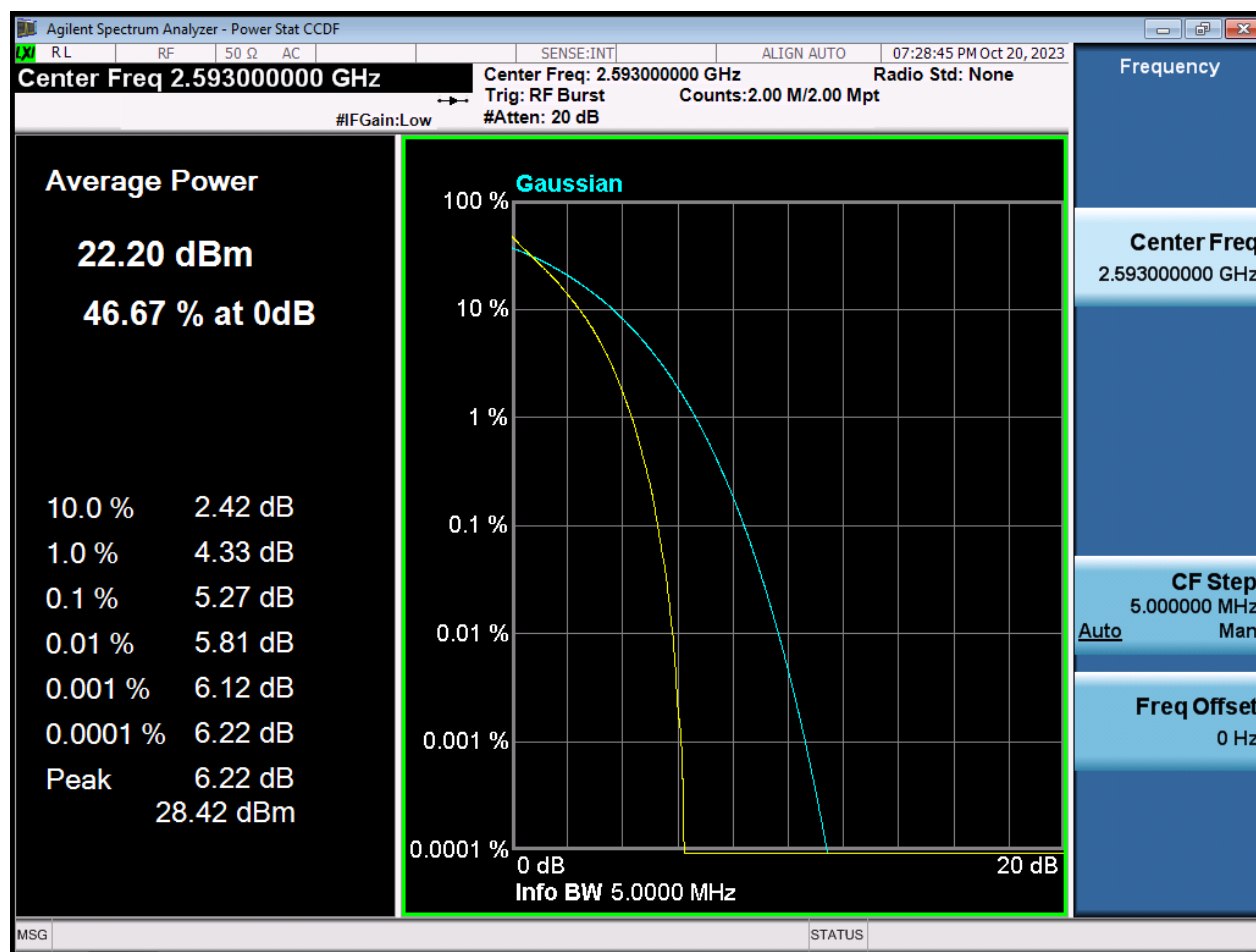


LTE41\_5 M\_PAR\_Mid Channel\_16QAM\_FullRB

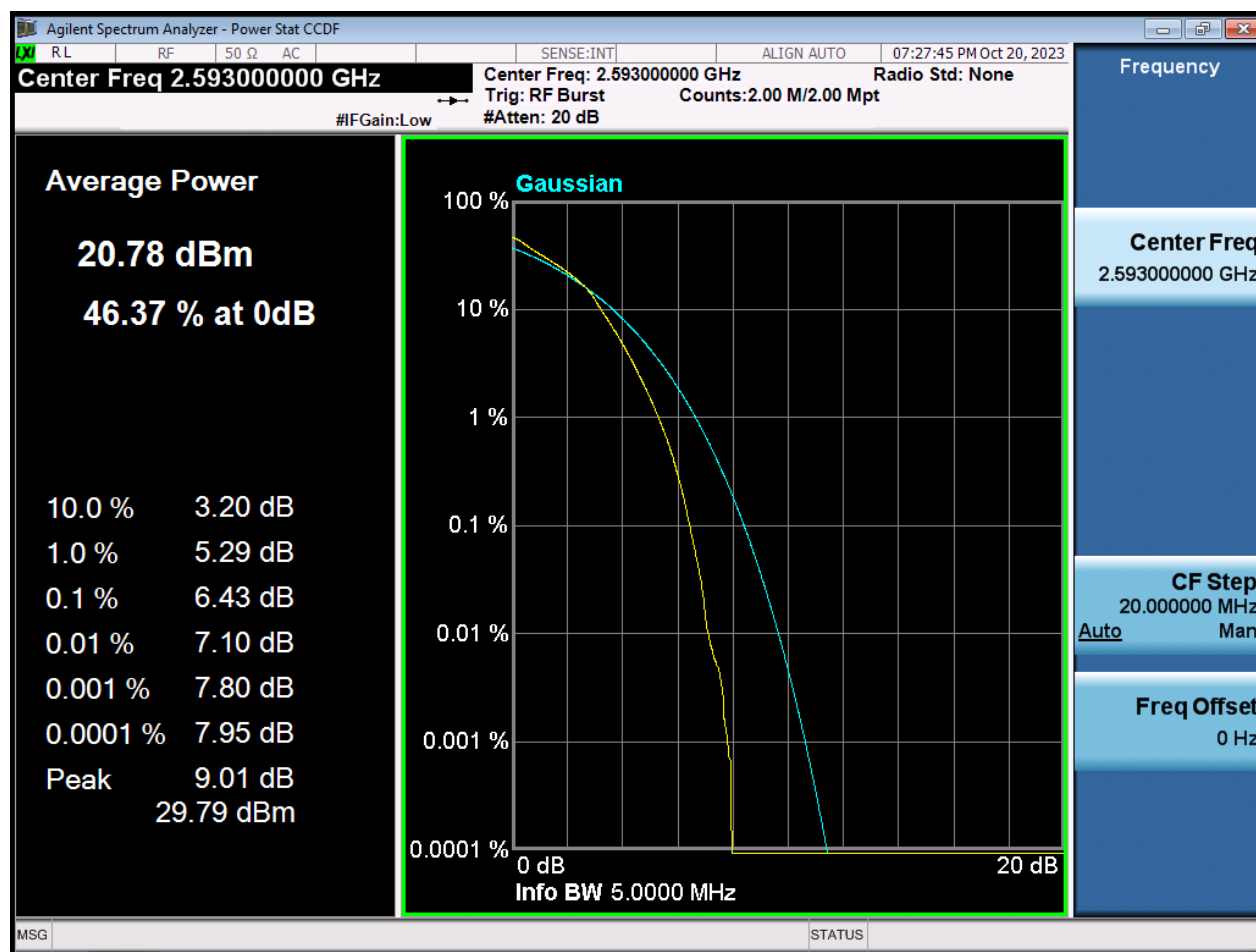


LTE41\_5 M\_PAR\_Mid Channel\_64QAM\_FullRB

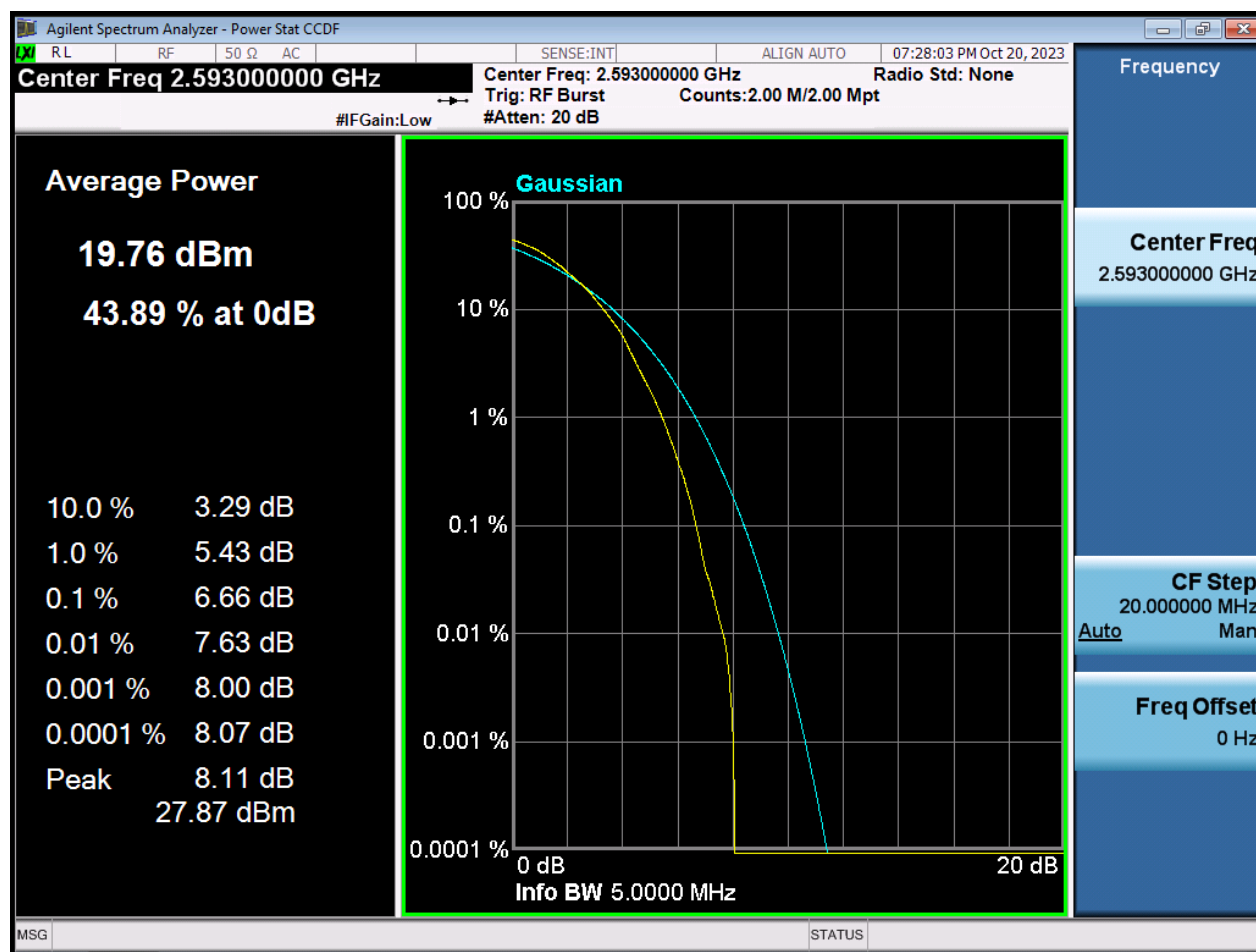


LTE41\_10 M\_PAR\_Mid Channel\_QPSK\_FullRB

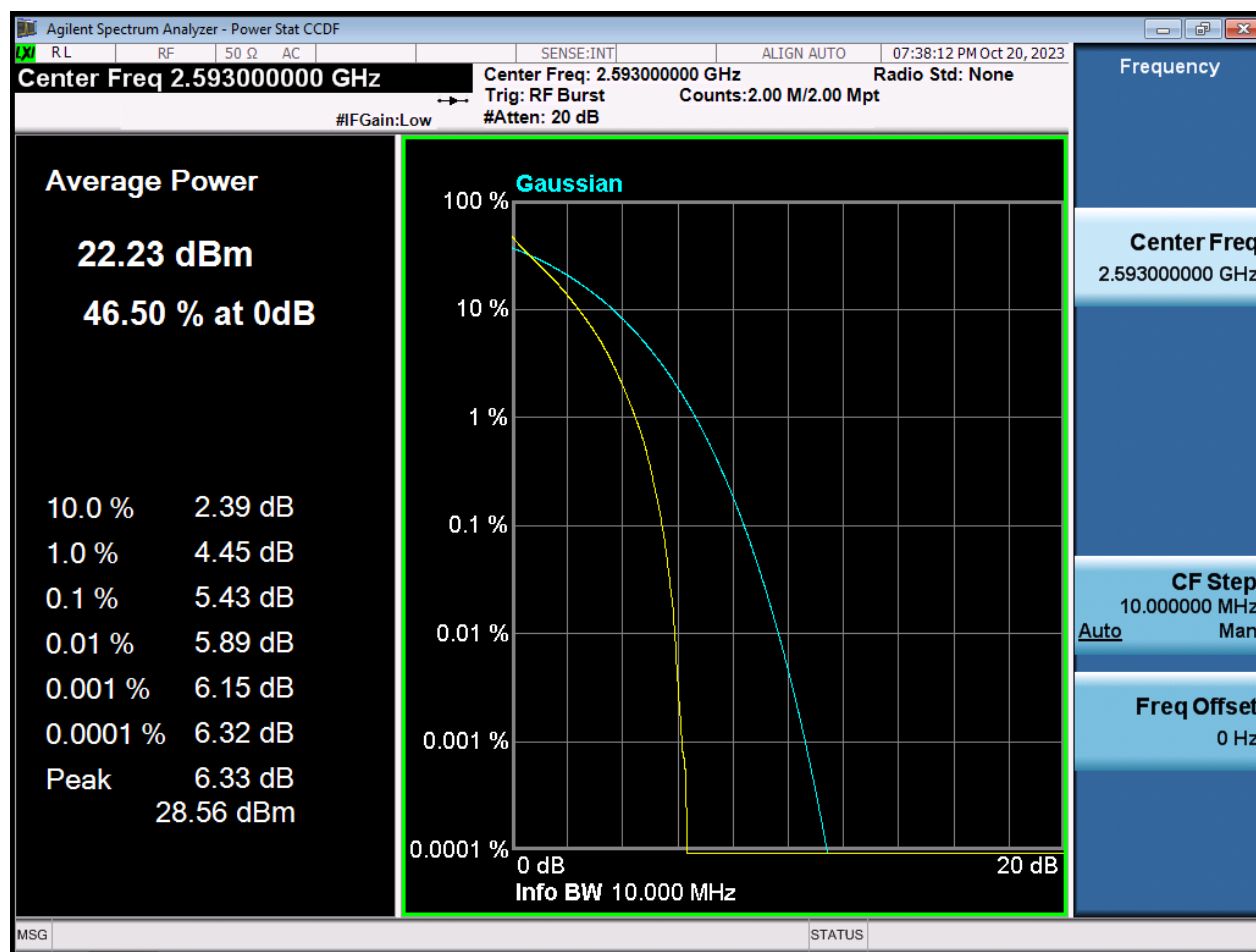


LTE41\_10 M\_PAR\_Mid Channel\_16QAM\_FullRB

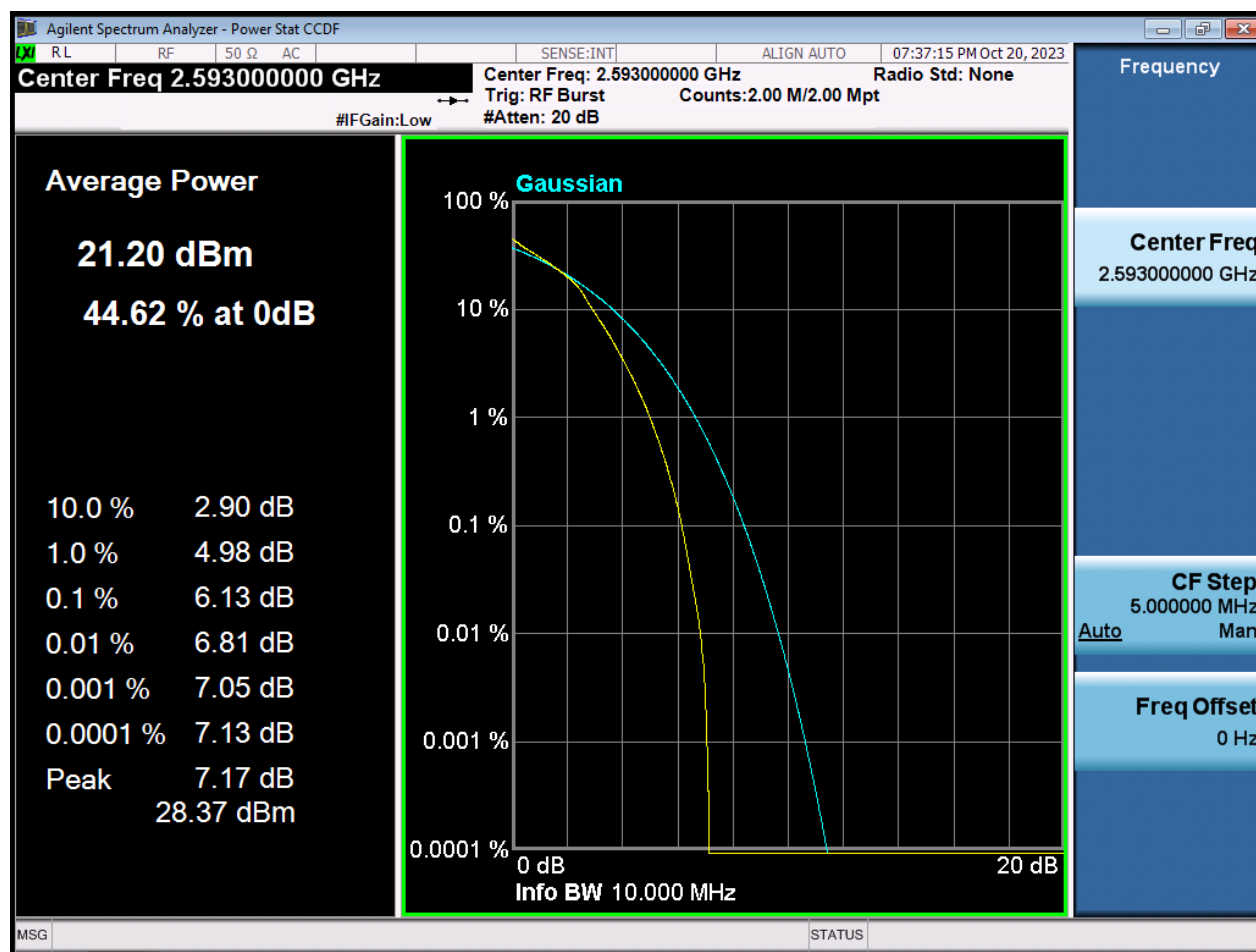


LTE41\_10 M\_PAR\_Mid Channel\_64QAM\_FullRB

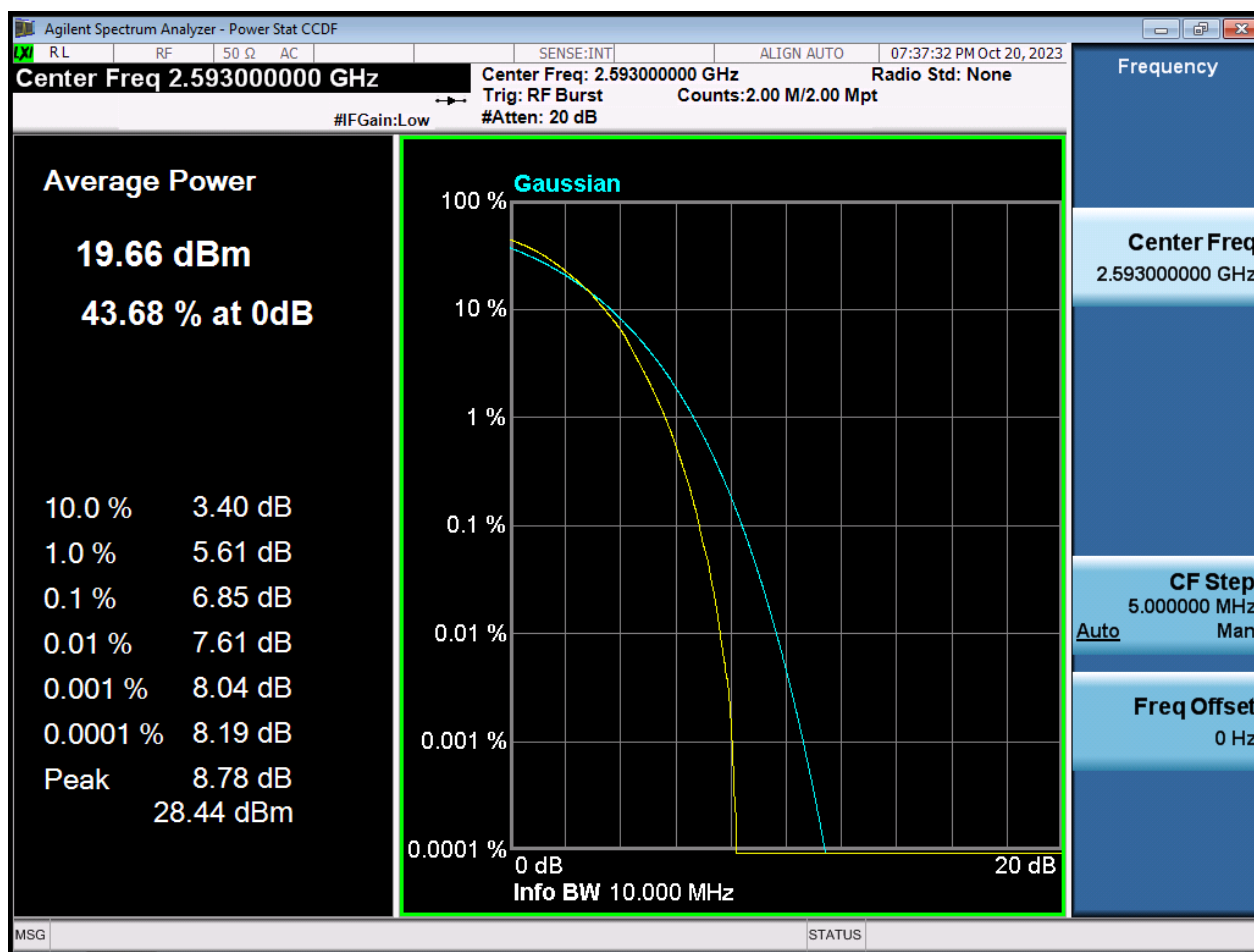


LTE41\_15 M\_PAR\_Mid Channel\_QPSK\_FullRB

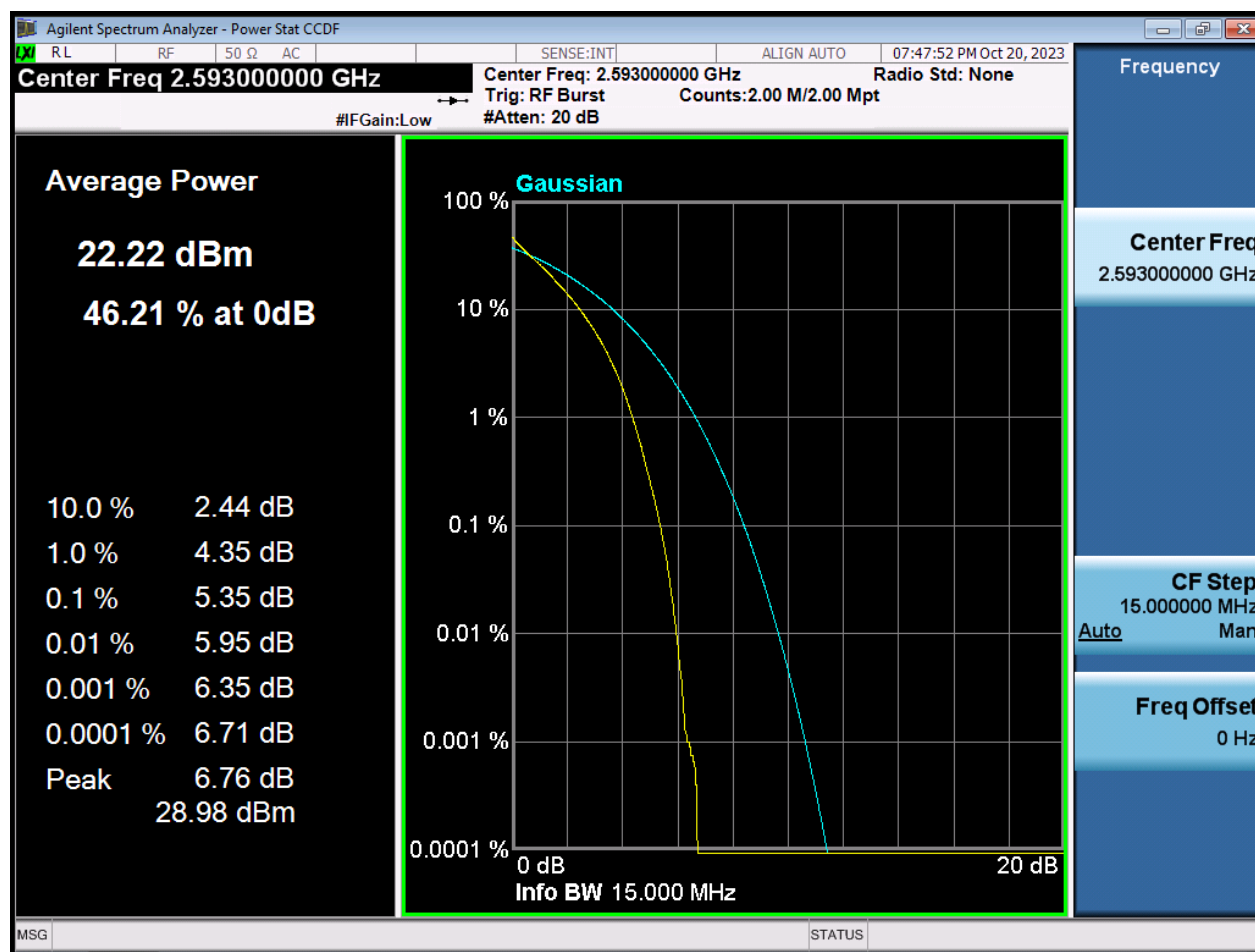


LTE41\_15 M\_PAR\_Mid Channel\_16QAM\_FullRB

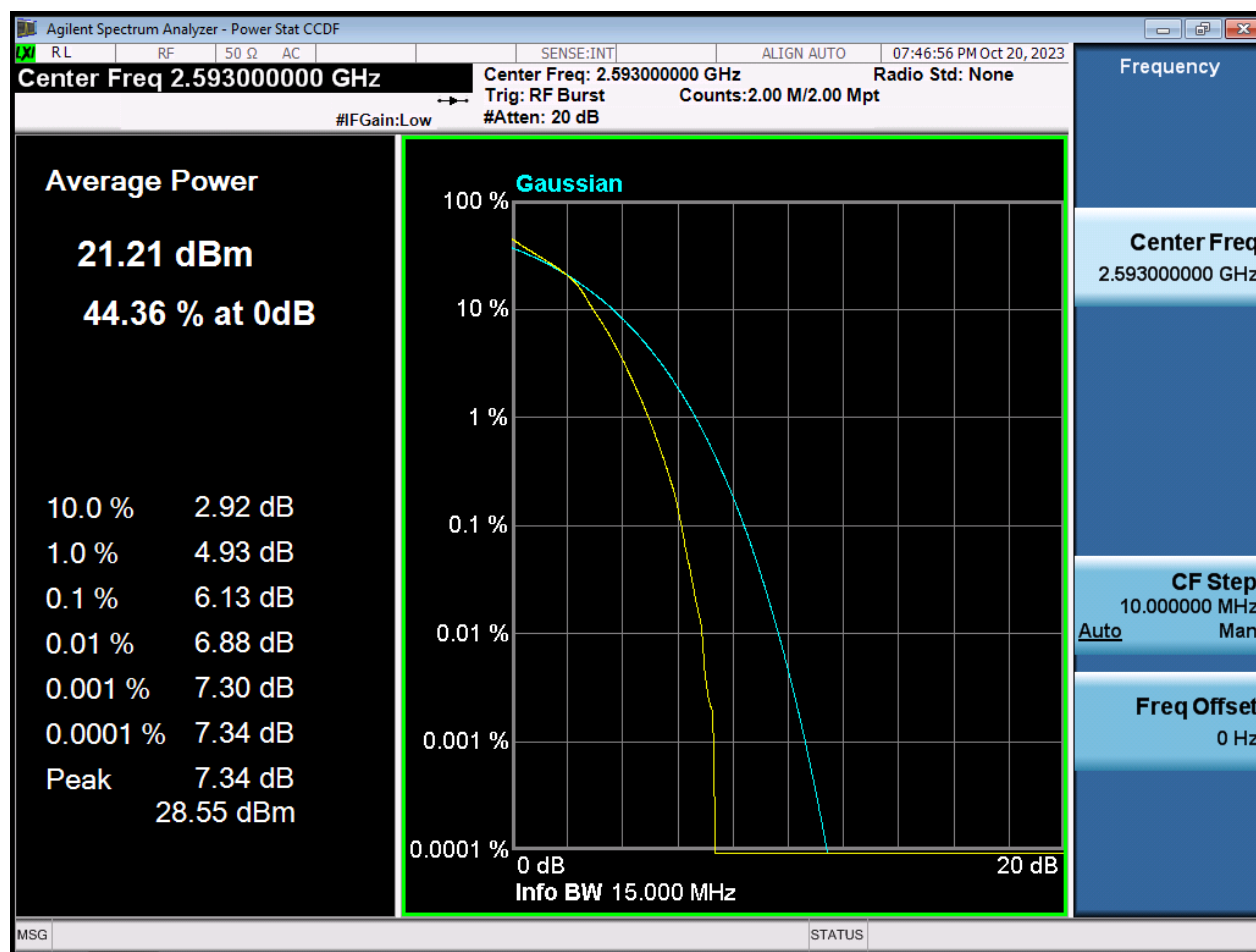


LTE41\_15 M\_PAR\_Mid Channel\_64QAM\_FullRB

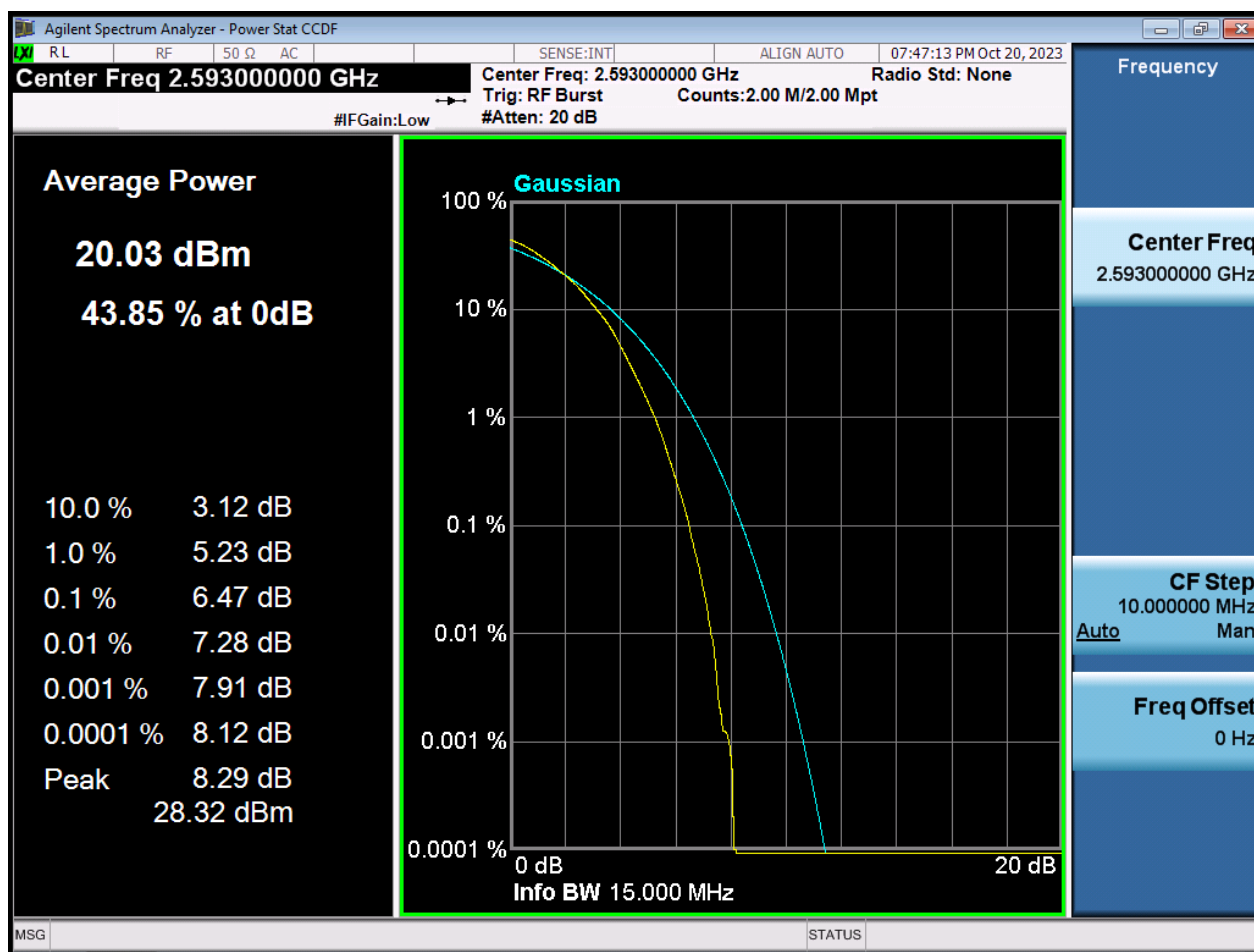


LTE41\_20 M\_PAR\_Mid Channel\_QPSK\_FullRB

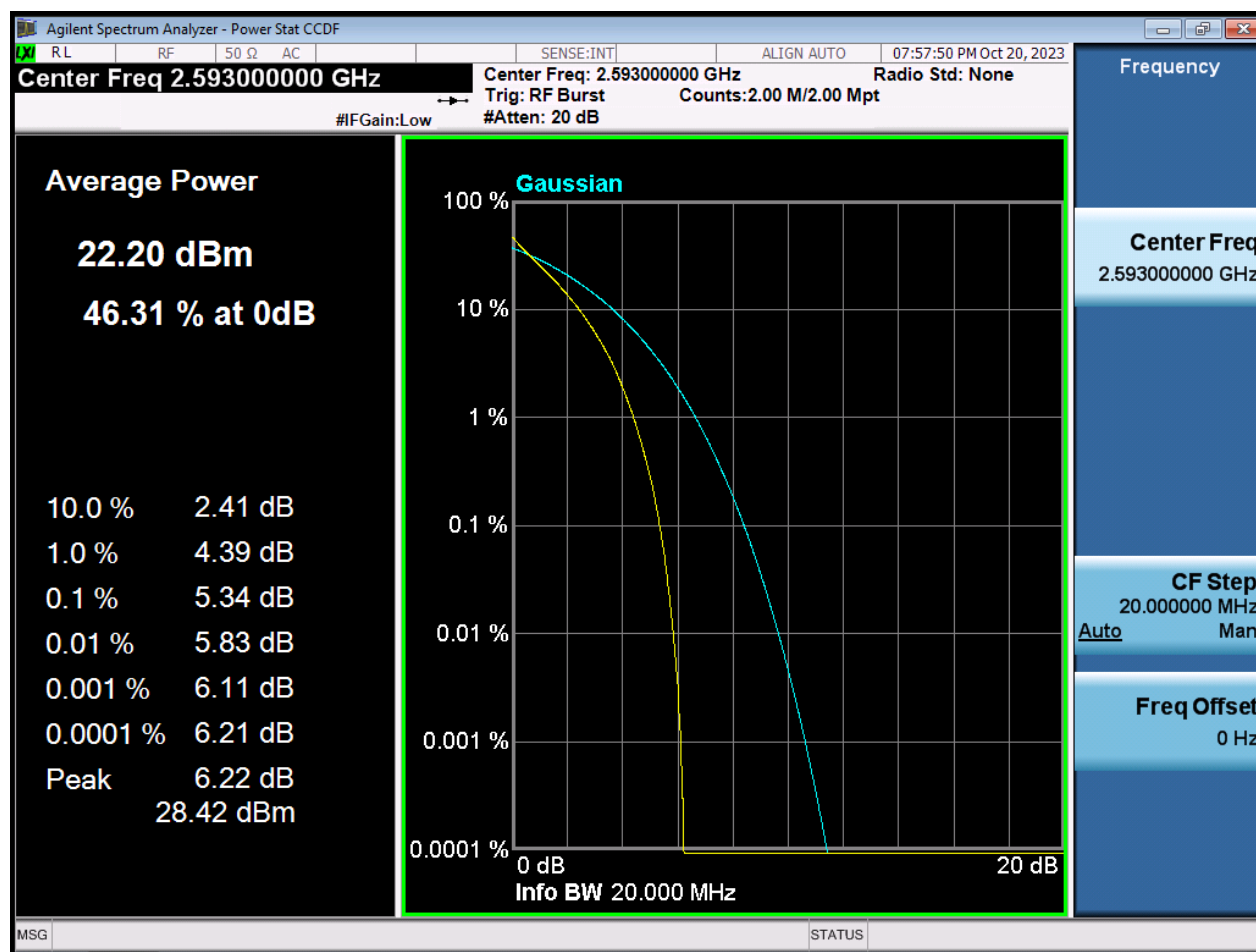


LTE41\_20 M\_PAR\_Mid Channel\_16QAM\_FullIRB

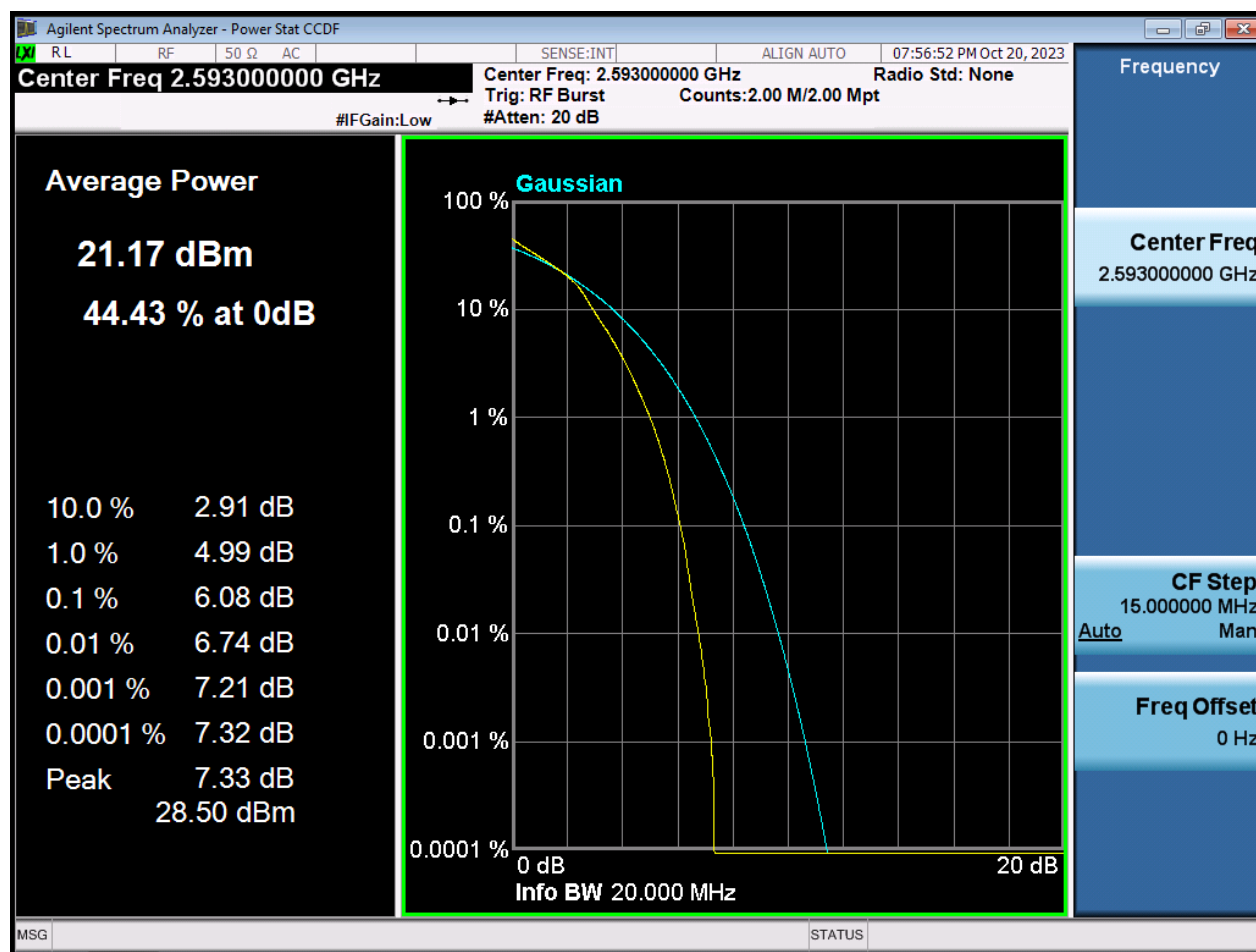


LTE41\_20 M\_PAR\_Mid Channel\_64QAM\_FullRB

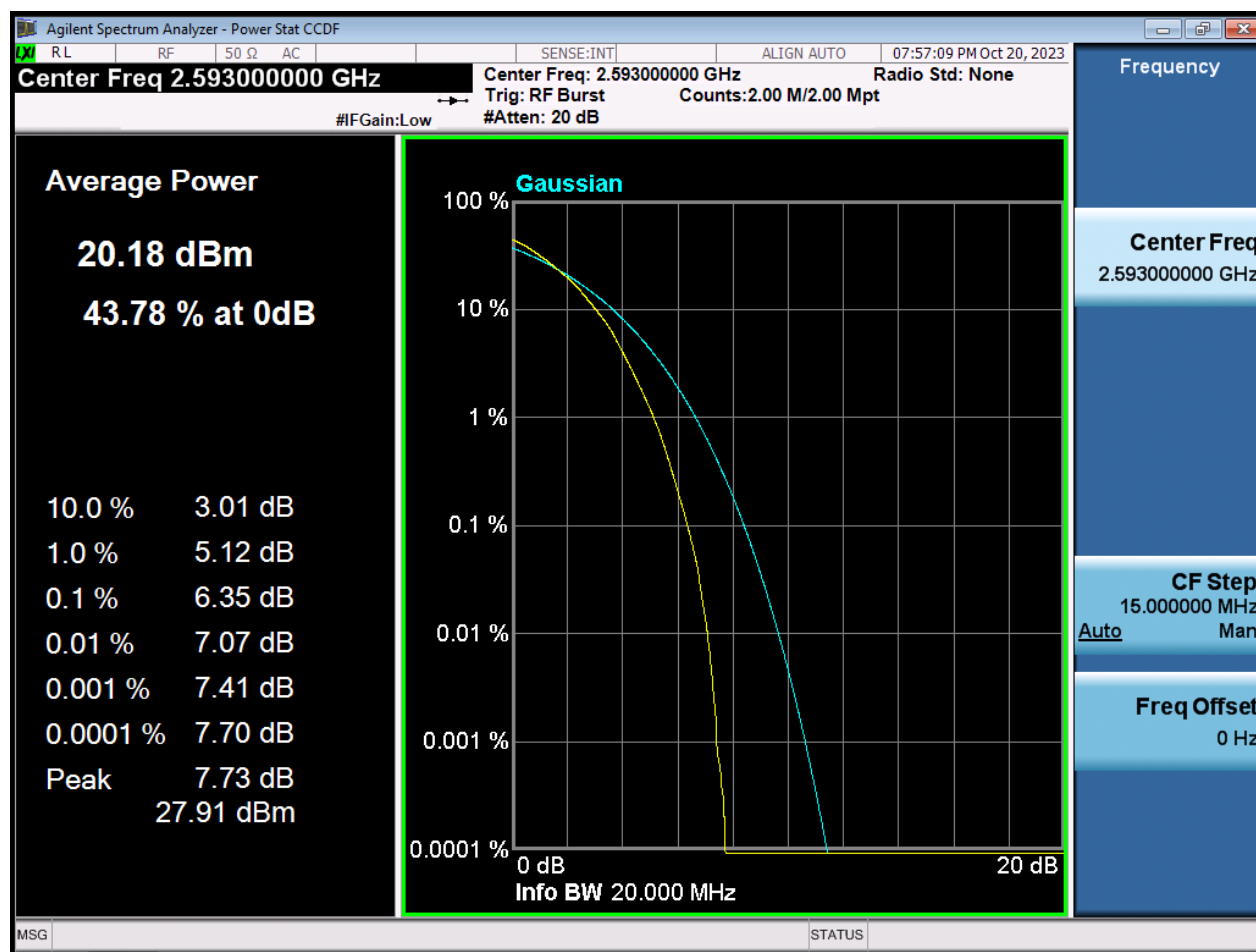


LTE41\_5 M\_CSE(30 M-10 G)\_Lowest Channel

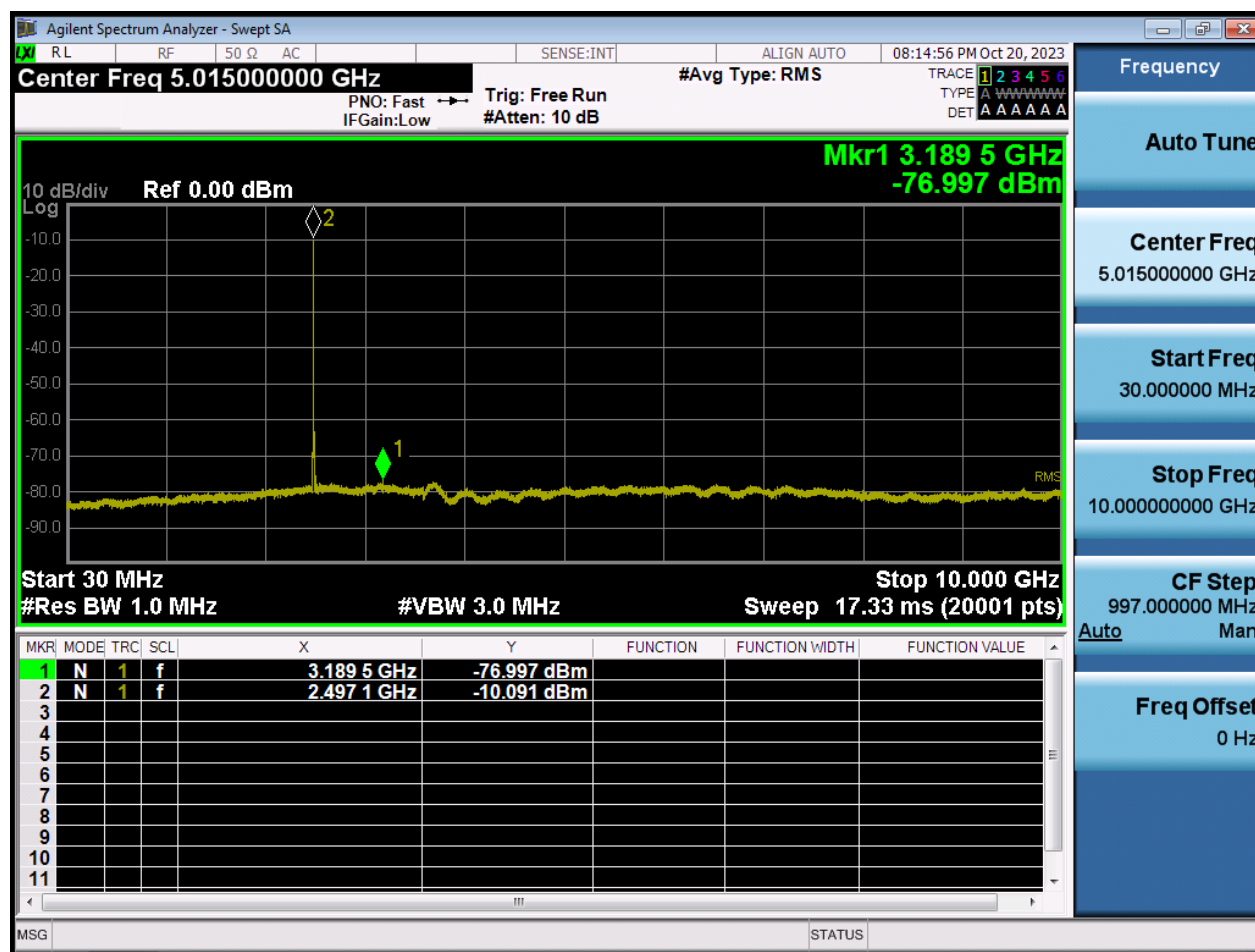


LTE41\_5 M\_CSE(30 M-10 G)\_Mid Channel

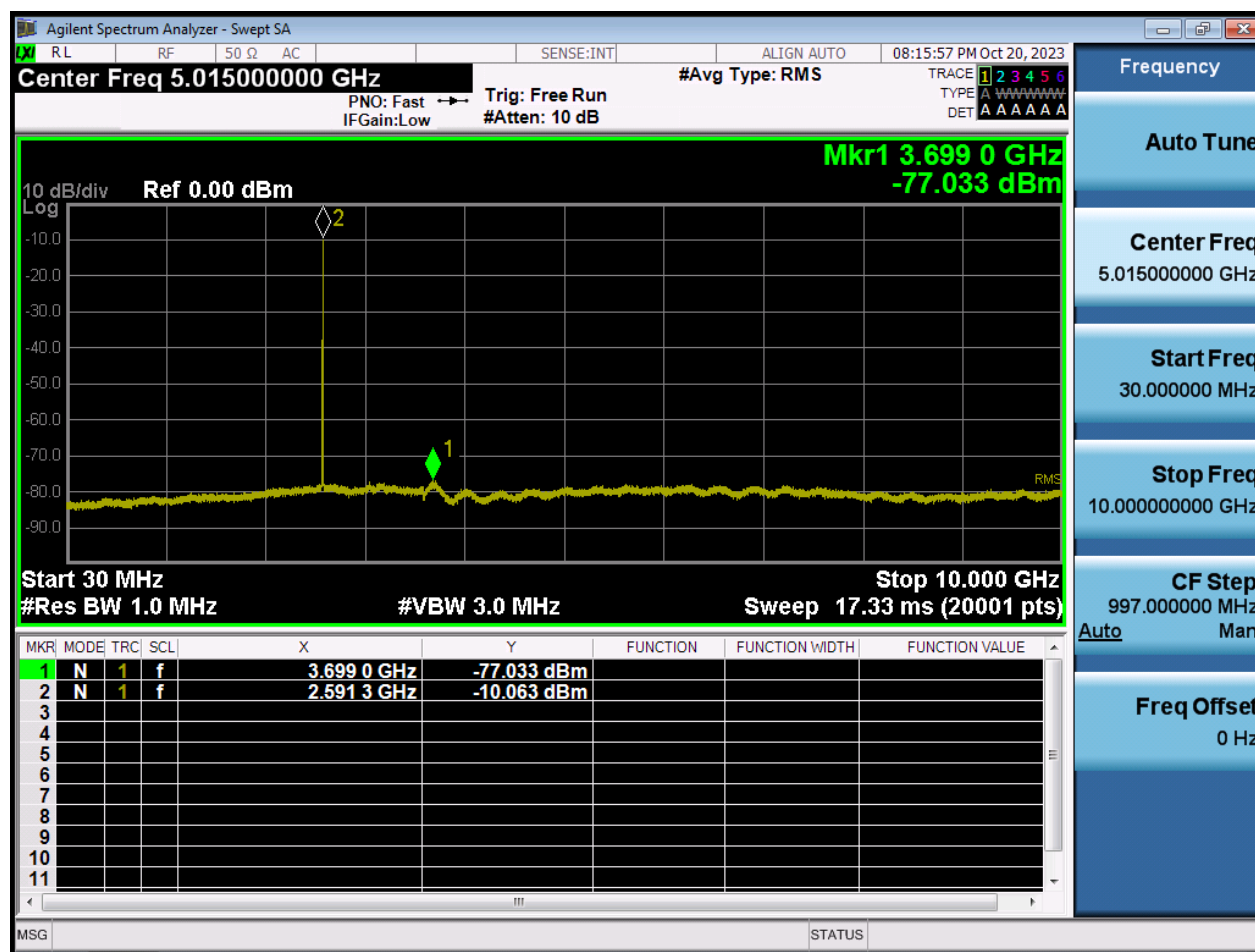


LTE41\_5 M\_CSE(30 M-10 G)\_Highest Channel

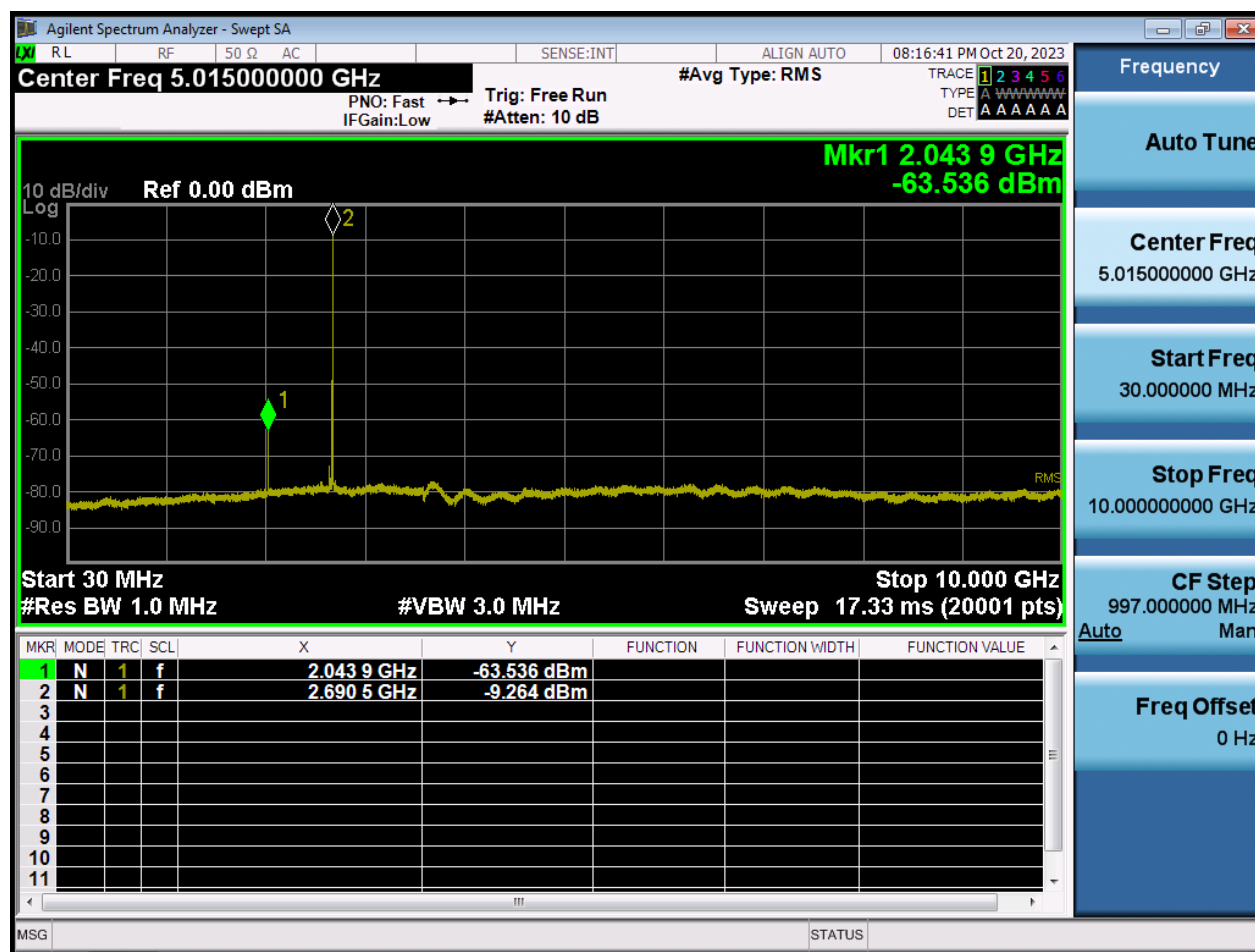


LTE41\_10 M\_CSE(30 M-10 G)\_Lowest Channel

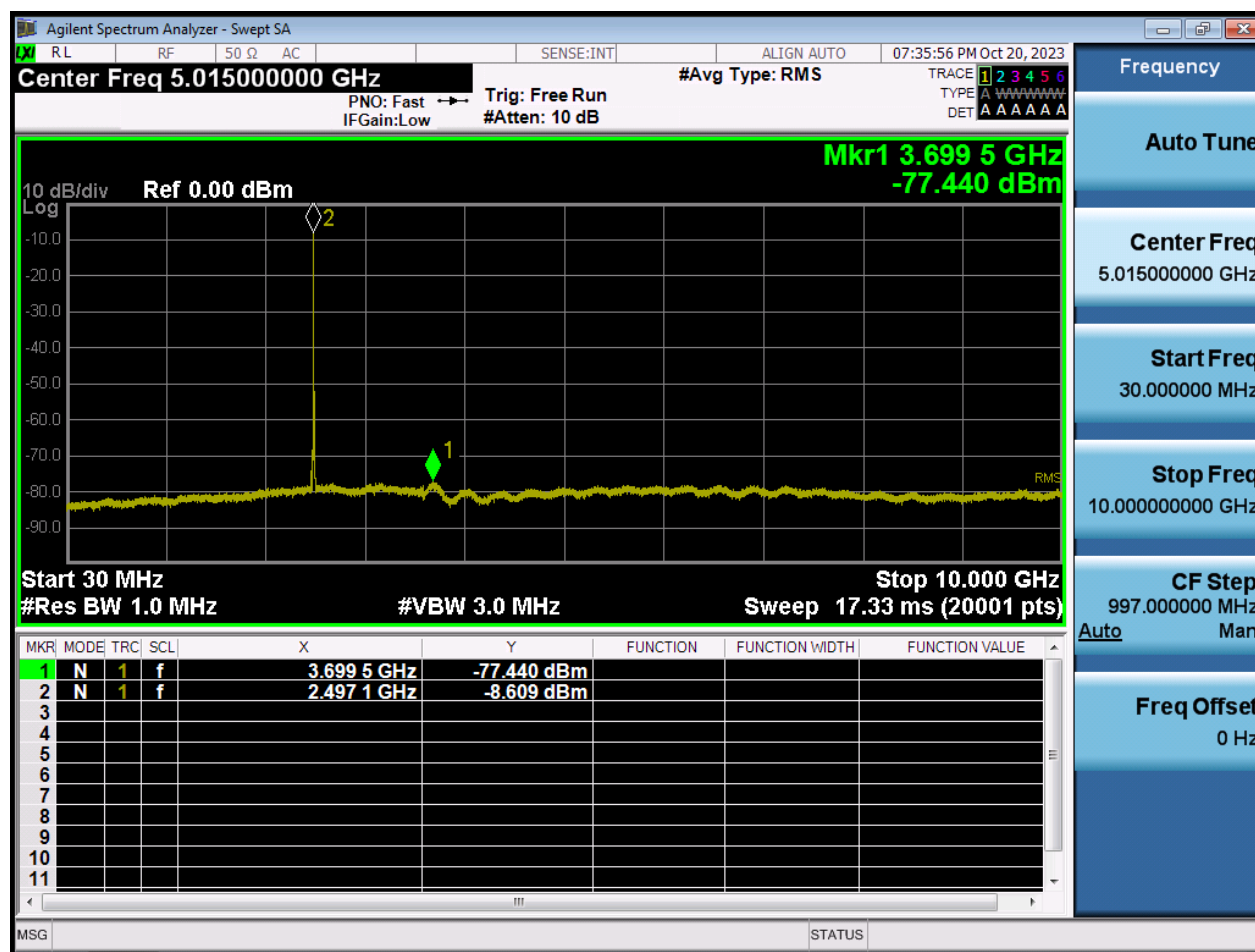


LTE41\_10 M\_CSE(30 M-10 G)\_Mid Channel

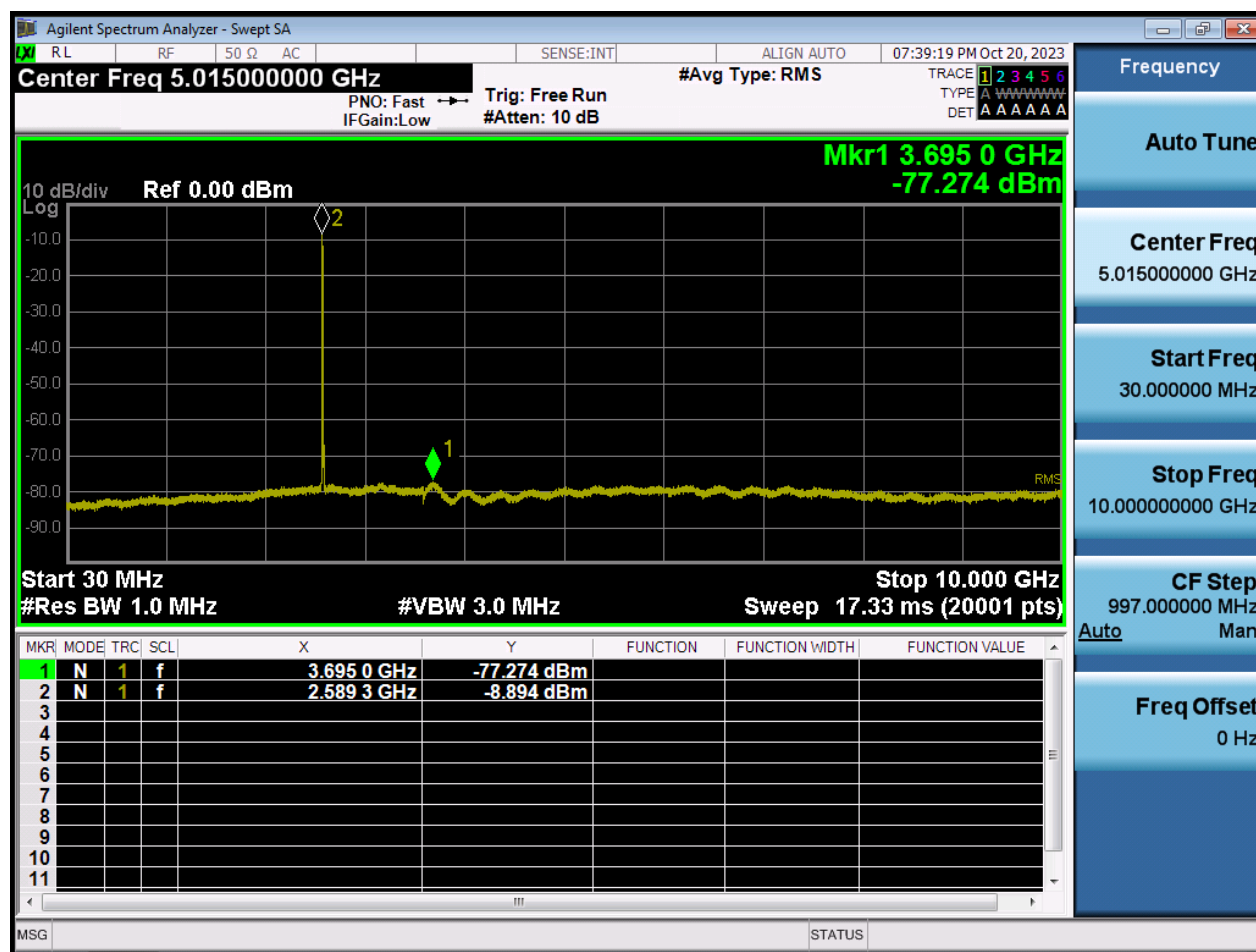


LTE41\_10 M\_CSE(30 M-10 G)\_Highest Channel

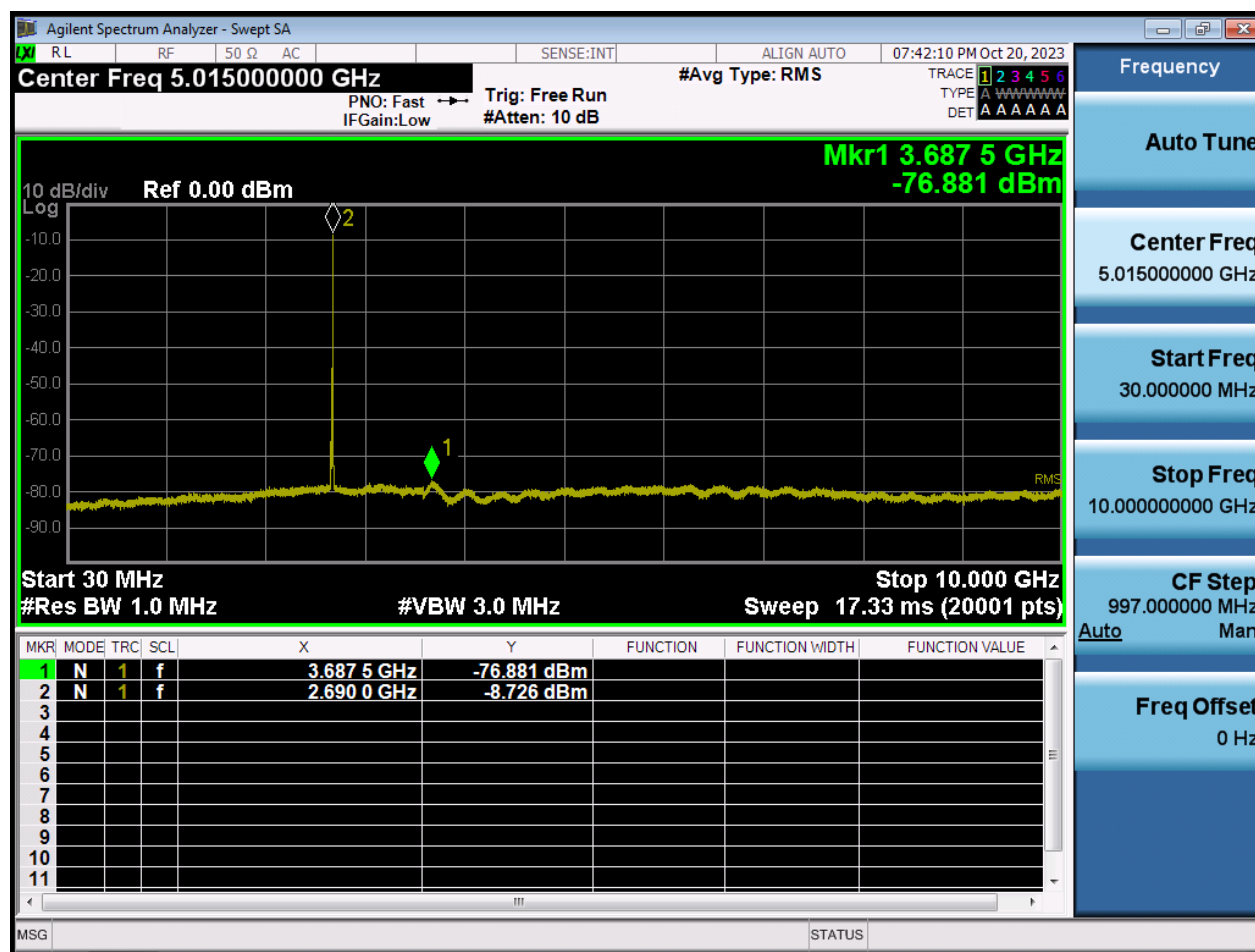


LTE41\_15 M\_CSE(30 M-10 G)\_Lowest Channel

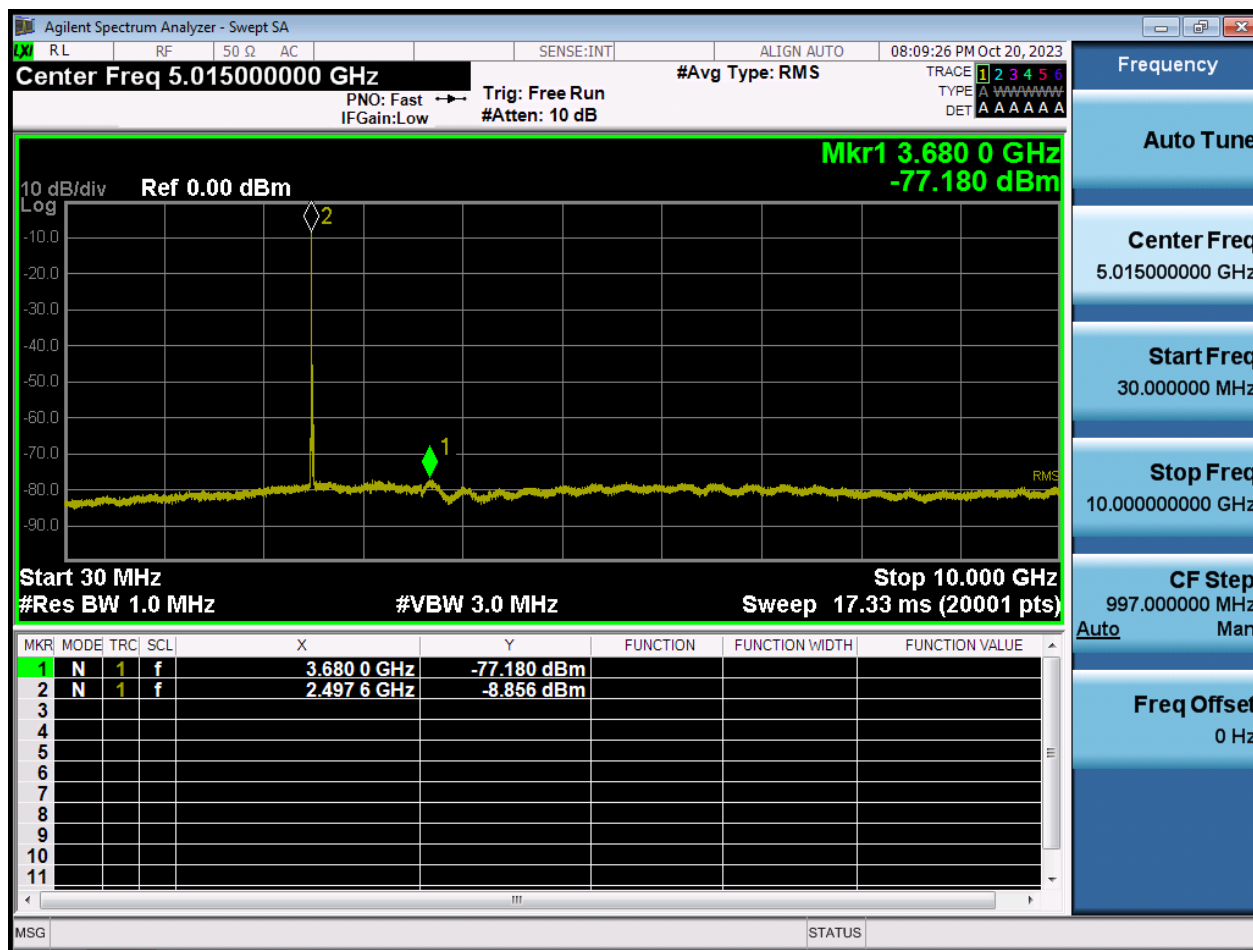


LTE41\_15 M\_CSE(30 M-10 G)\_Mid Channel

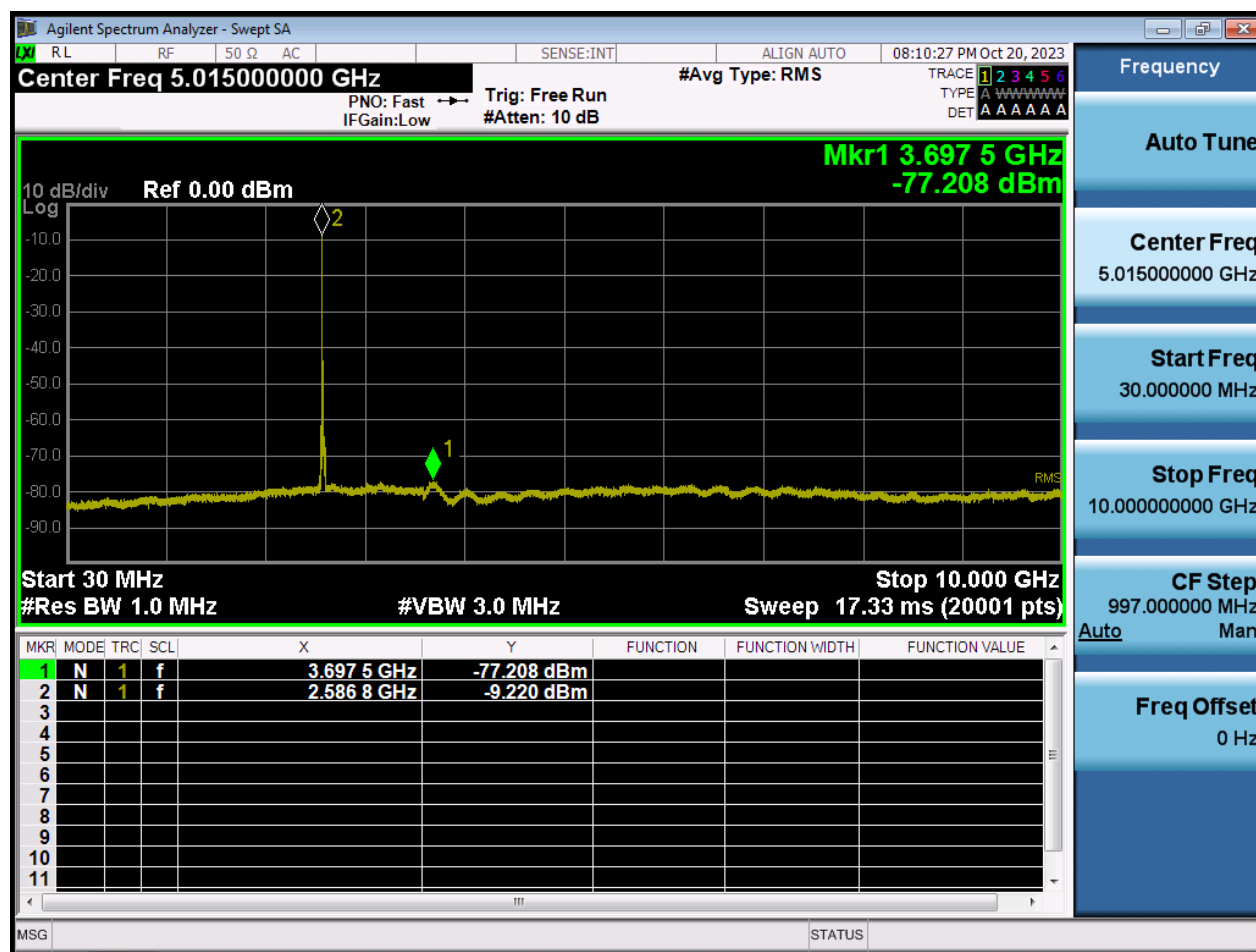


LTE41\_15 M\_CSE(30 M-10 G)\_Highest Channel

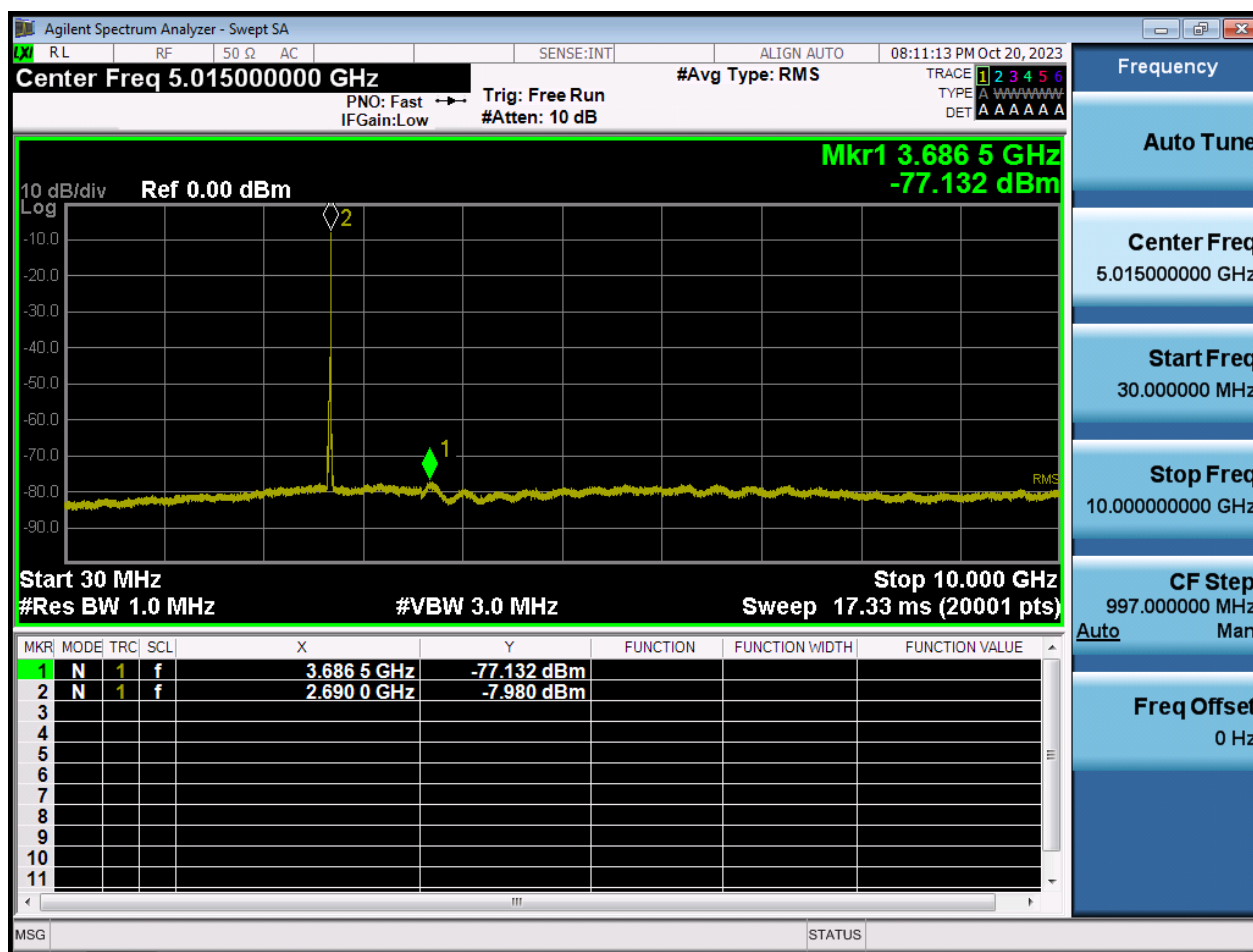


LTE41\_20 M\_CSE(30 M-10 G)\_Lowest Channel

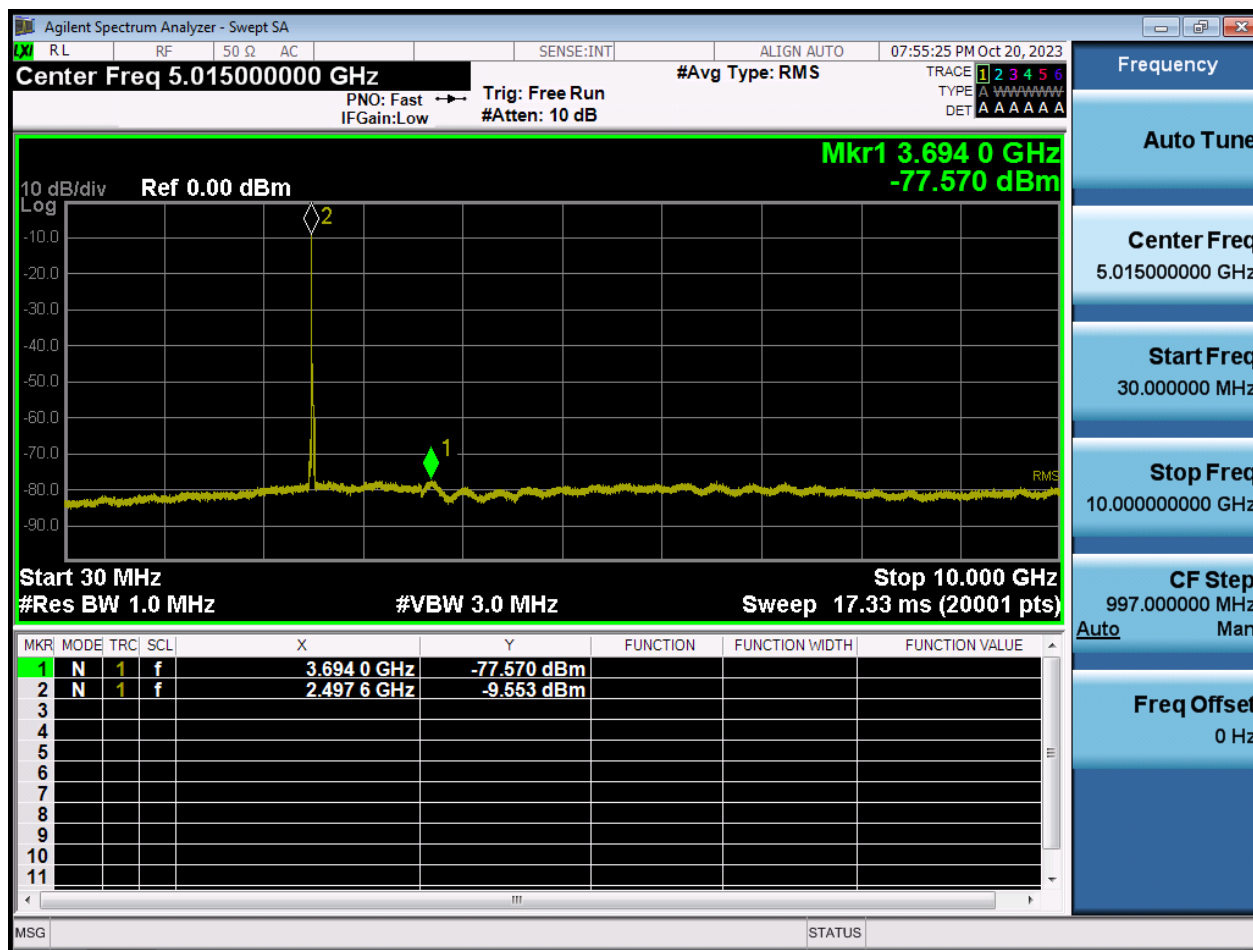

LTE41\_20 M\_CSE(30 M-10 G)\_Mid Channel

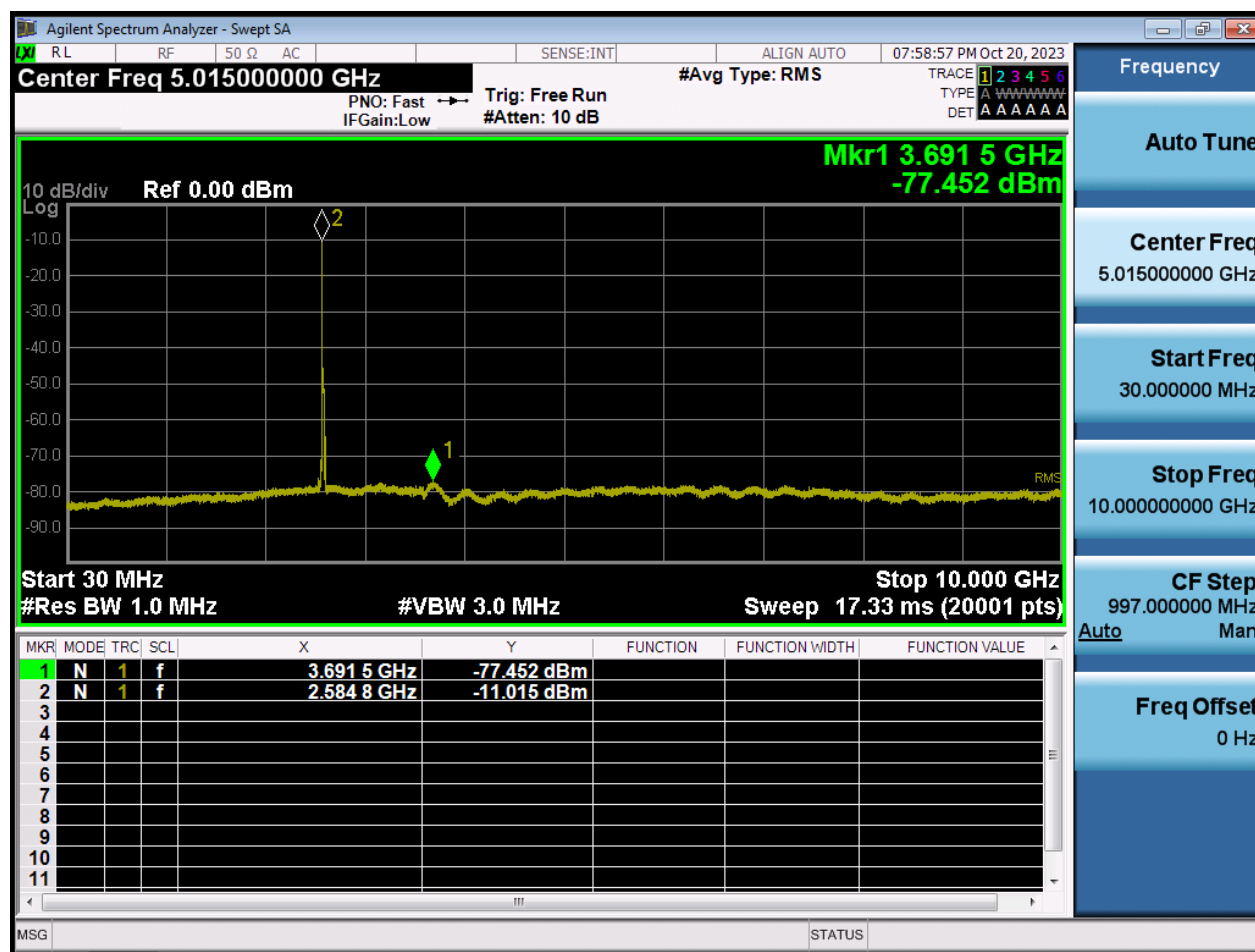

LTE41\_20 M\_CSE(30 M-10 G)\_Highest Channel

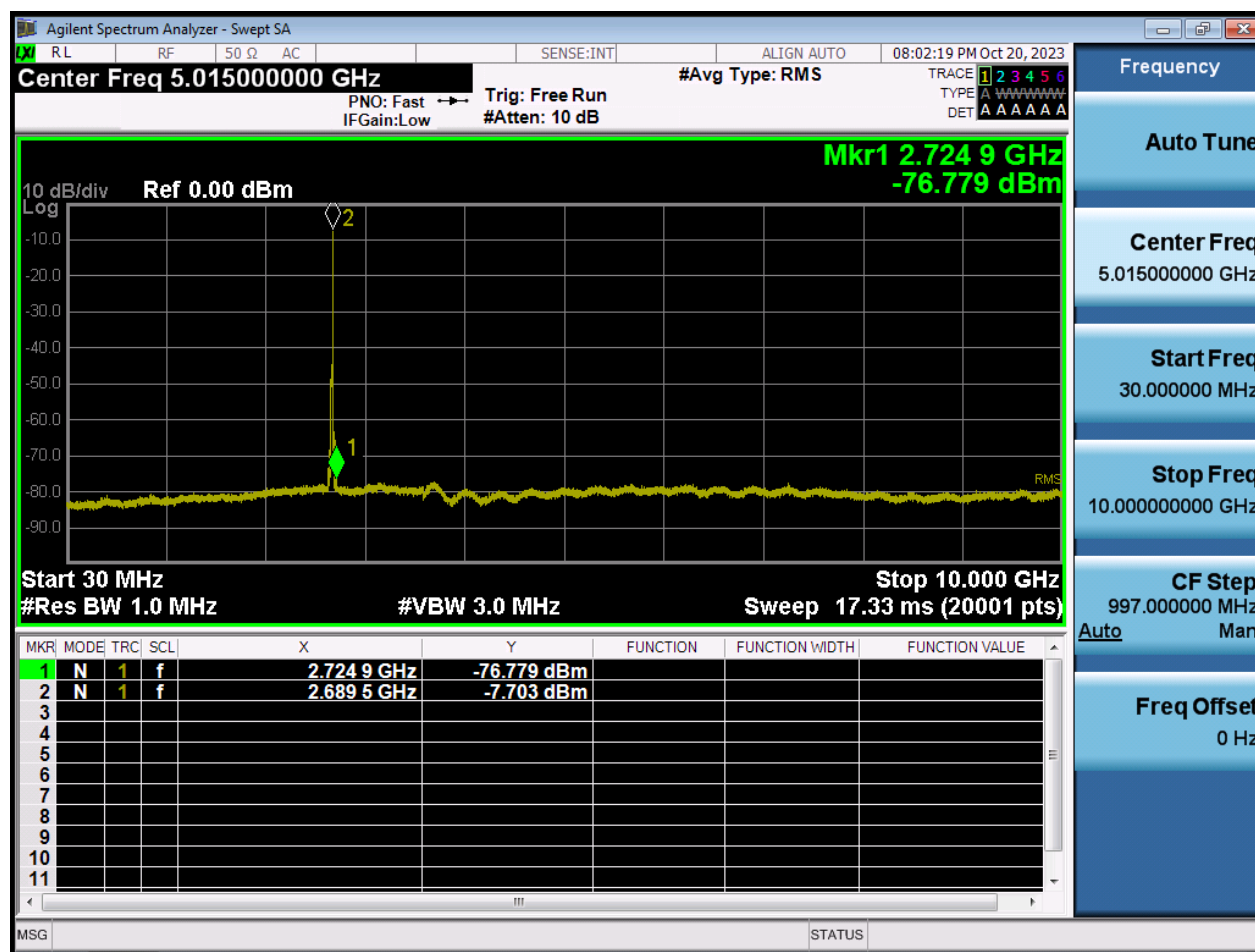

LTE41\_5 M\_CSE(Above10 G)\_Lowest Channel



LTE41\_5 M\_CSE(Above10 G)\_Mid Channel



LTE41\_5 M\_CSE(Above10 G)\_Highest Channel



LTE41\_10 M\_CSE(Above10 G)\_Lowest Channel



LTE41\_10 M\_CSE(Above10 G)\_Mid Channel



LTE41\_10 M\_CSE(Above10 G)\_Highest Channel



LTE41\_15 M\_CSE(Above10 G)\_Lowest Channel



LTE41\_15 M\_CSE(Above10 G)\_Mid Channel



LTE41\_15 M\_CSE(Above10 G)\_Highest Channel



LTE41\_20 M\_CSE(Above10 G)\_Lowest Channel



LTE41\_20 M\_CSE(Above10 G)\_Mid Channel



LTE41\_20 M\_CSE(Above10 G)\_Highest Channel



## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2311-FC009-P |