
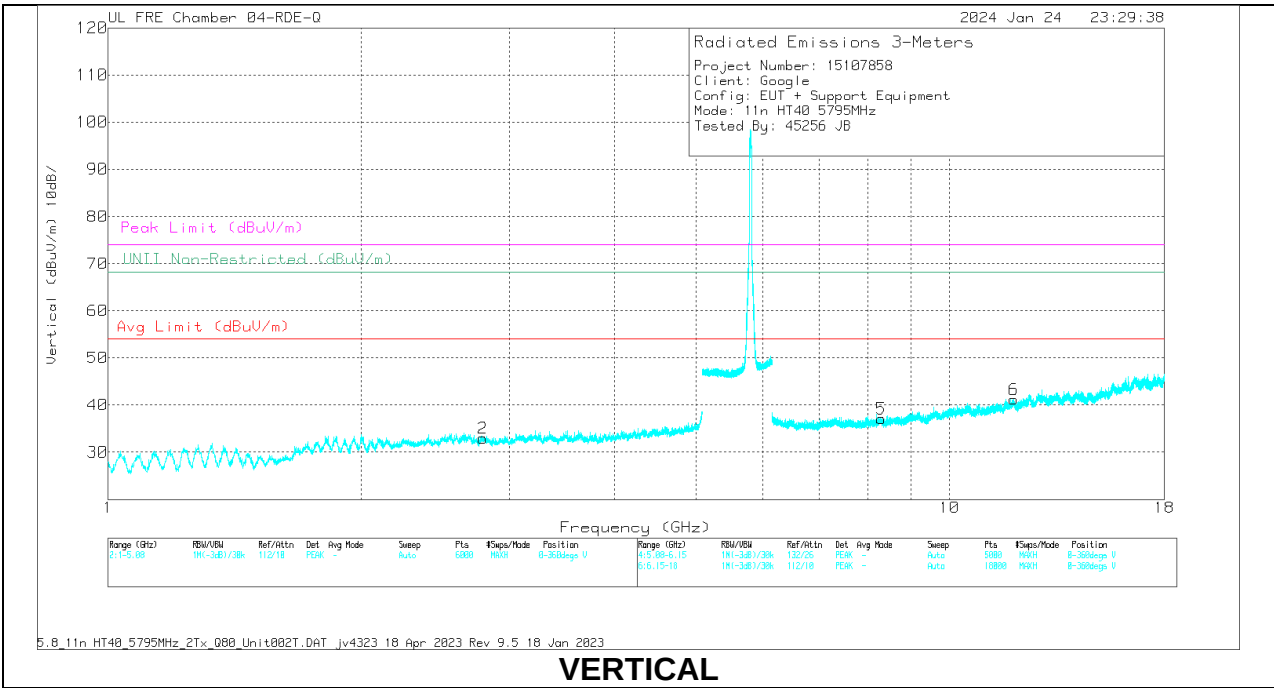


HIGH CHANNEL RESULTS

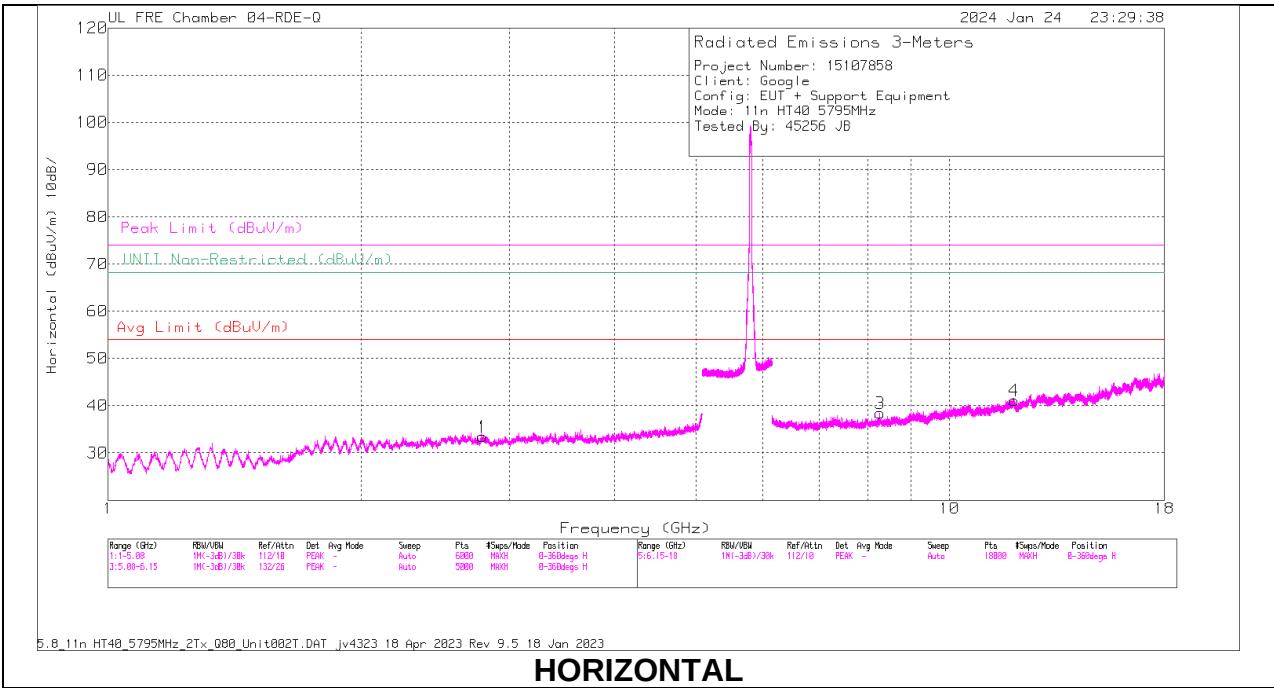

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.786459	58.57	PK-U	32.3	0	-47.43	43.44	-	-	74	-30.56	-	-	242	321	H
1	* ** 2.786177	47.15	ADR	32.3	0	-47.42	32.03	54	-21.97	-	-	-	-	242	321	H
2	* ** 2.788808	58.7	PK-U	32.3	0	-47.39	43.61	-	-	74	-30.39	-	-	20	196	V
2	* ** 2.787929	46.99	ADR	32.3	0	-47.44	31.85	54	-22.15	-	-	-	-	20	196	V
3	* ** 8.262061	55.6	PK-U	35.9	0	-44.1	47.4	-	-	74	-26.6	-	-	2	276	H
3	* ** 8.263341	44.14	ADR	35.9	0	-44.14	35.9	54	-18.1	-	-	-	-	2	276	H
4	* ** 11.934566	55.27	PK-U	38.8	0	-42.89	51.18	-	-	74	-22.82	-	-	358	193	H
4	* ** 11.936073	43.6	ADR	38.8	0	-42.93	39.47	54	-14.53	-	-	-	-	358	193	H
5	* ** 8.295736	55.89	PK-U	35.9	0	-44.43	47.36	-	-	74	-26.64	-	-	358	200	V
5	* ** 8.295467	44.27	ADR	35.9	0	-44.42	35.75	54	-18.25	-	-	-	-	358	200	V
6	* ** 11.914627	55.41	PK-U	38.8	0	-42.89	51.32	-	-	74	-22.68	-	-	358	200	V
6	* ** 11.917434	43.6	ADR	38.8	0	-42.85	39.55	54	-14.45	-	-	-	-	358	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.30. 802.11be EHT40 484T MODE IN THE 5.8 GHZ BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

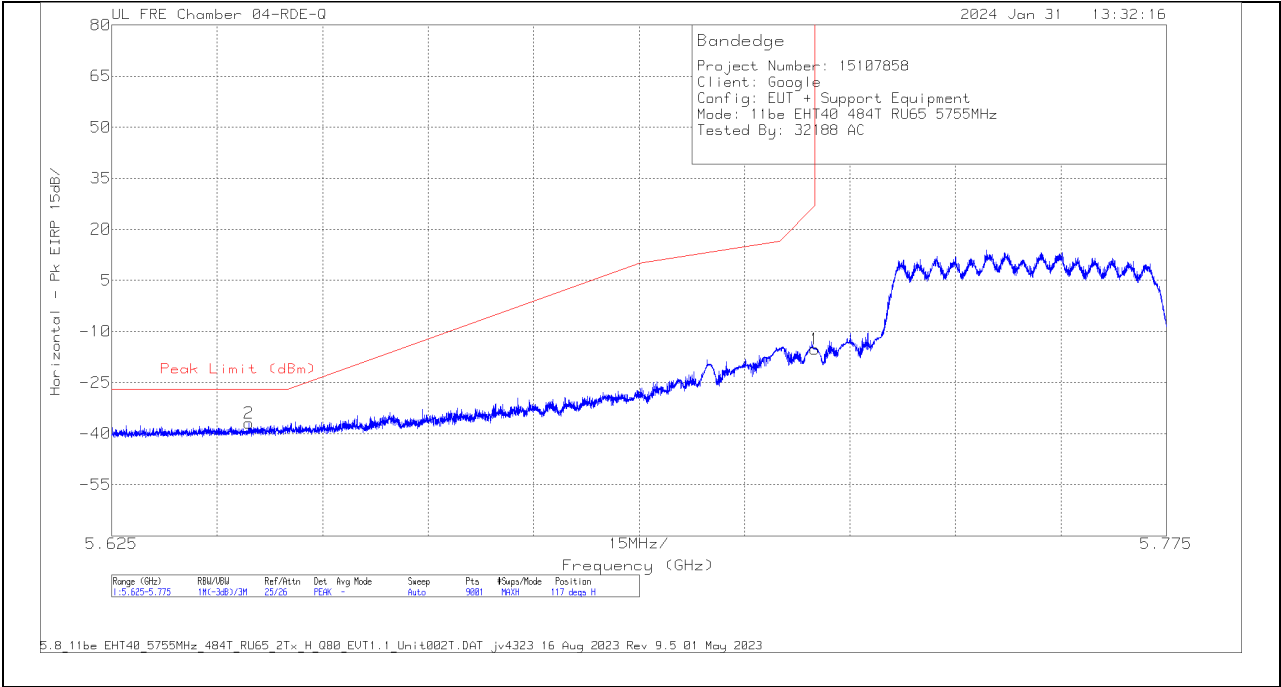


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
2	5.644484	-47.33	Pk	34.7	11.8	-36.17	-37	-27	-10	117	322	H
1	5.725	-25.69	Pk	34.9	11.8	-36.16	-15.15	27	-42.15	117	322	H

Pk - Peak detector

VERTICAL RESULT

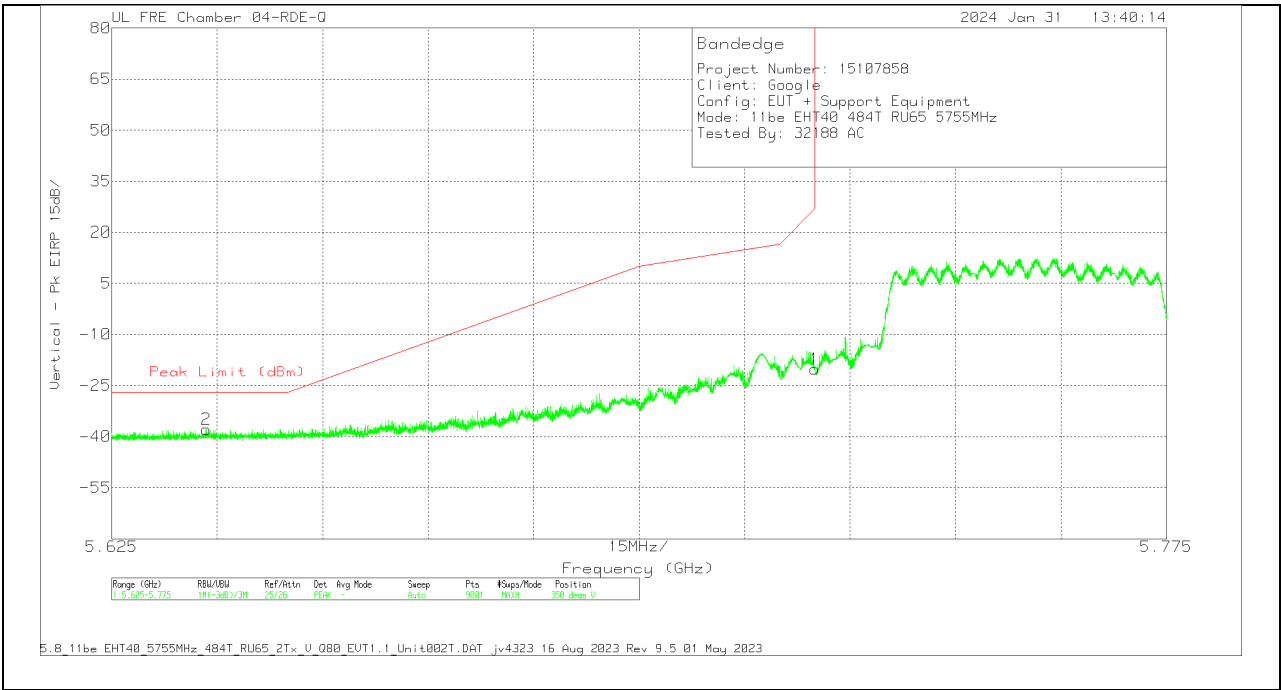


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84796 ACF (dB/m)	Conversion Factor (dB)	Gain/Loss (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.638484	-48.12	Pk	34.7	11.8	-36.16	-37.78	-27	-10.78	350	321	V
1	5.725	-30.79	Pk	34.9	11.8	-36.16	-20.25	27	-47.25	350	321	V

Pk - Peak detector

BANDEGE (HIGH CHANNEL)

HORIZONTAL RESULT

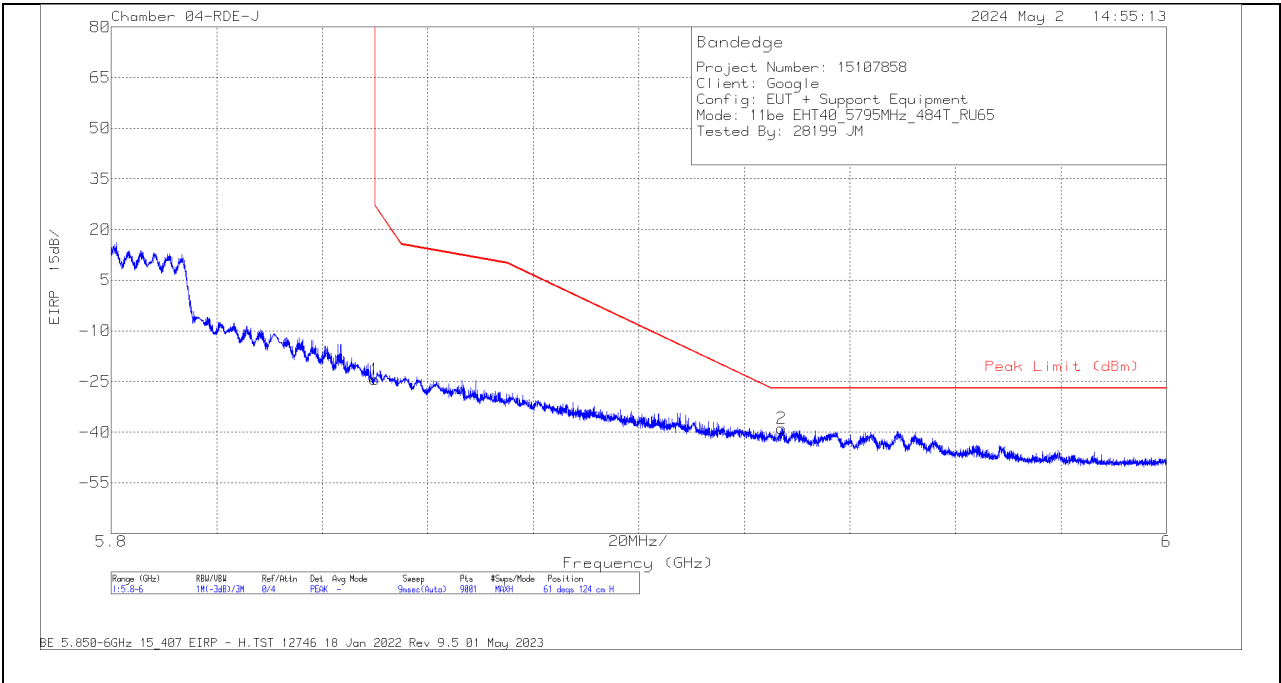


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-47.92	Pk	34.8	-23	11.8	-24.32	27	-51.32	61	124	H
2	5.927065	-62.78	Pk	35	-22.9	11.8	-38.88	-27	-11.88	61	124	H

Pk - Peak detector

VERTICAL RESULT

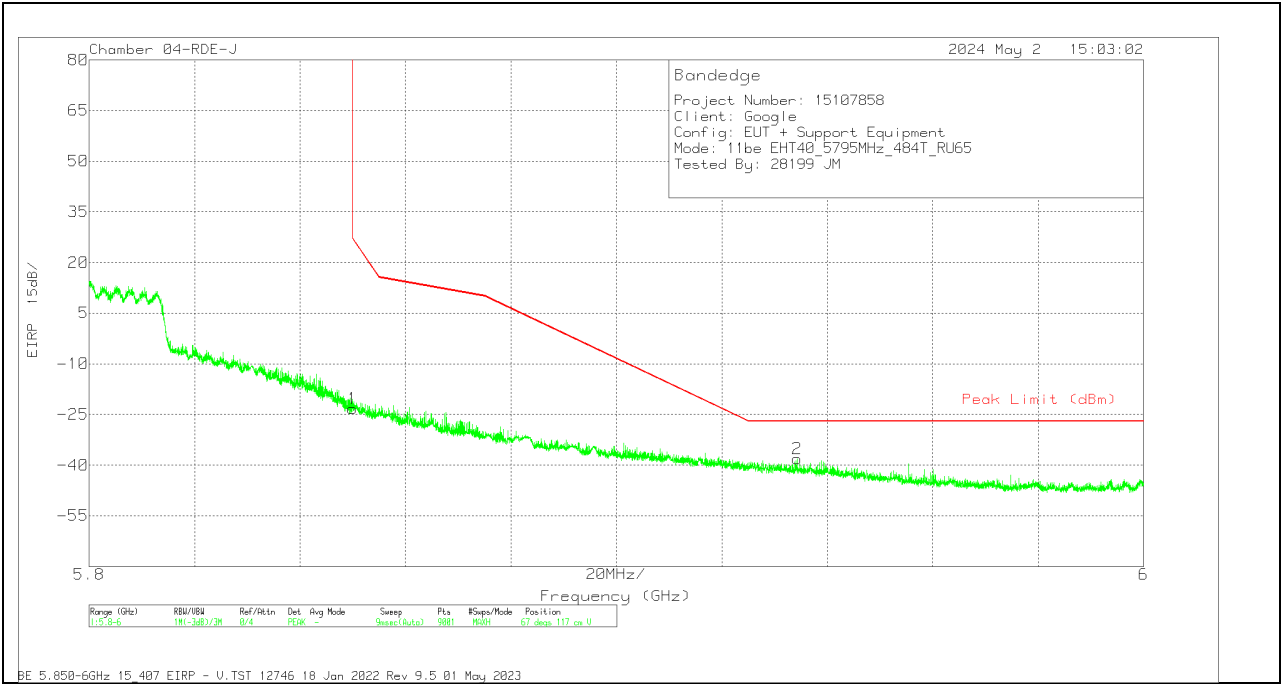



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-46.89	Pk	34.8	-23	11.8	-23.29	27	-50.29	67	117	V
2	5.934288	-62.07	Pk	35	-22.8	11.8	-38.07	-27	-11.07	67	117	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

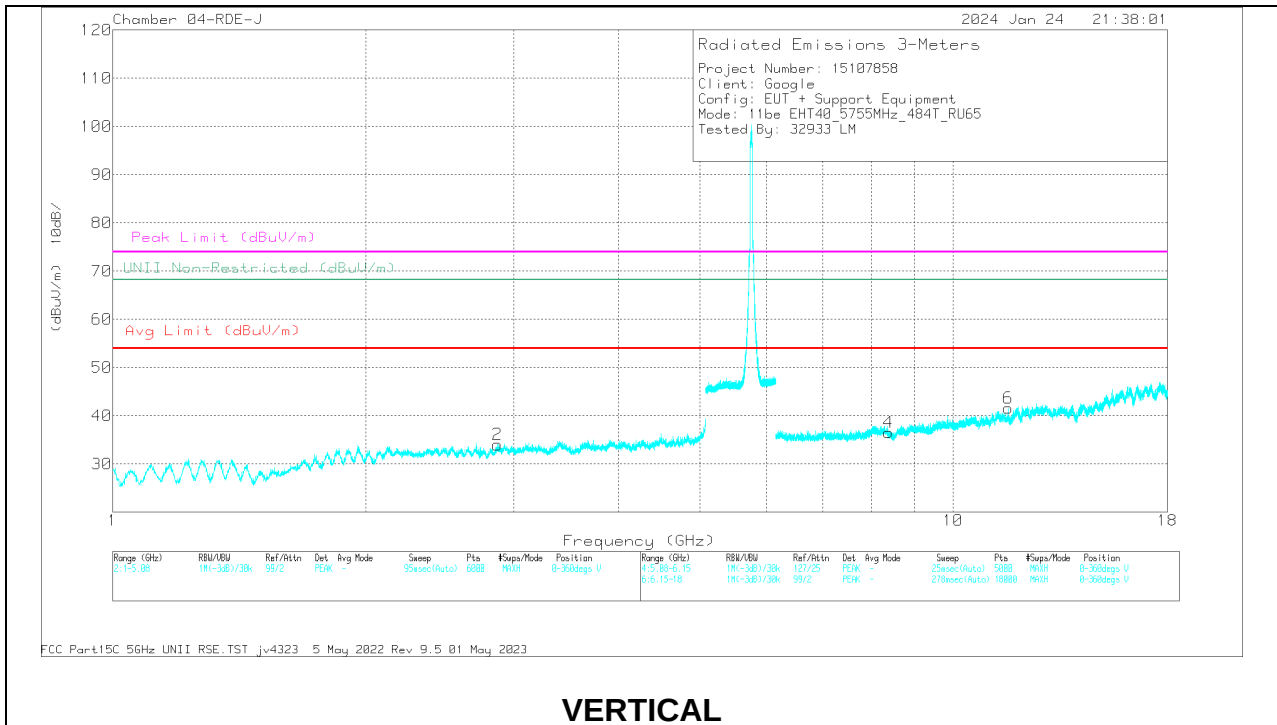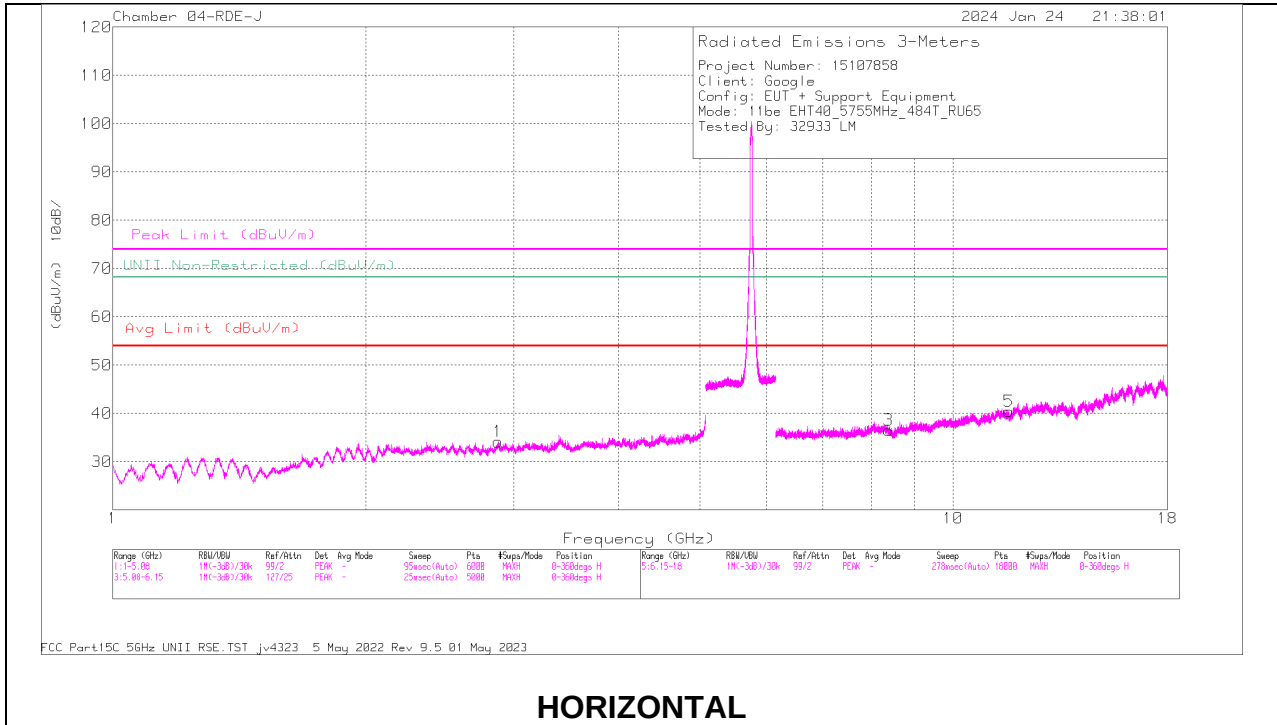

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.874706	57.81	PK-U	32.5	-46.3	0	44.01	-	-	74	-29.99	-	-	95	191	H
	* ** 2.871564	46.01	ADR	32.5	-46.2	.28	32.59	54	-21.41	-	-	-	-	95	191	H
2	* ** 2.874116	57.88	PK-U	32.5	-46.2	0	43.88	-	-	74	-30.02	-	-	350	102	V
	* ** 2.873701	45.95	ADR	32.5	-46.2	.28	32.53	54	-21.47	-	-	-	-	350	102	V
3	* ** 8.379694	52.42	PK-U	35.8	-40.8	0	47.42	-	-	74	-26.58	-	-	324	101	H
	* ** 8.381622	40.8	ADR	35.8	-40.8	.28	36.08	54	-17.92	-	-	-	-	324	101	H
4	* ** 8.383888	52.9	PK-U	35.8	-40.8	0	47.9	-	-	74	-26.1	-	-	261	171	V
	* ** 8.383444	40.85	ADR	35.8	-40.7	.28	36.23	54	-17.77	-	-	-	-	261	171	V
5	* ** 11.648447	52.41	PK-U	38.4	-40.1	0	50.71	-	-	74	-23.29	-	-	105	134	H
	* ** 11.647094	40.85	ADR	38.4	-40.1	.28	39.43	54	-14.57	-	-	-	-	105	134	H
6	* ** 11.640501	52.01	PK-U	38.4	-40	0	50.41	-	-	74	-23.59	-	-	228	169	V
	* ** 11.639357	40.74	ADR	38.4	-40	.28	39.42	54	-14.58	-	-	-	-	228	169	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

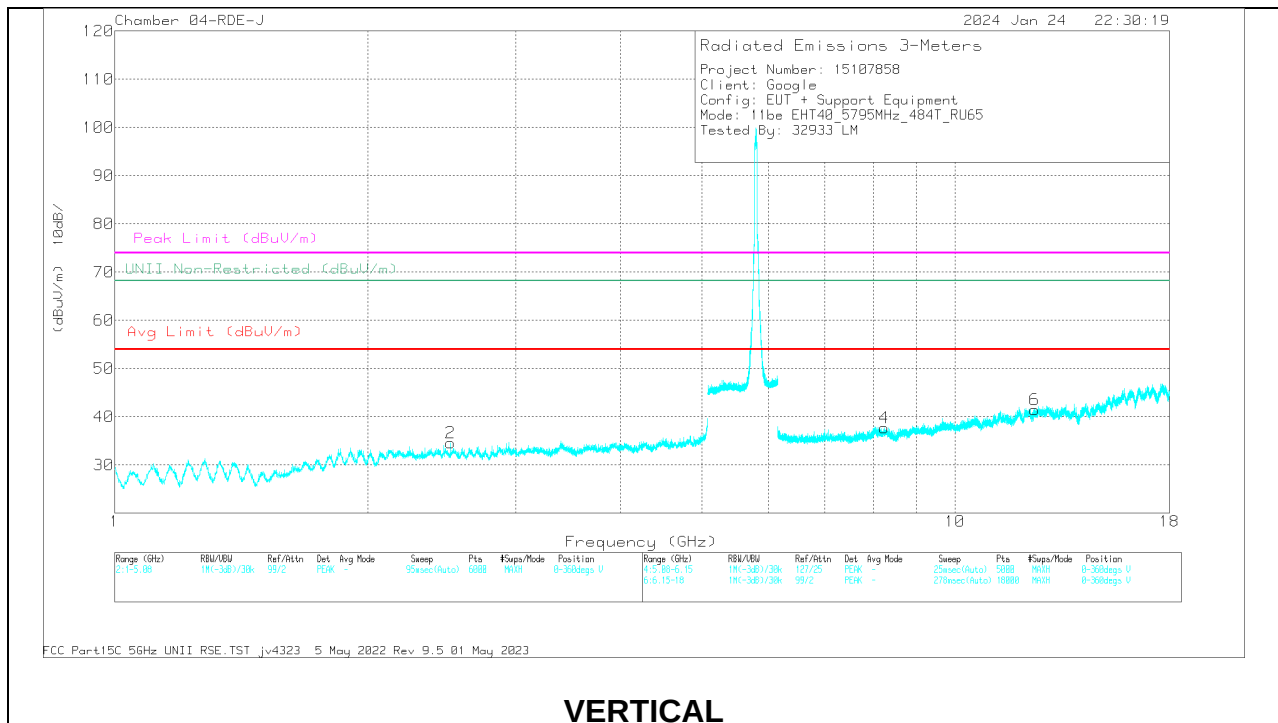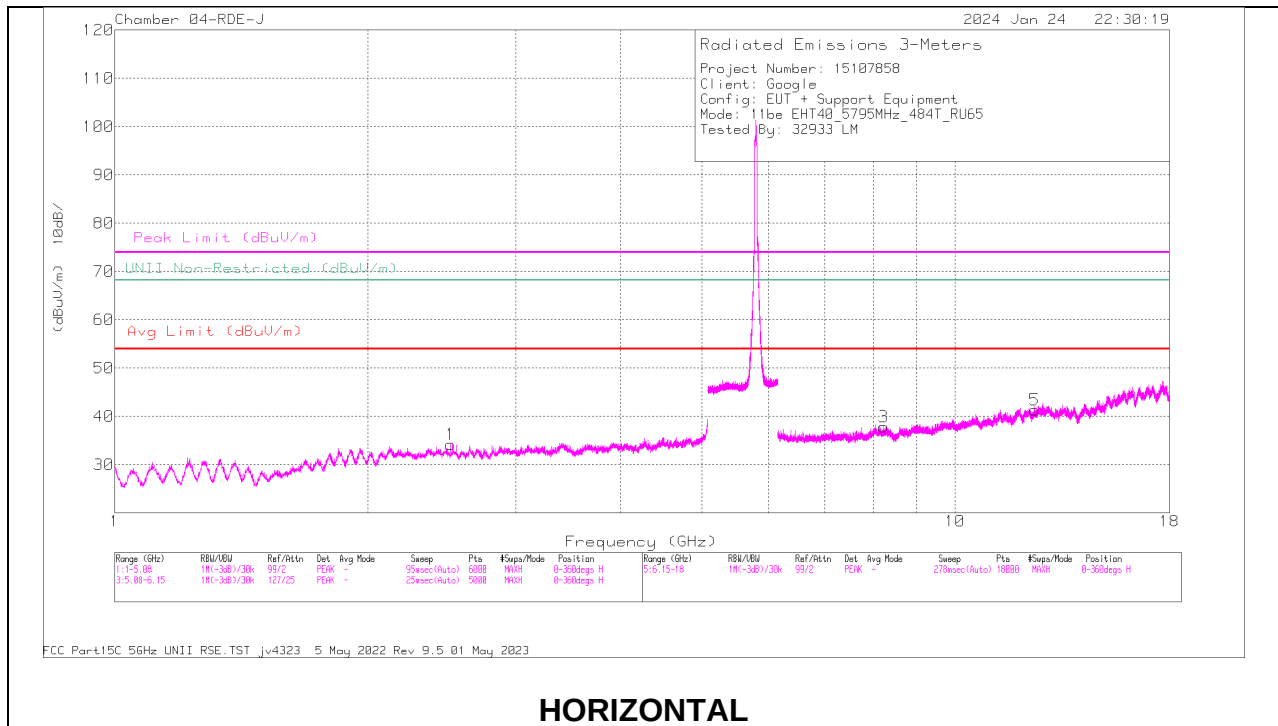

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	** 2.506926	57.15	PK-U	32.3	-46.2	0	43.25	-	-	-	-	68.2	-24.95	96	381	H
	** 2.50811	44.95	ADR	32.3	-46.3	.28	31.23	-	-	-	-	-	-	96	381	H
2	** 2.511827	56.74	PK-U	32.3	-46.1	0	42.94	-	-	-	-	68.2	-25.26	161	120	V
	** 2.511199	44.91	ADR	32.3	-46.3	.28	31.19	-	-	-	-	-	-	161	120	V
3	*** 8.219804	52.57	PK-U	35.9	-41.2	0	47.27	-	-	74	-26.73	-	-	283	326	H
	*** 8.217933	41.28	ADR	35.9	-41.1	.28	36.36	54	-17.64	-	-	-	-	283	326	H
4	*** 8.244021	53.1	PK-U	35.9	-41.1	0	48	-	-	74	-26	-	-	35	171	V
	*** 8.244604	41.16	ADR	35.8	-41.1	.28	36.14	54	-17.86	-	-	-	-	35	171	V
5	*** 12.444374	52.09	PK-U	38.9	-39.7	0	51.29	-	-	74	-22.71	-	-	44	121	H
	*** 12.441906	40.39	ADR	38.9	-39.8	.28	39.77	54	-14.23	-	-	-	-	44	121	H
6	*** 12.452377	52.98	PK-U	38.9	-39.8	0	52.08	-	-	74	-21.92	-	-	190	390	V
	*** 12.449989	40.53	ADR	38.9	-39.8	.28	39.91	54	-14.09	-	-	-	-	190	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.31. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

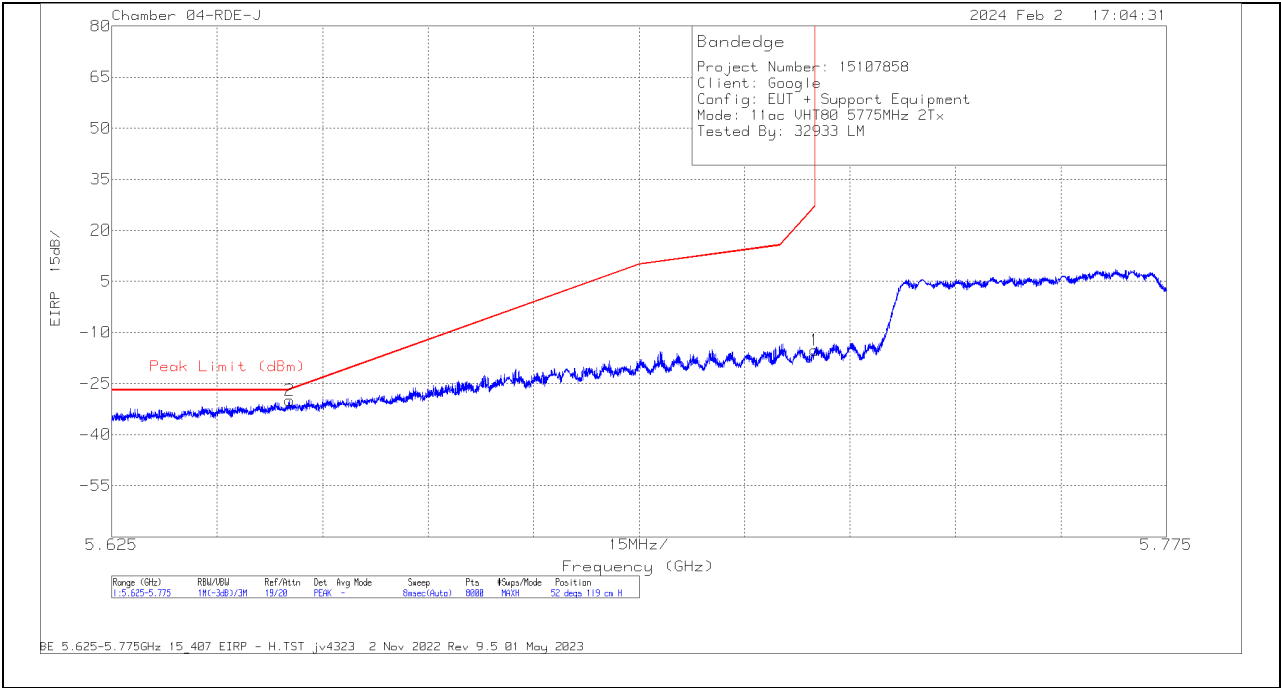


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.650278	-42.21	PK	34.6	-34.2	11.8	-30.01	-26.79	-3.22	52	119	H
1	5.725	-27.66	PK	34.7	-34	11.8	-15.16	27	-42.16	52	119	H

PK - Peak detector

VERTICAL RESULT

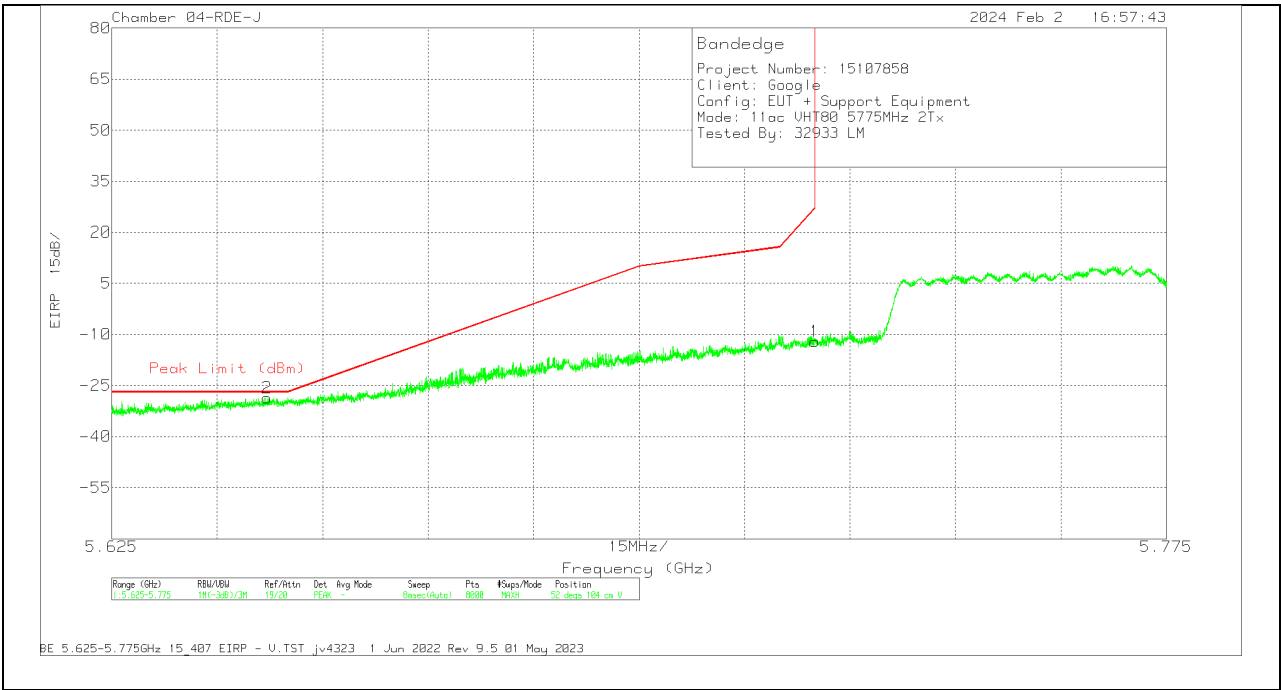


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647071	-40.77	Pk	34.6	-34.2	11.8	-28.57	-27	-1.57	52	104	V
1	5.725	-24.6	Pk	34.7	-34	11.8	-12.1	27	-39.1	52	104	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

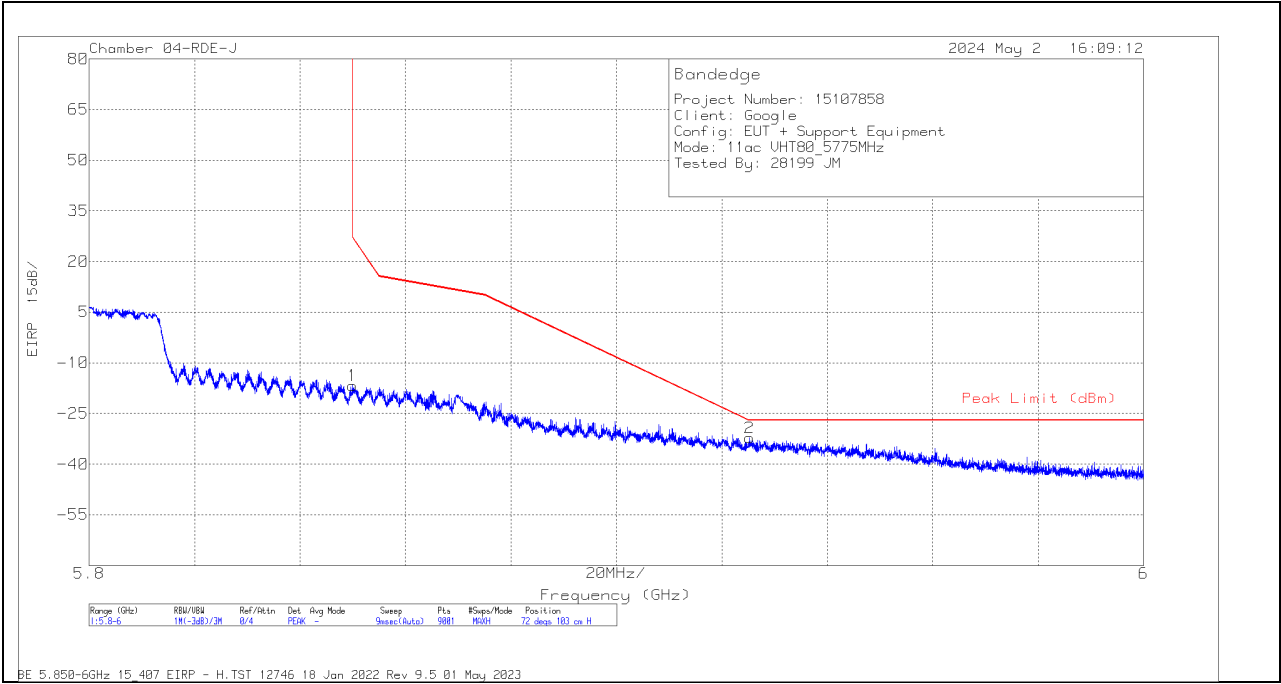


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.31	Pk	34.8	-23	11.8	-16.71	27	-43.71	72	103	H
2	5.925265	-56.15	Pk	35	-22.9	11.8	-32.25	-27	-5.25	72	103	H

Pk - Peak detector

VERTICAL RESULT

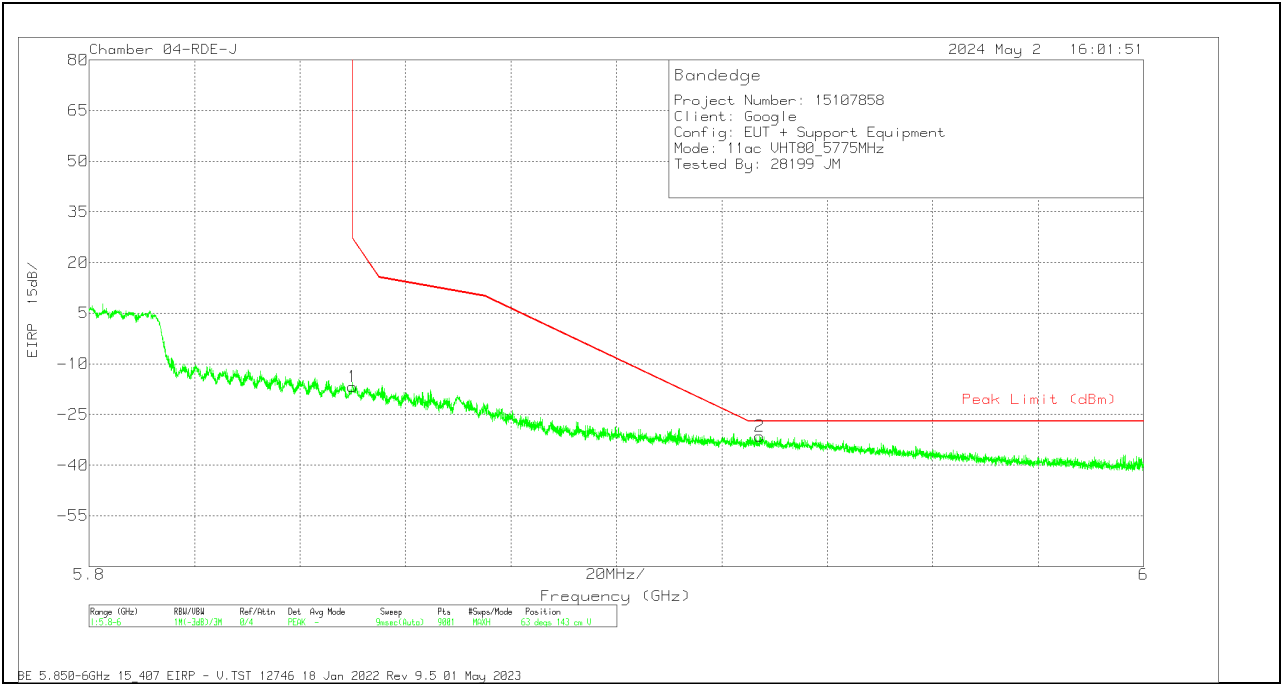



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-40.35	Pk	34.8	-23	11.8	-16.75	27	-43.75	63	143	V
2	5.927154	-55.37	Pk	35	-22.9	11.8	-31.47	-27	-4.47	63	143	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

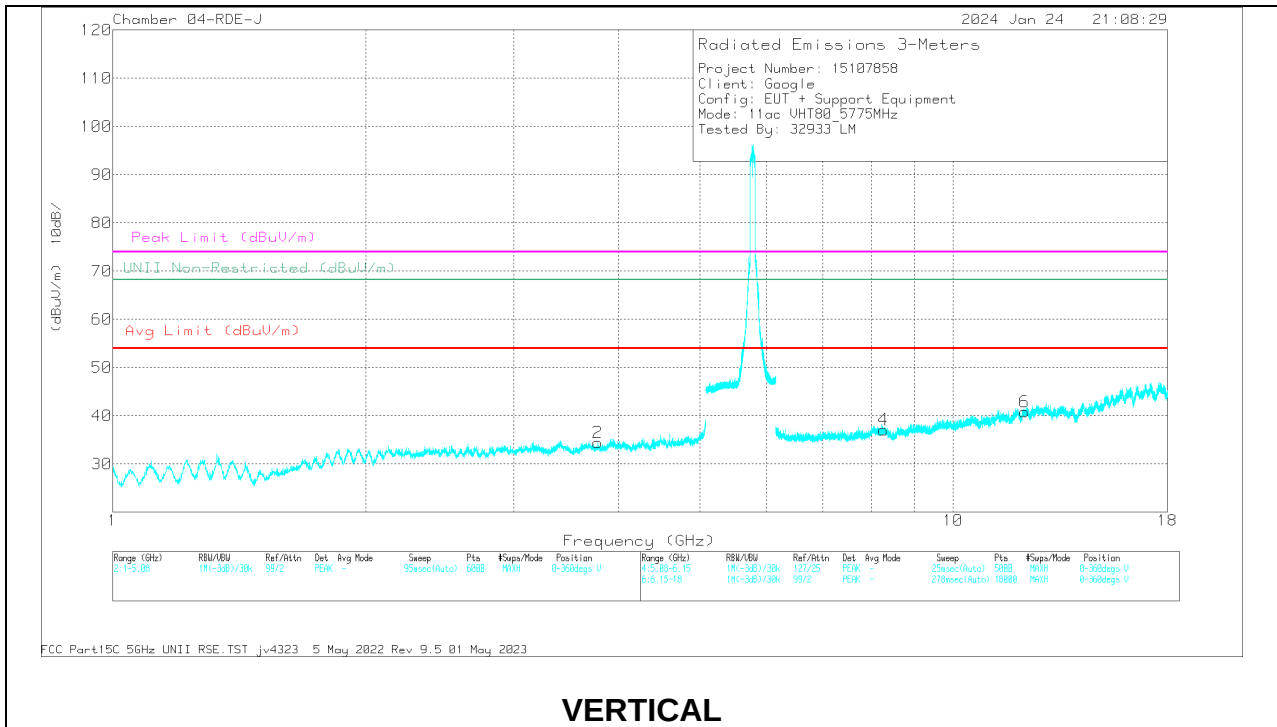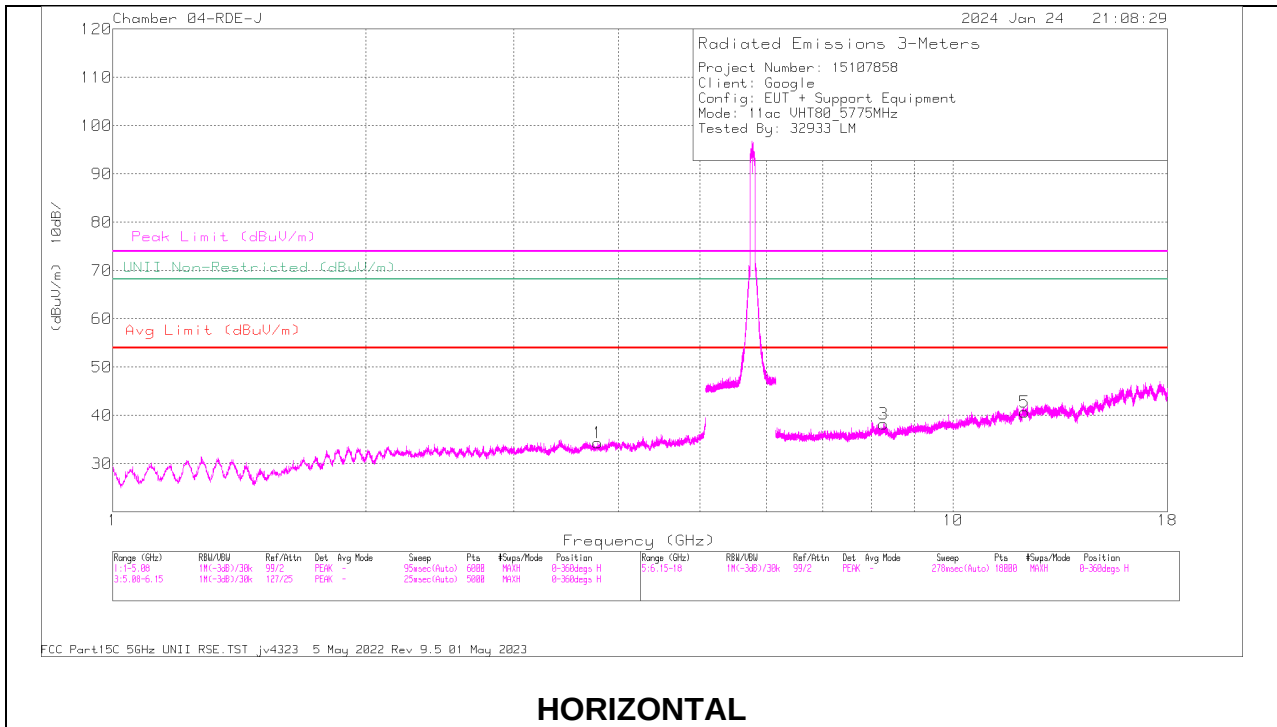

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.779666	55.15	PK-U	33.3	-44.2	0	44.25	-	-	74	-29.75	-	-	201	180	H
	* ** 3.780624	43.22	ADR	33.3	-44.2	.1	32.42	54	-21.58	-	-	-	-	201	180	H
2	* ** 3.778137	56.54	PK-U	33.3	-44.1	0	45.84	-	-	74	-28.16	-	-	345	233	V
	* ** 3.778292	43.13	ADR	33.3	-44.2	.1	32.33	-	-	-	-	-	-	345	233	V
3	* ** 8.266862	52.79	PK-U	35.8	-40.9	0	47.69	-	-	74	-26.31	-	-	17	123	H
	* ** 8.26505	41.25	ADR	35.8	-41	.1	36.15	54	-17.85	-	-	-	-	17	123	H
4	* ** 8.268144	52.87	PK-U	35.8	-40.9	0	47.77	-	-	74	-26.23	-	-	138	266	V
	* ** 8.264963	41.45	ADR	35.8	-41	.1	36.35	54	-17.65	-	-	-	-	138	266	V
5	* ** 12.166736	52.8	PK-U	38.8	-40.2	0	51.4	-	-	74	-22.6	-	-	136	191	H
	* ** 12.165445	41.02	ADR	38.8	-40.1	.1	39.82	54	-14.18	-	-	-	-	136	191	H
6	* ** 12.169633	53.07	PK-U	38.8	-40.2	0	51.67	-	-	74	-22.33	-	-	52	380	V
	* ** 12.16678	40.94	ADR	38.8	-40.2	.1	39.64	54	-14.36	-	-	-	-	52	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.32. 802.11be EHT80 996T MODE IN THE 5.8 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

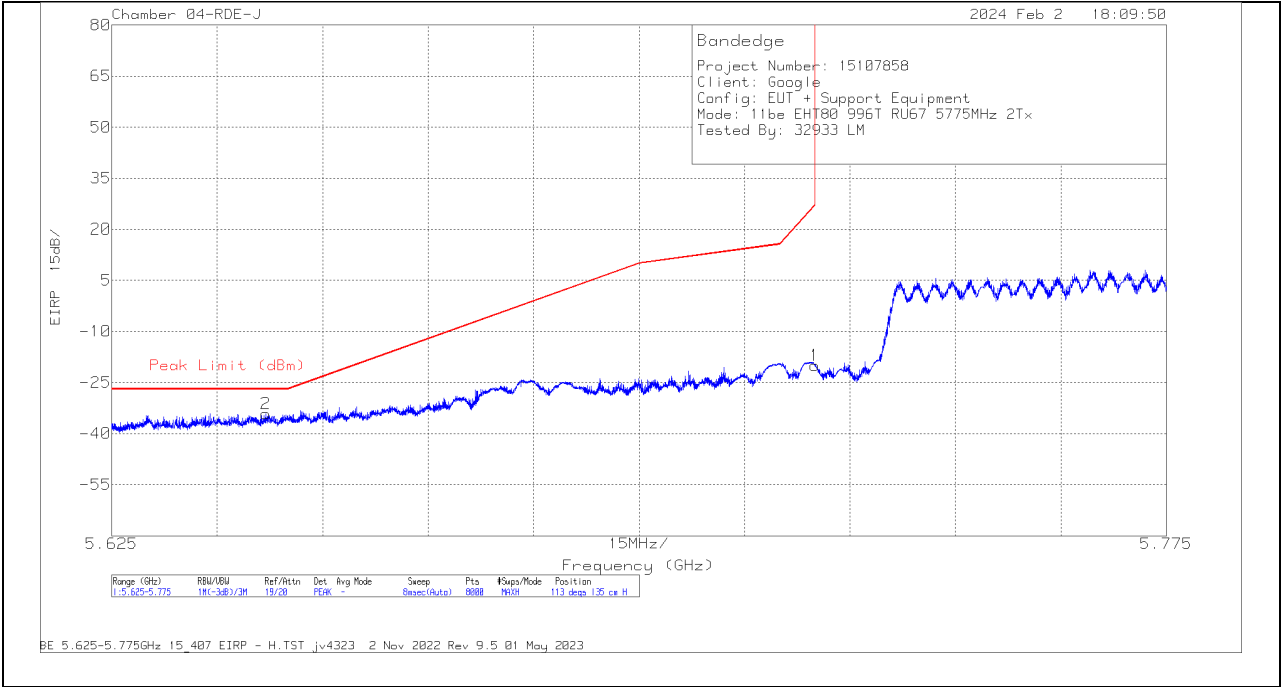


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.646902	-46.38	PK	34.6	-34.2	11.8	-34.18	-27	-7.18	113	135	H
1	5.725	-32.47	PK	34.7	-34	11.8	-19.97	27	-46.97	113	135	H

PK - Peak detector

VERTICAL RESULT

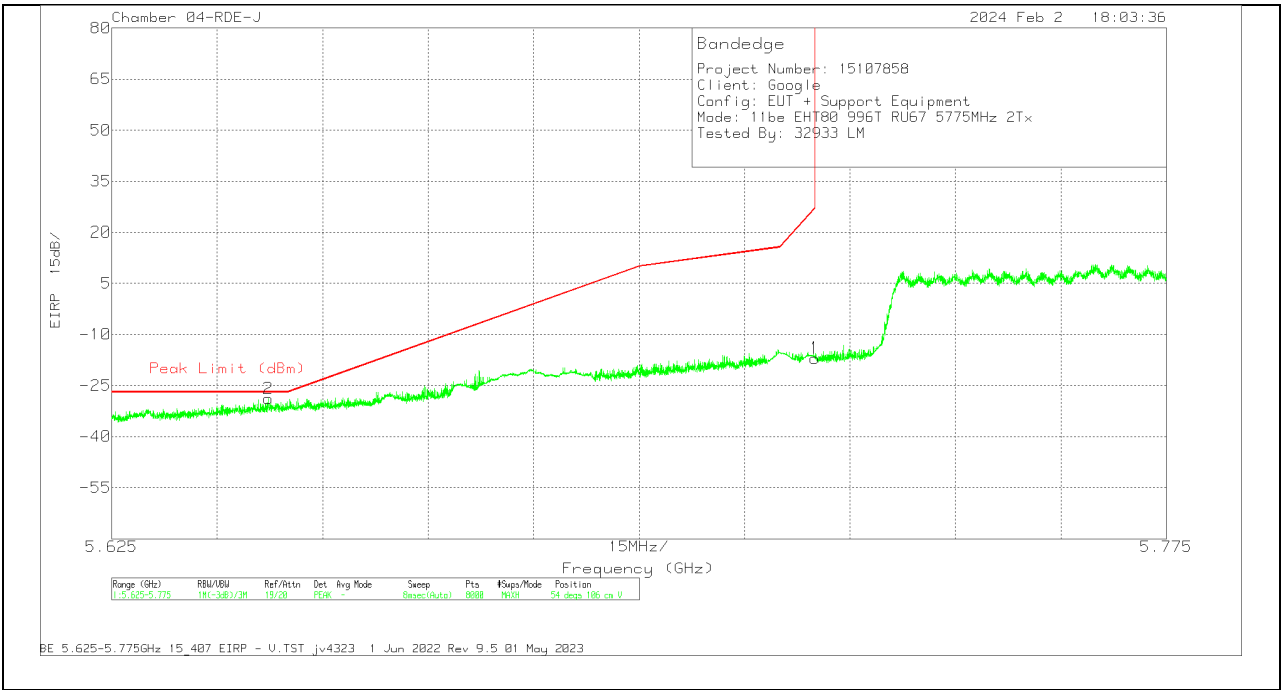


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647277	-41.05	Pk	34.6	-34.2	11.8	-28.85	-27	-1.85	54	106	V
1	5.725	-29.44	Pk	34.7	-34	11.8	-16.94	27	-43.94	54	106	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

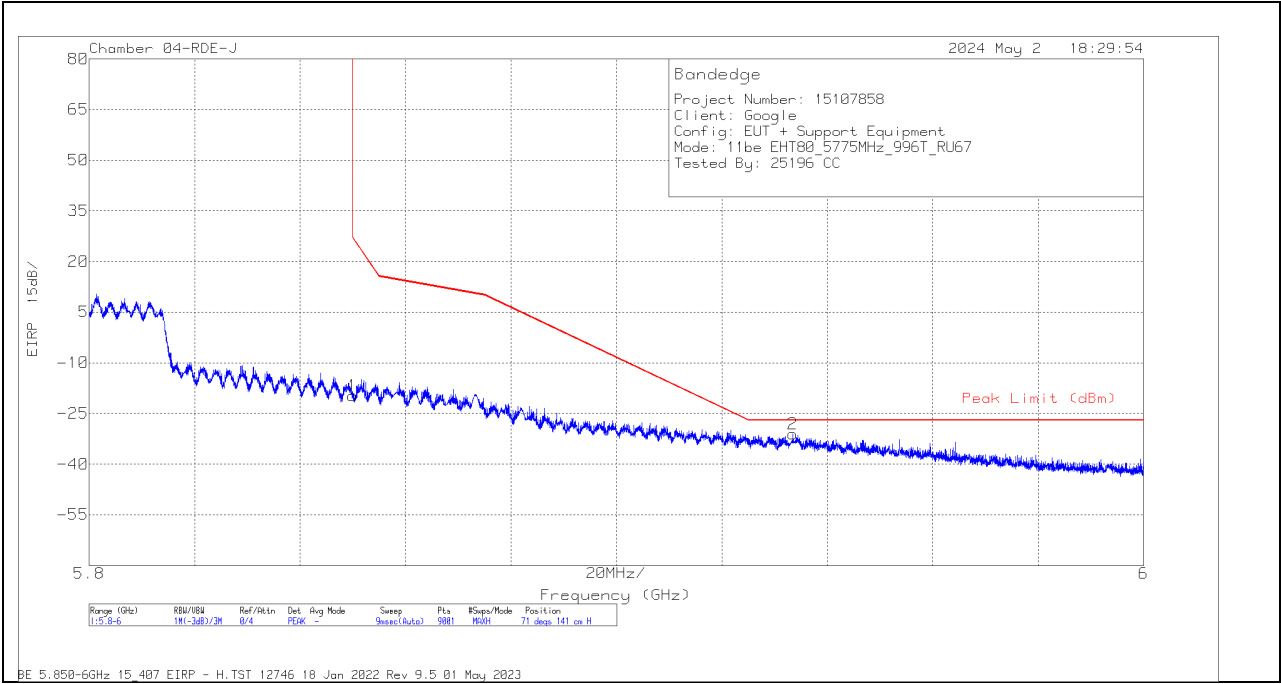


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-43.3	Pk	34.8	-23	11.8	-19.7	27	-46.7	71	141	H
2	5.933532	-55.02	Pk	35	-22.8	11.8	-31.02	-27	-4.02	71	141	H

Pk - Peak detector

VERTICAL RESULT

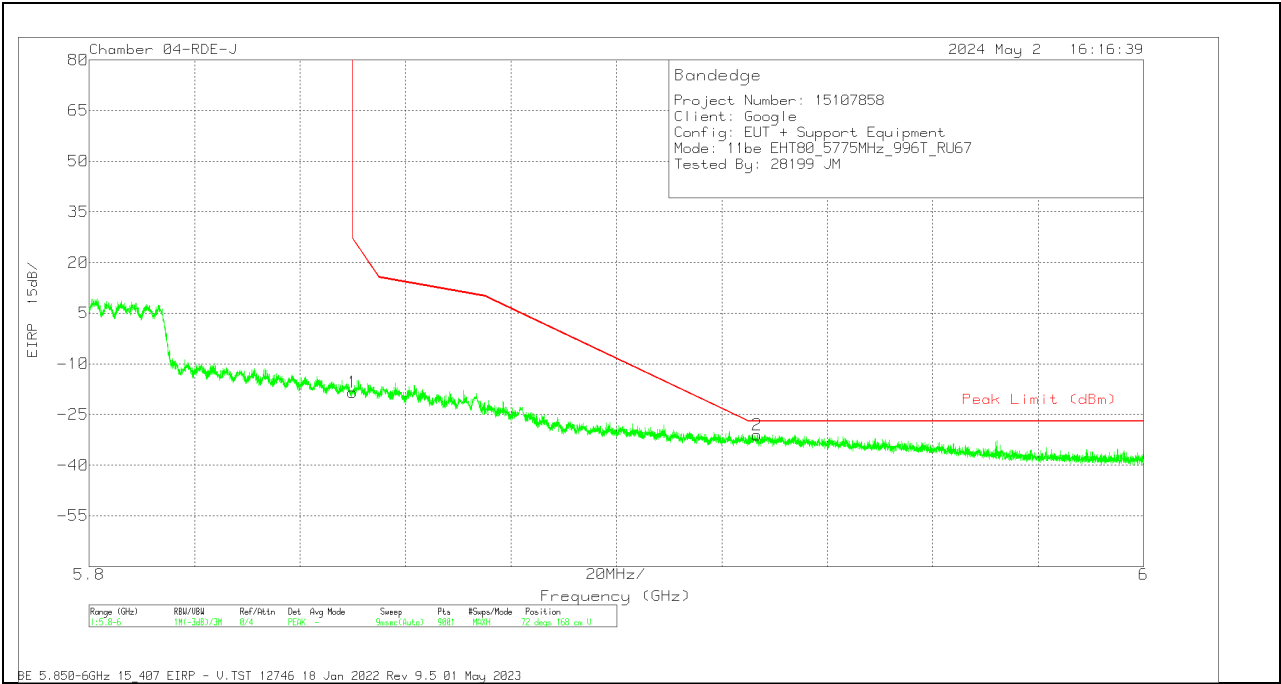



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/CbIs (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-41.97	Pk	34.8	-23	11.8	-18.37	27	-45.37	72	168	V
2	5.926665	-54.88	Pk	35	-22.9	11.8	-30.98	-27	-3.98	72	168	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

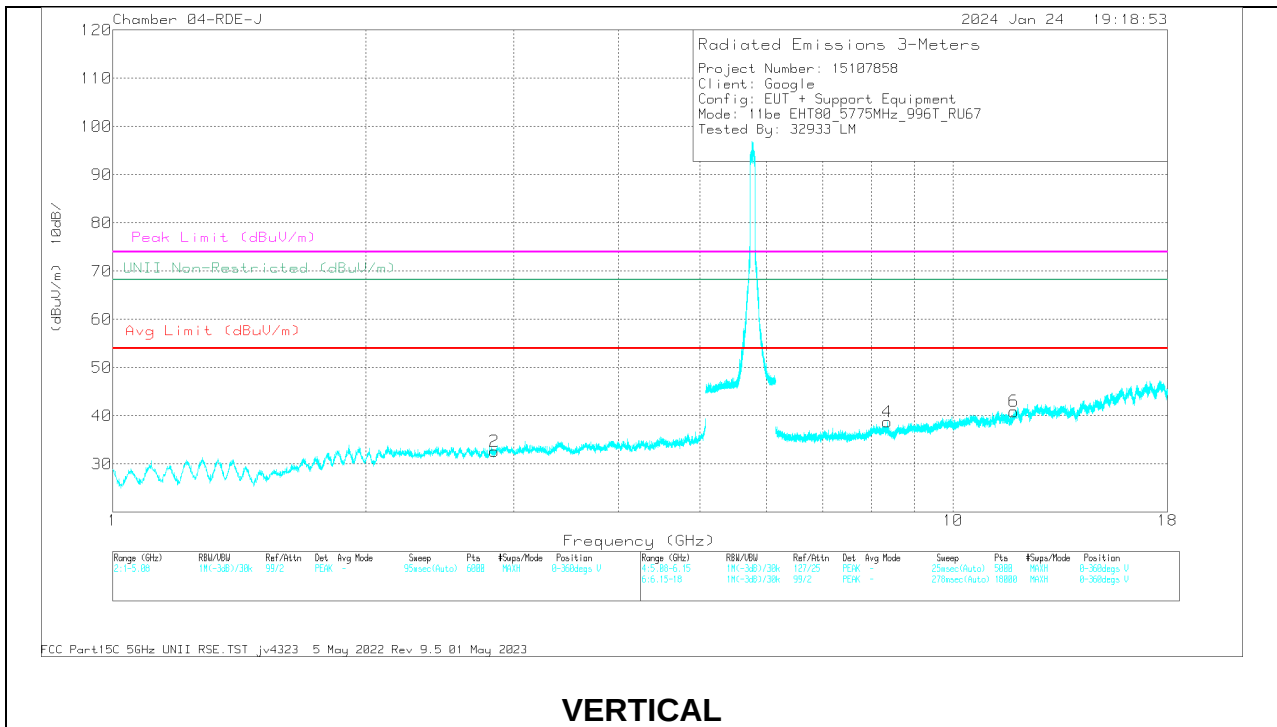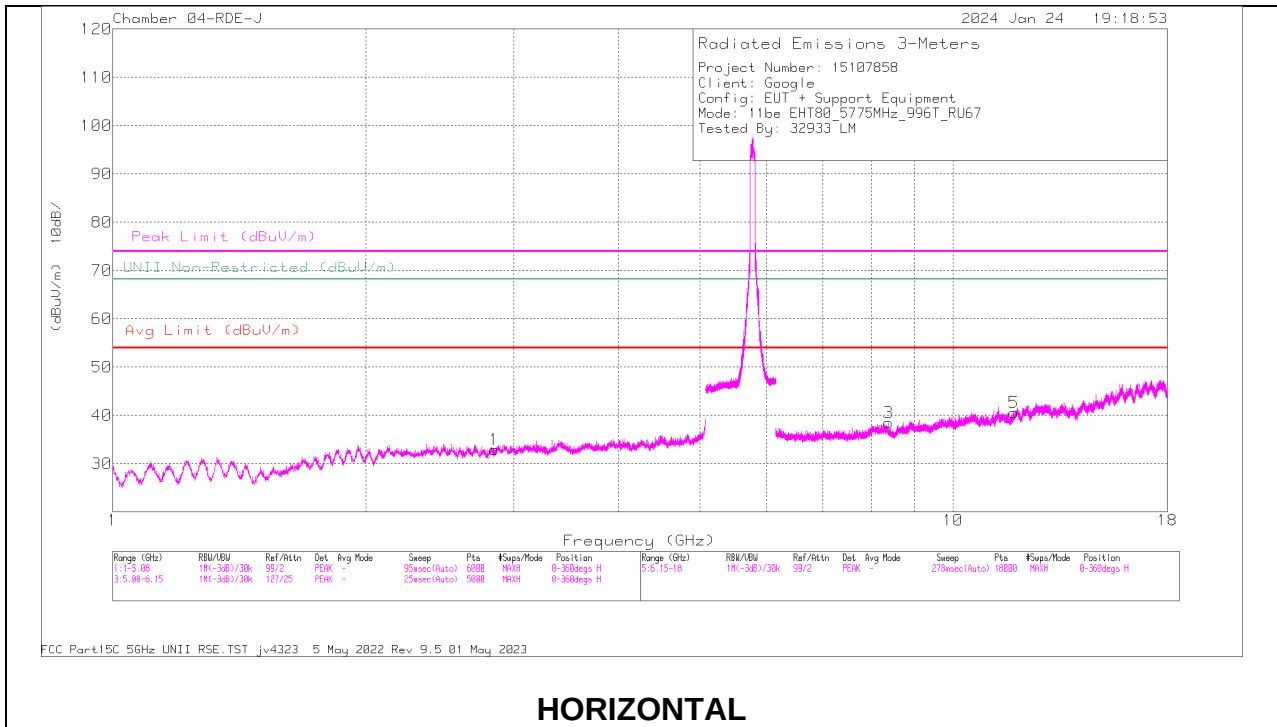

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.847042	57.45	PK-U	32.4	-46.4	0	43.45	-	-	74	-30.55	-	-	264	118	H
	* ** 2.848893	45.2	ADR	32.4	-46.4	.48	31.68	54	-22.32	-	-	-	-	264	118	H
2	* ** 2.847989	57.41	PK-U	32.4	-46.6	0	43.21	-	-	74	-30.79	-	-	143	292	V
	* ** 2.850309	45.14	ADR	32.4	-46.6	.48	31.42	54	-22.58	-	-	-	-	143	292	V
3	* ** 8.377496	52.47	PK-U	35.8	-40.7	0	47.57	-	-	74	-26.43	-	-	325	333	H
	* ** 8.377558	40.89	ADR	35.8	-40.8	.48	36.37	54	-17.63	-	-	-	-	325	333	H
4	* ** 8.356442	52.67	PK-U	35.8	-40.6	0	47.87	-	-	74	-26.13	-	-	21	183	V
	* ** 8.353911	41.25	ADR	35.8	-40.6	.48	36.93	54	-17.07	-	-	-	-	21	183	V
5	* ** 11.820987	52.95	PK-U	38.6	-40.1	0	51.45	-	-	74	-22.55	-	-	29	344	H
	* ** 11.821936	41.29	ADR	38.6	-40.1	.48	40.27	54	-13.73	-	-	-	-	29	344	H
6	* ** 11.820212	52.76	PK-U	38.6	-40.3	0	51.06	-	-	74	-22.94	-	-	340	126	V
	* ** 11.819032	41.71	ADR	38.6	-40.1	.48	40.69	54	-13.31	-	-	-	-	340	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.33. 802.11a MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

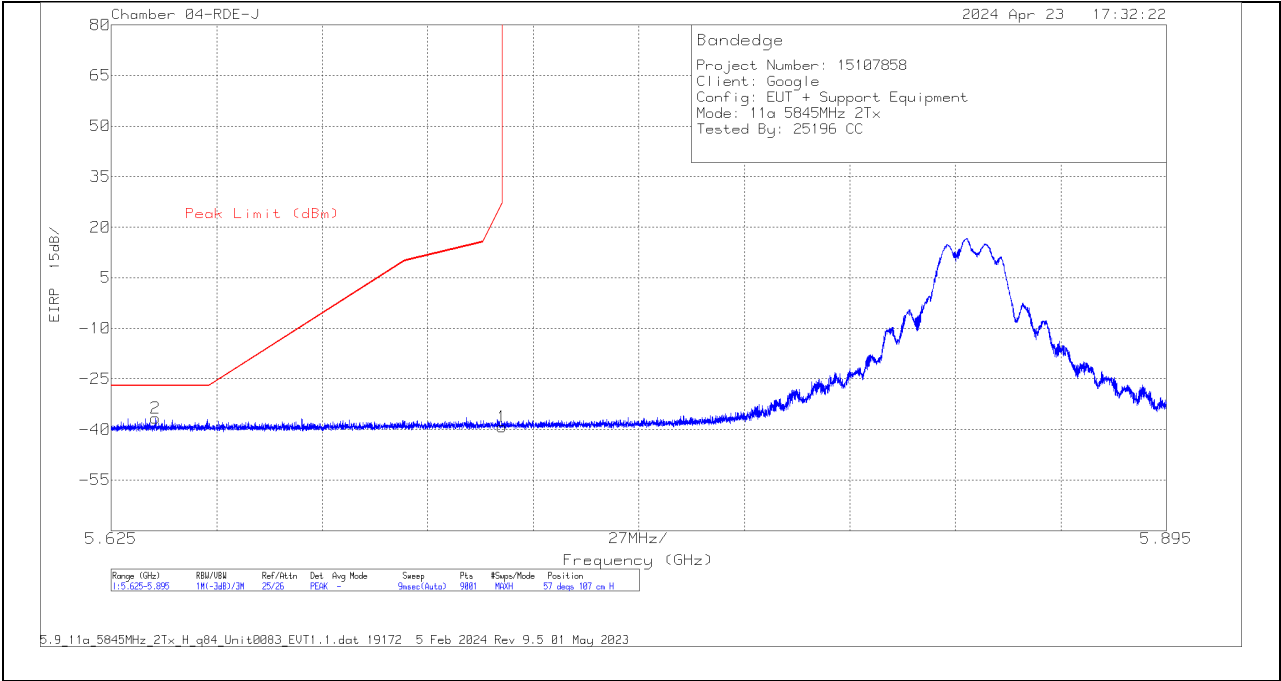


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.6364	-48.97	Pk	34.6	-34	11.8	-36.57	-27	-9.57	57	107	H
1	5.725	-51.98	Pk	34.7	-33.8	11.8	-39.28	27	-66.28	57	107	H

Pk - Peak detector

VERTICAL RESULT

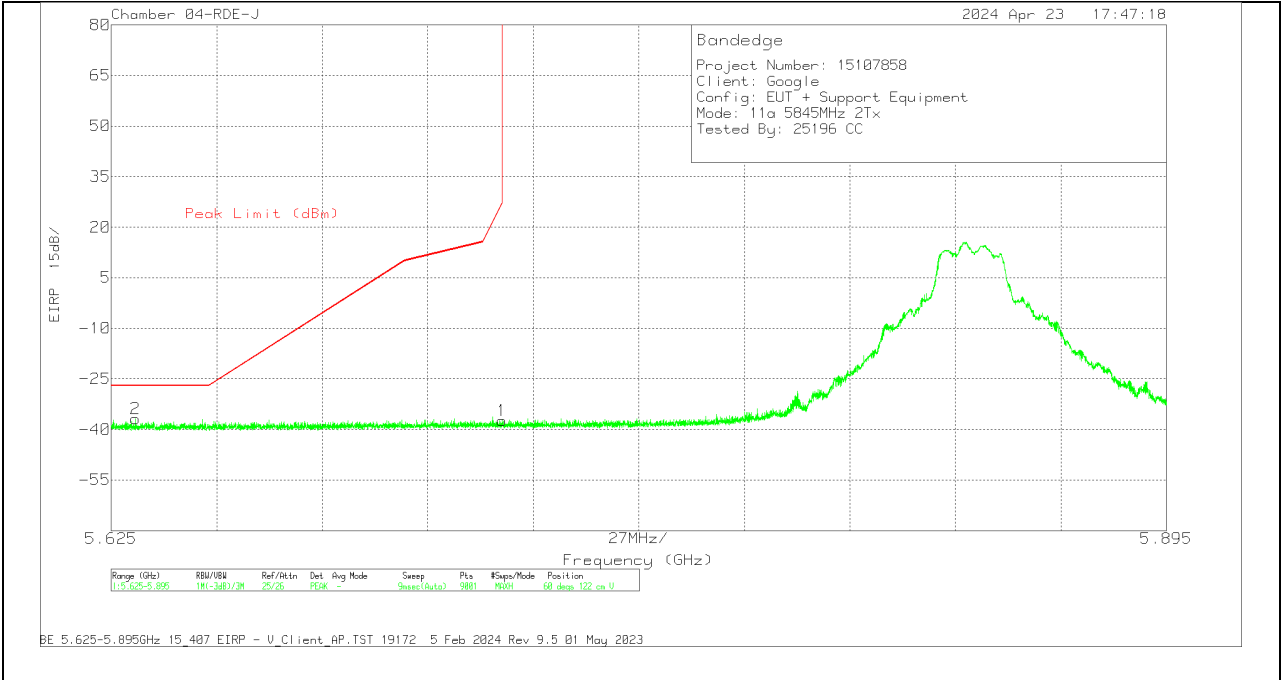


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63118	-49.24	Pk	34.6	-34	11.8	-36.84	-27	-9.84	60	122	V
1	5.725	-50.04	Pk	34.7	-33.8	11.8	-37.34	27	-64.34	60	122	V

PK - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

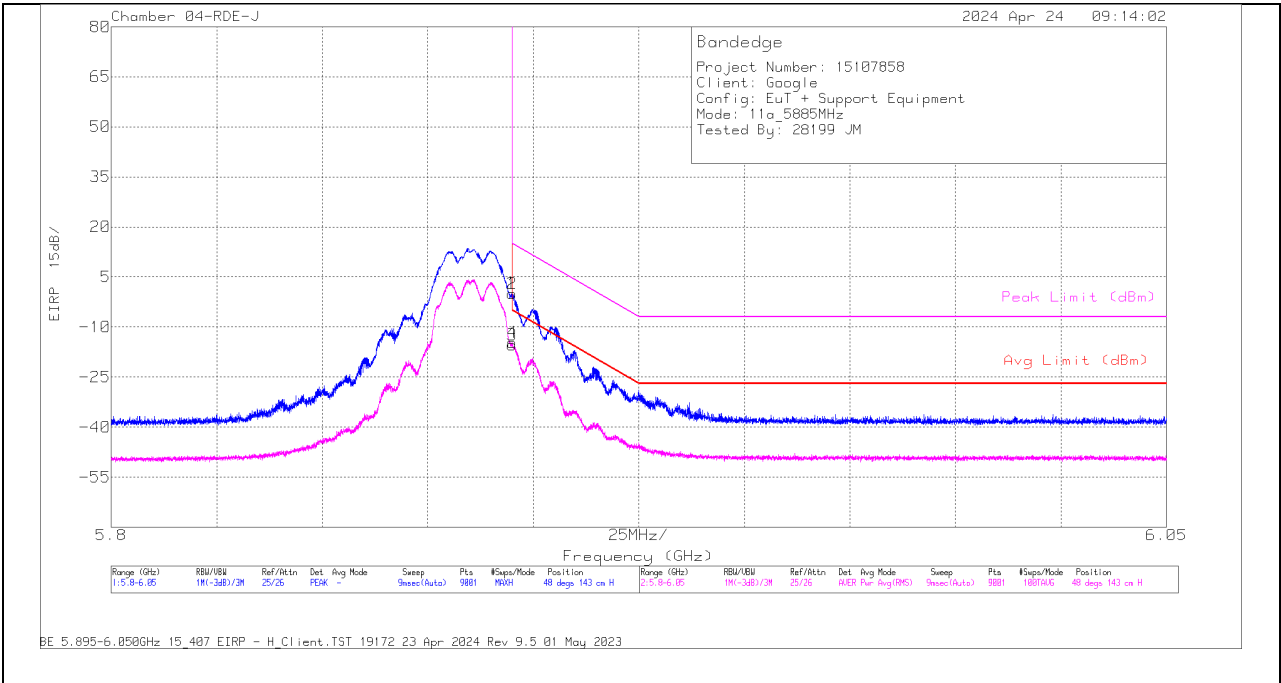


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-13.07	PK	34.9	11.8	-33.6	.03	-	-	15	-14.97	48	143	H
3	5.895	-28.52	RMS	34.9	11.8	-33.6	-15.42	-5	-10.42	-	-	48	143	H
2	5.895029	-13.17	PK	34.9	11.8	-33.5	.03	-	-	14.98	-14.95	48	143	H
4	5.895056	-27.75	RMS	34.9	11.8	-33.5	-14.55	-5.04	-9.51	-	-	48	143	H

PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

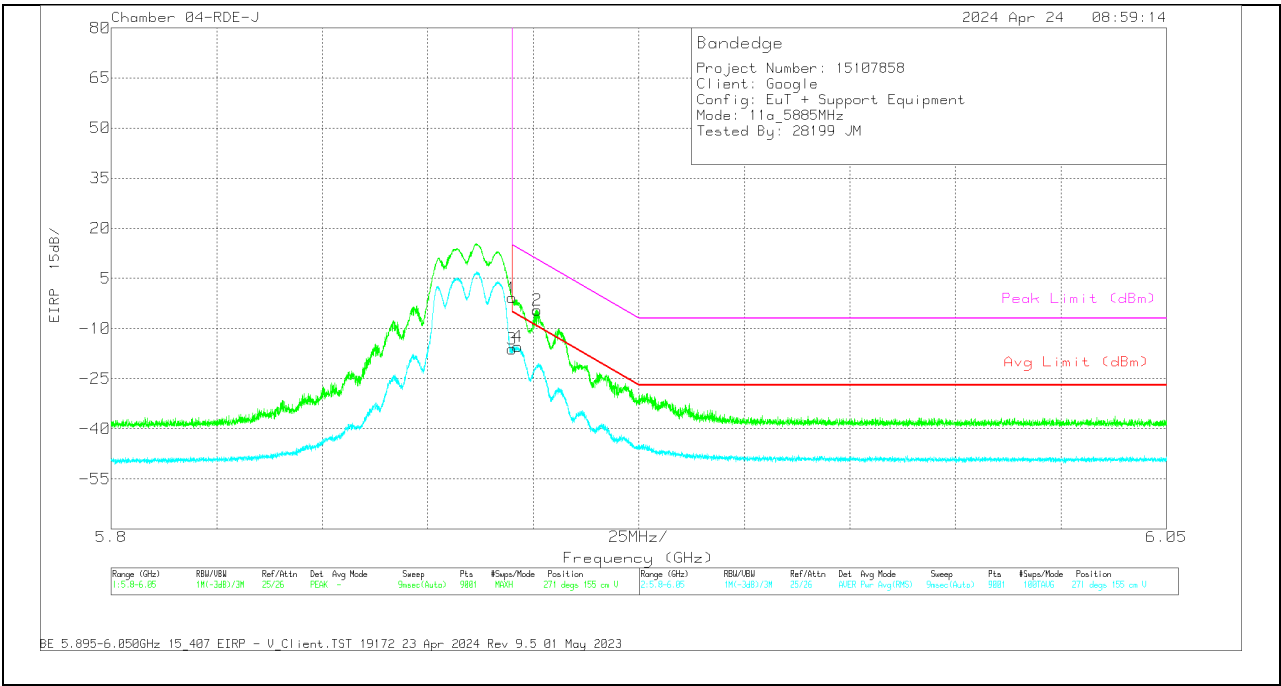



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-13.91	Pk	34.9	11.8	-33.6	-81	-	-	15	-15.81	271	155	V
3	5.895	-29.16	RMS	34.9	11.8	-33.6	-16.06	-5	-11.06	-	-	271	155	V
4	5.89639	-28.5	RMS	34.9	11.8	-33.5	-15.3	-6.02	-9.28	-	-	271	155	V
2	5.900862	-17.71	Pk	34.9	11.8	-33.5	-4.51	-	-	10.7	-15.21	271	155	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

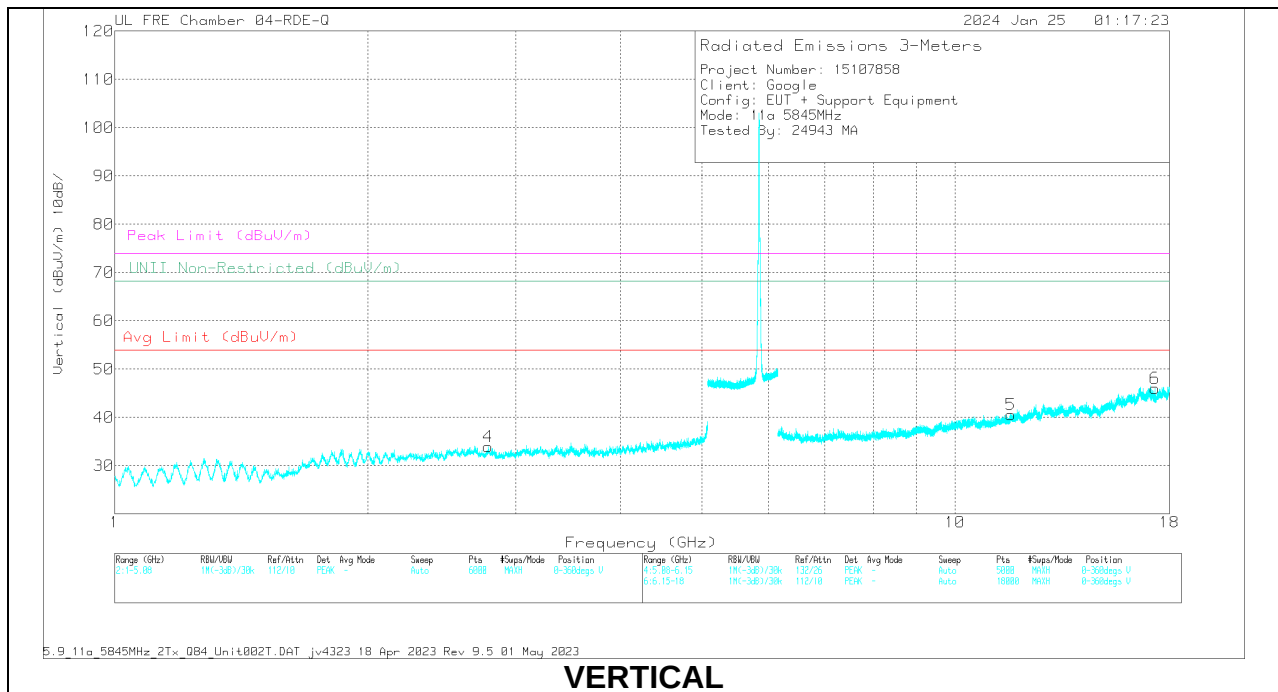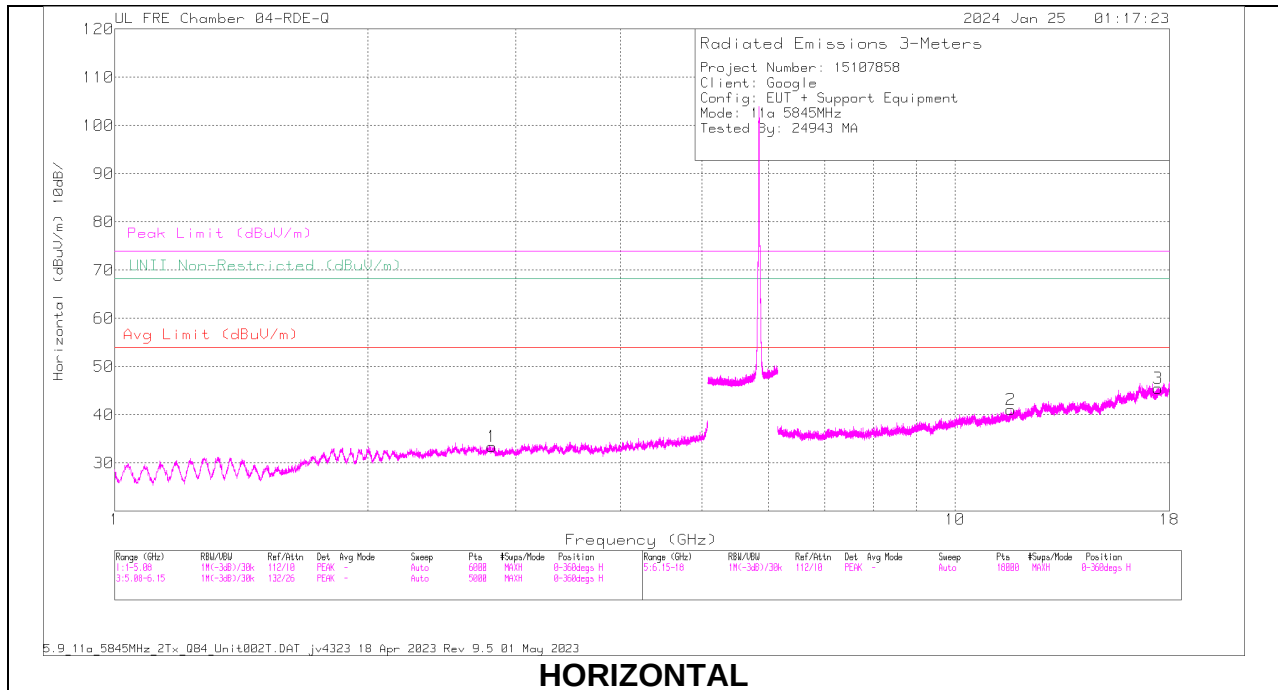

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.810568	58.02	PK-U	32.2	0	-47.13	43.09	-	-	74	-30.91	-	-	360	100	H
	* ** 2.808148	46.49	ADR	32.2	0	-47.16	31.53	54	-22.47	-	-	-	-	360	100	H
4	* ** 2.782635	58.42	PK-U	32.3	0	-47.45	43.27	-	-	74	-30.73	-	-	360	201	V
	* ** 2.784476	47.05	ADR	32.3	0	-47.45	31.9	54	-22.1	-	-	-	-	360	201	V
2	* ** 11.660705	55.43	PK-U	38.5	0	-43.65	50.28	-	-	74	-23.72	-	-	360	100	H
	* ** 11.661881	43.9	ADR	38.5	0	-43.67	38.73	54	-15.27	-	-	-	-	360	100	H
5	* ** 11.648159	55.39	PK-U	38.5	0	-43.75	50.14	-	-	74	-23.86	-	-	360	201	V
	* ** 11.649697	43.73	ADR	38.5	0	-43.71	38.52	54	-15.48	-	-	-	-	360	201	V
6	17.314357	55.76	PK-U	41.1	0	-41	55.86	-	-	-	-	68.2	-12.34	360	200	V
	17.31702	44.03	ADR	41.1	0	-41.1	44.03	-	-	-	-	-	-	360	200	V
3	17.44294	54.97	PK-U	41.1	0	-40.28	55.79	-	-	-	-	68.2	-12.41	360	100	H
	17.443252	43	ADR	41.1	0	-40.27	43.83	-	-	-	-	-	-	360	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

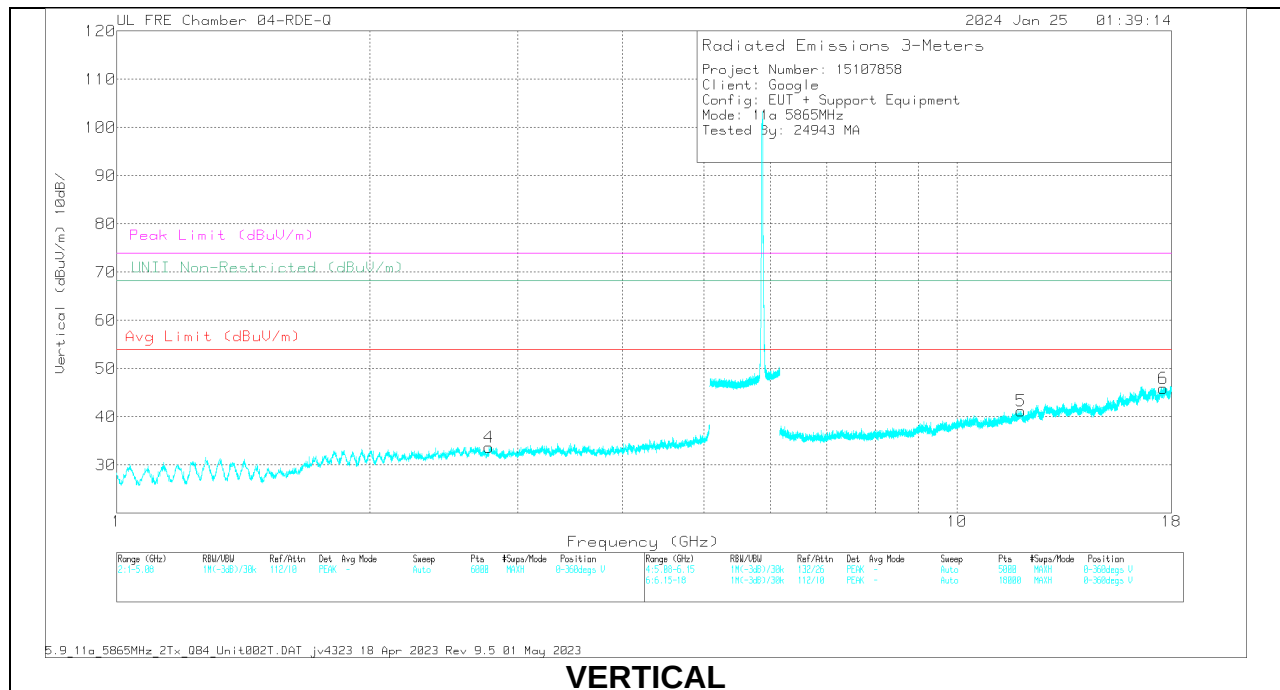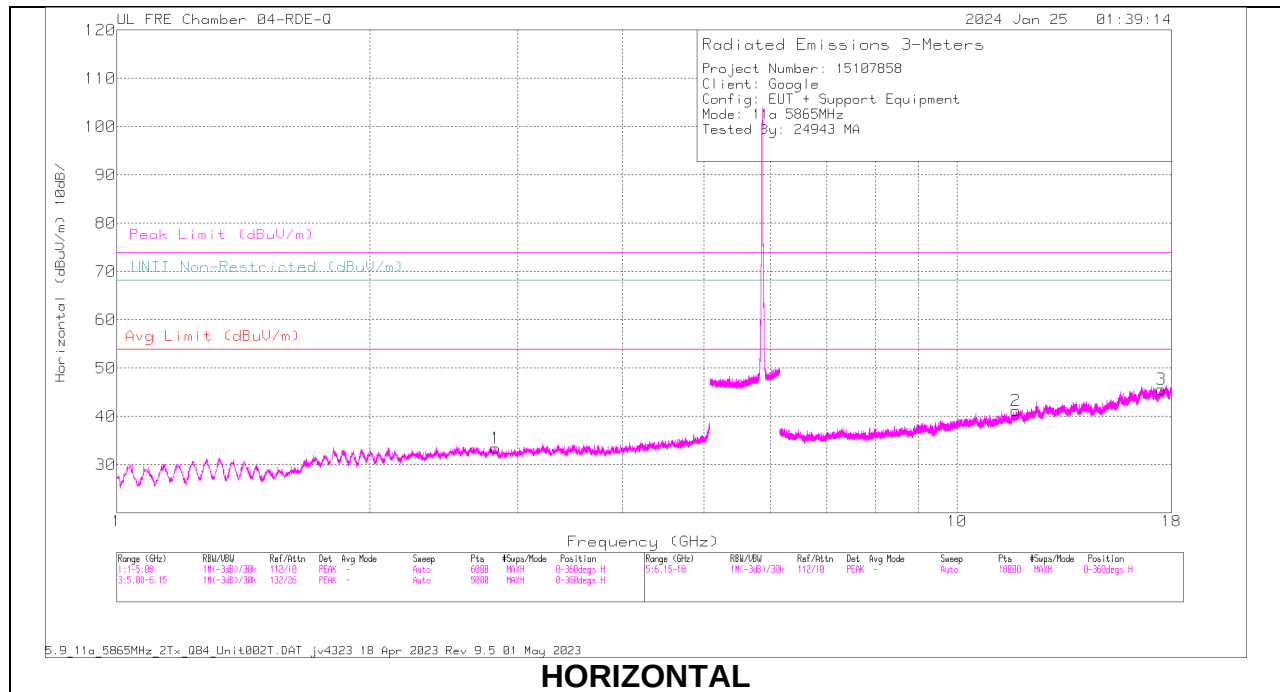

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.823061	58.22	PK-U	32.2	0	-47.08	43.34	-	-	74	-30.66	-	-	360	100	H
	* ** 2.823149	46.47	ADR	32.2	0	-47.07	31.6	54	-22.4	-	-	-	-	360	100	H
4	* ** 2.773299	58.58	PK-U	32.3	0	-47.48	43.4	-	-	74	-30.6	-	-	360	201	V
	* ** 2.777083	46.85	ADR	32.3	0	-47.45	31.7	54	-22.3	-	-	-	-	360	201	V
2	* ** 11.746865	55.02	PK-U	38.6	0	-43.76	49.86	-	-	74	-24.14	-	-	360	100	H
	* ** 11.748391	43.46	ADR	38.6	0	-43.72	39.34	54	-15.66	-	-	-	-	360	100	H
5	* ** 11.926145	54.96	PK-U	38.8	0	-42.8	50.96	-	-	74	-23.04	-	-	360	201	V
	* ** 11.923771	43.54	ADR	38.8	0	-42.81	39.53	54	-14.47	-	-	-	-	360	201	V
3	17.518901	55.07	PK-U	41.2	0	-40.87	55.4	-	-	-	-	68.2	-12.8	360	100	H
	17.519389	42.94	ADR	41.2	0	-40.87	43.27	-	-	-	-	-	-	360	100	H
6	17.587611	43.41	ADR	41.3	0	-40.84	43.87	-	-	-	-	-	-	360	200	V
	17.587955	55.63	PK-U	41.3	0	-40.83	56.1	-	-	-	-	68.2	-12.1	360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

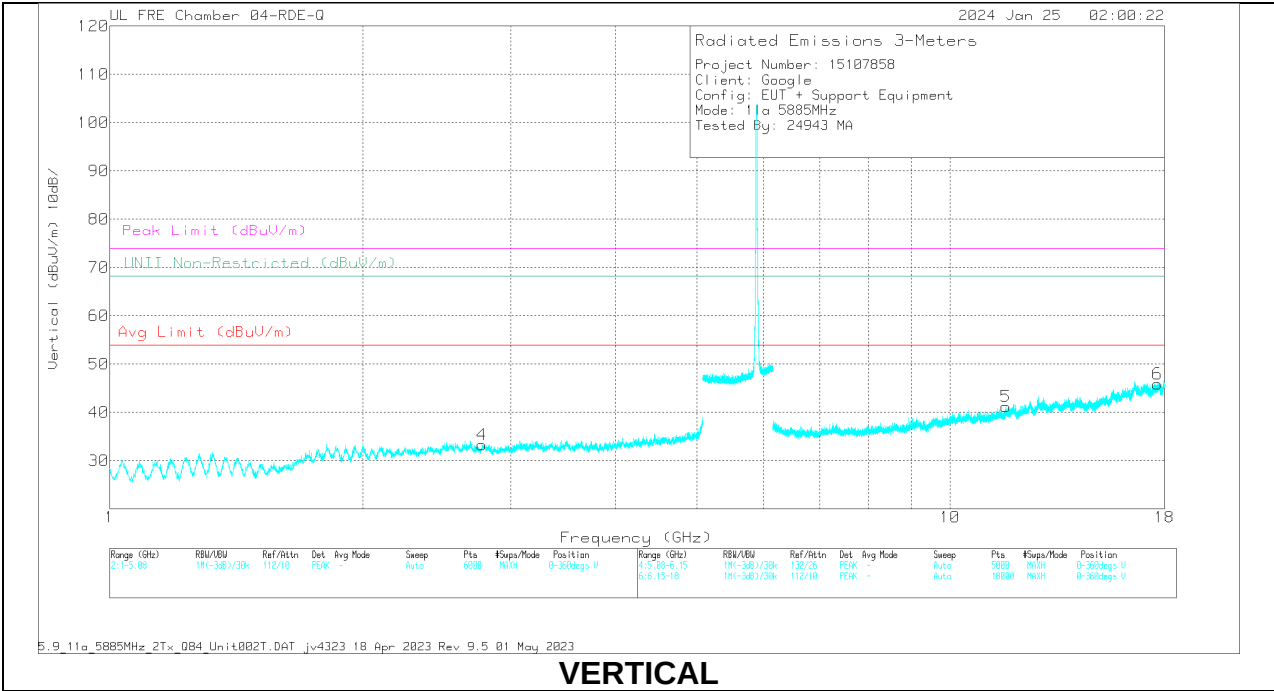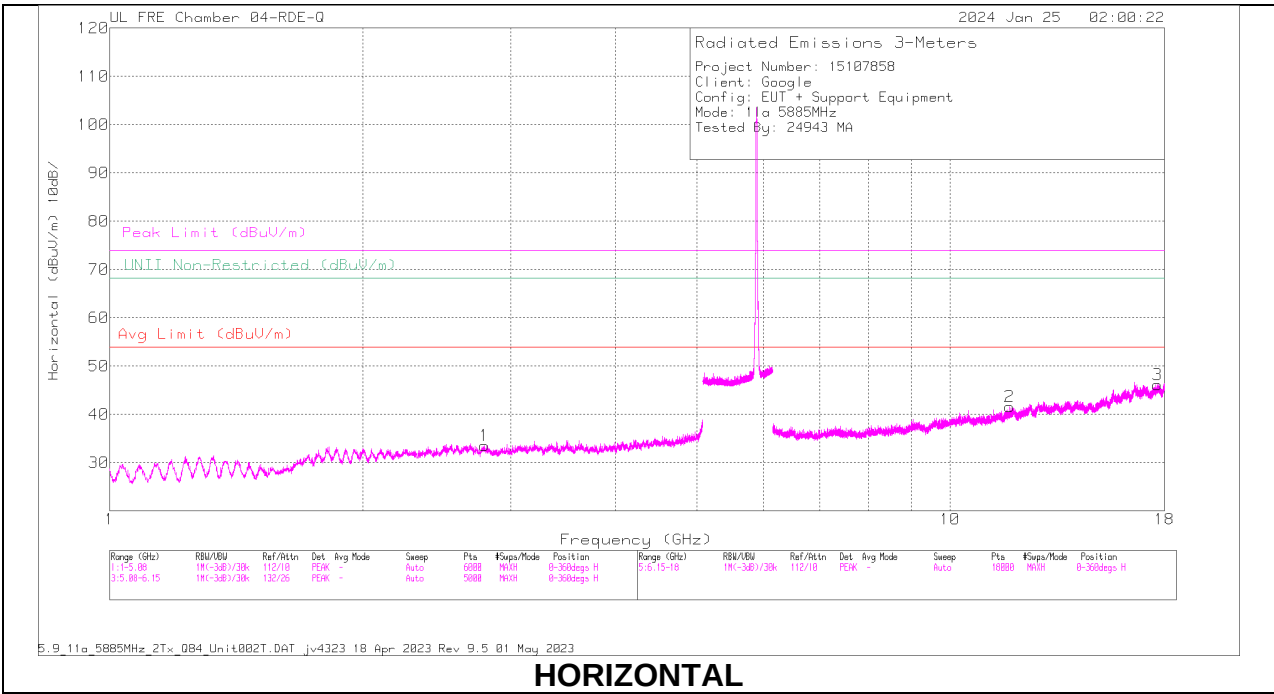

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.790574	58.97	PK-U	32.3	0	-47.37	43.9	-	-	74	-30.1	-	-	360	100	H
1	* ** 2.794333	46.89	ADR	32.3	0	-47.31	31.88	54	-22.12	-	-	-	-	360	100	H
4	* ** 2.773874	58.43	PK-U	32.3	0	-47.47	43.26	-	-	74	-30.74	-	-	360	201	V
4	* ** 2.774733	46.89	ADR	32.3	0	-47.47	31.72	54	-22.28	-	-	-	-	360	201	V
2	* ** 11.776033	55.49	PK-U	38.7	0	-43.52	50.67	-	-	74	-23.33	-	-	360	100	H
2	* ** 11.775738	43.56	ADR	38.7	0	-43.53	38.73	54	-15.27	-	-	-	-	360	100	H
5	* ** 11.649982	55.71	PK-U	38.5	0	-43.7	50.51	-	-	74	-23.49	-	-	360	201	V
5	* ** 11.652154	43.75	ADR	38.5	0	-43.66	38.59	54	-15.41	-	-	-	-	360	201	V
3	17.661138	54.73	PK-U	41.4	0	-40.48	55.65	-	-	-	-	68.2	-12.55	360	100	H
6	17.661773	43.21	ADR	41.4	0	-40.46	44.15	-	-	-	-	-	-	360	200	V
6	17.661804	54.42	PK-U	41.4	0	-40.46	55.36	-	-	-	-	68.2	-12.84	360	200	V
3	17.663318	42.92	ADR	41.4	0	-40.42	43.9	-	-	-	-	-	-	360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.34. 802.11n HT20 MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

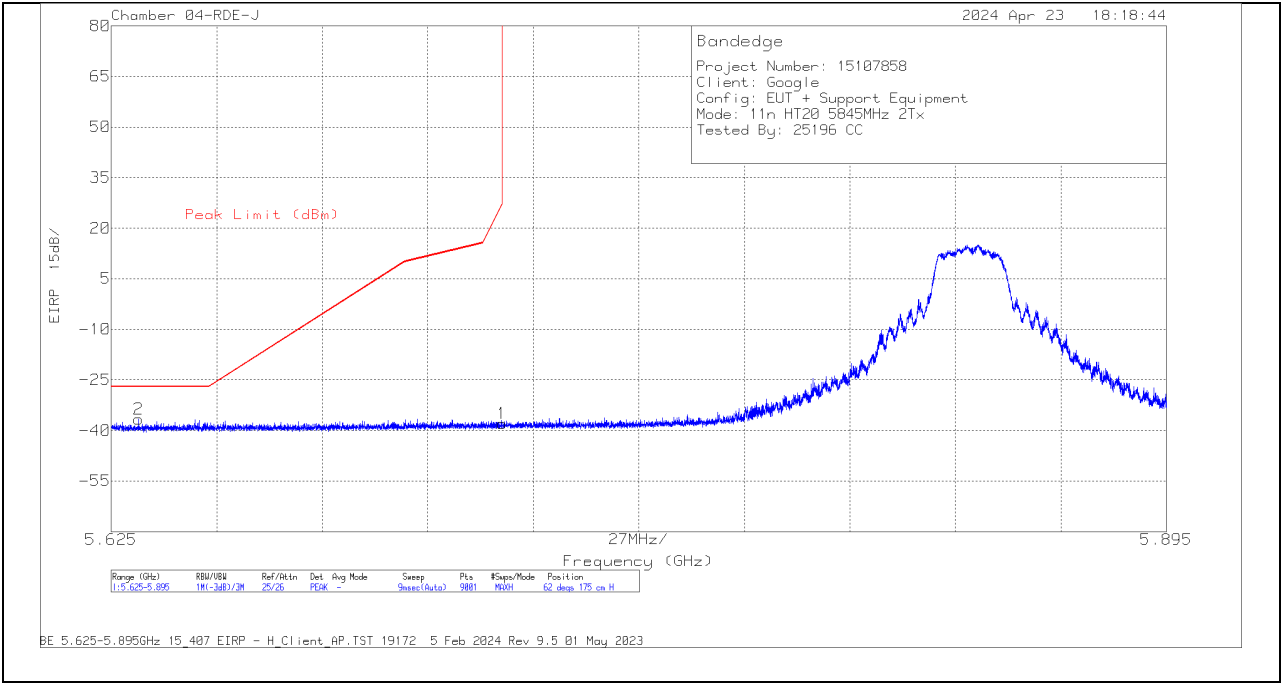


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	22741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63202	-49.07	Pk	34.6	-34	11.8	-36.67	-27	-9.67	62	175	H
1	5.725	-50.68	Pk	34.7	-33.8	11.8	-37.98	27	-64.98	62	175	H

PK - Peak detector

VERTICAL RESULT

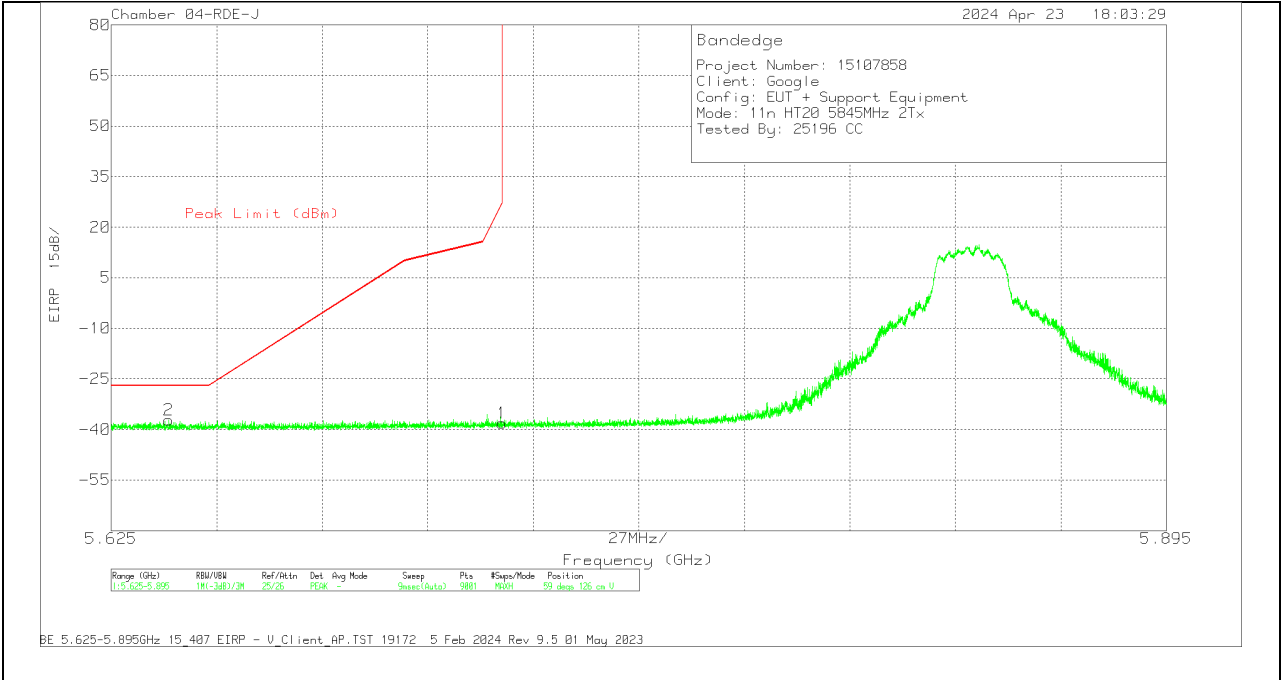


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63967	-49.62	Pk	34.6	-34	11.8	-37.22	-27	-10.22	59	126	V
1	5.725	-50.83	Pk	34.7	-33.8	11.8	-36.13	27	-65.13	59	126	V

PK - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

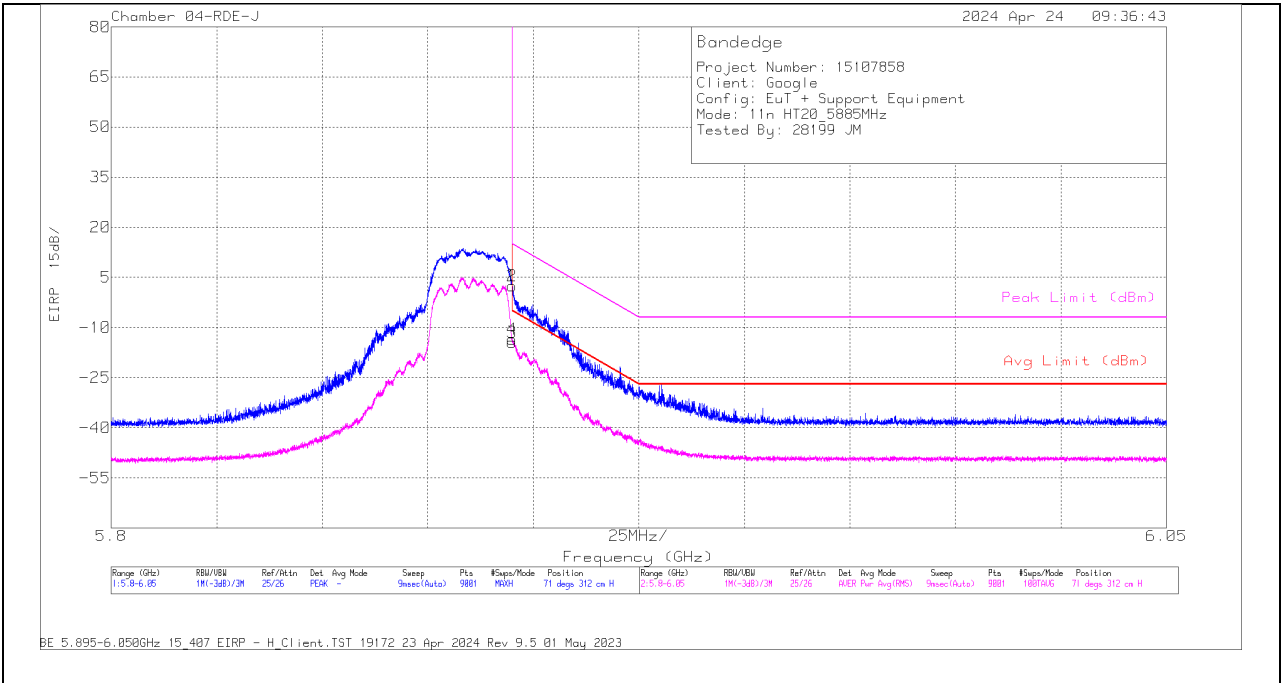


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-10.63	Pk	34.9	11.8	-33.6	2.47	-	-	15	-12.53	71	312	H
3	5.895	-27.53	RMS	34.9	11.8	-33.6	-14.43	-5	-9.43	-	-	71	312	H
2	5.895001	-10.75	Pk	34.9	11.8	-33.5	2.45	-	-	15	-12.55	71	312	H
4	5.895029	-26.66	RMS	34.9	11.8	-33.5	-13.46	-5.02	-8.44	-	-	71	312	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

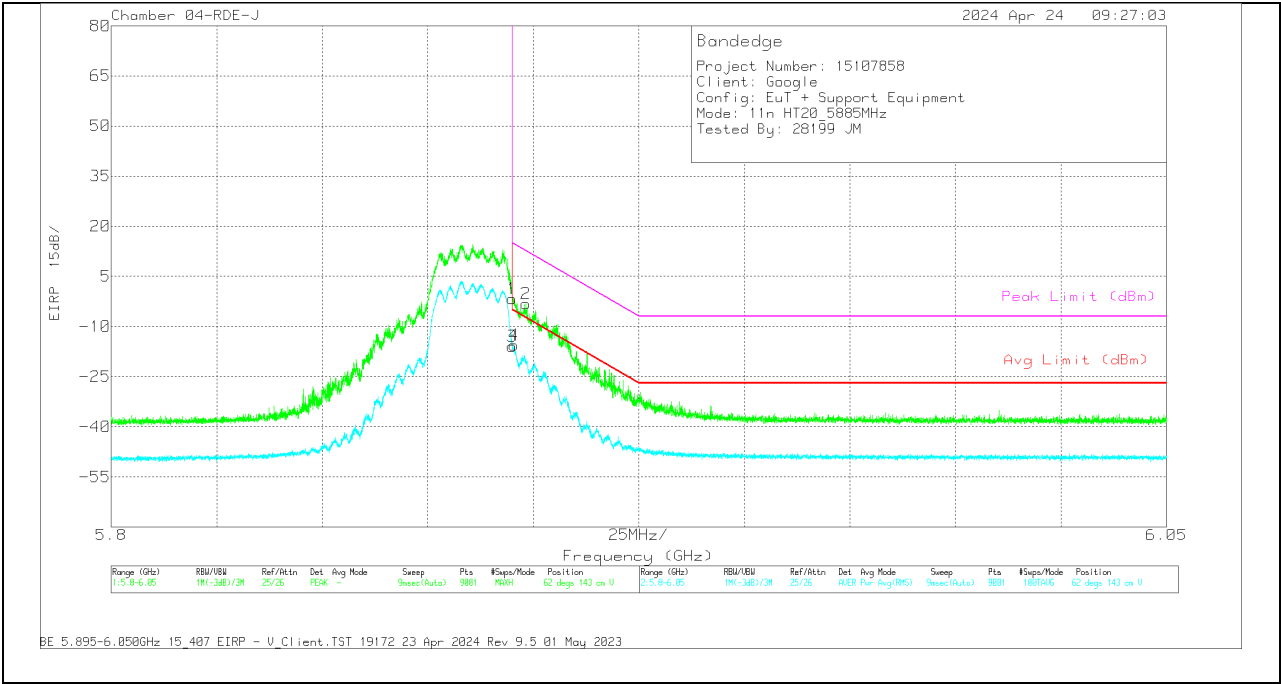



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-14.74	Pk	34.9	11.8	-33.6	-1.64	-	-	15	-16.64	62	143	V
3	5.895	-29.03	RMS	34.9	11.8	-33.6	-15.93	-5	-10.93	-	-	62	143	V
4	5.895417	-28.82	RMS	34.9	11.8	-33.5	-15.62	-5.31	-10.31	-	-	62	143	V
2	5.898251	-16.4	Pk	34.9	11.8	-33.5	-3.2	-	-	12.62	-15.82	62	143	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

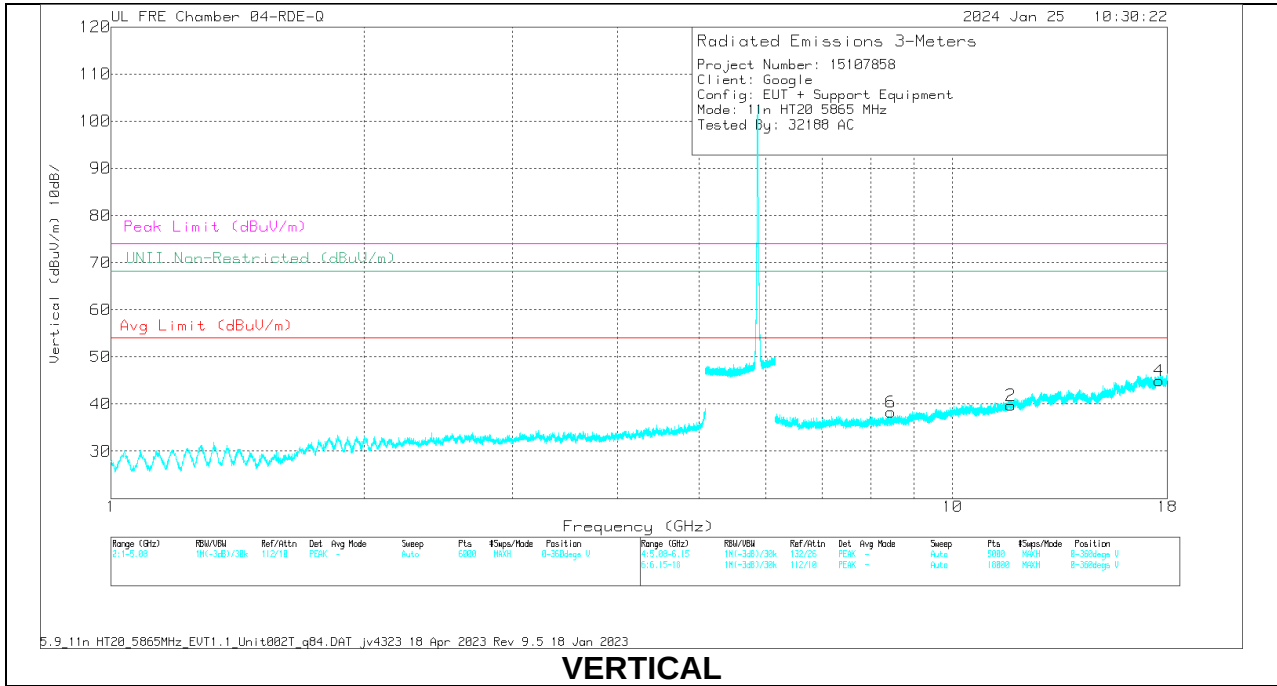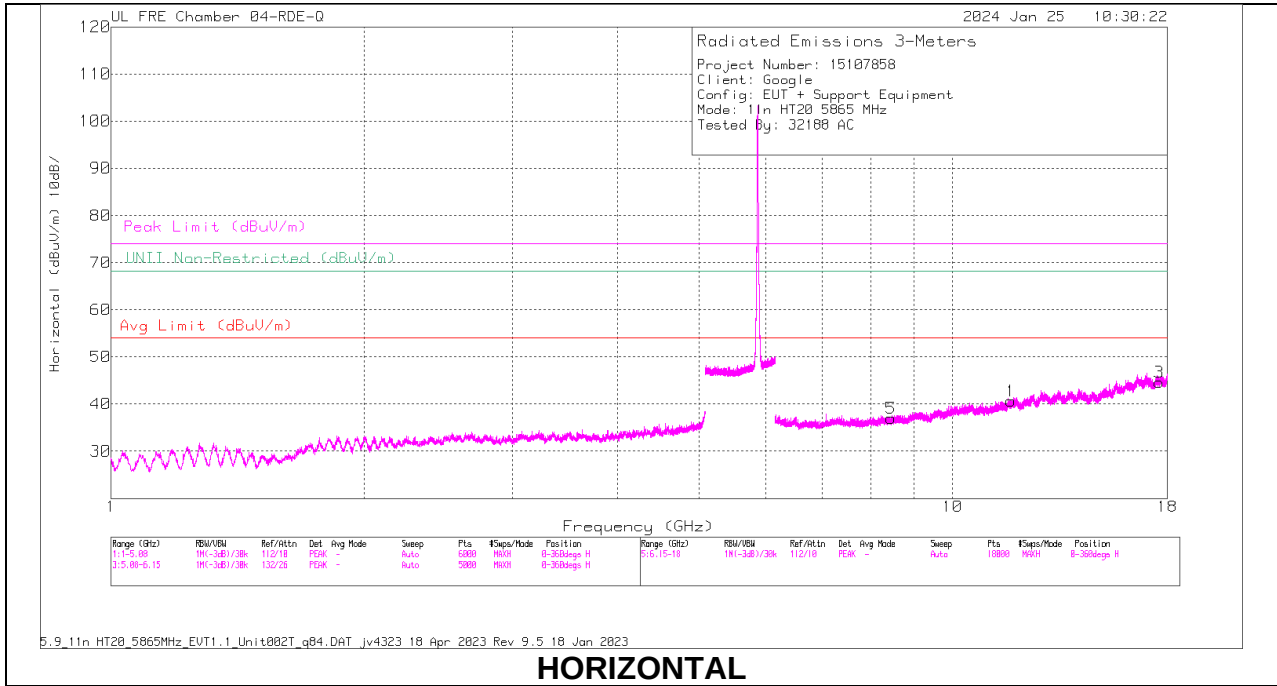

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 11.732158	55.14	PK-U	38.6	-43.8	49.94	-	-	74	-24.06	-	-	360	100	H
1	* ** 11.732279	43.45	ADR	38.6	-43.8	38.25	54	-15.75	-	-	-	-	360	100	H
5	* ** 8.449022	54.09	PK-U	35.9	-43.57	46.42	-	-	74	-27.58	-	-	360	100	H
5	* ** 8.448548	42.86	ADR	35.9	-43.58	35.18	54	-18.82	-	-	-	-	360	100	H
2	* ** 11.73212	55.43	PK-U	38.6	-43.8	50.23	-	-	74	-23.77	-	-	360	201	V
2	* ** 11.728992	43.48	ADR	38.6	-43.82	38.26	54	-15.74	-	-	-	-	360	201	V
6	* ** 8.451424	54.76	PK-U	35.9	-43.52	47.14	-	-	74	-26.86	-	-	360	200	V
6	* ** 8.44997	42.88	ADR	35.9	-43.53	35.25	54	-18.75	-	-	-	-	360	200	V
3	17.593943	54.62	PK-U	41.3	-40.89	55.03	-	-	-	-	68.2	-13.17	360	100	H
3	17.594224	43.19	ADR	41.3	-40.89	43.6	-	-	-	-	-	-	360	200	V
4	17.594365	43.02	ADR	41.3	-40.9	43.42	-	-	-	-	-	-	360	100	H
4	17.594626	55.03	PK-U	41.3	-40.9	55.43	-	-	-	-	68.2	-12.77	360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

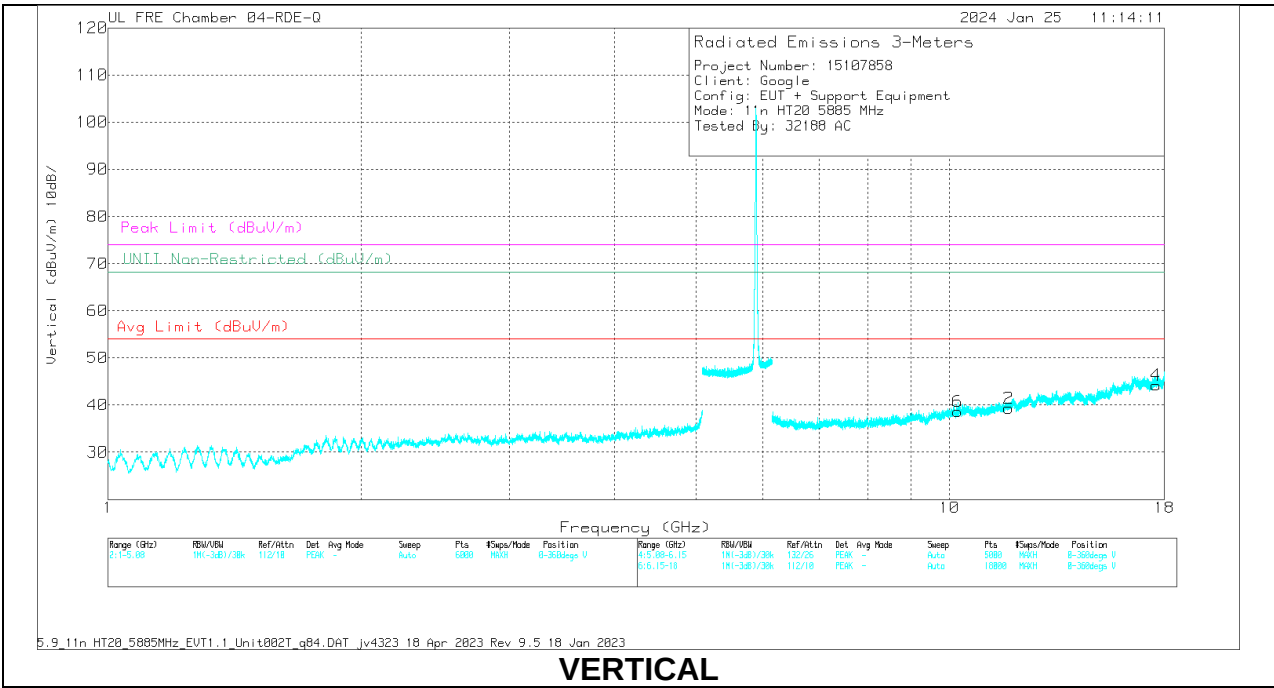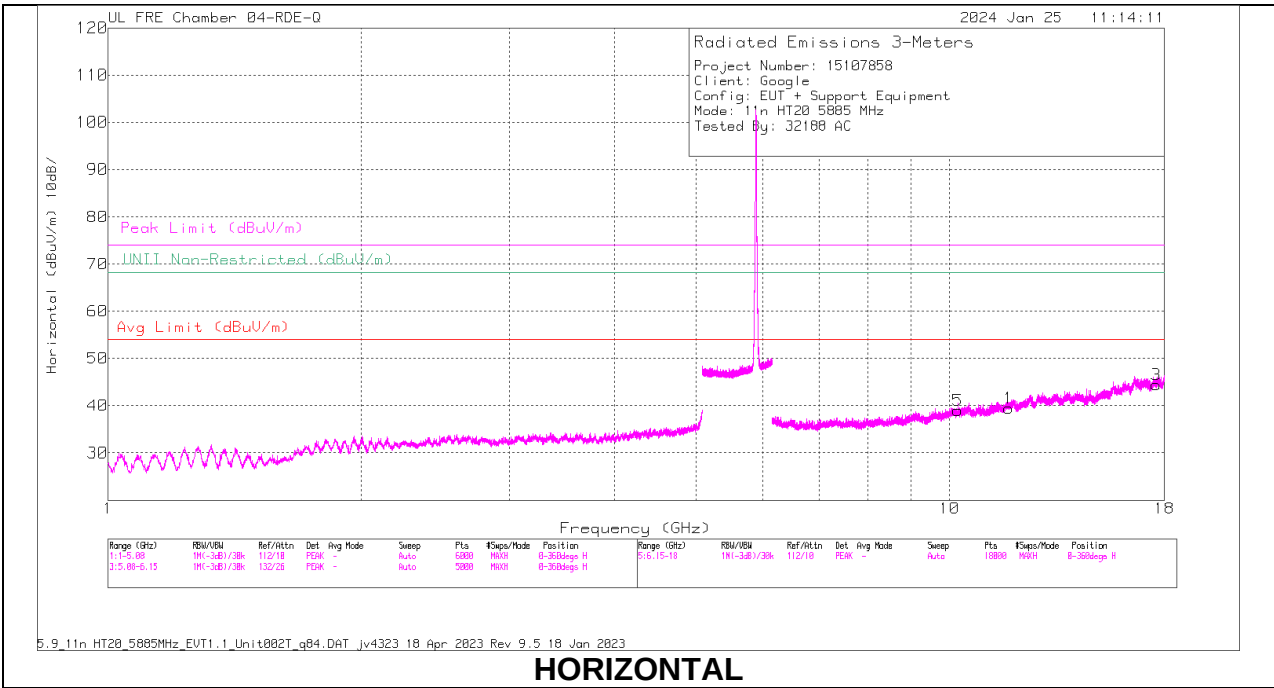

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 11.748869	55.26	PK-U	38.6	-43.74	50.12	-	-	74	-23.88	-	-	358	100	H
1	* ** 11.751761	43.41	ADR	38.6	-43.68	38.33	54	-15.67	-	-	-	-	358	100	H
2	* ** 11.75011	54.91	PK-U	38.6	-43.74	49.77	-	-	74	-24.23	-	-	358	201	V
2	* ** 11.749534	43.46	ADR	38.6	-43.75	38.31	54	-15.69	-	-	-	-	358	201	V
5	10.22592	56.58	PK-U	37.3	-44.3	49.58	-	-	-	-	68.2	-18.62	358	100	H
5	10.226198	56.34	PK-U	37.3	-44.29	49.35	-	-	-	-	68.2	-18.85	358	200	V
6	10.226718	44.77	ADR	37.3	-44.27	37.8	-	-	-	-	-	-	358	200	V
6	10.226936	44.87	ADR	37.3	-44.26	37.91	-	-	-	-	-	-	358	100	H
3	17.599363	43.15	ADR	41.4	-40.83	43.72	-	-	-	-	-	-	358	100	H
3	17.601169	54.64	PK-U	41.4	-40.8	55.24	-	-	-	-	68.2	-12.96	358	200	V
4	17.601421	43.31	ADR	41.4	-40.8	43.91	-	-	-	-	-	-	358	200	V
4	17.60194	54.85	PK-U	41.4	-40.8	55.45	-	-	-	-	68.2	-12.75	358	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

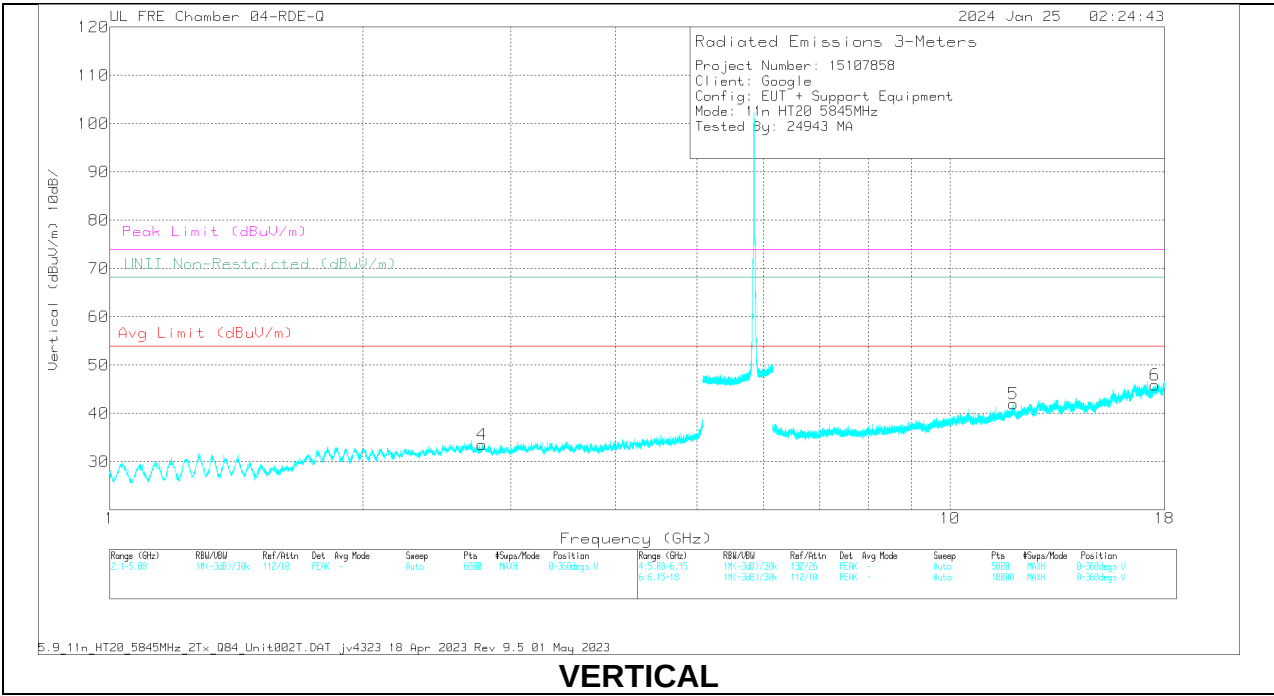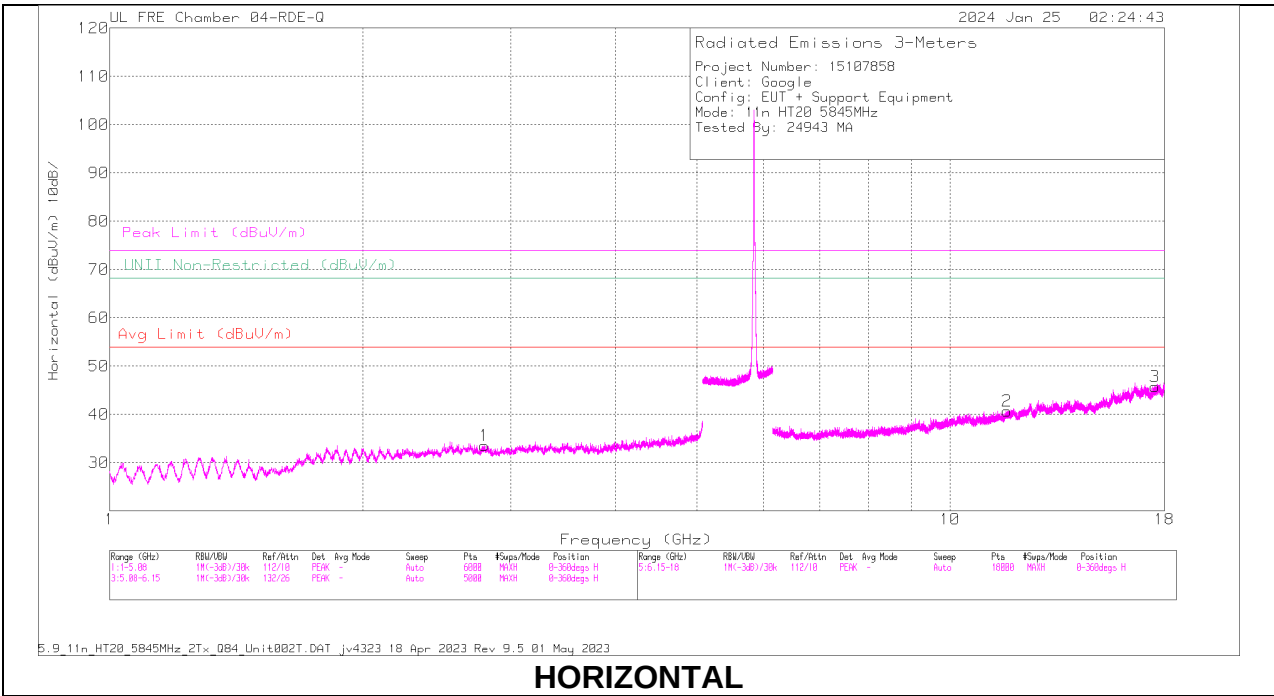

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.788322	58.57	PK-U	32.3	0	-47.42	43.45	-	-	74	-30.55	-	-	360	100	H
1	* ** 2.790164	46.96	ADR	32.3	0	-47.39	31.87	54	-22.13	-	-	-	-	360	100	H
4	* ** 2.776075	58.54	PK-U	32.3	0	-47.45	43.39	-	-	74	-30.61	-	-	360	201	V
4	* ** 2.772792	46.7	ADR	32.3	0	-47.48	31.52	54	-22.48	-	-	-	-	360	201	V
2	* ** 11.688421	54.87	PK-U	38.6	0	-43.6	49.67	-	-	74	-24.33	-	-	360	100	H
2	* ** 11.688117	43.41	ADR	38.6	0	-43.78	38.23	54	-15.77	-	-	-	-	360	100	H
5	* ** 11.906413	55.78	PK-U	38.8	0	-42.9	51.68	-	-	74	-22.32	-	-	360	201	V
5	* ** 11.90619	43.87	ADR	38.8	0	-42.9	39.77	54	-14.23	-	-	-	-	360	201	V
3	17.527737	55.12	PK-U	41.2	0	-40.96	55.36	-	-	-	-	68.2	-12.84	360	100	H
3	17.528852	43.18	ADR	41.2	0	-40.92	43.46	-	-	-	-	-	-	360	100	H
6	17.545265	54.85	PK-U	41.3	0	-40.53	55.62	-	-	-	-	68.2	-12.58	360	200	V
6	17.545601	42.92	ADR	41.3	0	-40.52	43.7	-	-	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.35. 802.11be EHT20 242T MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

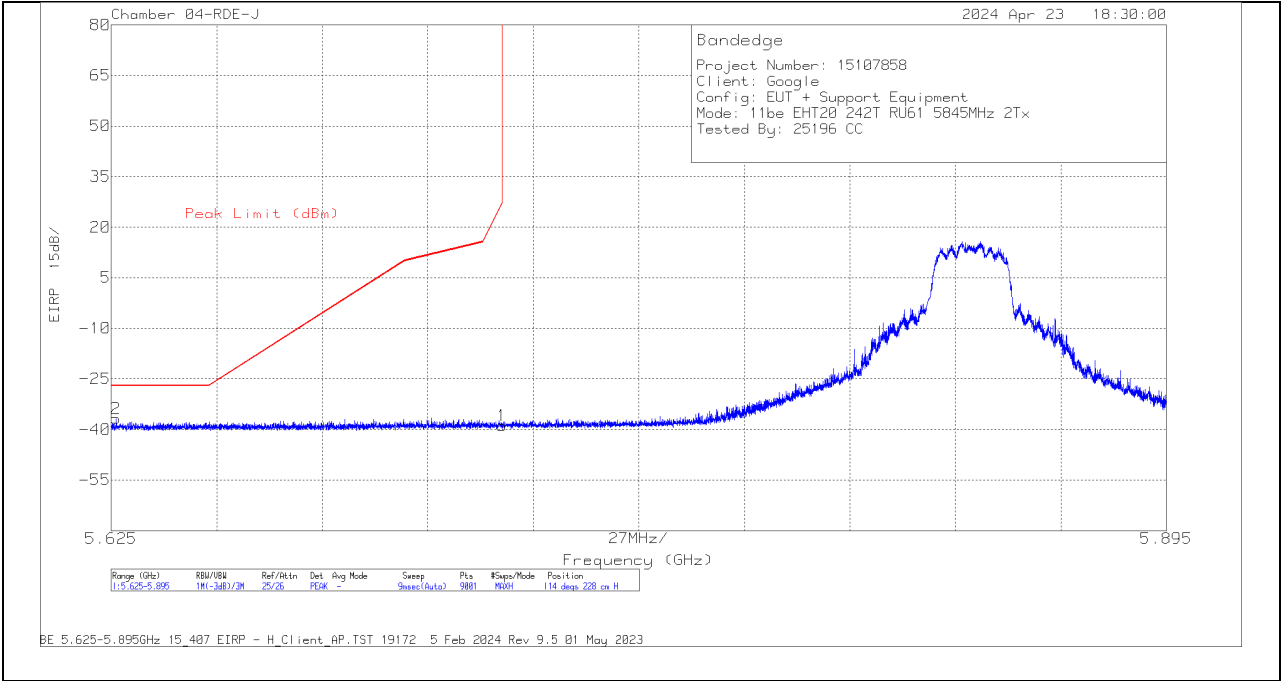


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62623	-49.13	Pk	34.6	-34	11.8	-36.73	-27	-9.73	114	228	H
1	5.725	-51.5	Pk	34.7	-33.8	11.8	-38.8	27	-65.8	114	228	H

Pk - Peak detector

VERTICAL RESULT

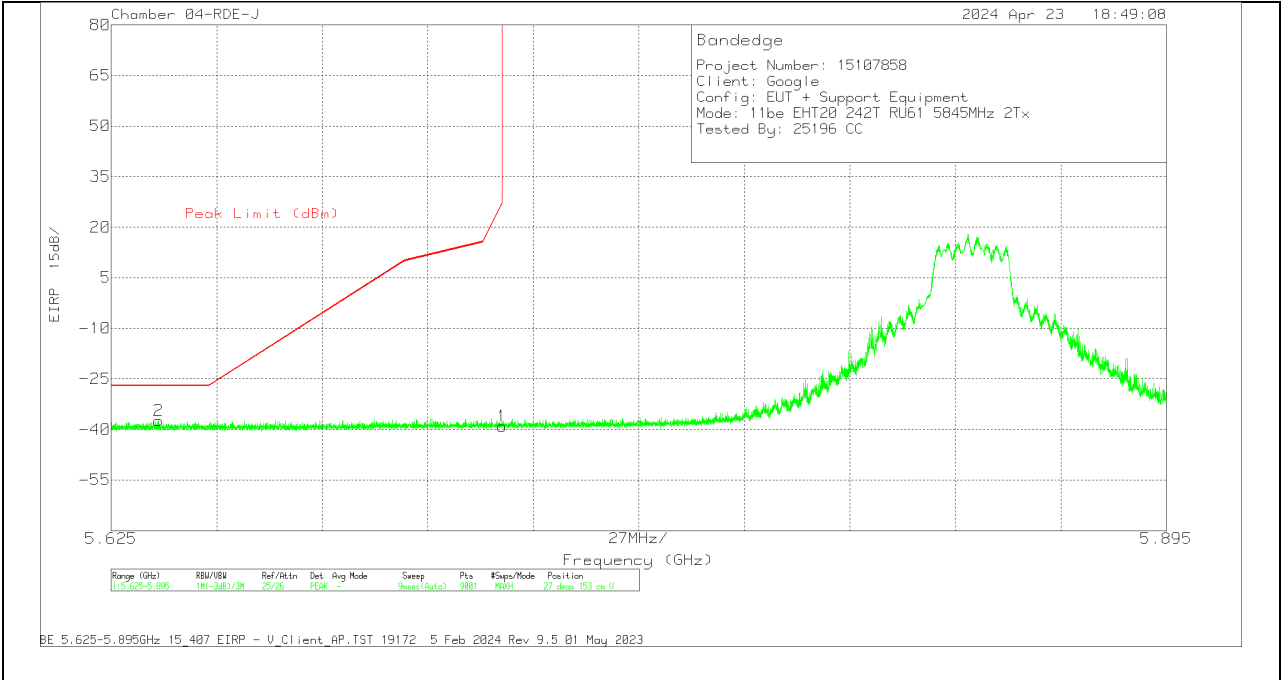


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63721	-49.72	Pk	34.6	-34	11.8	-37.32	-27	-10.32	27	153	V
1	5.725	-51.77	Pk	34.7	-33.8	11.8	-39.07	27	-66.07	27	153	V

PK - Peak detector

BANDEGE (HIGH CHANNEL)

HORIZONTAL RESULT


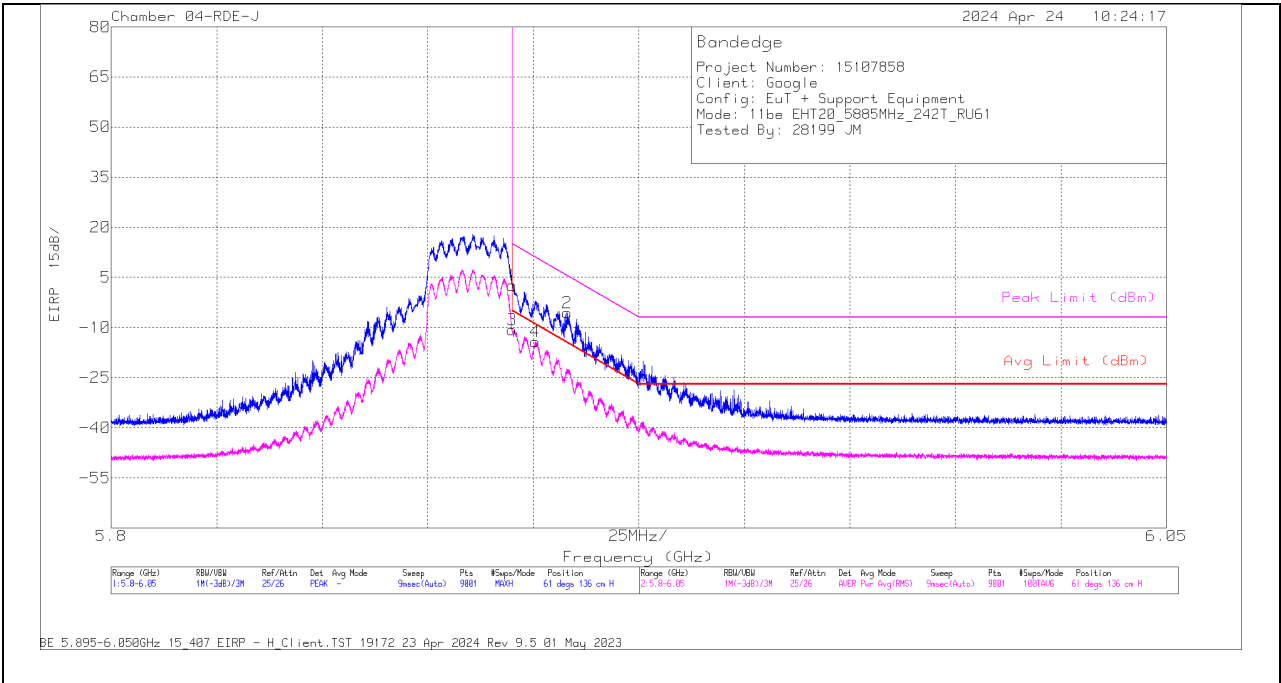


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Chl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-10.45	Pk	34.9	11.8	-33.6	0	2.65	-	-	15	-12.35	61	136	H
3	5.895	-23.99	RMS	34.9	11.8	-33.6	.14	-10.75	-5	-5.75	-	-	61	136	H
4	5.900417	-27.65	RMS	34.9	11.8	-33.5	.14	-14.31	-8.97	-5.34	-	-	61	136	H
2	5.908001	-18.73	Pk	34.9	11.8	-33.5	0	-5.53	-	-	5.47	-11	61	136	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

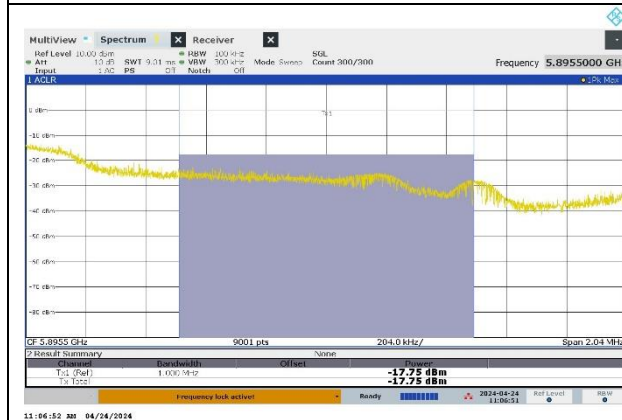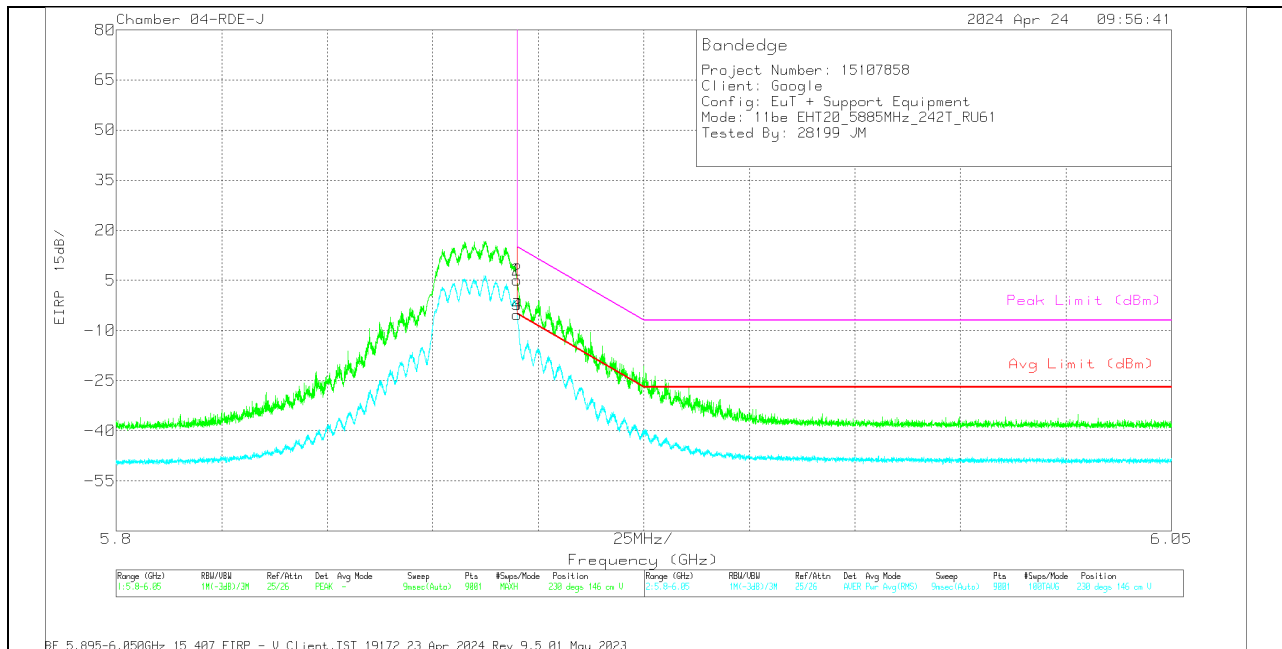

ZOOM-IN PEAK RESULT MARKER 1

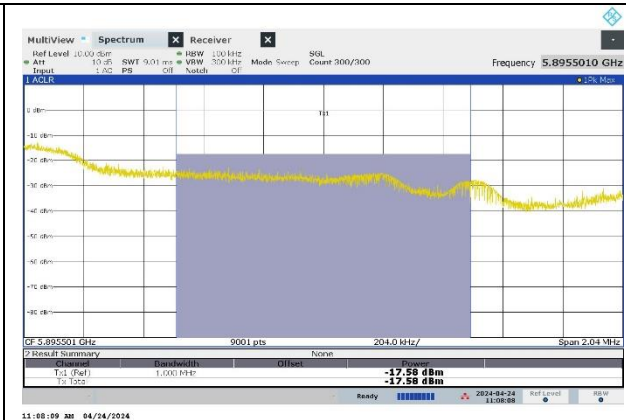

ZOOM-IN PEAK RESULT MARKER 2



ZOOM-IN RMS RESULT MARKER 3



ZOOM-IN RMS RESULT MARKER 4



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.8955	-17.75	Pk	34.9	11.8	-33.6	0	-4.65	-	-	14.63	-19.28	230	146	V
2	5.895501	-17.58	Pk	34.9	11.8	-33.5	0	-4.48	-	-	14.63	-19.11	230	146	V
3	5.8955	-26.93	RMS	34.9	11.8	-33.6	.14	-13.69	-5.37	-8.32	-	-	230	146	V
4	5.895501	-26.95	RMS	34.9	11.8	-33.5	.14	-13.61	-5.37	-8.24	-	-	230	146	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

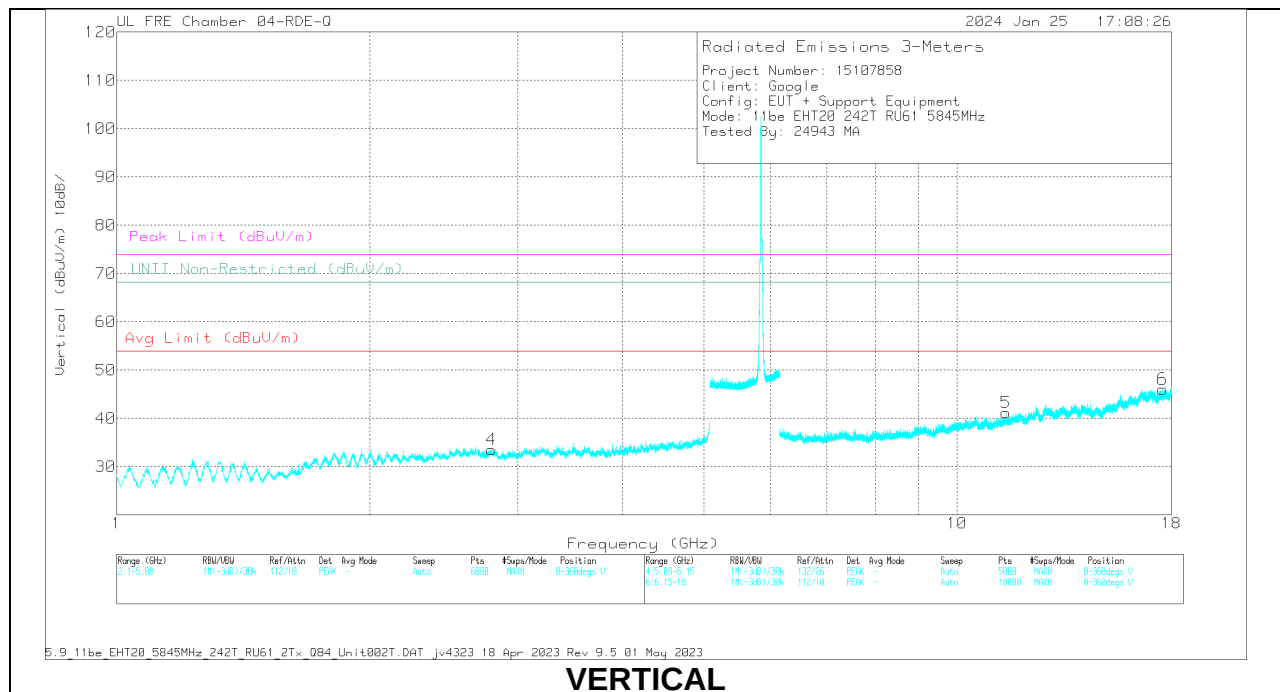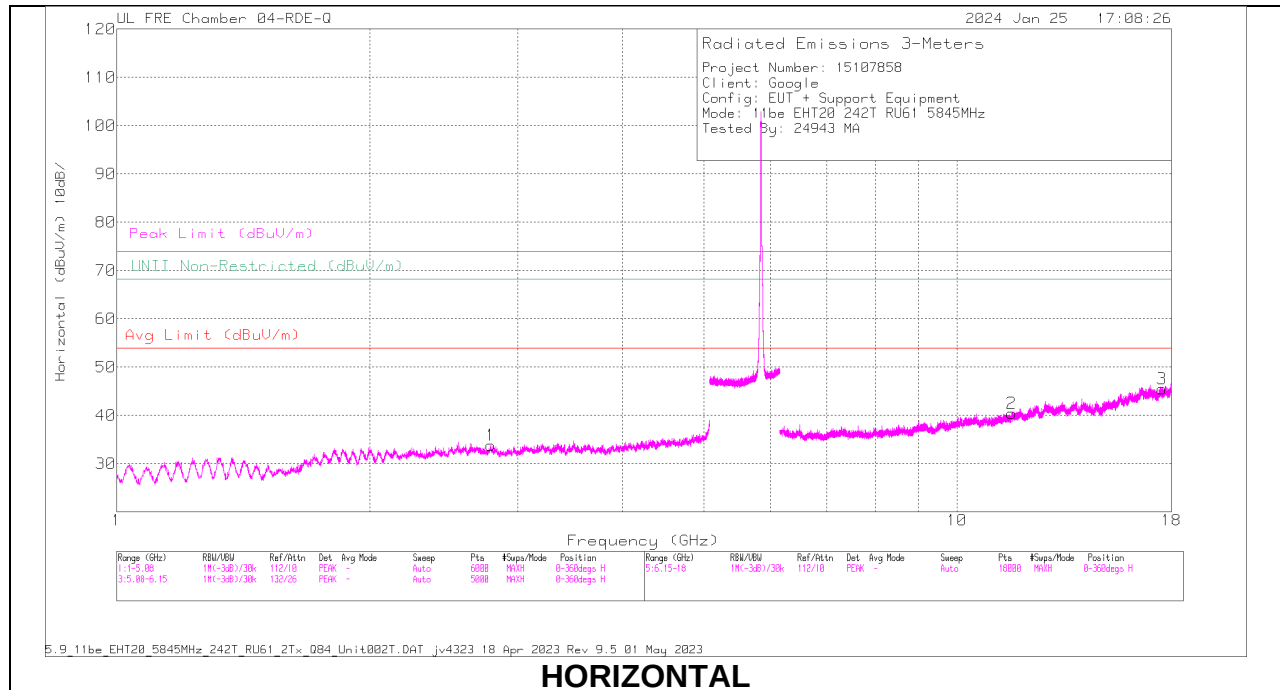

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.785547	58.62	PK-U	32.3	0	-47.43	43.49	-	-	74	-30.51	-	-	360	100	H
	* ** 2.787034	47.08	ADR	32.3	.14	-47.44	32.08	54	-21.92	-	-	-	-	360	100	H
4	* ** 2.793976	58.82	PK-U	32.3	0	-47.32	43.8	-	-	74	-30.2	-	-	360	201	V
	* ** 2.793388	46.82	ADR	32.3	.14	-47.34	31.92	54	-22.08	-	-	-	-	360	201	V
2	* ** 11.606677	56.36	PK-U	38.5	0	-44.04	50.82	-	-	74	-23.18	-	-	360	100	H
	* ** 11.606643	43.97	ADR	38.5	.14	-44.02	38.59	54	-15.41	-	-	-	-	360	100	H
5	* ** 11.443234	56.66	PK-U	38.3	0	-44.15	50.81	-	-	74	-23.19	-	-	360	201	V
	* ** 11.441058	44.77	ADR	38.3	.14	-44.18	39.03	54	-14.97	-	-	-	-	360	201	V
3	17.535295	43.14	ADR	41.3	.14	-40.78	43.8	-	-	-	-	-	-	360	100	H
	17.537022	54.78	PK-U	41.3	0	-40.79	55.29	-	-	-	-	68.2	-12.91	360	100	H
6	17.575528	43.36	ADR	41.3	.14	-40.82	43.98	-	-	-	-	-	-	360	200	V
	17.576404	54.91	PK-U	41.3	0	-40.81	55.4	-	-	-	-	-	-	360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

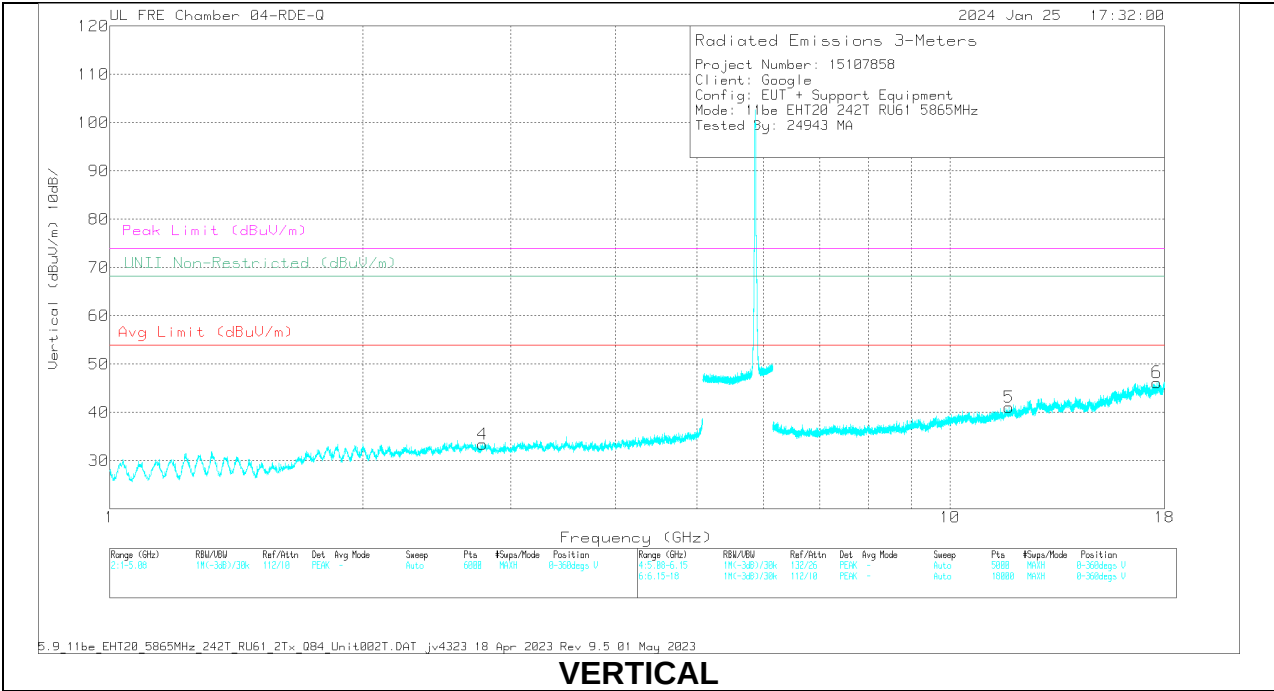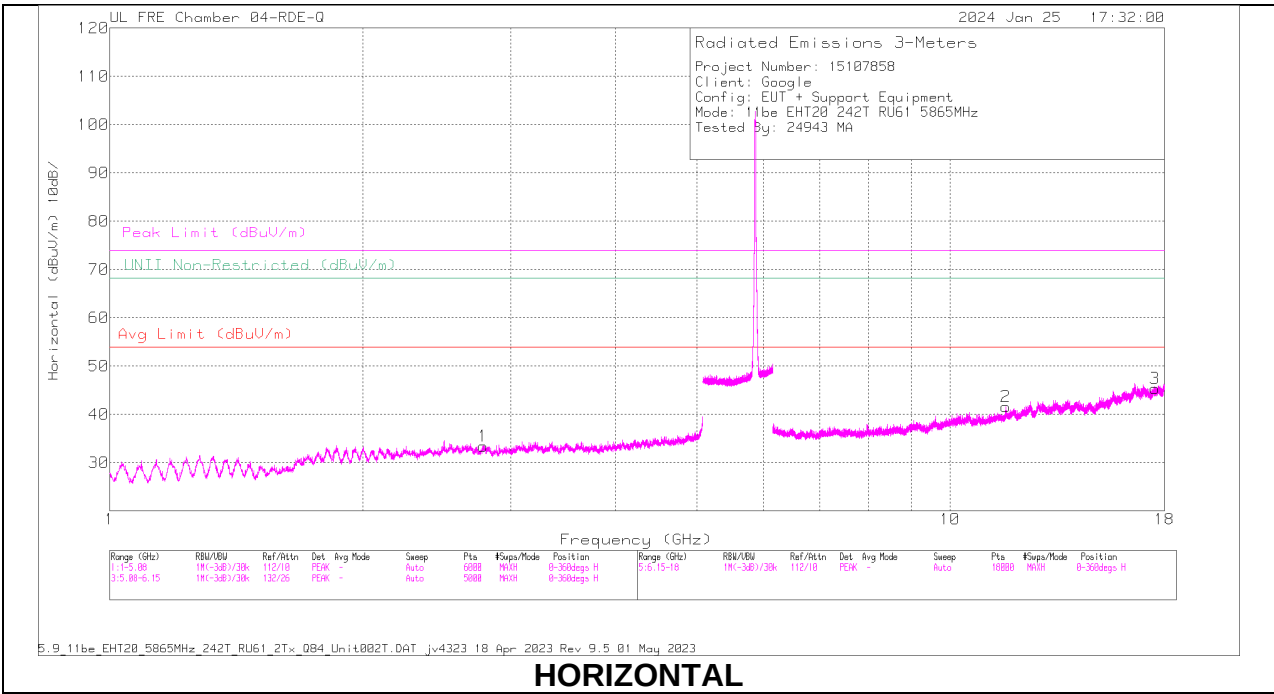

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.783021	58.65	PK-U	32.3	0	-47.44	43.51	-	-	74	-30.49	-	-	360	100	H
1	* ** 2.780523	47.02	ADR	32.3	.14	-47.46	32	54	-22	-	-	-	-	360	100	H
4	* ** 2.777659	58.52	PK-U	32.3	0	-47.44	43.38	-	-	74	-30.62	-	-	360	201	V
4	* ** 2.776619	46.95	ADR	32.3	.14	-47.45	31.94	54	-22.06	-	-	-	-	360	201	V
2	* ** 11.645964	55.27	PK-U	38.5	0	-43.72	50.05	-	-	74	-23.95	-	-	360	100	H
2	* ** 11.645936	43.78	ADR	38.5	.14	-43.74	38.68	54	-15.32	-	-	-	-	360	100	H
5	* ** 11.750459	55.18	PK-U	38.6	0	-43.73	50.05	-	-	74	-23.95	-	-	360	201	V
5	* ** 11.751786	43.43	ADR	38.6	.14	-43.68	38.49	54	-15.51	-	-	-	-	360	201	V
3	17.530554	43.04	ADR	41.2	.14	-40.85	43.53	-	-	-	-	-	-	360	100	H
3	17.530738	54.78	PK-U	41.2	0	-40.84	55.14	-	-	-	-	68.2	-13.06	360	100	H
6	17.632714	55.15	PK-U	41.4	0	-40.56	55.99	-	-	-	-	68.2	-12.21	360	200	V
6	17.633257	43.48	ADR	41.4	.14	-40.56	44.46	-	-	-	-	-	-	360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

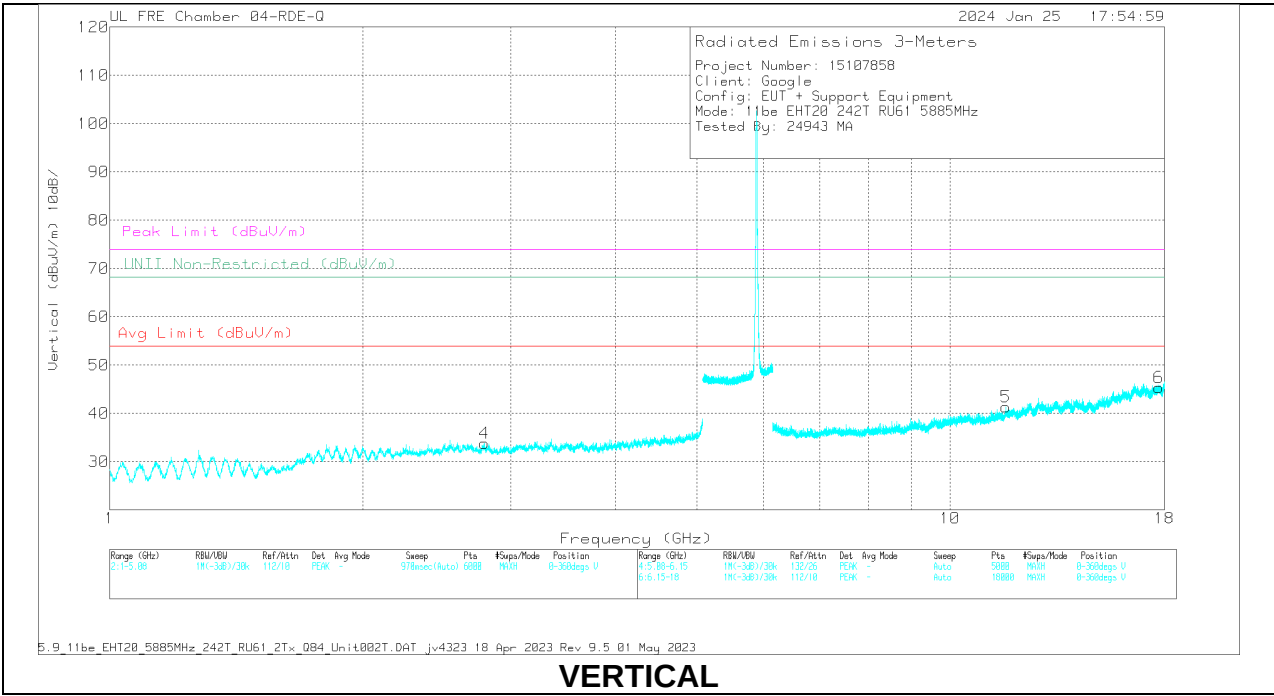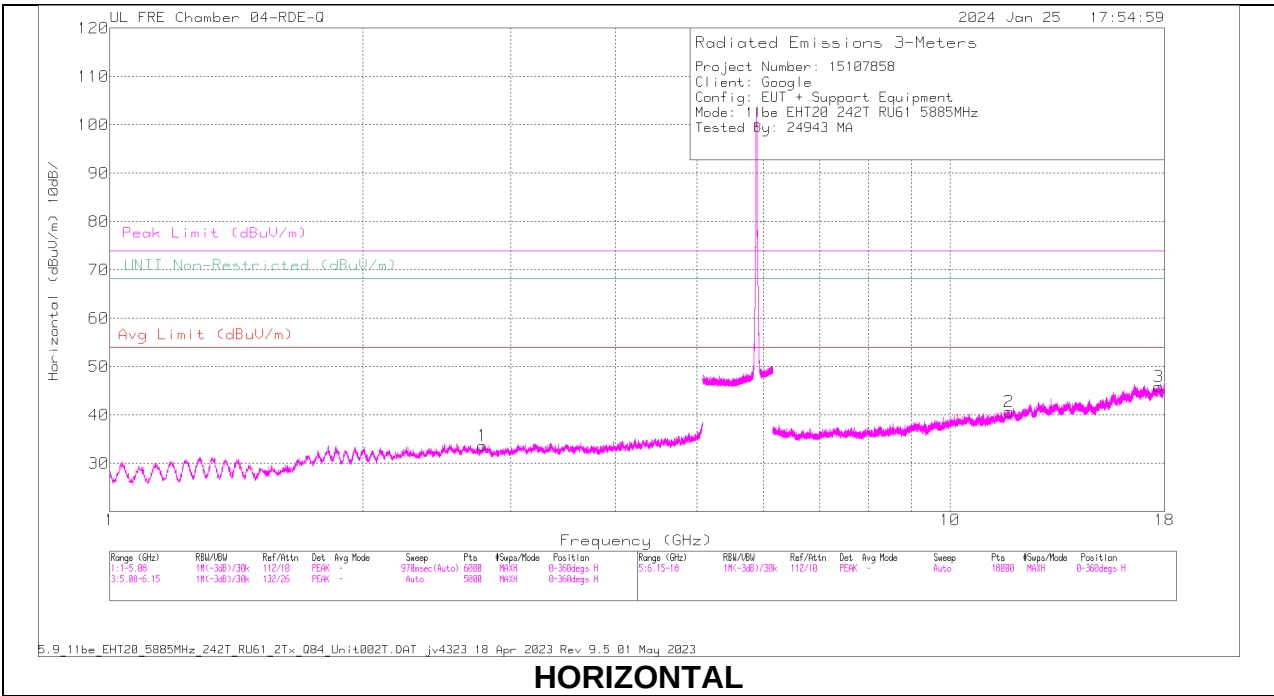

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.780367	59.13	PK-U	32.3	0	-47.47	43.96	-	-	74	-30.04	-	-	360	100	H
1	* ** 2.779413	46.94	ADR	32.3	.14	-47.49	31.89	54	-22.11	-	-	-	-	360	100	H
4	* ** 2.791028	58.3	PK-U	32.3	0	-47.36	43.24	-	-	74	-30.76	-	-	360	201	V
4	* ** 2.791242	47	ADR	32.3	.14	-47.36	32.08	54	-21.92	-	-	-	-	360	201	V
2	* ** 11.756932	56.53	PK-U	38.7	0	-43.56	51.67	-	-	74	-22.33	-	-	360	100	H
2	* ** 11.757149	43.6	ADR	38.7	.14	-43.55	38.89	54	-15.11	-	-	-	-	360	100	H
3	* ** 17.721959	54.8	PK-U	41.5	0	-40.19	56.11	-	-	74	-17.89	-	-	360	100	H
3	* ** 17.721619	43.31	ADR	41.5	.14	-40.17	44.78	54	-9.22	-	-	-	-	360	100	H
5	* ** 11.651535	55.47	PK-U	38.5	0	-43.66	50.31	-	-	74	-23.69	-	-	360	201	V
5	* ** 11.652271	43.57	ADR	38.5	.14	-43.66	38.55	54	-15.45	-	-	-	-	360	201	V
6	* ** 17.716682	54.97	PK-U	41.5	0	-40.11	56.36	-	-	74	-17.64	-	-	360	200	V
6	* ** 17.71726	43.01	ADR	41.5	.14	-40.11	44.54	54	-9.46	-	-	-	-	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.36. 802.11n HT40 MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

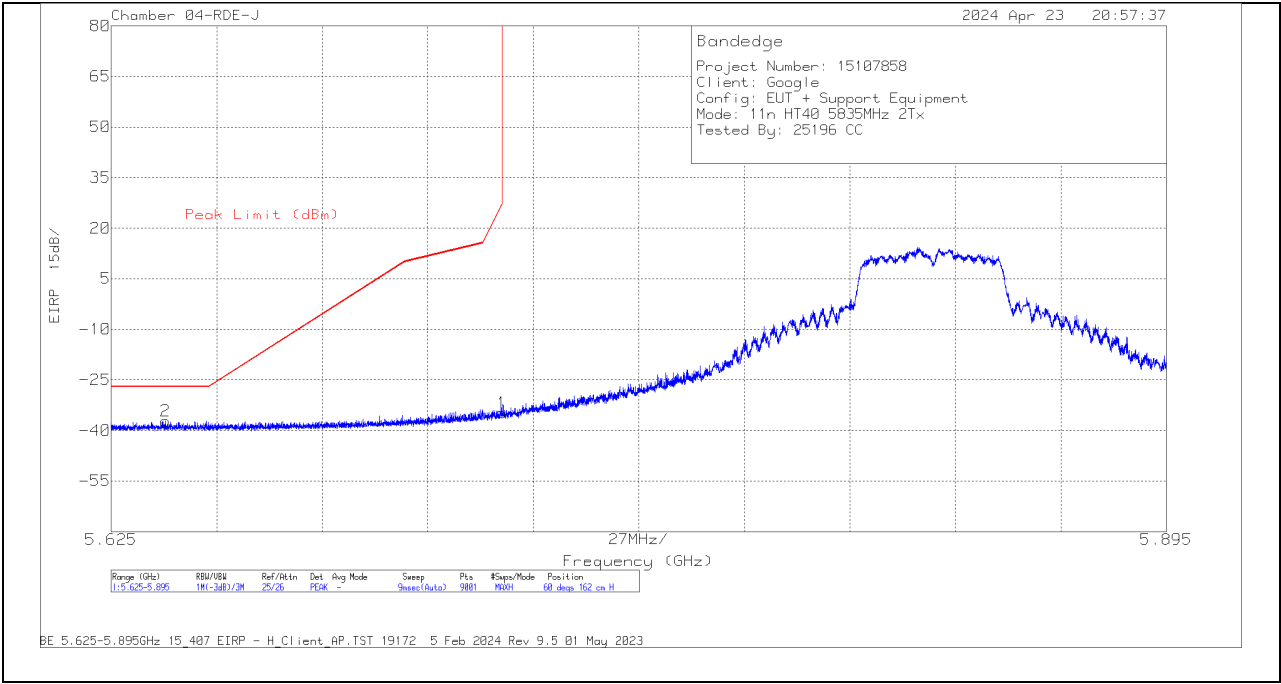


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63886	-49.58	Pk	34.6	-34	11.8	-37.18	-27	-10.18	60	162	H
1	5.725	-47.51	Pk	34.7	-33.8	11.8	-34.81	27	-61.81	60	162	H

PK - Peak detector

VERTICAL RESULT

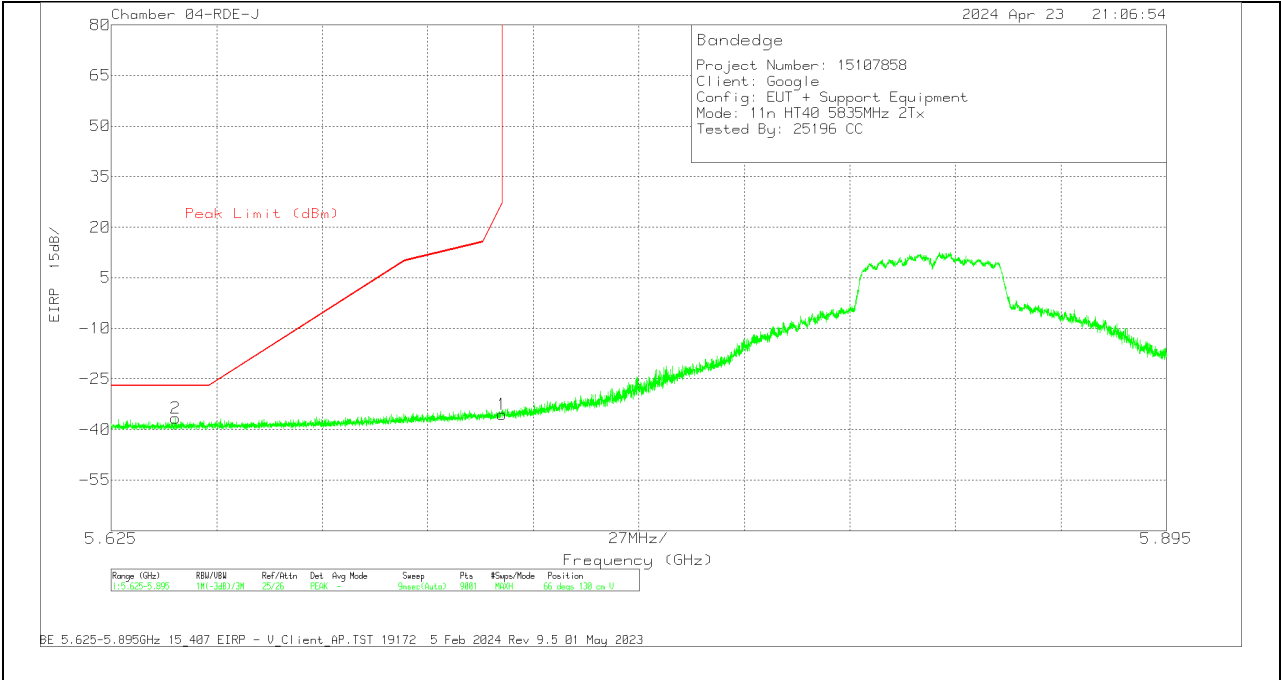


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64147	-48.97	Pk	34.6	-34	11.8	-36.57	-27	-9.57	66	130	V
1	5.725	-48.18	Pk	34.7	-33.8	11.8	-35.48	27	-62.48	66	130	V

PK - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

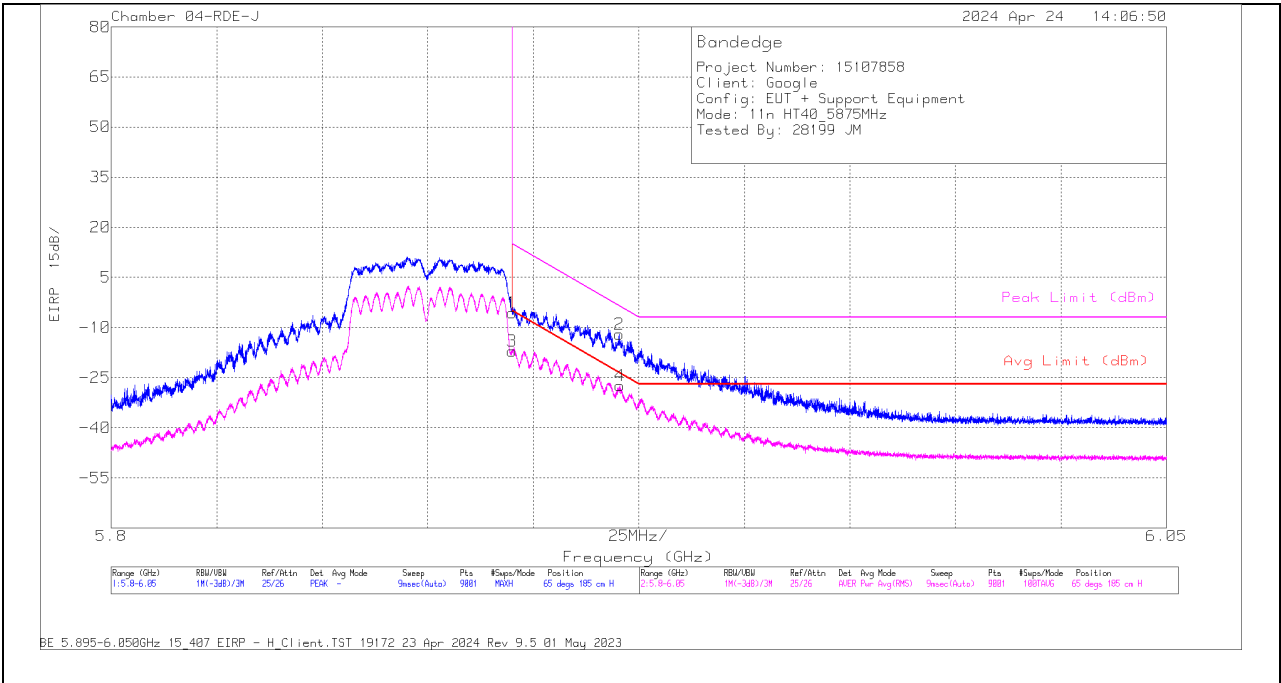


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	Marker
1	5.895	-18.75	Pk	34.9	11.8	-33.6	-5.65	-	-	15	-20.65	65	185	H	1
3	5.895	-30.15	RMS	34.9	11.8	-33.6	-17.05	-5	-12.05	-	-	65	185	H	3
2	5.920334	-25.36	Pk	35	11.8	-33.5	-12.06	-	-	-3.58	-8.48	65	185	H	2
4	5.920584	-40.75	RMS	35	11.8	-33.4	-27.35	-23.76	-3.59	-	-	65	185	H	4

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

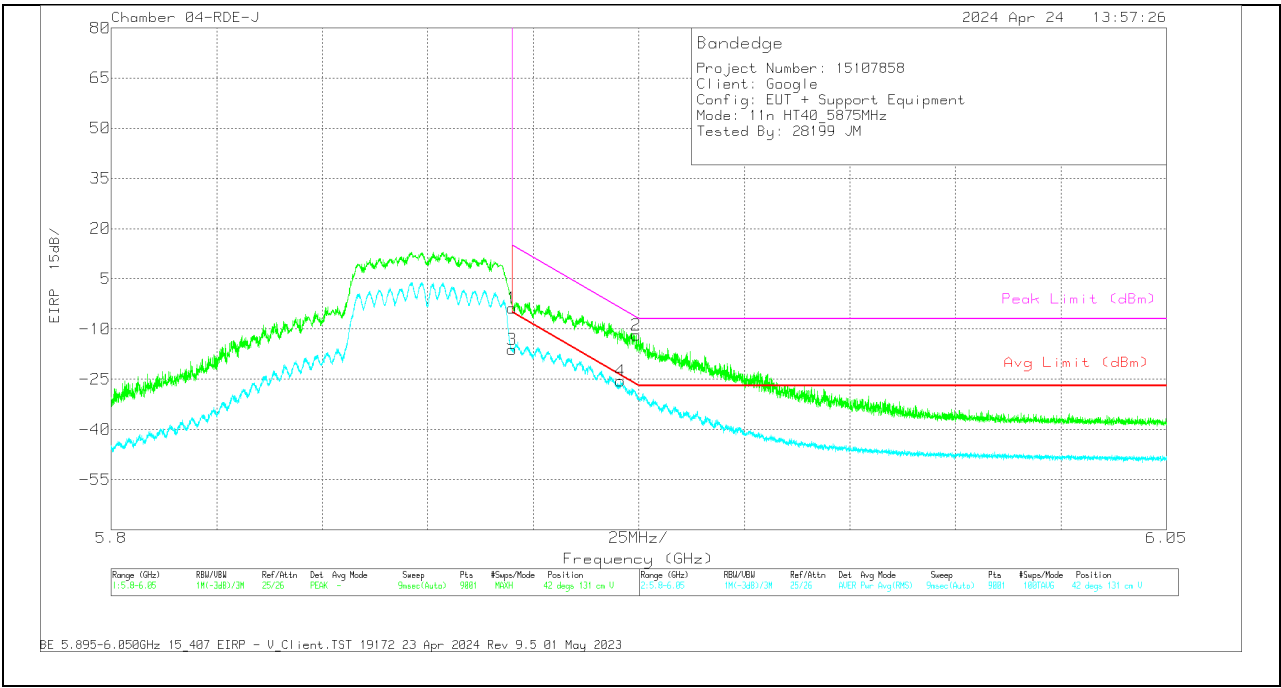



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	Marker
1	5.895	-16.78	Pk	34.9	11.8	-33.6	-3.68	-	-	15	-18.68	42	131	V	1
3	5.895	-29.29	RMS	34.9	11.8	-33.6	-16.19	-5	-11.19	-	-	42	131	V	3
4	5.920723	-38.87	RMS	35	11.8	-33.4	-25.47	-23.86	-1.61	-	-	42	131	V	4
2	5.924418	-25.15	Pk	35	11.8	-33.4	-11.75	-	-	-6.57	-5.18	42	131	V	2

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

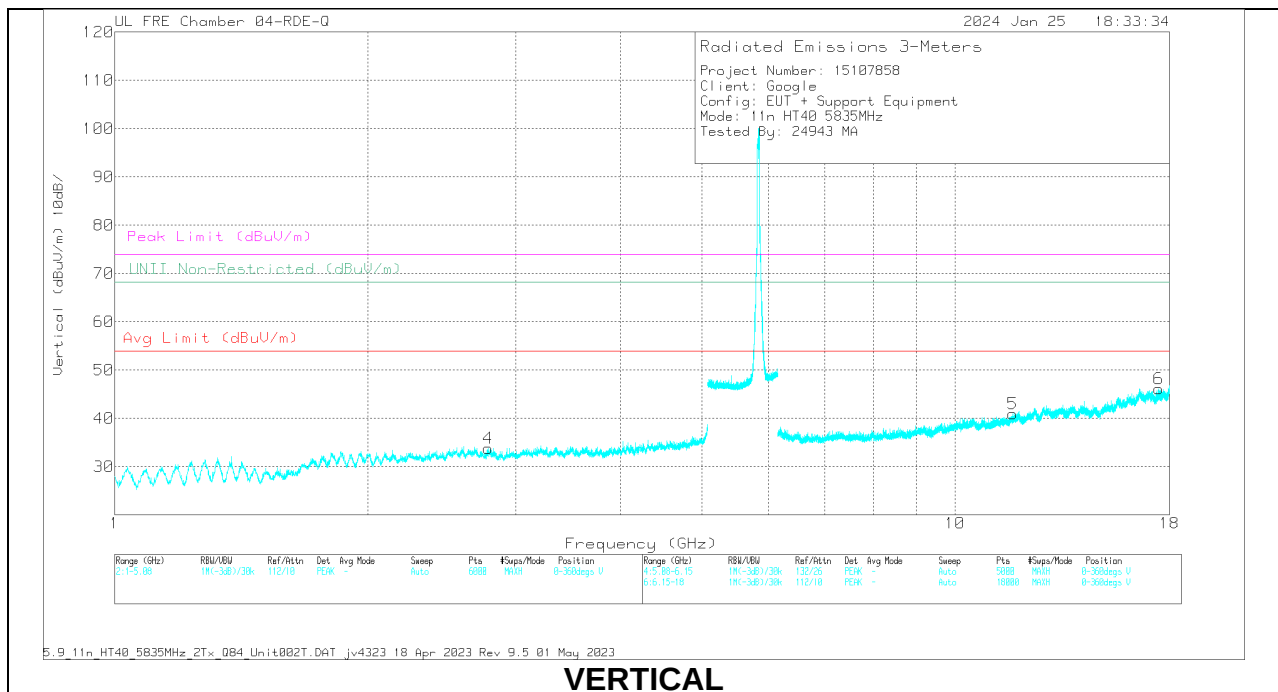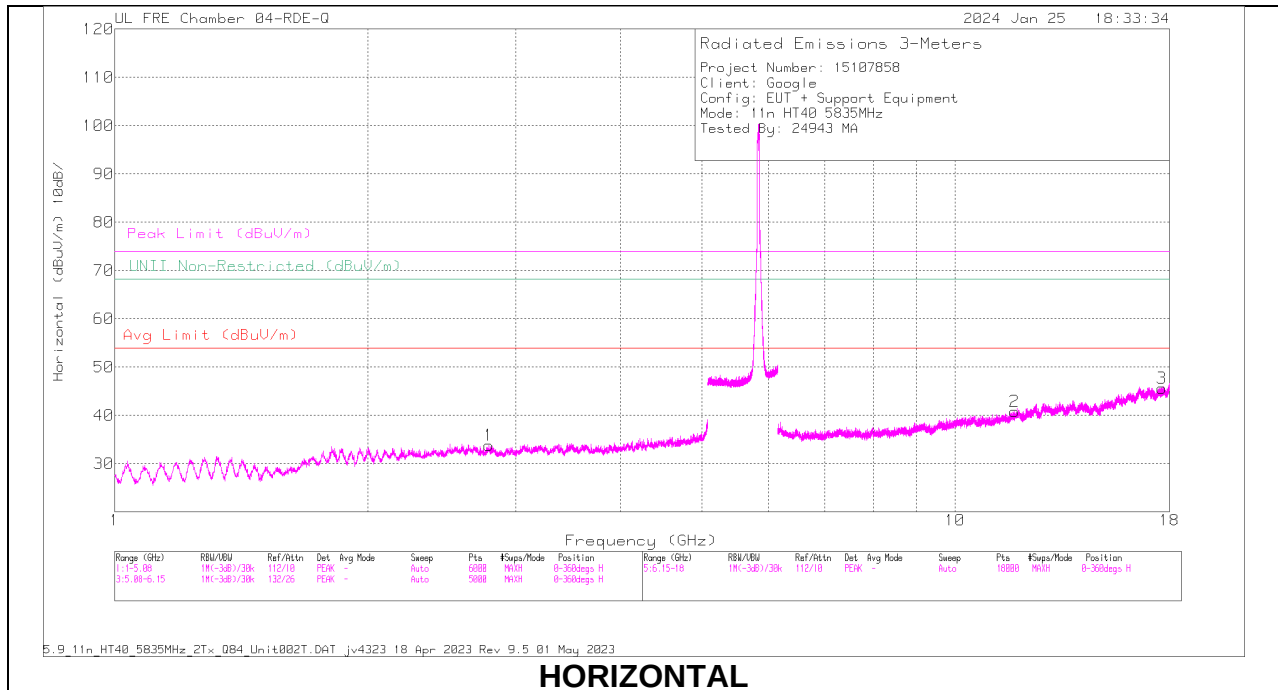

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.786329	58.62	PK-U	32.3	0	-47.43	43.49	-	-	74	-30.51	-	-	0	100	H
1	* ** 2.789013	47.06	ADR	32.3	0	-47.38	31.98	54	-22.02	-	-	-	-	0	100	H
3	* ** 2.781364	59.03	PK-U	32.3	0	-47.45	43.88	-	-	74	-30.12	-	-	0	201	V
3	* ** 2.782629	46.98	ADR	32.3	0	-47.45	31.83	54	-22.17	-	-	-	-	0	201	V
2	* ** 11.784328	54.87	PK-U	38.7	0	-43.52	50.05	-	-	74	-23.95	-	-	0	100	H
2	* ** 11.786017	43.65	ADR	38.7	0	-43.53	38.82	54	-15.18	-	-	-	-	0	100	H
5	* ** 11.709898	55.2	PK-U	38.6	0	-43.78	50.02	-	-	74	-23.98	-	-	0	201	V
5	* ** 11.711504	43.51	ADR	38.6	0	-43.77	38.34	54	-15.66	-	-	-	-	0	201	V
6	17.473787	42.8	ADR	41.2	0	-40.61	43.39	-	-	-	-	-	-	0	200	V
6	17.474391	54.63	PK-U	41.2	0	-40.6	55.23	-	-	-	-	68.2	-12.97	0	200	V
3	17.640336	56.33	PK-U	41.4	0	-40.59	57.14	-	-	-	-	68.2	-11.06	0	100	H
3	17.642514	43.34	ADR	41.4	0	-40.57	44.17	-	-	-	-	-	-	0	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

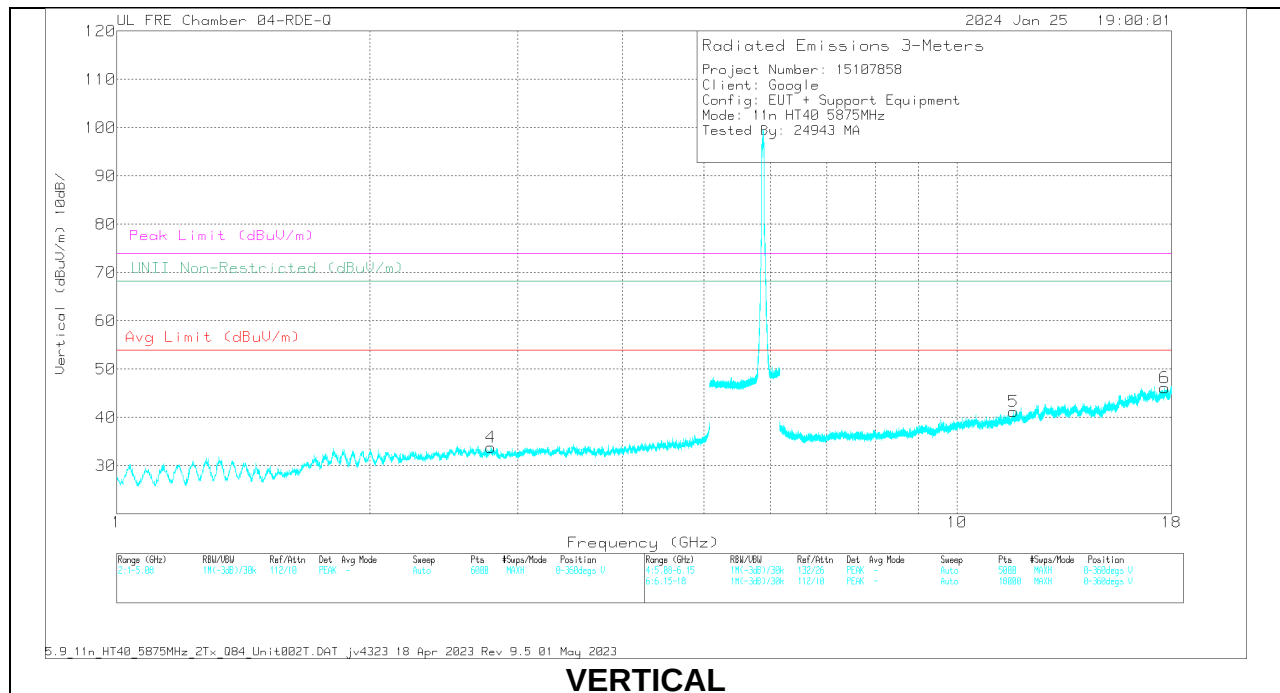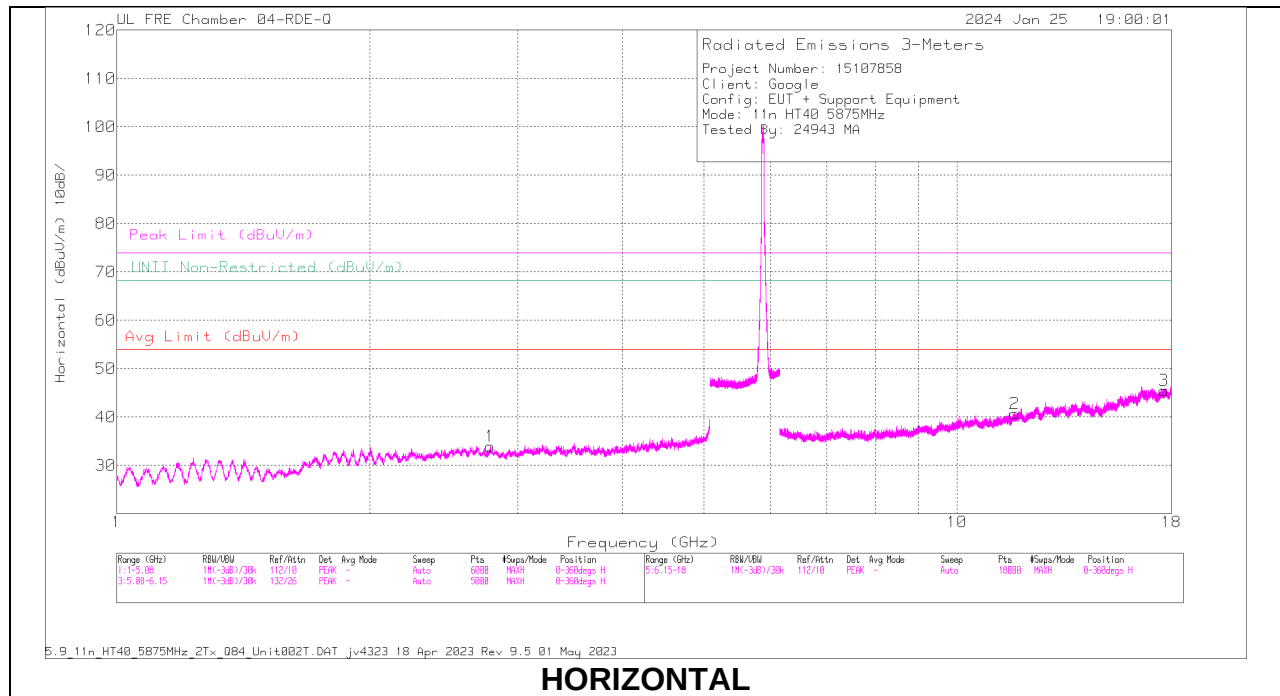

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.783708	58.53	PK-U	32.3	0	-47.45	43.38	-	-	74	-30.62	-	-	0	100	H
1	* ** 2.783874	47.07	ADR	32.3	0	-47.45	31.92	54	-22.08	-	-	-	-	0	100	H
4	* ** 2.787612	58.56	PK-U	32.3	0	-47.44	43.42	-	-	74	-30.58	-	-	0	100	V
4	* ** 2.786907	47	ADR	32.3	0	-47.44	31.86	54	-22.14	-	-	-	-	0	100	V
2	* ** 11.713144	55.1	PK-U	38.6	0	-43.76	49.94	-	-	74	-24.06	-	-	0	100	H
2	* ** 11.710457	43.61	ADR	38.6	0	-43.76	38.43	54	-15.57	-	-	-	-	0	100	H
5	* ** 11.675249	55.49	PK-U	38.6	0	-43.62	50.47	-	-	74	-23.53	-	-	0	201	V
5	* ** 11.676199	43.41	ADR	38.6	0	-43.65	38.36	54	-15.64	-	-	-	-	0	201	V
3	17.633964	43.35	ADR	41.4	0	-40.55	44.2	-	-	-	-	-	-	0	100	H
3	17.63436	54.54	PK-U	41.4	0	-40.55	55.39	-	-	-	-	68.2	-12.81	0	100	H
6	17.676205	43.29	ADR	41.5	0	-40.14	44.65	-	-	-	-	-	-	0	200	V
6	17.676832	54.6	PK-U	41.5	0	-40.12	55.98	-	-	-	-	68.2	-12.22	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.37. 802.11be EHT40 484T MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

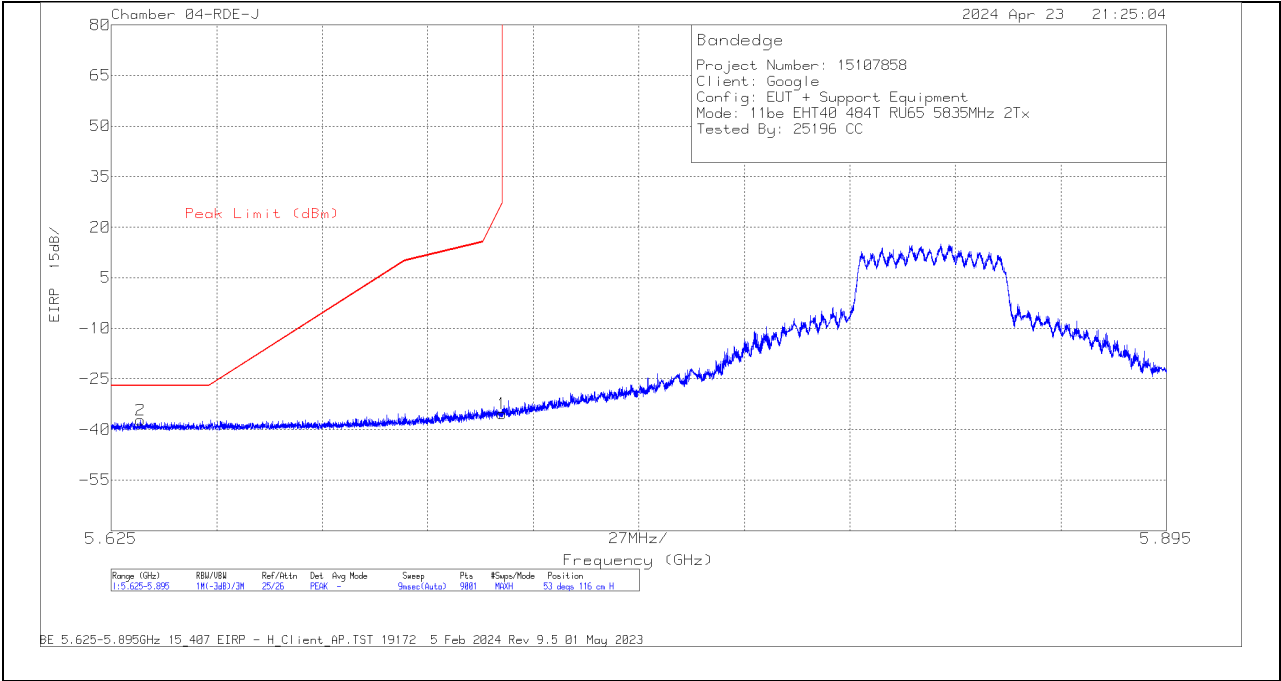


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63256	-49.66	Pk	34.6	-34	11.8	-37.26	-27	-10.26	53	116	H
1	5.725	-47.99	Pk	34.7	-33.8	11.8	-35.29	27	-62.29	53	116	H

Pk - Peak detector

VERTICAL RESULT

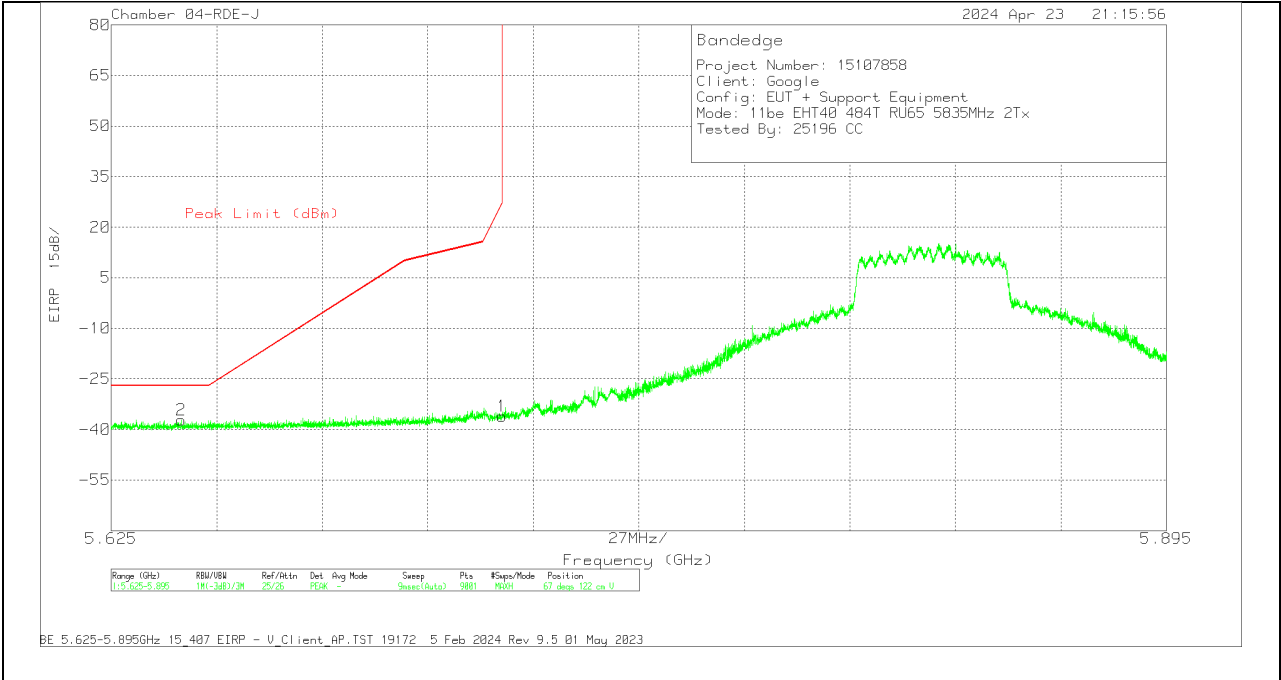


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64291	-49.53	Pk	34.6	-34	11.8	-37.13	-27	-10.13	67	122	V
1	5.725	-48.77	Pk	34.7	-33.8	11.8	-36.07	27	-63.07	67	122	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

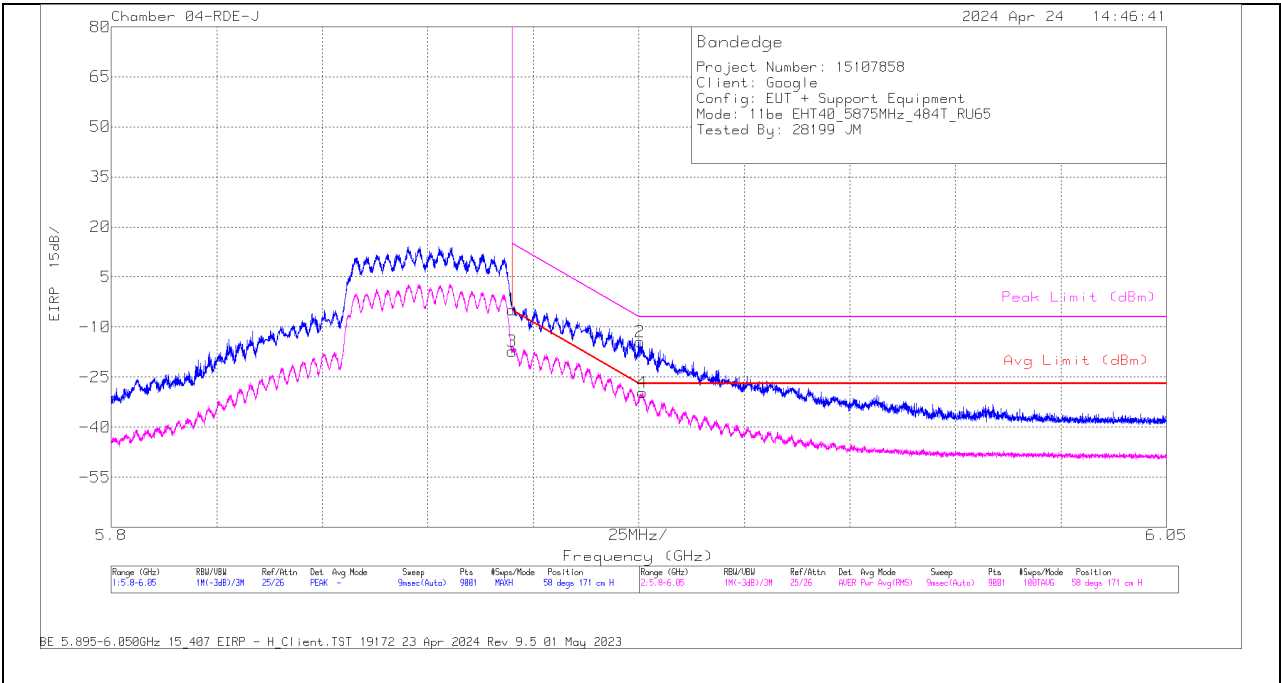


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Chl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-17.96	Pk	34.9	11.8	-33.6	0	-4.86	-	-	15	-19.86	58	171	H
3	5.895	-30.64	RMS	34.9	11.8	-33.6	.28	-17.26	-5	-12.26	-	-	58	171	H
2	5.925251	-27.81	Pk	35	11.8	-33.4	0	-14.41	-	-	-7	-7.41	58	171	H
4	5.92589	-43.32	RMS	35	11.8	-33.4	.28	-29.64	-27	-2.64	-	-	58	171	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

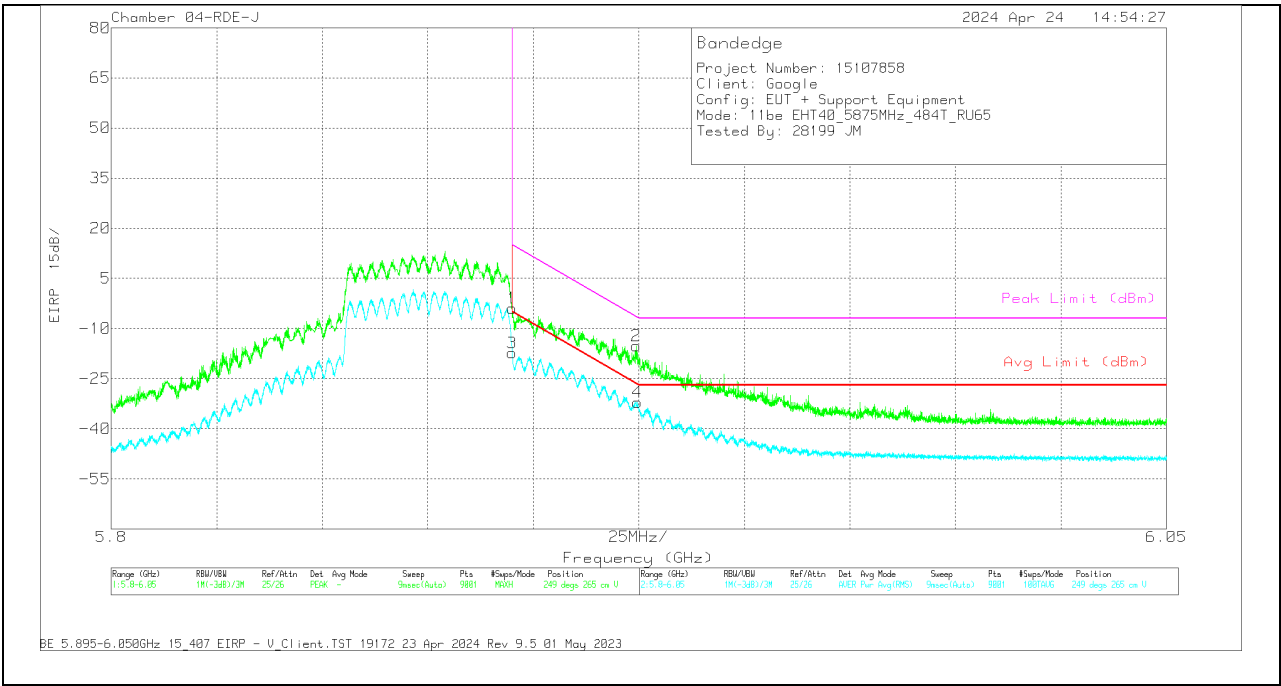



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-17.07	PK	34.9	11.8	-33.6	0	-3.97	-	-	15	-18.97	249	265	V
3	5.895	-30.71	RMS	34.9	11.8	-33.6	.28	-17.33	-5	-12.33	-	-	249	265	V
2	5.924445	-28.64	PK	35	11.8	-33.4	0	-15.24	-	-	-6.59	-8.65	249	265	V
4	5.924612	-45.79	RMS	35	11.8	-33.4	.28	-32.11	-26.72	-5.39	-	-	249	265	V

PK - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

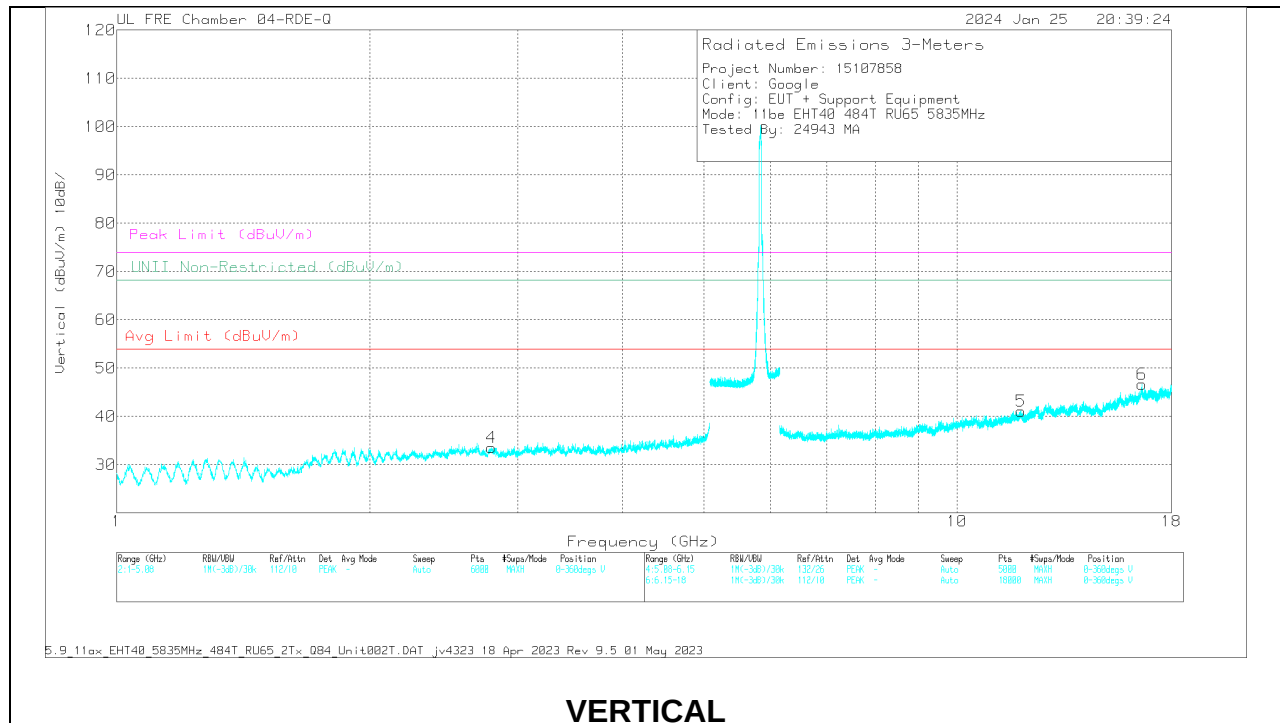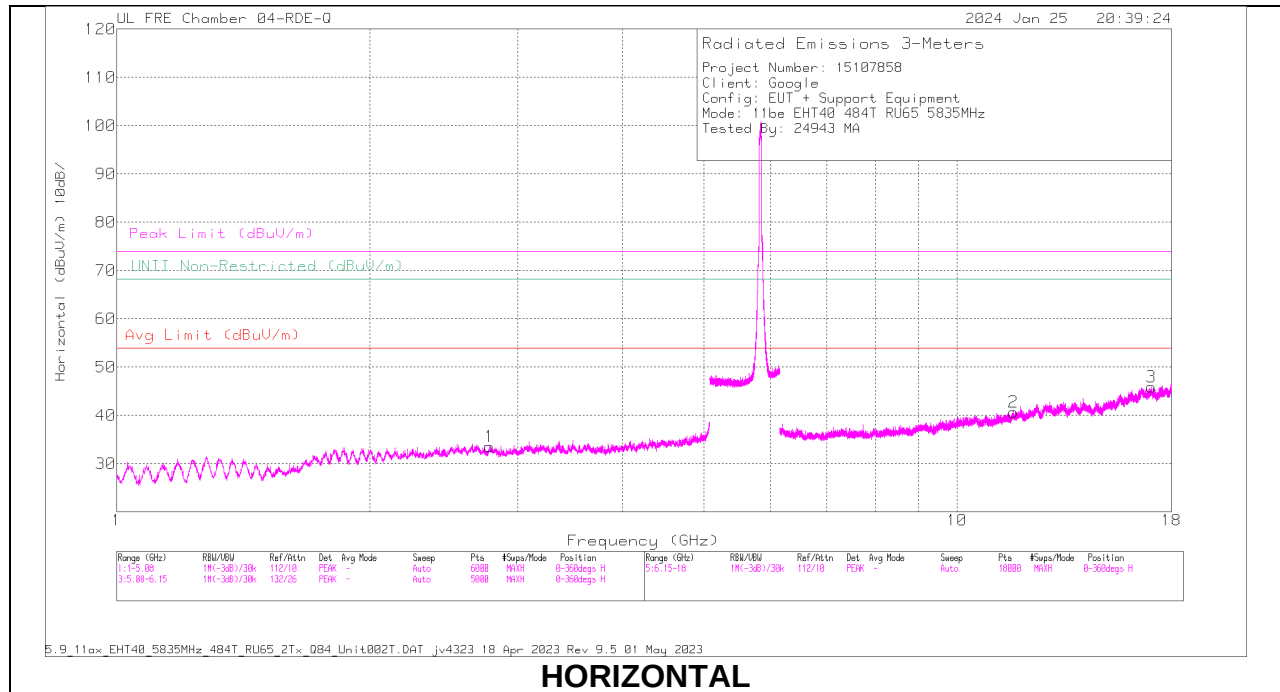

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.778811	58.56	PK-U	32.3	0	-47.48	43.38	-	-	74	-30.62	-	-	0	100	H
1	* ** 2.779277	46.96	ADR	32.3	.28	-47.49	32.05	54	-21.95	-	-	-	-	0	100	H
4	* ** 2.792539	58.48	PK-U	32.3	0	-47.36	43.42	-	-	74	-30.58	-	-	0	201	V
4	* ** 2.793823	46.95	ADR	32.3	.28	-47.33	32.2	54	-21.8	-	-	-	-	0	201	V
2	* ** 11.680969	55.75	PK-U	38.6	0	-43.68	50.67	-	-	74	-23.33	-	-	0	100	H
2	* ** 11.679451	43.47	ADR	38.6	.28	-43.69	38.66	54	-15.34	-	-	-	-	0	100	H
5	* ** 11.91637	55.68	PK-U	38.8	0	-42.85	51.63	-	-	74	-22.37	-	-	0	200	V
5	* ** 11.915376	43.72	ADR	38.8	.28	-42.87	39.93	54	-14.07	-	-	-	-	0	200	V
6	16.596764	55.32	PK-U	41.6	0	-41.36	55.56	-	-	-	-	68.2	-12.64	0	200	V
6	16.597356	43.85	ADR	41.6	.28	-41.38	44.35	-	-	-	-	-	-	0	200	V
3	17.039707	55.05	PK-U	41.4	0	-41.33	55.12	-	-	-	-	68.2	-13.08	0	100	H
3	17.041469	43.64	ADR	41.4	.28	-41.32	44	-	-	-	-	-	-	0	100	H



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

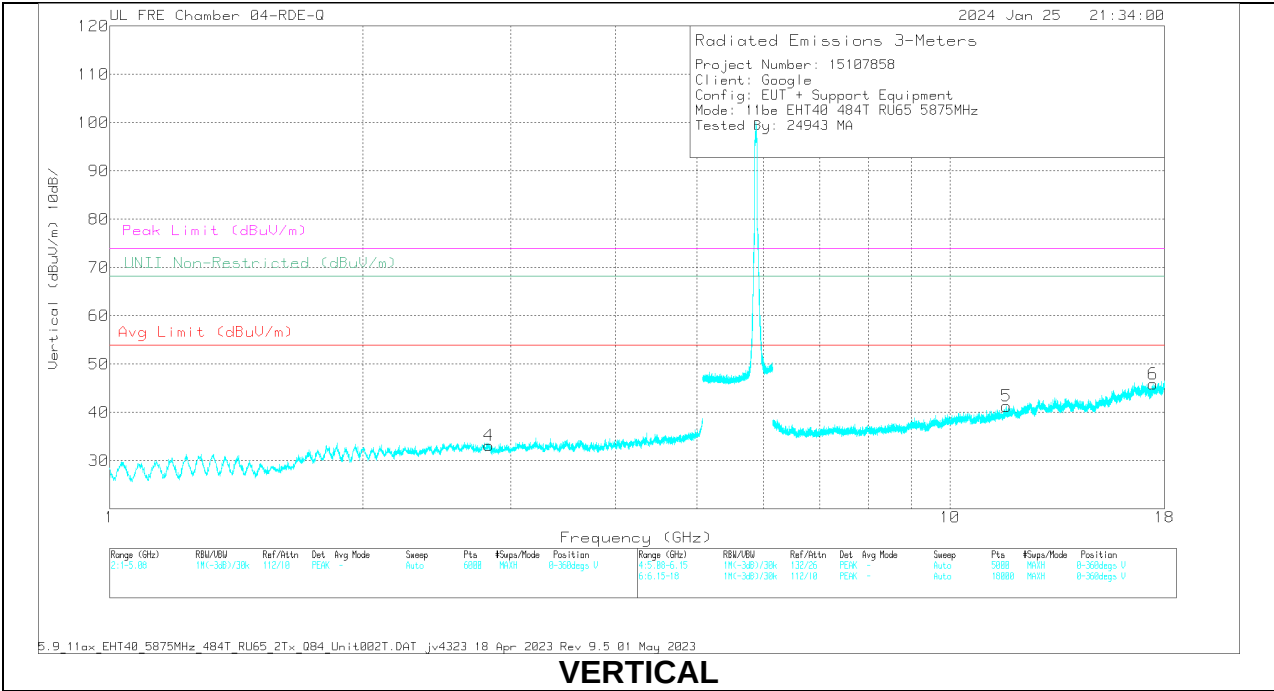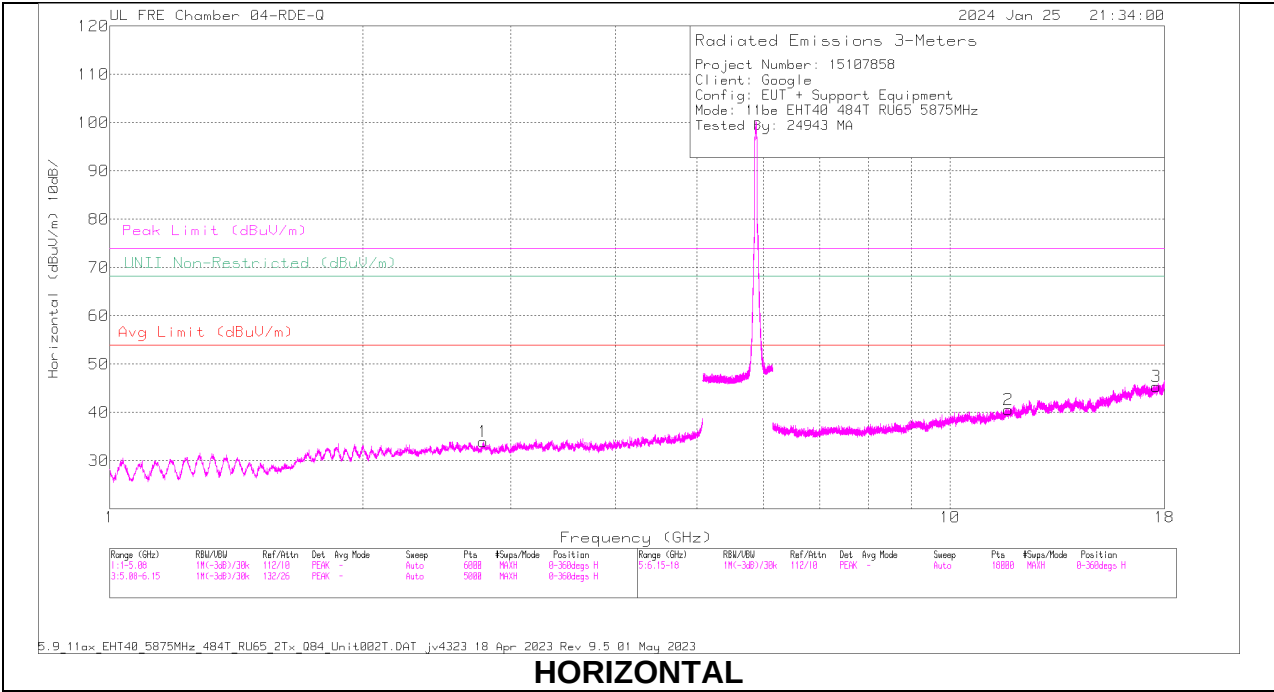

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dBm)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.781408	58.6	PK-U	32.3	0	-47.45	43.45	-	-	74	-30.55	-	-	0	100	H
1	* ** 2.781818	46.89	ADR	32.3	.28	-47.46	32.01	54	-21.99	-	-	-	-	0	100	H
4	* ** 2.824094	58.11	PK-U	32.2	0	-47.04	43.27	-	-	74	-30.73	-	-	0	201	V
4	* ** 2.826979	46.49	ADR	32.2	.28	-47.1	31.67	54	-22.13	-	-	-	-	0	201	V
2	* ** 11.743609	55.2	PK-U	38.6	0	-43.78	50.02	-	-	74	-23.98	-	-	0	100	H
2	* ** 11.746462	43.53	ADR	38.6	.28	-43.78	38.63	54	-15.37	-	-	-	-	0	100	H
5	* ** 11.672527	54.88	PK-U	38.6	0	-43.6	49.88	-	-	74	-24.12	-	-	0	201	V
5	* ** 11.673527	43.51	ADR	38.6	.28	-43.6	38.79	54	-15.21	-	-	-	-	0	201	V
6	17.440597	54.48	PK-U	41.1	0	-40.39	55.19	-	-	-	-	68.2	-13.01	0	200	V
6	17.443284	42.83	ADR	41.1	.28	-40.27	43.94	-	-	-	-	-	-	0	200	V
3	17.613499	54.44	PK-U	41.4	0	-40.78	55.06	-	-	-	-	68.2	-13.14	0	100	H
3	17.615404	43.12	ADR	41.4	.28	-40.77	44.03	-	-	-	-	-	-	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.38. 802.11ac VHT80 MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (5855MHz LOW EDGE)

HORIZONTAL RESULT

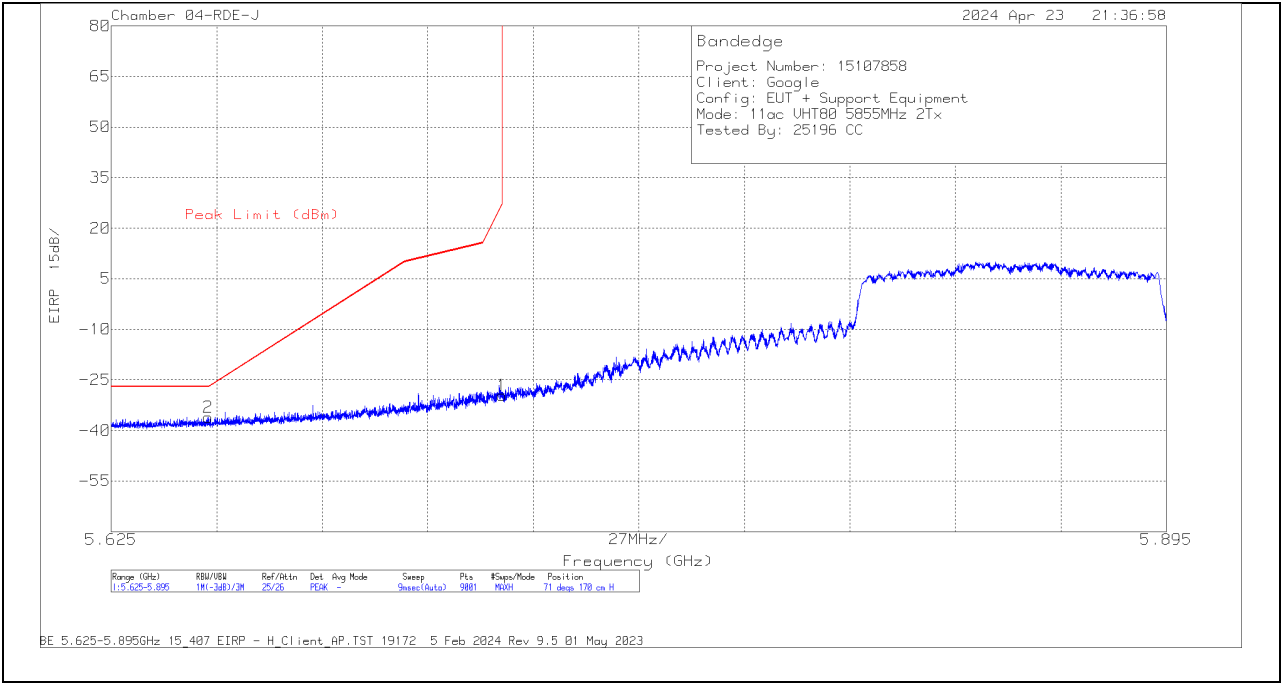


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64978	-48.5	Pk	34.6	-34	11.8	-36.1	-27	-9.1	71	170	H
1	5.725	-42.23	Pk	34.7	-33.8	11.8	-29.53	27	-56.53	71	170	H

PK - Peak detector

VERTICAL RESULT

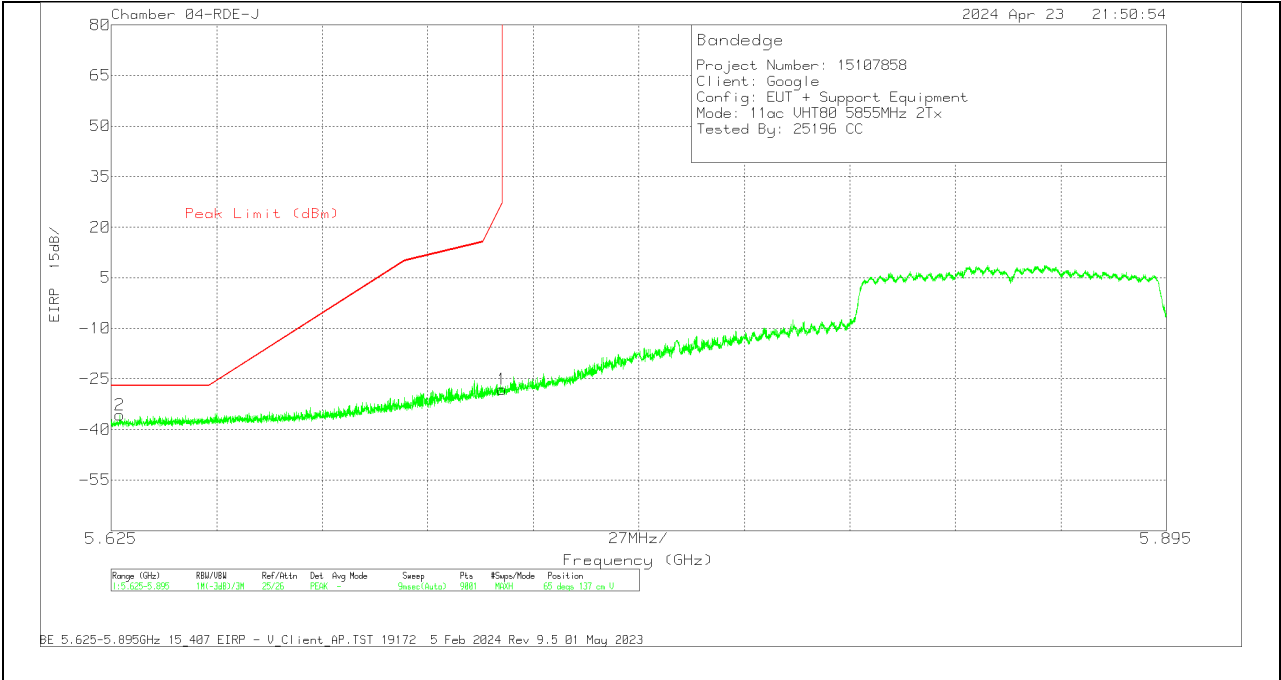


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62722	-48.15	Pk	34.6	-34	11.8	-35.75	-27	-8.75	65	137	V
1	5.725	-40.79	Pk	34.7	-33.8	11.8	-28.09	27	-55.09	65	137	V

PK - Peak detector

BANDEGE (5855MHz HIGH EDGE)

HORIZONTAL RESULT

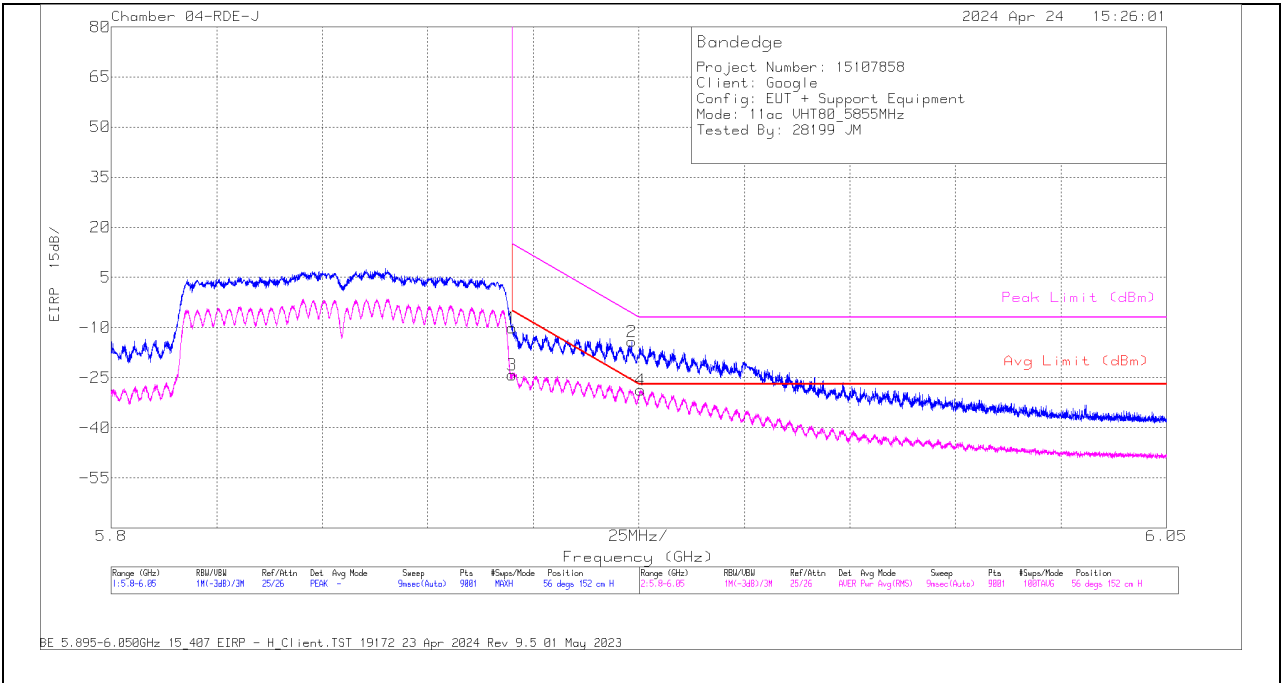


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-23.19	Pk	34.9	11.8	-33.6	0	-10.09	-	-	15	-25.09	56	152	H
3	5.895	-37.36	RMS	34.9	11.8	-33.6	.1	-24.16	-5	-19.16	-	-	56	152	H
2	5.923334	-27.56	Pk	35	11.8	-33.4	0	-14.16	-	-	-5.78	-8.38	56	152	H
4	5.925473	-42.23	RMS	35	11.8	-33.4	.1	-28.73	-27	-1.73	-	-	56	152	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

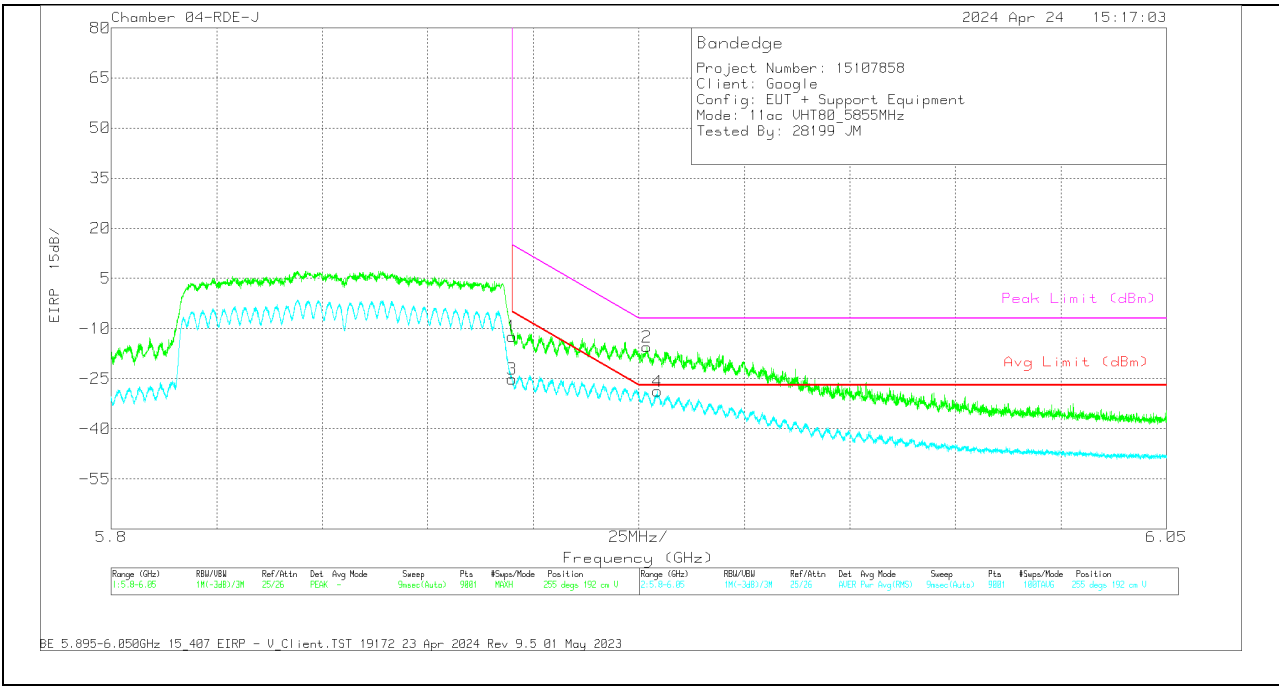



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-25.43	PK	34.9	11.8	-33.6	0	-12.33	-	-	15	-27.33	255	192	V
3	5.895	-38.36	RMS	34.9	11.8	-33.6	.1	-25.16	-5	-20.16	-	-	255	192	V
2	5.926862	-28.88	PK	35	11.8	-33.4	0	-15.48	-	-	-7	-8.48	255	192	V
4	5.929445	-42.3	RMS	35	11.8	-33.4	.1	-28.8	-27	-1.8	-	-	255	192	V

PK - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

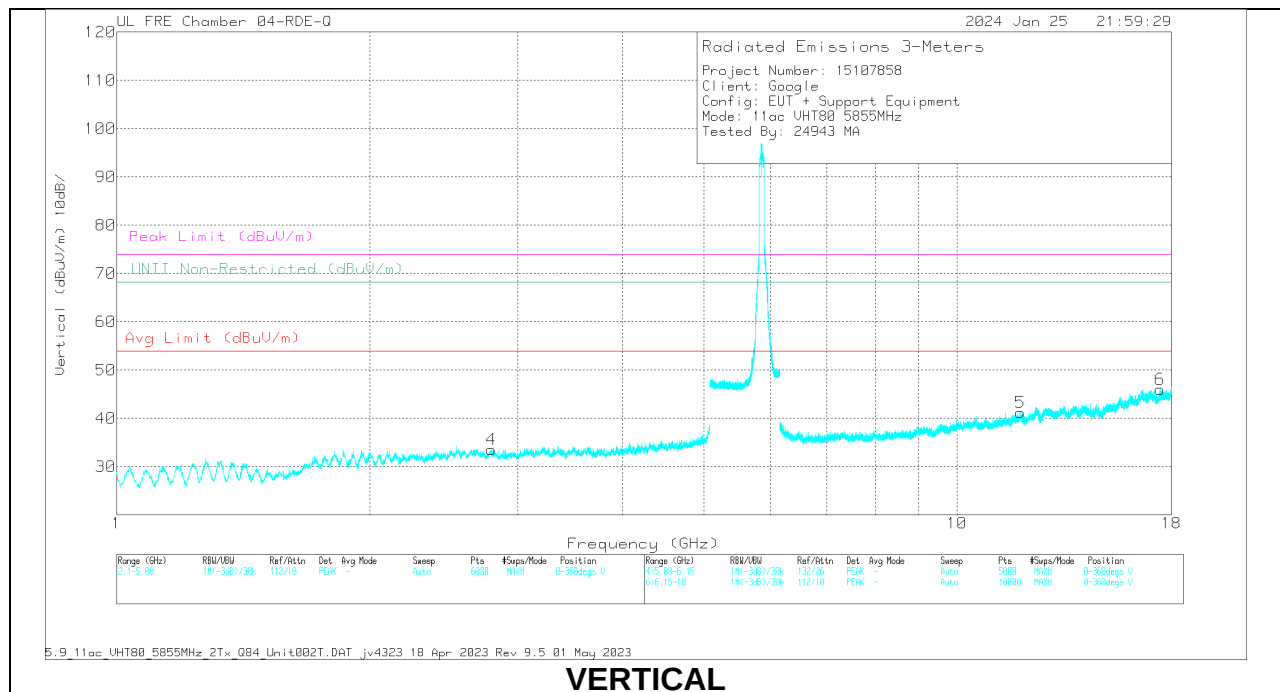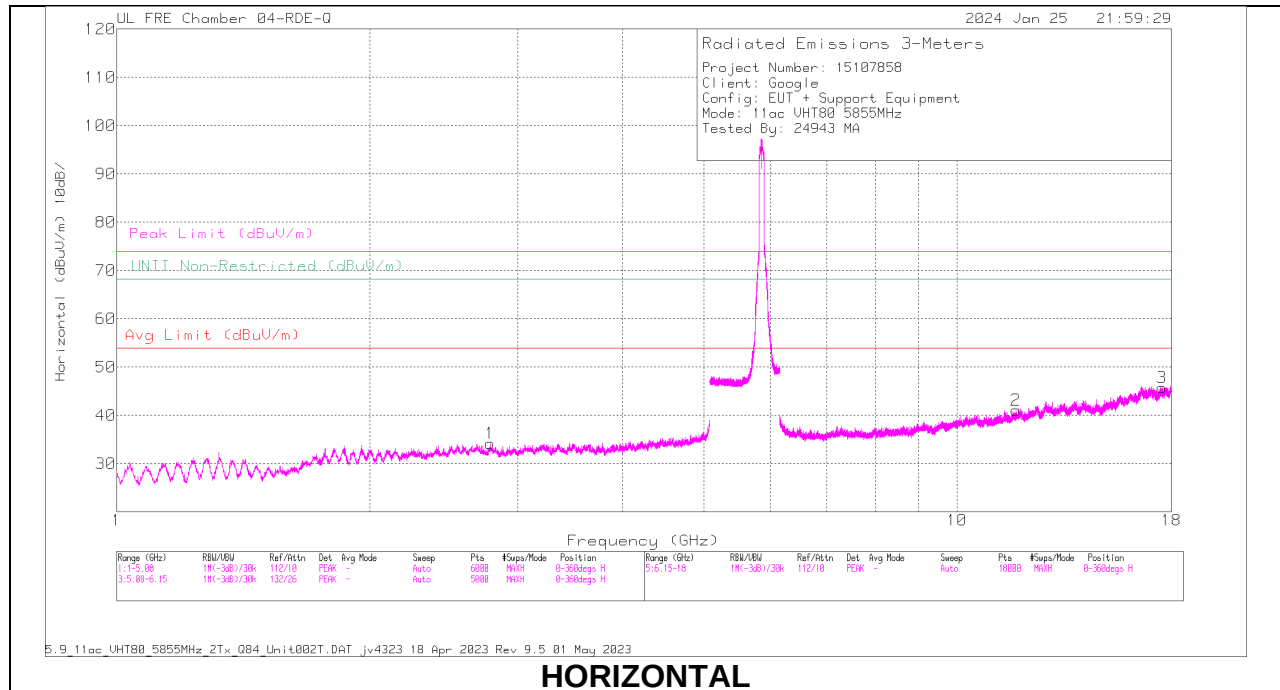

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	DCCF (dB)	Gain/Loss (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 2.781367	58.52	PK-U	32.3	0	-47.45	43.37	-	-	74	-30.63	-	-	0	100	H
	* ** 2.781332	47.17	ADR	32.3	.1	-47.45	32.12	54	-21.88	-	-	-	-	0	100	H
4	* ** 2.79158	58.6	PK-U	32.3	0	-47.35	43.55	-	-	74	-30.45	-	-	0	201	V
	* ** 2.790828	46.94	ADR	32.3	.1	-47.37	31.97	54	-22.03	-	-	-	-	0	201	V
2	* ** 11.762487	55.21	PK-U	38.7	0	-43.53	50.38	-	-	74	-23.62	-	-	0	100	H
	* ** 11.76232	43.44	ADR	38.7	.1	-43.52	38.72	54	-15.28	-	-	-	-	0	100	H
5	* ** 11.901142	55.37	PK-U	38.8	0	-43.02	51.15	-	-	74	-22.85	-	-	0	201	V
	* ** 11.897951	43.73	ADR	38.8	.1	-43.09	39.54	54	-14.46	-	-	-	-	0	201	V
6	17.452504	42.73	ADR	41.1	.1	-40.42	43.51	-	-	-	-	-	-	0	200	V
	17.453717	54.5	PK-U	41.2	0	-40.42	55.28	-	-	-	-	68.2	-12.92	0	200	V
3	17.536687	54.61	PK-U	41.3	0	-40.78	55.13	-	-	-	-	68.2	-13.07	0	100	H
	17.537057	43.24	ADR	41.3	.1	-40.79	43.85	-	-	-	-	-	-	0	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.39. 802.11be EHT80 996T MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (5855MHz LOW EDGE)

HORIZONTAL RESULT

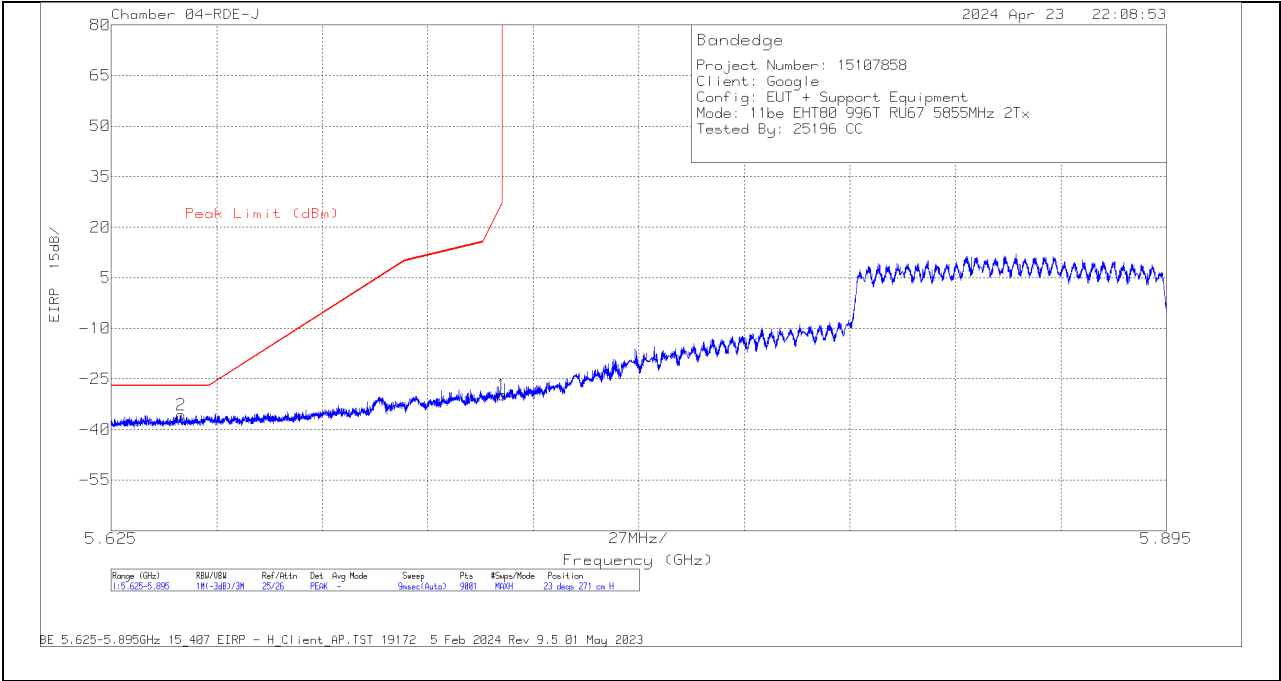


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64285	-48.12	Pk	34.6	-34	11.8	-35.72	-27	-8.72	23	271	H
1	5.725	-42.5	Pk	34.7	-33.8	11.8	-29.8	27	-56.8	23	271	H

Pk - Peak detector

VERTICAL RESULT

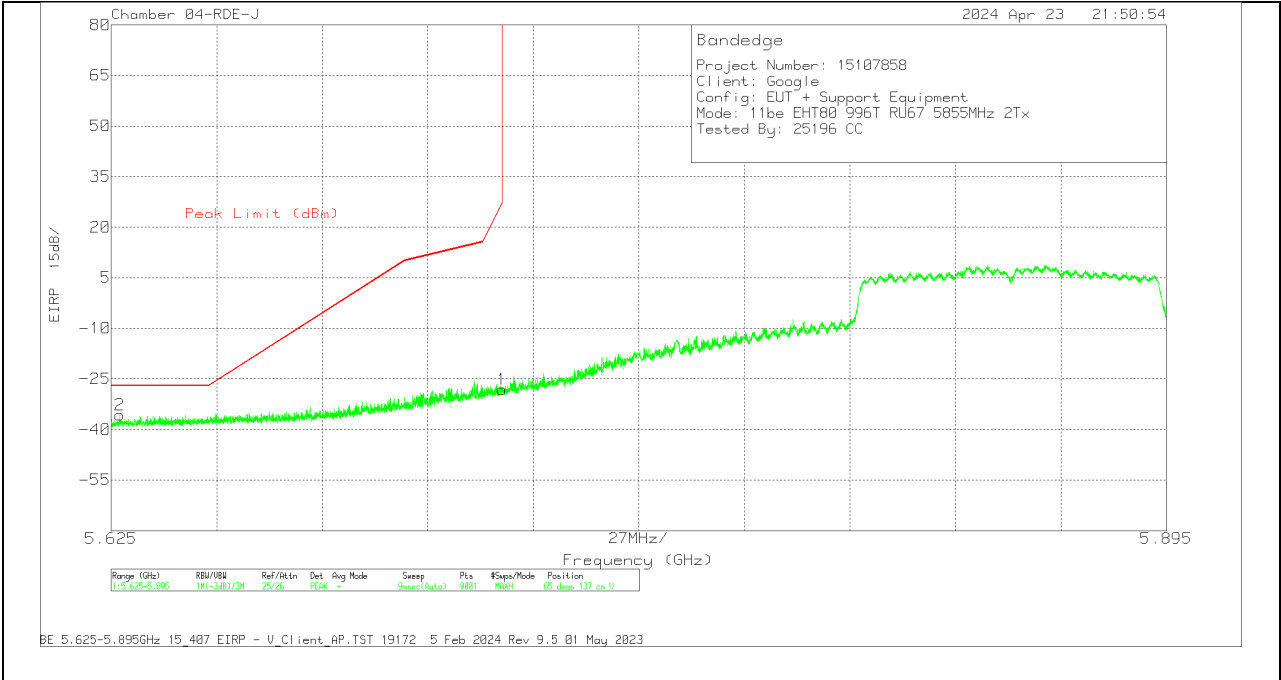

Bandedge
Project Number: 15107858
Client: Google
Config: EUT + Support Equipment
Mode: 11be EHT80 996T RU67 5855MHz 2Tx
Tested By: 25196 CC


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62722	-48.15	Pk	34.6	-34	11.8	-35.75	-27	-8.75	65	137	V
1	5.725	-40.79	Pk	34.7	-33.8	11.8	-28.09	27	-55.09	65	137	V

Pk - Peak detector

BANDEGE (5855MHz HIGH EDGE)

HORIZONTAL RESULT

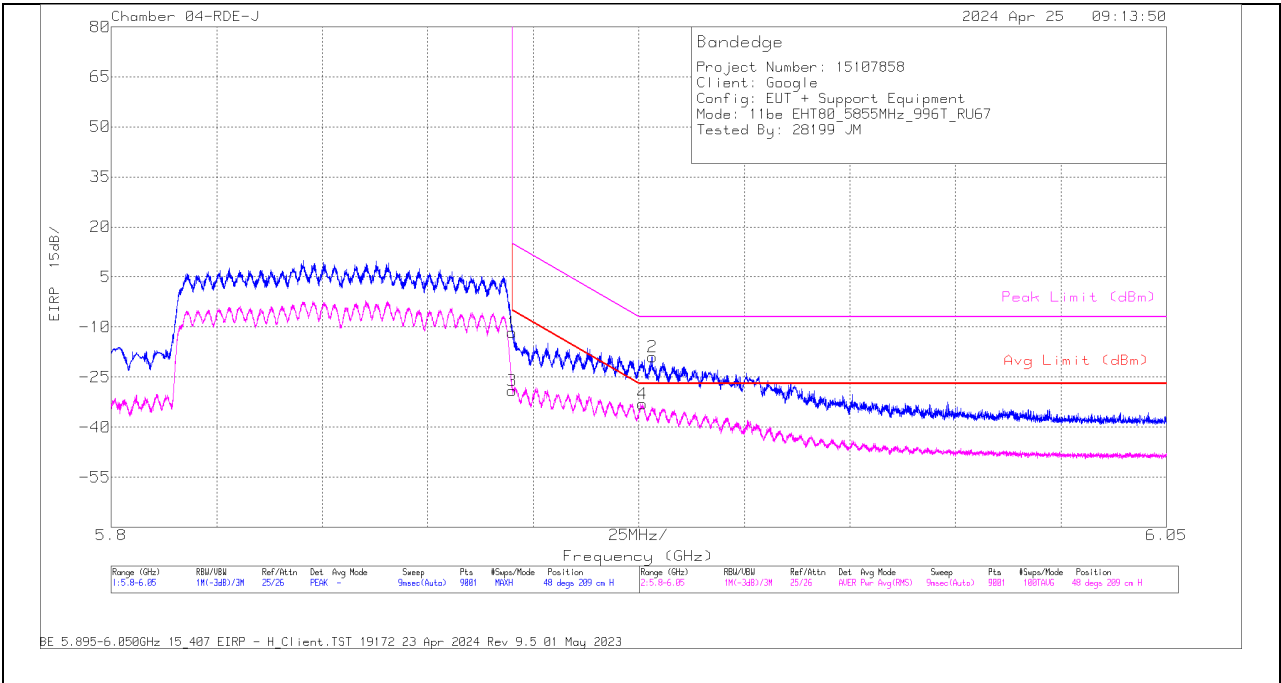


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Chl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-24.68	Pk	34.9	11.8	-33.6	0	-11.58	-	-	15	-26.58	48	209	H
3	5.895	-42.59	RMS	34.9	11.8	-33.6	.48	-29.01	-5	-24.01	-	-	48	209	H
4	5.92589	-46.87	RMS	35	11.8	-33.4	.48	-32.99	-27	-5.99	-	-	48	209	H
2	5.928251	-32.33	Pk	35	11.8	-33.4	0	-18.93	-	-	-7	-11.93	48	209	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

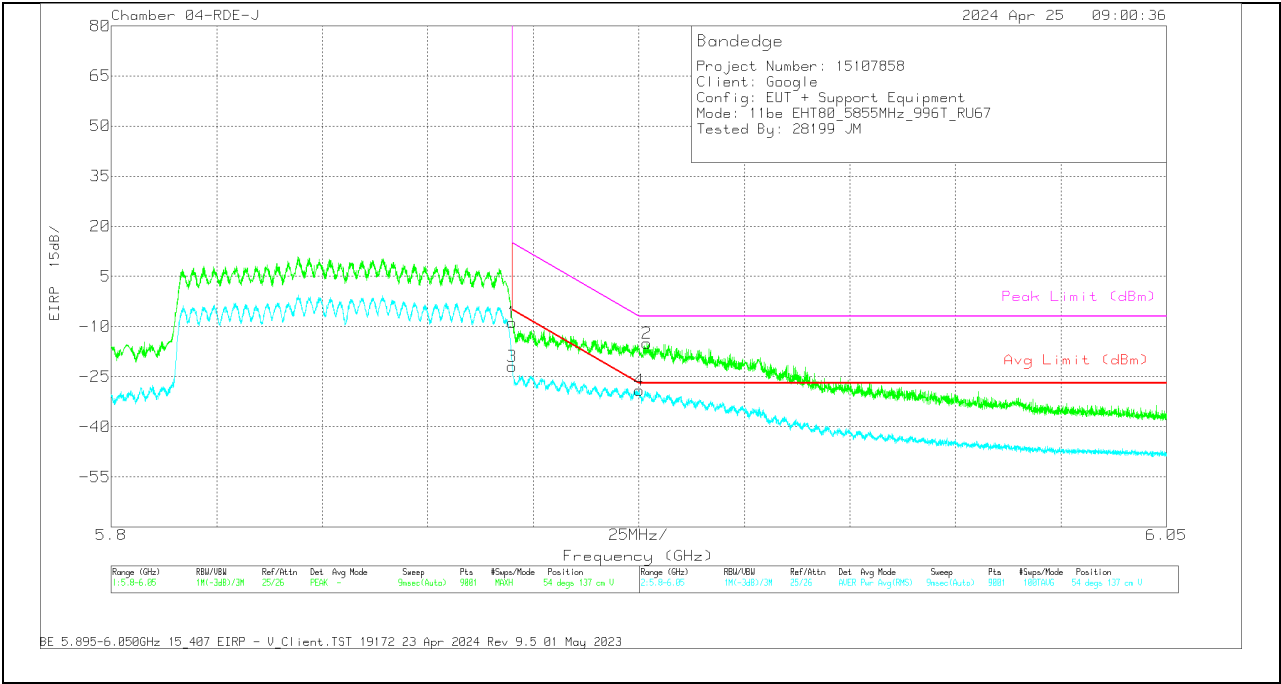



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-21.96	Pk	34.9	11.8	-33.6	0	-8.86	-	-	15	-23.86	54	137	V
3	5.895	-35.54	RMS	34.9	11.8	-33.6	.48	-21.96	-5	-16.96	-	-	54	137	V
4	5.925112	-43.01	RMS	35	11.8	-33.4	.48	-29.13	-27	-2.13	-	-	54	137	V
2	5.926973	-28.39	Pk	35	11.8	-33.4	0	-14.99	-	-	-7	-7.99	54	137	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

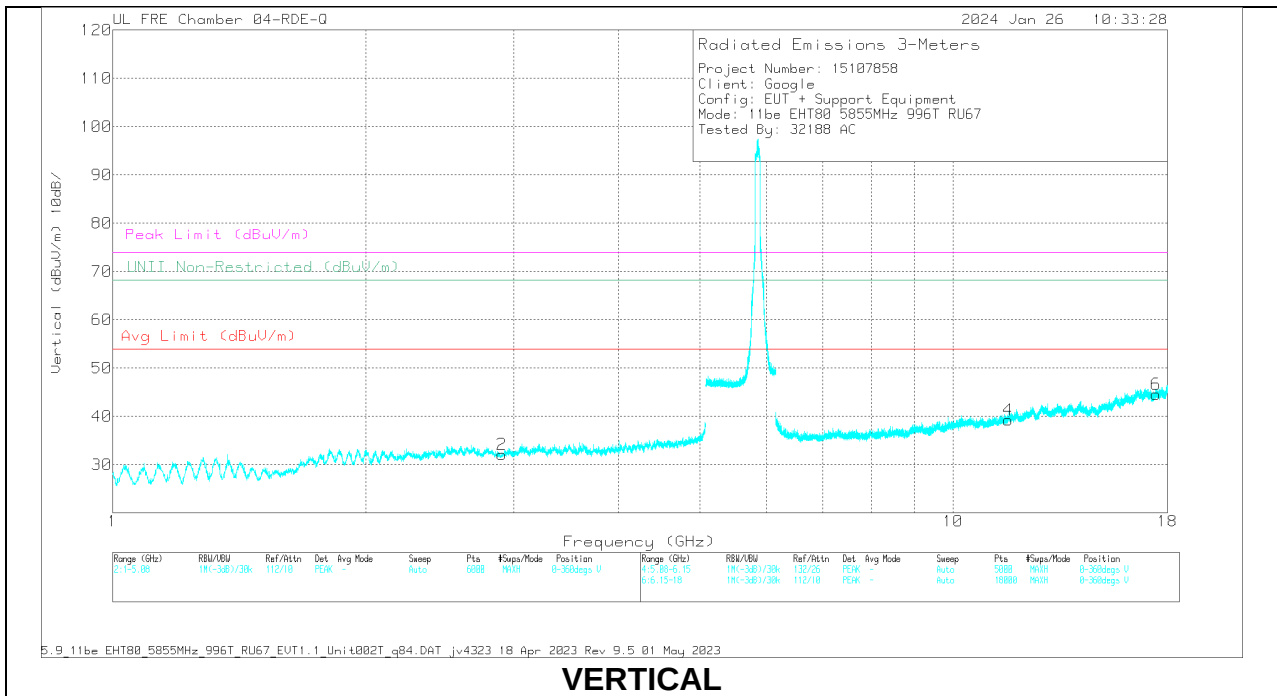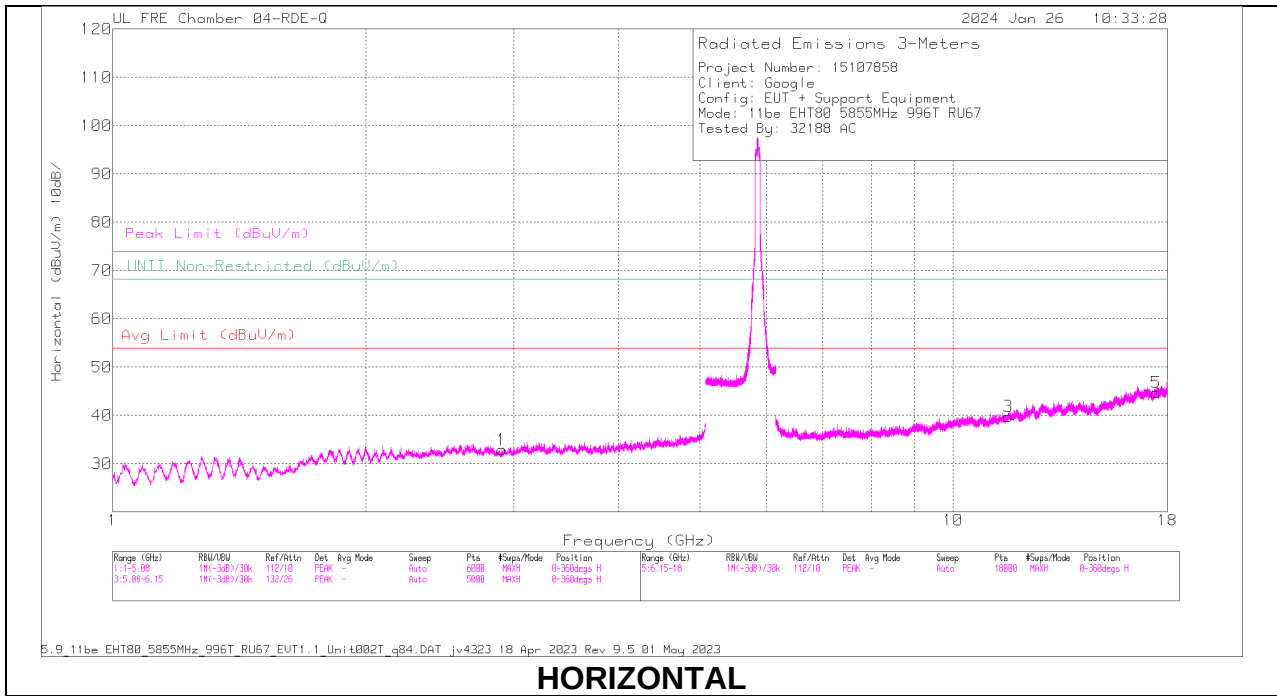

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	84796 ACF (dB/m)	Gain/Loss (dB)	DCCF 9dB	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 11.629299	55.28	PK-U	38.5	-43.85		49.93	-	-	74	-24.07	-	-	0	100	H
	* ** 11.630287	43.8	ADR	38.5	-43.87	.48	38.43	54	-15.09	-	-	-	-	0	100	H
4	* ** 11.628503	55.79	PK-U	38.5	-43.86		50.43	-	-	74	-23.57	-	-	0	201	V
	* ** 11.630159	43.56	ADR	38.5	-43.87	.48	38.19	54	-15.33	-	-	-	-	0	201	V
1	2.90376	46.27	ADR	32	-47.35		30.92	-	-	-	-	-	-	0	201	V
	2.90394	58.09	PK-U	32	-47.35		42.74	-	-	-	-	68.2	-25.46	0	201	V
2	2.904996	46.17	ADR	32	-47.34		30.83	-	-	-	-	-	-	0	100	H
	2.906172	58.06	PK-U	32	-47.31		42.75	-	-	-	-	68.2	-25.45	0	100	H
5	17.44332	54.89	PK-U	41.1	-40.27		55.72	-	-	-	-	68.2	-12.48	0	100	H
	17.445884	42.56	ADR	41.1	-40.21		43.45	-	-	-	-	-	-	0	100	H
6	17.444596	54.38	PK-U	41.1	-40.23		55.25	-	-	-	-	68.2	-12.95	0	200	V
	17.446803	42.84	ADR	41.1	-40.26		43.68	-	-	-	-	-	-	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.40. 802.11ac VHT160 MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (5815MHz LOW EDGE)

HORIZONTAL RESULT

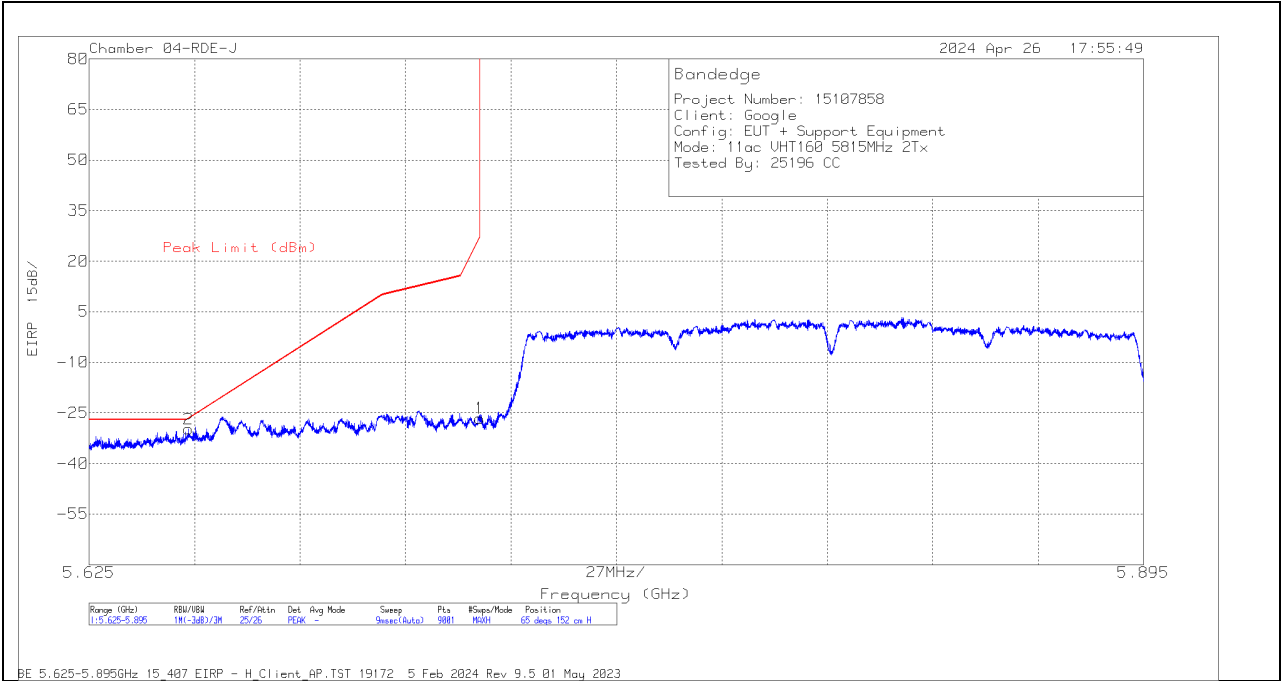


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.65038	-42.24	PK	34.6	-34	11.8	0	-29.84	-26.72	-3.12	65	152	H
1	5.725	-39.36	PK	34.7	-33.8	11.8	0	-26.66	27	-53.66	65	152	H

PK - Peak detector

VERTICAL RESULT

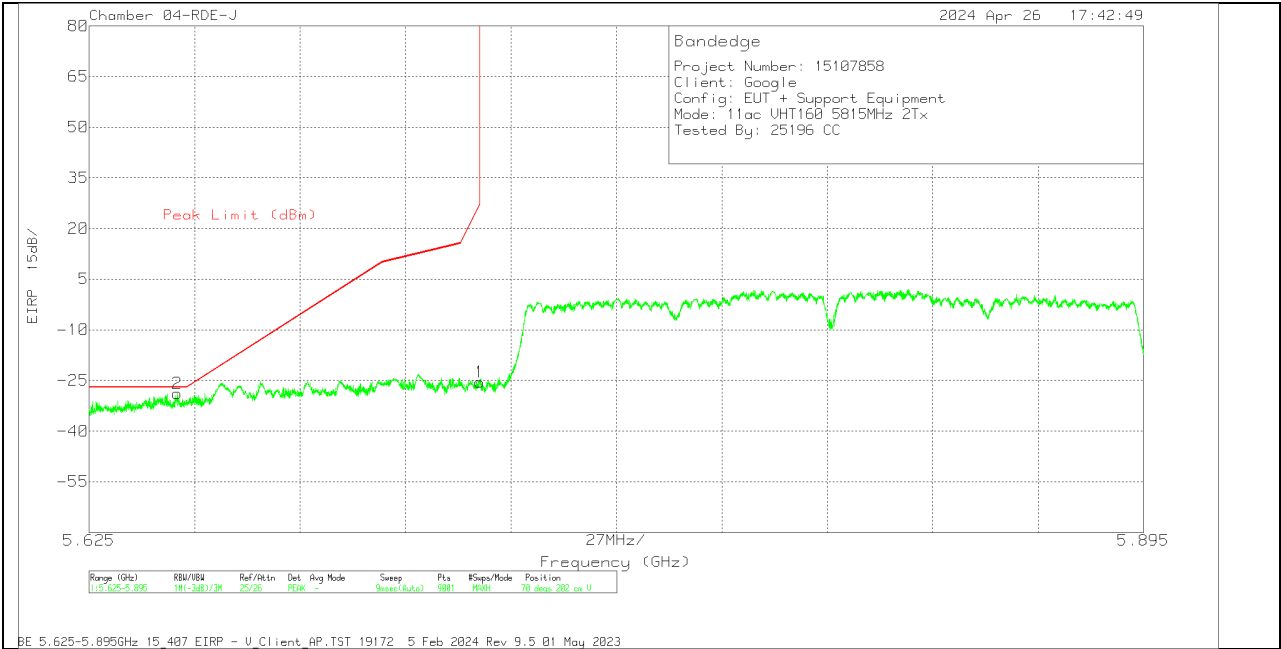


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dBm)	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64759	-41.26	Pk	34.6	-34	11.8	0	-28.86	-27	-1.86	70	202	V
1	5.725	-38.22	Pk	34.7	-33.8	11.8	0	-25.52	27	-52.52	70	202	V

Pk - Peak detector

BANDEDGE (5815MHz HIGH EDGE)
HORIZONTAL RESULT

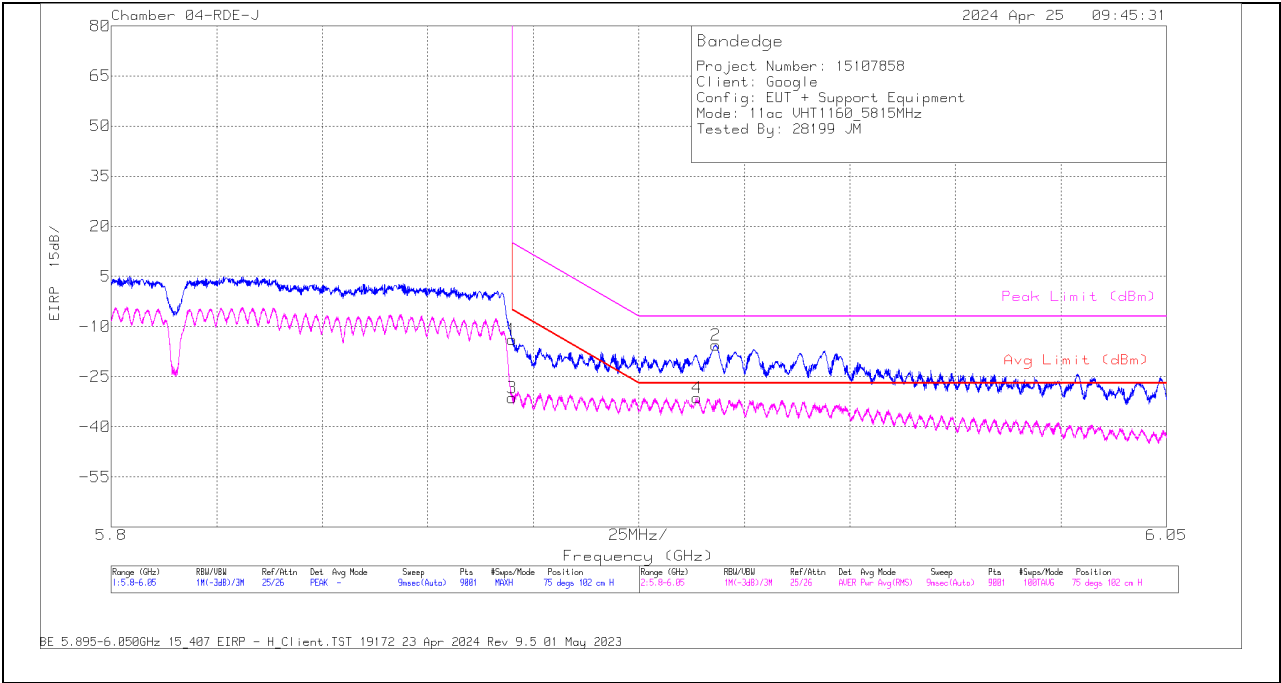


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-27.01	Pk	34.9	11.8	-33.6	0	-13.91	-	-	15	-28.91	75	102	H
3	5.895	-44.68	RMS	34.9	11.8	-33.6	.18	-31.4	-5	-26.4	-	-	75	102	H
4	5.938807	-44.87	RMS	35	11.8	-33.4	.18	-31.29	-27	-4.29	-	-	75	102	H
2	5.943223	-29.01	Pk	35	11.8	-33.4	0	-15.61	-	-	-7	-8.61	75	102	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

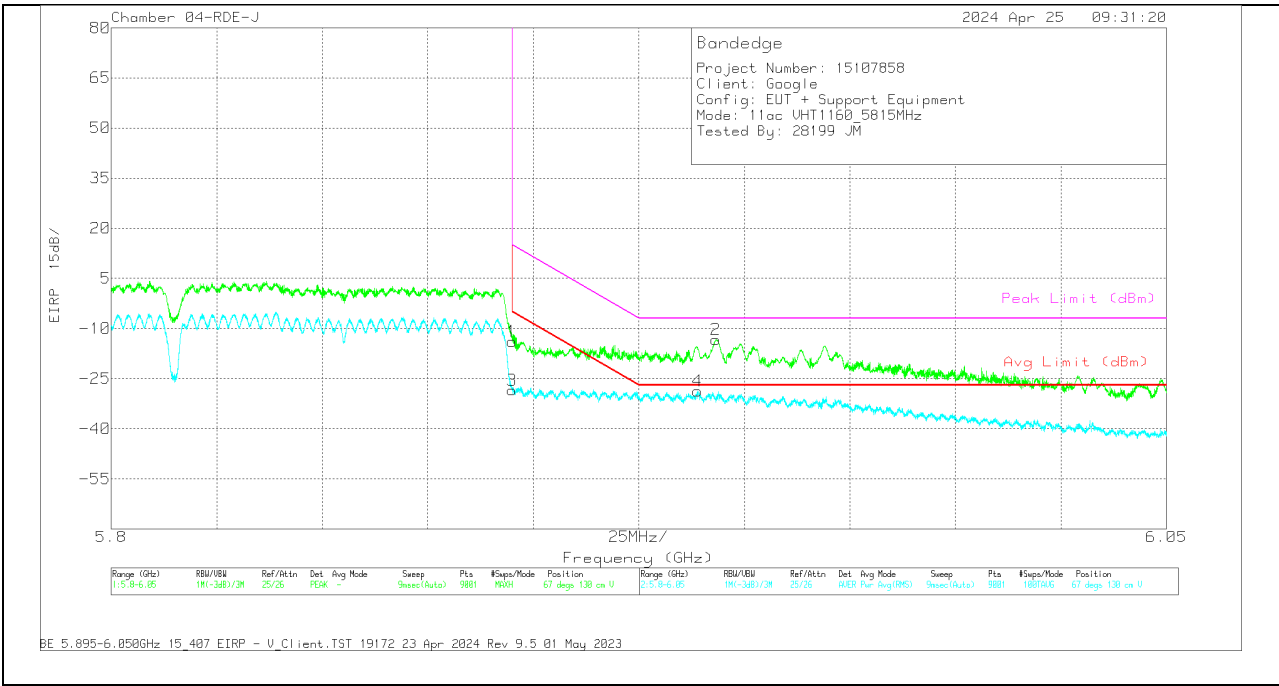



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-26.94	PK	34.9	11.8	-33.6	0	-13.84	-	-	15	-28.84	67	130	V
3	5.895	-41.71	RMS	34.9	11.8	-33.6	.18	-28.43	-5	-23.43	-	-	67	130	V
4	5.938918	-42.35	RMS	35	11.8	-33.4	.18	-28.77	-27	-1.77	-	-	67	130	V
2	5.943223	-26.76	PK	35	11.8	-33.4	0	-13.36	-	-	-7	-6.36	67	130	V

PK - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

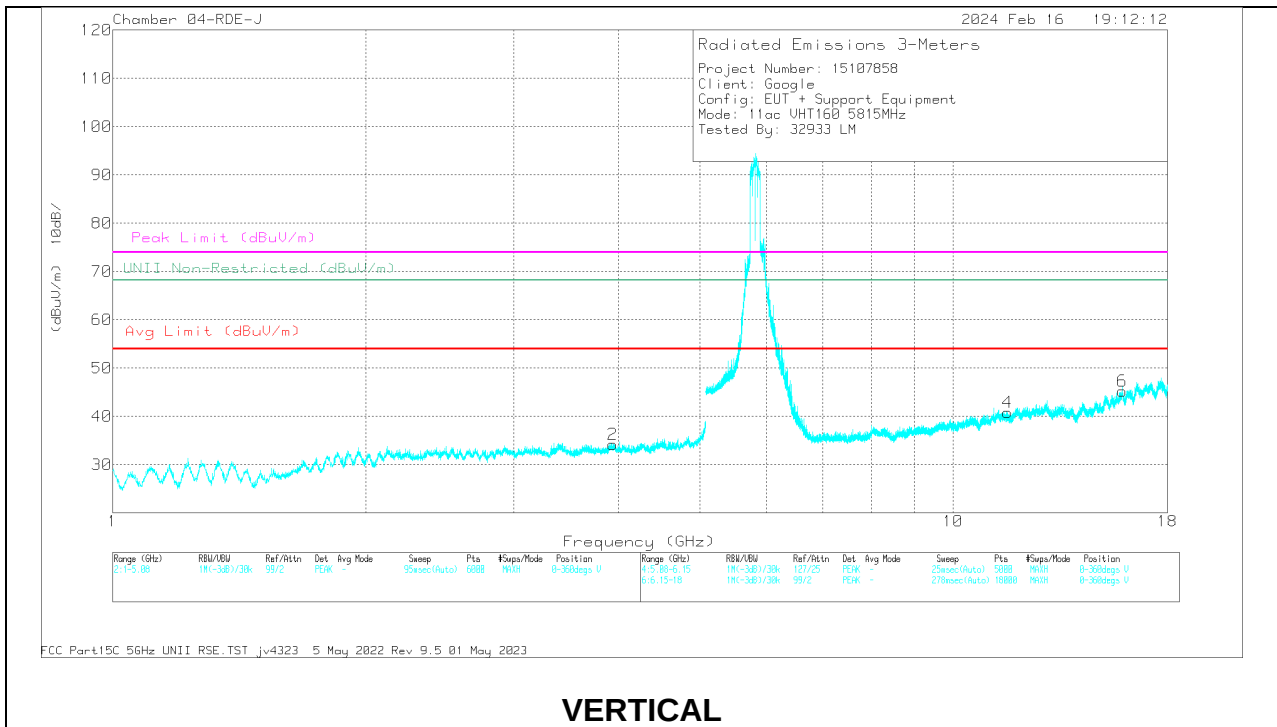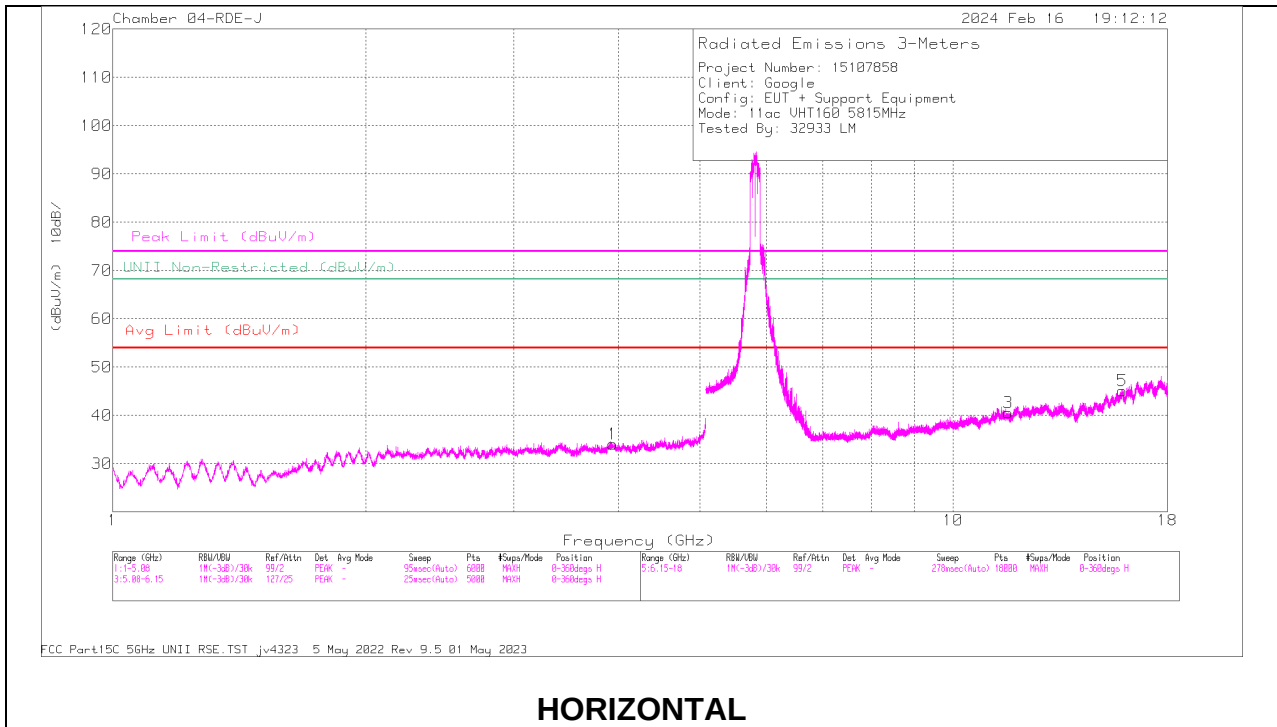

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.933361	55.48	PK-U	33.4	-44.3	0	44.58	-	-	74	-29.42	-	-	121	231	H
	* ** 3.936648	43.62	ADR	33.4	-44.4	.18	32.8	54	-21.2	-	-	-	-	121	231	H
2	* ** 3.939276	55.18	PK-U	33.4	-44.4	0	44.18	-	-	74	-29.82	-	-	23	323	V
	* ** 3.937976	43.48	ADR	33.4	-44.4	.18	32.66	54	-21.34	-	-	-	-	23	323	V
3	* ** 11.634558	52.49	PK-U	38.4	-39.9	0	50.99	-	-	74	-23.01	-	-	16	199	H
	* ** 11.634557	40.86	ADR	38.4	-39.9	.18	39.54	54	-14.46	-	-	-	-	16	199	H
4	* ** 11.611971	52.6	PK-U	38.4	-40	0	51	-	-	74	-23	-	-	178	278	V
	* ** 11.610974	41.1	ADR	38.4	-40	.18	39.68	54	-14.32	-	-	-	-	178	278	V
5	* ** 15.917119	53.84	PK-U	41.1	-39.3	0	55.64	-	-	74	-18.36	-	-	63	217	H
	* ** 15.918046	42.31	ADR	41.1	-39.5	.18	44.09	54	-9.91	-	-	-	-	63	217	H
6	* ** 15.918898	53.95	PK-U	41.1	-39.6	0	55.45	-	-	74	-18.55	-	-	160	249	V
	* ** 15.92081	42.4	ADR	41.1	-39.5	.18	44.18	54	-9.82	-	-	-	-	160	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.41. 802.11be EHT160 SU MODE IN THE 5.9 GHz BAND

2TX Tx0 + Tx1 CDD MODE

BANDEDGE (5815MHz LOW EDGE)

HORIZONTAL RESULT

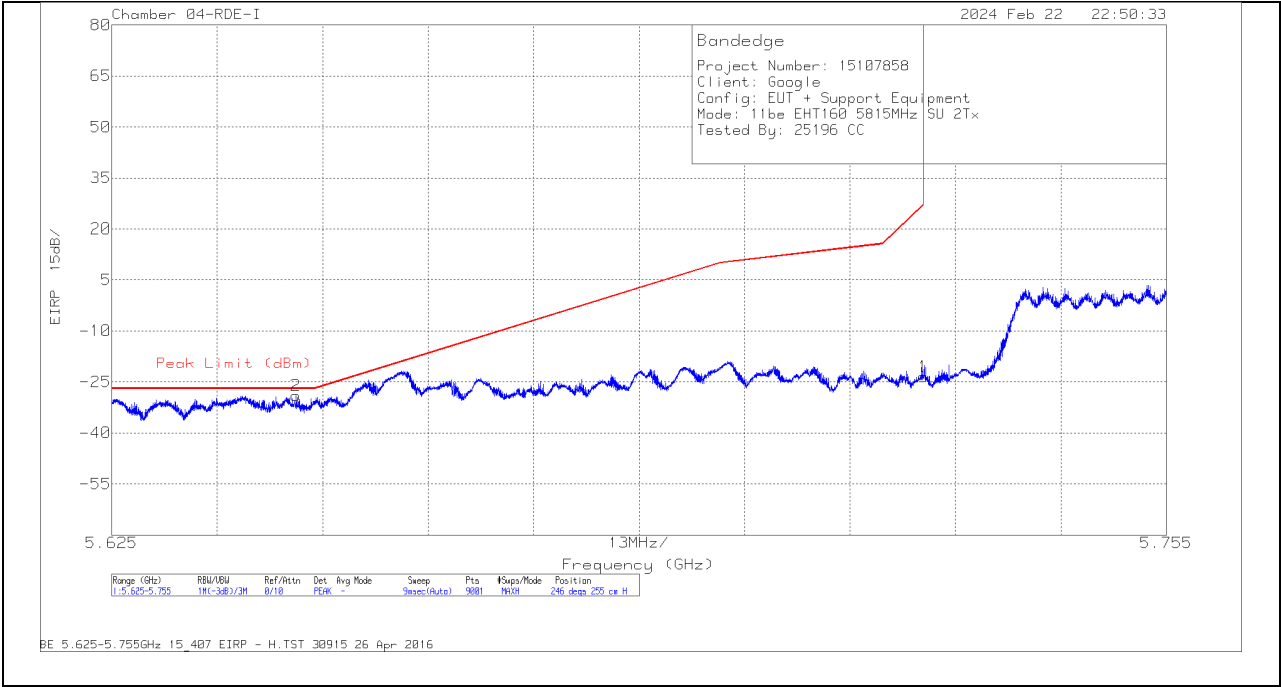


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dBm)	Cbl/Amp (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.647692	-58.87	Pk	34.9	-16.8	11.8	0	-28.97	-27	-1.97	246	255	H
1	5.725	-53.4	Pk	34.9	-16.7	11.8	0	-23.4	27	-50.4	246	255	H

Pk - Peak detector

VERTICAL RESULT

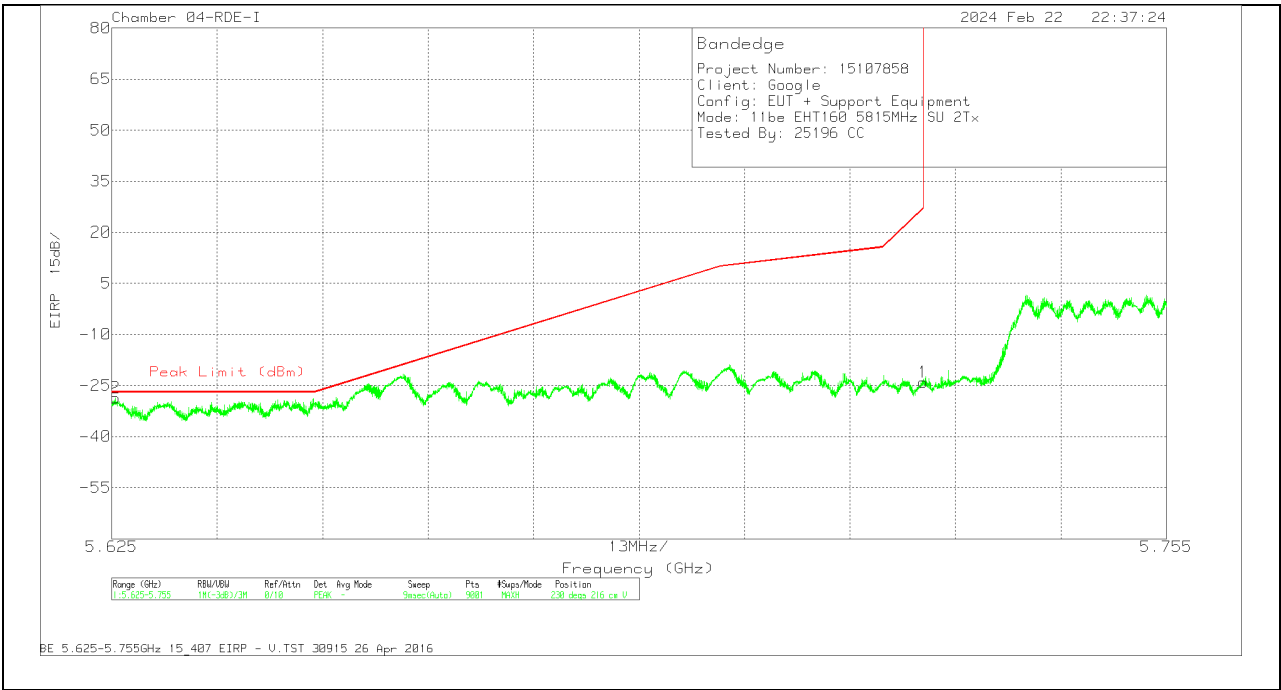

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	84797 ACF (dB/m)	Cbl/Amp (dB)	Conversion Factor (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.625419	-58.5	Pk	34.9	-16.8	11.8	0	-28.6	-27	-1.6	230	216	V
1	5.725	-53.98	Pk	34.9	-16.7	11.8	0	-23.98	27	-50.98	230	216	V

Pk - Peak detector

Chamber 04-RDE-J

2024 Apr 25 10:22:45

Bandgedge

Project Number: 15107858

Client: Google

Config: EUT + Support Equipment

Mode: 11be EHT160_5815MHz_996T_RU67

Tested By: 28199 JM

EIRP 15dB/

5.8 25MHz/ 6.05

Frequency (GHz)

Peak Limit (dBm)

Avg Limit (dBm)

H Client


Range (GHz)	RBW/MBW	Ref/AltIn	Det	Avg Mode	Sweep	Pts	#Swept/Mode	Position	Range (GHz)	RBW/MBW	Ref/AltIn	Det	Avg Mode	Sweep	Pts	#Swept/Mode	Position
1.5.8-6.05	1M-3dB/3M	25/26	PEAK	-	9msc(Auto)	9981	1M/1M	40 degs 259 on H	1.5.8-6.05	1M-3dB/3M	25/26	HLR Fur Avg(RMS)	9msc(Auto)	9981	1M/1M	40 degs 259 on H	

BE 5.895-6.050GHz 15.407 EIRP - H Client.TST 19172 23 Apr 2024 Rev 9.5 01 May 2023

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-19.43	Pk	34.9	11.8	-33.6	0	-6.33	-	-	15	-21.33	40	259	H
3	5.895	-38.19	RMS	34.9	11.8	-33.6	22	-24.87	-5	-19.87	-	-	40	259	H
4	5.925834	-44.84	RMS	35	11.8	-33.4	22	-31.22	-27	-4.22	-	-	40	259	H
2	5.926168	-29.59	Pk	35	11.8	-33.4	0	-16.19	-	-	-7	-9.19	40	259	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

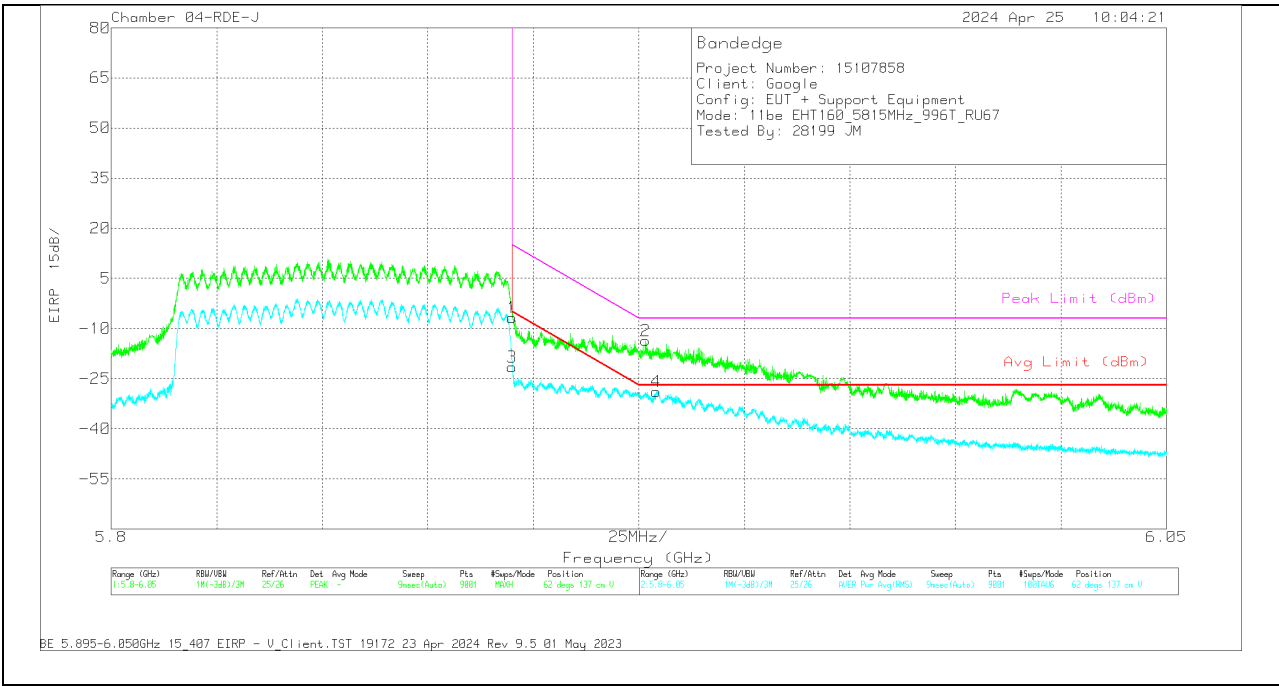



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF 3m (dB/m)	Conversion Factor (dB)	Amp/Cbl/Pad (dB)	DCCF (dB)	Corrected Reading EIRP (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.895	-19.77	Pk	34.9	11.8	-33.6	0	-6.67	-	-	15	-21.67	62	137	V
3	5.895	-35.1	RMS	34.9	11.8	-33.6	.22	-21.78	-5	-16.78	-	-	62	137	V
2	5.926557	-27	Pk	35	11.8	-33.4	0	-13.6	-	-	-7	-6.6	62	137	V
4	5.929084	-42.82	RMS	35	11.8	-33.4	.22	-29.2	-27	-2.2	-	-	62	137	V

PK - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

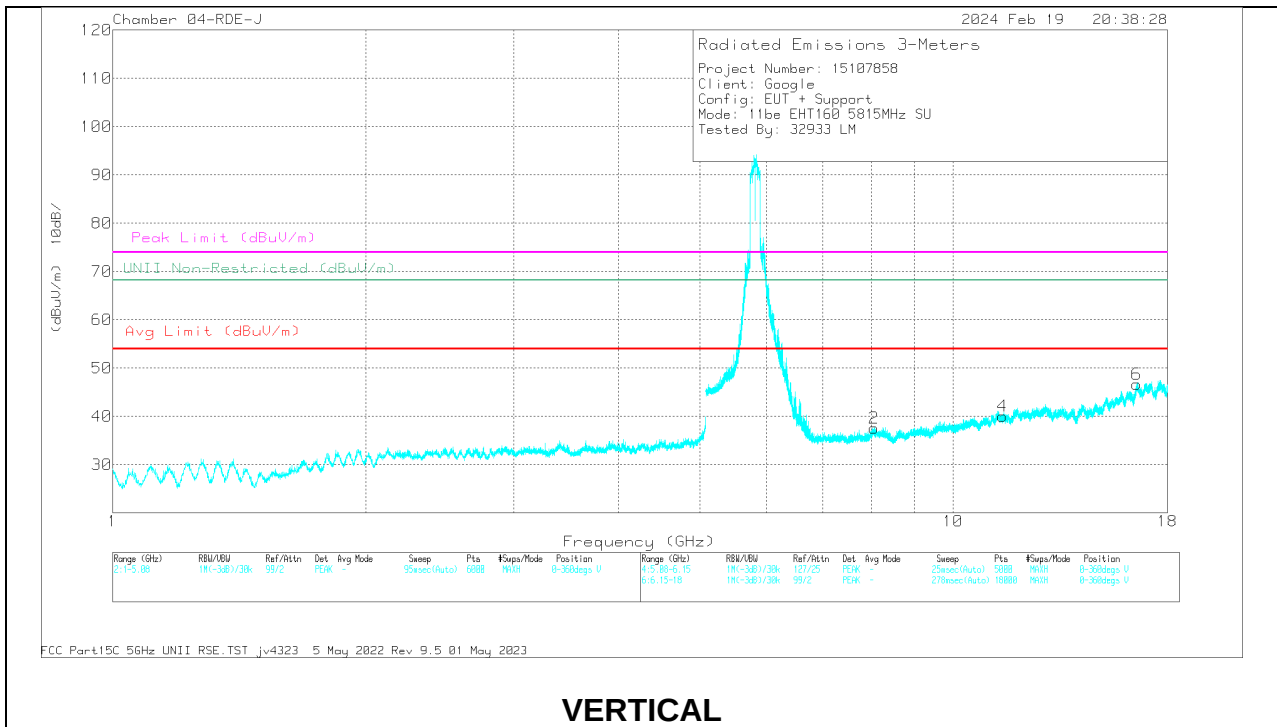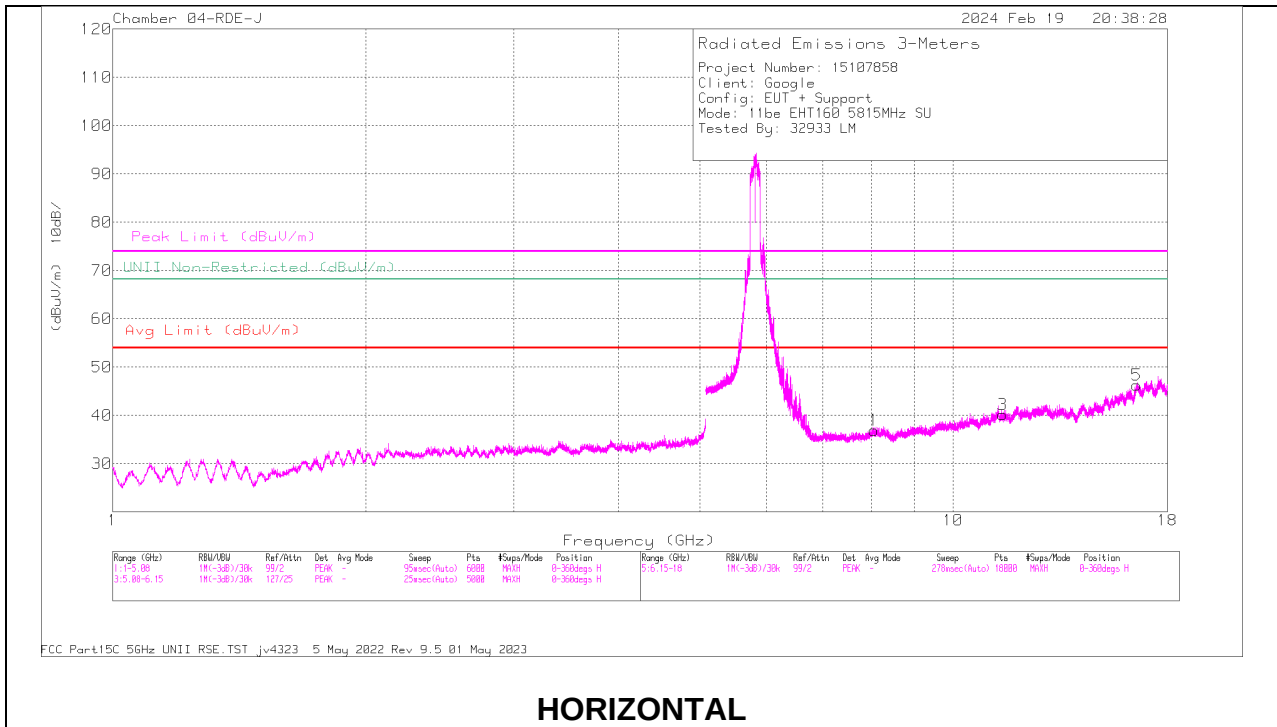

Radiated Emissions

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 8.054952	52.67	PK-U	35.9	-40.8	0	47.77	-	-	74	-26.23	-	-	336	247	H
	* ** 8.053437	41.2	ADR	35.9	-41	.22	36.32	54	-17.68	-	-	-	-	336	247	H
2	* ** 8.056839	52.24	PK-U	35.9	-40.9	0	47.24	-	-	74	-26.76	-	-	16	230	V
	* ** 8.056588	41.12	ADR	35.9	-40.9	.22	36.34	54	-17.66	-	-	-	-	16	230	V
3	* ** 11.458495	52.61	PK-U	38.2	-40.8	0	50.01	-	-	74	-23.99	-	-	116	289	H
	* ** 11.456066	41.21	ADR	38.2	-40.8	.22	38.83	54	-15.17	-	-	-	-	116	289	H
4	* ** 11.455388	52.92	PK-U	38.2	-40.8	0	50.32	-	-	74	-23.68	-	-	342	300	V
	* ** 11.454632	41.44	ADR	38.2	-40.8	.22	39.06	54	-14.94	-	-	-	-	342	300	V
5	16.544296	52.68	PK-U	42	-38.5	0	56.18	-	-	-	-	68.2	-12.02	112	243	H
6	16.544039	52.54	PK-U	42	-38.5	0	56.04	-	-	-	-	68.2	-12.16	61	198	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



** - indicates frequency in Taiwan NCC LP0002 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.2. WORST CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

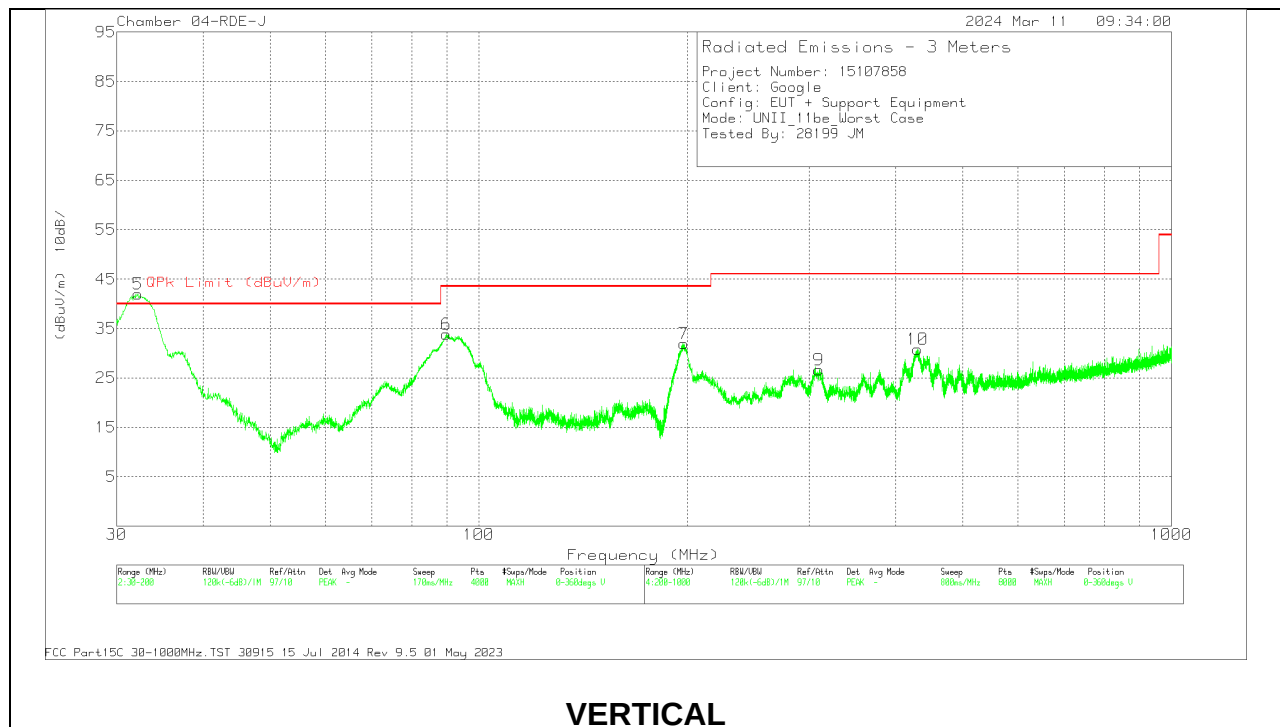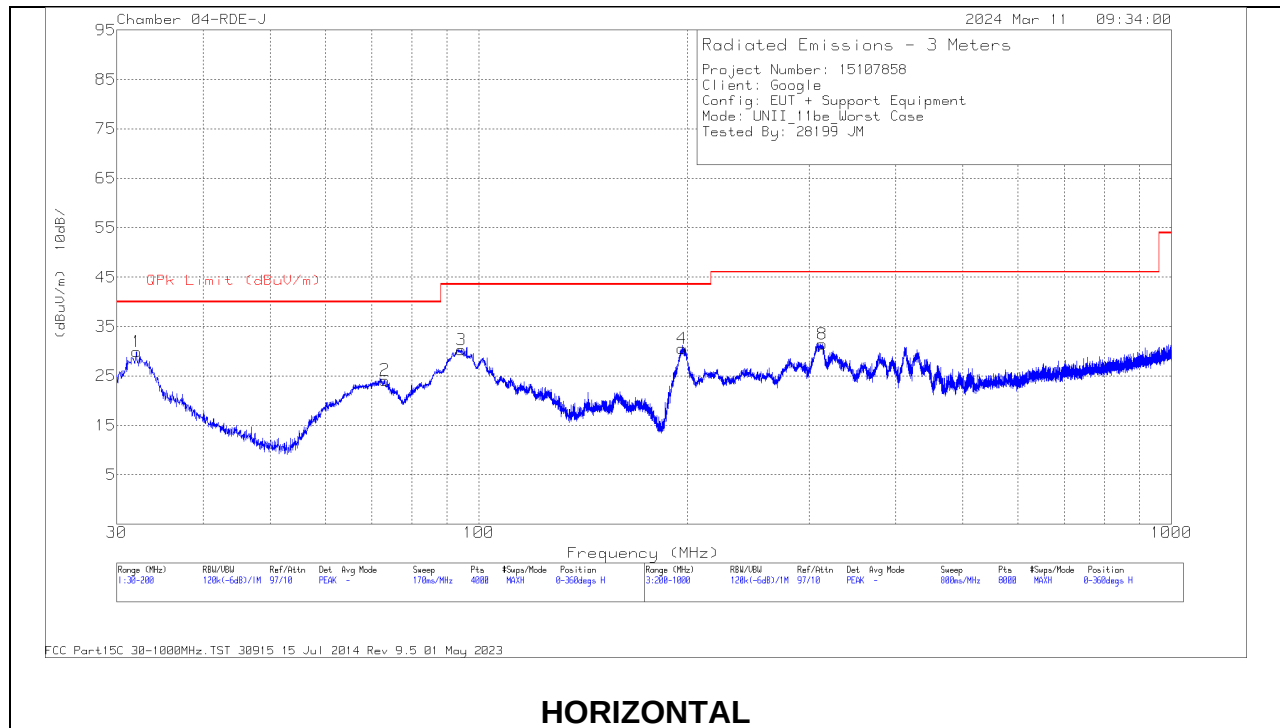

Below 1GHz Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	80293 ACF (dB/m)	CBL/AMP (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.0405	36.06	Pk	25.3	-31.5	29.86	40	-10.14	0-360	299	H
2	* 73.1062	41.54	Pk	14	-31.4	24.14	40	-15.86	0-360	199	H
3	94.3191	46.74	Pk	14.7	-31.2	30.24	43.52	-13.28	0-360	299	H
4	196.261	42.75	Pk	17.9	-30.1	30.55	43.52	-12.97	0-360	101	H
5	32.7969	45.15	Qp	24.8	-31.7	38.25	40	-1.75	0	100	V
6	89.6854	50.92	Pk	13.8	-30.9	33.82	43.52	-9.7	0-360	100	V
7	197.536	44.37	Pk	18.1	-30.5	31.97	43.52	-11.55	0-360	100	V
8	313.415	41.59	Pk	19.7	-29.9	31.39	46.02	-14.63	0-360	99	H
9	309.714	37.08	Pk	19.6	-30.1	26.58	46.02	-19.44	0-360	99	V
10	430.33	38.16	Pk	22.4	-29.7	30.86	46.02	-15.16	0-360	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


LINE 1 RESULTS



Range 1: Line-L1 15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Cbl (dB)	Trns Limiter (dB)	Corrected Reading (dBuV)	FCC Part 15C QP Limit (dBuV)	QP Margin (dB)	FCC Part 15C Limit Avg (dBuV)	Av Margin (dB)
2	.1725	17.8	Av	0	0	9.5	27.3	-	-	54.84	-27.54
4	.2153	15.19	Av	0	.1	9.4	24.69	-	-	53	-28.31
6	.258	14.68	Av	0	0	9.4	24.08	-	-	51.5	-27.42
8	.3008	12.24	Av	0	.1	9.4	21.74	-	-	50.22	-28.48
10	.6878	15.79	Av	0	.1	9.3	25.19	-	-	46	-20.81
12	.9015	5.76	Av	0	.1	9.4	15.26	-	-	46	-30.74
1	.1725	36.46	Qp	0	0	9.5	45.96	64.84	-18.88	-	-
3	.2153	31.63	Qp	0	.1	9.4	41.13	63	-21.87	-	-
5	.258	28.64	Qp	0	0	9.4	38.04	61.5	-23.46	-	-
7	.3008	24.47	Qp	0	.1	9.4	33.97	60.22	-26.25	-	-
9	.6855	21.2	Qp	0	.1	9.3	30.6	56	-25.4	-	-
11	.9015	11.46	Qp	0	.1	9.4	20.96	56	-35.04	-	-

Qp - Quasi-Peak detector
Av - Average detection

LINE 2 RESULTS

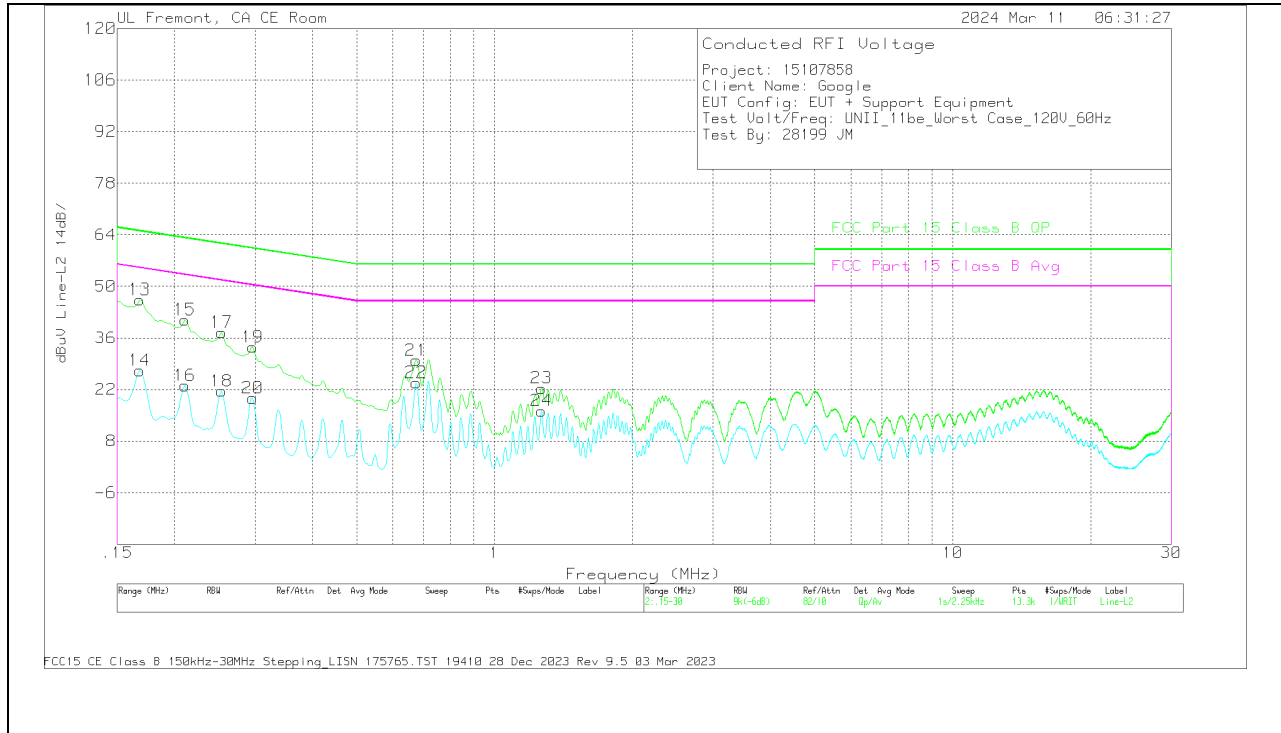

Range 2: Line-L2 15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN (dB)	Cbl (dB)	Trns Limiter (dB)	Corrected Reading (dBuV)	FCC Part 15C QP Limit (dBuV)	QP Margin (dB)	FCC Part 15C Limit Avg (dBuV)	Av Margin (dB)
14	.168	17.65	Av	0	0	9.5	27.15	-	-	55.06	-27.91
16	.2108	13.55	Av	0	.1	9.4	23.05	-	-	53.18	-30.13
18	.2535	12.17	Av	0	0	9.4	21.57	-	-	51.64	-30.07
20	.2963	10.15	Av	0	.1	9.4	19.65	-	-	50.35	-30.7
22	.6743	14.36	Av	0	.1	9.4	23.86	-	-	46	-22.14
24	1.266	6.71	Av	0	.1	9.4	16.21	-	-	46	-29.79
13	.168	36.87	Qp	0	0	9.5	46.37	65.06	-18.69	-	-
15	.2108	31.42	Qp	0	.1	9.4	40.92	63.18	-22.26	-	-
17	.2535	28.09	Qp	0	0	9.4	37.49	61.64	-24.15	-	-
19	.2963	24.02	Qp	0	.1	9.4	33.52	60.35	-26.83	-	-
21	.6743	20.42	Qp	0	.1	9.4	29.92	56	-26.08	-	-
23	1.266	12.84	Qp	0	.1	9.4	22.34	56	-33.66	-	-

Qp - Quasi-Peak detector
Av - Average detection

12. DESCRIPTION OF TEST SETUP AND SETUP PHOTOS

Please refer to 15107858-EP1 for test setup description and setup photos

END OF TEST REPORT