




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.739	30	Pass
NVNT	BLE	2442	Ant1	-4.383	30	Pass
NVNT	BLE	2480	Ant1	-6.859	30	Pass



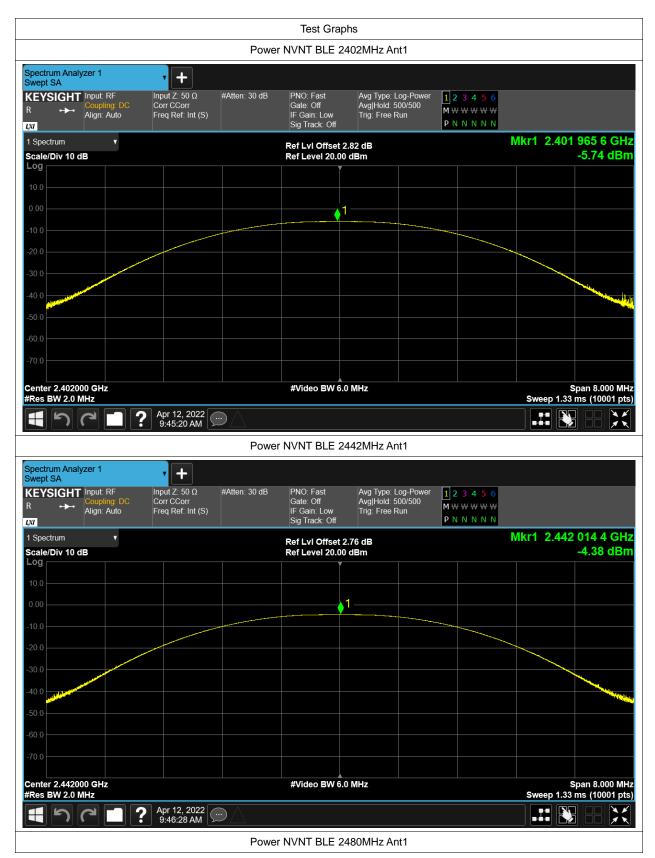



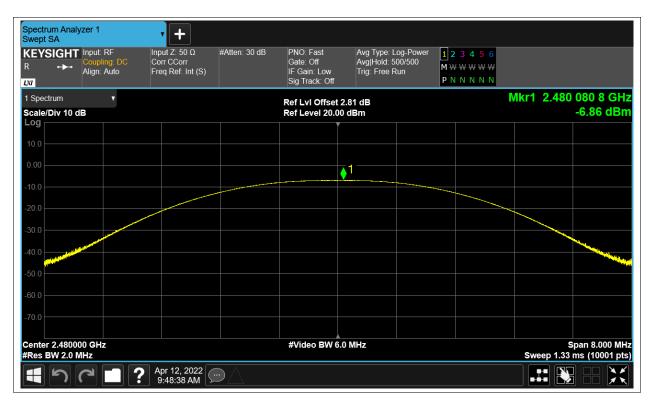






-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.657	0.5	Pass
NVNT	BLE	2442	Ant1	0.663	0.5	Pass
NVNT	BLE	2480	Ant1	0.656	0.5	Pass







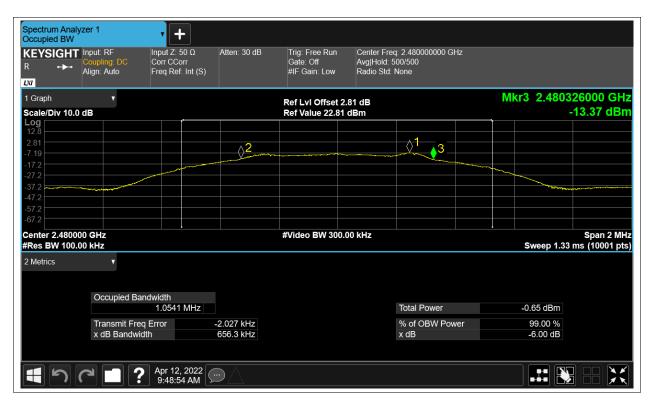






Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.048561396	
NVNT	BLE	2442	Ant1	1.046440139	
NVNT	BLE	2480	Ant1	1.0508534	







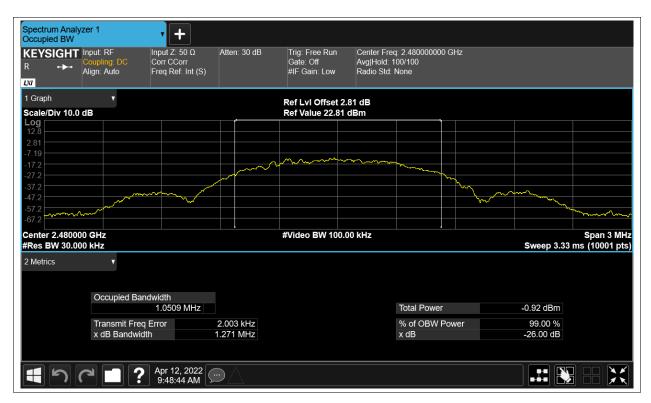





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-21.951	8	Pass
NVNT	BLE	2442	Ant1	-20.699	8	Pass
NVNT	BLE	2480	Ant1	-23.28	8	Pass














Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.57	-20	Pass
NVNT	BLE	2480	Ant1	-49.42	-20	Pass



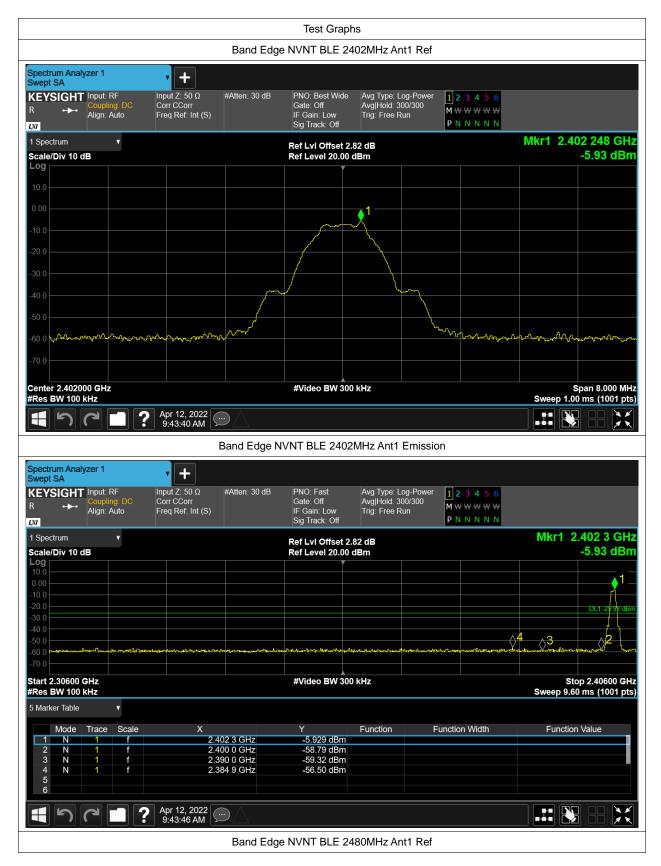









Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.29	-20	Pass
NVNT	BLE	2442	Ant1	-43.87	-20	Pass
NVNT	BLE	2480	Ant1	-43.14	-20	Pass











