



TEST REPORT

Report No.: **CTC2024227201**

FCC ID.....: **2AYMH-PM-1330**

FCC Applicant.....: **HANSHOW TECHNOLOGY CO., LTD.**

Address.....: Building 1(IF podium building and 4F) and Building 5 (7F) in
Jiaxing Photovolta High-tech Park, No.1288 Kanghe Rd.,
Xiuzhou District,Jiaxing,Zhejiang, China

Manufacturer.....: **HANSHOW TECHNOLOGY CO., LTD.**

Address.....: Building 1(IF podium building and 4F) and Building 5 (7F) in
Jiaxing Photovolta High-tech Park, No.1288 Kanghe Rd.,
Xiuzhou District,Jiaxing,Zhejiang, China

Product Name.....: **electronic shelf label**

Trade Mark.....: Hanshow

Model/Type reference.....: Polaris Max-1330H-N

Listed Model(s): /

Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.249**

Test Report Form No: CTC-TR-060_A1

Master TRF: Dated 2024-09-20

Date of receipt of test sample...: Sep. 20, 2024

Date of testing.....: Sep. 20, 2024 ~ Oct. 10, 2024

Date of issue.....: Oct. 14, 2024

Result.....: **PASS**

Compiled by:

(Printed name+signature) Lucy Lan

Supervised by:

(Printed name+signature) Eric Zhang

Approved by:

(Printed name+signature) Totti Zhao



This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. This report is only provided to customers for activities such as scientific research, teaching, internal quality control, product development.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhui Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

**Table of Contents****Page**

1. TEST SUMMARY	4
1.1. TEST STANDARDS.....	4
1.2. REPORT VERSION.....	4
1.3. TEST DESCRIPTION.....	5
1.4. TEST FACILITY	6
1.5. MEASUREMENT UNCERTAINTY	6
1.6. ENVIRONMENTAL CONDITIONS	7
2. GENERAL INFORMATION	8
2.1. CLIENT INFORMATION	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. DESCRIPTION OF TEST MODES	9
2.4. ACCESSORY EQUIPMENT INFORMATION	10
2.5. MEASUREMENT INSTRUMENTS LIST	11
3. TEST ITEM AND RESULTS	12
3.1. AC POWER LINE CONDUCTED EMISSIONS	12
3.2. 20 DB OCCUPIED BANDWIDTH	14
3.3. RADIATED FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL.....	16
3.4. RADIATED SPURIOUS EMISSIONS AND BANDEDGE EMISSION	23
3.5. ANTENNA REQUIREMENT	35



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Report No.	Date of issue	Description
01	CTC2024227201	Oct. 14, 2024	Original



1.3. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
AC Power Line Conducted Emissions	15.207	N/A	N/A
20dB Occupied Bandwidth	15.215/15.249	PASS	Alicia Liu
Field strength of the Fundamental signal	15.249(a)	PASS	Alicia Liu
Spurious Emissions	15.209/15.249(a)	PASS	Alicia Liu
Band edge Emissions	15.205/15.249(d)	PASS	Alicia Liu
Antenna requirement	15.203	PASS	Alicia Liu

Note: The measurement uncertainty is not included in the test result.

“N/A” This device is only powered battery, no need for part 15.207.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conducted Output Power	± 0.686 dB	(1)
Maximum Power Spectral Density Level	± 0.743 dB	(1)
Band-edge Compliance	± 1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	HANSHOW TECHNOLOGY CO., LTD.
Address:	Building 1(1F podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No.1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China
Manufacturer	HANSHOW TECHNOLOGY CO., LTD.
Address:	Building 1(1F podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No.1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China

2.2. General Description of EUT

Product Name:	electronic shelf label
Trade Mark:	Hanshow
Model/Type reference:	Polaris Max-1330H-N
Listed Model(s):	/
Sample ID:	CTC240918-008-S004
Power supply:	Battery:3V
Hardware version:	HSEL3_13_30M_12
Software version:	ROM191
2.4GHz	
Modulation:	GFSK
Operation frequency:	2402-2480MHz
Channel numbers:	157
Channel separation:	0.5MHz
Antenna type:	PCB layout antenna
Antenna gain:	6.88dBi



2.3. Description of Test Modes

The EUT has been tested under test mode condition. The Applicant provides software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402.0	41	2422.0	81	2442.0	121	2462.0
2	2402.5	42	2422.5	82	2442.5	122	2462.5
3	2403.0	43	2423.0	83	2443.0	123	2463.0
4	2403.5	44	2423.5	84	2443.5	124	2463.5
5	2404.0	45	2424.0	85	2444.0	125	2464.0
6	2404.5	46	2424.5	86	2444.5	126	2464.5
7	2405.0	47	2425.0	87	2445.0	127	2465.0
8	2405.5	48	2425.5	88	2445.5	128	2465.5
9	2406.0	49	2426.0	89	2446.0	129	2466.0
10	2406.5	50	2426.5	90	2446.5	130	2466.5
11	2407.0	51	2427.0	91	2447.0	131	2467.0
12	2407.5	52	2427.5	92	2447.5	132	2467.5
13	2408.0	53	2428.0	93	2448.0	133	2468.0
14	2408.5	54	2428.5	94	2448.5	134	2468.5
15	2409.0	55	2429.0	95	2449.0	135	2469.0
16	2409.5	56	2429.5	96	2449.5	136	2469.5
17	2410.0	57	2430.0	97	2450.0	137	2470.0
18	2410.5	58	2430.5	98	2450.5	138	2470.5
19	2411.0	59	2431.0	99	2451.0	139	2471.0
20	2411.5	60	2431.5	100	2451.5	140	2471.5
21	2412.0	61	2432.0	101	2452.0	141	2472.0
22	2412.5	62	2432.5	102	2452.5	142	2472.5
23	2413.0	63	2433.0	103	2453.0	143	2473.0
24	2413.5	64	2433.5	104	2453.5	144	2473.5
25	2414.0	65	2434.0	105	2454.0	145	2474.0
26	2414.5	66	2434.5	106	2454.5	146	2474.5
27	2415.0	67	2435.0	107	2455.0	147	2475.0
28	2415.5	68	2435.5	108	2455.5	148	2475.5
29	2416.0	69	2436.0	109	2456.0	149	2476.0

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



30	2416.5	70	2436.5	110	2456.5	150	2476.5
31	2417.0	71	2437.0	111	2457.0	151	2477.0
32	2417.5	72	2437.5	112	2457.5	152	2477.5
33	2418.0	73	2438.0	113	2458.0	153	2478.0
34	2418.5	74	2438.5	114	2458.5	154	2478.5
35	2419.0	75	2439.0	115	2459.0	155	2479.0
36	2419.5	76	2439.5	116	2459.5	156	2479.5
37	2420.0	77	2440.0	117	2460.0	157	2480.0
38	2420.5	78	2440.5	118	2460.5		
39	2421.0	79	2441.0	119	2461.0		
40	2421.5	80	2441.5	120	2461.5		

Test Mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit. (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

2.4. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
/	/	/	/
Test Software Information			
Name	Software version	/	/
Frequency Set	/	/	/

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



2.5. Measurement Instruments List

RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	Keysight	N9020A	MY52091402	Aug. 21, 2025
2	Test Software	Tonscend	JS1120-3	V3.3.38	/

Radiated Emission (3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 01, 2024
3	Loop Antenna	ETS	6507	1446	Dec. 12, 2024
4	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
5	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
6	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
7	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
8	Test Software	FARA	EZ-EMC	FA-03A2	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three year of the chamber

3. The cable loss has calculated in test result which connection between each test instruments..

3. TEST ITEM AND RESULTS

3.1. AC Power Line Conducted Emissions


Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

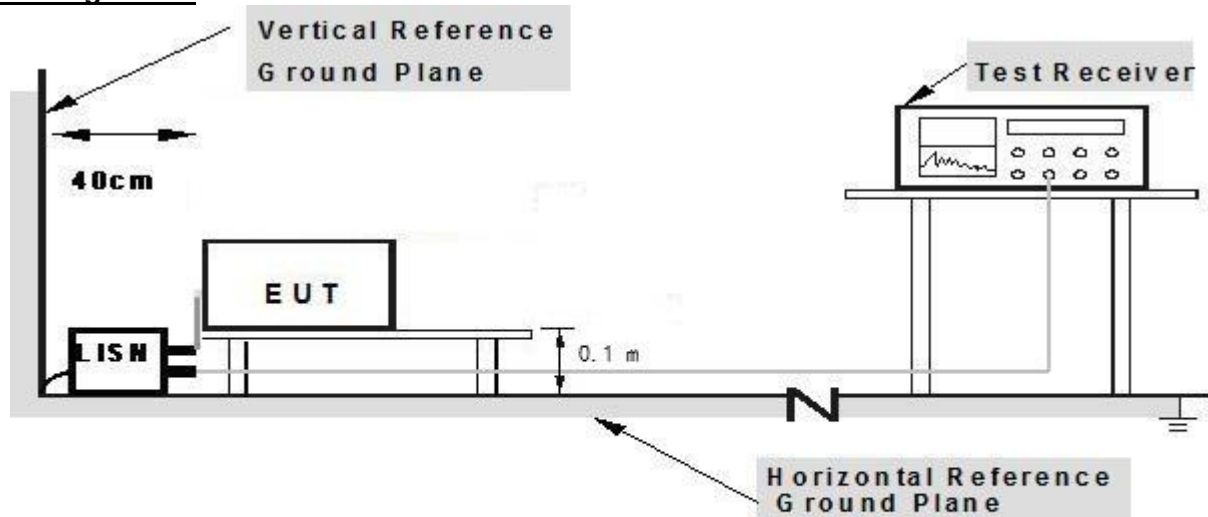

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.cnca.cn)



Test Mode

Please refer to the clause 2.3

Test Results


N/A

3.2. 20 dB Occupied Bandwidth

Limit

Operation frequency range 2400MHz~2483.5MHz.

Test Configuration

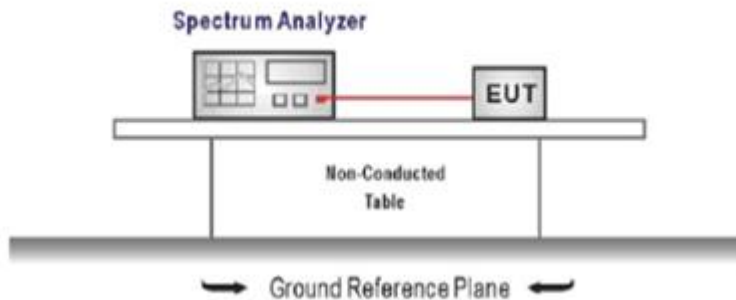

Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a test channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.3

Test Results

Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Result
2402	1118	1049.9	Pass
2441	1119	1050.6	Pass
2480	1115	1048.3	Pass

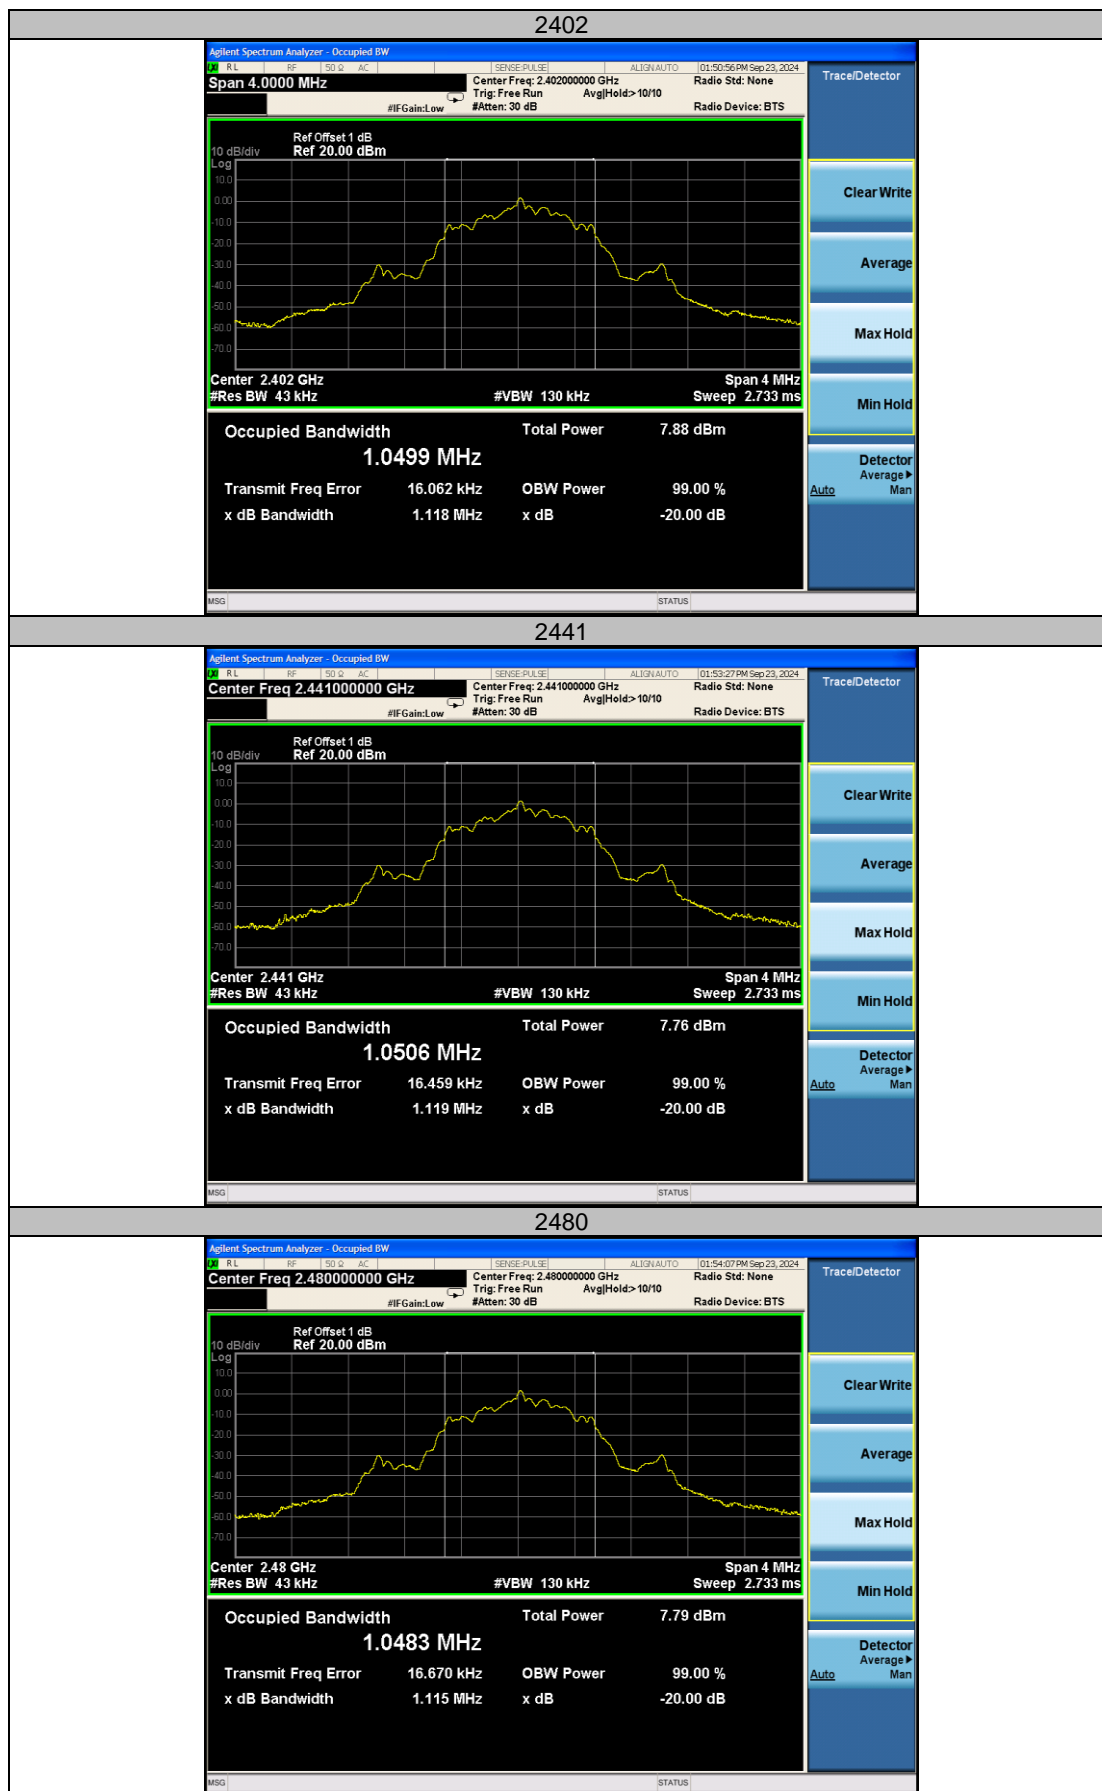**99% Bandwidth (KHz)&20dB Bandwidth (KHz)**

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn


3.3. Radiated field strength of the fundamental signal

Limit

Fundamental frequency	Field strength of fundamental (millivolts/meter/ AVG)	Field strength of harmonics (microvolts/meter/ AVG)
902-928 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
2400-2483.5 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
5725-5875 MHz	50 (94dBuV/m @3m)	500 (54dBuV/m @3m)
24.0-24.25 GHz	250 (108dBuV/m @3m)	2500 (68dBuV/m @3m)

Frequencies above 1000 MHz, the field strength limits are based on average limits

Test Configuration

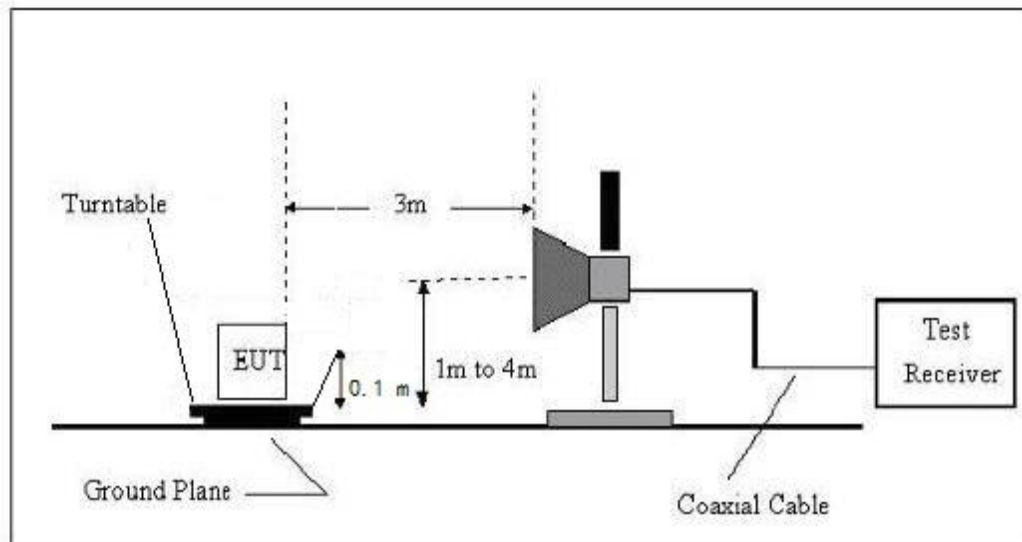



Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 0.1 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.


Test Mode


Please refer to the clause 2.3

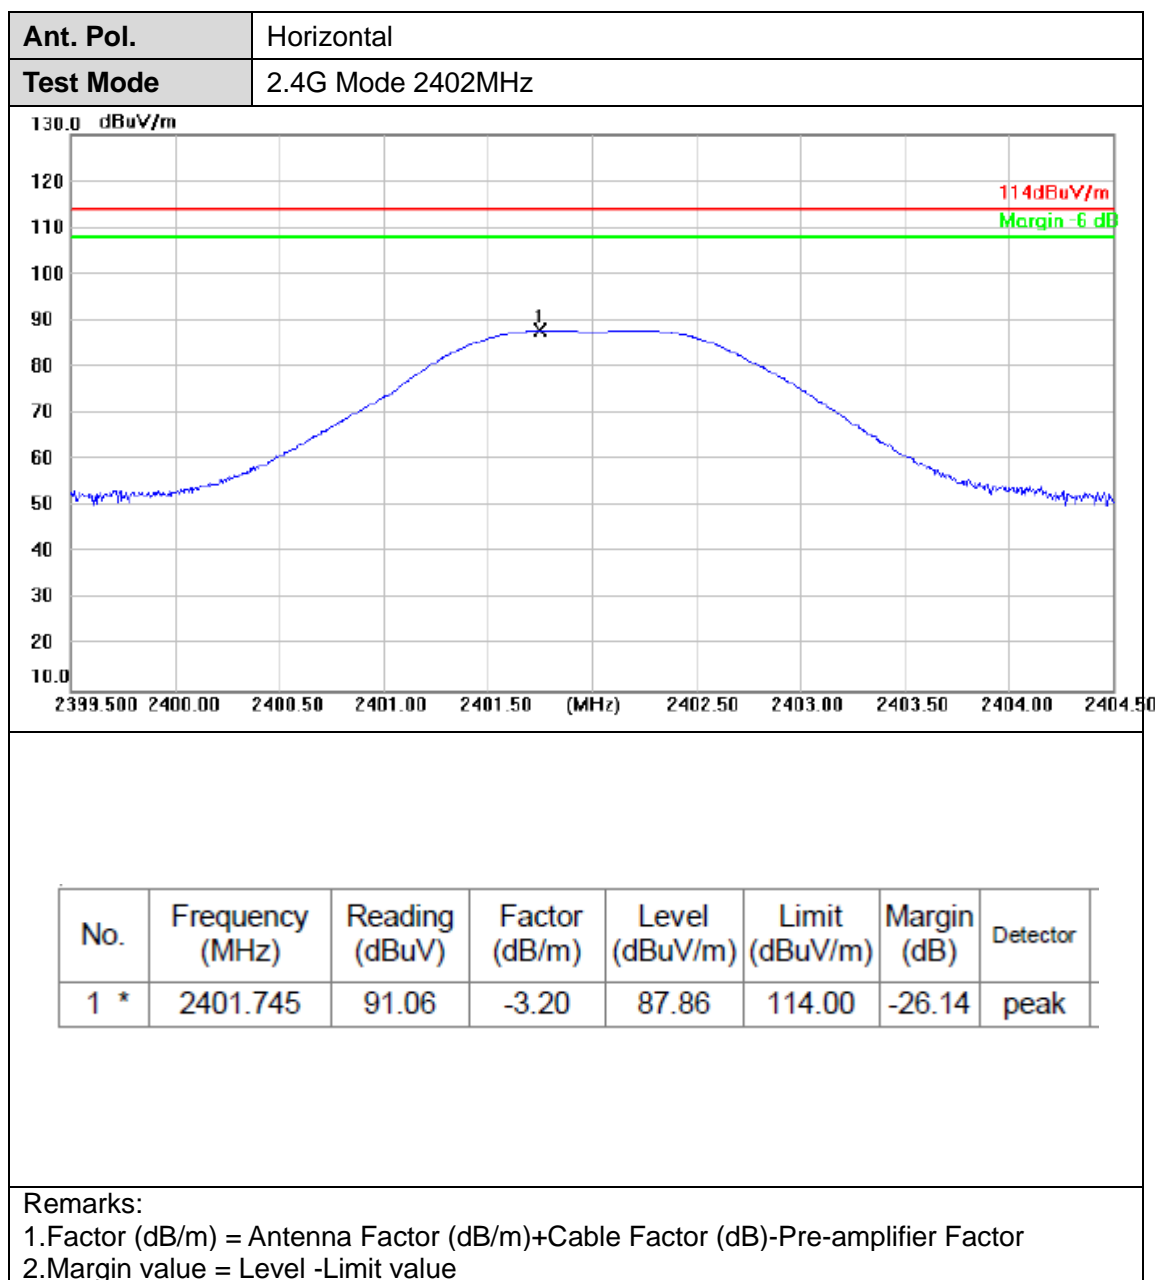
**Test Results**

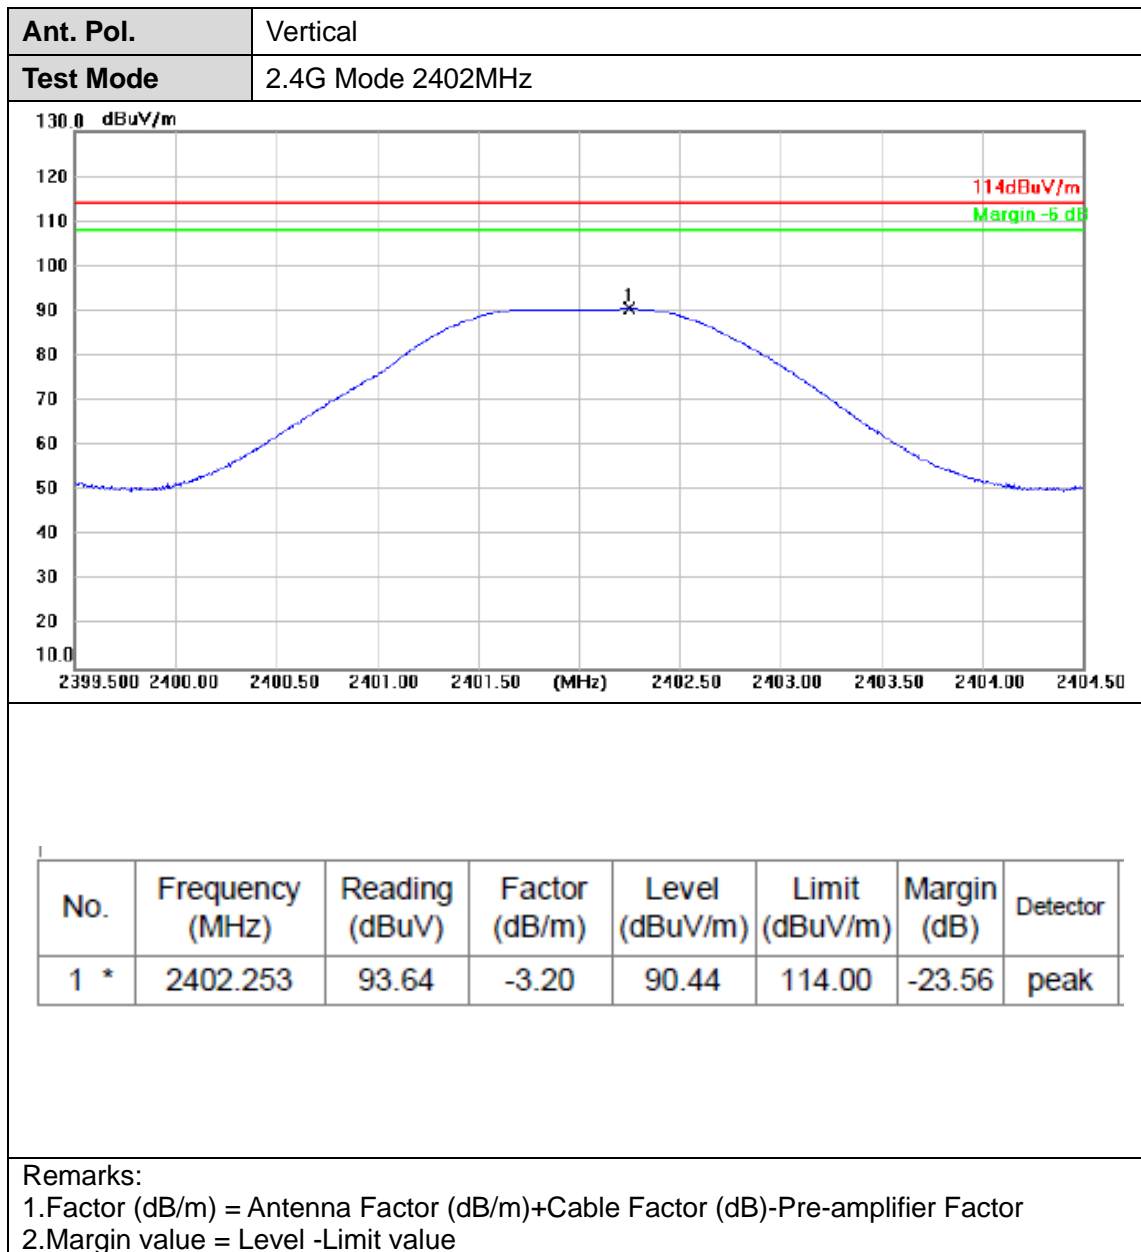

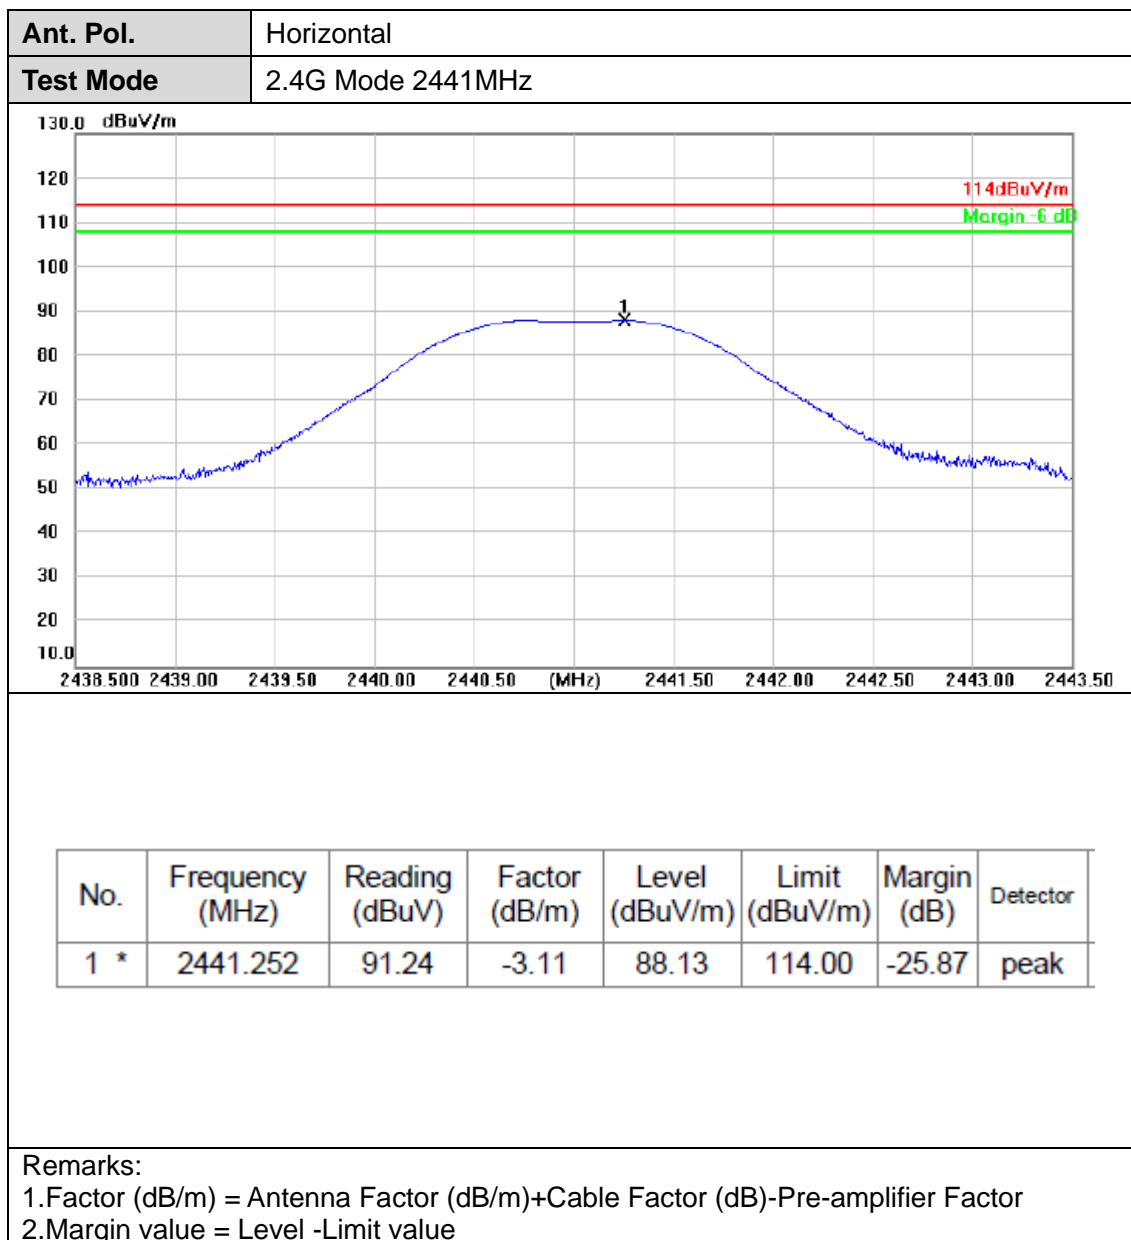

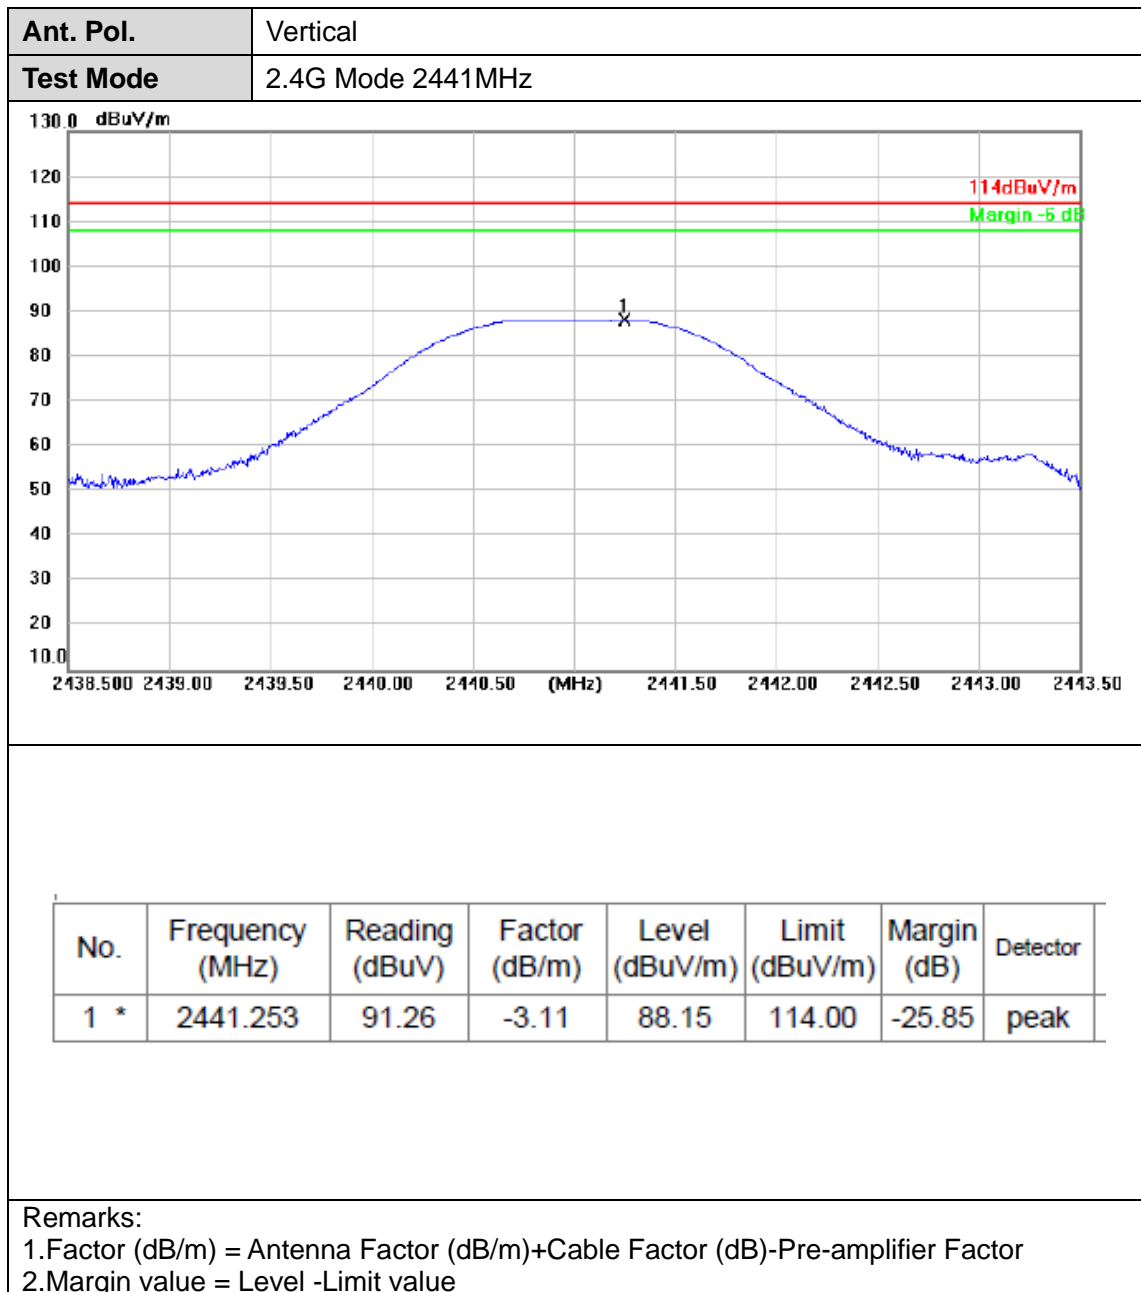

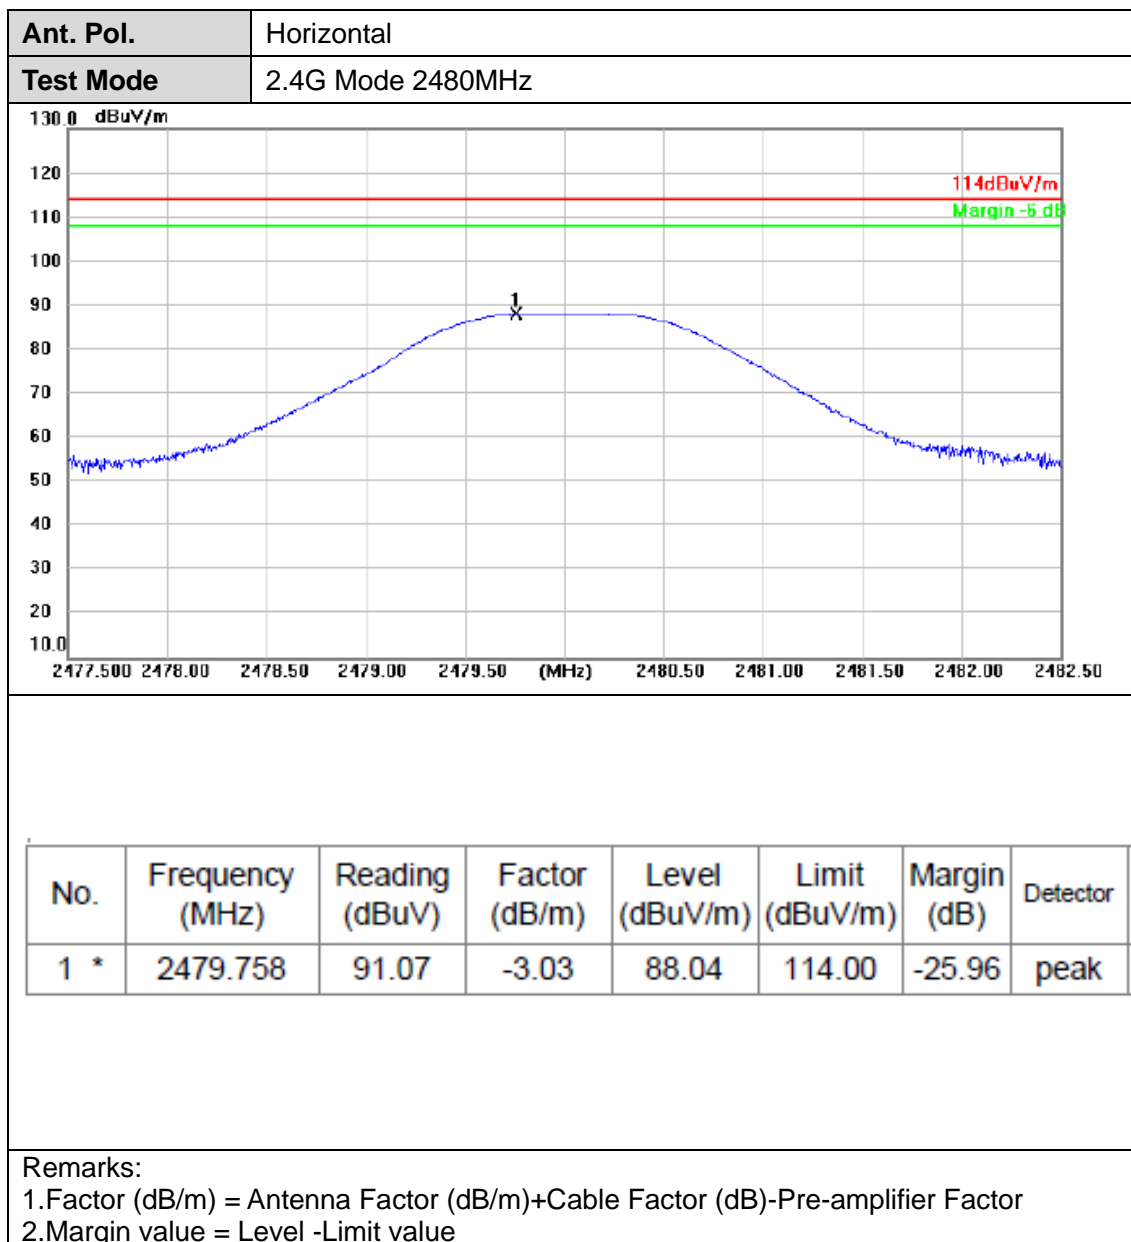

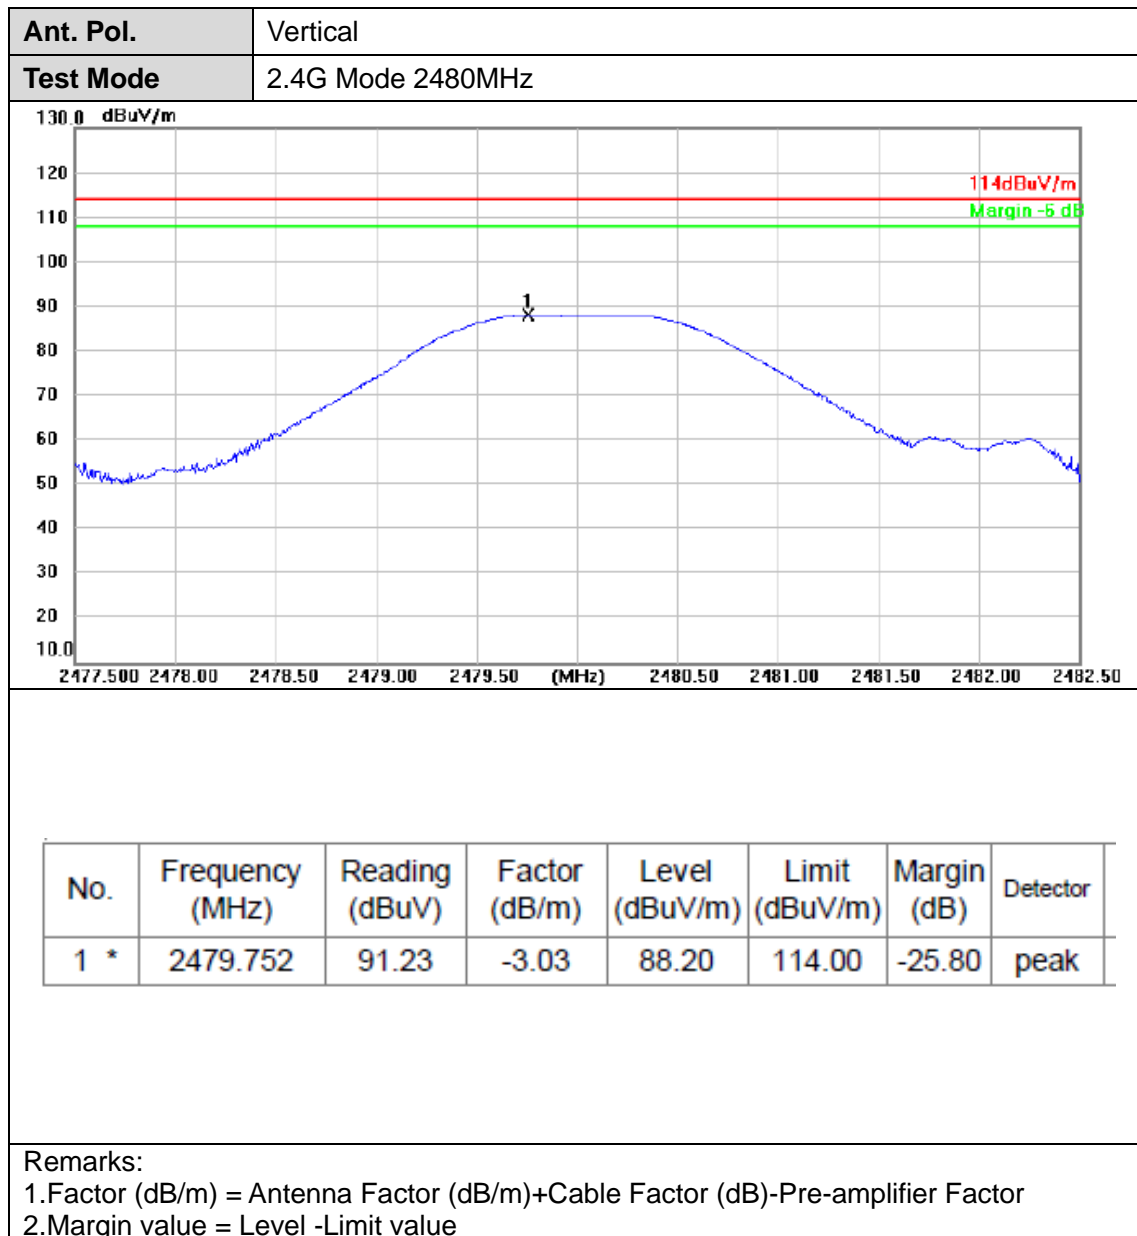

3.4. Radiated Spurious Emissions and Bandedge Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

Test Configuration


- 9 kHz ~ 30 MHz

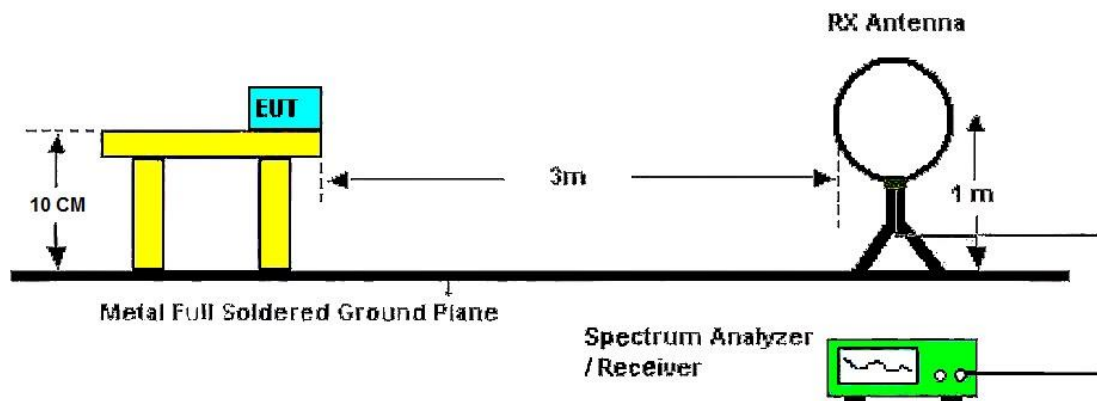

- 30 MHz ~ 1 GHz

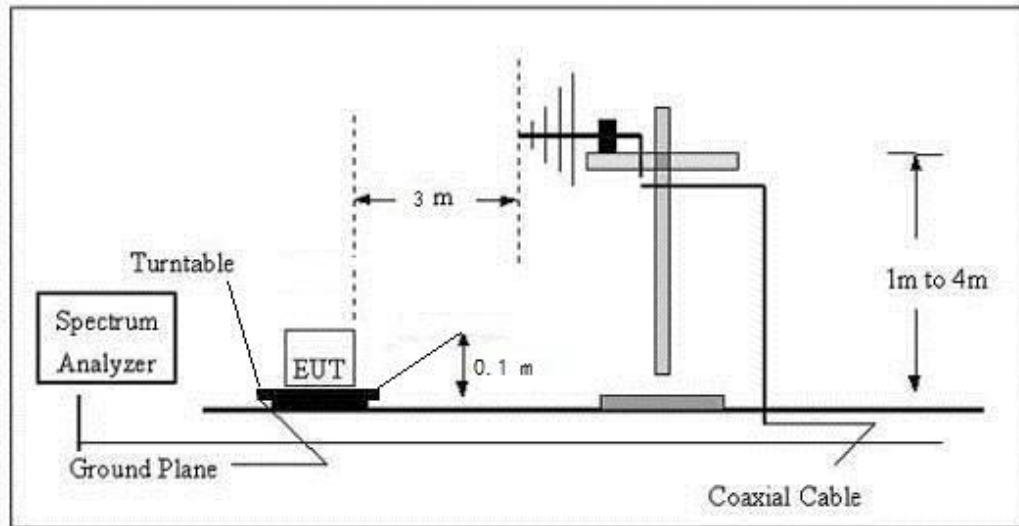

● Above 1 GHz

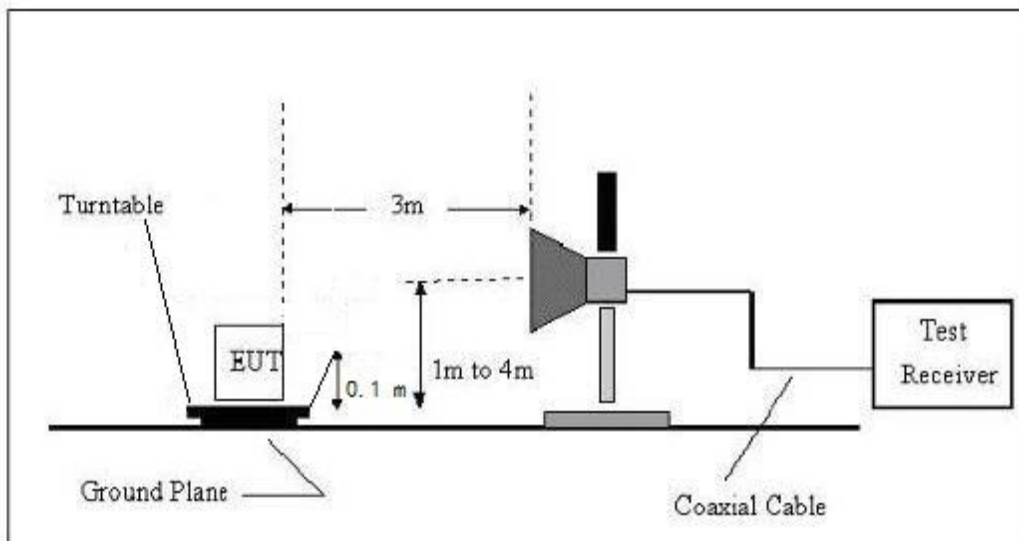

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 0.1 meter above ground for below 1 GHz, and 0.1 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings
Span shall wide enough to fully capture the emission being measured;
(1)Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
(2)From 1 GHz to 10th harmonic:

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-060_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cnca.cn](http://www.cnca.cn)



RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3

Test Results


Radiated Spurious Emissions


■ 9 kHz ~ 30 MHz

The EUT was pre-scanned the frequency band (9 kHz ~ 30 MHz), found the radiated level lower than the limit, so don't show on the report.



■ 30 MHz ~ 1 GHz

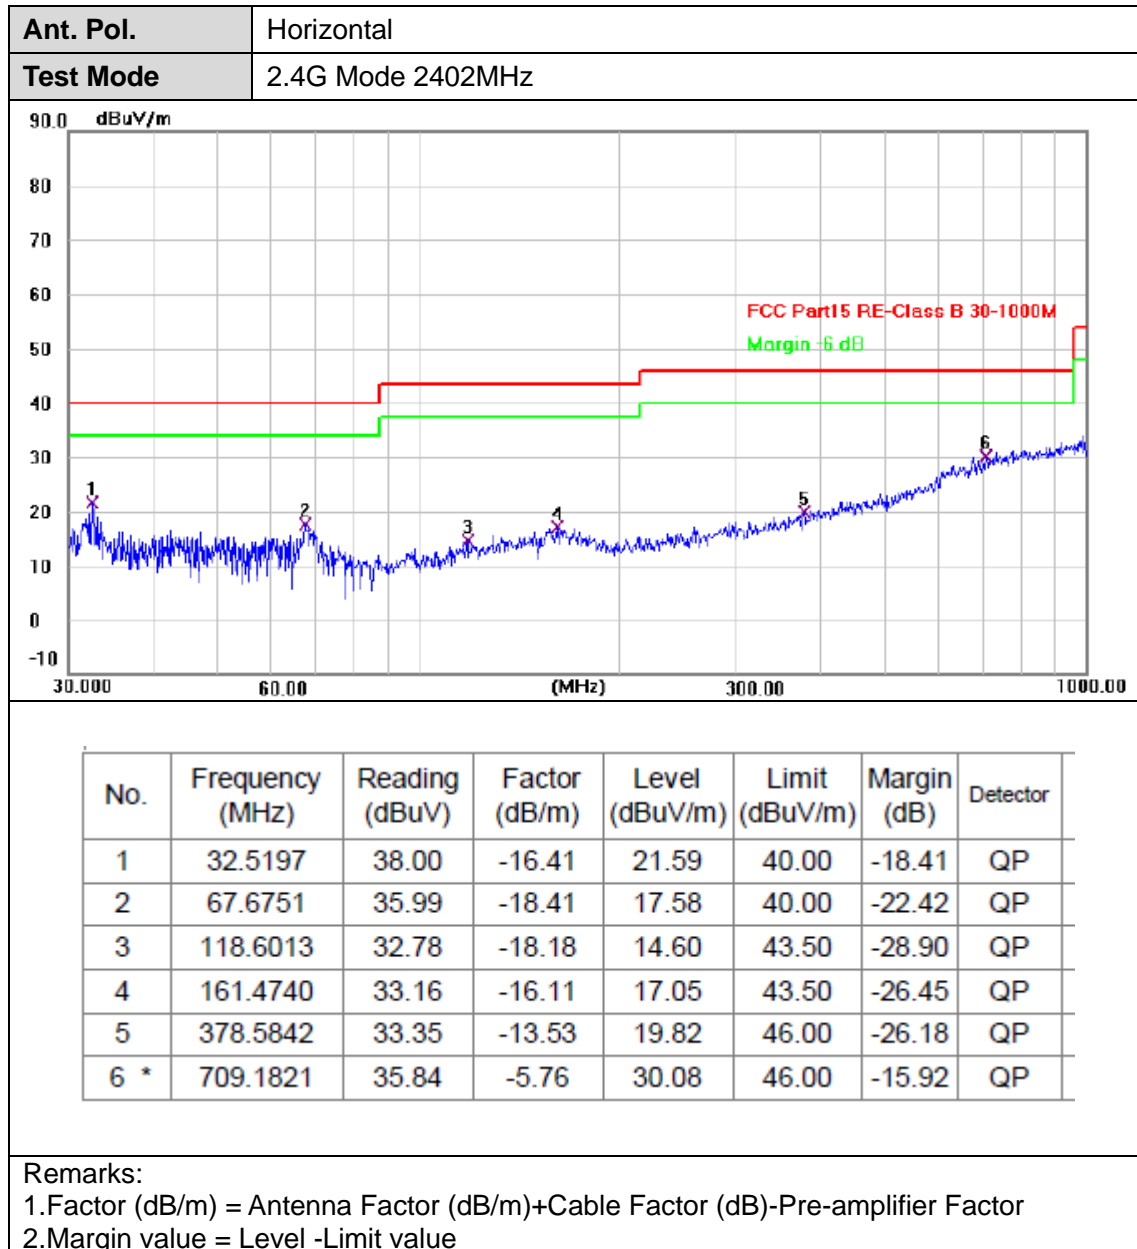

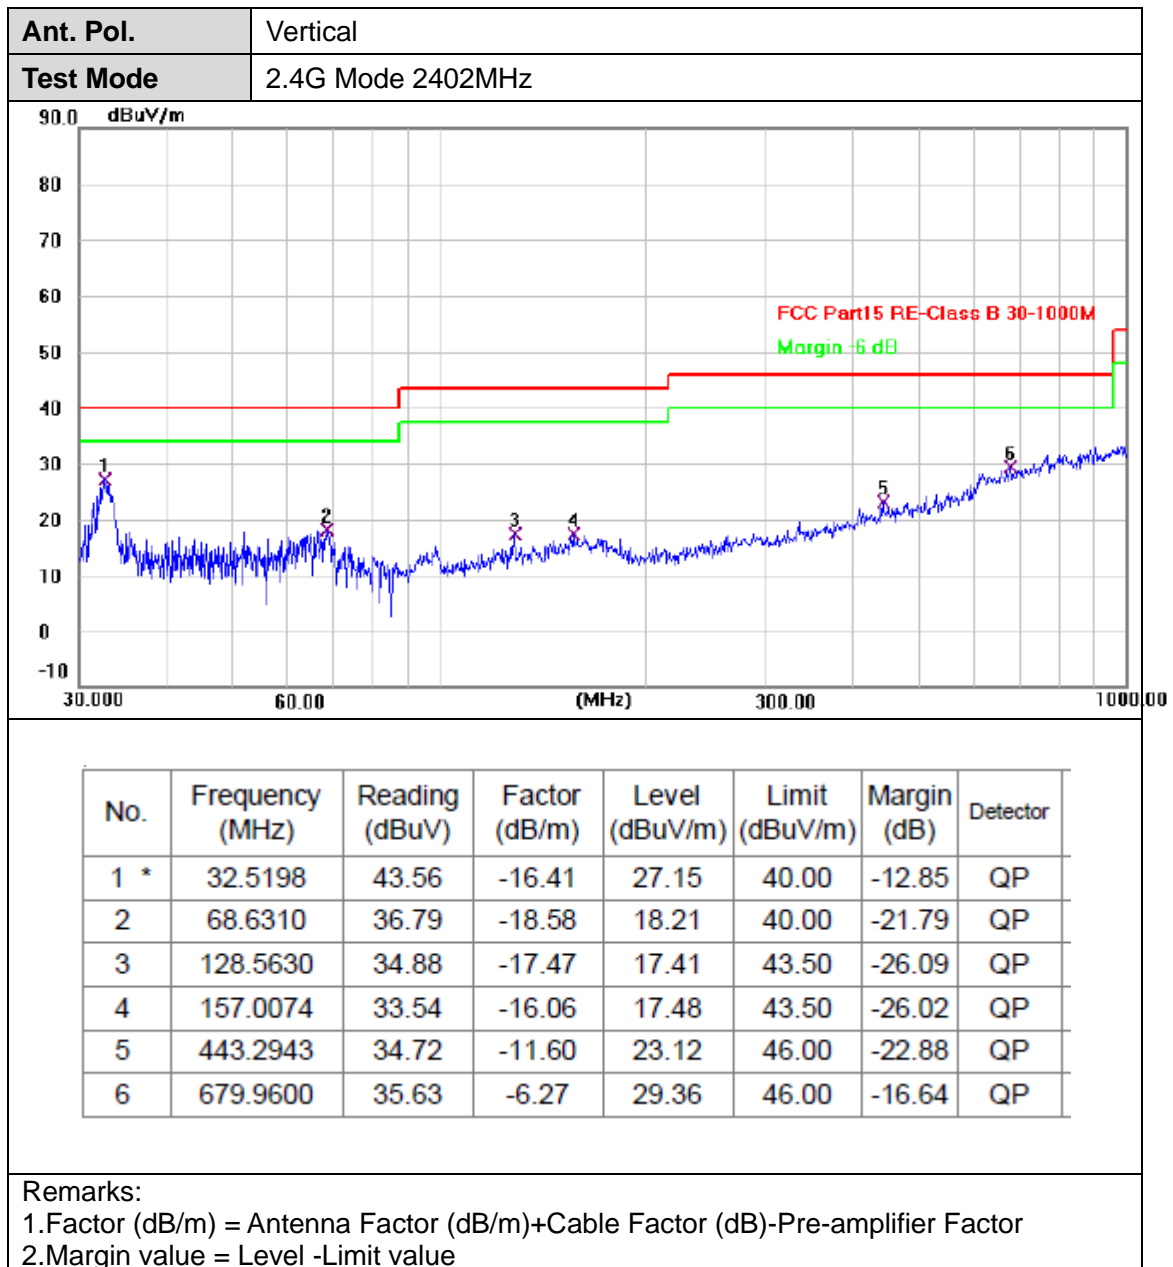



■ Above 1 GHz

Ant. Pol.	Horizontal						
Test Mode	2.4G Mode 2402MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4804.043	38.83	2.00	40.83	54.00	-13.17	AVG
2	4804.622	47.69	2.00	49.69	74.00	-24.31	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant. Pol.	Vertical						
Test Mode	2.4G Mode 2402MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4804.023	40.52	2.00	42.52	54.00	-11.48	AVG
2	4804.479	48.86	2.00	50.86	74.00	-23.14	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant. Pol.	Horizontal						
Test Mode	2.4G Mode 2441MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						


Ant. Pol.	Vertical																														
Test Mode	2.4G Mode 2441MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1 *</td><td>4882.124</td><td>40.70</td><td>2.09</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>AVG</td></tr><tr><td>2</td><td>4882.450</td><td>49.18</td><td>2.09</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4882.124	40.70	2.09	42.79	54.00	-11.21	AVG	2	4882.450	49.18	2.09	51.27	74.00	-22.73	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4882.124	40.70	2.09	42.79	54.00	-11.21	AVG																								
2	4882.450	49.18	2.09	51.27	74.00	-22.73	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															





Ant. Pol.	Horizontal																														
Test Mode	2.4G Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1 *</td><td>4960.027</td><td>35.74</td><td>2.21</td><td>37.95</td><td>54.00</td><td>-16.05</td><td>AVG</td></tr><tr><td>2</td><td>4960.607</td><td>45.49</td><td>2.21</td><td>47.70</td><td>74.00</td><td>-26.30</td><td>peak</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4960.027	35.74	2.21	37.95	54.00	-16.05	AVG	2	4960.607	45.49	2.21	47.70	74.00	-26.30	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4960.027	35.74	2.21	37.95	54.00	-16.05	AVG																								
2	4960.607	45.49	2.21	47.70	74.00	-26.30	peak																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

Ant. Pol.	Vertical																														
Test Mode	2.4G Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
<table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>4959.482</td><td>48.10</td><td>2.21</td><td>50.31</td><td>74.00</td><td>-23.69</td><td>peak</td></tr><tr><td>2 *</td><td>4960.085</td><td>39.52</td><td>2.21</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>AVG</td></tr></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.482	48.10	2.21	50.31	74.00	-23.69	peak	2 *	4960.085	39.52	2.21	41.73	54.00	-12.27	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.482	48.10	2.21	50.31	74.00	-23.69	peak																								
2 *	4960.085	39.52	2.21	41.73	54.00	-12.27	AVG																								
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value																															

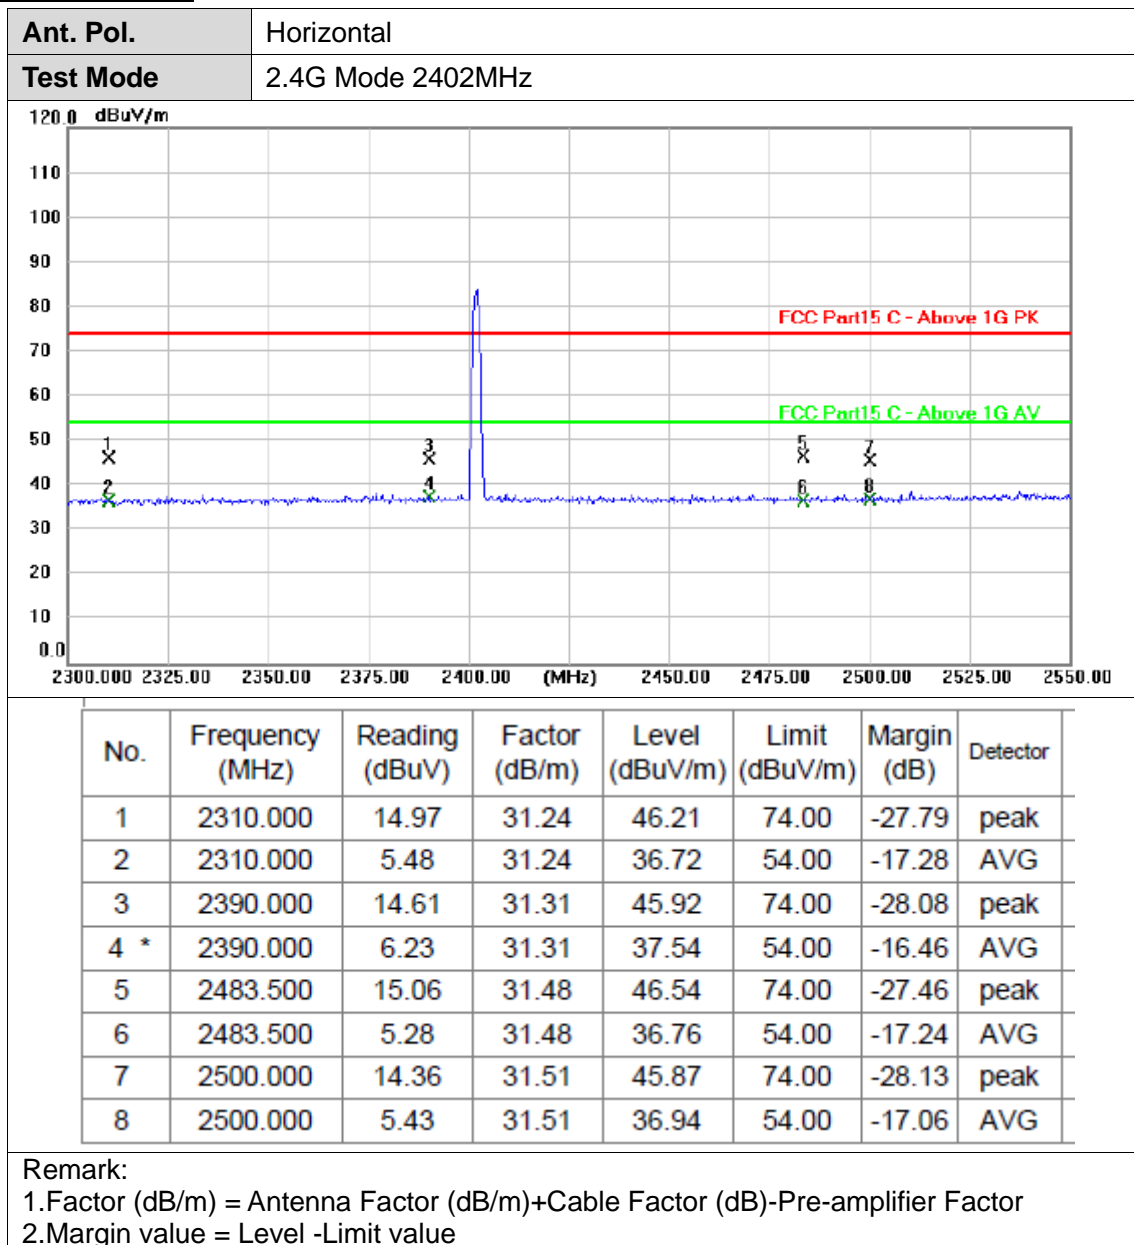**Bandedge Emission**

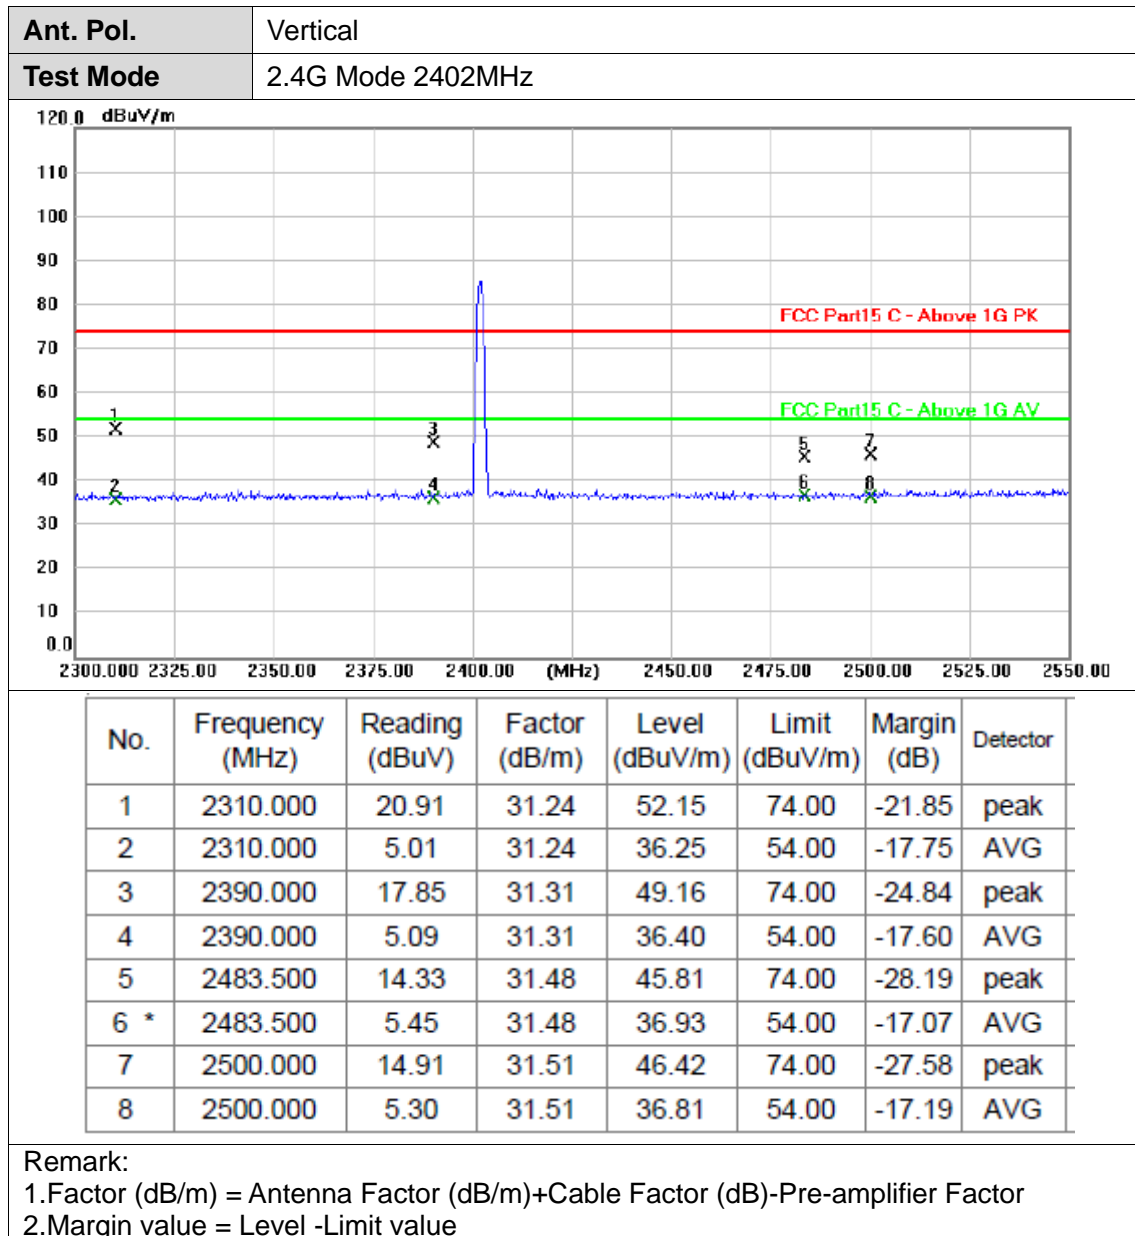

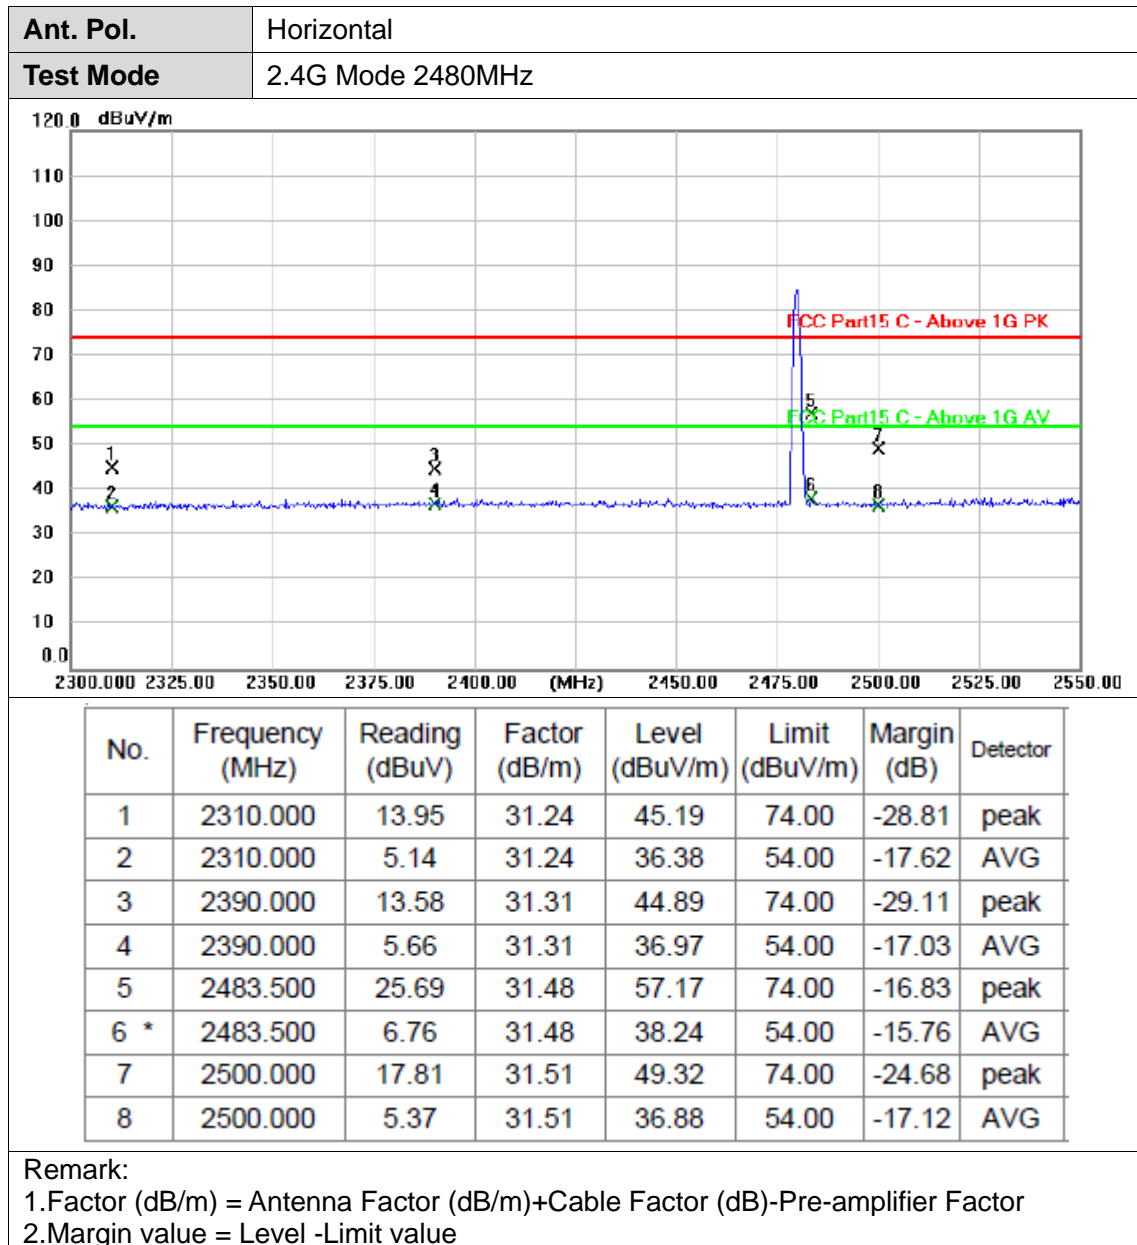

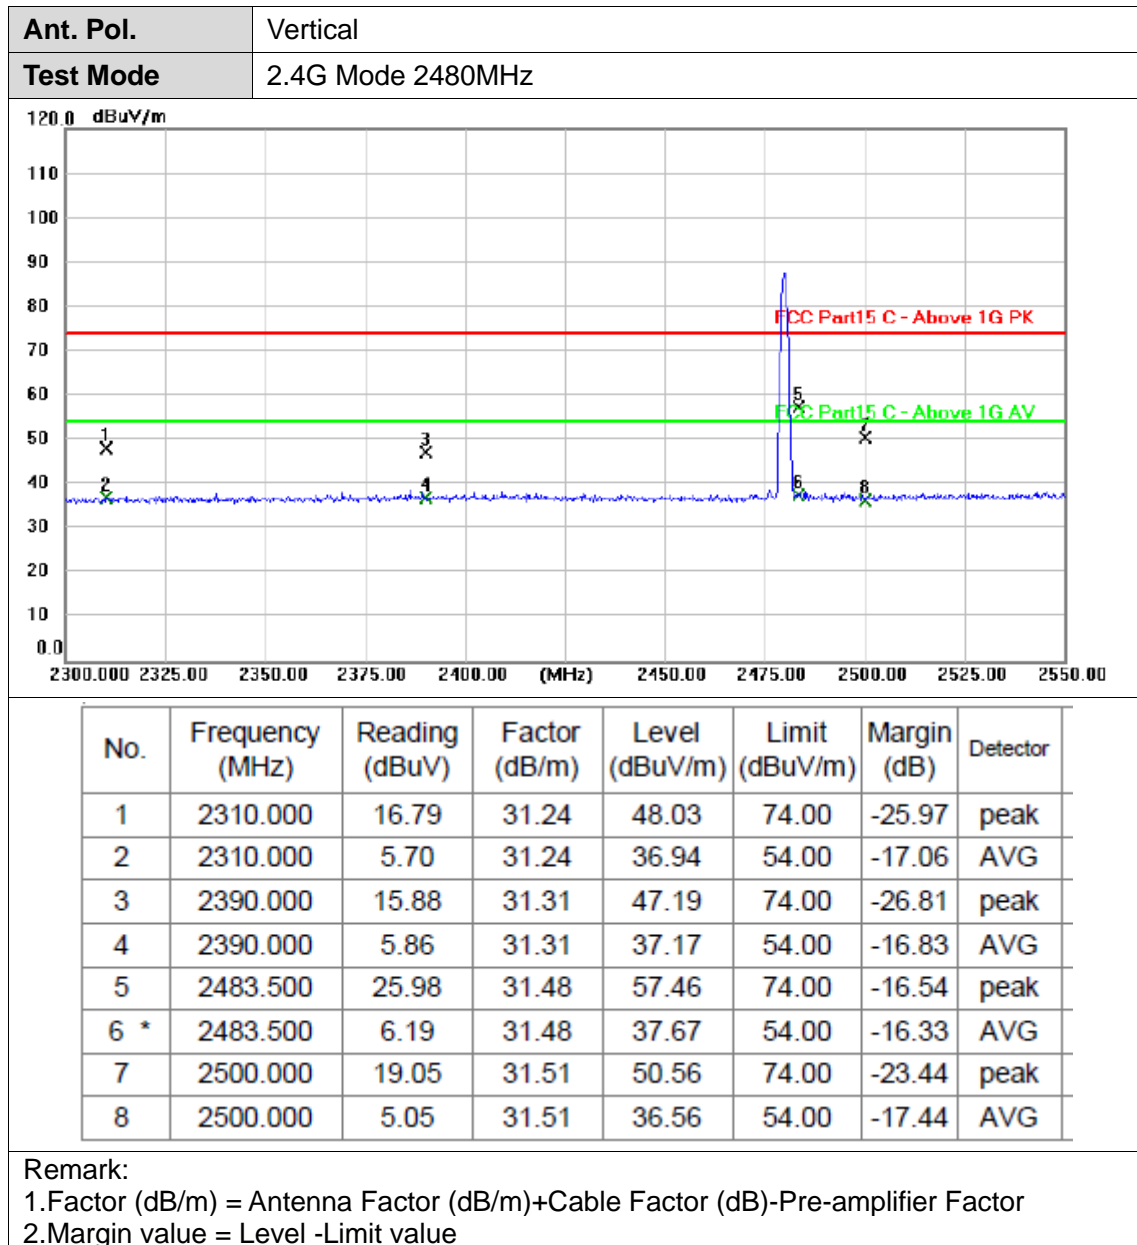



3.5. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

*****THE END OF REPORT*****