

FCC Test Report

Report No.: RF190516E01

FCC ID: PY319200447

Test Model: CAX80

Received Date: May 16, 2019

Test Date: July 05 to 12, 2019

Issued Date: Aug. 06, 2019

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location : E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	35
4.2.1 Limits of Conducted Emission Measurement	35
4.2.2 Test Instruments	35
4.2.3 Test Procedures.....	36
4.2.4 Deviation from Test Standard	36
4.2.5 Test Setup.....	36
4.2.6 EUT Operating Conditions.....	36
4.2.7 Test Results	37
4.3 6dB Bandwidth Measurement	39
4.3.1 Limits of 6dB Bandwidth Measurement	39
4.3.2 Test Setup.....	39
4.3.3 Test Instruments	39
4.3.4 Test Procedure	39
4.3.5 Deviation from Test Standard	39
4.3.6 EUT Operating Conditions.....	39
4.3.7 Test Result.....	40
4.4 Conducted Output Power Measurement.....	42
4.4.1 Limits of Conducted Output Power Measurement	42
4.4.2 Test Setup.....	42
4.4.3 Test Instruments	42
4.4.4 Test Procedures.....	42
4.4.5 Deviation from Test Standard	42
4.4.6 EUT Operating Conditions.....	42
4.4.7 Test Results	43
4.5 Power Spectral Density Measurement.....	47
4.5.1 Limits of Power Spectral Density Measurement	47
4.5.2 Test Setup.....	47
4.5.3 Test Instruments	47
4.5.4 Test Procedure	47
4.5.5 Deviation from Test Standard	47
4.5.6 EUT Operating Condition	47

4.5.7 Test Results	48
4.6 Conducted Out of Band Emission Measurement	51
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	51
4.6.2 Test Setup.....	51
4.6.3 Test Instruments	51
4.6.4 Test Procedure	51
4.6.5 Deviation from Test Standard	51
4.6.6 EUT Operating Condition	51
4.6.7 Test Results	51
5 Pictures of Test Arrangements.....	68
Appendix – Information of the Testing Laboratories	69

Release Control Record

Issue No.	Description	Date Issued
RF190516E01	Original release.	Aug. 06, 2019

1 Certificate of Conformity

Product: Nighthawk CAX8 AX6000 WiFi Cable Router

Brand: NETGEAR

Test Model: CAX80

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, Inc.

Test Date: July 05 to 12, 2019

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Aug. 06, 2019
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Aug. 06, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.08dB at 0.35703 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2387.70MHz
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Nighthawk CAX8 AX6000 WiFi Cable Router
Brand	NETGEAR
Test Model	CAX80
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	19Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT20/40 mode 1024QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2401.9Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	Non-Beamforming Mode: 2.4GHz: 995.416mW 5.18 ~ 5.24GHz: 980.958mW 5.745 ~ 5.825GHz: 995.687mW Beamforming Mode: 2.4GHz: 984.493mW 5.18 ~ 5.24GHz: 980.958mW 5.745 ~ 5.825GHz: 966.147mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	RJ45 cable x 1 (Shielded, 1.8m)

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	P/N	Spec.
1	NETGEAR	2ABS060K 1 NJ	332-11468-01	Input: 100-120Vac, 1.7A, 50/60Hz Output: 19V, 3.16A DC Output cable: Unshielded, 1.85m
2	NETGEAR	AD2003F10	332-11480-01	Input: 100-120Vac, 1.5A, 50/60Hz Output: 19V, 3.16A DC Output cable: Unshielded, 1.85m
3	NETGEAR	ADS-65MI-19B 19060EPC-L ADS-65MI-19B 19060EPCU-L	332-11066-01	Input: 100-120Vac, 1.5A, 50/60Hz Output: 19V, 3.16A DC Output cable: Unshielded, 1.85m

Note: From the above adapters, the AC Power Conducted Emissions worst case was found in **Adapter 3**; the Radiated Emissions worst case was found in **Adapter 2**. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4~2.4835	5.97	PIFA	i-pex(MHF)
5.15~5.25	5.91		
5.25~5.35	6.34		
5.47~5.725	6.05		
5.725~5.85	6.13		

Note: More detailed information, please refer to operating description.

Frequency Range (GHz)	Antenna Net Gain (dBi)	Antenna Type	Connector Type	Cable Length (mm)
5.15~5.85	1.67 (RX only)	PCB	i-pex(MHF)	260

4. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
Receiver Mode	-	1RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
 2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
 3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20 and 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40 and 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6Mb/s

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11g	1 to 11	6	OFDM	BPSK	6Mb/s

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1Mb/s
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6Mb/s
VHT20 (Output power only)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
VHT40 (Output power only)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	Data Rate Parameter
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	22deg. C, 64%RH	120Vac, 60Hz	Ryan Du
RE<1G	22deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 65%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.431/12.506 = 0.994$

802.11g: Duty cycle = $2.063/2.094 = 0.985$


VHT20: Duty cycle = $1.927/1.96 = 0.983$

VHT40: Duty cycle = $0.949/0.982 = 0.966$, Duty factor = $10 * \log(1 / \text{Duty cycle}) = 0.15$


802.11ax (HE20): Duty cycle = $1.488/1.521 = 0.978$, Duty factor = $10 * \log(1 / \text{Duty cycle}) = 0.10$

802.11ax (HE40): Duty cycle = $0.77/0.805 = 0.957$, Duty factor = $10 * \log(1 / \text{Duty cycle}) = 0.19$


802.11b

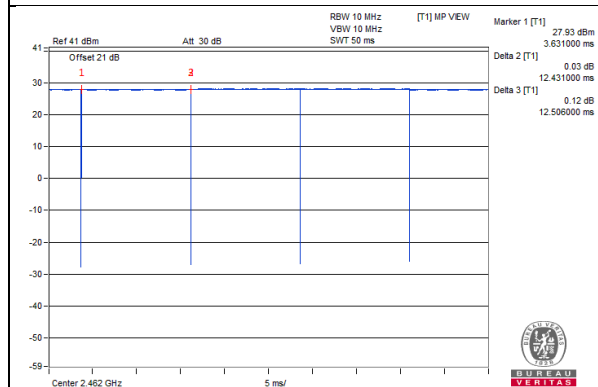


802.11g

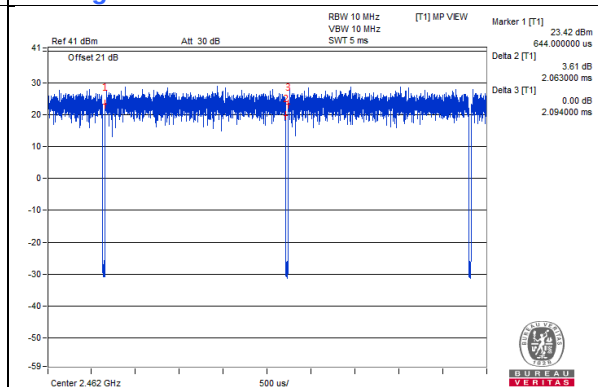


VHT20

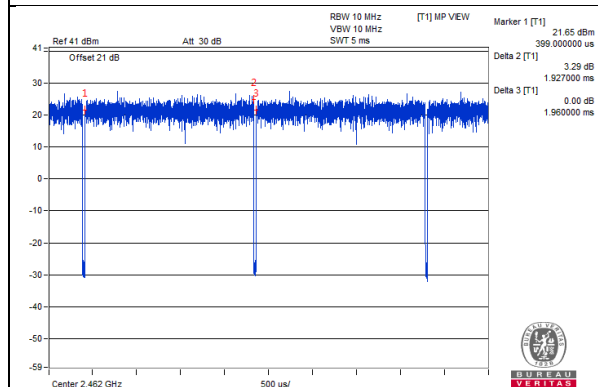


VHT40

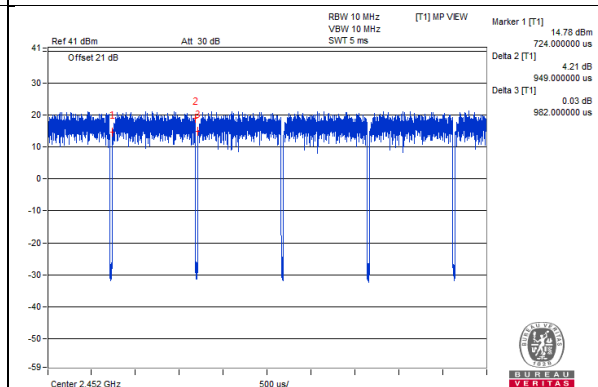

802.11ax (HE20)

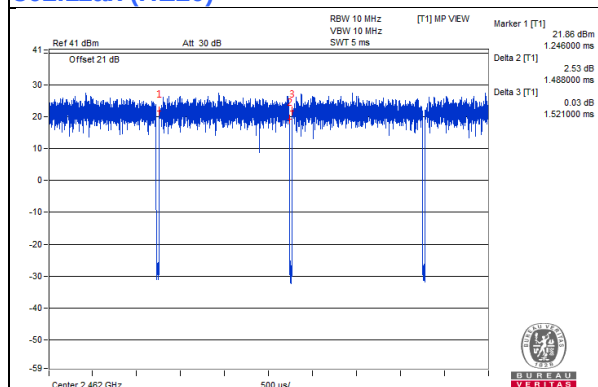

802.11ax (HE40)

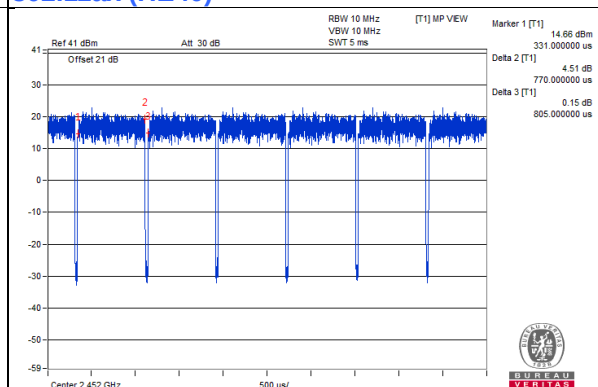

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	81A4	YD02YN2A	PD93165NGU	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	USB Disk	SanDisk(32GB)	NA	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.85	Yes	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Coaxial Cable	1	10	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

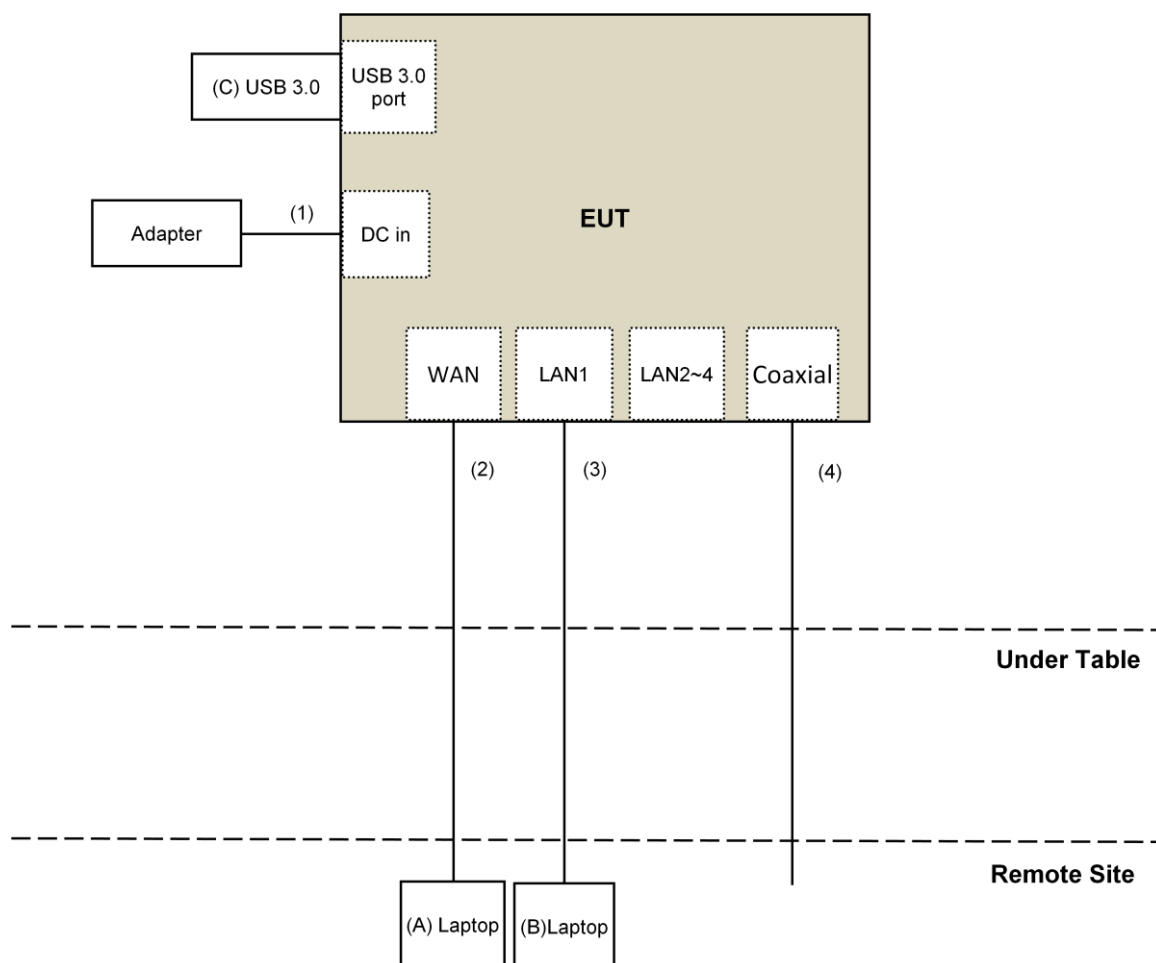

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCi	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCi	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCi	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: July 05 to 09, 2019

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

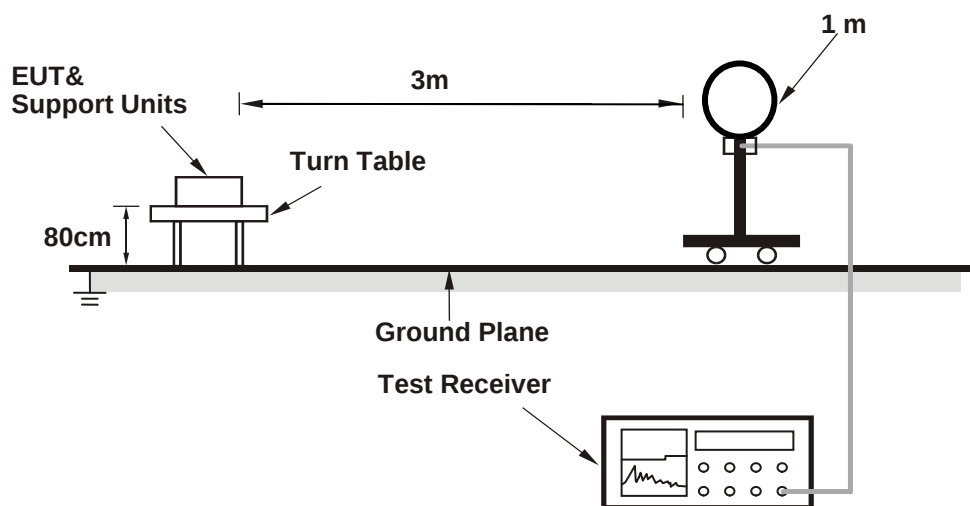

For Radiated emission 30MHz to 1GHz

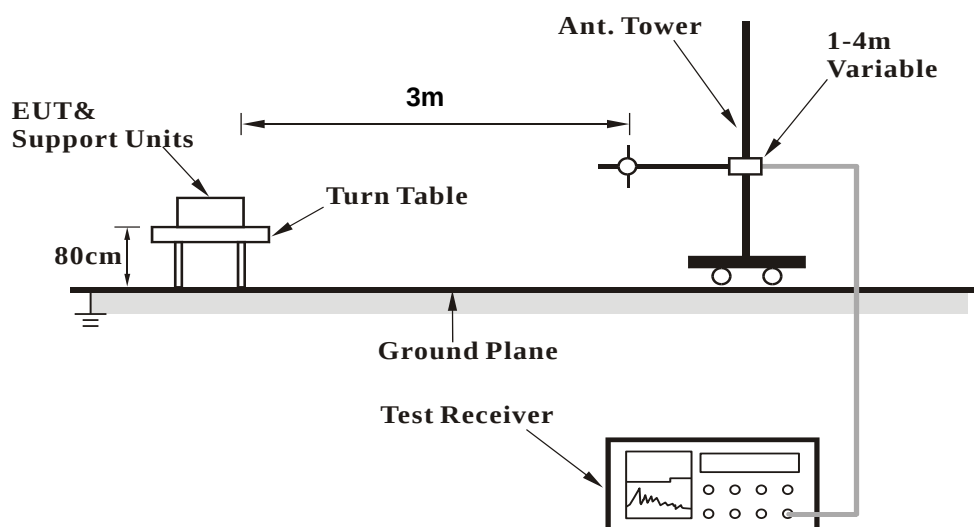

For Radiated emission above 1GHz

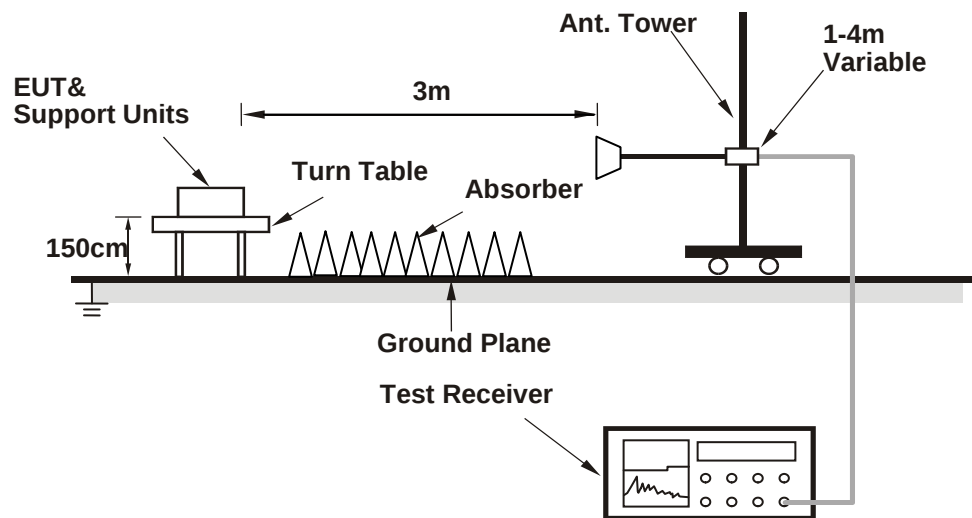

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (Mtool [3.1.0.3]) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	2.00 H	227	63.1	-1.6
2	2390.00	49.5 AV	54.0	-4.5	2.00 H	227	51.1	-1.6
3	*2412.00	116.7 PK			2.00 H	227	118.4	-1.7
4	*2412.00	114.2 AV			2.00 H	227	115.9	-1.7
5	4824.00	48.2 PK	74.0	-25.8	1.59 H	277	45.9	2.3
6	4824.00	45.8 AV	54.0	-8.2	1.59 H	277	43.5	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.36 V	315	63.4	-1.6
2	2390.00	49.8 AV	54.0	-4.2	1.36 V	315	51.4	-1.6
3	*2412.00	117.4 PK			1.36 V	315	119.1	-1.7
4	*2412.00	114.8 AV			1.36 V	315	116.5	-1.7
5	4824.00	48.6 PK	74.0	-25.4	1.56 V	235	46.3	2.3
6	4824.00	47.0 AV	54.0	-7.0	1.56 V	235	44.7	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.4 PK			1.46 H	196	118.2	-1.8
2	*2437.00	114.0 AV			1.46 H	196	115.8	-1.8
3	4874.00	48.9 PK	74.0	-25.1	1.54 H	285	46.5	2.4
4	4874.00	46.2 AV	54.0	-7.8	1.54 H	285	43.8	2.4
5	7311.00	44.2 PK	74.0	-29.8	1.47 H	356	35.0	9.2
6	7311.00	33.2 AV	54.0	-20.8	1.47 H	356	24.0	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.5 PK			1.46 V	345	119.3	-1.8
2	*2437.00	114.6 AV			1.46 V	345	116.4	-1.8
3	4874.00	48.1 PK	74.0	-25.9	1.52 V	242	45.7	2.4
4	4874.00	46.6 AV	54.0	-7.4	1.52 V	242	44.2	2.4
5	7311.00	43.5 PK	74.0	-30.5	1.73 V	304	34.3	9.2
6	7311.00	33.0 AV	54.0	-21.0	1.73 V	304	23.8	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.2 PK			2.01 H	228	118.0	-1.8
2	*2462.00	113.8 AV			2.01 H	228	115.6	-1.8
3	2483.50	62.4 PK	74.0	-11.6	2.01 H	228	64.1	-1.7
4	2483.50	49.8 AV	54.0	-4.2	2.01 H	228	51.5	-1.7
5	4924.00	48.5 PK	74.0	-25.5	1.51 H	271	46.0	2.5
6	4924.00	45.8 AV	54.0	-8.2	1.51 H	271	43.3	2.5
7	7386.00	44.8 PK	74.0	-29.2	1.42 H	346	35.4	9.4
8	7386.00	33.7 AV	54.0	-20.3	1.42 H	346	24.3	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.5 PK			1.47 V	328	119.3	-1.8
2	*2462.00	114.7 AV			1.47 V	328	116.5	-1.8
3	2483.50	61.8 PK	74.0	-12.2	1.47 V	328	63.5	-1.7
4	2483.50	49.5 AV	54.0	-4.5	1.47 V	328	51.2	-1.7
5	4924.00	48.0 PK	74.0	-26.0	1.50 V	252	45.5	2.5
6	4924.00	46.8 AV	54.0	-7.2	1.50 V	252	44.3	2.5
7	7386.00	44.1 PK	74.0	-29.9	1.72 V	304	34.7	9.4
8	7386.00	33.5 AV	54.0	-20.5	1.72 V	304	24.1	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.6 PK	74.0	-0.4	1.73 H	212	75.2	-1.6
2	2390.00	50.6 AV	54.0	-3.4	1.73 H	212	52.2	-1.6
3	*2412.00	119.3 PK			1.73 H	212	121.0	-1.7
4	*2412.00	108.6 AV			1.73 H	212	110.3	-1.7
5	4824.00	49.0 PK	74.0	-25.0	1.90 H	239	46.7	2.3
6	4824.00	33.2 AV	54.0	-20.8	1.90 H	239	30.9	2.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	2.15 V	55	69.7	-1.6
2	2390.00	47.2 AV	54.0	-6.8	2.15 V	55	48.8	-1.6
3	*2412.00	118.7 PK			2.15 V	55	120.4	-1.7
4	*2412.00	109.0 AV			2.15 V	55	110.7	-1.7
5	4824.00	48.2 PK	74.0	-25.8	2.23 V	5	45.9	2.3
6	4824.00	33.5 AV	54.0	-20.5	2.23 V	5	31.2	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	1.97 H	330	65.8	-1.6
2	2390.00	46.8 AV	54.0	-7.2	1.97 H	330	48.4	-1.6
3	*2437.00	121.0 PK			1.97 H	330	122.8	-1.8
4	*2437.00	110.6 AV			1.97 H	330	112.4	-1.8
5	2483.50	64.4 PK	74.0	-9.6	1.97 H	330	66.1	-1.7
6	2483.50	47.5 AV	54.0	-6.5	1.97 H	330	49.2	-1.7
7	4874.00	55.4 PK	74.0	-18.6	1.92 H	254	53.0	2.4
8	4874.00	41.4 AV	54.0	-12.6	1.92 H	254	39.0	2.4
9	7311.00	50.6 PK	74.0	-23.4	1.45 H	338	41.4	9.2
10	7311.00	36.8 AV	54.0	-17.2	1.45 H	338	27.6	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.42 V	320	63.4	-1.6
2	2390.00	44.4 AV	54.0	-9.6	1.42 V	320	46.0	-1.6
3	*2437.00	122.2 PK			1.42 V	320	124.0	-1.8
4	*2437.00	111.3 AV			1.42 V	320	113.1	-1.8
5	2483.50	62.1 PK	74.0	-11.9	1.42 V	320	63.8	-1.7
6	2483.50	45.9 AV	54.0	-8.1	1.42 V	320	47.6	-1.7
7	4874.00	56.1 PK	74.0	-17.9	2.31 V	18	53.7	2.4
8	4874.00	41.3 AV	54.0	-12.7	2.31 V	18	38.9	2.4
9	7311.00	50.2 PK	74.0	-23.8	1.72 V	306	41.0	9.2
10	7311.00	35.2 AV	54.0	-18.8	1.72 V	306	26.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.0 PK			2.46 H	189	119.8	-1.8
2	*2462.00	107.9 AV			2.46 H	189	109.7	-1.8
3	2483.50	73.7 PK	74.0	-0.3	2.46 H	189	75.4	-1.7
4	2483.50	51.2 AV	54.0	-2.8	2.46 H	189	52.9	-1.7
5	4924.00	48.9 PK	74.0	-25.1	1.95 H	254	46.4	2.5
6	4924.00	33.2 AV	54.0	-20.8	1.95 H	254	30.7	2.5
7	7386.00	50.8 PK	74.0	-23.2	1.39 H	327	41.4	9.4
8	7386.00	35.7 AV	54.0	-18.3	1.39 H	327	26.3	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.5 PK			1.20 V	325	120.3	-1.8
2	*2462.00	108.6 AV			1.20 V	325	110.4	-1.8
3	2483.50	70.5 PK	74.0	-3.5	1.20 V	325	72.2	-1.7
4	2483.50	50.9 AV	54.0	-3.1	1.20 V	325	52.6	-1.7
5	4924.00	48.0 PK	74.0	-26.0	2.26 V	11	45.5	2.5
6	4924.00	33.4 AV	54.0	-20.6	2.26 V	11	30.9	2.5
7	7386.00	50.5 PK	74.0	-23.5	1.67 V	318	41.1	9.4
8	7386.00	35.4 AV	54.0	-18.6	1.67 V	318	26.0	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.8 PK	74.0	-0.2	1.97 H	207	75.4	-1.6
2	2390.00	50.6 AV	54.0	-3.4	1.97 H	207	52.2	-1.6
3	*2412.00	119.1 PK			1.97 H	207	120.8	-1.7
4	*2412.00	106.2 AV			1.97 H	207	107.9	-1.7
5	4824.00	48.6 PK	74.0	-25.4	1.99 H	249	46.3	2.3
6	4824.00	32.9 AV	54.0	-21.1	1.99 H	249	30.6	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.47 V	319	72.9	-1.6
2	2390.00	49.5 AV	54.0	-4.5	1.47 V	319	51.1	-1.6
3	*2412.00	120.1 PK			1.47 V	319	121.8	-1.7
4	*2412.00	106.9 AV			1.47 V	319	108.6	-1.7
5	4824.00	47.6 PK	74.0	-26.4	2.23 V	5	45.3	2.3
6	4824.00	33.0 AV	54.0	-21.0	2.23 V	5	30.7	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	2.00 H	195	70.3	-1.6
2	2390.00	49.5 AV	54.0	-4.5	2.00 H	195	51.1	-1.6
3	*2437.00	122.2 PK			2.00 H	195	124.0	-1.8
4	*2437.00	109.1 AV			2.00 H	195	110.9	-1.8
5	2483.50	71.5 PK	74.0	-2.5	2.00 H	195	73.2	-1.7
6	2483.50	50.2 AV	54.0	-3.8	2.00 H	195	51.9	-1.7
7	4874.00	55.2 PK	74.0	-18.8	1.96 H	262	52.8	2.4
8	4874.00	41.3 AV	54.0	-12.7	1.96 H	262	38.9	2.4
9	7311.00	50.8 PK	74.0	-23.2	1.48 H	352	41.6	9.2
10	7311.00	36.7 AV	54.0	-17.3	1.48 H	352	27.5	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.38 V	322	63.5	-1.6
2	2390.00	44.5 AV	54.0	-9.5	1.38 V	322	46.1	-1.6
3	*2437.00	122.8 PK			1.38 V	322	124.6	-1.8
4	*2437.00	109.9 AV			1.38 V	322	111.7	-1.8
5	2483.50	61.8 PK	74.0	-12.2	1.38 V	322	63.5	-1.7
6	2483.50	45.4 AV	54.0	-8.6	1.38 V	322	47.1	-1.7
7	4874.00	56.5 PK	74.0	-17.5	2.32 V	6	54.1	2.4
8	4874.00	41.5 AV	54.0	-12.5	2.32 V	6	39.1	2.4
9	7311.00	50.1 PK	74.0	-23.9	1.75 V	307	40.9	9.2
10	7311.00	35.1 AV	54.0	-18.9	1.75 V	307	25.9	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.7 PK			1.99 H	202	119.5	-1.8
2	*2462.00	105.1 AV			1.99 H	202	106.9	-1.8
3	2483.50	73.8 PK	74.0	-0.2	1.99 H	202	75.5	-1.7
4	2483.50	49.1 AV	54.0	-4.9	1.99 H	202	50.8	-1.7
5	4924.00	48.6 PK	74.0	-25.4	1.96 H	239	46.1	2.5
6	4924.00	33.0 AV	54.0	-21.0	1.96 H	239	30.5	2.5
7	7386.00	50.8 PK	74.0	-23.2	1.43 H	321	41.4	9.4
8	7386.00	36.0 AV	54.0	-18.0	1.43 H	321	26.6	9.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.8 PK			1.36 V	333	120.6	-1.8
2	*2462.00	106.0 AV			1.36 V	333	107.8	-1.8
3	2483.50	71.2 PK	74.0	-2.8	1.36 V	333	72.9	-1.7
4	2483.50	49.2 AV	54.0	-4.8	1.36 V	333	50.9	-1.7
5	4924.00	48.1 PK	74.0	-25.9	2.24 V	18	45.6	2.5
6	4924.00	33.7 AV	54.0	-20.3	2.24 V	18	31.2	2.5
7	7386.00	51.0 PK	74.0	-23.0	1.66 V	307	41.6	9.4
8	7386.00	35.7 AV	54.0	-18.3	1.66 V	307	26.3	9.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

802.11ax (HE40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.70	64.8 PK	74.0	-9.2	1.90 H	206	66.4	-1.6
2	2387.70	53.9 AV	54.0	-0.1	1.90 H	206	55.5	-1.6
3	*2422.00	115.4 PK			1.90 H	206	117.1	-1.7
4	*2422.00	105.1 AV			1.90 H	206	106.8	-1.7
5	4844.00	48.7 PK	74.0	-25.3	1.98 H	243	46.5	2.2
6	4844.00	33.2 AV	54.0	-20.8	1.98 H	243	31.0	2.2
7	7266.00	50.7 PK	74.0	-23.3	1.43 H	335	41.7	9.0
8	7266.00	35.9 AV	54.0	-18.1	1.43 H	335	26.9	9.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.60	63.8 PK	74.0	-10.2	1.42 V	331	65.4	-1.6
2	2385.60	51.6 AV	54.0	-2.4	1.42 V	331	53.2	-1.6
3	*2422.00	114.4 PK			1.42 V	331	116.1	-1.7
4	*2422.00	103.2 AV			1.42 V	331	104.9	-1.7
5	4844.00	48.2 PK	74.0	-25.8	2.25 V	21	46.0	2.2
6	4844.00	33.3 AV	54.0	-20.7	2.25 V	21	31.1	2.2
7	7266.00	50.2 PK	74.0	-23.8	1.72 V	328	41.2	9.0
8	7266.00	35.0 AV	54.0	-19.0	1.72 V	328	26.0	9.0

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.52 H	204	71.8	-1.6
2	2390.00	53.7 AV	54.0	-0.3	1.52 H	204	55.3	-1.6
3	*2437.00	118.7 PK			1.52 H	204	120.5	-1.8
4	*2437.00	107.1 AV			1.52 H	204	108.9	-1.8
5	2483.50	71.2 PK	74.0	-2.8	1.52 H	204	72.9	-1.7
6	2483.50	51.1 AV	54.0	-2.9	1.52 H	204	52.8	-1.7
7	2486.50	72.7 PK	74.0	-1.3	1.52 H	204	74.4	-1.7
8	2486.50	52.4 AV	54.0	-1.6	1.52 H	204	54.1	-1.7
9	4874.00	49.0 PK	74.0	-25.0	1.91 H	258	46.6	2.4
10	4874.00	33.5 AV	54.0	-20.5	1.91 H	258	31.1	2.4
11	7311.00	51.2 PK	74.0	-22.8	1.36 H	341	42.0	9.2
12	7311.00	36.0 AV	54.0	-18.0	1.36 H	341	26.8	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.36 V	330	69.8	-1.6
2	2390.00	52.2 AV	54.0	-1.8	1.36 V	330	53.8	-1.6
3	*2437.00	117.9 PK			1.36 V	330	119.7	-1.8
4	*2437.00	105.8 AV			1.36 V	330	107.6	-1.8
5	2483.50	66.1 PK	74.0	-7.9	1.36 V	330	67.8	-1.7
6	2483.50	49.9 AV	54.0	-4.1	1.36 V	330	51.6	-1.7
7	4874.00	47.8 PK	74.0	-26.2	2.27 V	9	45.4	2.4
8	4874.00	33.1 AV	54.0	-20.9	2.27 V	9	30.7	2.4
9	7311.00	50.4 PK	74.0	-23.6	1.66 V	303	41.2	9.2
10	7311.00	35.2 AV	54.0	-18.8	1.66 V	303	26.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	114.3 PK			1.85 H	206	116.1	-1.8
2	*2452.00	103.3 AV			1.85 H	206	105.1	-1.8
3	2485.20	66.1 PK	74.0	-7.9	1.85 H	206	67.8	-1.7
4	2485.20	53.5 AV	54.0	-0.5	1.85 H	206	55.2	-1.7
5	4904.00	49.5 PK	74.0	-24.5	1.93 H	262	47.0	2.5
6	4904.00	33.6 AV	54.0	-20.4	1.93 H	262	31.1	2.5
7	7356.00	50.3 PK	74.0	-23.7	1.45 H	327	41.1	9.2
8	7356.00	35.5 AV	54.0	-18.5	1.45 H	327	26.3	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	113.1 PK			1.48 V	347	114.9	-1.8
2	*2452.00	102.0 AV			1.48 V	347	103.8	-1.8
3	2483.50	63.3 PK	74.0	-10.7	1.48 V	347	65.0	-1.7
4	2483.50	50.4 AV	54.0	-3.6	1.48 V	347	52.1	-1.7
5	4904.00	48.4 PK	74.0	-25.6	2.30 V	19	45.9	2.5
6	4904.00	33.6 AV	54.0	-20.4	2.30 V	19	31.1	2.5
7	7356.00	50.3 PK	74.0	-23.7	1.63 V	310	41.1	9.2
8	7356.00	35.0 AV	54.0	-19.0	1.63 V	310	25.8	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

Below 1GHz Data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	108.25	29.0 QP	43.5	-14.5	1.77 H	265	39.8	-10.8
2	252.35	33.3 QP	46.0	-12.7	1.65 H	71	42.0	-8.7
3	500.33	33.0 QP	46.0	-13.0	1.82 H	328	34.8	-1.8
4	736.38	42.3 QP	46.0	-3.7	1.99 H	271	38.9	3.4
5	765.84	42.0 QP	46.0	-4.0	1.32 H	17	38.3	3.7
6	790.87	41.6 QP	46.0	-4.4	1.44 H	160	37.4	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

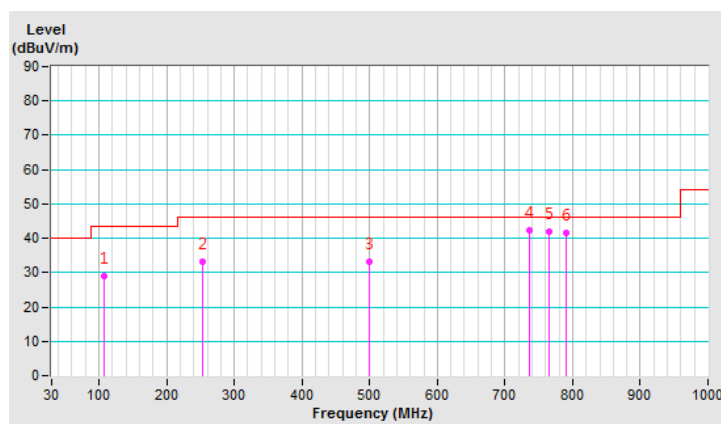


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.22	36.0 QP	40.0	-4.0	1.11 V	160	44.4	-8.4
2	93.34	35.0 QP	43.5	-8.5	1.24 V	318	47.9	-12.9
3	520.36	38.4 QP	46.0	-7.6	1.35 V	208	39.7	-1.3
4	668.36	34.4 QP	46.0	-11.6	1.06 V	312	32.8	1.6
5	731.02	39.9 QP	46.0	-6.1	1.85 V	19	36.9	3.0
6	914.35	38.9 QP	46.0	-7.1	1.00 V	12	32.5	6.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

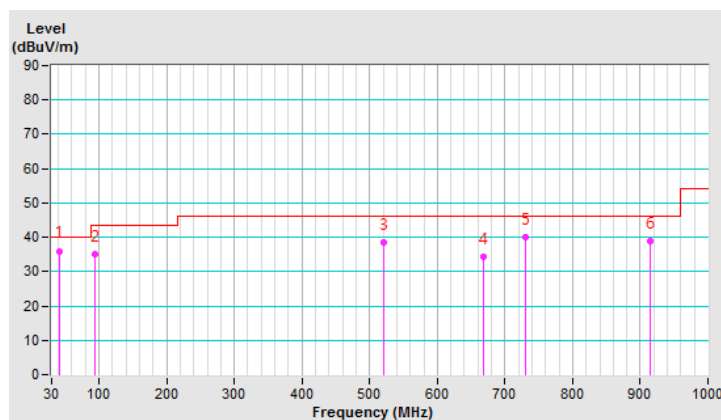

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: July 12, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

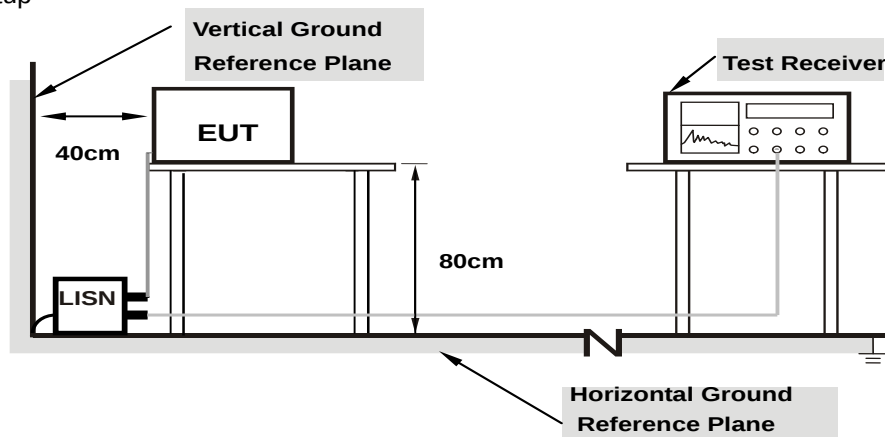

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.96	29.63	17.58	39.59	27.54	65.79	55.79	-26.20	-28.25
2	0.20469	9.97	22.49	15.46	32.46	25.43	63.42	53.42	-30.96	-27.99
3	0.36094	9.99	27.34	17.19	37.33	27.18	58.71	48.71	-21.38	-21.53
4	0.97031	10.04	17.23	9.56	27.27	19.60	56.00	46.00	-28.73	-26.40
5	2.17188	10.12	13.35	4.87	23.47	14.99	56.00	46.00	-32.53	-31.01
6	19.82031	11.35	11.92	5.55	23.27	16.90	60.00	50.00	-36.73	-33.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

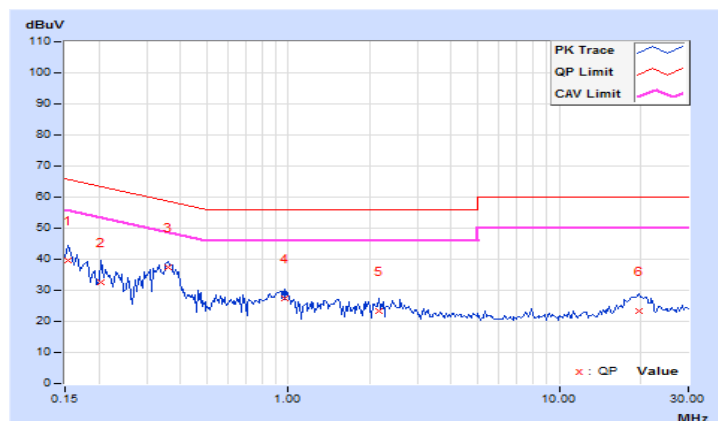


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.94	29.98	17.11	39.92	27.05	66.00	56.00	-26.08	-28.95
2	0.20078	9.95	24.39	16.29	34.34	26.24	63.58	53.58	-29.24	-27.34
3	0.35703	9.97	28.93	23.75	38.90	33.72	58.80	48.80	-19.90	-15.08
4	0.99766	10.02	15.92	7.13	25.94	17.15	56.00	46.00	-30.06	-28.85
5	1.98438	10.09	11.32	3.89	21.41	13.98	56.00	46.00	-34.59	-32.02
6	19.36719	11.06	12.63	6.41	23.69	17.47	60.00	50.00	-36.31	-32.53

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

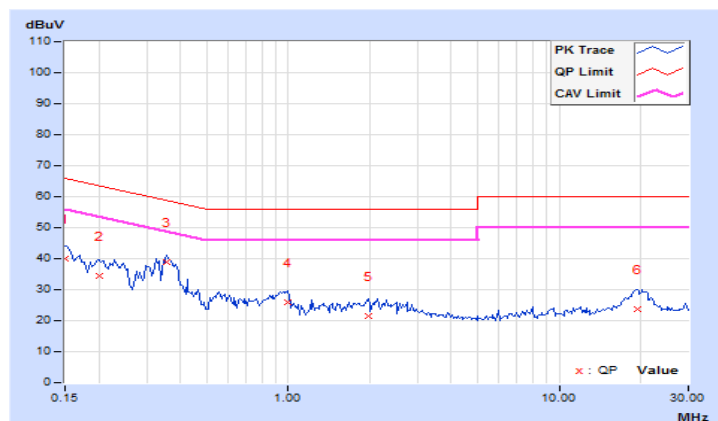


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.10	7.05	7.07	7.53	0.5	Pass
6	2437	7.06	7.08	7.07	6.59	0.5	Pass
11	2462	7.09	7.11	7.07	7.06	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.81	15.86	15.85	16.45	0.5	Pass
6	2437	15.81	16.43	16.45	16.43	0.5	Pass
11	2462	16.40	15.99	16.40	16.43	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	16.41	17.15	18.83	19.06	0.5	Pass
6	2437	17.18	18.90	18.87	18.90	0.5	Pass
11	2462	19.07	18.98	18.95	19.08	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	32.73	35.87	36.48	37.76	0.5	Pass
6	2437	31.40	36.91	37.74	36.43	0.5	Pass
9	2452	37.49	35.79	35.37	36.05	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 3 : CH6

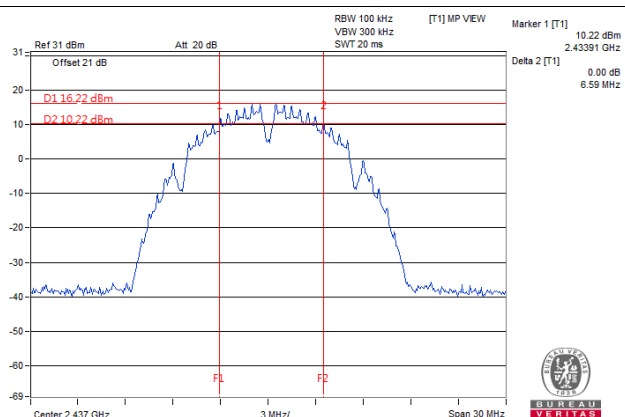


802.11g / Chain 0 : CH1

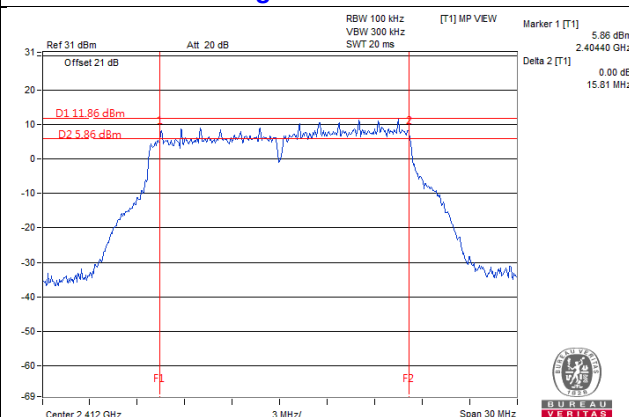

802.11ax (HE20) / Chain 0 : CH1

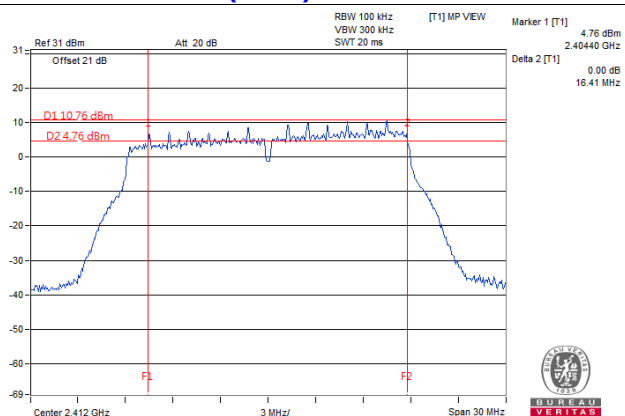

802.11ax (HE40) / Chain 0 : CH6

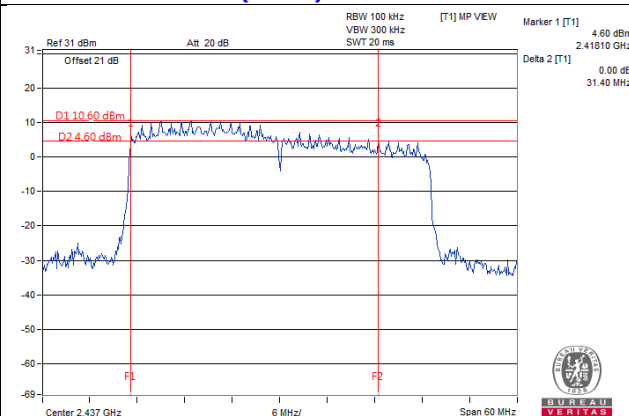

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

Non-Beamforming Mode

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	24.35	24.21	23.48	23.45	980.056	29.91	30.00	Pass
6	2437	24.24	24.11	23.36	23.47	962.194	29.83	30.00	Pass
11	2462	24.46	24.31	23.57	23.24	987.401	29.94	30.00	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.50	21.26	20.23	20.29	487.258	26.88	30.00	Pass
6	2437	24.67	24.37	23.17	23.45	995.416	29.98	30.00	Pass
11	2462	22.08	21.99	21.07	21.18	578.719	27.62	30.00	Pass

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.05	21.02	19.90	20.21	456.502	26.59	30.00	Pass
6	2437	24.36	24.21	23.18	23.16	951.515	29.78	30.00	Pass
11	2462	20.60	20.67	19.50	19.54	410.571	26.13	30.00	Pass

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.76	19.40	18.38	18.81	326.618	25.14	30.00	Pass
6	2437	23.01	22.82	22.11	22.03	713.555	28.53	30.00	Pass
9	2452	20.04	19.57	18.61	18.77	339.445	25.31	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.97	21.66	19.80	20.01	467.311	26.70	30.00	Pass
6	2437	24.48	24.36	23.33	23.34	984.493	29.93	30.00	Pass
11	2462	20.65	20.51	19.71	19.69	415.257	26.18	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.91	19.56	18.53	18.96	338.304	25.29	30.00	Pass
6	2437	23.16	22.95	22.21	22.23	737.706	28.68	30.00	Pass
9	2452	20.15	19.71	18.76	18.91	350.021	25.44	30.00	Pass

Beamforming Mode

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	21.05	21.02	19.90	20.21	456.502	26.59	30.00	Pass
6	2437	24.36	24.21	23.18	23.16	951.515	29.78	30.00	Pass
11	2462	20.60	20.67	19.50	19.54	410.571	26.13	30.00	Pass

Note: 1. Directional gain = 5.97dBi < 6dBi , so the power limit shall not be reduced.

VHT40

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.76	19.40	18.38	18.81	326.618	25.14	30.00	Pass
6	2437	23.01	22.82	22.11	22.03	713.555	28.53	30.00	Pass
9	2452	20.04	19.57	18.61	18.77	339.445	25.31	30.00	Pass

Note: 1. Directional gain = 5.97dBi < 6dBi , so the power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.97	21.66	19.80	20.01	467.311	26.70	30.00	Pass
6	2437	24.48	24.36	23.33	23.34	984.493	29.93	30.00	Pass
11	2462	20.65	20.51	19.71	19.69	415.257	26.18	30.00	Pass

Note: 1. Directional gain = 5.97dBi < 6dBi , so the power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	19.91	19.56	18.53	18.96	338.304	25.29	30.00	Pass
6	2437	23.16	22.95	22.21	22.23	737.706	28.68	30.00	Pass
9	2452	20.15	19.71	18.76	18.91	350.021	25.44	30.00	Pass


Note: 1. Directional gain = 5.97dBi < 6dBi , so the power limit shall not be reduced.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11b, 802.11g

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

802.11ax (HE20), 802.11ax (HE40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-6.09	6.02	-0.07	8.00	Pass
	6	2437	-4.42	6.02	1.60	8.00	Pass
	11	2462	-5.67	6.02	0.35	8.00	Pass
1	1	2412	-5.72	6.02	0.30	8.00	Pass
	6	2437	-5.89	6.02	0.13	8.00	Pass
	11	2462	-5.31	6.02	0.71	8.00	Pass
2	1	2412	-7.20	6.02	-1.18	8.00	Pass
	6	2437	-7.09	6.02	-1.07	8.00	Pass
	11	2462	-7.04	6.02	-1.02	8.00	Pass
3	1	2412	-6.83	6.02	-0.81	8.00	Pass
	6	2437	-6.25	6.02	-0.23	8.00	Pass
	11	2462	-5.75	6.02	0.27	8.00	Pass

Note: 1. Directional gain = 5.97dBi < 6dBi, so the power density limit shall not be reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-8.90	6.02	-2.88	8.00	Pass
	6	2437	-4.88	6.02	1.14	8.00	Pass
	11	2462	-9.17	6.02	-3.15	8.00	Pass
1	1	2412	-8.24	6.02	-2.22	8.00	Pass
	6	2437	-7.23	6.02	-1.21	8.00	Pass
	11	2462	-8.36	6.02	-2.34	8.00	Pass
2	1	2412	-11.00	6.02	-4.98	8.00	Pass
	6	2437	-7.94	6.02	-1.92	8.00	Pass
	11	2462	-10.96	6.02	-4.94	8.00	Pass
3	1	2412	-10.26	6.02	-4.24	8.00	Pass
	6	2437	-7.77	6.02	-1.75	8.00	Pass
	11	2462	-9.39	6.02	-3.37	8.00	Pass

Note: 1. Directional gain = 5.97dBi < 6dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=4) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-10.74	6.02	0.10	-4.62	8.00	Pass
	6	2437	-6.91	6.02	0.10	-0.79	8.00	Pass
	11	2462	-11.83	6.02	0.10	-5.71	8.00	Pass
1	1	2412	-10.58	6.02	0.10	-4.46	8.00	Pass
	6	2437	-7.86	6.02	0.10	-1.74	8.00	Pass
	11	2462	-11.58	6.02	0.10	-5.46	8.00	Pass
2	1	2412	-9.94	6.02	0.10	-3.82	8.00	Pass
	6	2437	-9.13	6.02	0.10	-3.01	8.00	Pass
	11	2462	-12.80	6.02	0.10	-6.68	8.00	Pass
3	1	2412	-12.90	6.02	0.10	-6.78	8.00	Pass
	6	2437	-7.67	6.02	0.10	-1.55	8.00	Pass
	11	2462	-11.84	6.02	0.10	-5.72	8.00	Pass

- Note:**
1. Directional gain = 5.97dBi < 6dBi, so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.


802.11ax (HE40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=4) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-12.84	6.02	0.19	-6.63	8.00	Pass
	6	2437	-9.46	6.02	0.19	-3.25	8.00	Pass
	9	2452	-13.75	6.02	0.19	-7.54	8.00	Pass
1	3	2422	-13.20	6.02	0.19	-6.99	8.00	Pass
	6	2437	-10.72	6.02	0.19	-4.51	8.00	Pass
	9	2452	-13.23	6.02	0.19	-7.02	8.00	Pass
2	3	2422	-14.50	6.02	0.19	-8.29	8.00	Pass
	6	2437	-12.20	6.02	0.19	-5.99	8.00	Pass
	9	2452	-14.32	6.02	0.19	-8.11	8.00	Pass
3	3	2422	-15.67	6.02	0.19	-9.46	8.00	Pass
	6	2437	-11.57	6.02	0.19	-5.36	8.00	Pass
	9	2452	-16.03	6.02	0.19	-9.82	8.00	Pass


- Note:**
1. Directional gain = 5.97dBi < 6dBi, so the power density limit shall not be reduced.
 2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0: CH6

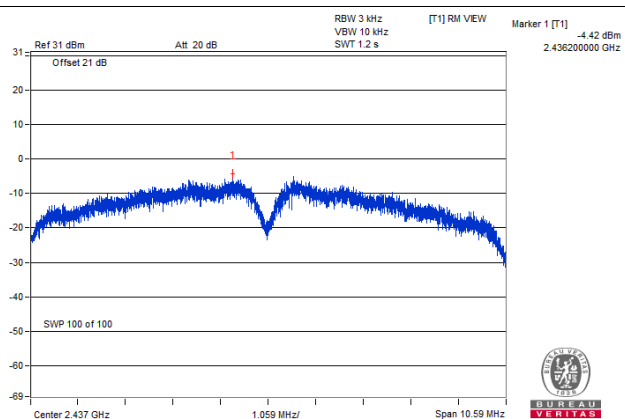


802.11g / Chain 0 : CH6

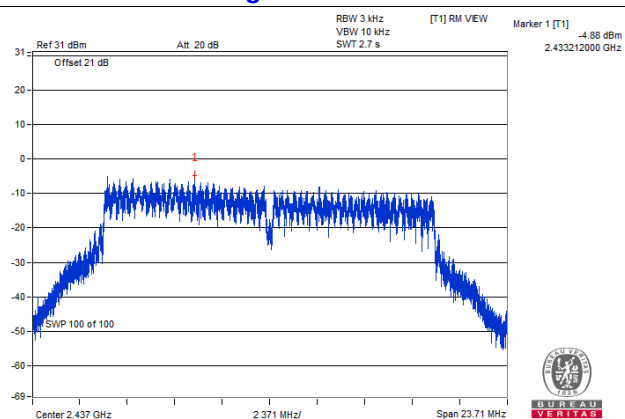

802.11ax (HE20) / Chain 0: CH6

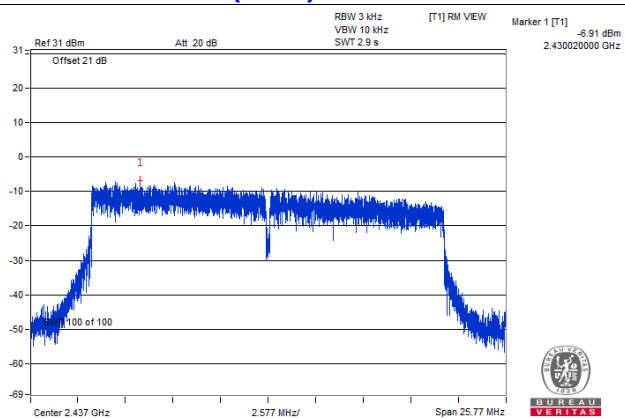

802.11ax (HE40) / Chain 0: CH6

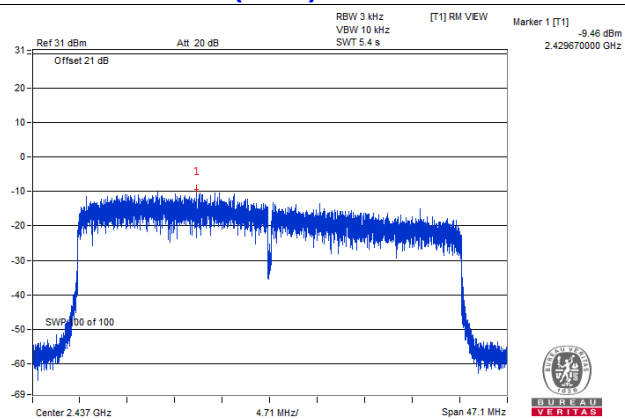


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

Maximum REF

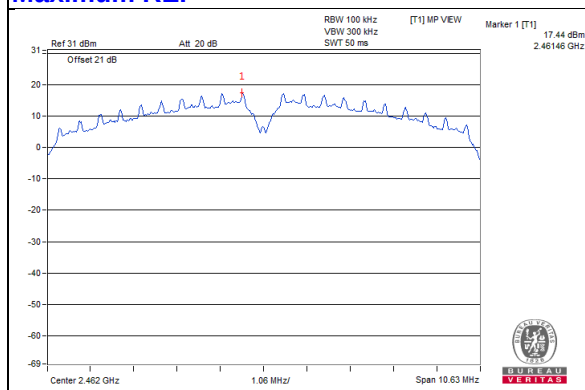


Chain 0


CH 1

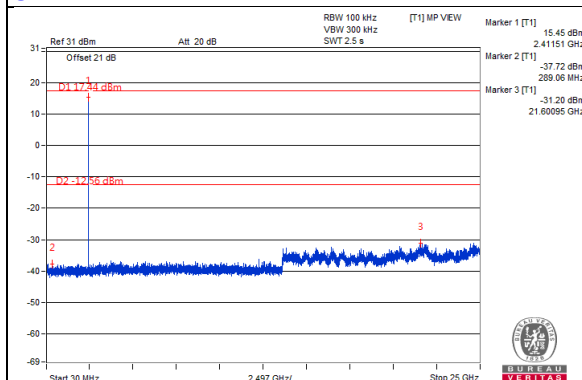


CH 6

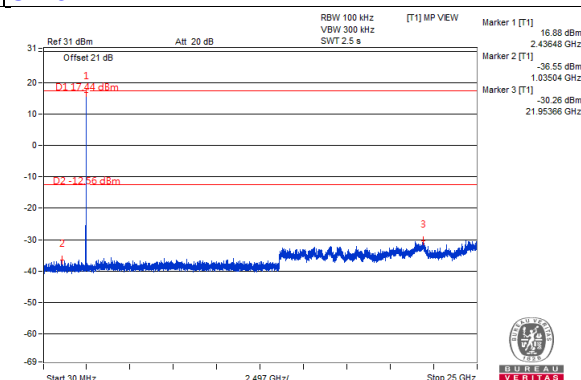


CH 11

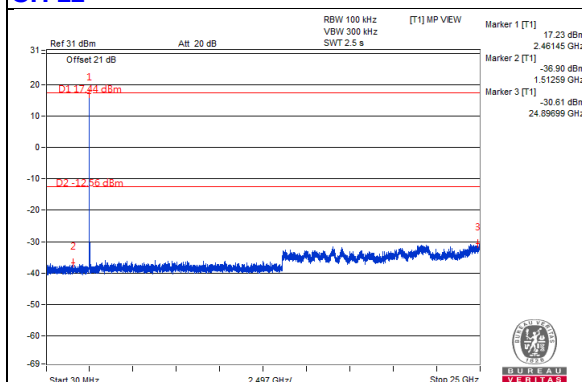

CH 1 Band edge

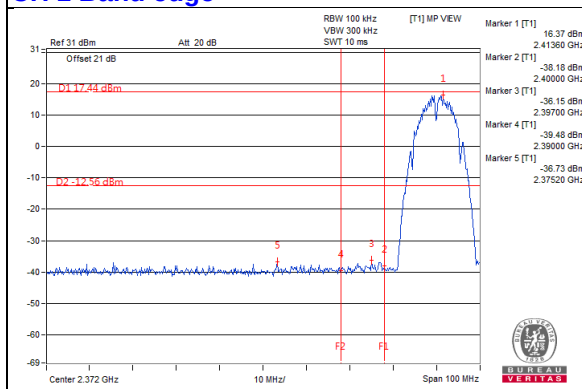


CH 11 Band edge

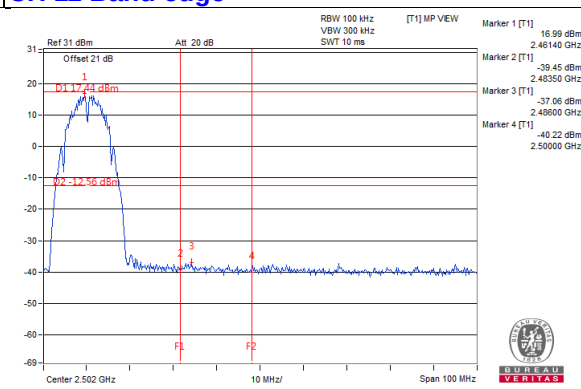


Chain 1


CH 1

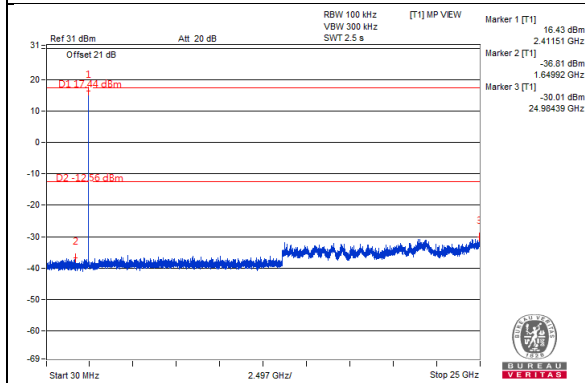

CH 6

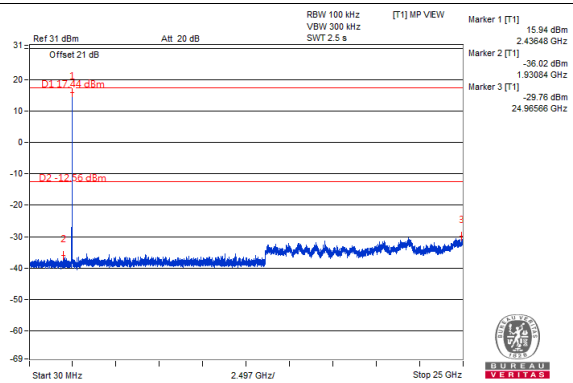


CH 11

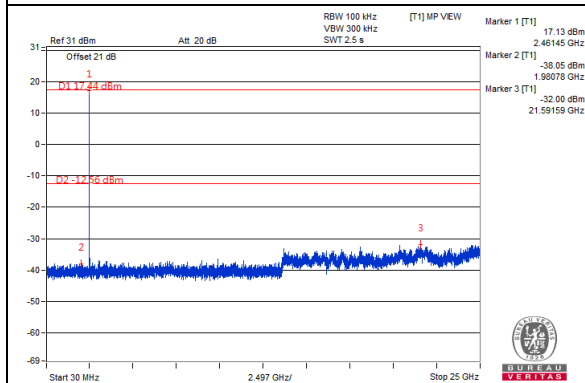


CH 11 Band edge

CH 1 Band edge

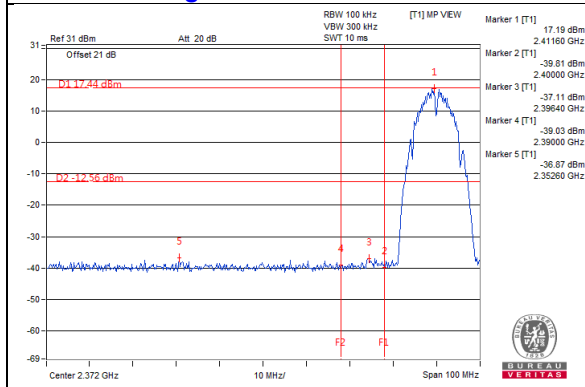


CH 11 Band edge

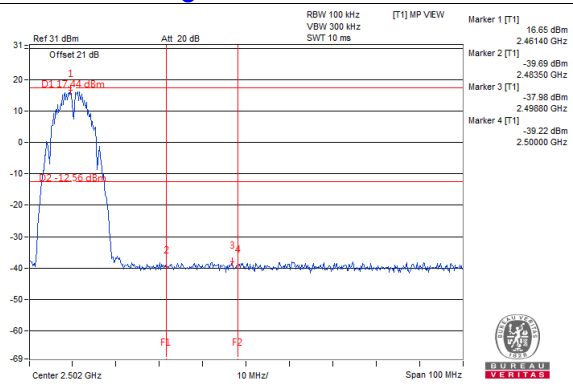


Chain 2


CH 1

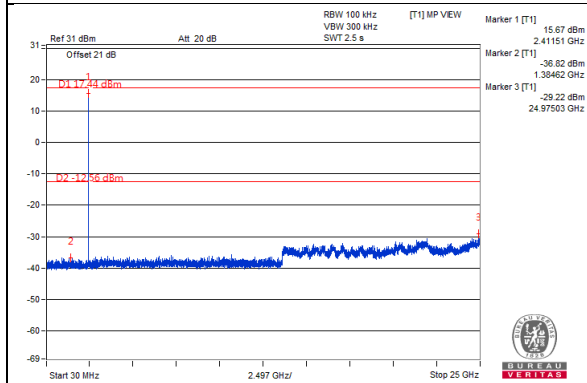


CH 6

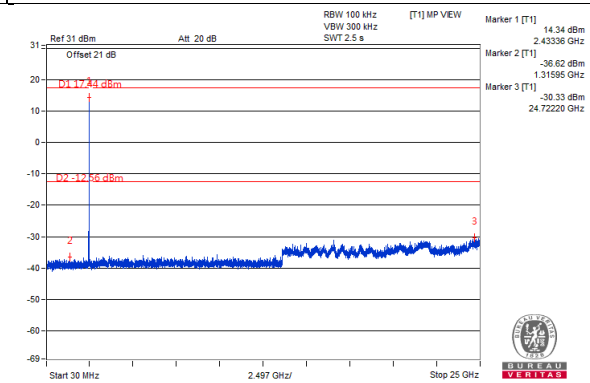


CH 11

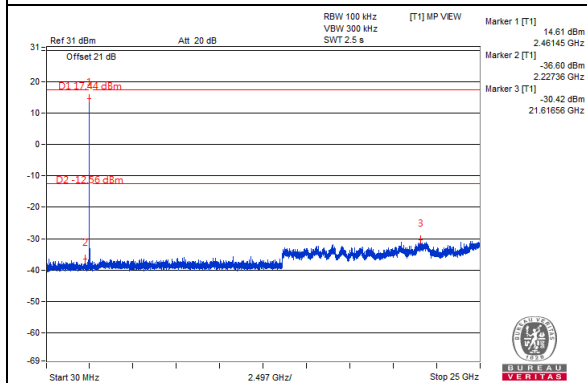

CH 1 Band edge

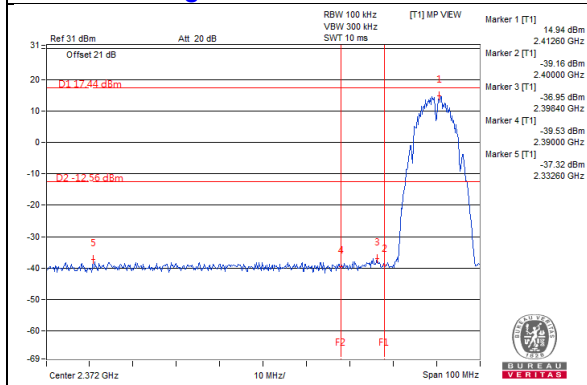


CH 11 Band edge

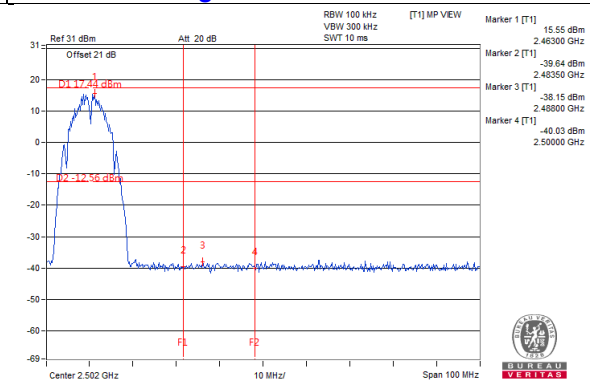


Chain 3


CH 1

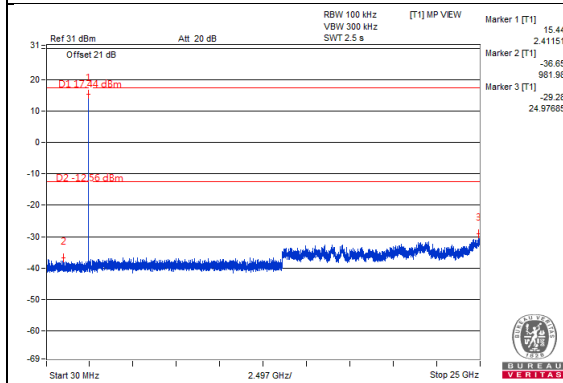


CH 6

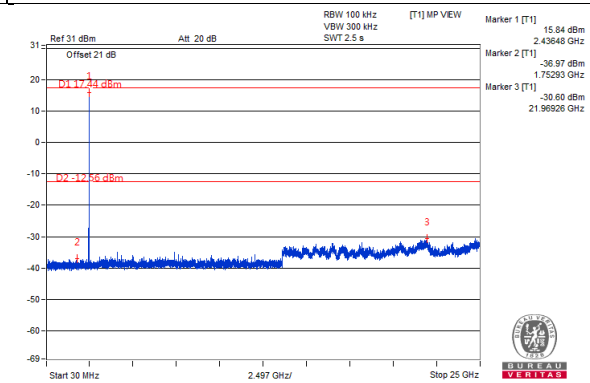


CH 11

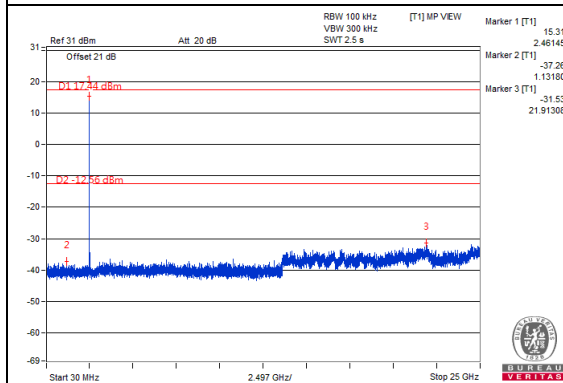

CH 1 Band edge

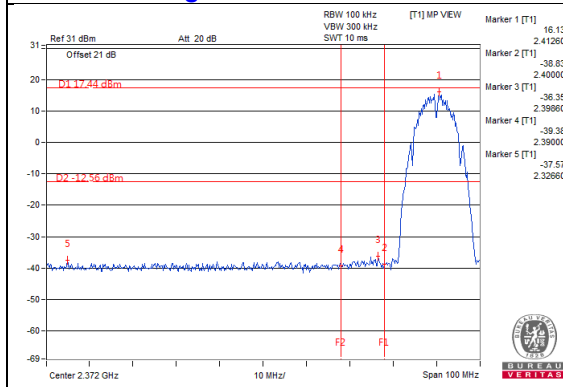


CH 11 Band edge

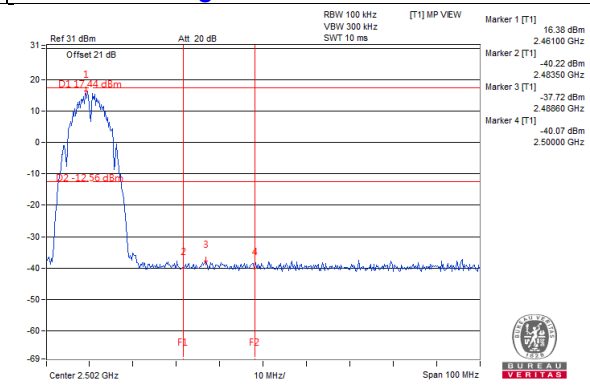


802.11g

Maximum REF

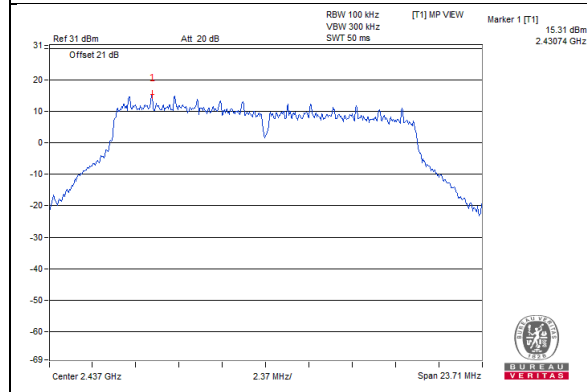


Chain 0


CH 1

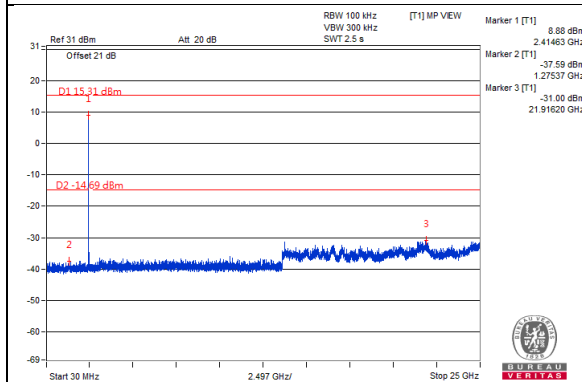


CH 6

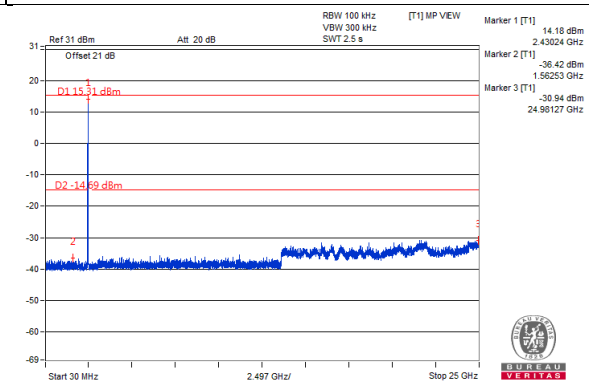


CH 11

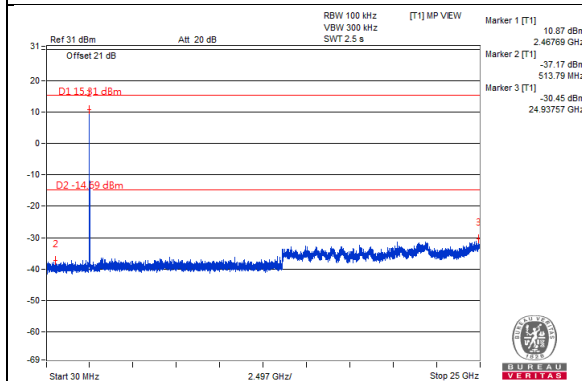

CH 1 Band edge

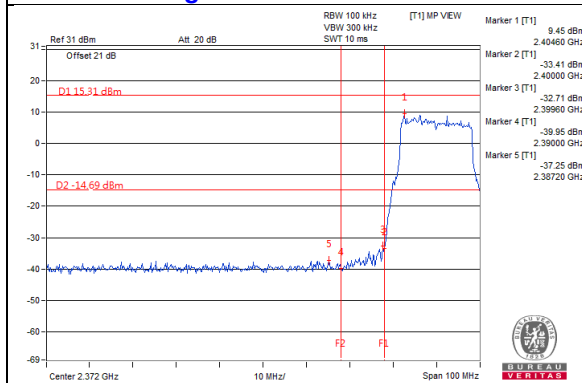


CH 11 Band edge

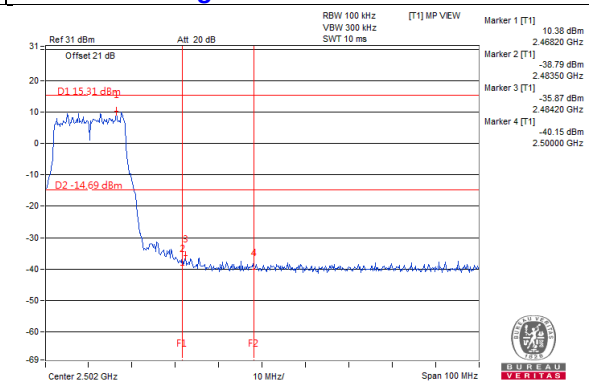


Chain 1


CH 1

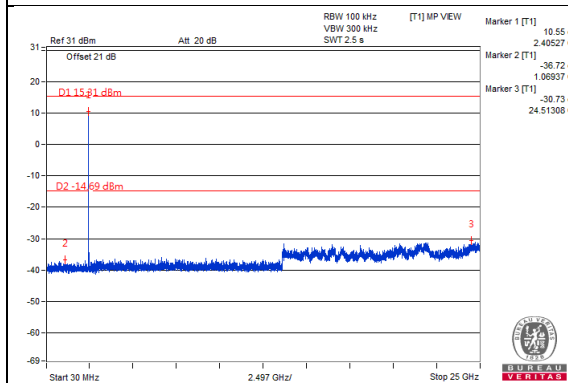

CH 6

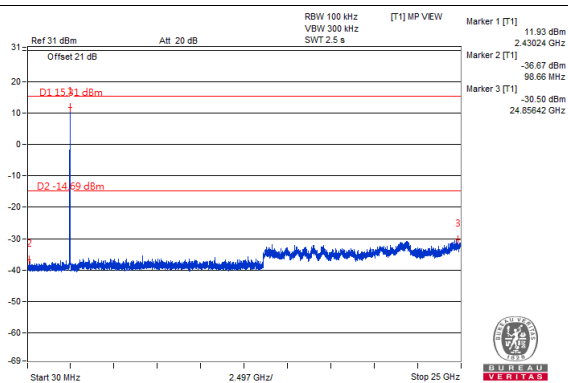


CH 11

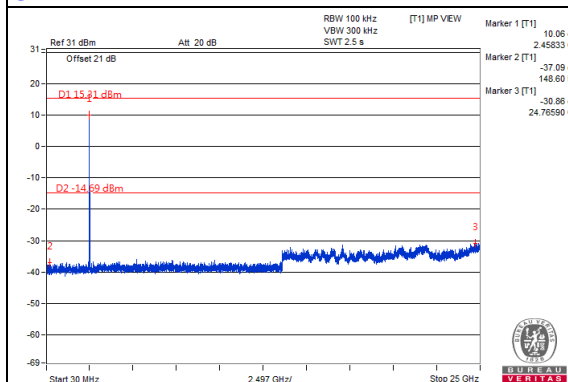


CH 11 Band edge

CH 1 Band edge

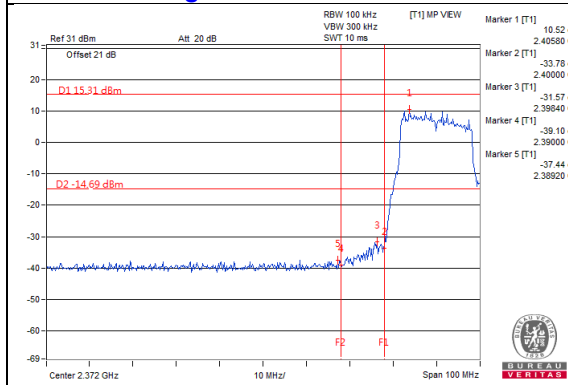


CH 11 Band edge

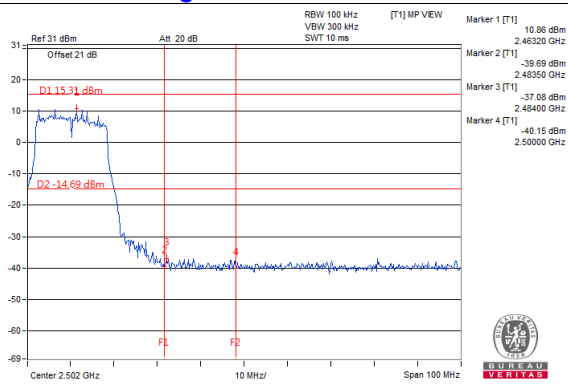


Chain 2


CH 1

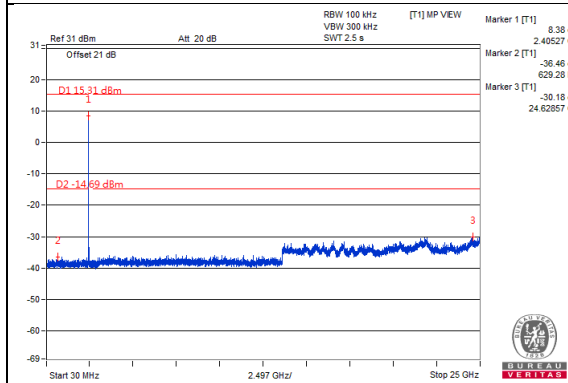

CH 6

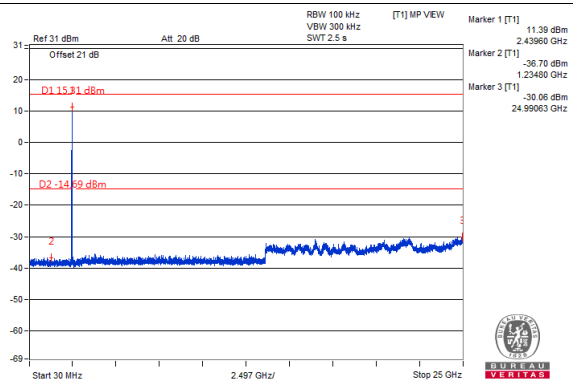


CH 11

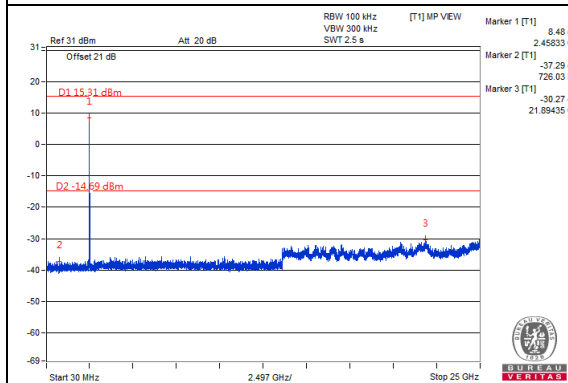


CH 11 Band edge

CH 1 Band edge

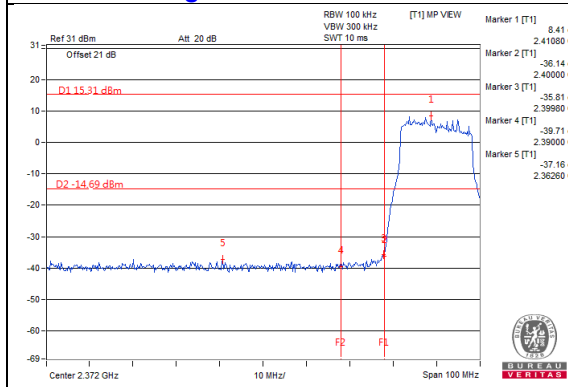


CH 11 Band edge

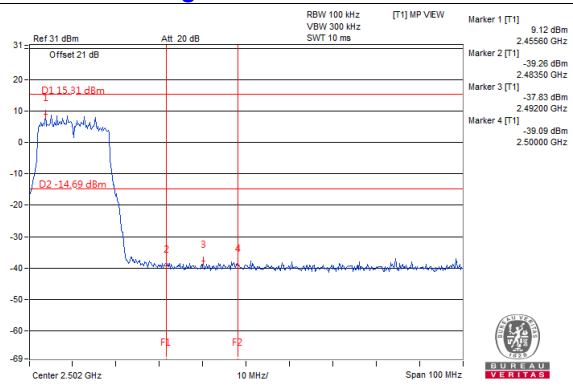


Chain 3


CH 1

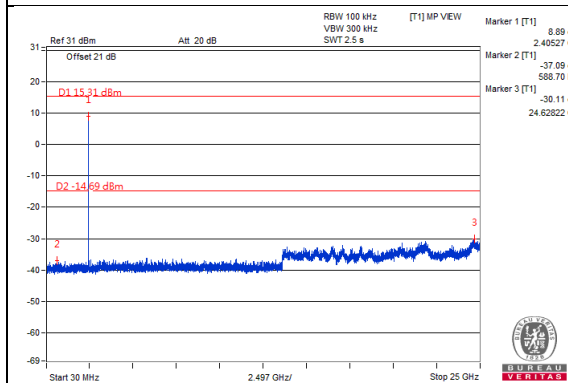

CH 6

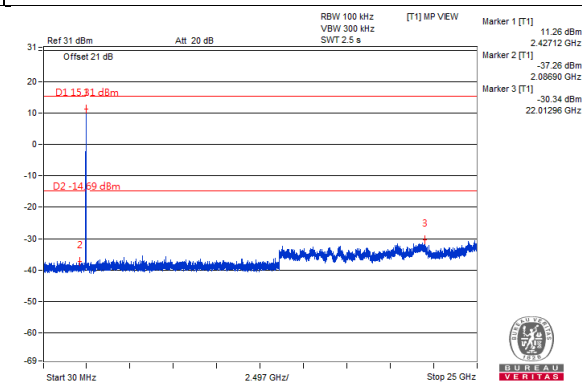


CH 11

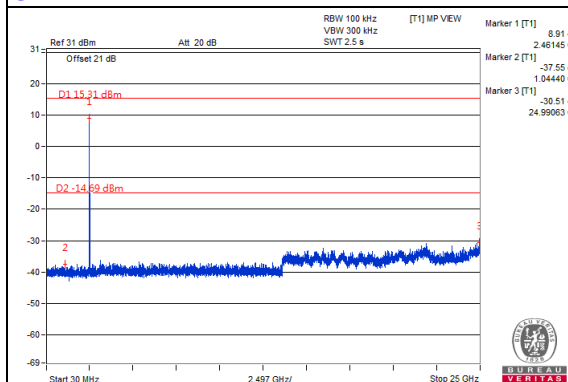


CH 11 Band edge

CH 1 Band edge

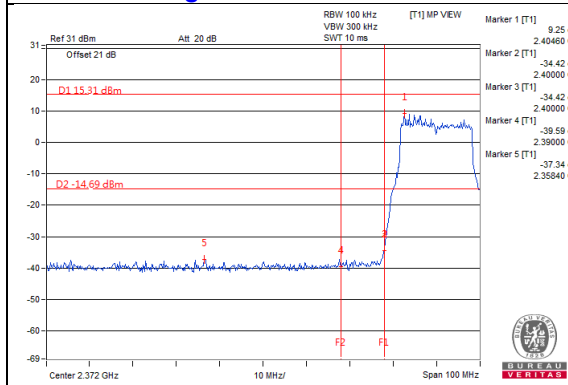


CH 11 Band edge

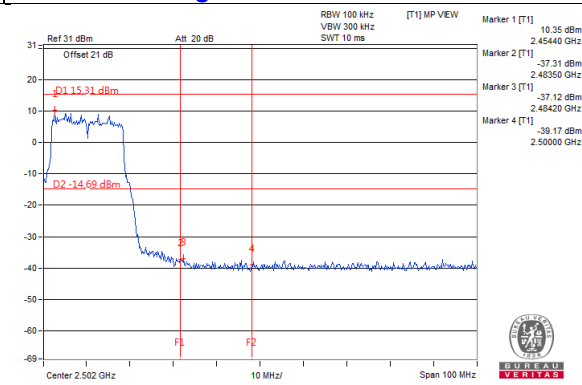


802.11ax (HE20)

Maximum REF

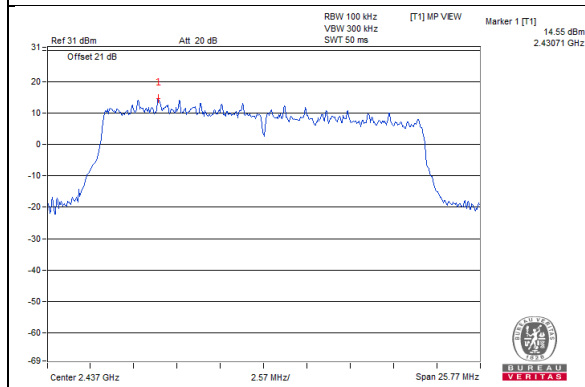


Chain 0


CH 1

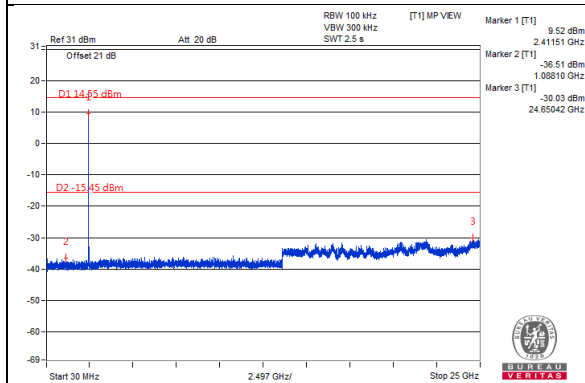


CH 6

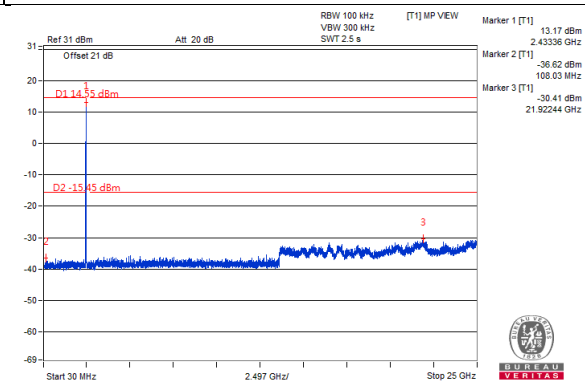


CH 11

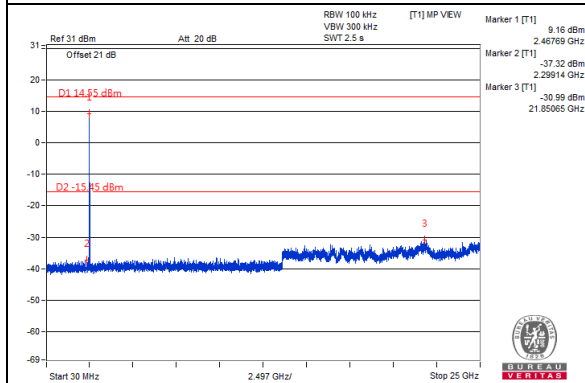

CH 1 Band edge

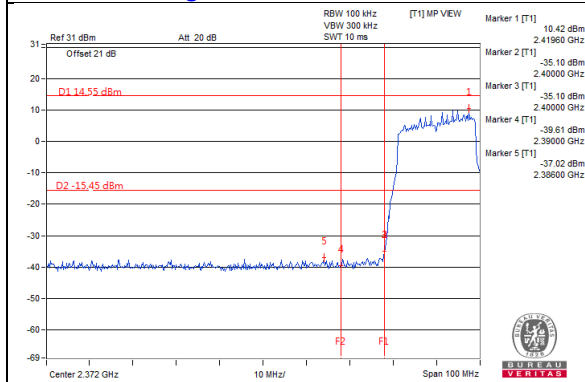


CH 11 Band edge

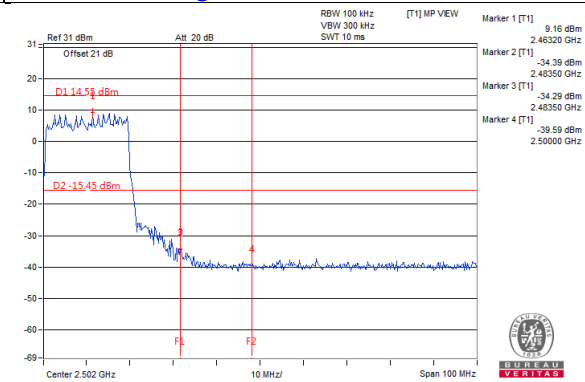


Chain 1


CH 1

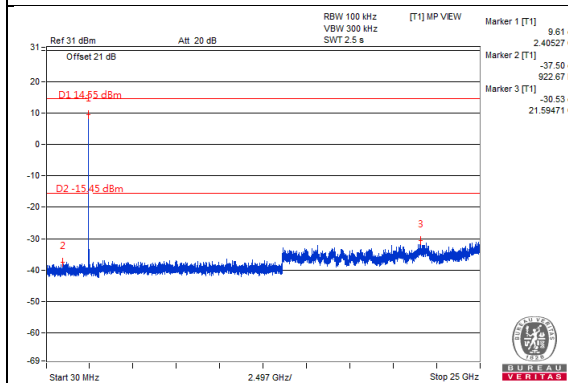

CH 6

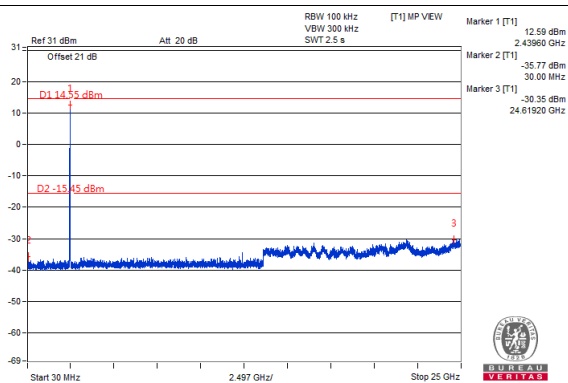


CH 11

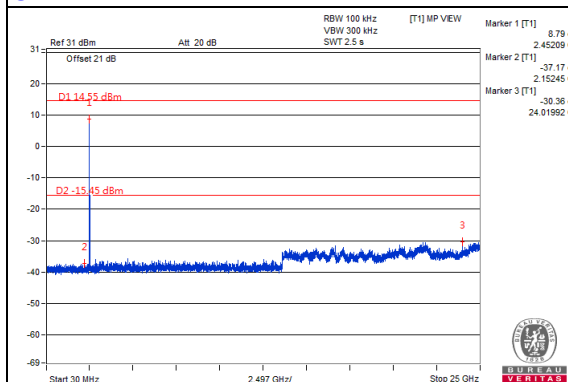


CH 11 Band edge

CH 1 Band edge

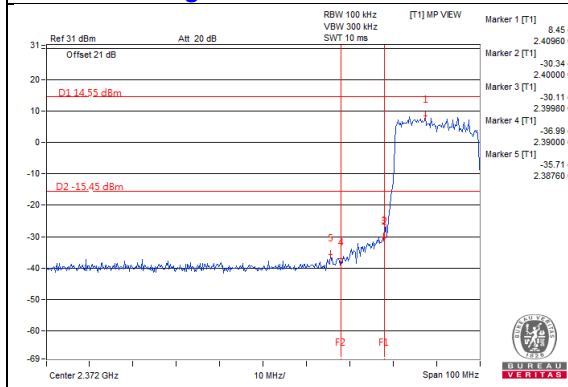


CH 11 Band edge

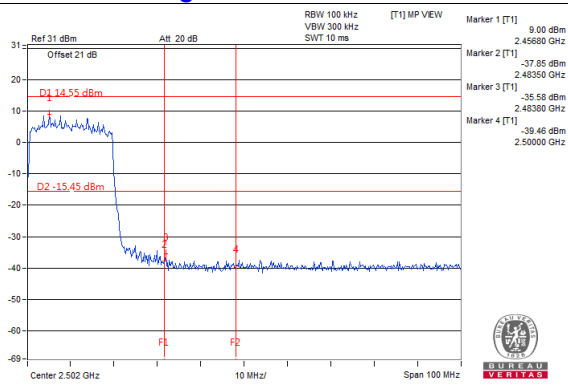


Chain 2


CH 1

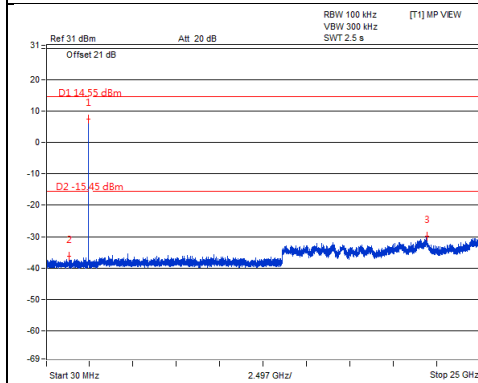


CH 6

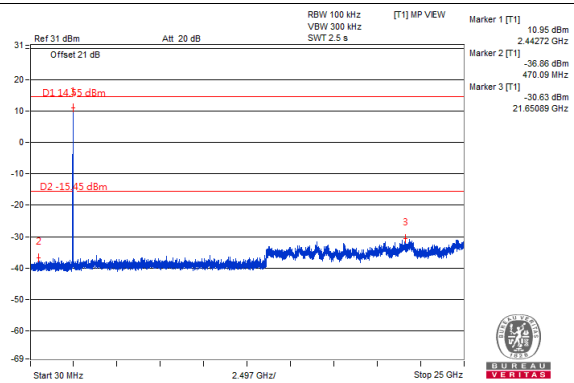


CH 11

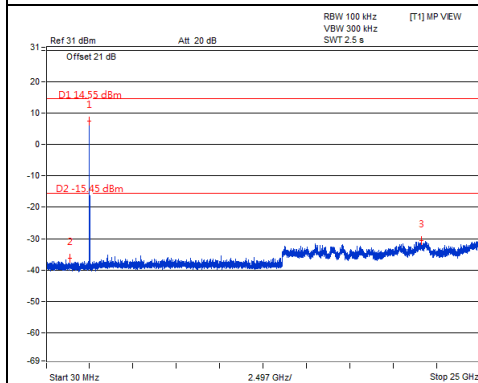

CH 1 Band edge

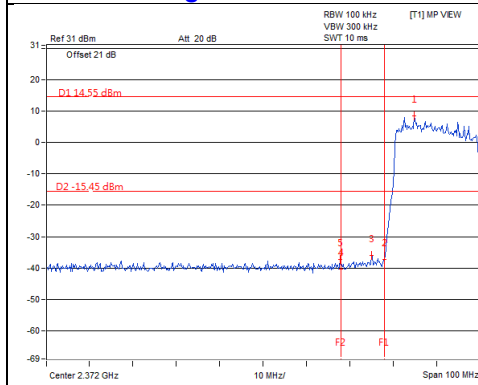


CH 11 Band edge

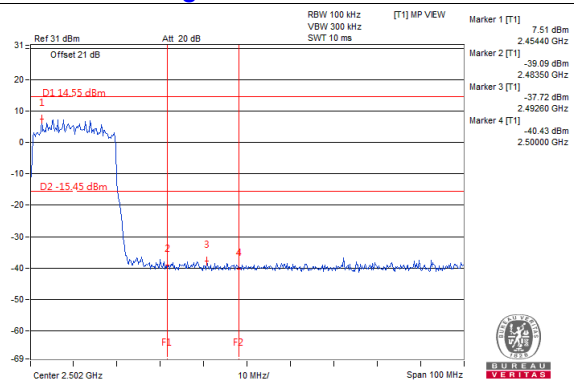


Chain 3


CH 1

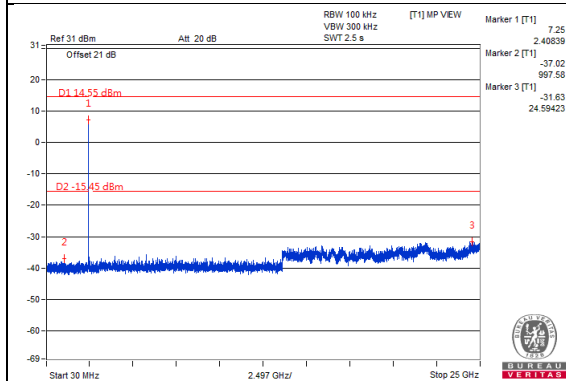

CH 6

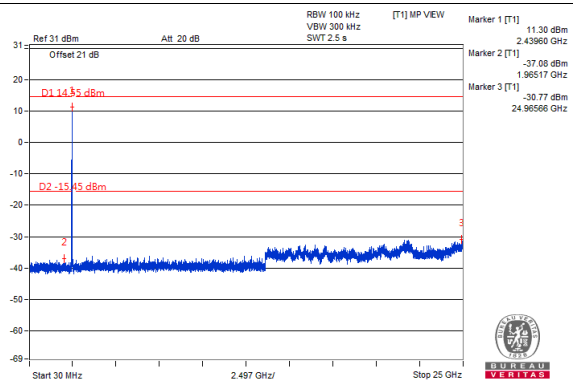


CH 11

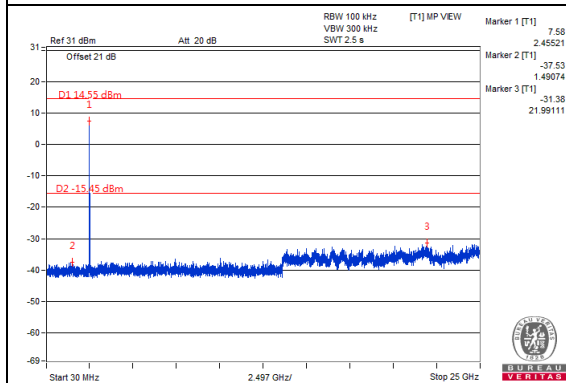


CH 11 Band edge

CH 1 Band edge

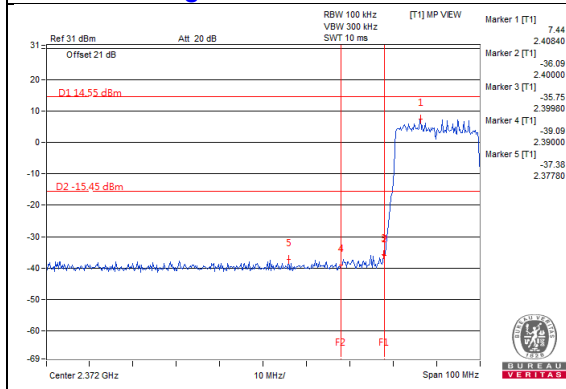


CH 11 Band edge

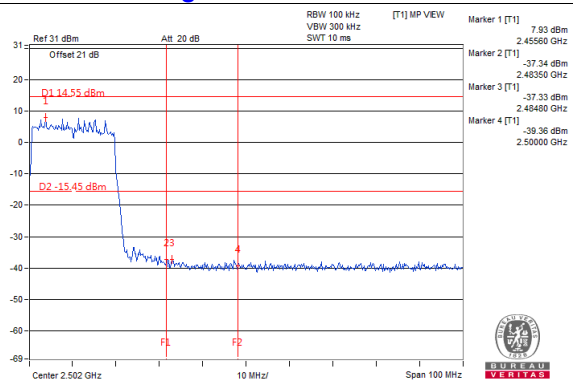


802.11ax (HE40)

Maximum REF

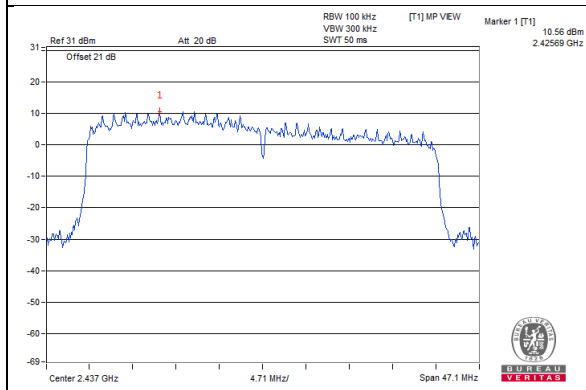


Chain 0


CH 3

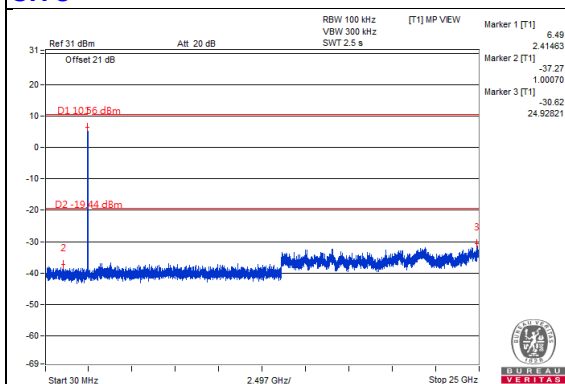


CH 6

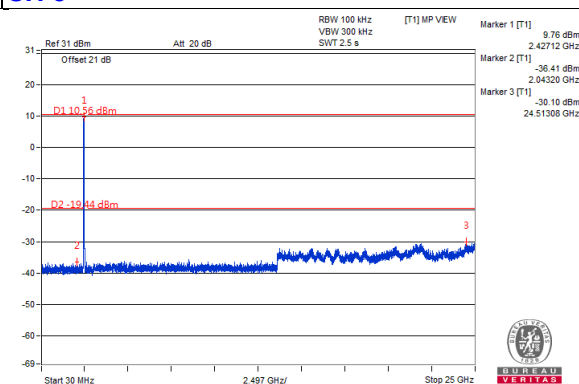


CH 9

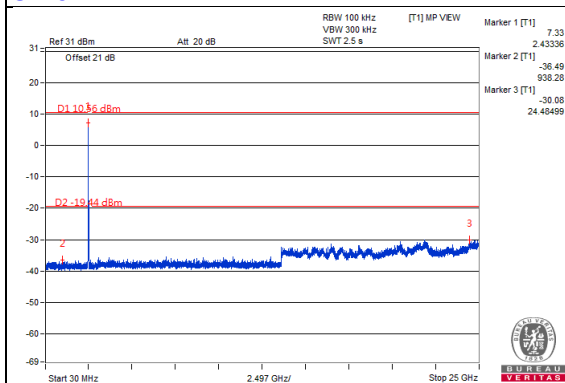

CH 3 Band edge

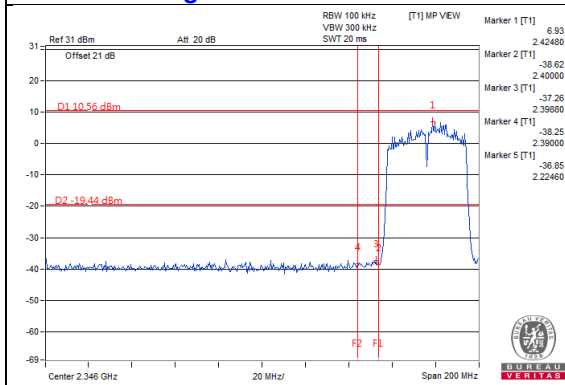


CH 9 Band edge

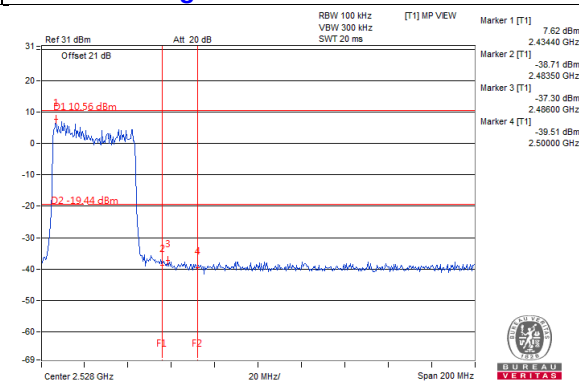


Chain 1


CH 3

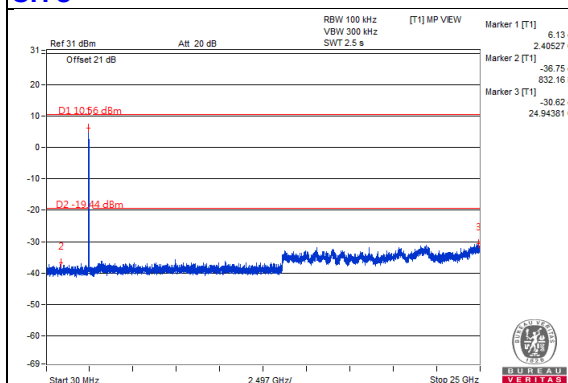

CH 6

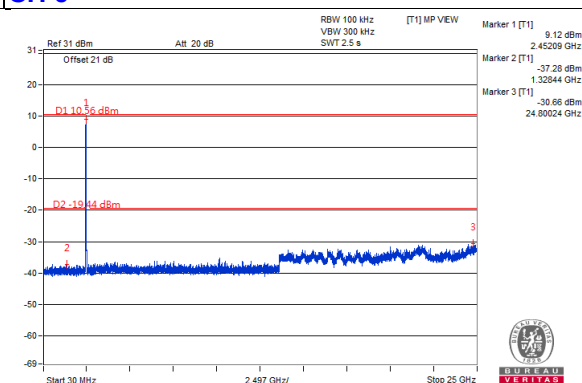


CH 9

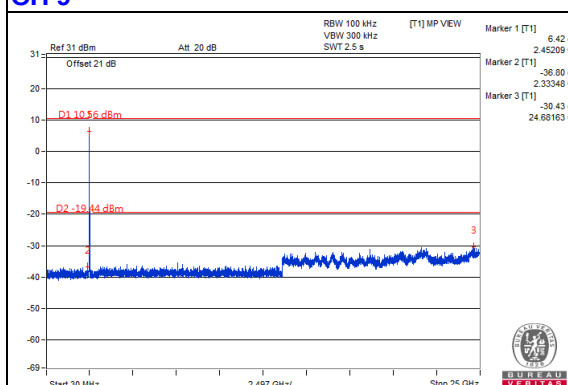


CH 9 Band edge

CH 3 Band edge

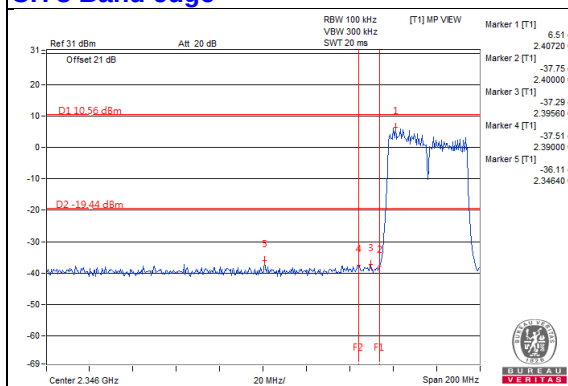


CH 9 Band edge

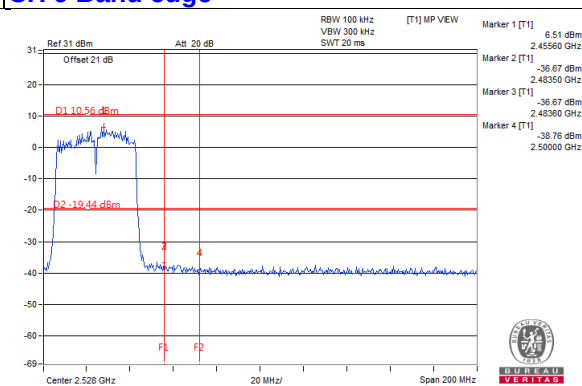


Chain 2


CH 3

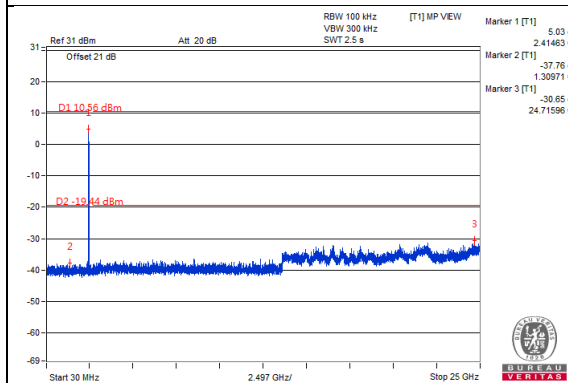


CH 6

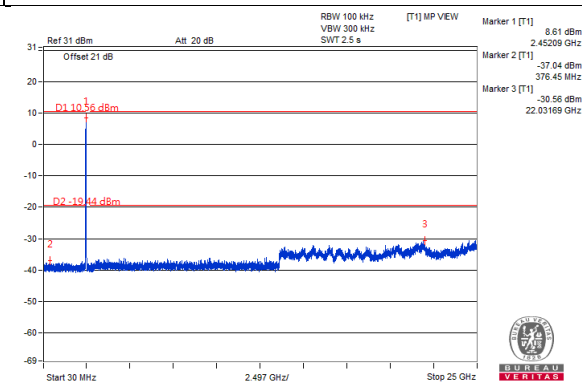


CH 9

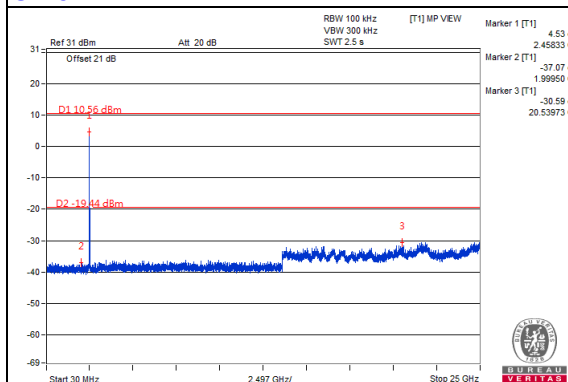

CH 3 Band edge

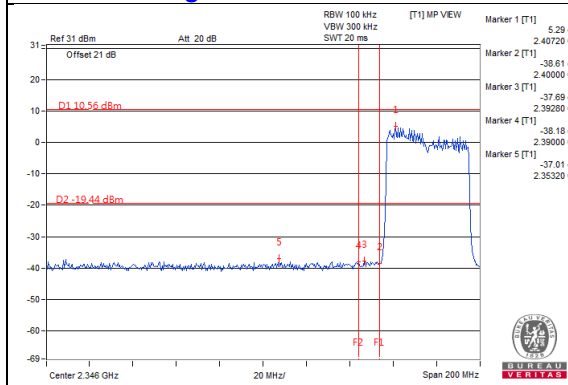


CH 9 Band edge

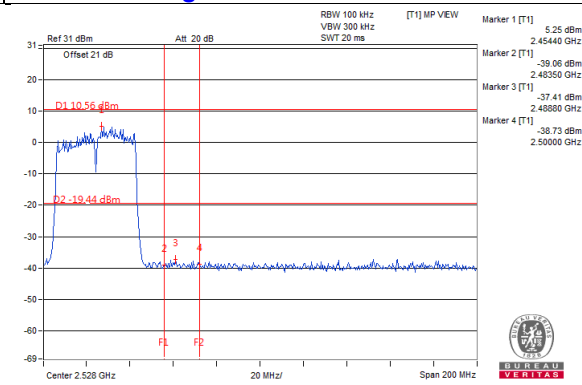


Chain 3


CH 3

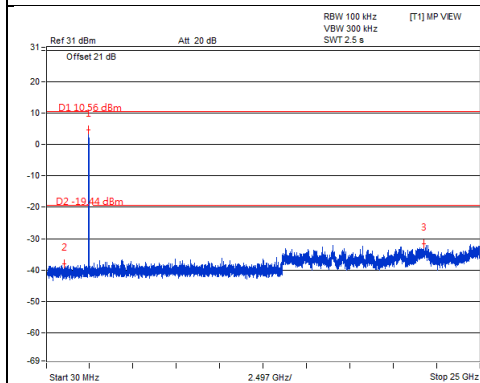


CH 6

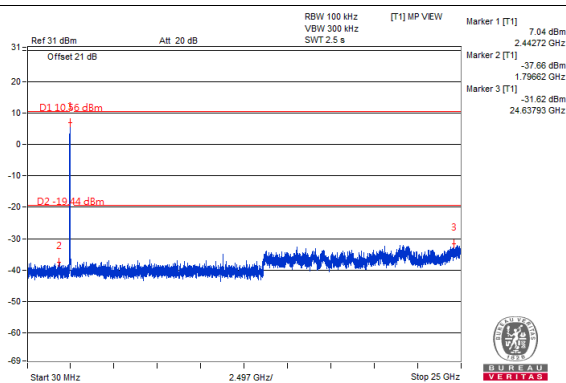


CH 9

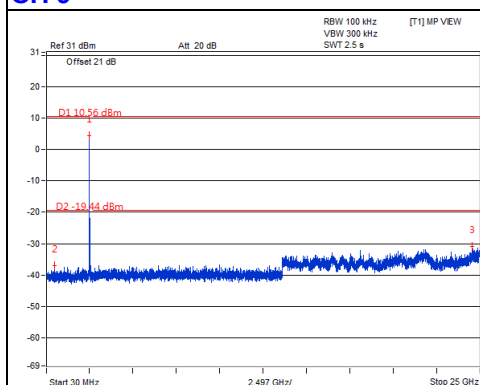

CH 3 Band edge

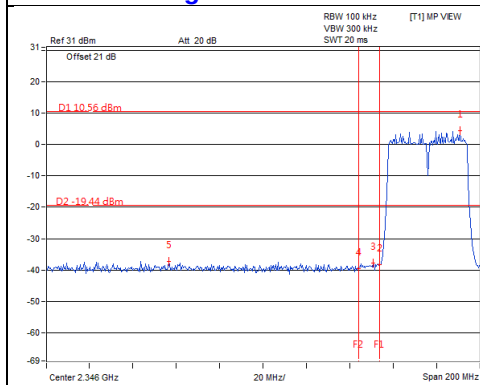

CH 9 Band edge

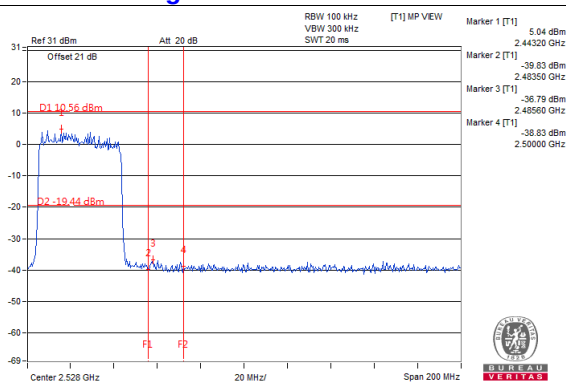

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---