WiFi/Bluetooth Antenna

Antenna Specification

1. Product Number



(1) Product Type	(2) Metal antenna
(3) Size Code	(4) 18x3.0x2.5mm
(5) N a m e	(6) H1
(7) Packing	(8) Paper &Reel
(9) Frequency	(10) 2.45GHz

Add: C6 complex building, Hengfeng Industrial City, Baoan District, Shenzhen, Guangdong, China

Manufacturer: Shenzhen Dezizi Technology Co., Ltd

Prepared by : JIEXI	Designed by : Jason	Checked by	: Jason	Approved by	: MR.FANG
	ViFi/Bluetooth Ceramic Chip ering Specification	DOCUMENT NO.	RTL8189		REV.
			PAGE	1 OF	4

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

dezizai chip antenna series are specially designed for WiFi/Bluetooth applications. Based on dezizai proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		18x3.0x2.5mm	mm
Workin	g Frequency	2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polariz	Polarization Linear Polarization		
	Peak	3.1 (typical)	dBi
Gain	Efficiency	75 (typical)	%


Shenzhen Dezizi Technology Co., Ltd


Prepared by : JIEXI	Designed by : Jason	Checked by :	App Jason	proved by	: MR.FANG
TITLE: 18x3.0x2.5mm WiF Antenna Engineeri	· · · · · · · · · · · · · · · · · · ·	DOCUMENT NO.	RTL8189		REV.
			PAGE 2	OF	4

5-2. Return Loss & VSWR

Return Loss (S₁₁)




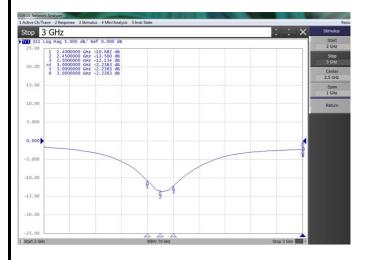

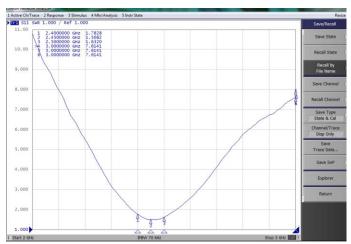

6. Antenna Dimensions & Test Board (unit: mm)

a. Antenna Dimensions



成品尺寸: 18×3×2.5mm


材质: 洋白铜


材料厚度: 0.3mm

SHENZHEN DEZIZI TECHNOLOGY CO., LTD

Prepared by : JIEXI	Designed by : Jason	Checked by	: Jason	Approved by	: MR.FANG
	/iFi/Bluetooth Ceramic Chip ering Specification	DOCUMENT NO.	RTL8189		REV.
		·	PAGE 3	3 OF	4


b. Test Board with Antenna

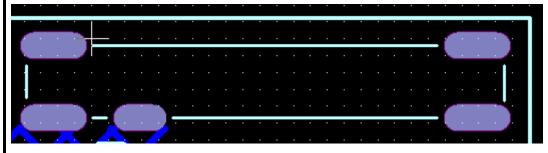

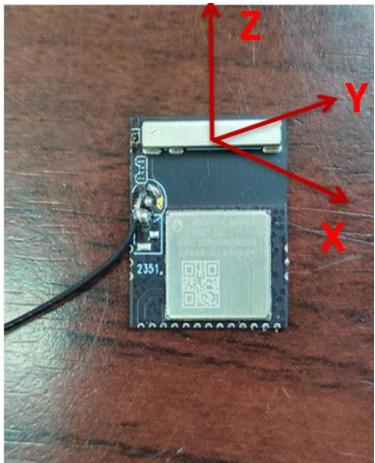

7. Radiation Pattern

7-1. 3D Pattern @ 2400 \ 2450 \ 2500MHz

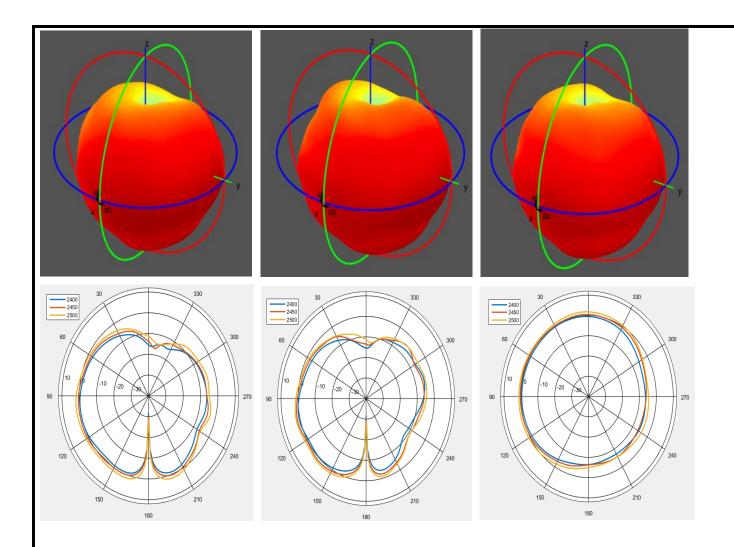

7-2. Gain and efficiency


Frequency(2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
MHz)											
Efficiency (%)	43.7	46.8	48.8	50.8	53.4	56.5	61.7	65.0	69.4	71.2	72.2
Gain (dBi)	8.0	1.1	1.3	1.5	1.7	1.8	2.1	2.4	2.7	2.9	3.1

SHENZHEN DEZIZI TECHNOLOGY CO., LTD

Prepared by : JIEXI	Designed by : Jason	Checked by :		proved by:	MR.FANG
TITLE: 18x3.0x2.5mm WiFi Antenna Engineerin	•	DOCUMENT NO.	RTL8189		REV.
			PAGE 4	OF	4

8. OTA

8-1 Test board environment with antenna

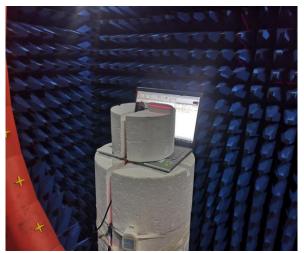



8-2. TRP and TIS

	#1			#2			
	TRP	TIS	TRP	TIS			
11b/11M 11N	11b/11M 11M (20M)						
CH1	16.69	-84.86	16.8	-85.14			
CH7	16.46	-84.29	16.97	-85.83			
CH13	16.65	-84.62	16.86	-85.76			
11g/6M 54M	(20M)						
CH1	14.83	-66.65	15.11	-68.09			
CH7	14.24	-65.24	15.28	-67.47			
CH13	14.42	-66.89	15.15	-68.55			
11n/6.5M 65N	11n/6.5M 65M (20M)						
CH1	14.85	-63.14	15.05	-64.95			
CH7	14.29	-62.89	15.28	-64.1			
CH13	14.36	-62.04	15.02	-63.17			

SHENZHEN DEZIZI TECHNOLOGY CO., LTD

Prepared by : JIEXI Designed by : Jason Checked by : Jason

TITLE: 18x3.0x2.5mm WiFi/Bluetooth Ceramic Chip
Antenna Engineering Specification

PAGE 5 OF 6