

FCC TEST REPORT

REPORT NO.: FC941007A05

MODEL NO.: 5211AX

RECEIVED: Oct. 7, 2005

TESTED: Oct. 11, 2005

ISSUED Oct. 13, 2005

APPLICANT: BEHAVIOR TECH COMPUTER CORP.

ADDRESS: 2F, 51, Tung Hsing Rd., Taipei, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



0528
ILAC MRA



Lab Code: 200102-0



No. 2177-01

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	DESCRIPTION OF SUPPORT UNITS	6
4	EMISSION TEST	7
4.1	CONDUCTED EMISSION MEASUREMENT	7
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
4.1.2	TEST INSTRUMENTS	8
4.1.3	TEST PROCEDURE	8
4.1.4	DEVIATION FROM TEST STANDARD	9
4.1.5	TEST SETUP	9
4.1.6	EUT OPERATING CONDITIONS	10
4.1.7	TEST RESULTS	11
4.2	RADIATED EMISSION MEASUREMENT	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.2.2	TEST INSTRUMENTS	15
4.2.3	TEST PROCEDURE	16
4.2.4	DEVIATION FROM TEST STANDARD	16
4.2.5	TEST SETUP	17
4.2.6	EUT OPERATING CONDITIONS	17
4.2.7	TEST RESULTS	18
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	20
6	APPENDIX - INFORMATION ON THE TESTING LABORATORIES	22
	APPENDIX-A	A-1

1 CERTIFICATION

PRODUCT: KEYBOARD
BRAND NAME: BTC
MODEL NO: 5211AX
TEST ITEM: ENGINEERING SAMPLE
APPLICANT: BEHAVIOR TECH COMPUTER CORP.
TESTED: Oct. 11, 2005
STANDARDS: FCC Part 15: 2005, Subpart B, Class B
CISPR 22: 1997, Class B
ICES-003: 2004, Class B
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Celia Chen , **DATE:** Oct. 13, 2005
(Celia Chen)

TECHNICAL
ACCEPTANCE : Ken Liu , **DATE:** Oct. 13, 2005
Responsible for EMI (Ken Liu)

APPROVED BY : Kenny Meng , **DATE:** Oct. 13, 2005
(Kenny Meng, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Remarks
FCC Part 15, 2005 Subpart B, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -18.66 dB at 0.204 MHz
CISPR 22: 1997, Class B	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -8.60 dB at 78.06 MHz
ICES-003: 2004, Class B			

Note: The limit for radiated test was performed according to CISPR 22: 1997, which was specified in FCC PART 15 Subpart B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22:1997 Subpart B are same.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Value
Conducted emissions	2.45dB
Radiated emissions	3.52dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	KEYBOARD
MODEL NO.	5211AX
POWER SUPPLY	DC 5V (from PC)
DATA CABLE SUPPLIED	Shielded PS/2 cable (1.8m)

NOTE:

1. The EUT is a keyboard with PS/2 interface.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	LEO	Persica 8620G	K13111135	FCC DoC Approved
2	LCD MONITOR	ACER	AL1721	ET.L0408.01034 10046DPK00	FCC DoC Approved
3	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
4	MODEM	ACEEX	1414	980020525	IFAXDM1414
5	PS/2 MOUSE	BTC	M851	M4-010379	E5XMSM860

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.8 m braid shielded wire, terminated with DVI connector via metallic frame, w. 2 cores
3	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
4	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	1.5 m Non shielded wire, terminated with PS/2 connector via drain wire, w/o core.

NOTE: All power cords of the above support units are non-shielded (1.8m).

Test Configuration

Non-shielded D-SUB cable (1.8m) with two ferrite cores

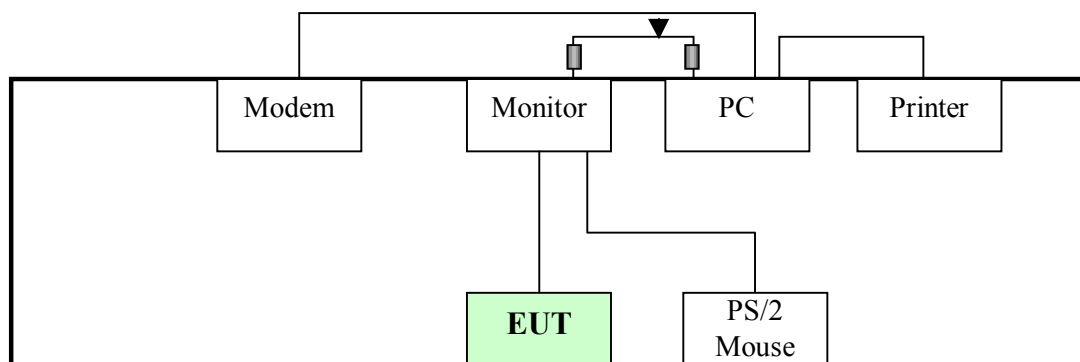

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15: 2005, Subpart B (Section: 15.107)

CISPR 22: 1997 (section 5)

**ICES-003: 2004 (Class A: section 5.2)
(Class B: section 5.3)**

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:** (1) The lower limit shall apply at the transition frequencies.
(2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS 30	828765/002	Jul. 10, 2006
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	835239/001	Mar. 14, 2006
LISN With Adapter (for EUT)	AD10	C09Ada-001	Mar. 14, 2006
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	835239/002	Mar. 27, 2006
ROHDE & SCHWARZ 4-wire ISN	ENY41	835154/007	Apr. 13, 2006
ROHDE & SCHWARZ 2-wire ISN	ENY22	833823/026	Apr. 13, 2006
Software	ADT_Cond_V7.3.2	NA	NA
Software	ADT_ISN_V7.3.2	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C09.01	Apr. 05, 2006
SUHNTER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010789	May 15, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. 9.
 3. The VCCI Site Registration No. C-1312.

4.1.3 TEST PROCEDURE


The basic test procedure was in accordance with ANSI C63.4-2003 (section 7), CISPR 22 (section 9) and ICES-003: 2004 (section 4).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

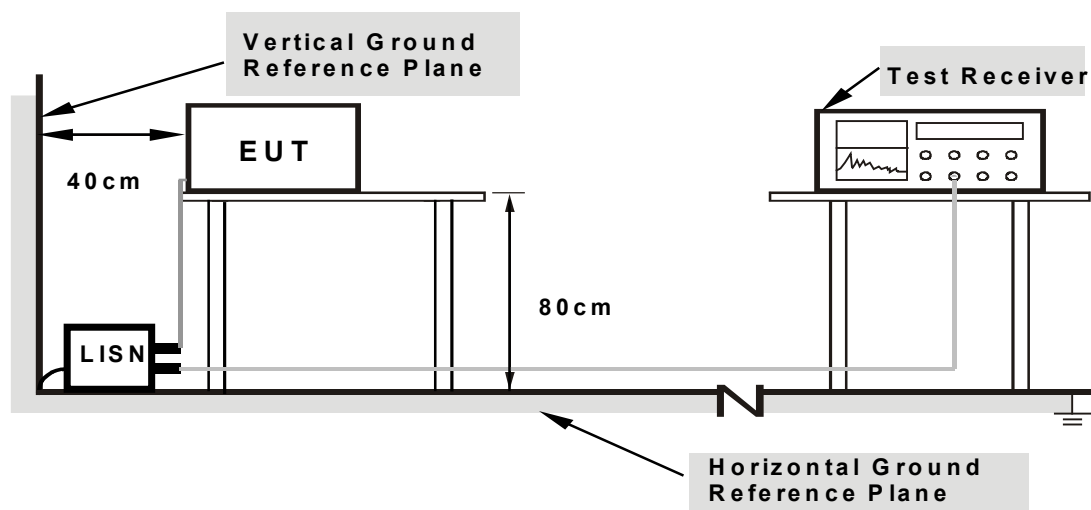

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Turned on the power of all equipment.
- b. PC ran a test program to enable all functions.
- c. PC read and wrote messages from FDD and HDD.
- d. EUT sent "H" character to PC.
- e. PC sent "H" messages to monitor and monitor displayed "H" patterns on screen.
- f. PC sent "H" messages to modem.
- g. PC sent "H" messages to printer and printed them out.
- h. Repeated steps c-h.

4.1.7 TEST RESULTS

EUT	KEYBOARD	MODEL NO.	5211AX
		6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25deg. C, 55% RH, 1006 hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	43.51	-	43.71	-	66.00	56.00	-22.29	-
2	0.204	0.20	43.33	-	43.53	-	63.45	53.45	-19.92	-
3	0.303	0.20	37.48	-	37.68	-	60.17	50.17	-22.49	-
4	0.503	0.20	29.68	-	29.88	-	56.00	46.00	-26.12	-
5	2.481	0.22	21.63	-	21.85	-	56.00	46.00	-34.15	-
6	25.687	1.39	27.60	-	28.99	-	60.00	50.00	-31.01	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

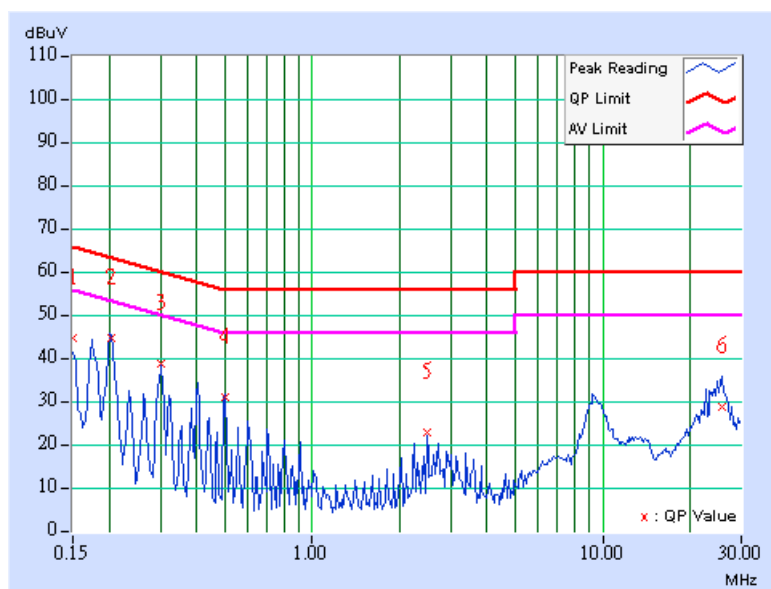

EUT	KEYBOARD	MODEL NO.	5211AX
		6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 55% RH, 1006 hPa	TESTED BY: Martin Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	44.03	-	44.23	-	66.00	56.00	-21.77	-
2	0.204	0.20	44.59	-	44.79	-	63.45	53.45	-18.66	-
3	0.301	0.20	38.18	-	38.38	-	60.20	50.20	-21.82	-
4	0.502	0.20	27.63	-	27.83	-	56.00	46.00	-28.17	-
5	2.475	0.30	22.61	-	22.91	-	56.00	46.00	-33.09	-
6	24.670	1.49	27.32	-	28.81	-	60.00	50.00	-31.19	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

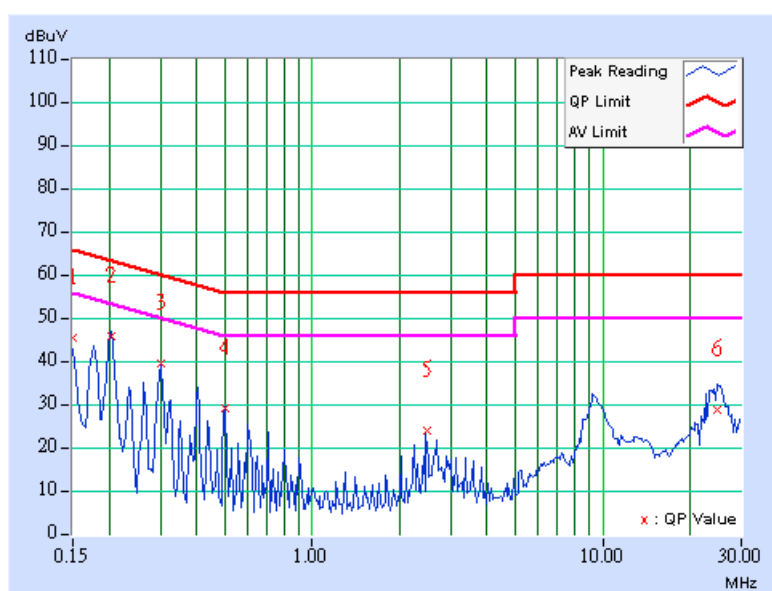

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15: 2005, Subpart B (Section: 15.109)

CISPR 22: 1997 (section 6)

ICES-003: 2004 (Class A: Section 5.4)
(Class B: Section 5.5)

FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 - 1000	47	37

Note: The limit for radiated test was performed according to CISPR 22: 1997, which was specified in FCC PART 15B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22: 1997 are same.

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

**FREQUENCY RANGE OF RADIATED MEASUREMENT
(For unintentional radiators)**

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8591E	3230A00704	Nov. 18, 2005
CHASE Preamplifier	CPA9231A	3230	Oct. 27, 2005
HP Preamplifier	8449B	3008A01924	Sep. 06, 2006
HP Preamplifier	8449B	3008A01638	Sep. 21, 2006
ROHDE & SCHWARZ TEST RECEIVER	ESCS 30	100292	Dec. 08, 2005
SCHWARZBECK Tunable Dipole Antenna	VHA 9103	NA	Oct. 29, 2005
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 03, 2006
CHASE BILOG Antenna	CBL6112B	2695	Dec. 31, 2005
EMCO Horn Antenna	3115	6714	Oct. 28, 2005
EMCO Horn Antenna	3115	9312-4192	Mar. 21, 2006
CHANCE Turn Table	CM-TT15	CM-T009	NA
CHANCE Tower	CM-AT40	CM-A009	NA
Software	ADT_Radiated V7.5.14	NA	NA
ANRITSU RF Switches	MP59B	6200265066	Dec. 17, 2005
TIMES RF cable	LMR-600	CABLE-ST9-01	Dec. 17, 2005

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Open Site No. 9.
 4. The VCCI Site Registration No. R-1248.
 5. The Industry Canada Reference No. IC 3789-9.

4.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4-2003 (section 8), CISPR 22 (section 10) and ICES-003: 2004 (section 4).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference-receiving antenna.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

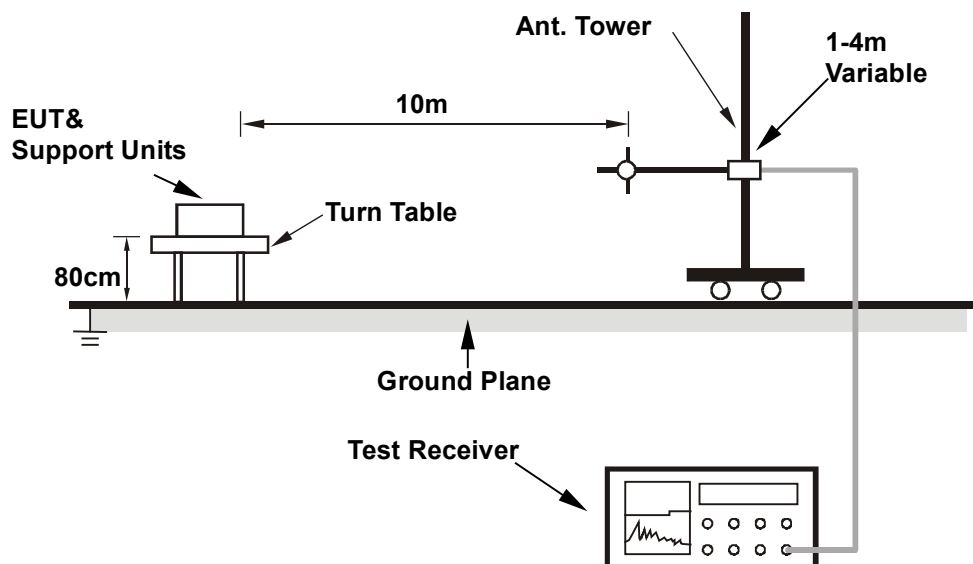

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as item 4.1.6


4.2.7 TEST RESULTS

EUT	KEYBOARD	MODEL NO.	5211AX
		FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	27deg. C, 70% RH, 1006 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.12	17.20 QP	30.00	-12.80	4.00 H	11	1.54	15.66
2	48.71	18.42 QP	30.00	-11.58	4.00 H	308	8.43	9.99
3	66.05	19.01 QP	30.00	-10.99	4.00 H	248	12.45	6.56
4	120.30	18.96 QP	30.00	-11.04	4.00 H	145	6.13	12.83
5	165.00	16.31 QP	30.00	-13.69	4.00 H	270	5.66	10.65
6	192.10	17.72 QP	30.00	-12.28	4.00 H	309	7.27	10.45
7	248.38	21.79 QP	37.00	-15.21	4.00 H	191	8.07	13.72

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

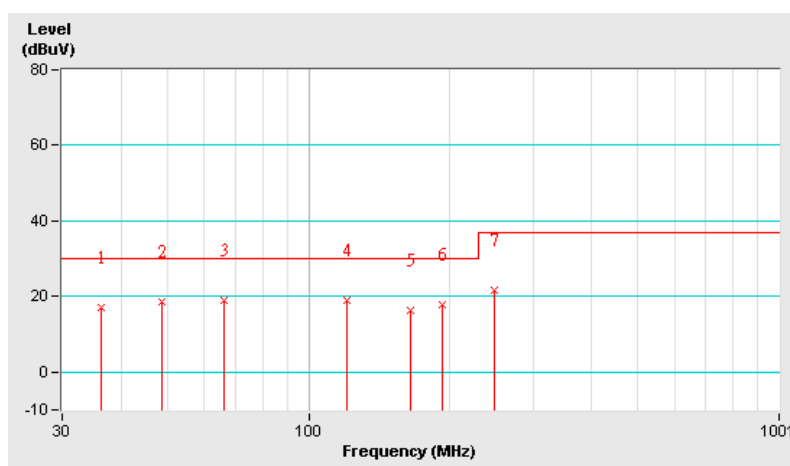


EUT	KEYBOARD	MODEL NO.	5211AX
		FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	27deg. C, 70% RH, 1006 hPa	TESTED BY: Martin Lee	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	36.25	20.11 QP	30.00	-9.89	1.65 V	145	4.49	15.62
2	48.01	19.69 QP	30.00	-10.31	1.00 V	136	9.34	10.35
3	78.06	21.40 QP	30.00	-8.60	1.00 V	265	13.81	7.59
4	113.79	19.36 QP	30.00	-10.64	1.00 V	83	7.08	12.28
5	131.29	17.23 QP	30.00	-12.77	1.00 V	176	4.93	12.30
6	184.33	18.79 QP	30.00	-11.21	1.00 V	211	8.54	10.25
7	203.15	16.51 QP	30.00	-13.49	1.00 V	122	5.65	10.86
8	218.76	20.30 QP	30.00	-9.70	1.00 V	247	8.45	11.85
9	248.38	23.62 QP	37.00	-13.38	1.00 V	321	9.90	13.72

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

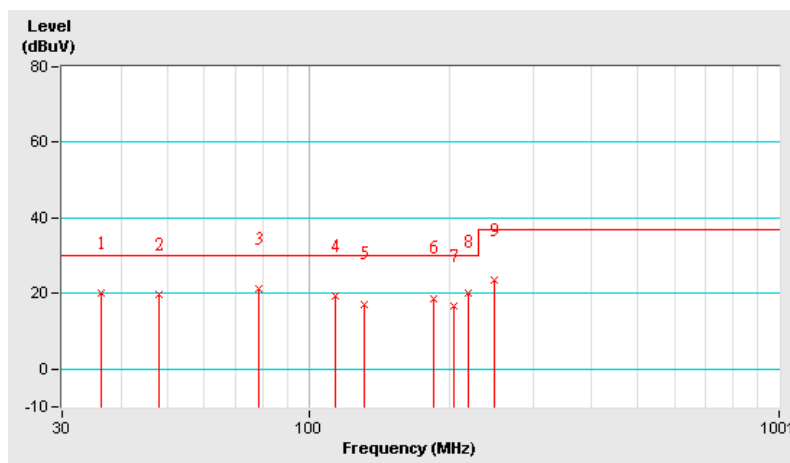

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



6 APPENDIX - INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.