

# CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100

Telefax: -9075

---

RSC14

issue test report consist of 49 Pages

Page 1 (49)

---



**TTI-P-G 166/98-30**

## **Accredited Bluetooth™ Test Facility (BQTF)**

**Test report no.: 2-2695-02-02/01**  
**FCC Part 15.247 / CANADA RSS-210**  
**C-UF15**  
**FCC-ID:DZL201565**

**CETECOM – ICT Services GmbH**  
Untertürkheimerstr. 6-10  
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0  
Fax: + 49 (0) 681 / 9075

*BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM*

## Table of Contents

### 1 General information

#### 1.1 Notes

#### 1.2 Testing laboratory

#### 1.3 Details of applicant

#### 1.4 Application details

#### 1.5 Test item

#### 1.6 Test standards

### 2 Technical test

#### 2.1 Summary of test results

#### 2.2 Test report

### 1 General information

#### 1.1 Notes

**The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.**

#### 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Harro.Ames@ict.cetecom.de

Internet : www.cetecom.de

**Accredited testing laboratory**

**DAR-registration number : TTI-P-G 166/98-30**

**Accredited Bluetooth™ Test Facility (BQTF)**

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

## 1.3 Details of applicant

**Name** : LOGITECH Europe SA  
**Street** : ZI Moulin du Choc  
**City** : 1122 Romanel / Morges  
**Country** : Switzerland  
**Telephone** : +41 21 863 51 11  
**Telefax** : +41 21 863 53 11  
**Contact** : Mr. Francesco Spina  
**Telephone** : +41 21 863 52 23

## 1.4 Application details

Date of receipt of application : 21.12.01  
Date of receipt of test item : 21.12.01  
Date of test : 10.01.02

## 1.5 Test item

Type of equipment : **Cordless BT Presentation device**  
Type designation : **C-UF15**  
Manufacturer : applicant  
Street :  
City :  
Country :  
Serial number : See photographs

### **Additional informations: :**

Frequency : 2402 – 2480 MHz  
Type of modulation : 1M00FXD / 79M8FXD (FHSS)  
Number of channels : 79  
Antenna : integral antenna  
Power supply : 4,15 – 5,25 V DC powered by USB computer port  
Output power : EIRP: -0.7 dBm / 0.85 mW  
FCC ID : DZL201565  
Type of equipment : cordless Bluetooth™ presentation device  
Temperature range : -20°C - +55°C

**1.6 Test standards:** **FCC Part 15 §15.247**  
**CANADA RSS-210**

## 2 Technical test

### 2.1 Summary of test results

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual remeasurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn and standard gain horns

All measurements were made radiated, as there is no coax adapter at the sample.

The antenna gain is given by the applicant with -2 dBi.

We used also the USB extension cord, given with the sample. We found no additional spurious.

The correction factor for the standard gain horn at 0.5 m distance is 24.5 dB.

All measurement settings are according to FCC 15.35, 15.205, 15.209, 15.247 and the

„Measurement guidelines for FHSS systems“, especially regarding the radiated measurements.

The product fullfills also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

## Final verdict : PASS

Technical responsibility for area of testing :


16.01.02 RSC 8414 Ames H.



Date Section Name  
Technical responsibility for area of testing :

Signature

16.01.02 RSC8412 Hausknecht D.



Date Section Name

Signature

## 2.2 Testreport

### TEST REPORT

Testreport no. : 2-2695-02-02/01

## TEST REPORT REFERENCE

## LIST OF MEASUREMENTS

Paragraph	PARAMETER TO BE MEASURED	PAGE
	<b>Transmitter parameters</b>	
§ 15.204	Antenna gain	7
§ 15.247 (a)	Carrier frequency separation	8
§ 15.247 (a)	Number of hopping channels	9
§ 15.247 (a)	Time of occupancy (dwell time)	11
§ 15.247 (d)	Power spectral density (Inquiry/Page mode)	16
§ 15.247 (a)(1)	Spectrum bandwidth of a FHSS System	17
§ 15.247 (b)(2)	Maximum peak output power	21
§15.247	Band edge compliance	26
§ 15.247 (c)(1)	Emission limitations	34
	<b>Receiver parameters</b>	
§ 15.209	Spurious radiations - Radiated	47
	<b>Test equipment listing</b>	<b>52</b>
	<b>Photographs of the equipment</b>	<b>54</b>

# CETECOM ICT Services GmbH

---

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 7 (49)

---

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

Antenna Gain

SUBCLAUSE § 15.204

The gain is -2.0 dBi

- declared by the applicant -

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

-

Equipment under test : C-UF15

Ambient temperature : 22°C


Relative humidity : 34%

Carrier frequency separation

§15.247(a)



Ref Lvl	Marker 1 [T1]	RBW	30 kHz	RF Att	30 dB
17.3 dBm	-3.21 dBm	VBW	30 kHz	TG Lvl	-20 dBm
	2.43999173 GHz	SWT	80 ms	Unit	dBm

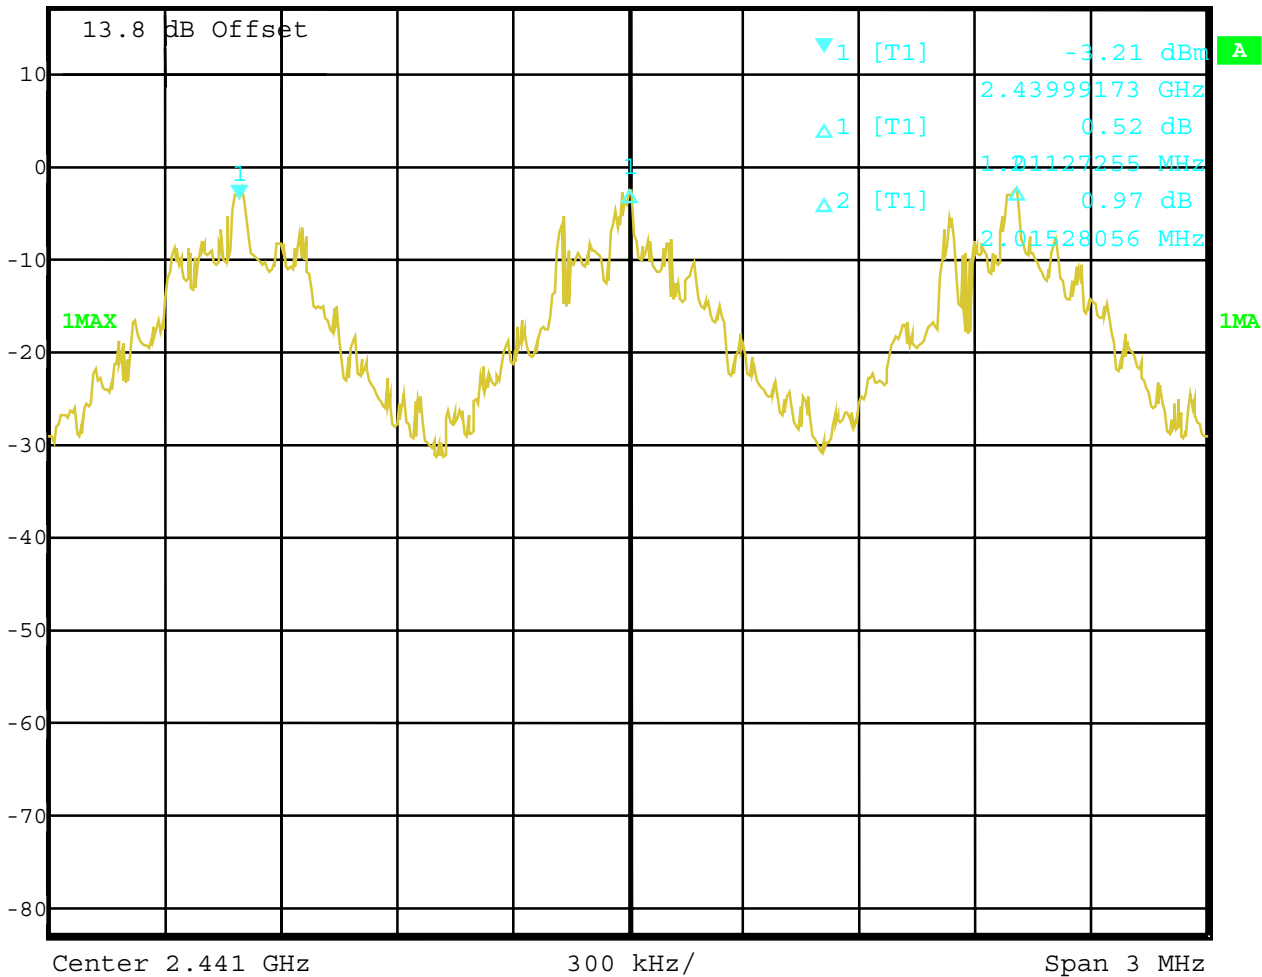

Date: 21.JAN.2002 10:22:28

The separation between two channels is about 1 MHz.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 9 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

Number of hopping channels


§15.247(a)

Channel 1 - 79



Ref Lvl  
17.3 dBm

RBW	1 MHz	RF Att	30 dB
VBW	1 MHz	TG Lvl	-20 dBm
SWT	20 ms	Unit	dBm

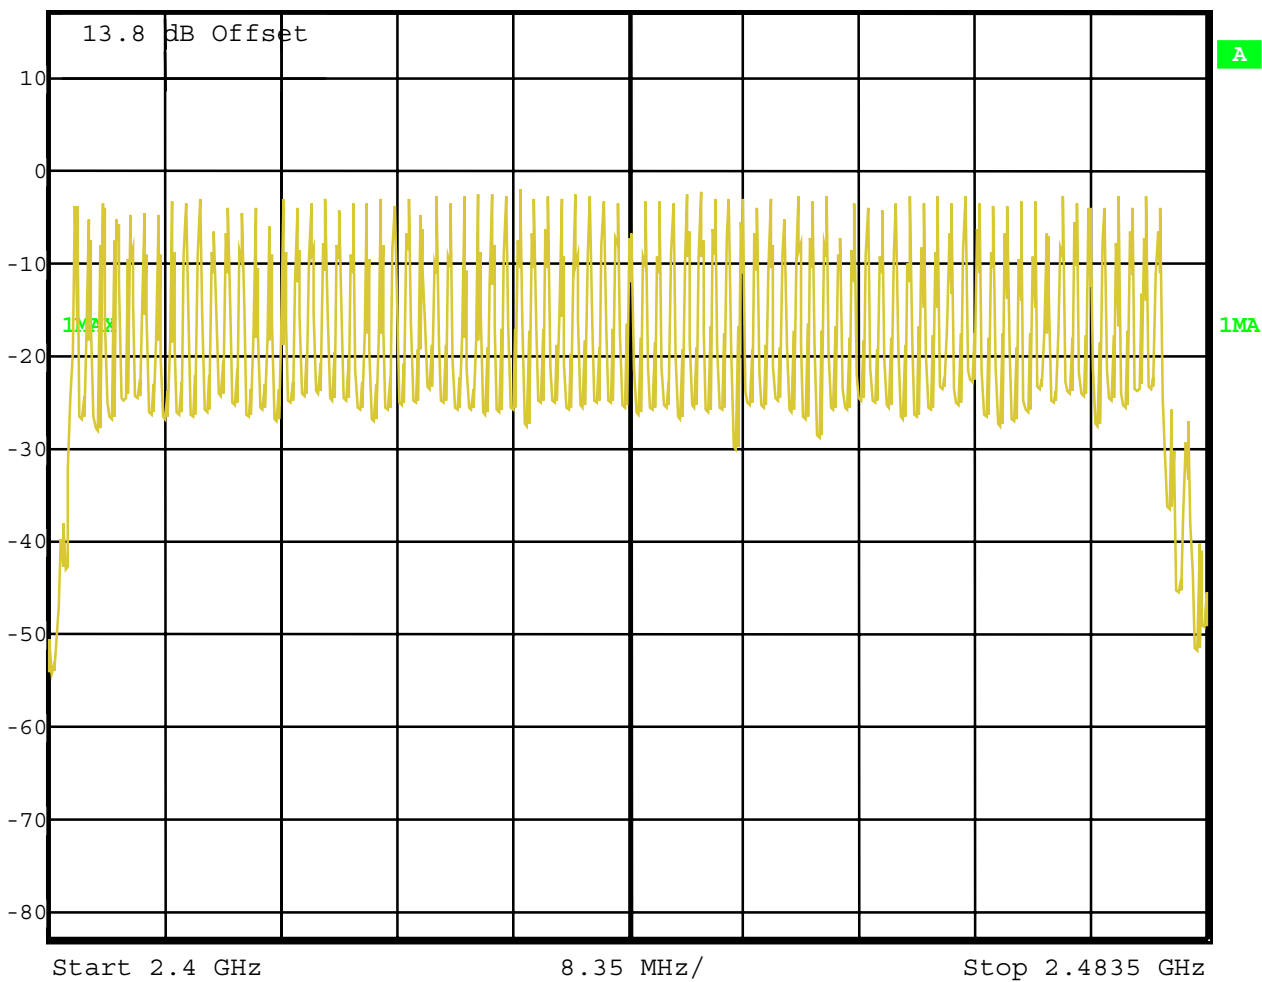

Date: 21.JAN.2002 10:32:47

The number of hopping channels is 79.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 10 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Time of occupancy (dwell time) for DH1

§15.247(a)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and for 30 seconds you have 303.9 times of appearance .

Each tx-time per appearance is 473.437 µs.

So we have  $303.9 * 450.9 \mu s = 137.03 \text{ ms}$  per 30 seconds.

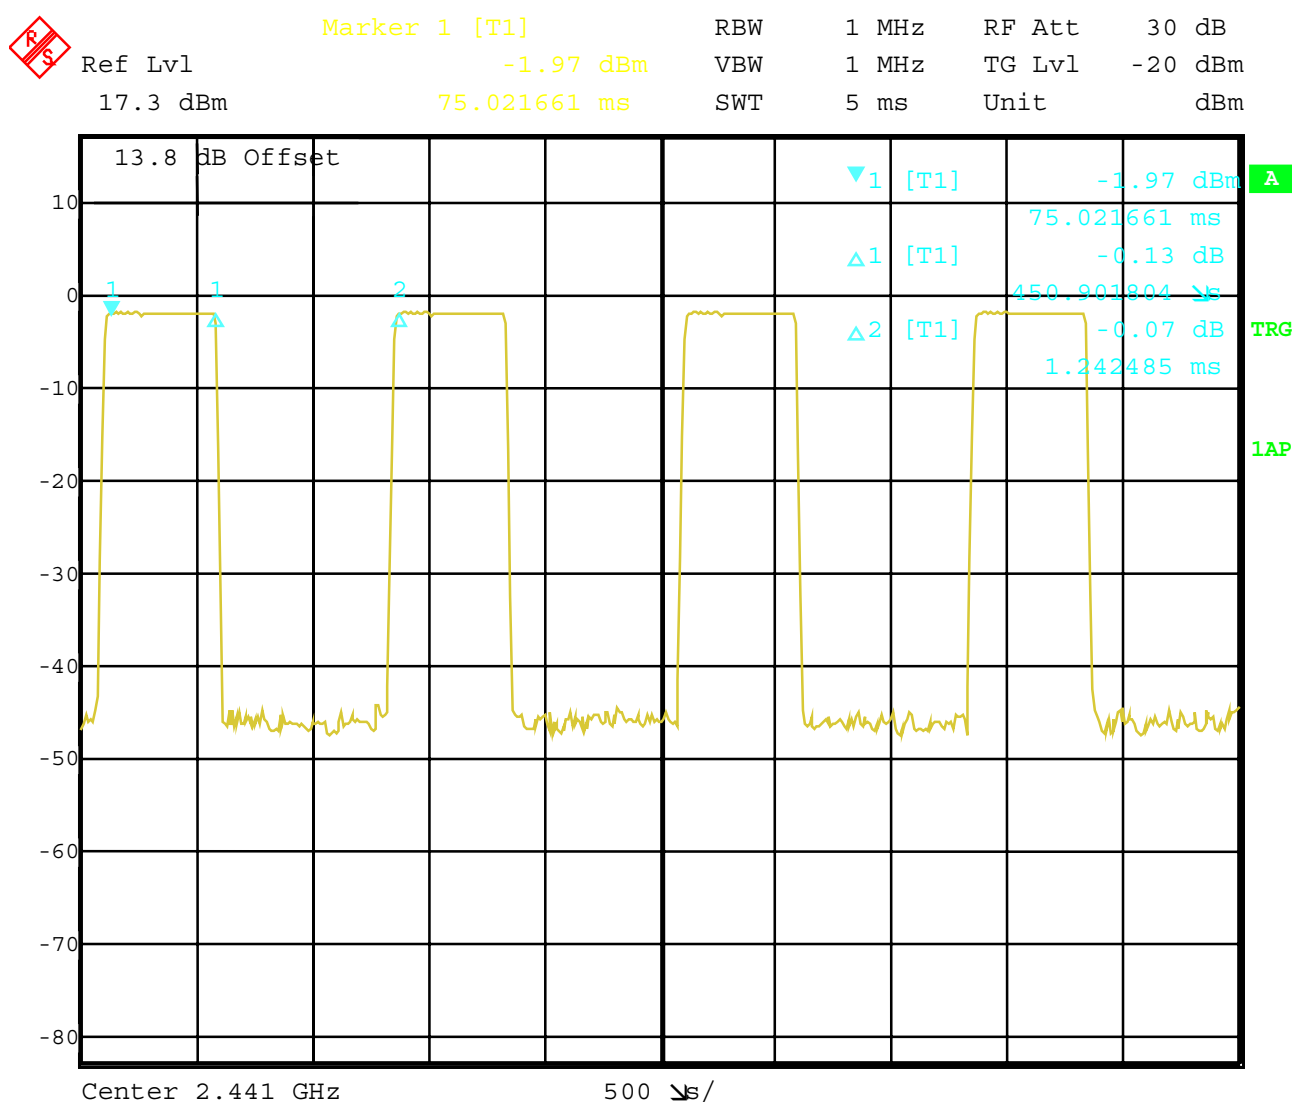

Date: 21.JAN.2002 10:36:16

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 11 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Time of occupancy (dwell time) for DH3

§15.247(a)

A DH3 Packets has max. 3 time slots for transmit (here 1) and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and for 30 seconds you have 153 times of appearance .

Each tx-time per appearance is 0.399 ms.

So we have  $153 * 0.399 \text{ ms} = 61.05 \text{ ms}$  per 30 seconds.

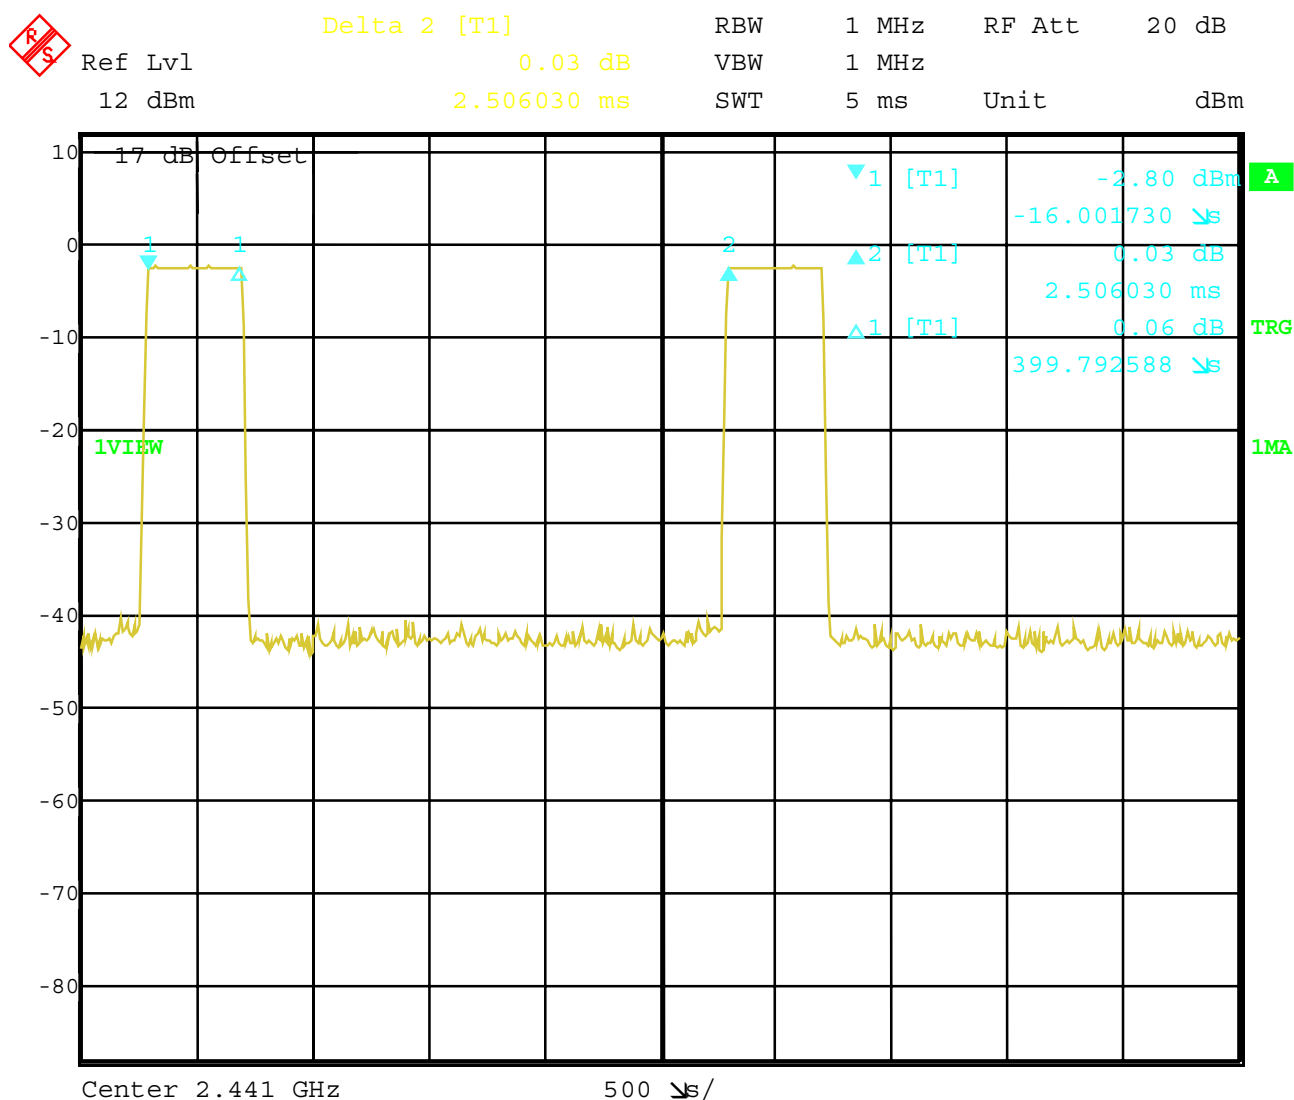

Date: 21.JAN.2002 10:48:39

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 12 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Time of occupancy (dwell time) for DH5

§15.247(a)

At DH5 Packets you have max. 5 time slots for transmit (here 1) and 1 for receiving, so the system makes worst case 266.7 hops per second with 79 channels. So you have each channel 3.36 times per second and for 30 seconds you have 100.8 times of appearance .

Each tx-time per appearance is 0.39 ms.

So we have  $100.8 * 0.391 \text{ ms} = 39.41 \text{ ms}$  per 30 seconds.

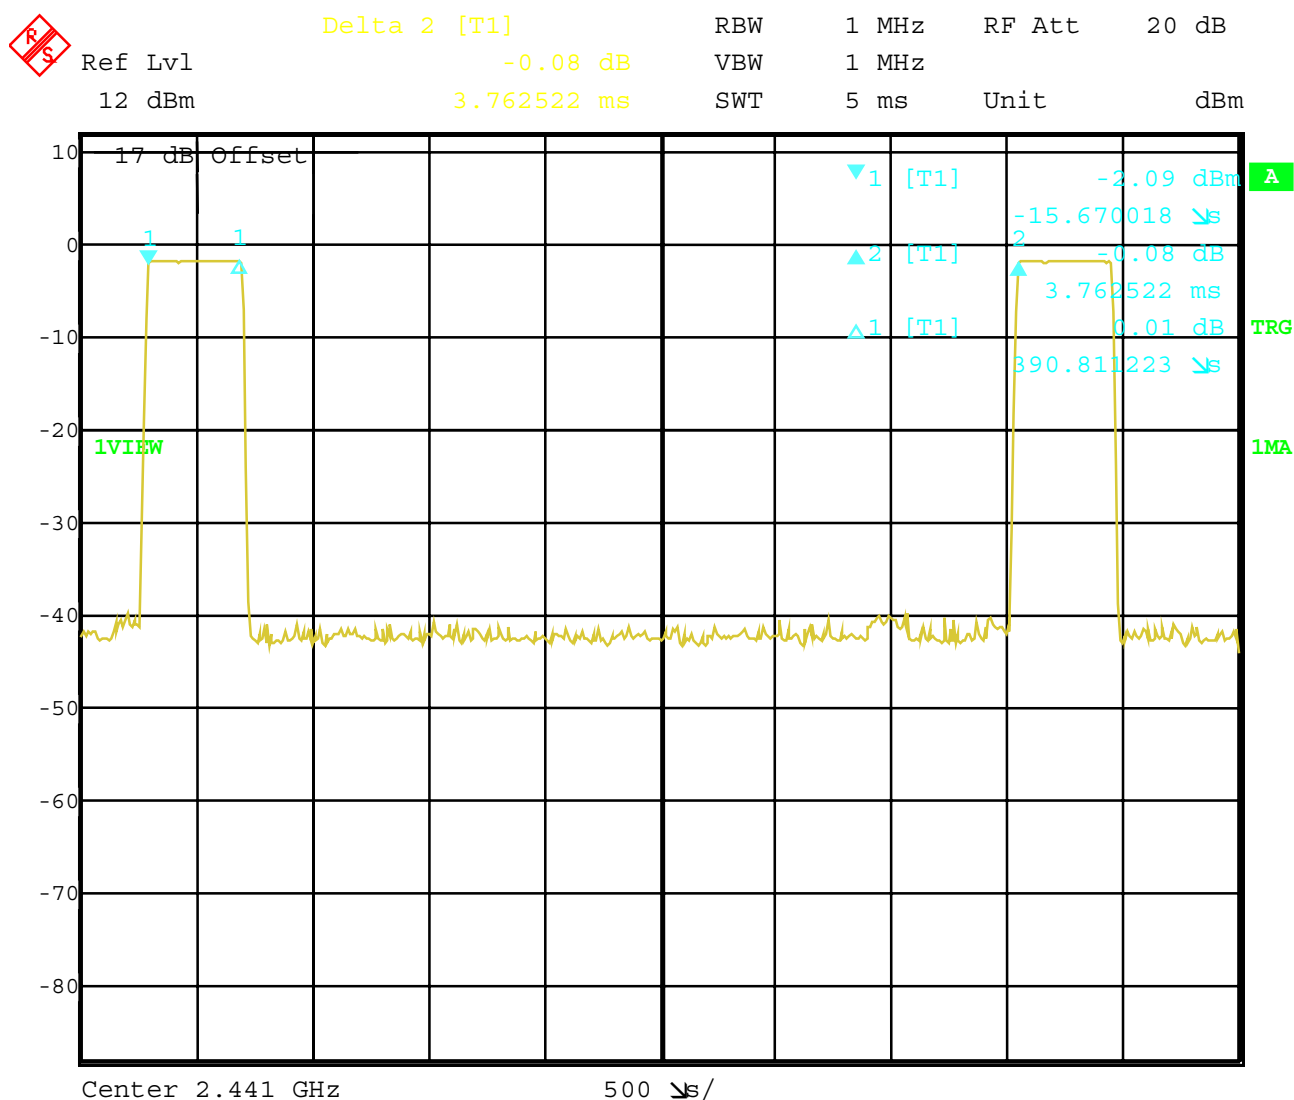

Date: 21.JAN.2002 10:52:31

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

Time of occupancy (dwell time) for page mode /Inquiry mode (TX-on time) §15.247(a)


At paging mode the system makes first hopping with 16 channels. One sequence( called train A) lasts 10 ms. Every 1.28s frequencies change and a second train A starts with different frequencies. After max  $7 \cdot 1.28$  s 16 new more distance frequencies (Train B) are used. So we have in the worst case (same frequency is in every train) the following time scedule. First:  $7 \cdot 128 \cdot 10$ ms. For the next 7 seconds train B with other frequencies.

Then train A and B changes frequently.

⇒ so we have  $7 \cdot 128 \cdot 105 \mu$ s, then 8.96 s other frequencies, then again  $7 \cdot 128 \cdot 105 \mu$ s

⇒ together in 30 s maximal 2 sequences => maximal 0.188 s per 30 second period.

## Page mode (TX-on time) / Inquiry mode (TX-on time)

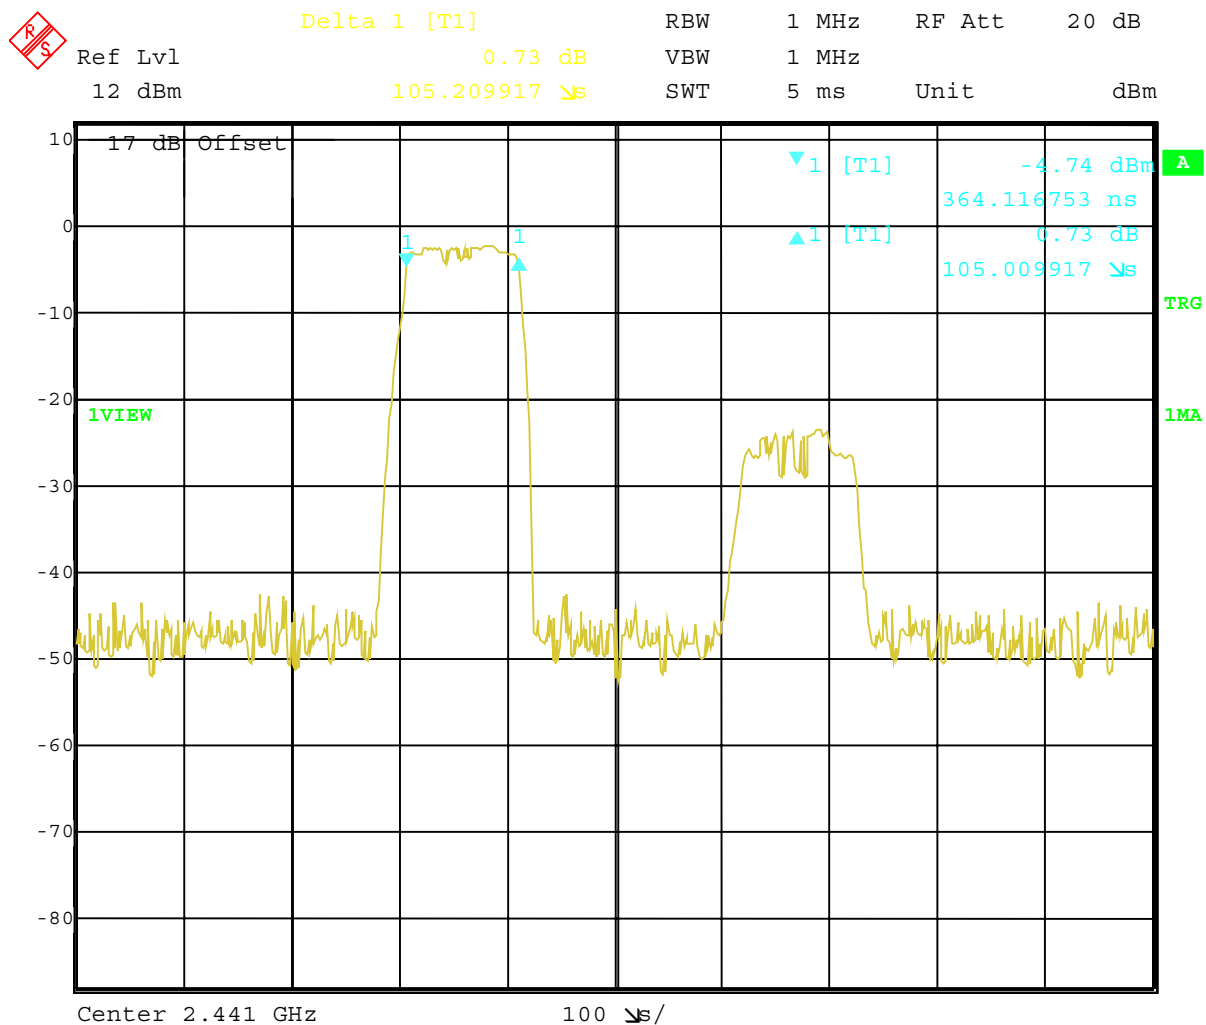

Date: 21.JAN.2002 10:56:35

## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

Page mode (complete sequence) / Inquiry mode (complete sequence)



Ref Lvl 12 dBm Delta 1 [T1] -0.80 dB RBW 1 MHz RF Att 20 dB  
12 dBm 9.998988 ms VBW 1 MHz Unit dBm  
SWT 5 ms

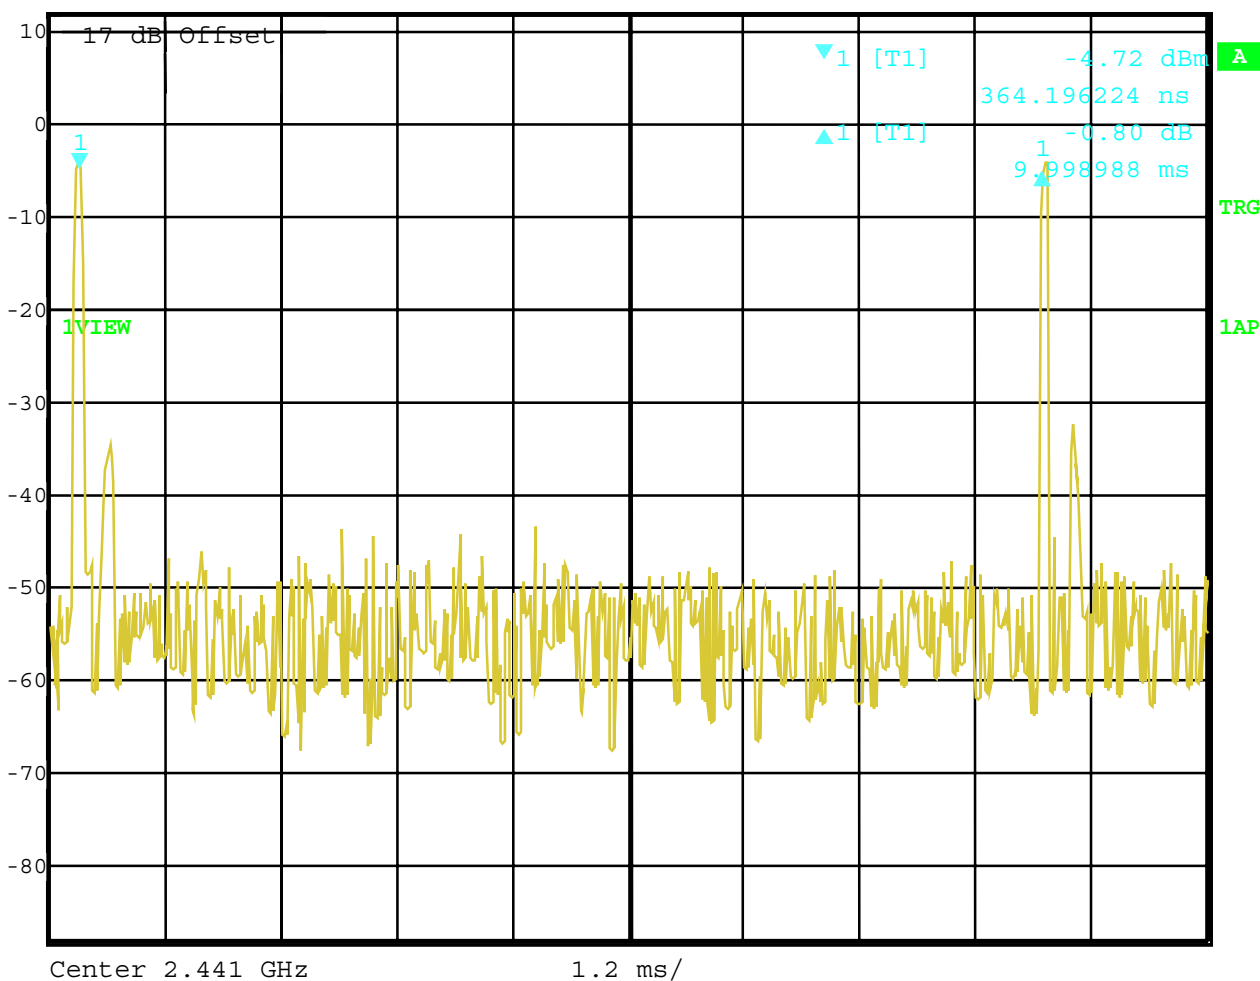

Date: 21.JAN.2002 10:59:11

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

Power Spectral density (Hybrid system in Inquiry mode / Page scan)

§15.247(d)

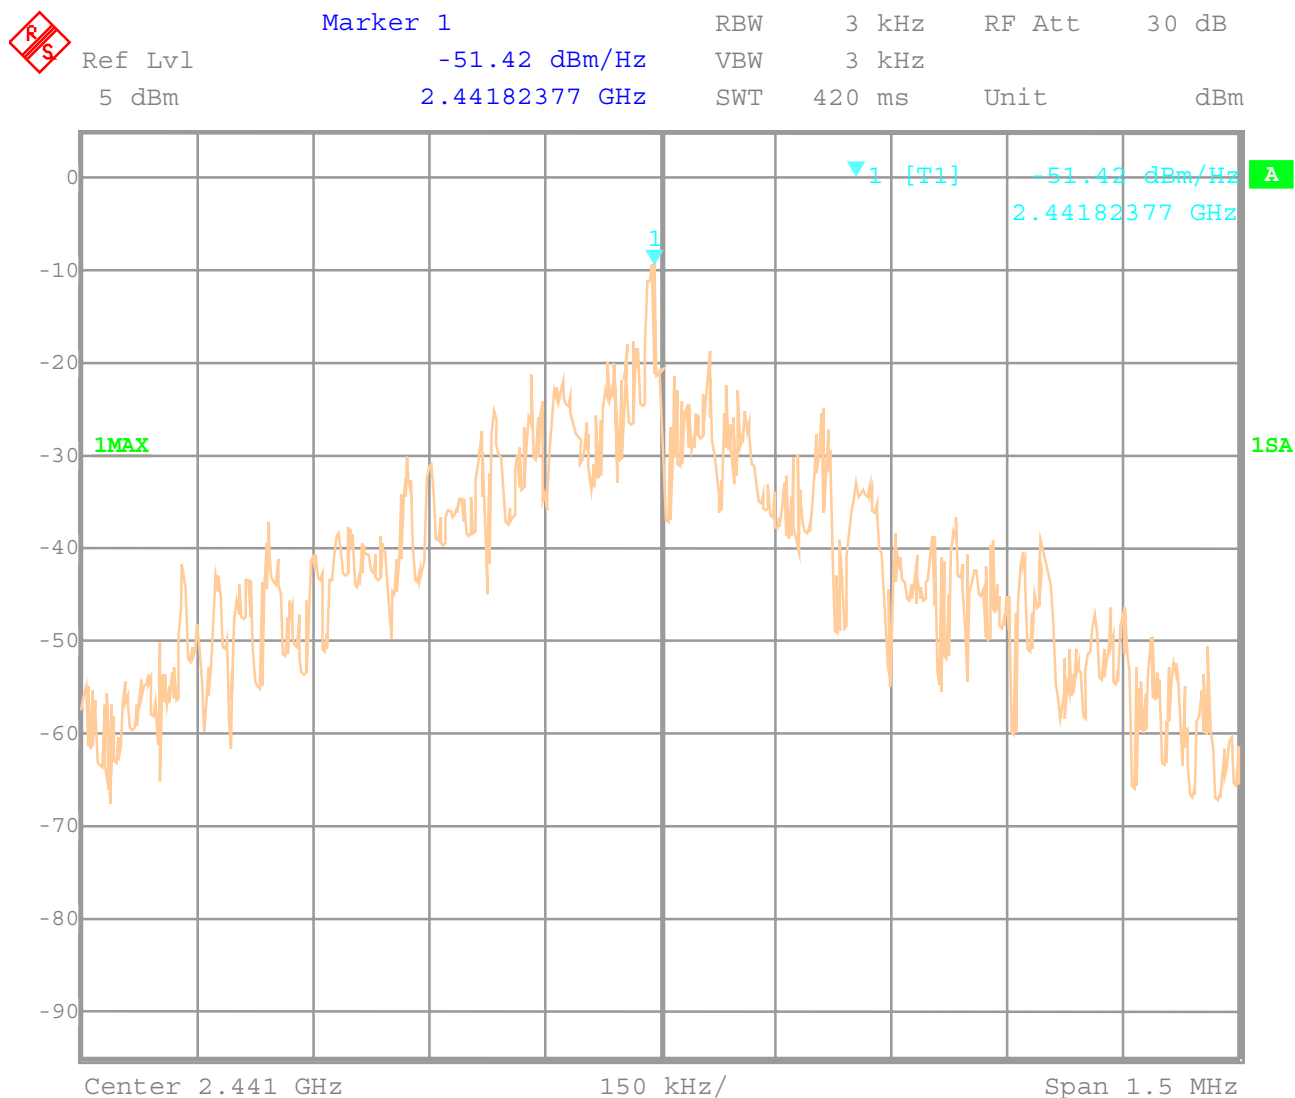

We use the noise density function of the analyzer. This results have to be corrected to the required bandwidth. The correction factor from dBm/Hz to dBm/3KHz is +34,8 dB.

=> Power density : -51.42 dBm/Hz = -16.62 dBm / 3 KHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 16 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

Spectrum Bandwith of a FHSS System

§15.247(a)

20 dB bandwidth

TEST CONDITIONS		20 dB BANDWIDTH ( kHz )		
Frequency (MHz)		2402	2441	2480
T <sub>nom</sub> ( 22 )°C	V <sub>nom</sub> ( 5.0 )V	619.238	661.323	721.443
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)

LIMIT

SUBCLAUSE §15.247(a) (1)

The maximum 20dB bandwith shall be at maximum 1000 KHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Spectrum Bandwidth of a FHSS System  
20 dB bandwidth

§15.247(a)

Channel 1



Ref Lvl	Marker 2 [T1]	RBW	10 kHz	RF Att	30 dB
17.3 dBm	-27.16 dBm	VBW	10 kHz	TG Lvl	-20 dBm
	2.40168437 GHz	SWT	100 ms	Unit	dBm

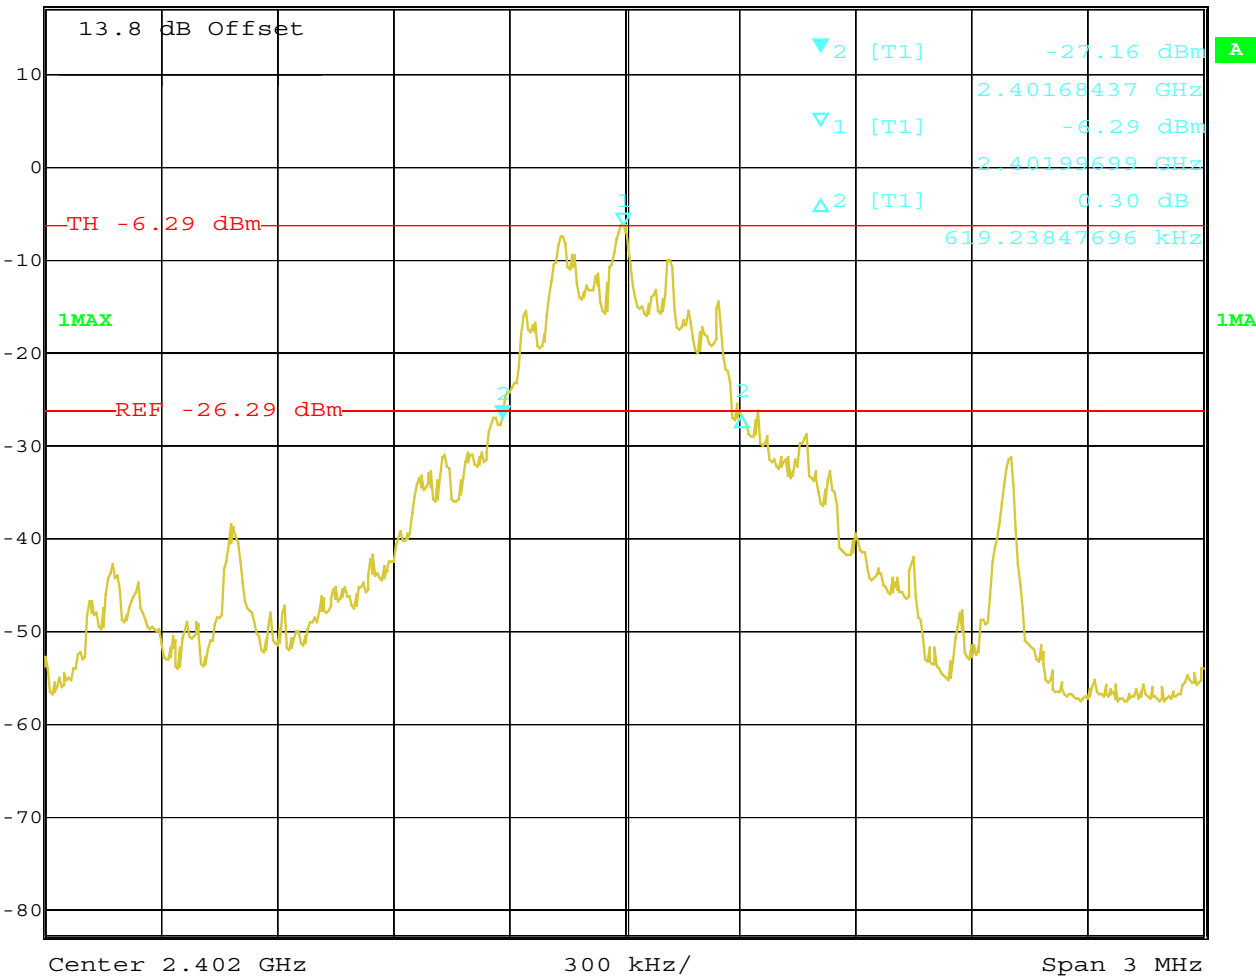

Date: 21.JAN.2002 11:09:41

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Spectrum Bandwidth of a FHSS System  
20 dB bandwidth

§15.247(a)

Channel 3:



Ref Lvl 17.3 dBm  
Marker 2 [T1] -23.27 dBm  
2.47963026 GHz  
RBW 10 kHz  
VBW 10 kHz  
RF Att 30 dB  
SWT 76 ms  
Unit dBm

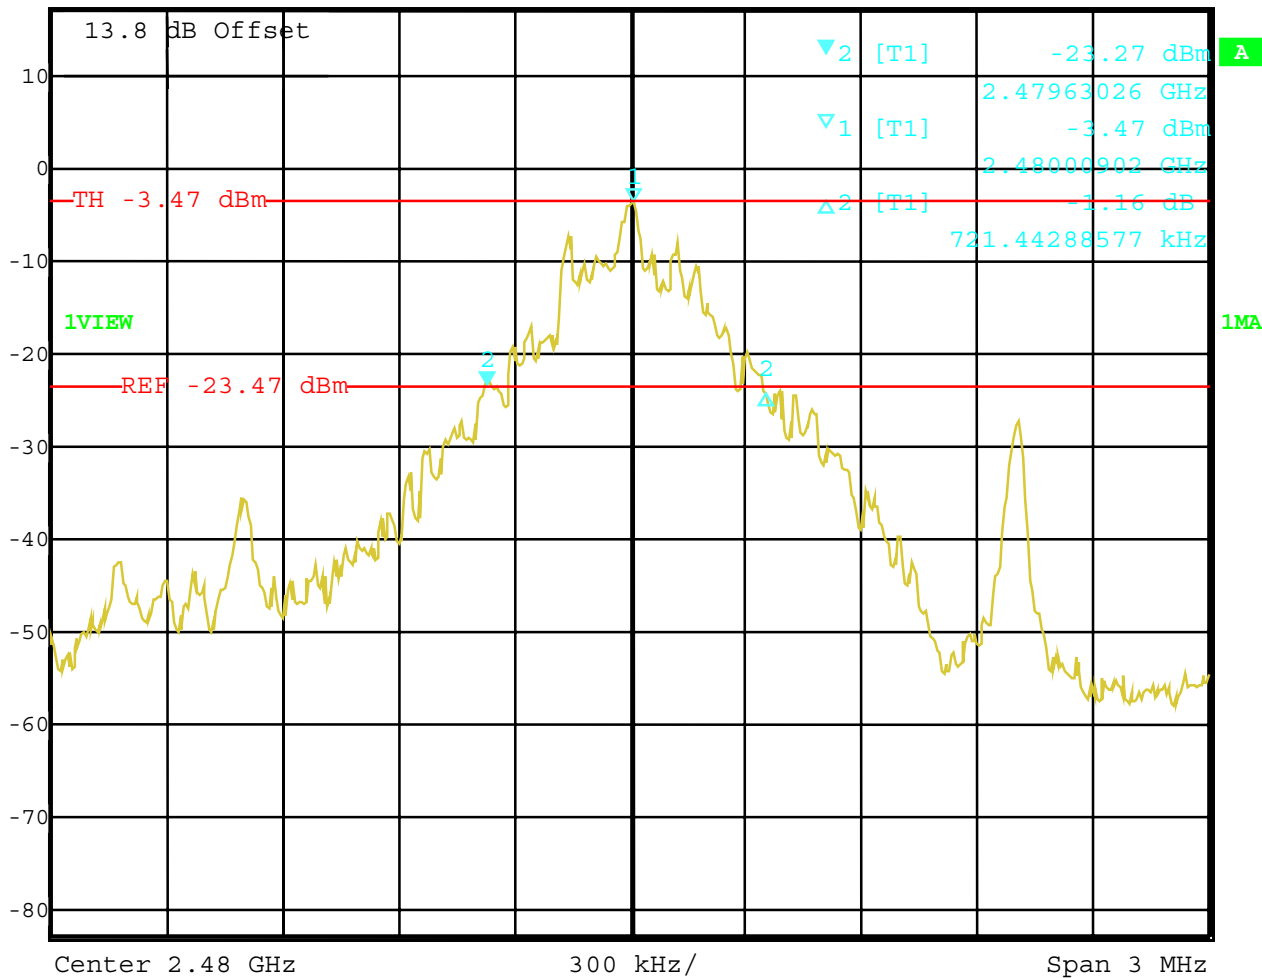

Date: 21.JAN.2002 11:26:44

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 20 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

## MAXIMUM PEAK OUTPUT POWER (radiated)

SUBCLAUSE § 15.247 (b) (1)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)		
Frequency (MHz)		2402	2441	2480
T <sub>nom</sub> ( 22 )°C	V <sub>nom</sub> ( 5.0)V	0.776	0.847	0.675
Maximum deviation from output power under extreme test conditions (dBc)		not applicable	not applicable	not applicable
Measurement uncertainty		±3dB		

RBW / VBW : 10 MHz

measured at a distance of 3m

## LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 21 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Peak output power (radiated) , measured with standard gain horn

§15.247 (b)

Channel 1: -1.14 dBm at 2402 MHz



Ref Lvl	Marker 1 [T1]	RBW	10 MHz	RF Att	30 dB
18.2 dBm	-1.14 dBm	VBW	10 MHz	TG Lvl	-20 dBm
	2.40221919 GHz	SWT	100 ms	Unit	dBm

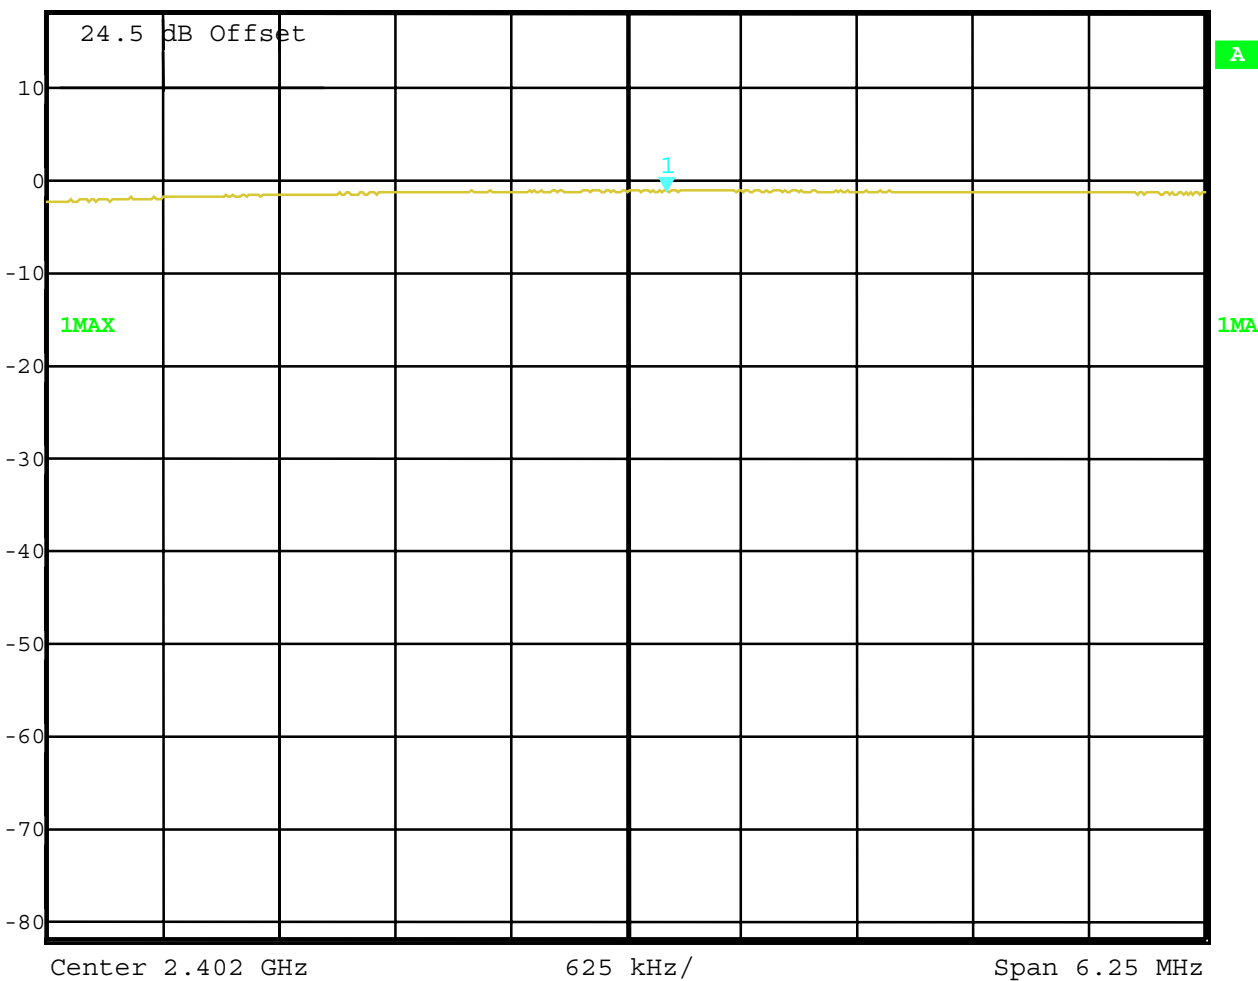

Date: 21.JAN.2002 10:12:59

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 22 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C


Relative humidity : 34%

Peak output power (radiated) , measured with standard gain horn

§15.247 (b)

Channel 2: -0.72 dBm at 2441 MHz

 Marker 1 [T1] RBW 10 MHz RF Att 30 dB  
Ref Lvl -0.72 dBm VBW 10 MHz TG Lvl -20 dBm  
17.1 dBm 2.44193111 GHz SWT 100 ms Unit dBm

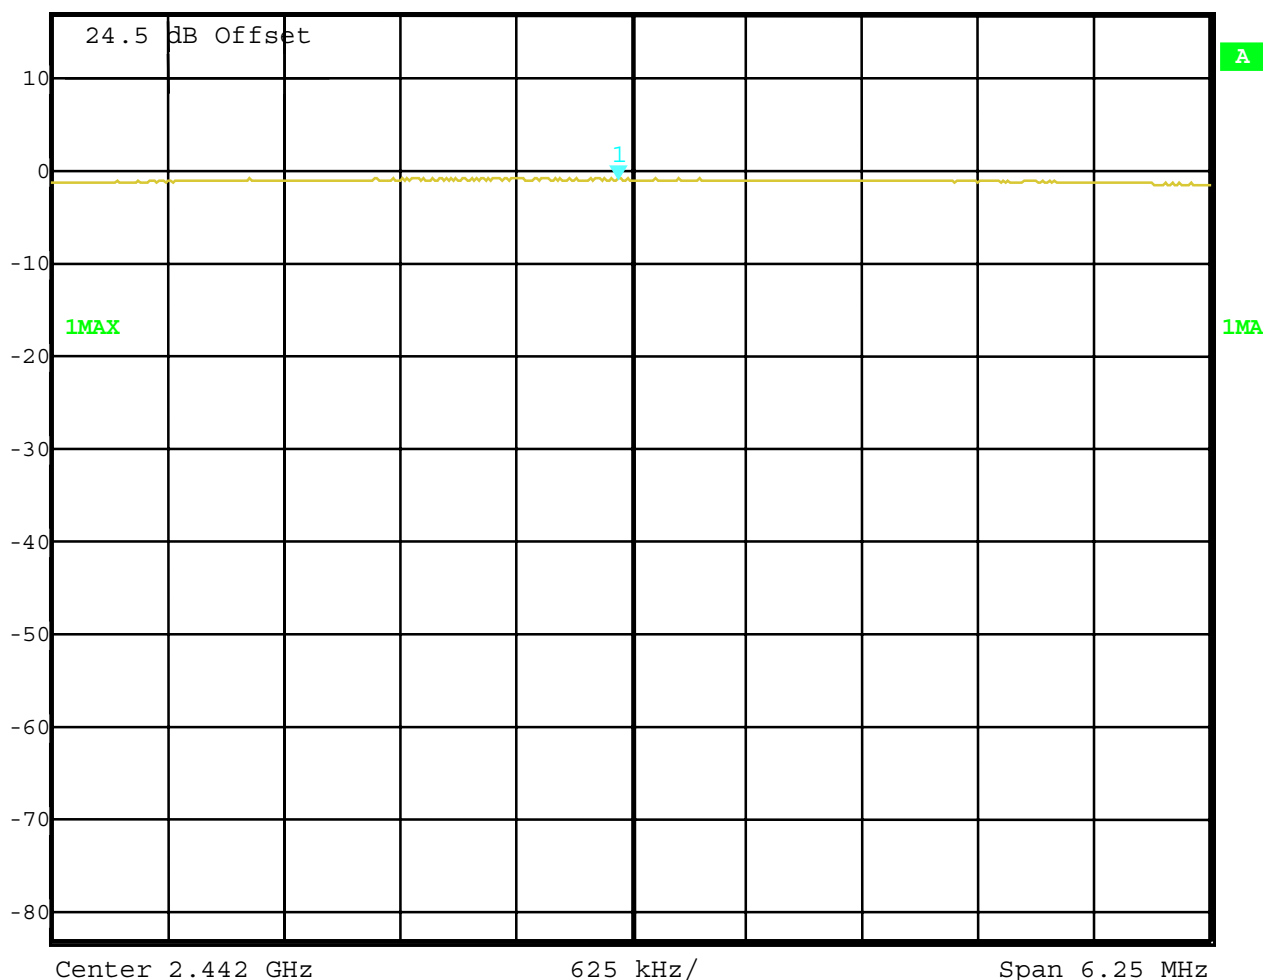

Date: 21.JAN.2002 10:11:25

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 23 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


Peak output power (radiated) , measured with standard gain horn

§15.247 (b)

Channel 3: -1.7 dBm at 2480 MHz



Ref Lvl	Marker 1 [T1]	RBW	10 MHz	RF Att	30 dB
17.3 dBm	-1.71 dBm	VBW	10 MHz	TG Lvl	-20 dBm
	2.48019414 GHz	SWT	100 ms	Unit	dBm

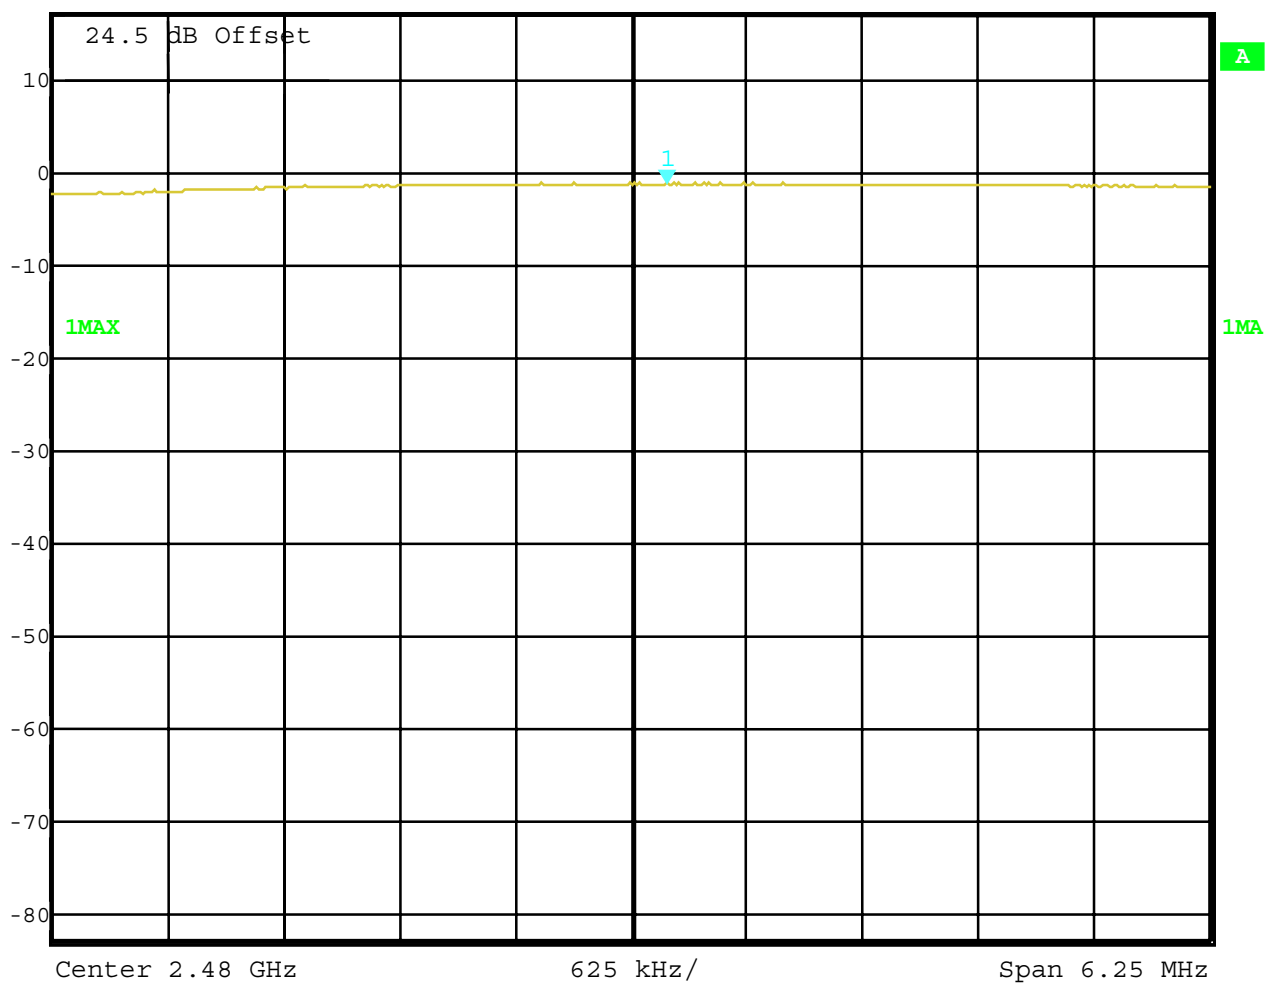

Date: 21.JAN.2002 10:14:23

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

Band-edge compliance of radiated emissions

§15.247 (c)

high frequency section (hopping off)

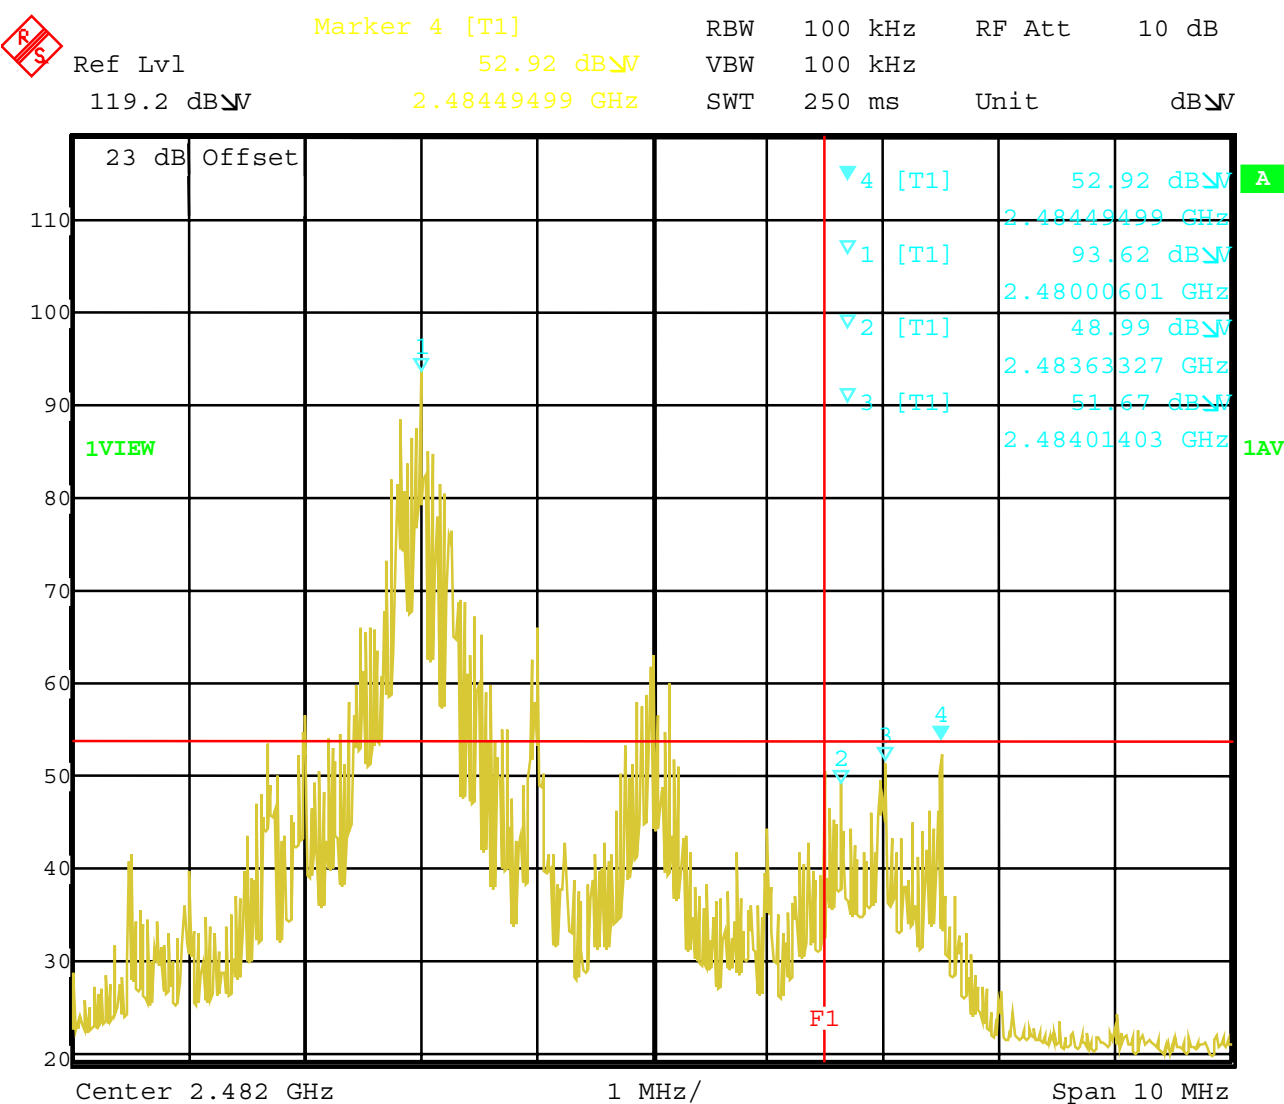

Date: 21.JAN.2002 11:28:42

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

## Band-edge compliance of radiated emissions

§15.247 (c)

### high frequency section (hopping on)

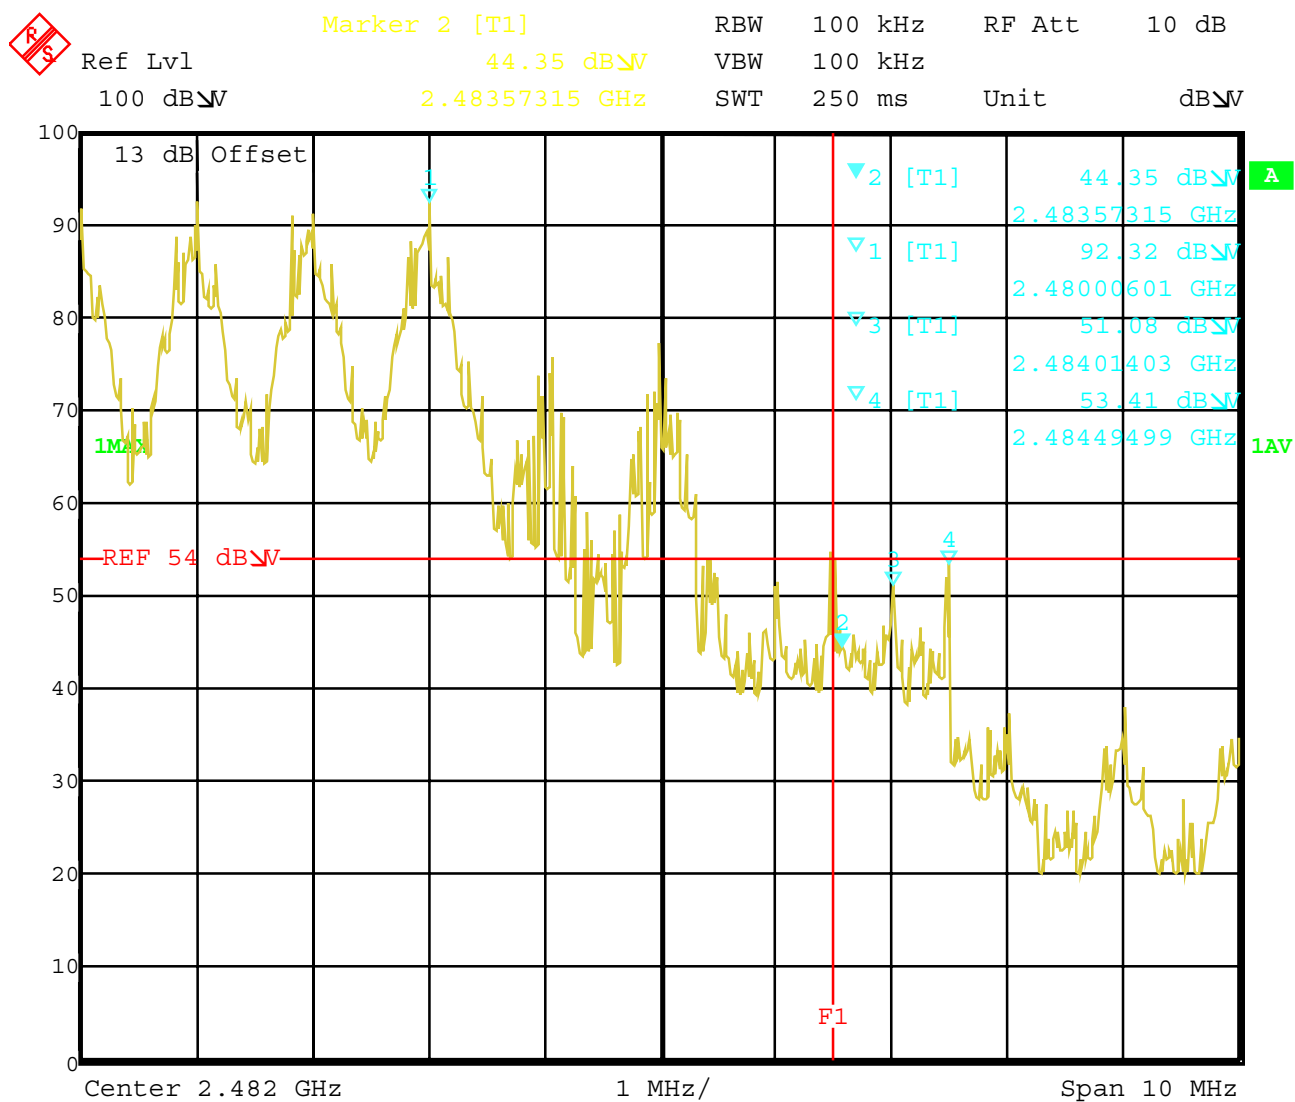

Date: 21.JAN.2002 13:19:33

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
 (for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 26 (49)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

## SPURIOUS RADIATED EMISSION

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)	polarization	amplitude of emission (dBµV/m) QUASIPeAK	amplitude of emission (dBµV/m) average	limit max. allowed emmission power (dBµV/m)	results
CH 1					
1100.6	vertical		28.8	54.0	complies
4810.5	vertical		32.1	54.0	complies
CH 2					
1098.4	vertical		28.2	54.0	complies
4885.1	vertical		31.0	54.0	complies
CH 3					
1100.4	vertical		28.6	54.0	complies
4958.5	vertical		29.2	54.0	complies
Measurement uncertainty		± 3dB			

## LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)


Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2402 MHz

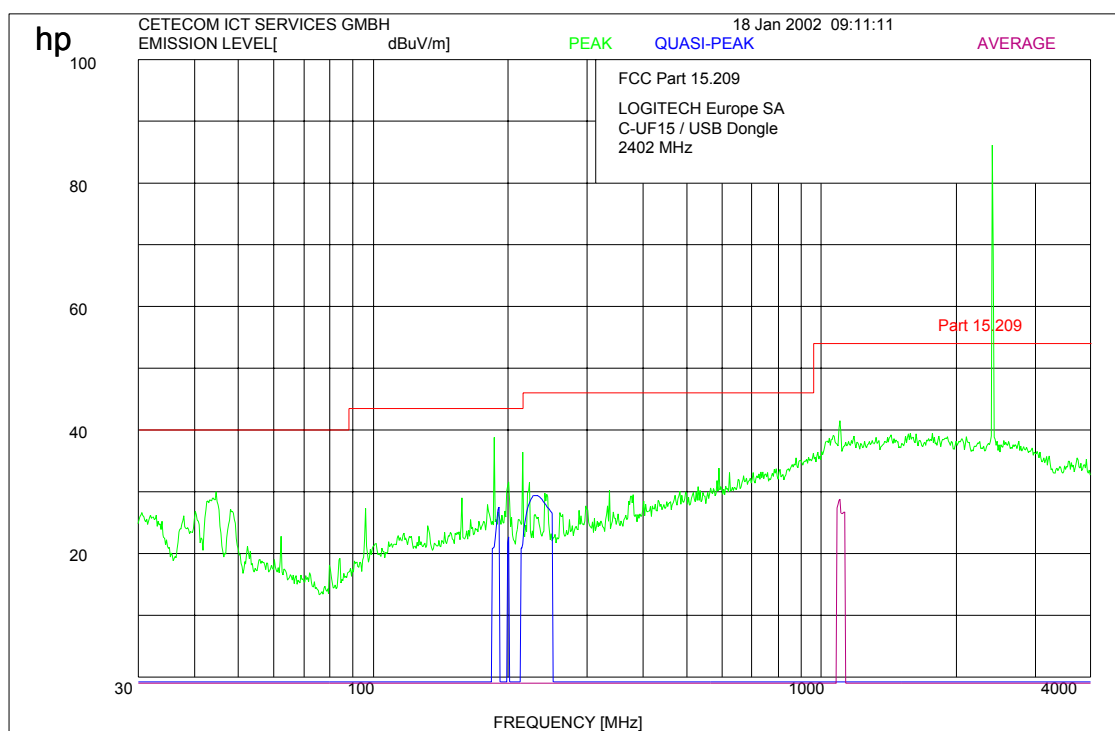

The peaks below 1 GHz were caused by the laptop we used to test, not by the sample.

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### LIMITS

### SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2441 MHz

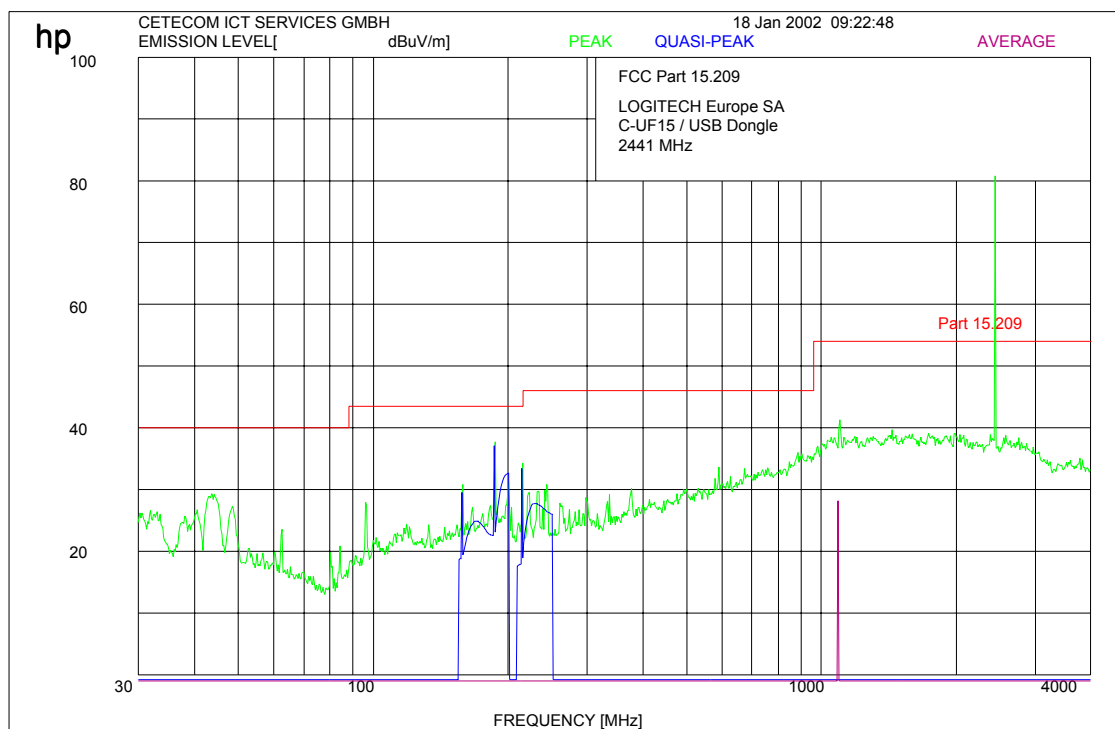

The peaks below 1 GHz were caused by the laptop we used to test, not by the sample.

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

## LIMITS

## SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter) SUBCLAUSE § 15.247 (c) (1)

2480 MHz

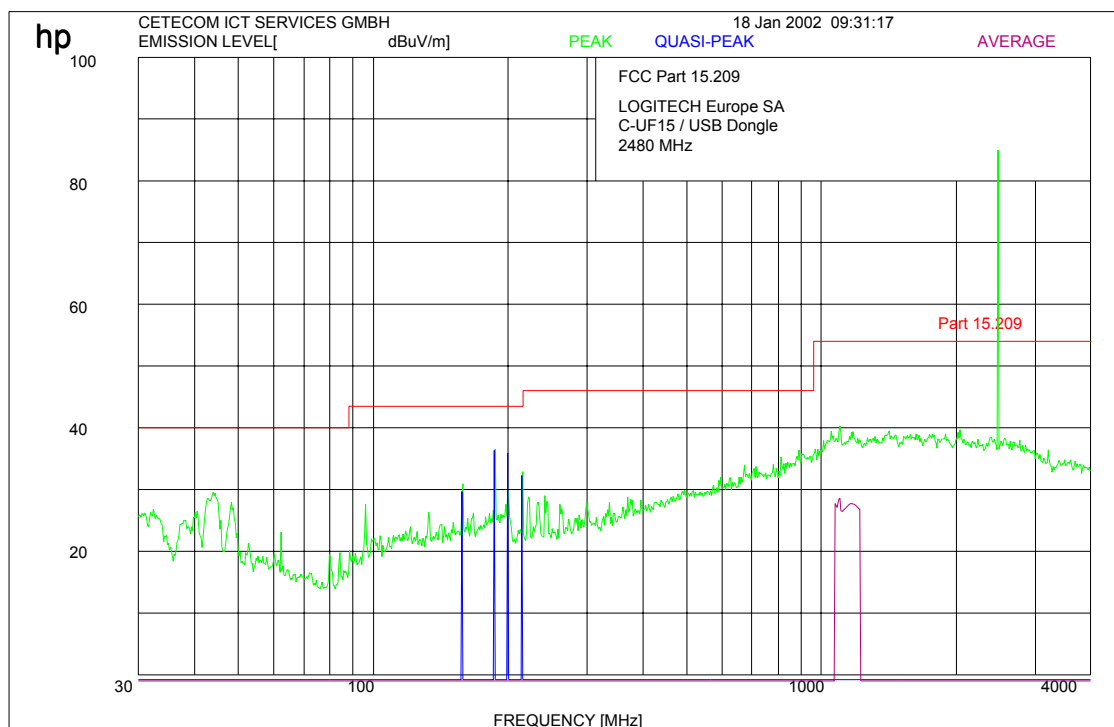

The peaks below 1 GHz were caused by the laptop we used to test, not by the sample.

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### LIMITS

### SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 30 (49)

Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

### Channel 1

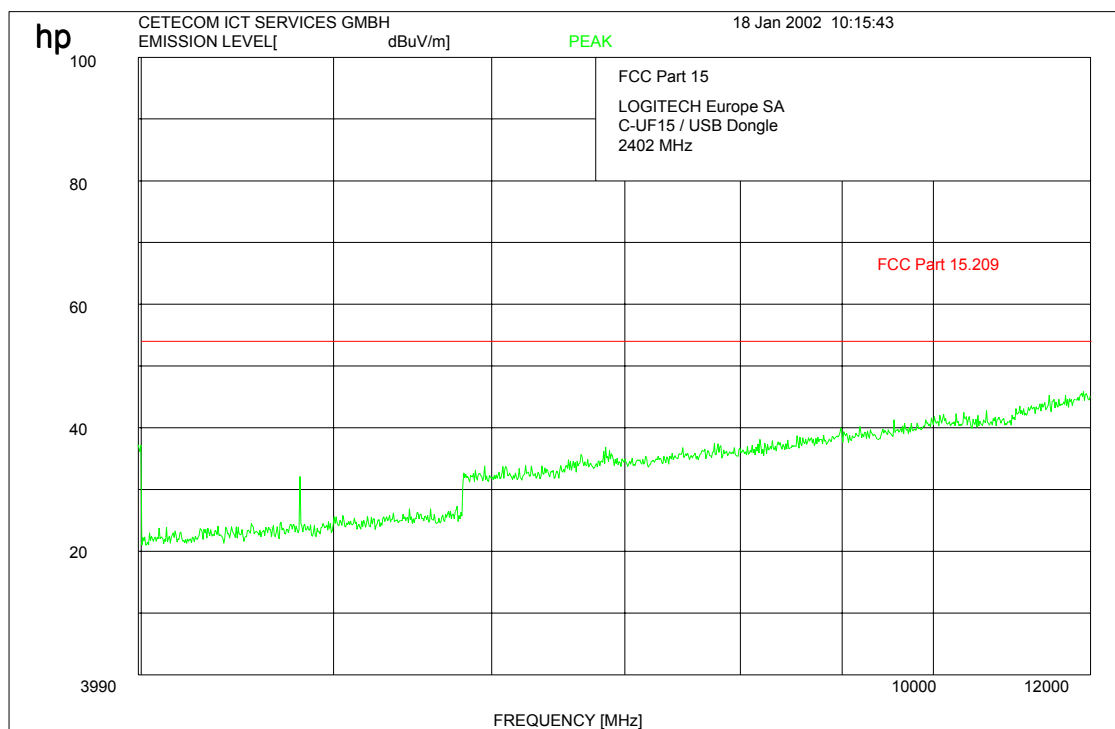

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

## LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

### Channel 2

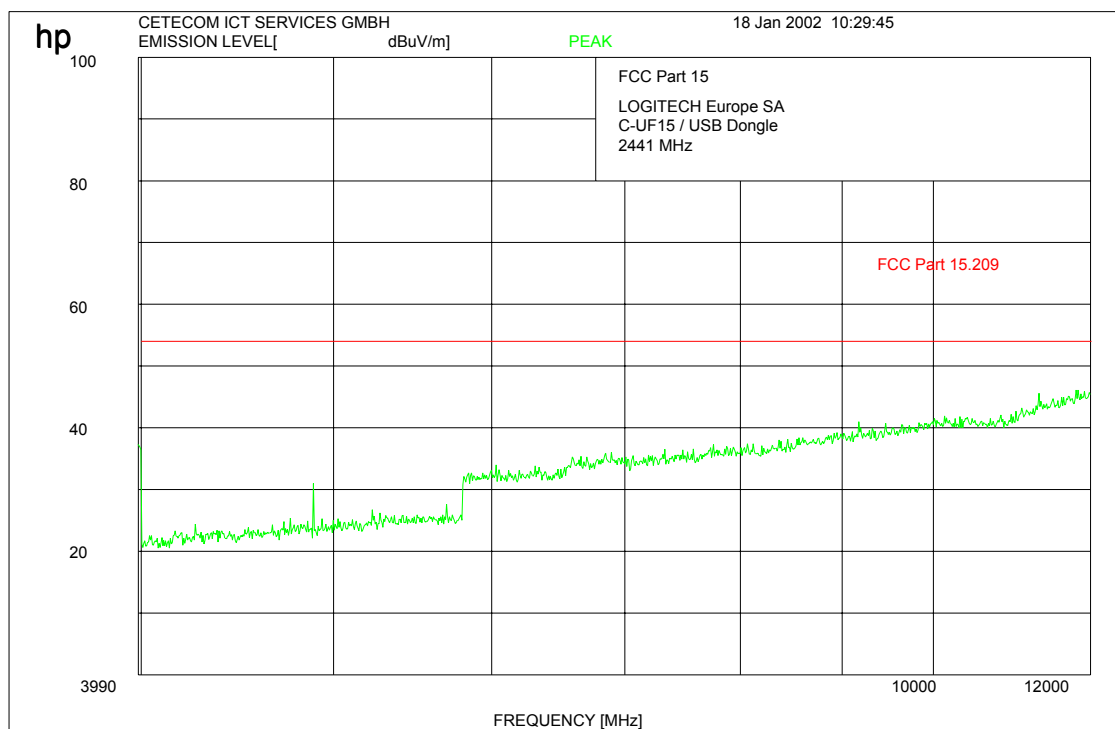

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

## LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 32 (49)

Equipment under test : C-UF15


Ambient temperature : 22°C

Relative humidity : 34%

## EMISSION LIMITATIONS (Transmitter)

CLAUSE § 15.247 (c) (1)

### Channel 3

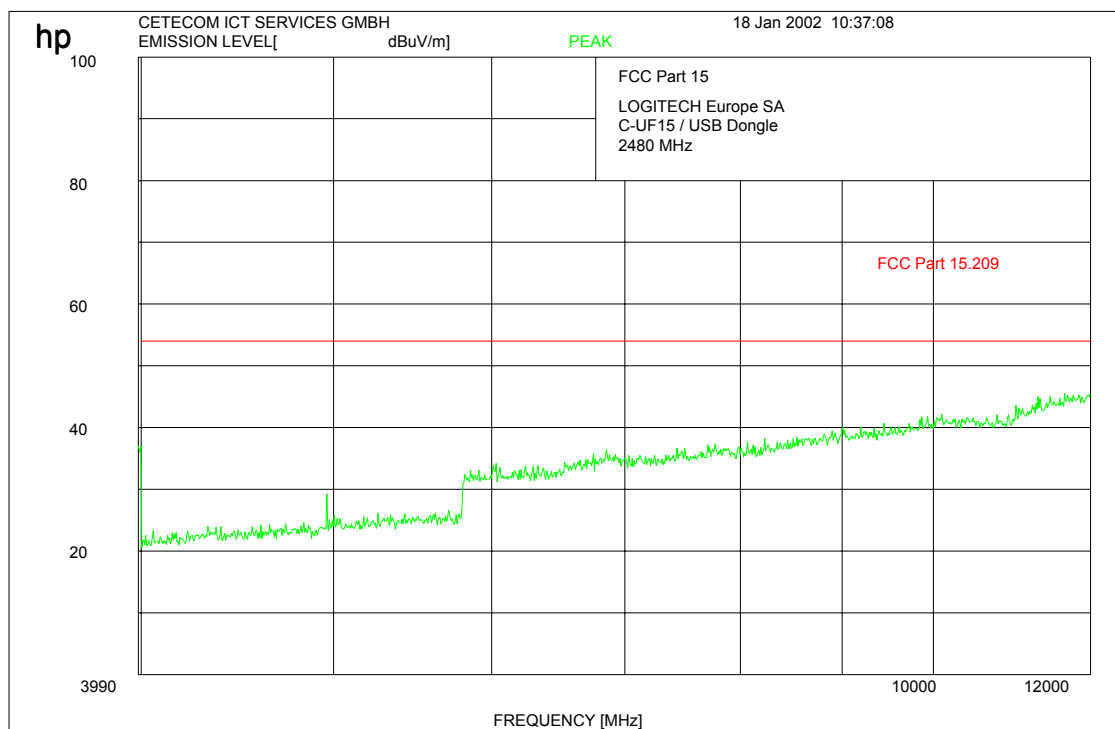

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

## LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)



Equipment under test : C-UF15  
Ambient temperature : 22°C  
Relative humidity : 34%

EMISSION LIMITATIONS (Transmitter)      **CLAUSE § 15.247 (c) (1)**  
(this is valid for all 3 channels)

**12 – 18 GHz peak**

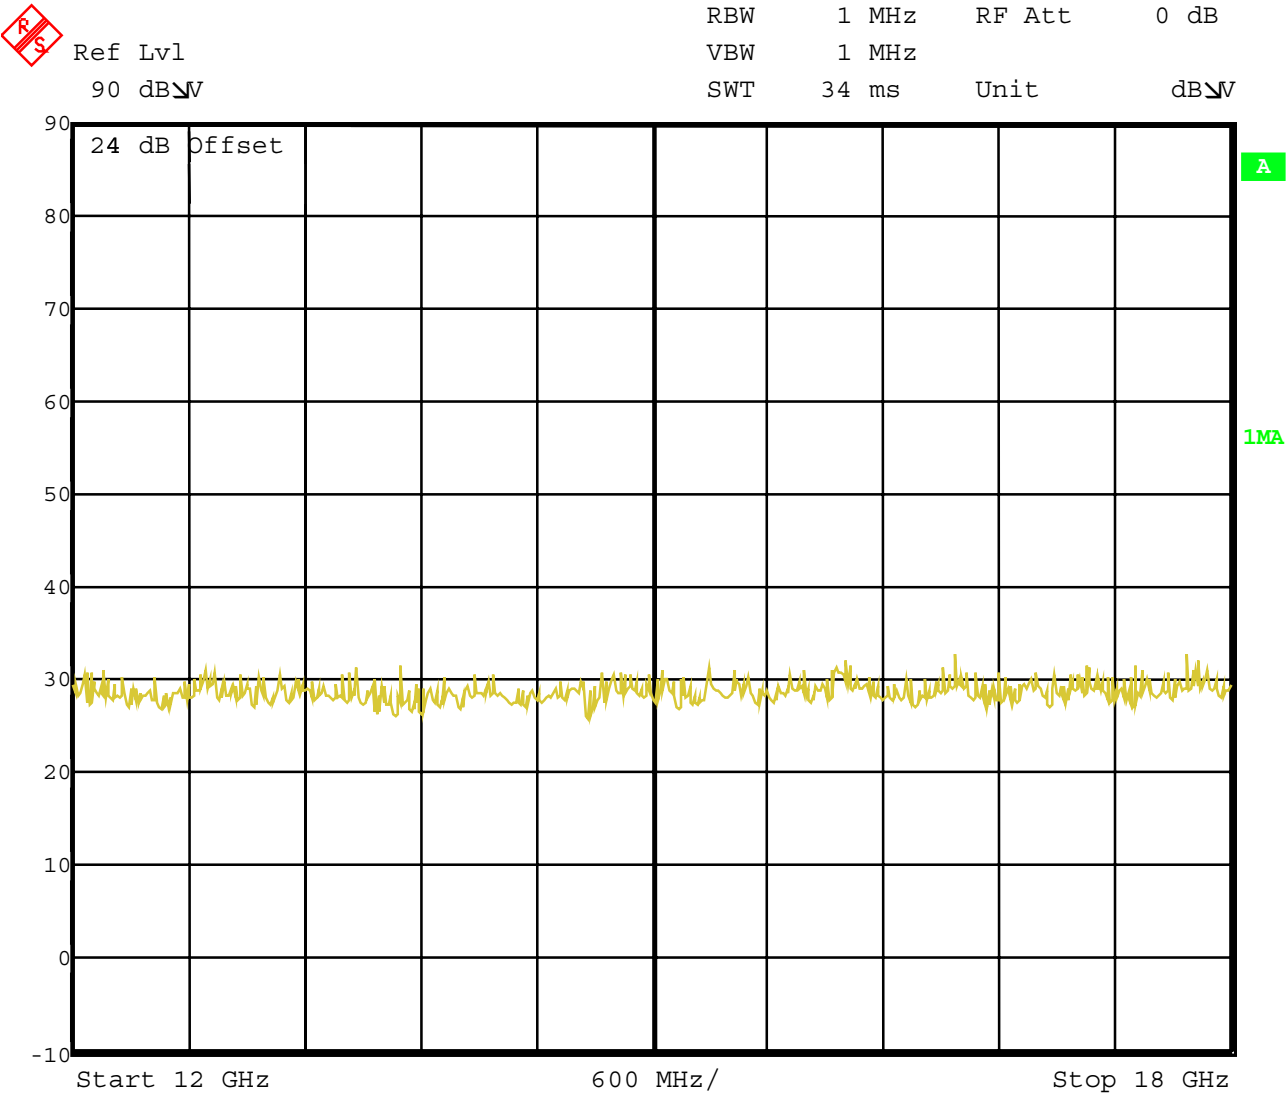

**LIMITS**      **SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

Equipment under test : C-UF15

Ambient temperature : 22°C

Relative humidity : 34%


EMISSION LIMITATIONS (Transmitter)  
(this is valid for all 3 channels)

CLAUSE § 15.247 (c) (1)

12 – 18 GHz average



Ref Lvl 90 dBμV  
RBW 1 MHz RF Att 0 dB  
VBW 1 MHz  
SWT 34 ms Unit dBμV

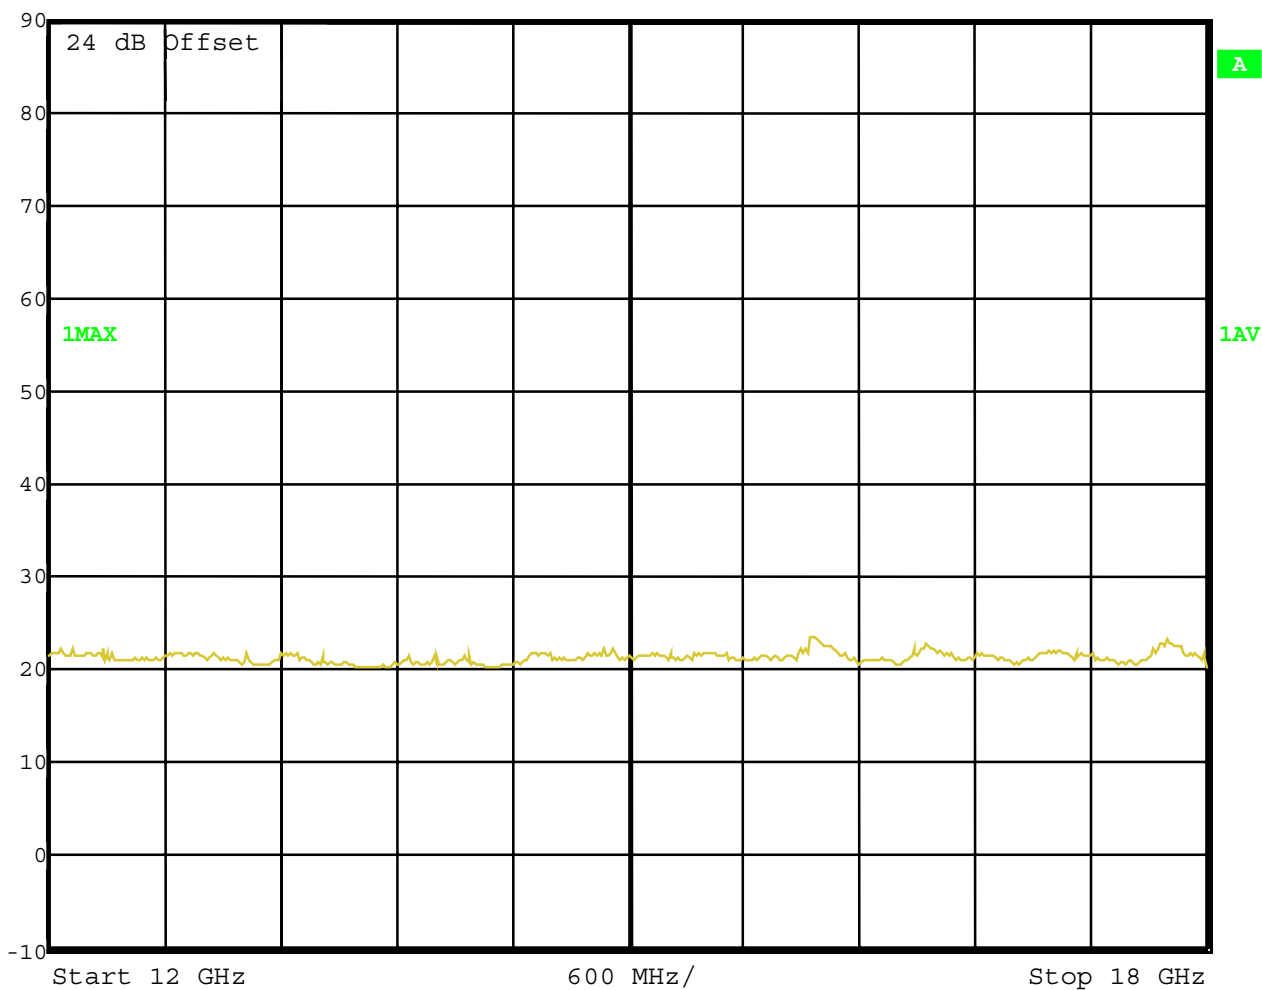

LIMITS SUBCLAUSE § 15.247 (c)


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

Equipment under test : C-UF15  
Ambient temperature : 22°C  
Relative humidity : 34%

EMISSION LIMITATIONS (Transmitter)      **CLAUSE § 15.247 (c) (1)**  
  
(this is valid for all 3 channels)

**18 – 26 GHz peak**

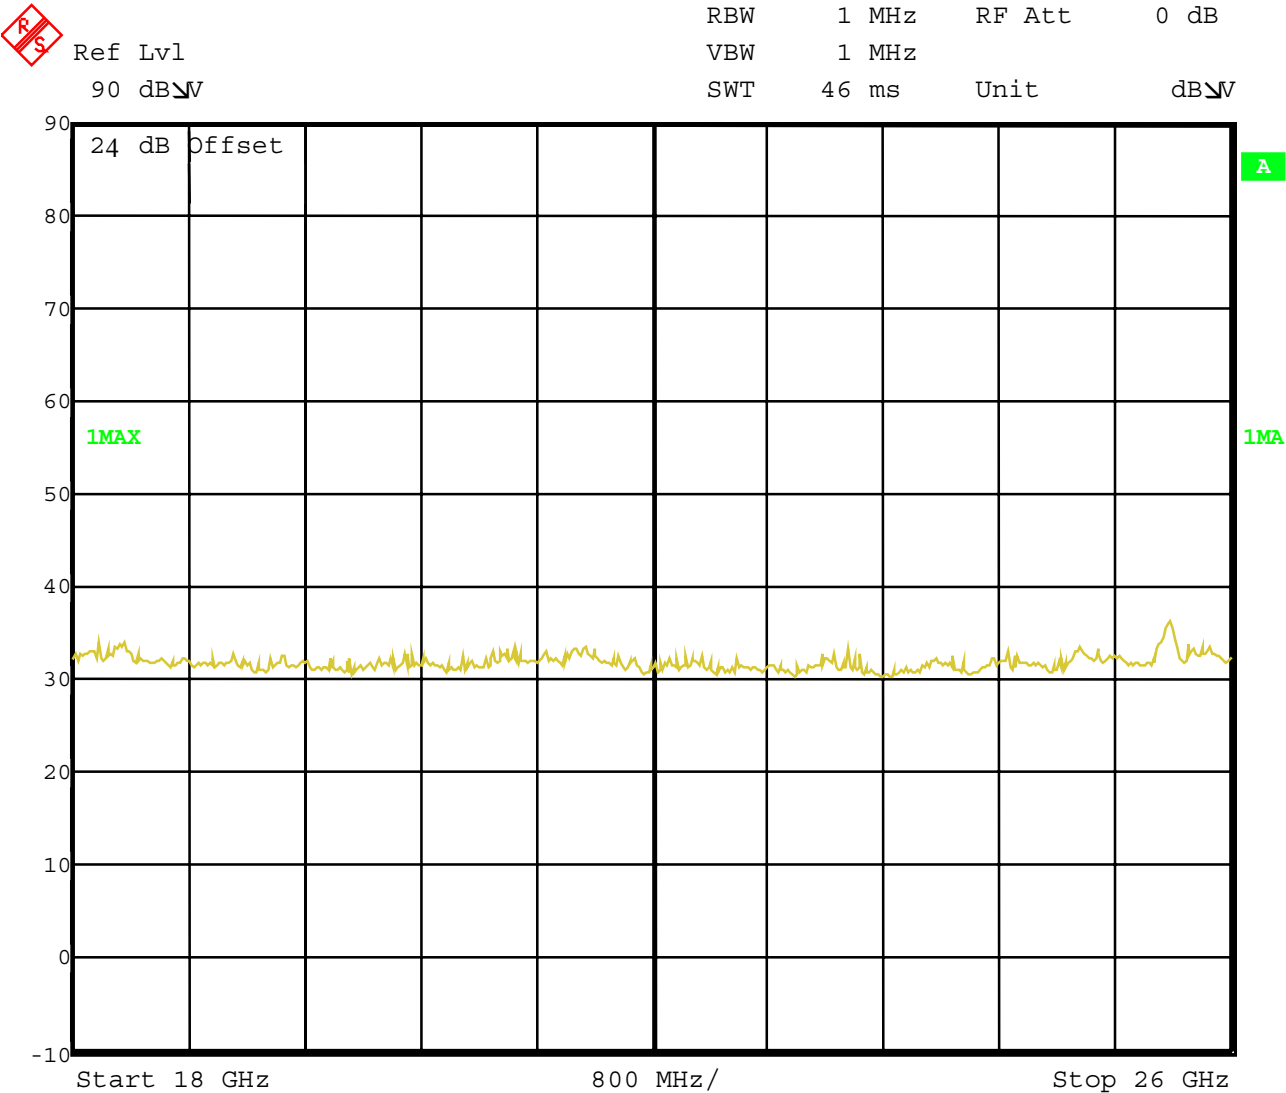

**LIMITS**      **SUBCLAUSE § 15.247 (c)**


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

EMISSION LIMITATIONS (Transmitter)      **CLAUSE § 15.247 (c) (1)**

(this is valid for all 3 channels)

18 – 26 GHz average

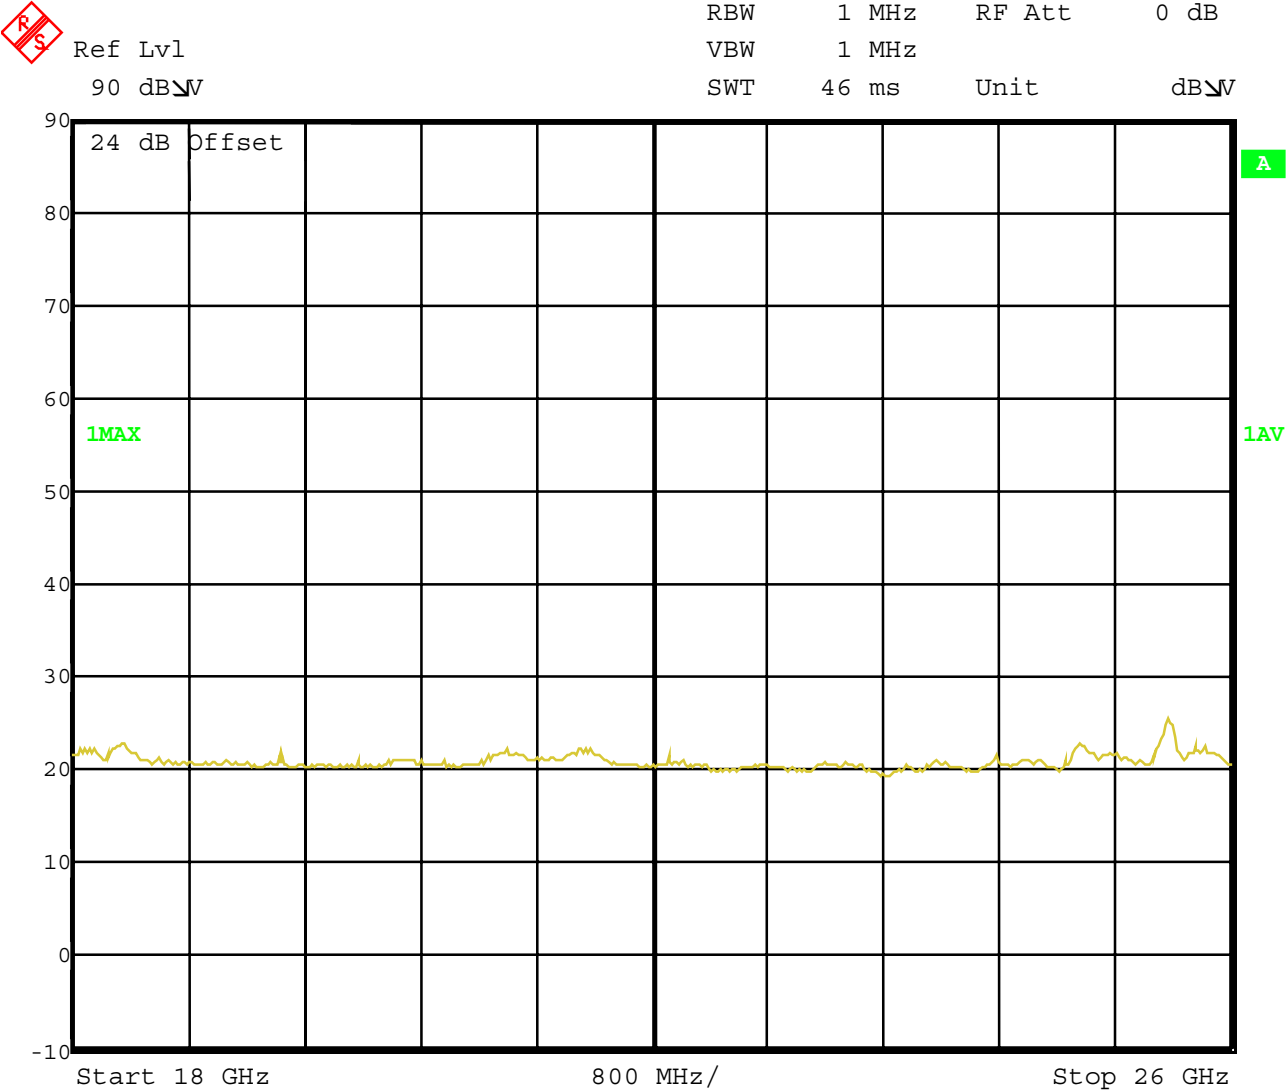

**LIMITS**      **SUBCLAUSE § 15.247 (c)**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## RECEIVER SPURIOUS RADIATION Radiated

§ 15.209

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (dBµV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
1100.6	AV	33.4						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table


Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

## RECEIVER SPURIOUS RADIATION

§ 15.209

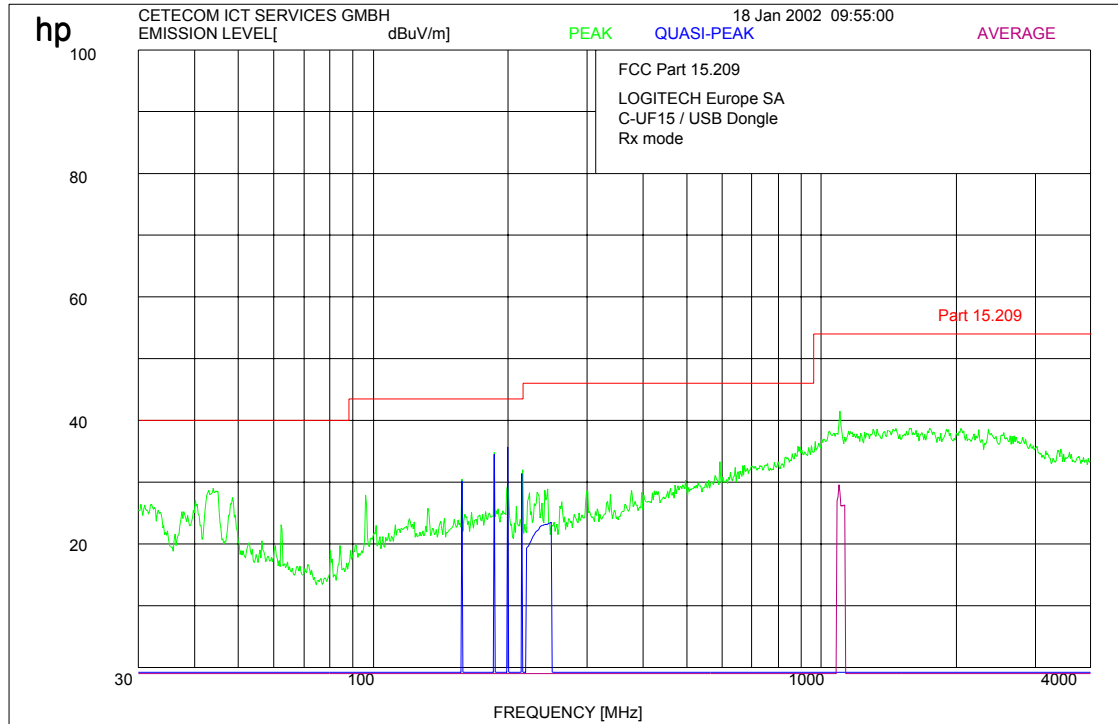

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

### Limits


SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

## RECEIVER SPURIOUS RADIATION

§ 15.209

The measurements were performed up to 26 GHz.  
There were no spurious found.

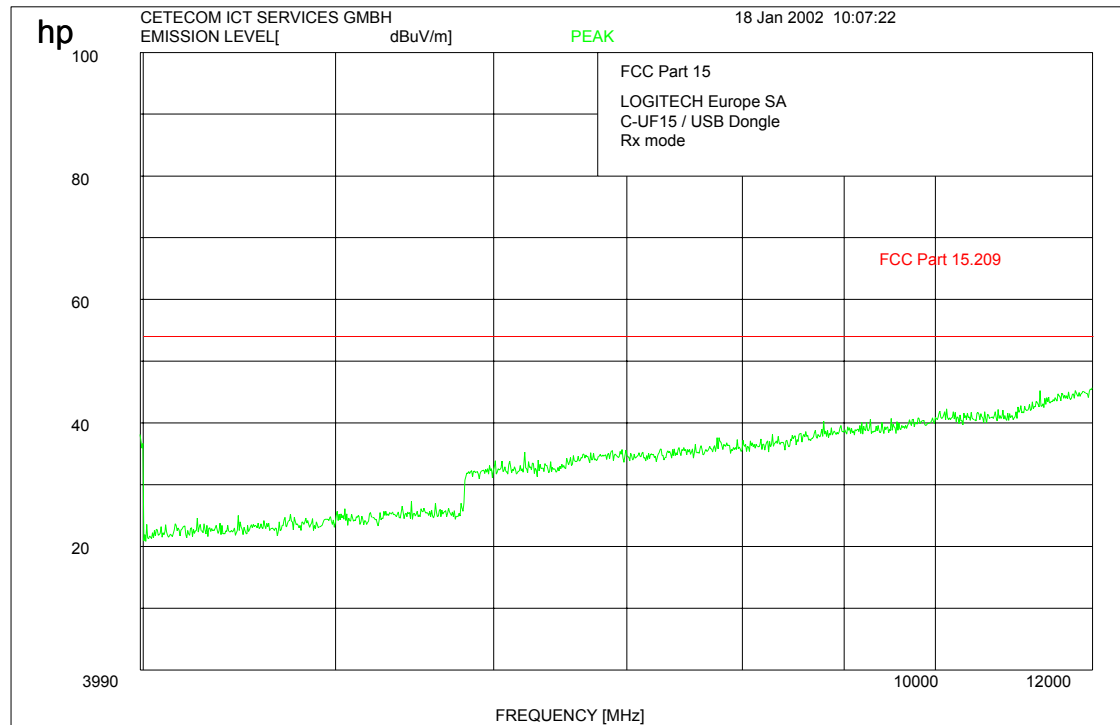

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW: 1 MHz

## Limits

SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010



# CETECOM ICT Services GmbH

Test report nr.: 2-2695-02-02/01

Issue Date: 05.03.02

Page 41 (49)

## TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	Standard gain horn	Model 643	NARDA	8112
55	Standard gain horn	Model 640	NARDA	8406
56	Standard gain horn	1824-20	FMI	286
57	AC 2 Phasen V- Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
58	AC-3 Phasen V- Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
59	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
60	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
61	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
62	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
63	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
64	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
65	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
66	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
67	Standard gain horn	Model 638	NARDA	1006

## Test site



## Testsite





## Photographs of the equipment

**Photo 1: C-UF15**



## Photographs of the equipment

Photo 2: C-UF15



## Photographs of the equipment


Photo 3: C-UF15






## Photographs of the equipment

**Photo 4: C-UF15**

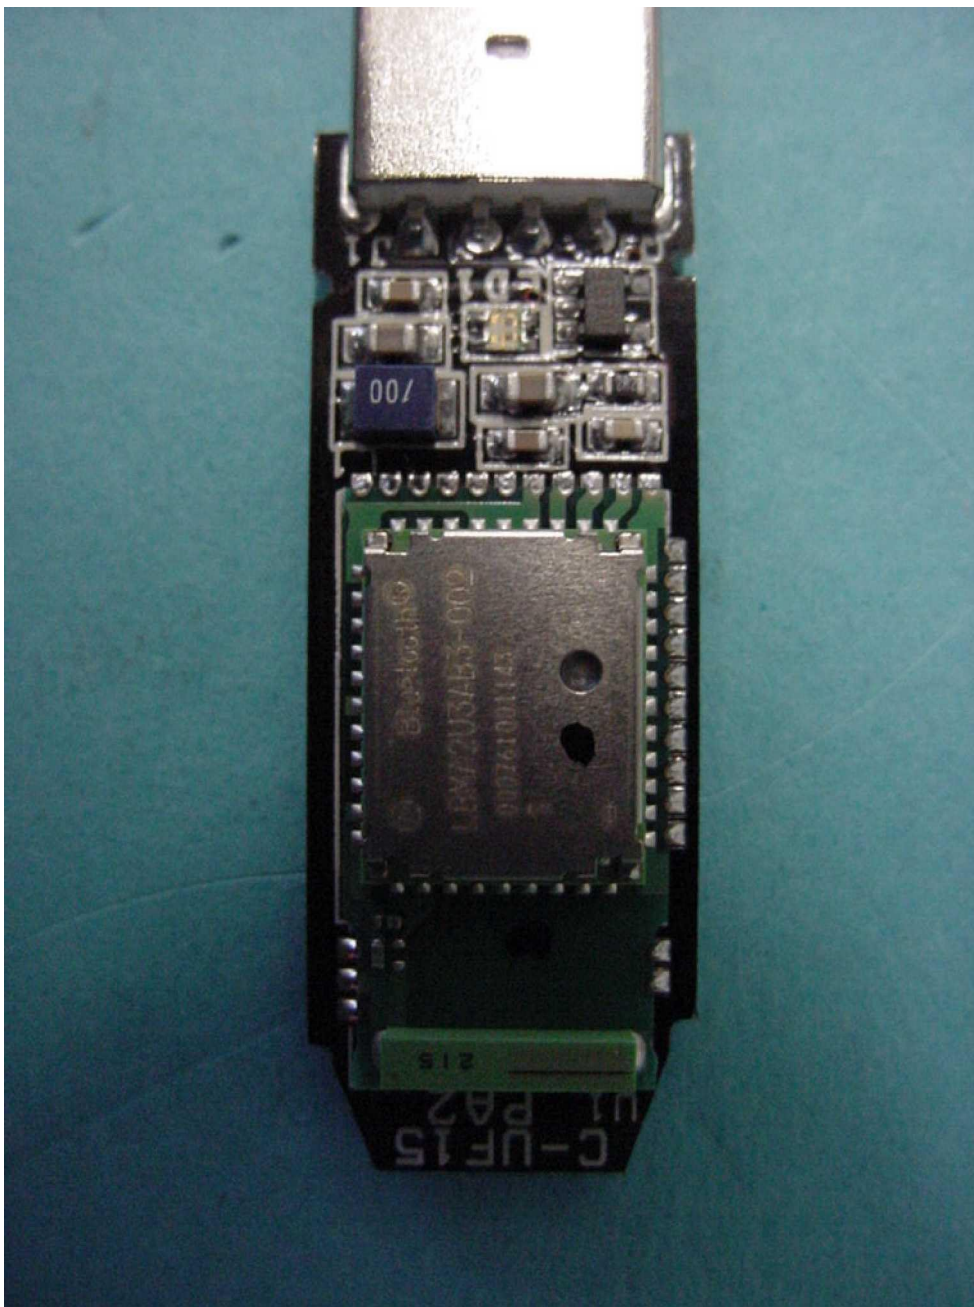

## Photographs of the equipment

Photo 5: C-UF15

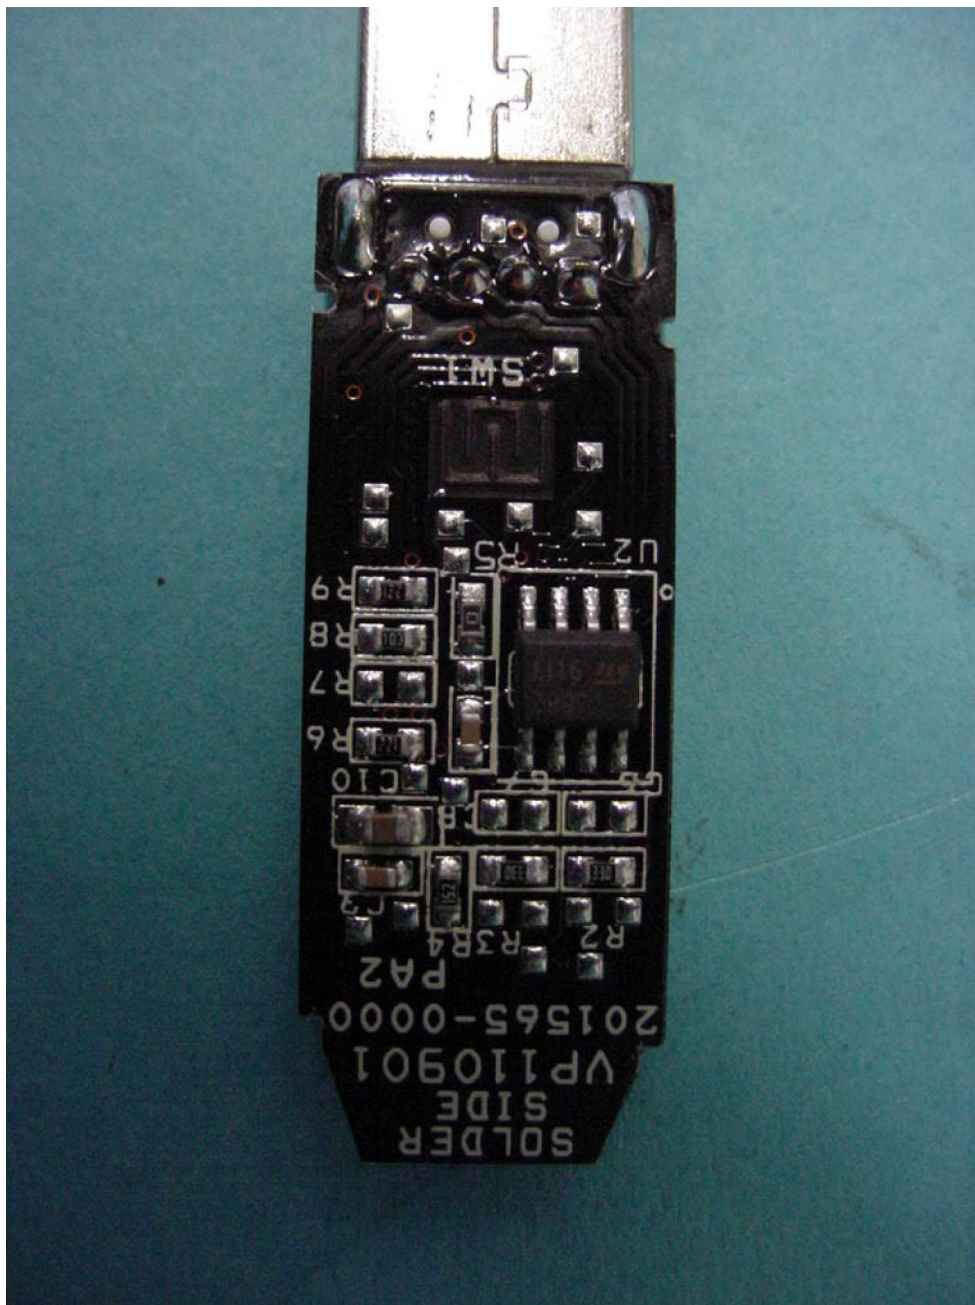



## Photographs of the equipment

**Photo 6: extension cord**

