

FCC Test Report

Report No.: AGC01110240541FR01

FCC ID	:	2AOKB-A3954R
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Headphone
BRAND NAME	:	soundcore
MODEL NAME	:	A3954R
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Jul. 01, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 01, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	
2.9 Equipment Modifications	
2.10 Antenna Requirement	
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
	04



9. Radiated Spurious Emission	
9.1 Measurement Limit	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Number of Hopping Frequency Measurement	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Time of Occupancy (Dwell Time) Measurement	
11.1 Provisions Applicable	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. Frequency Separation Measurement	
12.1 Provisions Applicable	73
12.2 Measurement Procedure	
12.3 Measurement Setup (Block Diagram of Configuration)	
12.4 Measurement Result	
13. AC Power Line Conducted Emission Test	
13.1 Measurement Limit	75
13.2 Measurement Setup (Block Diagram of Configuration)	75
13.3 Preliminary Procedure of Line Conducted Emission Test	
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Factory	N/A
Address	N/A
Product Designation	Wireless Headphone
Brand Name	soundcore
Test Model	A3954R
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jun. 06, 2024
Date of Test	Jun. 06, 2024 to Jul. 01, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Cool chen

Cool Cheng (Project Engineer)

Jul. 01, 2024

Reviewed By

in

Calvin Liu (Reviewer)

Jul. 01, 2024

Approved By

Max Zhang Authorized Officer

Jul. 01, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.3
Modulation Type	BR 🖾 GFSK, EDR 🖾 π /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	10.215dBm
Hardware Version	F
Software Version	V1.77
Antenna Designation	FPC Antenna
Antenna Gain	-2.57dBi
Power Supply	DC 3.85V by battery

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
2400~2483.5MHz	39	2441MHz
	:	:
	77	2479 MHz
	78	2480 MHz
Note: f = 2402 + 1k MHz, k =	0,, 78 ; "f "is the operating frequency	(MHz); "k" is the operating channel.



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AOKB-A3954R**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20) 76	02	19		 21	64	75
				·					 		
			Ιi						1		
			¦			1			i.		
				L		<u>'i</u>		1	 		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -2.57dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.85V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Used

Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31
\boxtimes	AGC-EM-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\bowtie	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	



 \boxtimes

AGC-EM-S011

RSE Test System

4.0.0.0

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Mode	el No.	Serial No.		t Cal. Date ⁄-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E045	EMI Test Receiver	R&S	ES	SPI	101206	20	24-05-28	2025-05-27
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-X>	<-6-5W	DC-6GZ	20	23-06-09	2025-06-08
	AGC-EM-E023	AMN	R&S	100	086	ESH2-Z5	20	24-05-28	2025-05-27
• Te	est Software								
Used	Equipment No.	Test Equipment	t Manufac	turer		Model No.		Versior	n Information
	AGC-EM-S001	CE Test System	t System R&S ES-K1 V1.71				V1.71		
\square	AGC-EM-S003	RE Test System	RE Test System FARA EZ-EMC V.RA-03A			RA-03A			
	AGC-EM-S004	RE Test System	n Tonsce	end	TS ⁺ Ver2.1(JS32-RE))	4.0.0.0	
	AGC-ER-S012	BT/WIFI Test Syst	em Tonsce	end	JS1120-2			2.6	

Tonscend

TS+-Ver2.1(JS36-RSE)



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box		USB-TTL		

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Wireless Headphone	Anker Innovations Limited	A3954R		0.255m unshielded



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



5. Description of Test Modes

	Summary	table of Test Cas	200			
	Guinnary					
Test Item		Data Rate / Modulation				
		ooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)				
Radiated & Conducted Test Cases	Mode 2: Blueto Mode 3: Blueto Mode 4: Blueto Mode 5: Blueto Mode 6: Blueto Mode 7: Blueto Mode 8: Blueto Mode 9: Blueto Mode 10: E Mode11: E	both Tx CH39_244 both Tx CH78_248 both Tx CH00_240 both Tx CH39_244 both Tx CH78_248 both Tx CH78_248 both Tx CH39_244 both Tx CH39_244 both Tx CH78_248 Bluetooth Tx Hopp Bluetooth Tx Hopp	02 MHz_1Mbps (Battery powered) 41 MHz_1Mbps (Battery powered) 80 MHz_1Mbps (Battery powered) 02 MHz_2Mbps (Battery powered) 41 MHz_2Mbps (Battery powered) 80 MHz_2Mbps (Battery powered) 02 MHz_3Mbps (Battery powered) 41 MHz_3Mbps (Battery powered) 80 MHz_3Mbps (Battery powered) bing-1Mbps (Battery powered) bing-2Mbps (Battery powered) bing-3Mbps (Battery powered)			
AC Conducted Emission		Not ap	pplicable			
4. For Conducted Test n WQ TWS RF TOOL (Version: 11.0.4.2) File Device Perion Port ID Address Name Address Tyj State Role COM2 Ox WQ Private IDLE UND	Authenticatic Encryption Version Found 11	PE Setting Diagram	- 0 X			
Traces Substed Local Device Traces Substed Form Device Traces (74000) ft August - 4000 (74000) ft Leight - 60001 (74000) ft Leight - 60001 (74000) ft Leight - 60001 (74000) ft Dirty-1 - 600000 (74000) ft Dirty-1 - 6000000 (74000) ft Dirty-1 - 60000000 (74000) ft Dirty-1 - 600000000 (74000) ft Dirty-1 - 600000000 (74000) ft Dirty-1 - 6000000000 (74000) ft Dirty-1 - 60000000000 (74000) ft Dirty-1 - 600000000000 (74000) ft Dirty-1 - 600000000000 (74000) ft Dirty-1 - 60000000000000000000000000000000000	TEST OR OFCOE)-	IT Address Tr Internal Tr Packet Humber Oz	0 * * 0 * * 77777777 Start TZ Text Stop 7Z Text			
<pre>[['MAMD] targht = 004 [['MAMD] targht = 004 [['MAMD] targht = 004 Packets = 005 ['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c [[MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c [[MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c [['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c ['MAMD] The Opcode = 00733 ['MAMD] Arr_Let_Let_Let_Col_c ['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c ['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Let_Col_c ['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Col_c ['MAMD] Common Opcode = 00733 ['MAMD] Arr_Let_Let_Let_Let_Let_Let_Let_Let_Let_Let</pre>	0004) BDYC138120200015381000552890000000fffffff444494489449944 00(Zaternal Volerup Tierenten): []	Platforn St Ox Add Peer Basic Settings Revet Syme			
Son filtering SMII ISO filtering Chip Sel CHIP. W07098	 Clear 		ett in norres etting etting sind			



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.


6.2 Measurement Procedure

⊠For Peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.3 Measurement Setup (Block Diagram of Configuration)

 \boxtimes For peak power test setup

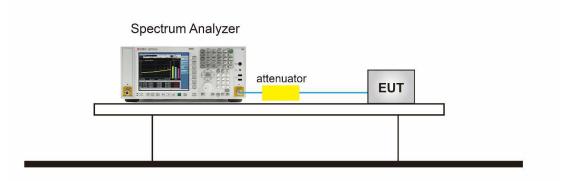




6.4 Measurement Result

Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	9.985	≤21	Pass		
GFSK	2441	9.780	≤21	Pass		
	2480	9.596	≤21	Pass		
	2402	10.175	≤21	Pass		
π /4-DQPSK	2441	10.215	≤21	Pass		
	2480	10.028	≤21	Pass		
	2402	9.822	≤21	Pass		
8DPSK	2441	9.646	≤21	Pass		
	2480	9.445	≤21	Pass		






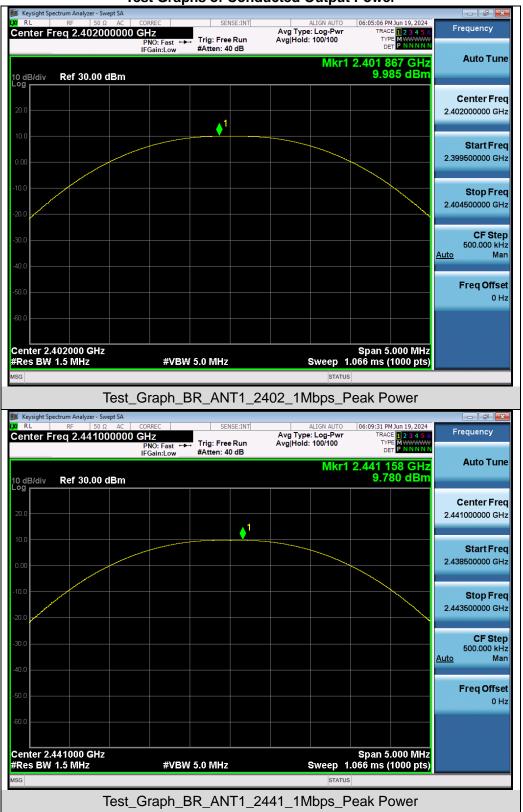


Test Graphs of Conducted Output Power




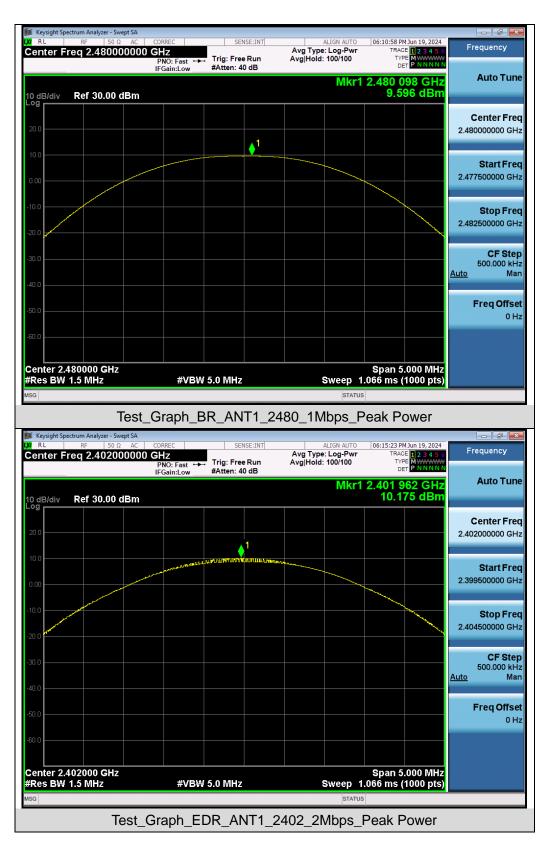



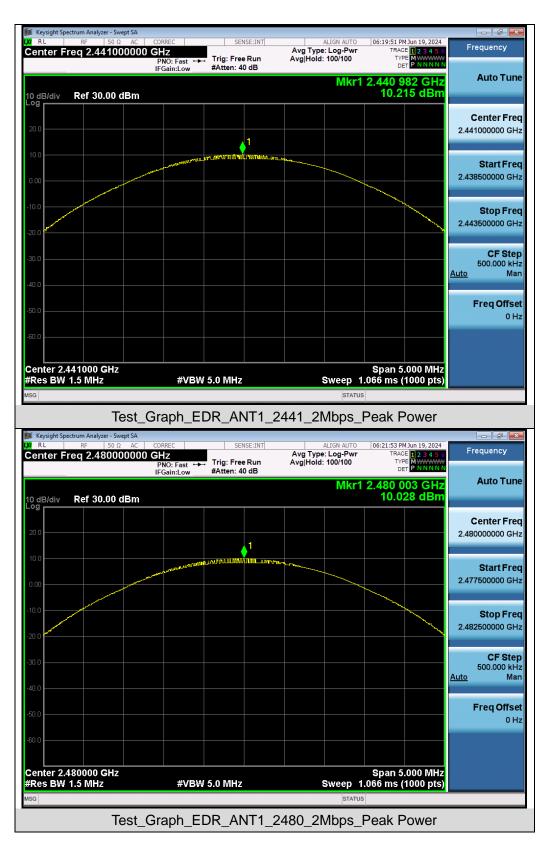



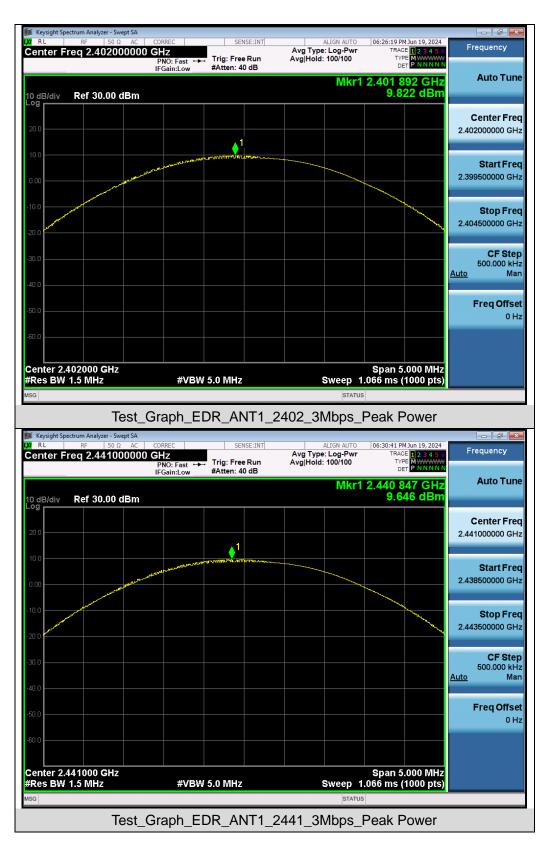







7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW ≥ 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

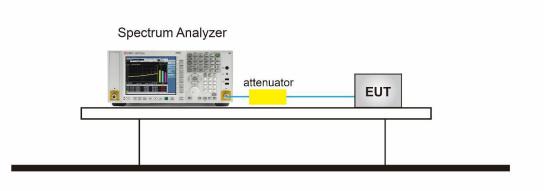




7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
	2402	0.886	0.998	N/A	Pass	
GFSK	2441	0.894	1.019	N/A	Pass	
	2480	0.894	1.013	N/A	Pass	
	2402	1.170	1.270	N/A	Pass	
π /4-DQPSK	2441	1.164	1.258	N/A	Pass	
	2480	1.157	1.268	N/A	Pass	
	2402	1.152	1.250	N/A	Pass	
8DPSK	2441	1.161	1.254	N/A	Pass	
	2480	1.151	1.236	N/A	Pass	




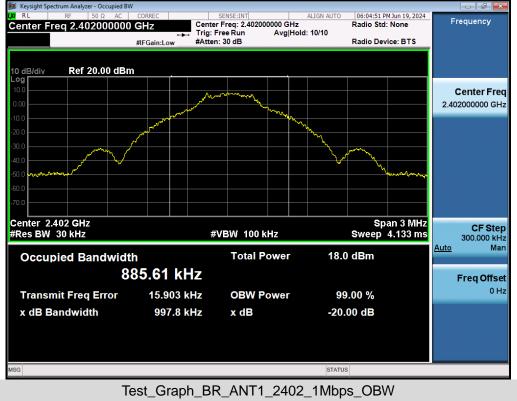







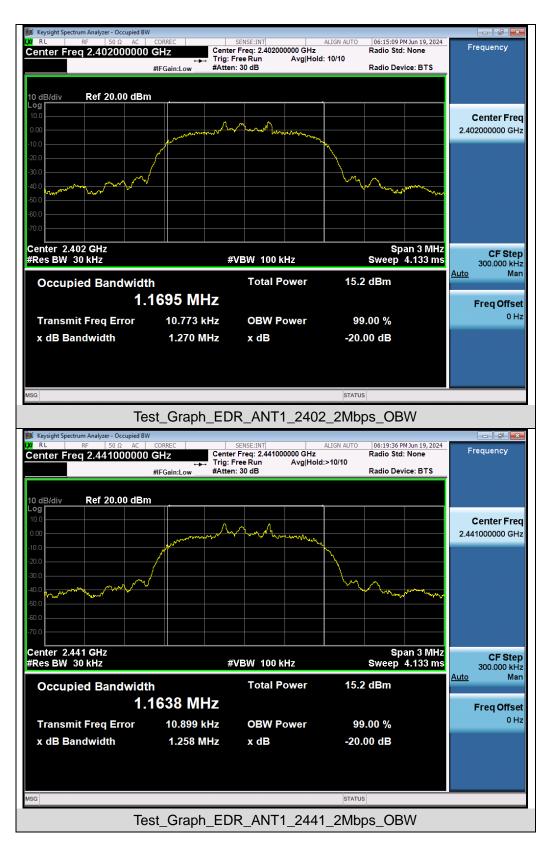











8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

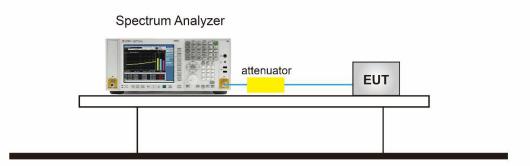




8.4 Measurement Results

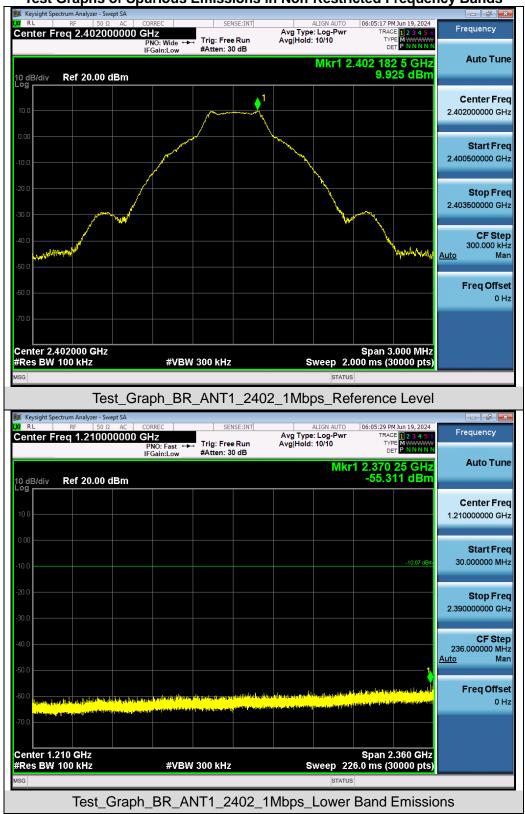


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




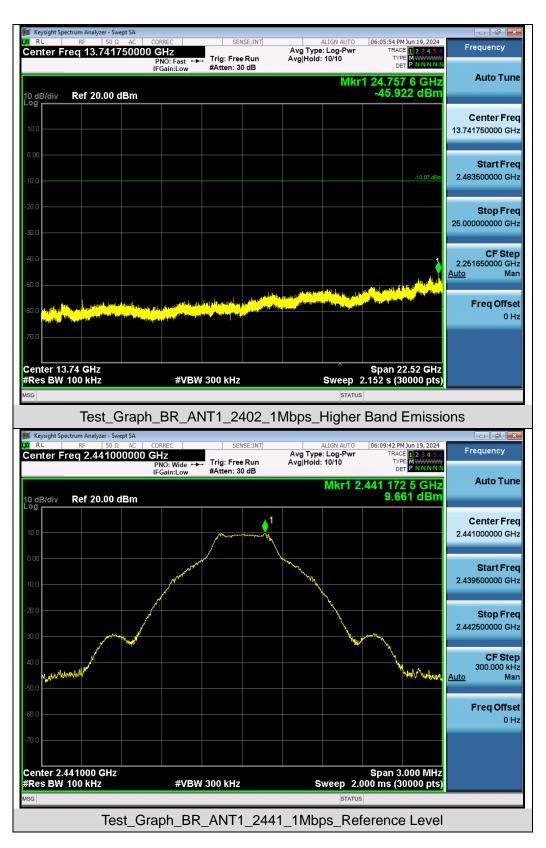




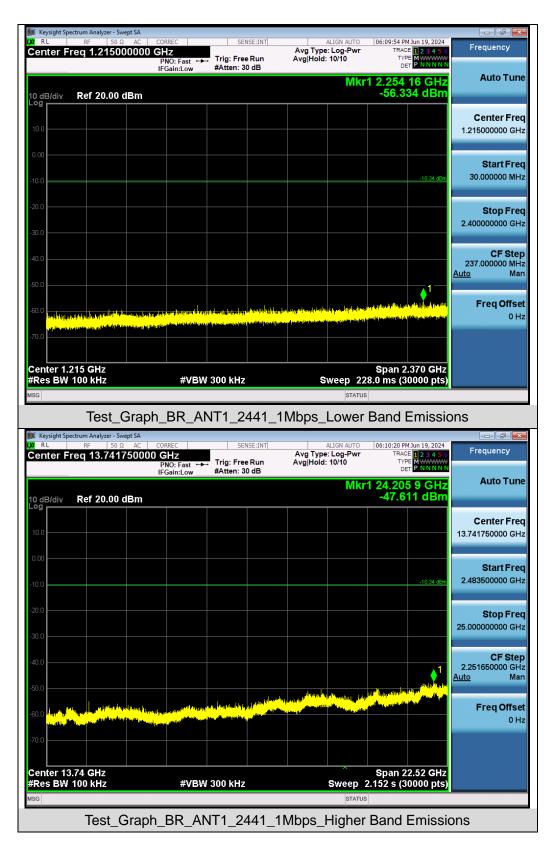




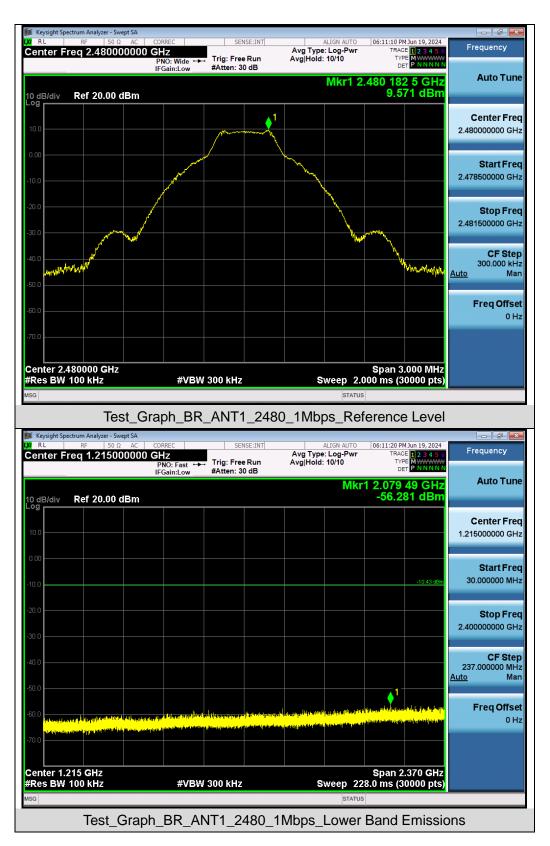




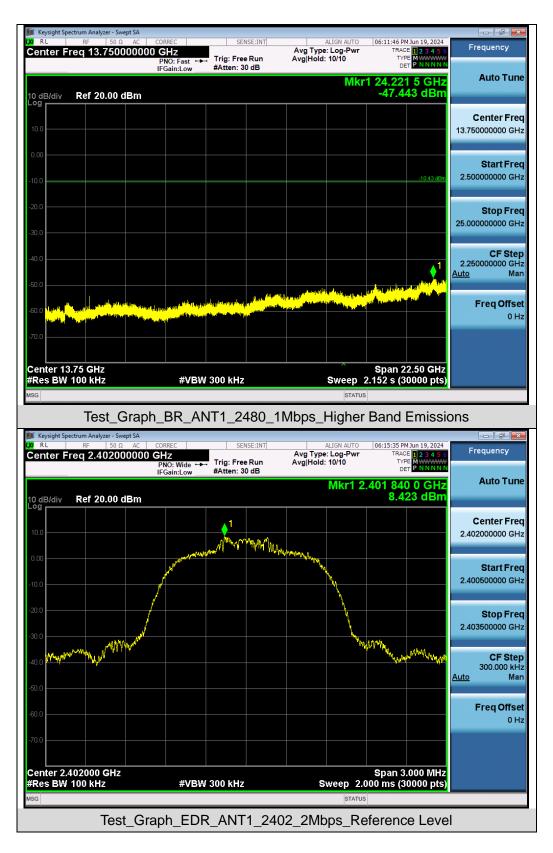




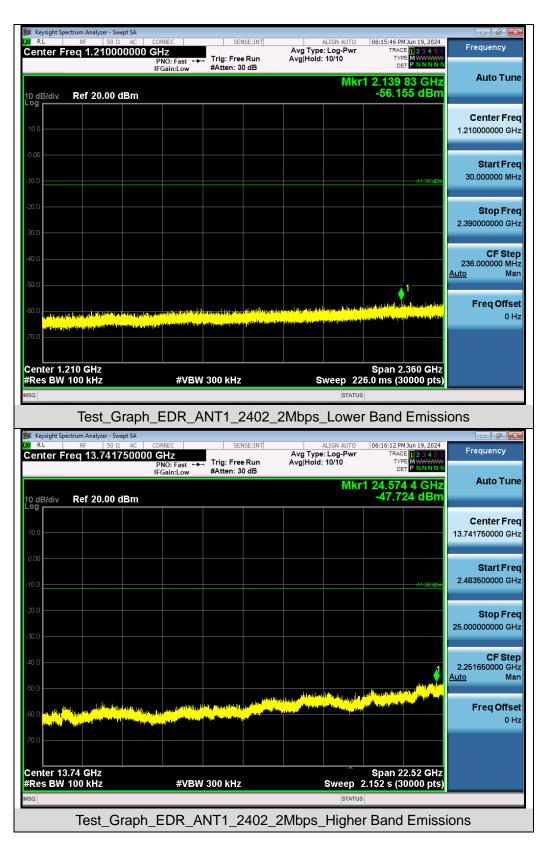




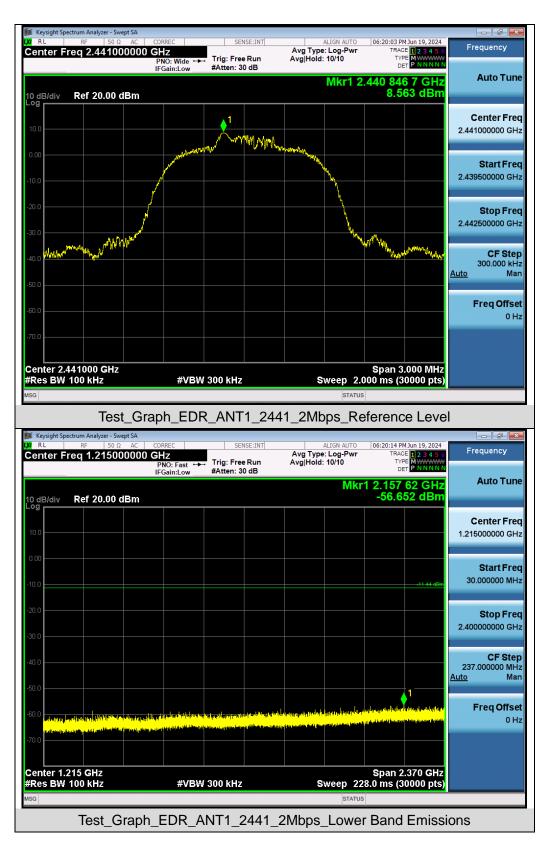




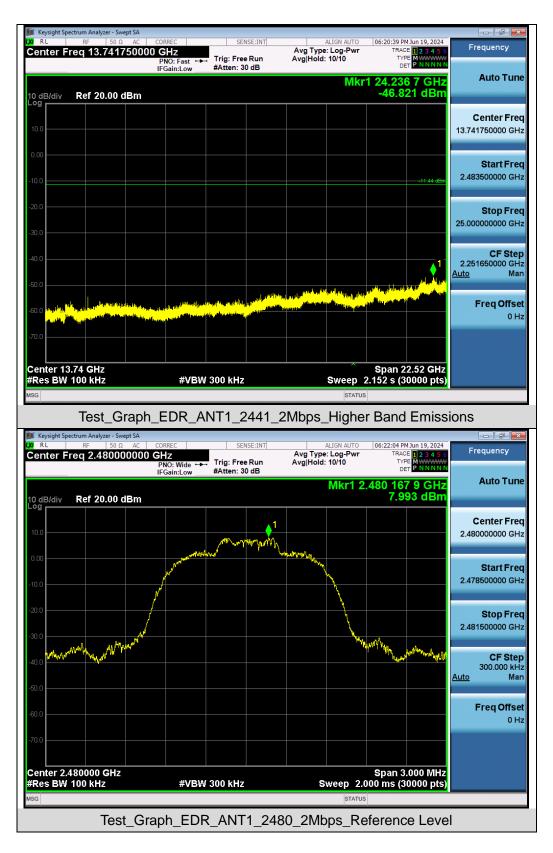




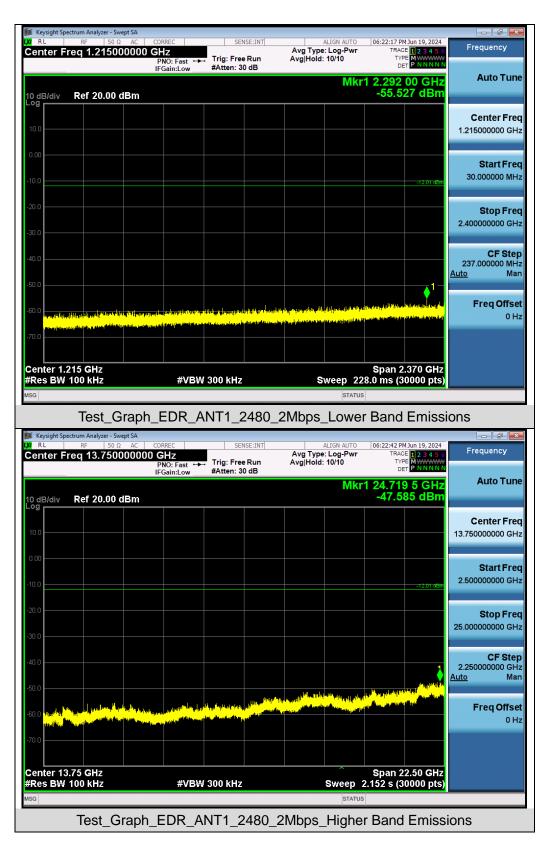




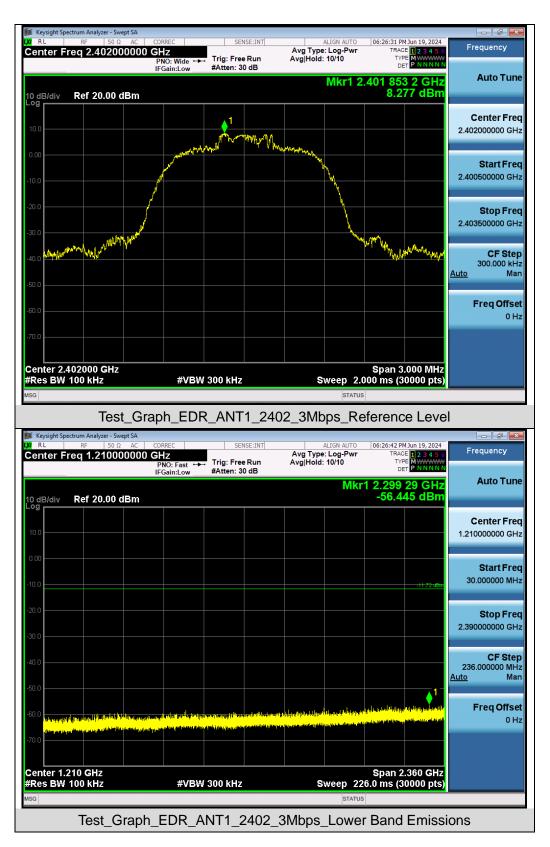




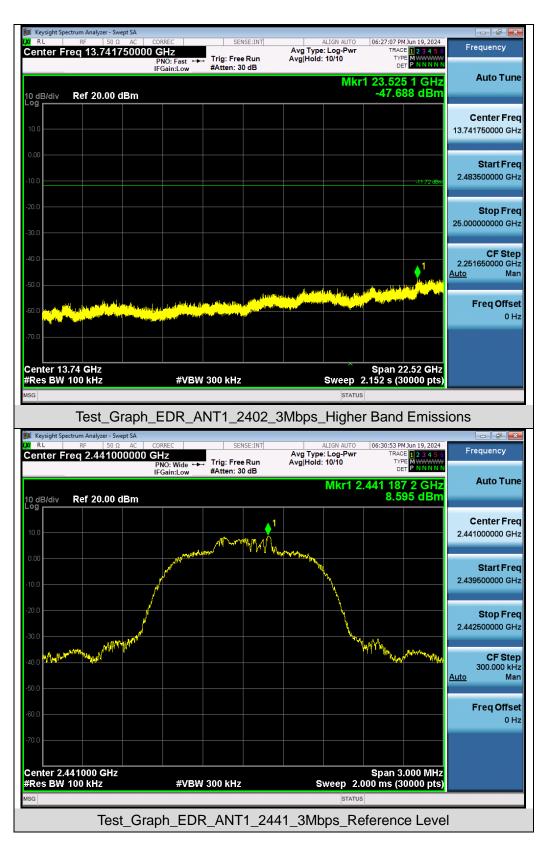




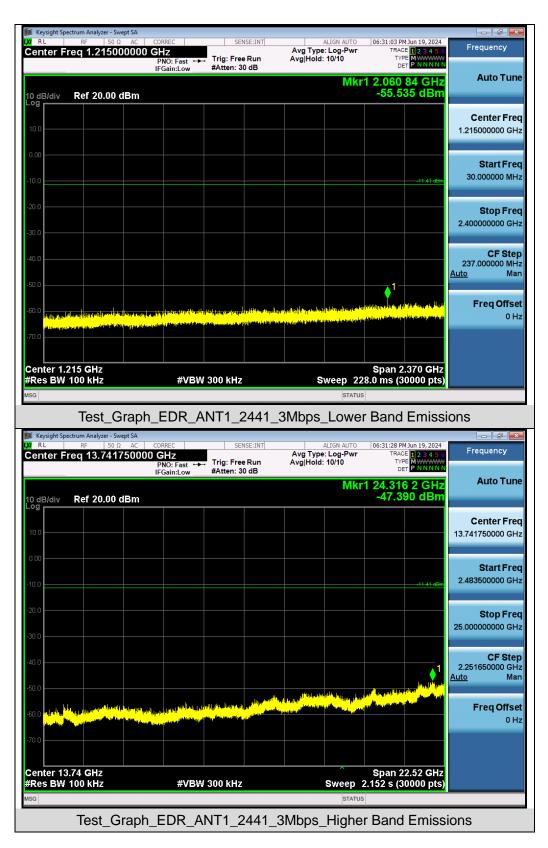




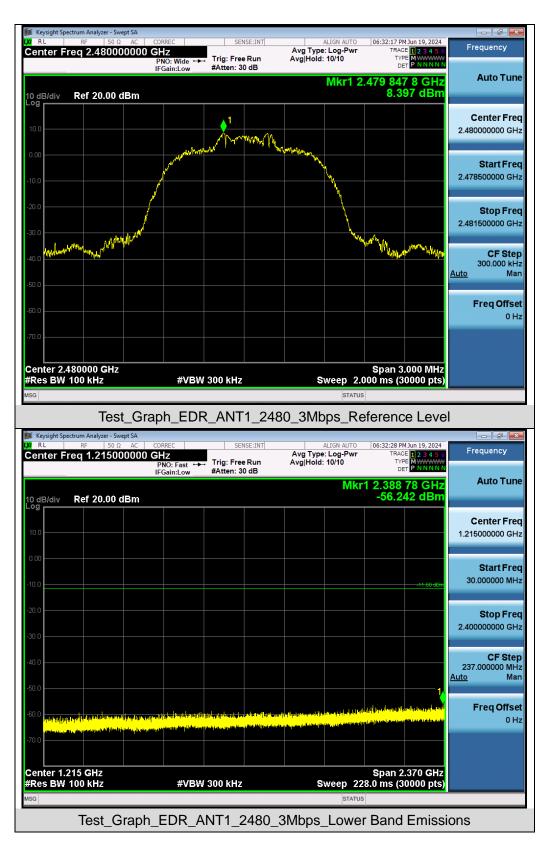



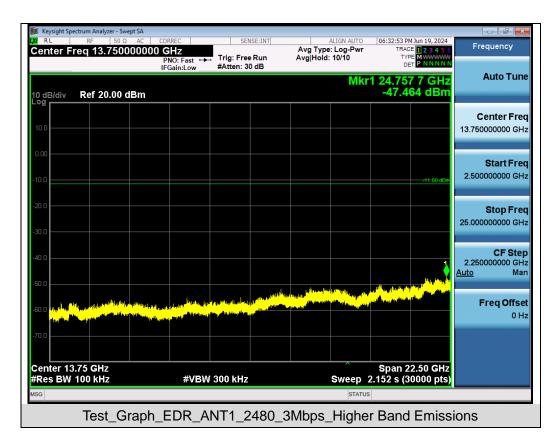



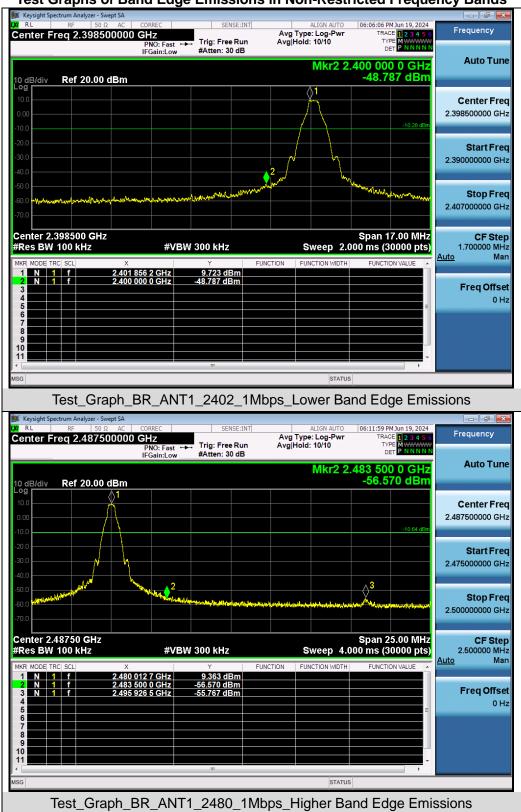

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands























9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)

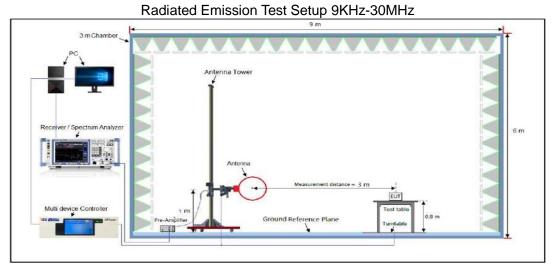

Radiated Emission Test Setup 30MHz-1000MHz

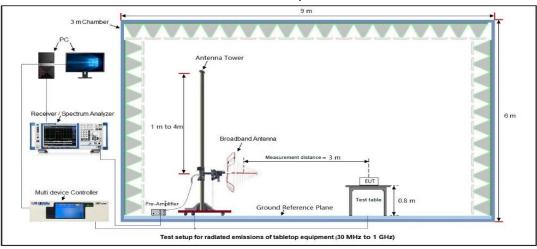

Radiated Emission Test Setup Above 1000MHz

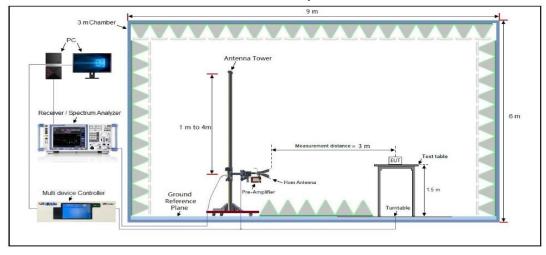

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/




9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Ra	adiate	ed Emi	ssion Test Re	esults a	t 30M	IHz-1GH	Ιz				
EUT Name	Wirele	ess H	lead	phone	Ð		M	odel I	Name		A	3954	R	
Temperature	22.3°C	C					R	elativ	e Humi	dity	59	9.8%		
Pressure	960hF	Pa					Те	est Vo	ltage		D	C 3.8	85V by I	batte
Test Mode	Mode	5					А	ntenn	a Polar	ity	Н	orizo	ntal	
72.0	dBuV/m													
Γ											Limi Marg			
_														
_													F	
-			-										5	
32										3 4	5		AN MART	
						2			and the second	MA		*//**		
_	1				methodat	2 Martin Martin Martin Martin Martin Martin Martin Martin	an marked	-hope by the lit	WHANK				+	
	. And the stand	MMMMMM/	Addition	, INFR. INC. AN INF										
- AVT	ded burners			ו איזעידאן א אי	h	"han salah kalah	ы. 							
, A)+	Anthe			A N MANNA I	n	"handelikaletti								
					n	"haugdikam								
-8					n									
		50	60	70 80		(MHz)		300	400	500	600 7	700	1000.000	
-8 30.0	000 40	50	60	70 80 Re	ading	(MHz) Correct	Meas	300 Ure-	400			700	1000.000	
-8 30.0		50		70 80 Re	D	(MHz)		300 Ure-			600 7	700	1000.000	
-8 30.0	000 40	50 Fr	60	70 80 Re	ading	(MHz) Correct	Meas	300 Ure- nt	400	0			1000.000	
-8 30.0	000 40 0. Mk.	50 Fr	60 Teq. Hz	70 80 Re L	eading evel	(MHz) Correct Factor	Meas	300 Ure- nt /m	400 Limit	n	Over	De		
-8 30.0 No	000 40 0. Mk.	50 Fr	60 eq. Hz 146	70 80 Re	eading evel dBuV	(MHz) Correct Factor dB	Meas mer dBuV/	300 ure- nt /m 55	400 Limit dBuV/r	(n -2	Over dB	De	tector	
-8 30.0 No	000 40 0. Mk. 2. 11	50 Fr MI 39.71	60 req. Hz 146 316	70 80 Re	eading evel dBuV 5.57	(MHz) Correct Factor dB 13.78 16.30	Meas mer dBuV/ 19.3 22.8	300 ure- nt /m 55 39	400 Limit dBuV/r 40.00	(n -2 -2	Over dB 20.65	De p	tector eak	
-8 30.0 No	000 40 0. Mk. 2 11 3 46	50 Fr MI 39.71 10.18 53.96	60 Hz 146 316 596	70 80 Re	eading evel dBuV 5.57 6.59 7.25	(MHz) Correct Factor dB 13.78 16.30 23.88	Meas mer dBuV/ 19.3 22.8 31.1	300 ure- nt (m (5 (5) (3) (3)	400 Limit dBuV/r 40.00 43.50 46.00	(n -2 -2 -1	Over dB 20.65 20.61 4.87	De p p	tector eak eak eak	
-8 30.0 No 1 2 3 4	000 40 0. Mk. 2 11 3 46 54	50 Fr Mi 39.71 10.18 53.96 45.18	60 eq. Hz 146 316 326	70 80 Re	eading evel dBuV 5.57 6.59 7.25 7.28	(MHz) Correct Factor dB 13.78 16.30 23.88 23.98	Meas mer dBuV/ 19.3 22.8 31.1 31.2	300 ure- nt 35 39 3 26	400 Limit dBuV/r 40.00 43.50 46.00 46.00	(n -2 -2 -1 -1	Over dB 20.65 20.61 4.87 4.74	De p p	tector eak eak eak	
-8 30.0 No 1 2 3	000 40 0. Mk. 3 2 11 3 46 5 61	50 Fr MI 39.71 10.18 53.96	60 eq. Hz 146 316 326 718	70 80 Re	eading evel dBuV 5.57 6.59 7.25	(MHz) Correct Factor dB 13.78 16.30 23.88	Meas mer dBuV/ 19.3 22.8 31.1	300 ure- nt 35 39 3 26 88	400 Limit dBuV/r 40.00 43.50 46.00	(n -2 -2 -1 -1 -1 -1	Over dB 20.65 20.61 4.87	De p p p	tector eak eak eak	





			Ra	adiate	ed Em	ission	n Test Ro	esult	s at 30)MHz-′	GH	z				
EUT Name	Wire	eless ⊦	lead	phone	е				Mode	el Nam	е		A	3954	R	
Temperature	22.3	۳C							Relat	ive Hu	ımid	ity	5	9.8%	1	
Pressure	960ł	nPa							Test V	Voltag	е		D	C 3.8	35V by	batte
Test Mode	Mod	e 5							Anter	nna Po	olari	ty	V	ertica	al	
72.0	dBu¥∕m															
													Lim Mar	it: rgin:		
								_								
															Г	
													_			
					_			╤┛								
32											4	5 Mm/M	M	ut the work	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
		1		2			3			was water	and a strength and	unp	www.w			
	, which w	and the star	where the second s	m the work when	Munday N	Welly Marthaghny	Andra Nopadky	man when	your bury and	ben Men						
Y**																
-8																
30.00	10 40	50	60	70 8	0		(MHz)		3	00 ·	400	500	600	700	1000.000	I
				Re	eadin	g C	orrect	Me	easure	-						
No.	Mk.	Fr	req.		evel		actor	n	nent	Li	mit	(Over			
		М	Hz		dBuV		dB	dE	3uV/m	dB	uV/m		dB	De	etector	
1		48.6	719		7.14	1	6.99	2	4.13	40.	00	-1	15.87	/ p	beak	
2		60.9	450		8.11	1	7.00	2	5.11	40.	00	_^	14.89) p	oeak	
		09.0									50	-	18.47	/ r	ook	
3	1	145.3			6.83	1	8.20	2	5.03	43.	50	-	10.47		Jeak	
		145.3	506				8.20 25.39								beak beak	
4	4	145.3 135.58	506 898		6.43	2	25.39	3	1.82	46.	00	-1	14.18	3 p	beak	
4	4	145.3	506 898 826			2		3 3		46. 46.	00	-1 -1		3 p		

RESULT: Pass Note:

1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been tested. The mode 5 is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



UT Na	ne	Wireless He	adphone		Model Name	•	A3954R	
empera	ature	23.2 ℃			Relative Hur	nidity	60.2%	
ressur	e	960hPa Test Voltage		!	DC 3.85V by battery			
est Mo	de	Mode 4	Mode 4 Antenna Polarity Horizontal					
_	130			FCC Part 1	5C			
	120							
	110							
	90							
-	80							
a with	70 60							
avalid R. M/ml	50				2 44			6
-	40	المراجع	المليعة ومعالية والمسالية والمسالية والمسالية والمسالية والمسالية والمسالية والمسالية والمسالية والمسالية والمس	www	WWW.WWWWWWWWWWWWWWWWW	www.contenterior		
	20							
	10							
	0							
	-10 1G	2G	36	4G	6G	8G		 18G
	PK Limit		Horizontal PK	Frequency[[Hz]			
		ector						
PK D	ata List	ector						
PK D	ata List Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
	Freq.	Level						Polarity Horizontal
NO.	Freq. [MHz]	Level [dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	
NO. 1	Freq. [MHz] 1487.9488	Level [dBµV/m] 34.87	[dB] -17.56	[dBµV/m] 74.00	[dB] 39.13	[cm] 150	[°] 54	Horizontal
NO.	Freq. [MHz] 1487.9488 3273.1273	Level [dBµV/m] 34.87 39.15	[dB] -17.56 -11.24	[dBµV/m] 74.00 74.00	[dB] 39.13 34.85	[cm] 150 150	[°] 54 359	Horizontal Horizontal
NO. 1 2 3	Freq. [MHz] 1487.9488 3273.1273 4803.2803	Level [dBµV/m] 34.87 39.15 44.38	[dB] -17.56 -11.24 -7.81	[dBµV/m] 74.00 74.00 74.00	[dB] 39.13 34.85 29.62	[cm] 150 150 150	[°] 54 359 283	Horizontal Horizontal Horizontal

Radiated Emissions Test Results Above 1GHz



UT Na	me	Wireless Hea	adphone		Model Name	÷	A3954R		
empera	ature	23.2℃			Relative Hu	midity	60.2%		
ressur	е	960hPa			Test Voltage)	DC 3.85V	by battery	
est Mo	de	Mode 4			Antenna Po	larity	Vertical		
[] () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = () = ()	130 120 110 100 90 80 70 60 50 40 30 20 10 0 -10 16		36		**************************************	86		18G	
	PK Limit	- AV Limit	 Vertical PK 						
PKD	PK Limit AV Dete		- Vertical PK						
PK D	# AV Dete		Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
	* AV Dete Data List Freq.	Level	Factor					Polarity Vertical	
NO.	* AV Dete Pata List Freq. [MHz]	Level [dBµV/m]	Factor [dB]	[dBµV/m]	[dB]	[cm]	[°]		
NO. 1	* AV Dete pata List Freq. [MHz] 1020.402	Level [dBµV/m] 33.91	Factor [dB] -18.31	[dBµV/m] 74.00	[dB] 40.09	[cm] 150	[°] 134	Vertical	
NO. 1 2	* AV Dete Pata List Freq. [MHz] 1020.402 1960.5961	Level [dBµV/m] 33.91 39.03	Factor [dB] -18.31 -13.74	[dBµV/m] 74.00 74.00	[dB] 40.09 34.97	[cm] 150 150	[°] 134 77	Vertical Vertical	
NO. 1 2 3	* AV Dete Pata List Freq. [MHz] 1020.402 1960.5961 4803.2803	Level [dBµV/m] 33.91 39.03 44.96	Factor [dB] -18.31 -13.74 -7.81	[dBµV/m] 74.00 74.00 74.00	[dB] 40.09 34.97 29.04	[cm] 150 150 150	[°] 134 77 2	Vertical Vertical Vertical	

RESULT: Pass



EUT Na	me	Wireless Hea	adnhone		Model Nan	no	A3954R		
Temper	rature	23.2 ℃			Relative H	umidity	60.2%		
Pressu	re	960hPa			Test Voltag	ge	DC 3.85V	by battery	
Test Mo	ode	Mode 5			Antenna P	olarity	Horizonta	I	
	130			FCC Part	15C				
1	120								
	110								
	100 90								
	80								
	<u>ل</u> 70								
	70 60 50						** 5		
	a 50 40		2		WWWW The WWWWWWW	ay and a second			
	30 undelander have	معجوم يستحصرها يحله غور يكته المعربية والد يعسينا والد يعمد المراحد المعر المسالين	and the second description of the second	Mitter Contraction of Milling to the	at wary war a new constraints				
	20								
	10								
	-10 1G	2G	30	6 4G	6G	8G			
	16	20	30	Frequency		86		186	
	PK Limit AV Dete		Horizontal PK						
PK	Data List								
	Freq.	Level	Factor	Limit	Margin	Height	Angle		
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]		[cm]		Polarity	
1	1333.2333	36.72	-17.81	74.00	37.28	150	195	Horizontal	
2	2062.6063	39.53	-17.81	74.00	34.47	150	2	Horizontal	
3	4881.4881	42.45	-13.20	74.00	31.55	150	281	Horizontal	
4	4881.4881 6984.5985	42.45	-7.80	74.00	27.86	150	17	Horizontal	
5	10947.6948	50.27	2.49	74.00	23.73	150	120	Horizontal	
6	16512.3512	49.73	5.63	74.00	24.27	150	252	Horizontal	

Radiated Emissions Test Results for Above 1GHz



UT Na	me	Wireless Hea	adphone		Model Name		A3954R	
empera	ature	23.2℃			Relative Hun	nidity	60.2%	
ressur	e	960hPa Test Voltage					DC 3.85V	by battery
est Mo	de	Mode 5			Antenna Pola	arity	Vertical	
len/M (de)	40 30 20 10 0		3G	FCC Part 1		4 4 8 6		186
	-10 1G — PK Limit		- Vertical PK	Frequency[
PK D	1G	AV Limit	- Vertical PK	Frequency				
PK D	1G PK Limit AV Dete	AV Limit	- Vertical PK Factor [dB]	Frequency Limit [dBµV/m]		Height [cm]	Angle [°]	Polarity
	1G PK Limit AV Dete Pata List Freq.	AV Limit -	Factor	Limit	Margin			Polarity Vertical
NO.	1G PK Limit AV Dete Pata List Freq. [MHz]	AV Limit Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	[cm]	[°]	-
NO. 1	1G PKLimit * AV Dete Pata List Freq. [MHz] 1227.8228	AV Limit	Factor [dB] -17.98	Limit [dBµV/m] 74.00	Margin [dB] 38.75	[cm] 150	[°] 244	Vertical
NO. 1 2	16 PKLimit * AV Dete Pata List Freq. [MHz] 1227.8228 2011.6012	AV Limit Level [dBµV/m] 35.25 38.65	Factor [dB] -17.98 -13.38	Limit [dBµV/m] 74.00 74.00	Margin [dB] 38.75 35.35	[cm] 150 150	[°] 244 118	Vertical Vertical
NO.	16 PK Limit * AV Dete Pata List Freq. [MHz] 1227.8228 2011.6012 4881.4881	- AV Limit - Level [dBμV/m] 35.25 38.65 41.90	Factor [dB] -17.98 -13.38 -7.80	Limit [dBµV/m] 74.00 74.00 74.00	Hz] Margin [dB] 38.75 35.35 32.10	[cm] 150 150 150	[°] 244 118 360	Vertical Vertical Vertical

RESULT: Pass



JT Na	me	Wireless Hea	adphone		Model Name		A3954R	
mpera	ature	23.2℃			Relative Hum	nidity	60.2%	
essur	e	960hPa			Test Voltage		DC 3.85V I	by battery
st Mo	de	Mode 6			Antenna Pola	arity	Horizontal	
	130			FCC Part	15C			
	120							
	110							
	100 90							
	80							
	70							
	B 60						* ⁰	6
-	40	• ¹	Annalis, and a salar	and a the second and the second and the second s	6+1.44=144/11/14/11/14/14/14/14/14/14/14/14/14/	NA CALIFY AND	WAR IN THE REPORT OF LEVEL	A CONTRACTOR OF
	30	and the second landed and so all and the second	an a	Adalana an de finis di bilinana da	an china a			
	20							
	0							
	-10 1G	2G	30	G 4G	6G	8G		
				Frequency				
	PK Lim AV De		 Horizontal PK 					
PK D	ata List	-		-	-			
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1589.959	36.07	-16.80	74.00	37.93	150	161	Horizontal
2	3330.9331	38.94	-11.09	74.00	35.06	150	80	Horizontal
3	6430.343	45.70	-4.62	74.00	28.30	150	344	Horizontal
-	8538.5539	45.24	-2.87	74.00	28.76	150	86	Horizontal
4		1	0.40	74.00	23.44	150	281	Horizontal
	10944.2944	50.56	2.48	74.00	23.44	100	201	rionzontai

Radiated Emissions Test Results for Above 1GHz



JT Nar	ne	Wireless Hea	adphone	1	Model Name		A3954R		
mpera	ature	23.2 ℃		1	Relative Hum	idity	60.2%		
essur	e	960hPa			Test Voltage		DC 3.85V b	y battery	
st Mo	Mode 6				Antenna Pola	rity	Vertical		
Tm/V, rbhild	130 120 110 100 90 80 70 60 50 40 30 20 10	ير و مر و رو و رو و رو و رو و رو و رو و	time for the second	FCC Part 1	5C	**************************************	5 111111111111111111111111111111111111		
	-10 -10 1G PK Limit * AV Detr		- Vertical PK	3 4G Frequency	6G (Hz]	8G		18G	
PK D	-10 1G —— PK Limit	- AV Limit -				86		18G	
PK D NO.	-10 1G — PK Limit * AV Dete	- AV Limit -				BG Height [cm]	Angle [°]	18G Polarity	
	-10 1G PK Limit * AV Detr ata List Freq.	AV Limit -	- Vertical PK Factor	Frequency	Margin	Height			
NO.	-10 1G PK Limit * AV Dete ata List Freq. [MHz]	ector — AV Limit — Level [dBμV/m]	- Vertical PK Factor [dB]	Frequency Limit [dBµV/m]	Margin [dB]	Height [cm]	[°]	Polarity	
NO. 1	ata List Freq. [MHz] 1219.3219	Level [dBµV/m] 34.63	- Vertical PK Factor [dB] -17.99	Erequency Limit [dBµV/m] 74.00	Hz] Margin [dB] 39.37	Height [cm] 150	[°] 169	Polarity Vertical	
NO. 1 2	-10 -10 -10 -10 -10 -10 -10 -10		- Vertical PK Factor [dB] -17.99 -13.22	Frequency Limit [dBµV/m] 74.00 74.00	Margin [dB] 39.37 35.00	Height [cm] 150 150	[°] 169 38	Polarity Vertical Vertical	
NO. 1 2 3	-10 -10 -16 	AV Limit	- Vertical PK Factor [dB] -17.99 -13.22 -10.68	Frequency Limit [dBµV/m] 74.00 74.00 74.00	Hz] Margin [dB] 39.37 35.00 35.06	Height [cm] 150 150 150	[°] 169 38 356	Polarity Vertical Vertical Vertical	

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 18G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin =Limit- Level.
- 3. The "Factor" value can be calculated automatically by software of measurement system.
- 4. All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.




EUT Name	Wireless Headphone	Model Name	A3954R
Temperature	25.7℃	Relative Humidity	59.0%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

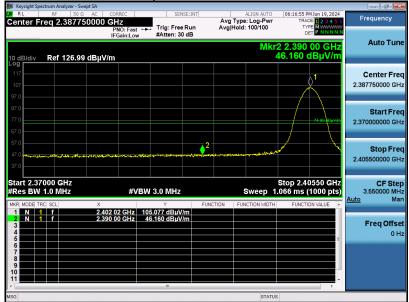

Test Graph for Average Measurement

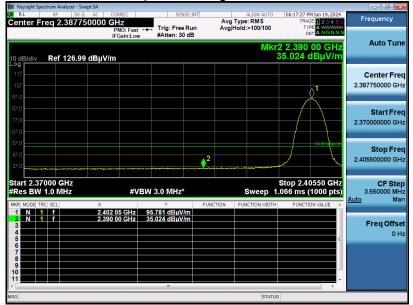


RESULT: Pass




Band Edge Emission Test R	esults for Restricted Bands
---------------------------	-----------------------------

EUT Name	Wireless Headphone	Model Name	A3954R
Temperature	25.7 ℃	Relative Humidity	59.0%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

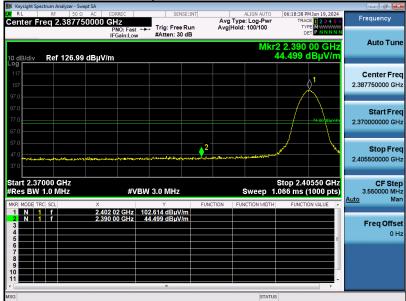

Test Graph for Average Measurement

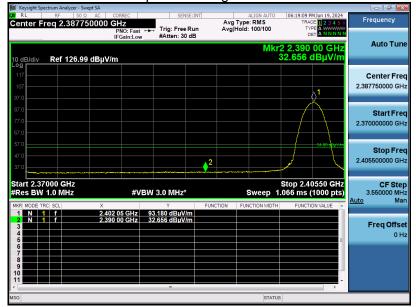


RESULT: Pass




Band Edge Emission Test R	esults for Restricted Bands
---------------------------	-----------------------------

EUT Name	Wireless Headphone	Model Name	A3954R
Temperature	25.7 ℃	Relative Humidity	59.0%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

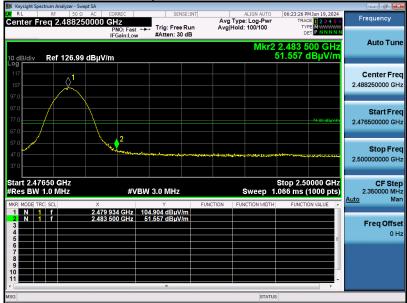

Test Graph for Average Measurement

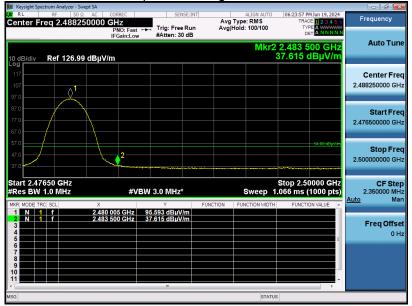


RESULT: Pass




EUT Name	Wireless Headphone	Model Name	A3954R
Temperature	25.7 ℃	Relative Humidity	59.0%
Pressure	960hPa	Test Voltage	DC 3.85V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

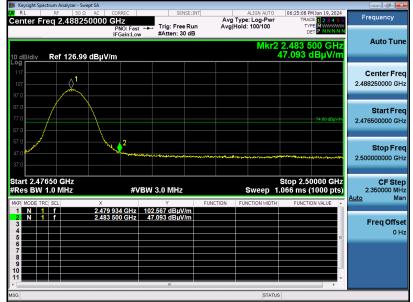

Test Graph for Average Measurement

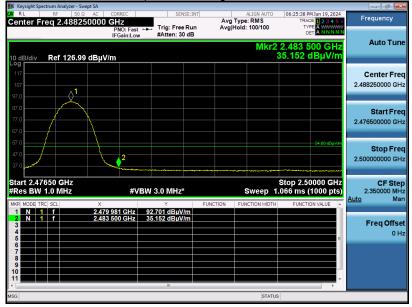

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer. All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the

report.



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

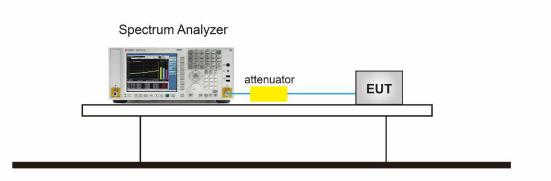

10.4 Measurement Result

Test Data of Number of Hopping Frequency			
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail
π /4-DQPSK Hopping	79	>=15	Pass



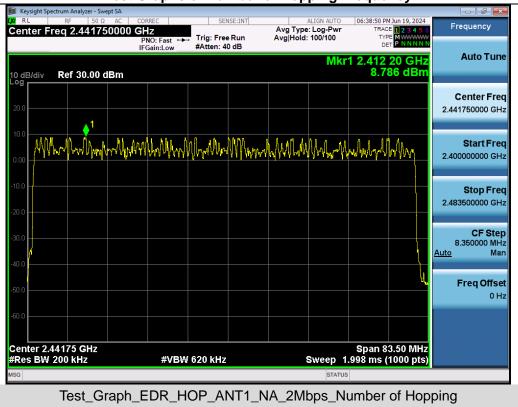

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, π /4-DQPSK modulated 2DH5 mode is the worst case and documented in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

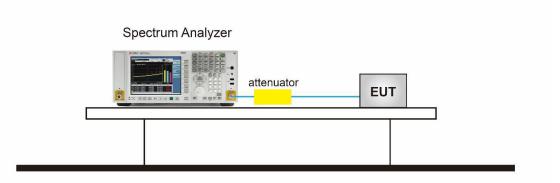

11.4 Measurement Result

Test Data of Dwell Time					
Channel	Time of Pulse for 2DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail
2402	2.860	16.0*4	183.040	400	Pass
2441	2.869	15.0*4	172.14	400	Pass
2480	2.870	18.0*4	206.64	400	Pass



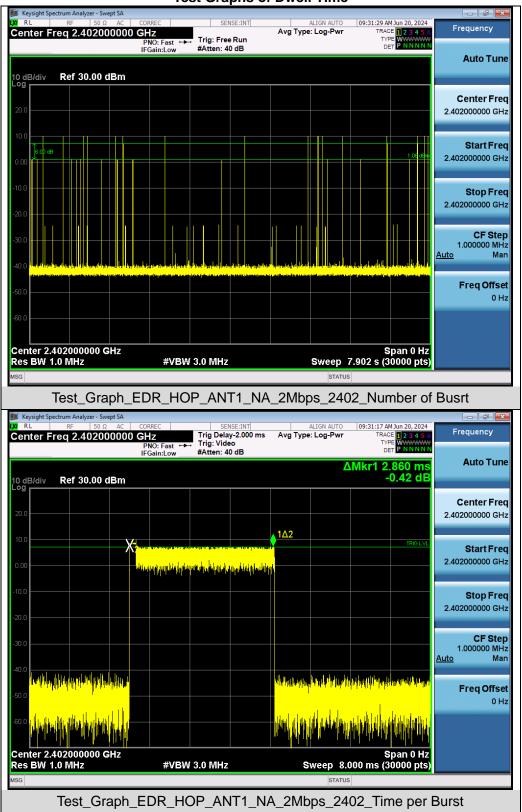

Test Graphs of Dwell Time