
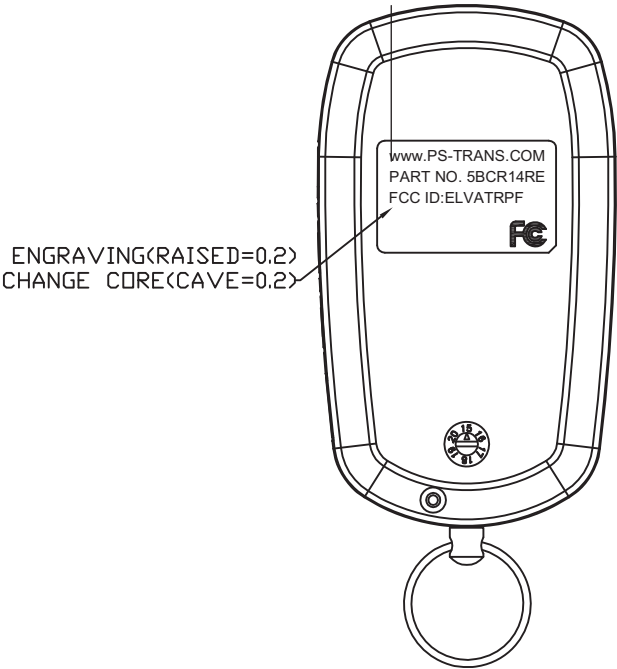


REVISIONS				
REV.	ACC.	DESCRIPTION	DRN.	DATE
①		ADD FCC	Eason	7/29/'15
②		MODIFY KEYCHAIN	Eason	9/2/'15
③		ADD P/N	Eason	9/11/'15
④		ADD DATE CODE	Eason	10/23/'15
⑤		MODIFY SCREW	Eason	10/28/'15

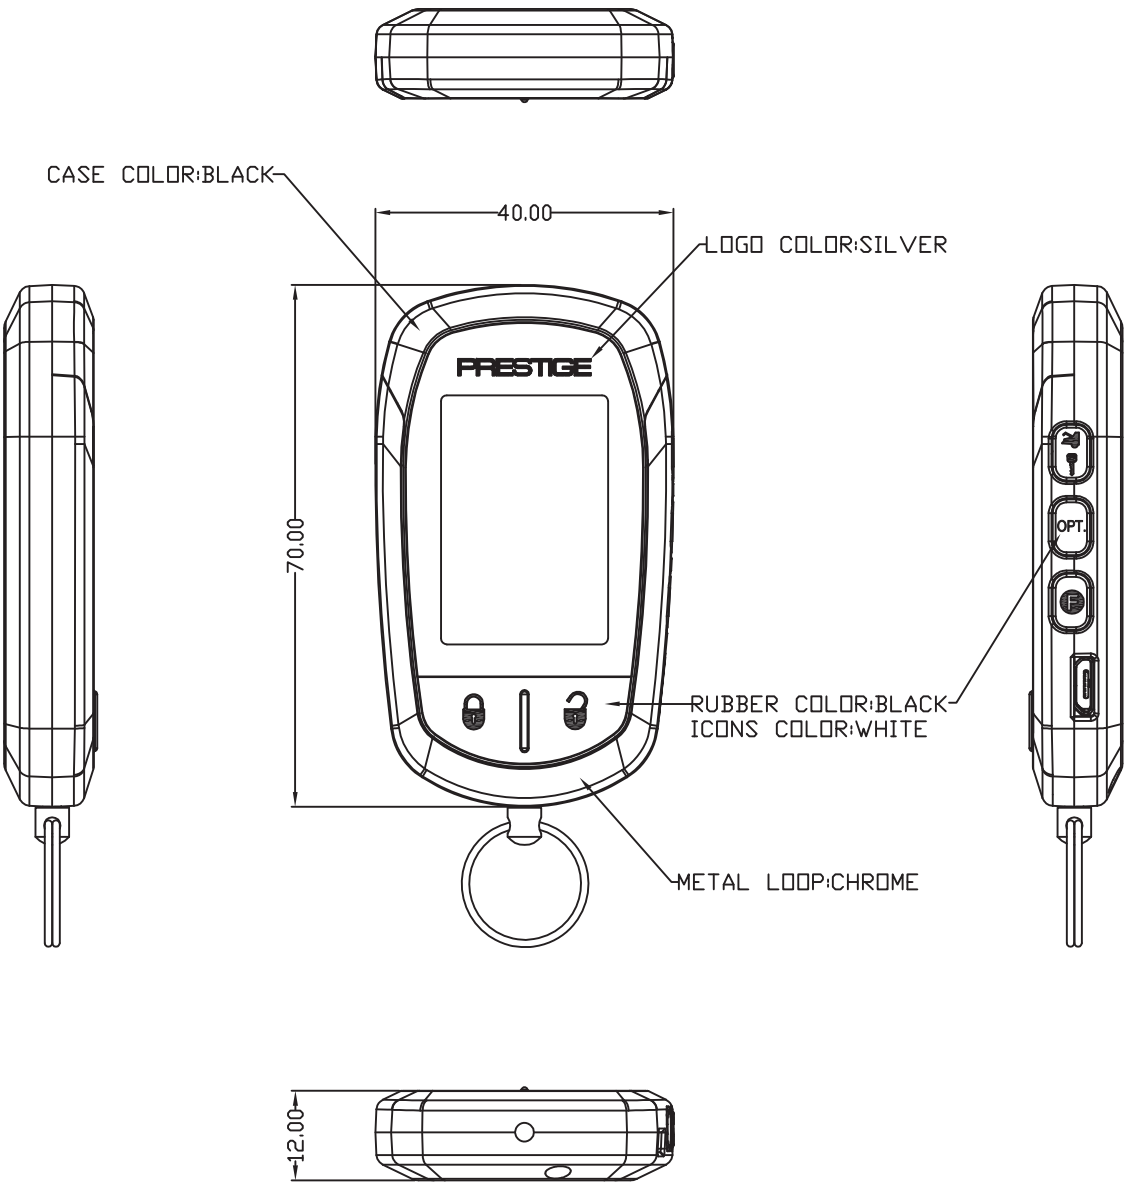

ENGRAVING<RAISED=0.2>
CHANGE CORE<CAVE=0.2>

PART	P/N	PART	P/N
CASE	IAAQ6001	KEY CHAIN	MA0950B0
METAL LOOP	MDAQ6S00	SCREW	MIF17005
LENS	IRAQ60A0	BAT. ADHESIVE	NTDH1C00
TOP KEY	NKAQ60A0	PORON TAPE	NTEB0002*2
SIDE KEY	NKAQ70A0		

BODY MATERIAL : PC+ABS
1. Texture is same as MT-11010
2. Radius will be 0.2 if not specified.

*Tolerance please refer specification of tolerance units "C"
HATCH TOLERANCE SPEC.

GRADE	A	B	C
UNDER 6	0.08	0.16	0.30
6~30	0.10	0.20	0.40
30~120	0.20	0.40	0.80
120~300	0.40	0.80	2.00

SCALE: 1:1	UNIT: M/M	DRN BY Eason	DATE 2015/7/28	NUTEK CORPORATION		
MATERIAL		CHK BY YYS	10/28	TITLE 5BCR14RE (900 SST)		
FINISH		APPD BY Victor	10/28	SIZE	DEPT	DRAWING NO 103I0270
CODE		SHEET	OF	A4		REV 5