




TEST REPORT

For Bluetooth-LE

Report No.: CHTW25040063 Report Verification: 

Project No.....: SHT2503077504W

FCC ID.....: 2AKSGST730

Applicant's name.....: Shanghai Hulu Devices Co., Ltd.

Address: No. 509 Caobao Road, Room 101-2 Bld 9, Xuhui District,
Shanghai, China

Product Name: Smart Wireless Stethoscope

Trade Mark: -

Model No.: STEMO730

Listed Model(s).....: STEMO720, STEMO710

Standard.....: FCC CFR Title 47 Part 15 Subpart C § 15.247

Date of receipt of test sample.....: Mar.25, 2025

Date of testing.....: Mar.27, 2025- Apr.01, 2025

Date of issue.....: Apr.07, 2025

Result.....: PASS

Compiled by
(Position+Printed name+Signature): File administrators Xiaodong Zhao

Xiaodong Zhao

Supervised by
(Position+Printed name+Signature): Project Engineer Caspar Chen

Caspar Chen

Approved by
(Position+Printed name+Signature): RF Manager Xu Yang

Xu Yang

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: Building 7, Baiwang Idea Factory, No.1051, Songbai Road,
Yangguang Community, Xili Subdistrict, Nanshan District,
Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test sample information	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	8
4.7.	Equipment Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	14
5.3.	Peak Output Power	18
5.4.	Power Spectral Density	19
5.5.	6dB bandwidth	20
5.6.	99% Occupied Bandwidth	21
5.7.	Duty Cycle	22
5.8.	Conducted Band edge and Spurious Emission	23
5.9.	Radiated Band edge Emission	24
5.10.	Radiated Spurious Emission	31
6.	TEST SETUP PHOTOS	43
7.	EXTERNAL AND INTERNAL PHOTOS	45
7.1.	External Photos	45
7.2.	Internal Photos	52
8.	APPENDIX REPORT	60

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2025-04-07	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Xiangyu Wei
5.2	AC Conducted Emission	15.207	PASS	Xiangyu Wei
5.3	Peak Output Power	15.247(b)(3)	PASS	Xiangyu Wei
5.4	Power Spectral Density	15.247(e)	PASS	Xiangyu Wei
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Xiangyu Wei
5.6	99% Occupied Bandwidth	-	PASS ^{*1}	Xiangyu Wei
5.7	Duty cycle	-	PASS ^{*1}	Xiangyu Wei
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Xiangyu Wei
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Shanghai Hulu Devices Co., Ltd.
Address:	No. 509 Caobao Road, Room 101-2 Bld 9, Xuhui District, Shanghai, China
Manufacturer:	Shanghai Hulu Devices Co., Ltd.
Address:	No. 509 Caobao Road, Room 101-2 Bld 9, Xuhui District, Shanghai, China

3.2. Product Description

Main unit information:	
Product Name:	Smart Wireless Stethoscope
Trade Mark:	-
Model No.:	STEMO730
Listed Model(s):	STEMO720, STEMO710
Power supply:	DC 3.7V from Battery
Hardware version:	1.0
Software version:	1.0
Accessory unit information:	
Battery information:	3.7V,90mAh 0.333Wh

3.3. Radio Specification Description

Bluetooth version:	V5.4
Support function:	BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	SMD antenna
Antenna gain:	2 dBi

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2404
.
19	2440
.
38	2478
39	2480

4.2. Descriptions of Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.3. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT25030775007
EMI test items	YPHT25030775012

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ yes			
Item	Equipment	Trade Name	Model No.
1	Longxingchen	-	LXCP6-050100A
2			

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● RF Conducted test item

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2024/08/27	2025/08/26
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2024/08/21	2025/08/20
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2025/03/13	2026/03/12
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Conducted Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2024/08/12	2025/08/11
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2024/08/12	2025/08/11
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2024/08/12	2025/08/11
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- 9kHz~30MHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- 30MHz~1GHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/02/22	2026/02/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2024/5/24	2025/5/23
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- Above 1GHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/04/17	2026/04/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2024/08/12	2025/08/11
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2024/08/12	2025/0811
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/02/14	2026/02/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2024/06/06	2025/06/05
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2024/06/06	2025/06/05
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT

FCC CFR Title 47 Part 15 Subpart C Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


TEST RESULT


☒ **Passed** ☐ **Not Applicable**

The antenna type is a SMD antenna, please refer to the below antenna photo.

STEMO730:

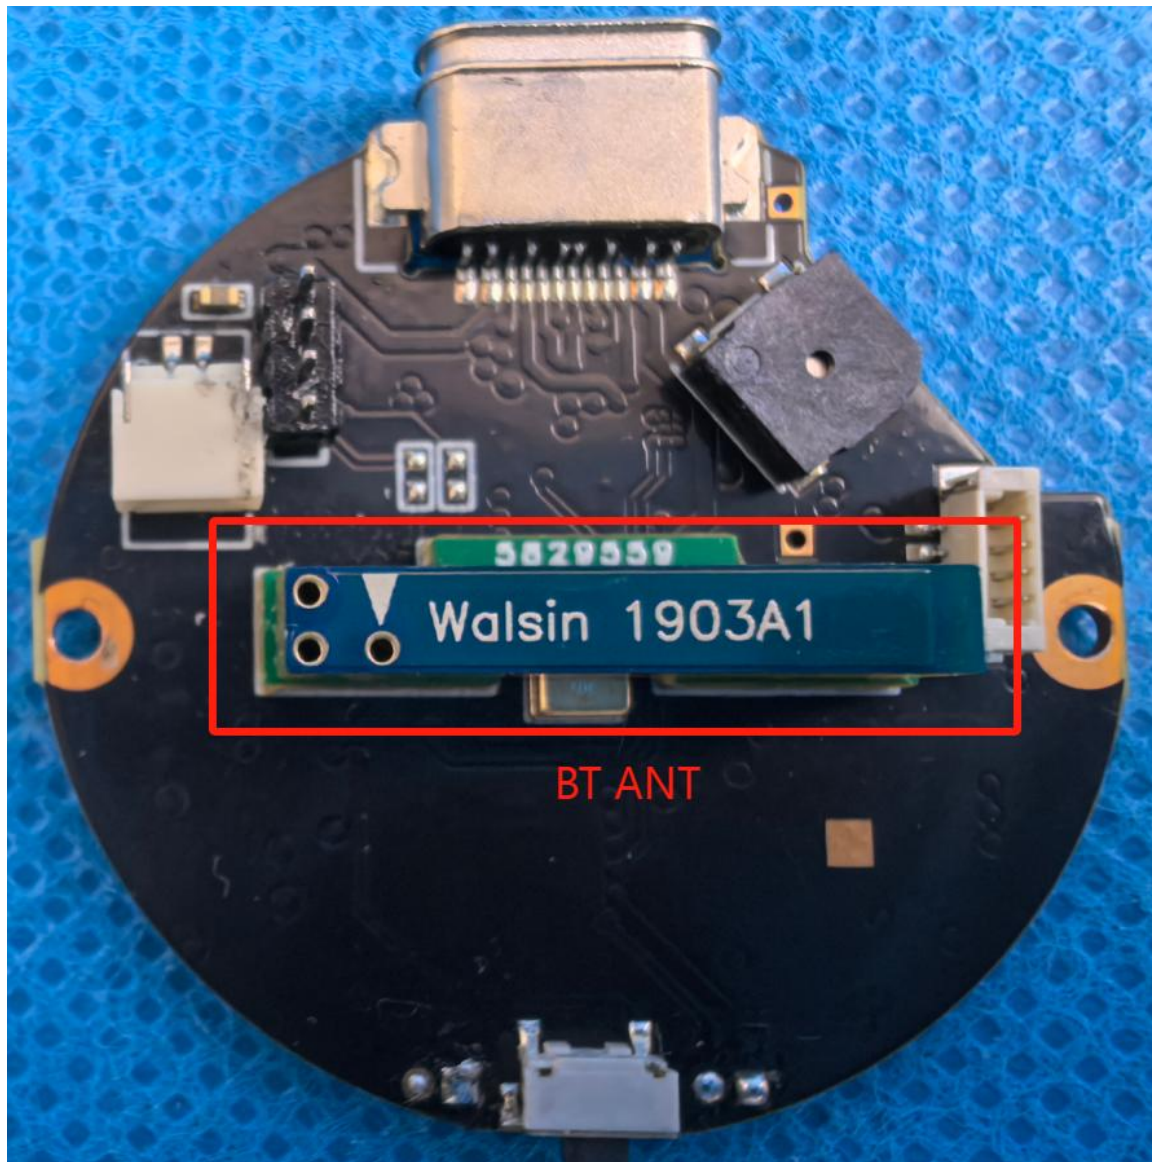

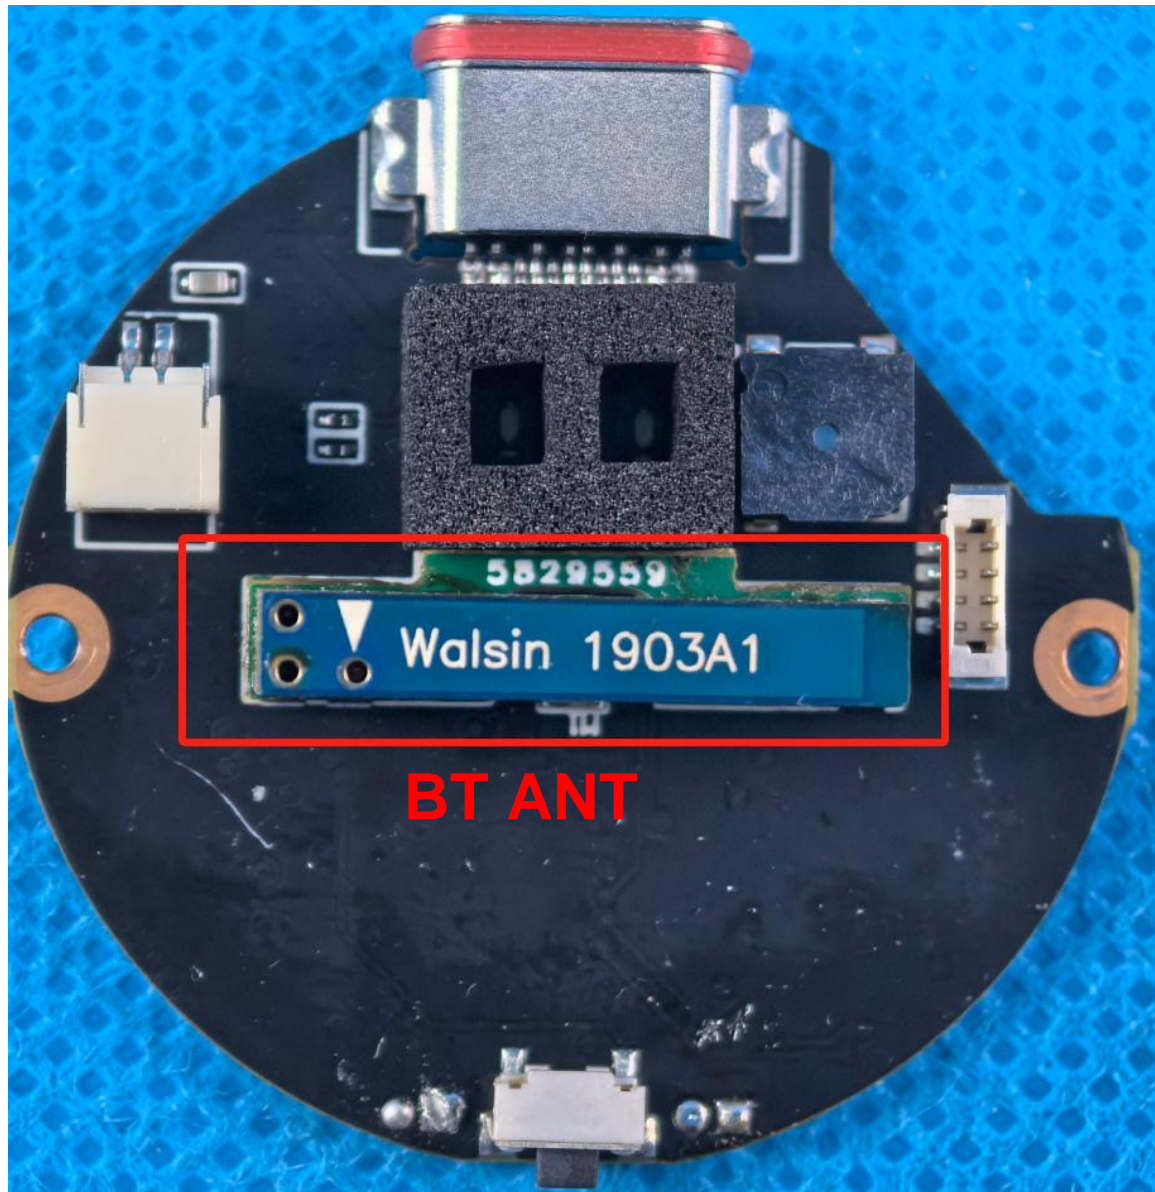STEMO720:

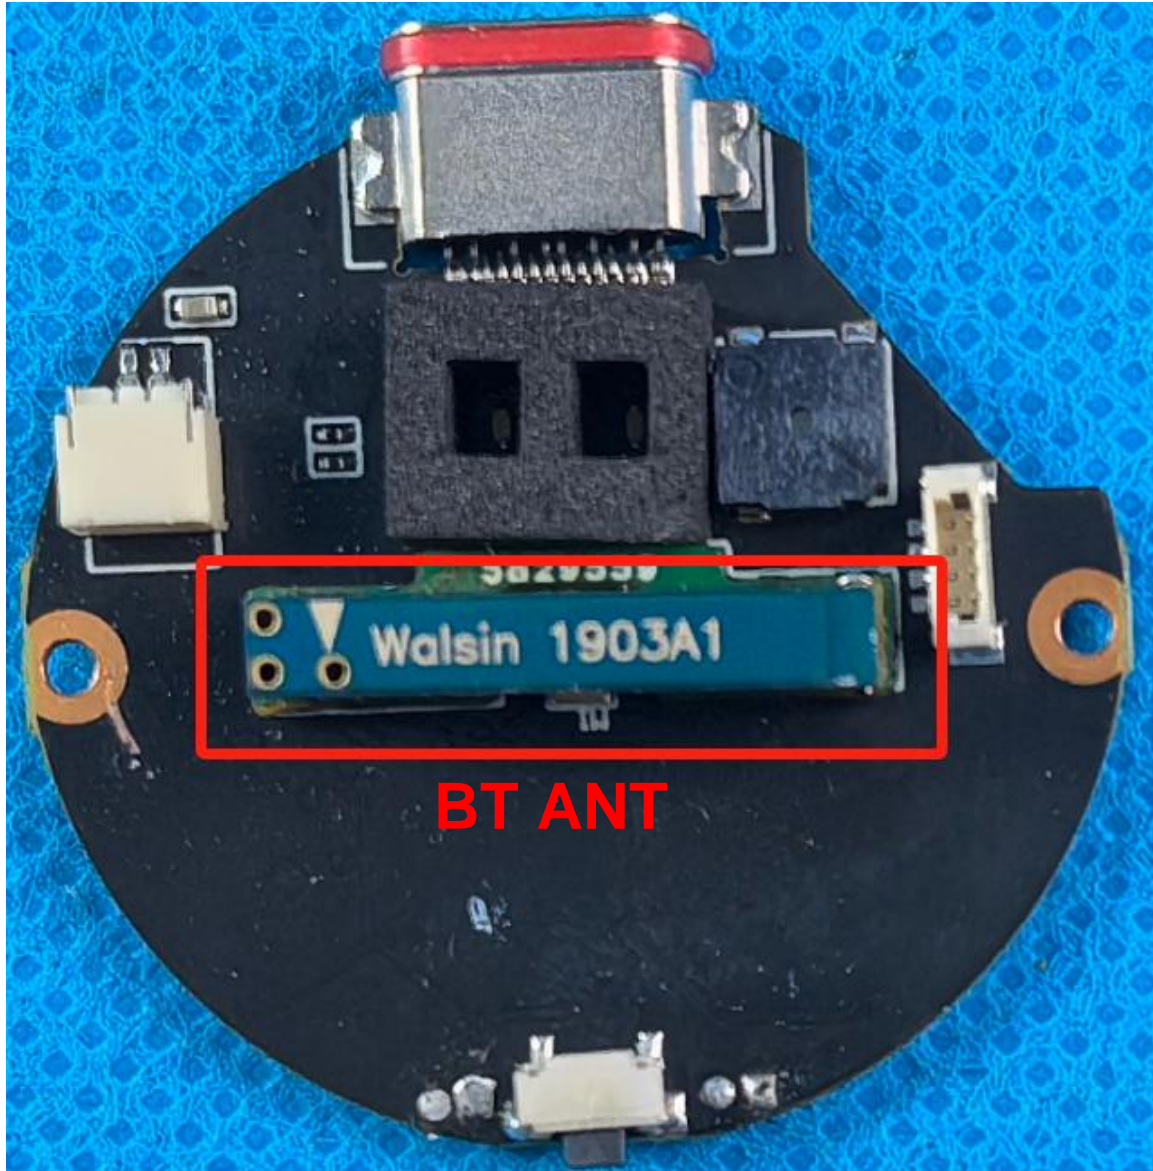STEMO710:

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

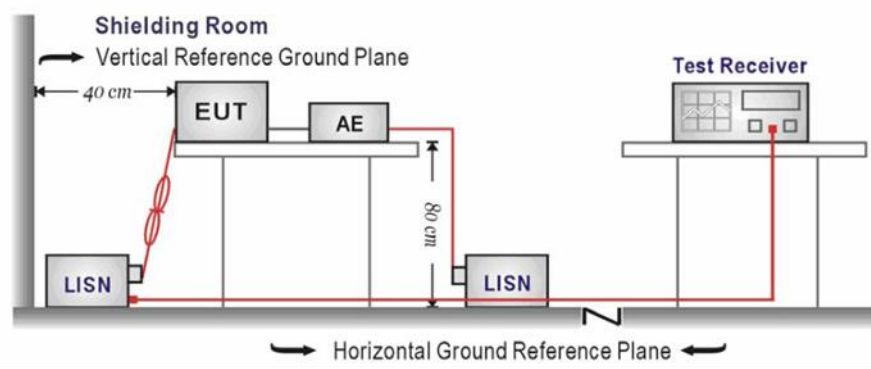

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

Refer to the clause 4.2


TEST RESULT

☒ Passed ☐ Not Applicable

STEMO730:

Test Line:


L

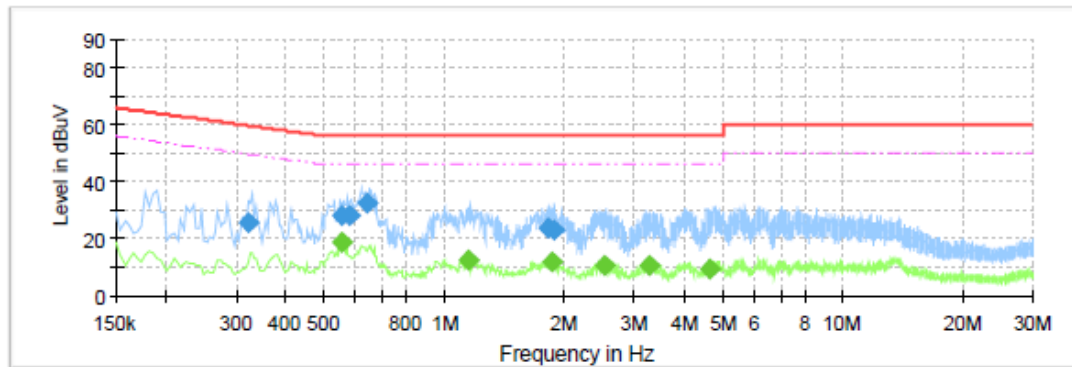**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.323500	25.82	---	59.62	33.80	L1	10.3
0.551500	---	18.82	46.00	27.18	L1	10.4
0.552500	28.31	---	56.00	27.69	L1	10.4
0.579500	27.88	---	56.00	28.12	L1	10.4
0.643500	32.34	---	56.00	23.66	L1	10.4
1.147500	---	12.45	46.00	33.55	L1	10.5
1.827500	23.50	---	56.00	32.50	L1	10.5
1.867500	---	11.92	46.00	34.08	L1	10.5
1.895500	23.37	---	56.00	32.63	L1	10.5
2.539500	---	10.50	46.00	35.50	L1	10.6
3.279500	---	10.34	46.00	35.66	L1	10.6
4.611500	---	9.54	46.00	36.46	L1	10.6

Test Line:

N

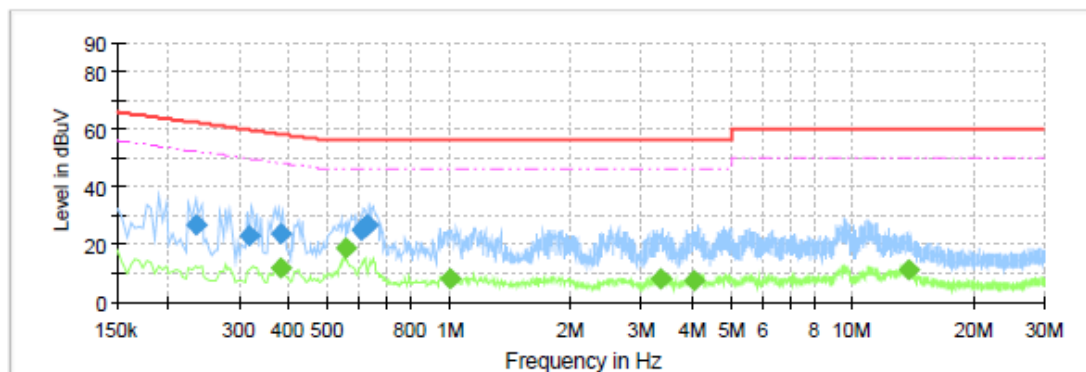
**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.235500	26.59	---	62.25	35.66	N	10.2
0.319500	23.32	---	59.72	36.40	N	10.2
0.383500	23.46	---	58.20	34.75	N	10.2
0.383500	---	12.12	48.20	36.08	N	10.2
0.551500	---	18.49	46.00	27.51	N	10.2
0.604500	25.11	---	56.00	30.89	N	10.2
0.619500	26.49	---	56.00	29.51	N	10.2
0.623500	27.01	---	56.00	28.99	N	10.2
1.003500	---	8.37	46.00	37.63	N	10.2
3.355500	---	8.00	46.00	38.00	N	10.3
4.071500	---	7.79	46.00	38.21	N	10.3
13.751500	---	11.52	50.00	38.48	N	10.4

STEMO720:

Test Line:


L

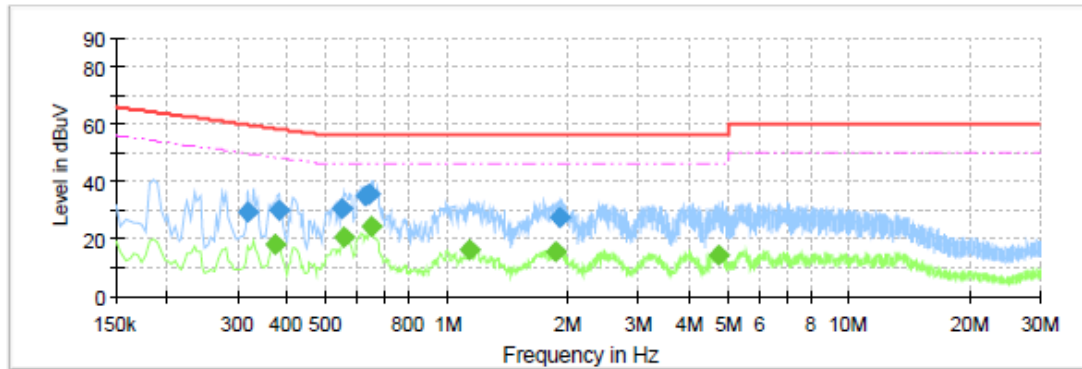**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.319500	29.49	---	59.72	30.23	L1	10.3
0.371500	---	18.26	48.47	30.21	L1	10.3
0.379500	30.14	---	58.29	28.15	L1	10.3
0.547500	30.90	---	56.00	25.10	L1	10.4
0.555500	---	20.70	46.00	25.30	L1	10.4
0.623500	34.73	---	56.00	21.27	L1	10.4
0.643500	35.80	---	56.00	20.20	L1	10.4
0.647500	---	24.23	46.00	21.77	L1	10.4
1.139500	---	15.97	46.00	30.03	L1	10.5
1.859500	---	15.63	46.00	30.37	L1	10.5
1.903500	27.34	---	56.00	28.66	L1	10.5
4.747500	---	14.41	46.00	31.59	L1	10.6

Test Line:

N

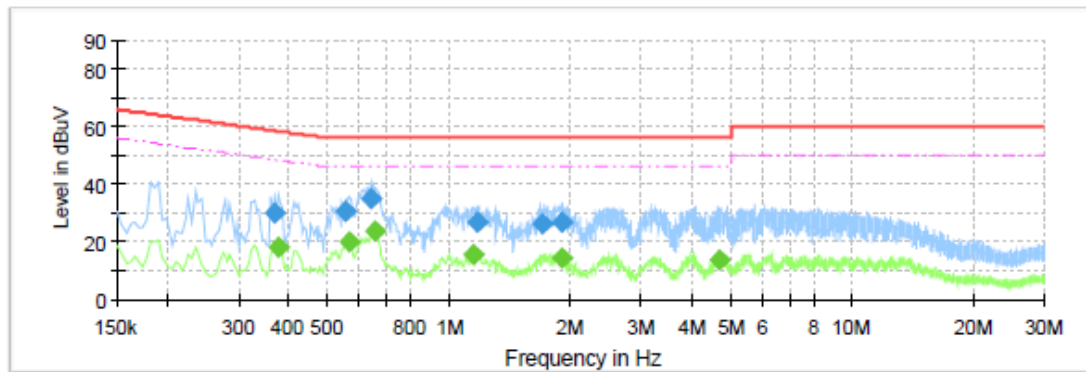
**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.367500	30.02	---	58.56	28.54	N	10.2
0.375500	---	18.19	48.38	30.18	N	10.2
0.551500	30.65	---	56.00	25.35	N	10.2
0.563500	---	20.06	46.00	25.94	N	10.2
0.639500	35.30	---	56.00	20.70	N	10.2
0.651500	---	23.82	46.00	22.18	N	10.2
1.147500	---	15.70	46.00	30.30	N	10.2
1.179500	26.86	---	56.00	29.14	N	10.2
1.699500	26.11	---	56.00	29.89	N	10.2
1.899500	26.69	---	56.00	29.31	N	10.2
1.915500	---	14.68	46.00	31.32	N	10.2
4.711500	---	13.96	46.00	32.04	N	10.3

STEMO710:

Test Line:


L

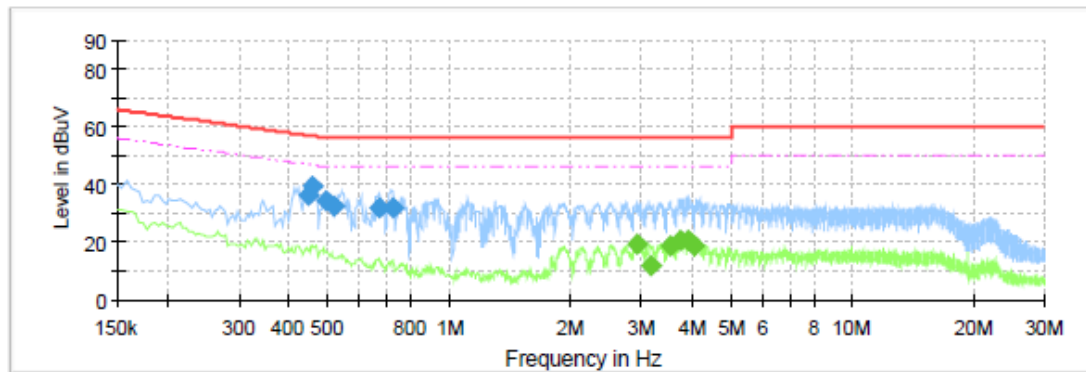**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.4445	36.04	---	56.98	20.93	L1	10.3
0.4555	39.47	---	56.77	17.30	L1	10.3
0.4955	34.48	---	56.08	21.60	L1	10.4
0.5155	32.65	---	56.00	23.35	L1	10.4
0.6675	31.92	---	56.00	24.08	L1	10.4
0.7235	31.92	---	56.00	24.08	L1	10.4
2.9155	---	19.53	46.00	26.47	L1	10.6
3.1795	---	12.15	46.00	33.85	L1	10.6
3.5525	---	18.53	46.00	27.47	L1	10.6
3.7515	---	20.79	46.00	25.21	L1	10.6
3.9155	---	20.73	46.00	25.27	L1	10.6
4.0715	---	18.84	46.00	27.16	L1	10.6

Test Line:

N

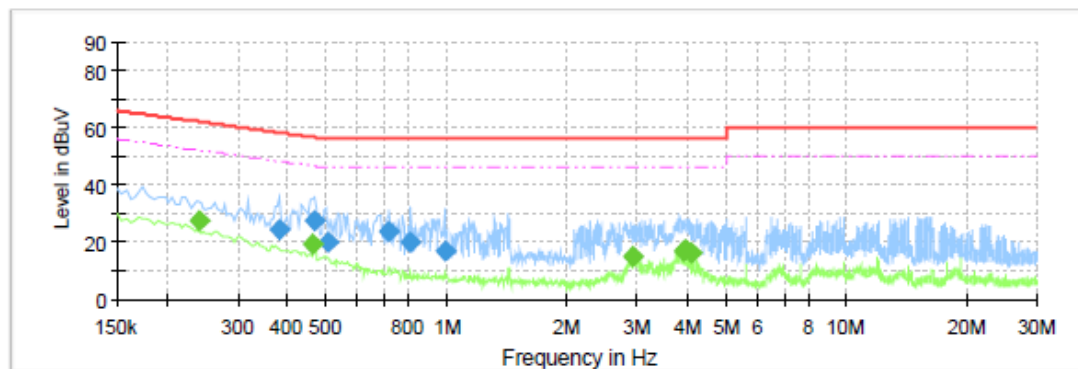**Final Result**


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.2395	---	27.21	52.11	24.91	N	10.2
0.3795	24.66	---	58.29	33.63	N	10.2
0.4595	---	19.22	46.70	27.48	N	10.2
0.4675	27.60	---	56.56	28.96	N	10.2
0.5075	19.82	---	56.00	36.18	N	10.2
0.7195	23.86	---	56.00	32.15	N	10.2
0.8075	20.18	---	56.00	35.82	N	10.2
0.9875	16.91	---	56.00	39.09	N	10.2
2.9195	---	14.81	46.00	31.19	N	10.2
3.9155	---	17.17	46.00	28.83	N	10.3
3.9715	---	17.75	46.00	28.25	N	10.3
4.0755	---	16.19	46.00	29.81	N	10.3

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

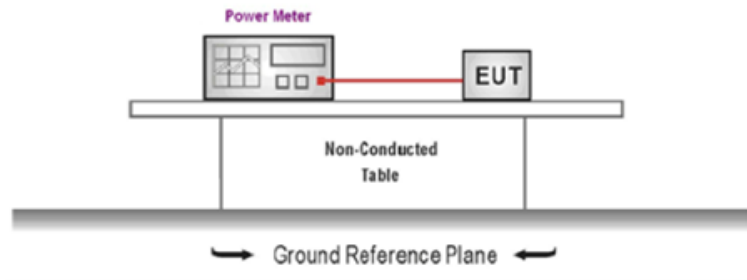

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

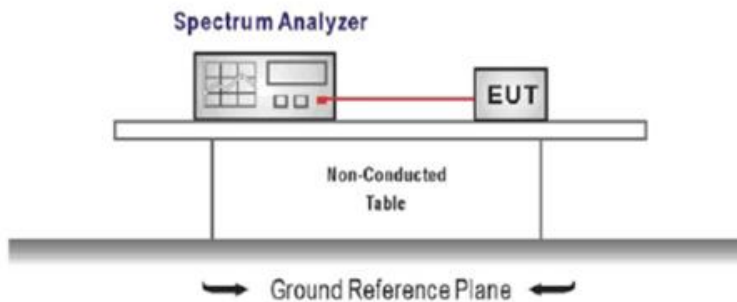

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

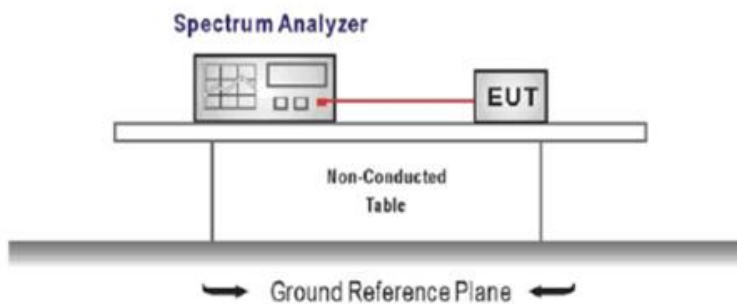

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

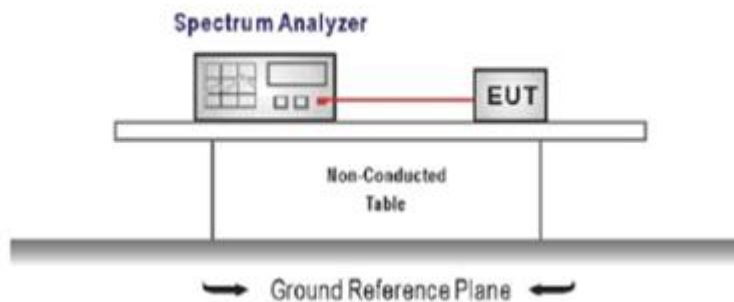

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION

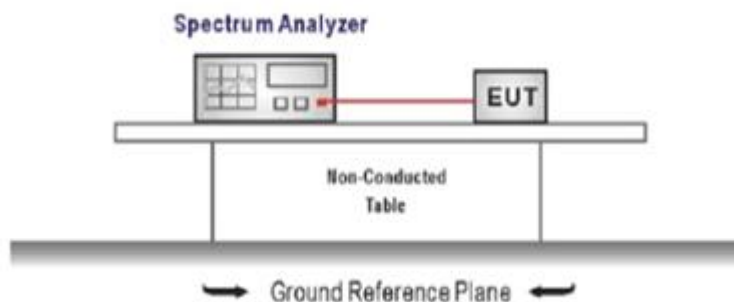

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW \geq RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Refer to the clause 4.2

TEST DATA


Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

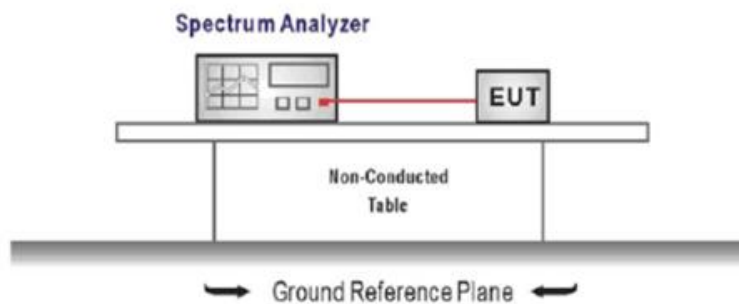

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

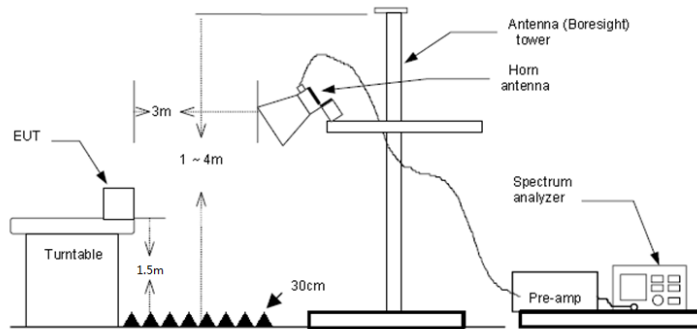

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

BLE 1Mbps:**STEMO730:**

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.69	27.86	3.95	41.18	38.32	74.00	-35.68	Peak
2	2390.03	48.44	27.54	4.08	41.11	38.95	74.00	-35.05	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.40	27.86	3.95	41.18	27.03	54.00	-26.97	Average
2	2390.03	36.63	27.54	4.08	41.11	27.14	54.00	-26.86	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	46.81	27.86	3.95	41.18	37.44	74.00	-36.56	Peak
2	2390.03	47.79	27.54	4.08	41.11	38.30	74.00	-35.70	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.43	27.86	3.95	41.18	27.06	54.00	-26.94	Average
2	2390.03	37.55	27.54	4.08	41.11	28.06	54.00	-25.94	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	55.02	27.33	4.18	41.04	45.49	74.00	-28.51	Peak
2	2500.00	47.69	27.30	4.20	41.02	38.17	74.00	-35.83	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	38.50	27.33	4.18	41.04	28.97	54.00	-25.03	Average
2	2500.00	38.00	27.30	4.20	41.02	28.48	54.00	-25.52	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	60.31	27.33	4.18	41.04	50.78	74.00	-23.22	Peak
2	2500.00	49.96	27.30	4.20	41.02	40.44	74.00	-33.56	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	39.56	27.33	4.18	41.04	30.03	54.00	-23.97	Average
2	2500.00	38.65	27.30	4.20	41.02	29.13	54.00	-24.87	Average

STEMO720:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.21	27.86	3.95	41.18	37.84	74.00	-36.16	Peak
2	2390.03	55.35	27.54	4.08	41.11	45.86	74.00	-28.14	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.70	27.86	3.95	41.18	27.33	54.00	-26.67	Average
2	2390.03	45.31	27.54	4.08	41.11	35.82	54.00	-18.18	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	46.71	27.86	3.95	41.18	37.34	74.00	-36.66	Peak
2	2390.03	54.19	27.54	4.08	41.11	44.70	74.00	-29.30	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.76	27.86	3.95	41.18	27.39	54.00	-26.61	Average
2	2390.03	45.31	27.54	4.08	41.11	35.82	54.00	-18.18	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	58.34	27.33	4.18	41.04	48.81	74.00	-25.19	Peak
2	2500.00	52.20	27.30	4.20	41.02	42.68	74.00	-31.32	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	50.38	27.33	4.18	41.04	40.85	54.00	-13.15	Average
2	2500.00	43.66	27.30	4.20	41.02	34.14	54.00	-19.86	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	57.33	27.33	4.18	41.04	47.80	74.00	-26.20	Peak
2	2500.00	52.46	27.30	4.20	41.02	42.94	74.00	-31.06	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	47.54	27.33	4.18	41.04	38.01	54.00	-15.99	Average
2	2500.00	41.81	27.30	4.20	41.02	32.29	54.00	-21.71	Average

STEMO710:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.57	27.86	3.95	41.18	38.20	74.00	-35.80	Peak
2	2390.03	47.35	27.54	4.08	41.11	37.86	74.00	-36.14	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.25	27.86	3.95	41.18	26.88	54.00	-27.12	Average
2	2390.03	37.28	27.54	4.08	41.11	27.79	54.00	-26.21	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	48.36	27.86	3.95	41.18	38.99	74.00	-35.01	Peak
2	2390.03	48.13	27.54	4.08	41.11	38.64	74.00	-35.36	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.12	27.86	3.95	41.18	26.75	54.00	-27.25	Average
2	2390.03	37.23	27.54	4.08	41.11	27.74	54.00	-26.26	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	53.14	27.33	4.18	41.04	43.61	74.00	-30.39	Peak
2	2500.00	50.78	27.30	4.20	41.02	41.26	74.00	-32.74	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	45.25	27.33	4.18	41.04	35.72	54.00	-18.28	Average
2	2500.00	39.96	27.30	4.20	41.02	30.44	54.00	-23.56	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	51.74	27.33	4.18	41.04	42.21	74.00	-31.79	Peak
2	2500.00	51.16	27.30	4.20	41.02	41.64	74.00	-32.36	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	44.14	27.33	4.18	41.04	34.61	54.00	-19.39	Average
2	2500.00	39.59	27.30	4.20	41.02	30.07	54.00	-23.93	Average

BLE 2Mbps:**STEMO730:**

Test channel		CH00			Polarity		Horizontal			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	47.33	27.86	3.95	41.18	37.96	74.00	-36.04	Peak	
2	2390.03	47.22	27.54	4.08	41.11	37.73	74.00	-36.27	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	36.16	27.86	3.95	41.18	26.79	54.00	-27.21	Average	
2	2390.03	36.56	27.54	4.08	41.11	27.07	54.00	-26.93	Average	

Test channel		CH00			Polarity		Vertical			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	47.38	27.86	3.95	41.18	38.01	74.00	-35.99	Peak	
2	2390.03	48.62	27.54	4.08	41.11	39.13	74.00	-34.87	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	36.01	27.86	3.95	41.18	26.64	54.00	-27.36	Average	
2	2390.03	37.14	27.54	4.08	41.11	27.65	54.00	-26.35	Average	

Test channel		CH39			Polarity		Horizontal			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	51.00	27.33	4.18	41.04	41.47	74.00	-32.53	Peak	
2	2500.00	48.22	27.30	4.20	41.02	38.70	74.00	-35.30	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	41.37	27.33	4.18	41.04	31.84	54.00	-22.16	Average	
2	2500.00	38.06	27.30	4.20	41.02	28.54	54.00	-25.46	Average	

Test channel		CH39			Polarity		Vertical			
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	51.91	27.33	4.18	41.04	42.38	74.00	-31.62	Peak	
2	2500.00	47.55	27.30	4.20	41.02	38.03	74.00	-35.97	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	43.29	27.33	4.18	41.04	33.76	54.00	-20.24	Average	
2	2500.00	38.93	27.30	4.20	41.02	29.41	54.00	-24.59	Average	

STEMO720:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.21	27.86	3.95	41.18	37.84	74.00	-36.16	Peak
2	2390.03	60.17	27.54	4.08	41.11	50.68	74.00	-23.32	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	37.24	27.86	3.95	41.18	27.87	54.00	-26.13	Average
2	2390.03	42.62	27.54	4.08	41.11	33.13	54.00	-20.87	Average

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	47.72	27.86	3.95	41.18	38.35	74.00	-35.65	Peak
2	2390.03	58.02	27.54	4.08	41.11	48.53	74.00	-25.47	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	36.63	27.86	3.95	41.18	27.26	54.00	-26.74	Average
2	2390.03	44.39	27.54	4.08	41.11	34.90	54.00	-19.10	Average

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	61.19	27.33	4.18	41.04	51.66	74.00	-22.34	Peak
2	2500.00	51.73	27.30	4.20	41.02	42.21	74.00	-31.79	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	51.83	27.33	4.18	41.04	42.30	54.00	-11.70	Average
2	2500.00	43.77	27.30	4.20	41.02	34.25	54.00	-19.75	Average

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	58.38	27.33	4.18	41.04	48.85	74.00	-25.15	Peak
2	2500.00	51.24	27.30	4.20	41.02	41.72	74.00	-32.28	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	49.12	27.33	4.18	41.04	39.59	54.00	-14.41	Average
2	2500.00	41.99	27.30	4.20	41.02	32.47	54.00	-21.53	Average

STEMO710:

Test channel		CH00			Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	47.84	27.86	3.95	41.18	38.47	74.00	-35.53	Peak	
2	2390.03	48.26	27.54	4.08	41.11	38.77	74.00	-35.23	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	36.47	27.86	3.95	41.18	27.10	54.00	-26.90	Average	
2	2390.03	36.66	27.54	4.08	41.11	27.17	54.00	-26.83	Average	

Test channel		CH00			Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	47.42	27.86	3.95	41.18	38.05	74.00	-35.95	Peak	
2	2390.03	47.51	27.54	4.08	41.11	38.02	74.00	-35.98	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2310.00	36.20	27.86	3.95	41.18	26.83	54.00	-27.17	Average	
2	2390.03	36.93	27.54	4.08	41.11	27.44	54.00	-26.56	Average	

Test channel		CH39			Polarity			Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	55.46	27.33	4.18	41.04	45.93	74.00	-28.07	Peak	
2	2500.00	48.62	27.30	4.20	41.02	39.10	74.00	-34.90	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	45.20	27.33	4.18	41.04	35.67	54.00	-18.33	Average	
2	2500.00	39.53	27.30	4.20	41.02	30.01	54.00	-23.99	Average	

Test channel		CH39			Polarity			Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	55.78	27.33	4.18	41.04	46.25	74.00	-27.75	Peak	
2	2500.00	50.08	27.30	4.20	41.02	40.56	74.00	-33.44	Peak	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark	
1	2483.50	44.45	27.33	4.18	41.04	34.92	54.00	-19.08	Average	
2	2500.00	39.42	27.30	4.20	41.02	29.90	54.00	-24.10	Average	

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- 9 kHz ~ 30 MHz

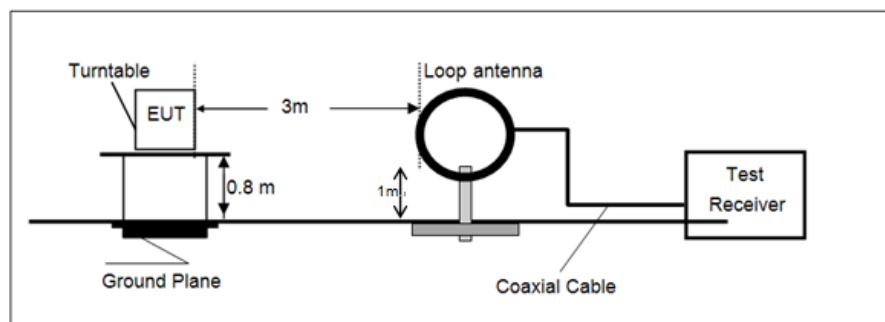

- 30 MHz ~ 1 GHz

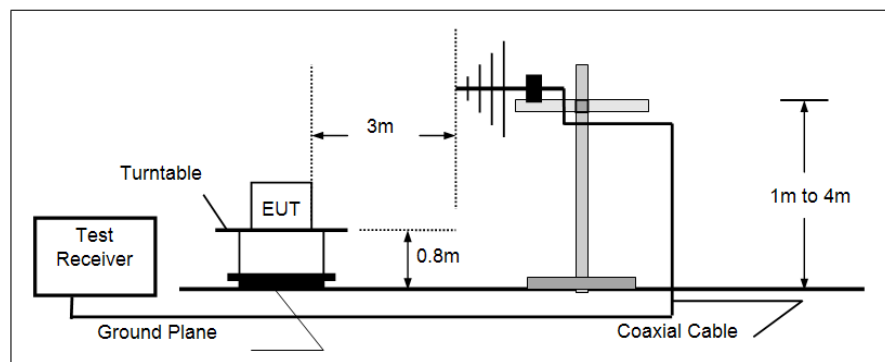

- Above 1 GHz

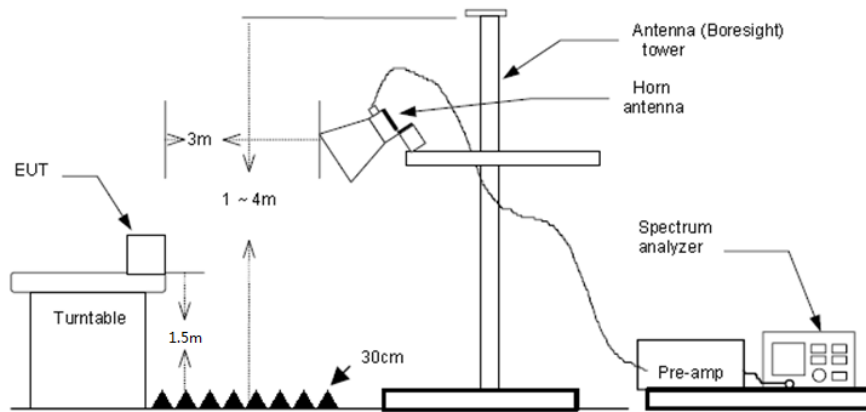

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

For 9 kHz ~ 30 MHz

The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.


For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH39 which it was worst case, so only show the worst case's data on this report.

STEMO730:

Polarization:


Horizontal

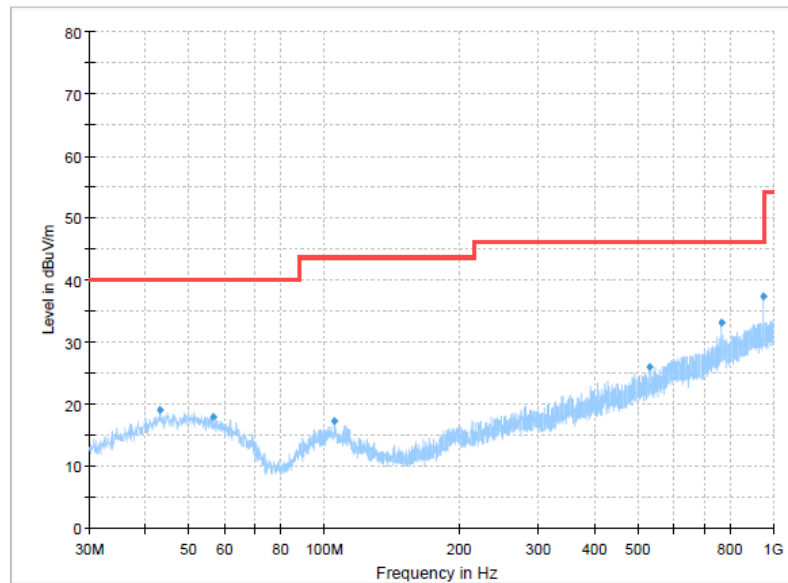**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.2163	18.92	40.00	21.08	100.0	H	251.0	-8.7
56.6750	17.95	40.00	22.05	300.0	H	0.0	-8.9
105.4175	17.27	43.50	26.23	100.0	H	277.0	-10.3
531.3688	25.89	46.00	20.11	100.0	H	251.0	-0.9
765.3813	33.07	46.00	12.93	300.0	H	45.0	4.4
948.2263	37.35	46.00	8.65	300.0	H	224.0	7.5

Polarization:

Vertical

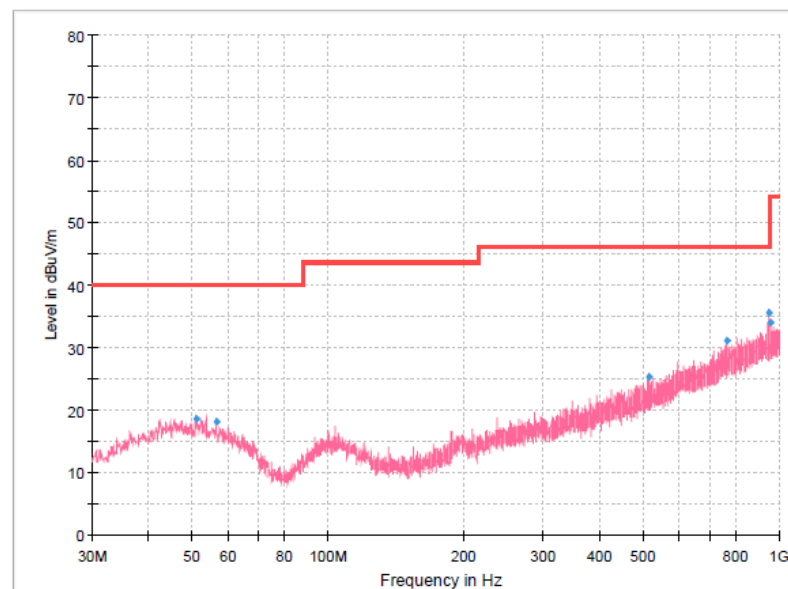
**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.2188	18.65	40.00	21.35	100.0	V	0.0	-8.4
56.4325	18.19	40.00	21.81	100.0	V	278.0	-8.9
516.2125	25.18	46.00	20.82	100.0	V	252.0	-1.2
765.0175	31.12	46.00	14.88	100.0	V	320.0	4.4
948.4688	35.58	46.00	10.42	100.0	V	83.0	7.5
959.2600	33.96	46.00	12.04	100.0	V	40.0	7.7

STEMO720:

Polarization:


Horizontal

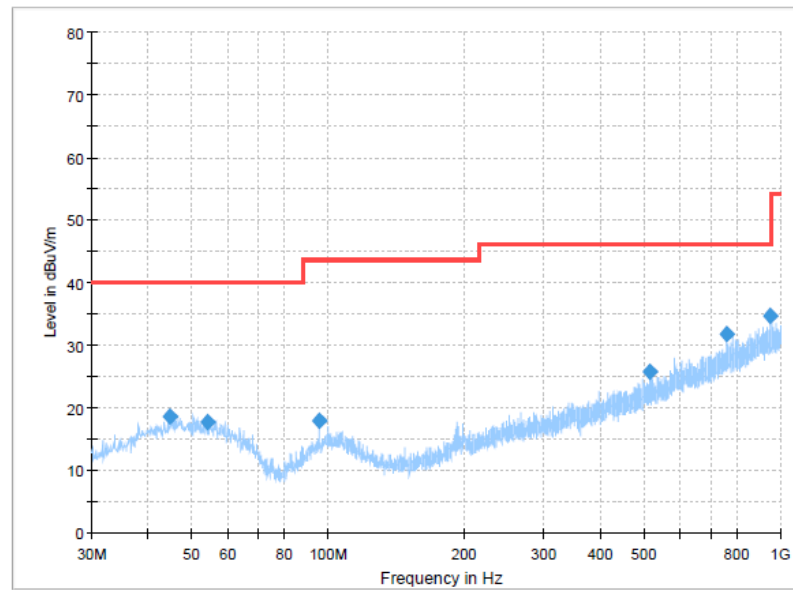**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.7925	18.46	40.00	21.54	300.0	H	0.0	-8.5
54.2500	17.67	40.00	22.33	300.0	H	266.0	-8.8
95.7175	17.83	43.50	25.67	300.0	H	206.0	-10.9
515.4850	25.64	46.00	20.36	100.0	H	210.0	-1.3
762.8350	31.77	46.00	14.23	100.0	H	194.0	4.4
948.4688	34.64	46.00	11.36	100.0	H	110.0	7.5

Polarization:

Vertical

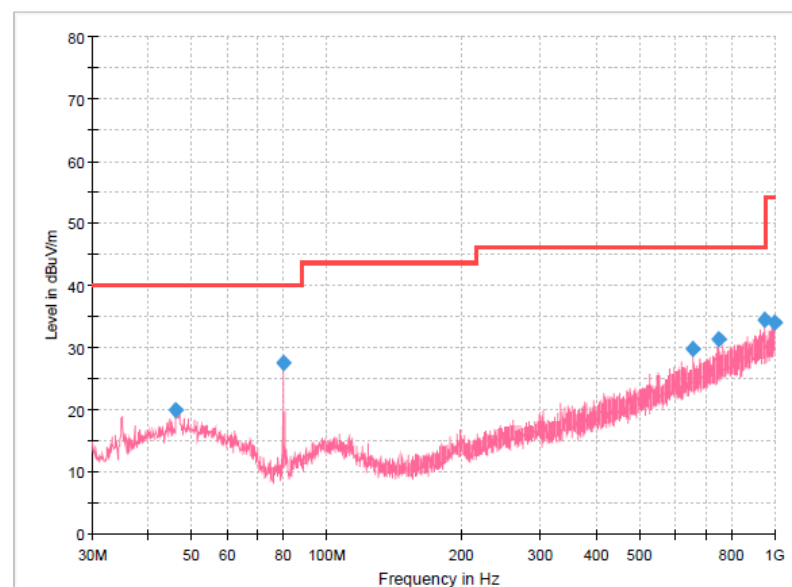
**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.1263	19.98	40.00	20.02	100.0	V	189.0	-8.3
79.9550	27.60	40.00	12.40	100.0	V	122.0	-15.5
657.3475	29.80	46.00	16.20	100.0	V	189.0	2.1
751.9225	31.21	46.00	14.79	100.0	V	355.0	4.3
948.2263	34.34	46.00	11.66	100.0	V	0.0	7.5
999.1513	34.02	54.00	19.98	100.0	V	64.0	8.3

STEMO710:

Polarization:


Horizontal

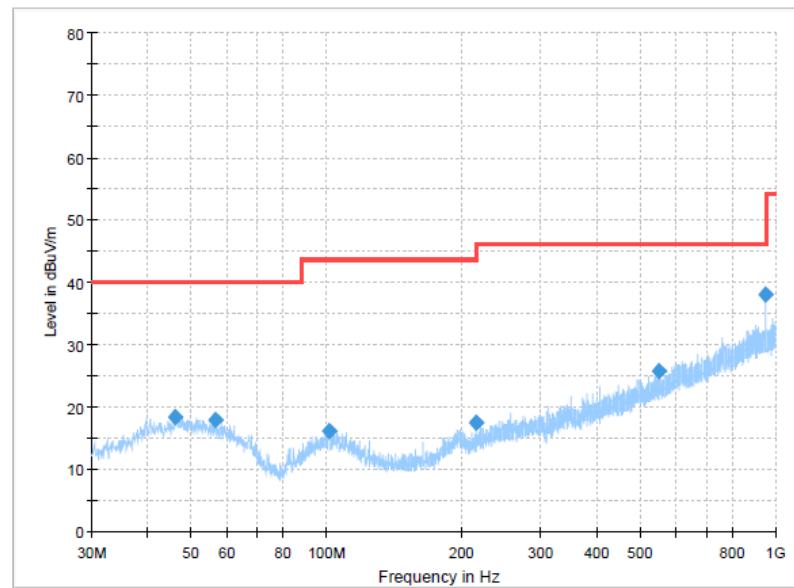**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.1263	18.36	40.00	21.64	100.0	H	83.0	-8.3
56.4325	17.96	40.00	22.04	100.0	H	11.0	-8.9
101.6588	16.03	43.50	27.47	300.0	H	336.0	-10.2
215.3913	17.35	43.50	26.15	100.0	H	177.0	-10.0
551.4963	25.61	46.00	20.39	100.0	H	209.0	-0.3
948.3475	37.93	46.00	8.07	300.0	H	189.0	7.5

Polarization:

Vertical

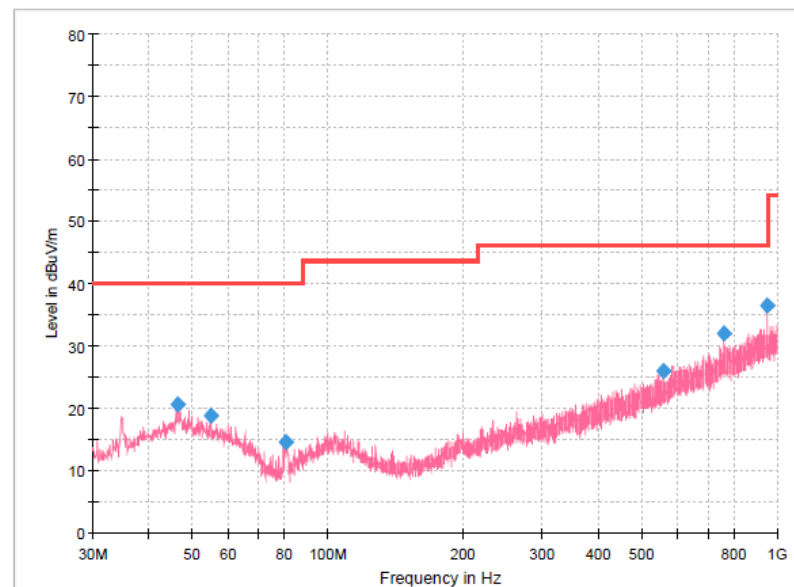**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.4900	20.56	40.00	19.44	100.0	V	0.0	-8.3
54.8563	18.83	40.00	21.17	100.0	V	155.0	-8.8
80.5613	14.52	40.00	25.48	100.0	V	171.0	-15.4
557.1950	25.92	46.00	20.08	100.0	V	281.0	-0.2
760.8950	31.85	46.00	14.15	100.0	V	339.0	4.4
948.2263	36.41	46.00	9.59	100.0	V	5.0	7.5

For 1 GHz ~ 25 GHz**BLE 1Mbps:****STEMO730:**

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	57.80	28.50	4.53	40.96	49.87	74.00	-24.13	Peak
2	4996.69	48.59	31.39	6.00	40.20	45.78	74.00	-28.22	Peak
3	7117.84	42.03	35.45	7.44	39.59	45.33	74.00	-28.67	Peak
4	10916.26	40.41	40.50	8.83	40.62	49.12	74.00	-24.88	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	57.55	28.50	4.53	40.95	49.63	74.00	-24.37	Peak
2	3993.90	47.04	29.79	5.43	40.32	41.94	74.00	-32.06	Peak
3	4996.69	47.70	31.39	6.00	40.20	44.89	74.00	-29.11	Peak
4	7921.00	41.60	36.73	8.02	39.96	46.39	74.00	-27.61	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2551.69	42.92	27.40	4.23	41.02	33.53	74.00	-40.47	Peak
2	3993.90	47.28	29.79	5.43	40.32	42.18	74.00	-31.82	Peak
3	4983.99	47.54	31.34	5.99	40.21	44.66	74.00	-29.34	Peak
4	9660.72	40.74	39.22	8.60	39.83	48.73	74.00	-25.27	Peak

Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3534.54	44.27	29.14	5.14	40.97	37.58	74.00	-36.42	Peak
2	4996.69	49.05	31.39	6.00	40.20	46.24	74.00	-27.76	Peak
3	7981.72	40.83	36.96	8.03	39.94	45.88	74.00	-28.12	Peak
4	11457.21	40.52	40.46	9.17	40.24	49.91	74.00	-24.09	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	43.69	29.77	5.41	40.33	38.54	74.00	-35.46	Peak
2	4983.99	45.56	31.34	5.99	40.21	42.68	74.00	-31.32	Peak
3	7063.69	42.31	35.41	7.38	39.53	45.57	74.00	-28.43	Peak
4	9346.26	40.39	39.20	8.54	39.86	48.27	74.00	-25.73	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3266.35	43.27	28.50	4.83	40.80	35.80	74.00	-38.20	Peak
2	4652.95	44.60	31.01	5.86	40.35	41.12	74.00	-32.88	Peak
3	5257.66	50.23	31.38	6.21	39.90	47.92	74.00	-26.08	Peak
4	9228.06	40.06	38.97	8.49	39.91	47.61	74.00	-26.39	Peak

STEMO720:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	57.90	28.50	4.53	40.95	49.98	74.00	-24.02	Peak
2	3993.90	45.66	29.79	5.43	40.32	40.56	74.00	-33.44	Peak
3	4809.50	45.99	31.28	5.89	40.28	42.88	74.00	-31.12	Peak
4	9685.35	39.76	39.27	8.60	39.84	47.79	74.00	-26.21	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	56.50	28.50	4.53	40.95	48.58	74.00	-25.42	Peak
2	3983.75	48.62	29.77	5.41	40.33	43.47	74.00	-30.53	Peak
3	4809.50	47.38	31.28	5.89	40.28	44.27	74.00	-29.73	Peak
4	4983.99	47.79	31.34	5.99	40.21	44.91	74.00	-29.09	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	59.30	28.50	4.53	40.96	51.37	74.00	-22.63	Peak
2	4883.52	47.81	31.20	5.93	40.25	44.69	74.00	-29.31	Peak
3	7319.96	41.43	36.14	7.63	39.82	45.38	74.00	-28.62	Peak
4	9809.40	40.74	39.32	8.60	39.86	48.80	74.00	-25.20	Peak

Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	55.92	28.50	4.53	40.95	48.00	74.00	-26.00	Peak
2	4883.52	46.72	31.20	5.93	40.25	43.60	74.00	-30.40	Peak
3	4983.99	50.72	31.34	5.99	40.21	47.84	74.00	-26.16	Peak
4	10888.51	41.02	40.48	8.84	40.59	49.75	74.00	-24.25	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	58.35	28.50	4.53	40.95	50.43	74.00	-23.57	Peak
2	3983.75	48.67	29.77	5.41	40.33	43.52	74.00	-30.48	Peak
3	4958.68	47.01	31.23	5.97	40.22	43.99	74.00	-30.01	Peak
4	9685.35	40.51	39.27	8.60	39.84	48.54	74.00	-25.46	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	56.45	28.50	4.53	40.95	48.53	74.00	-25.47	Peak
2	4983.99	46.97	31.34	5.99	40.21	44.09	74.00	-29.91	Peak
3	6379.86	44.41	33.32	6.89	39.20	45.42	74.00	-28.58	Peak
4	9935.05	43.14	39.30	8.60	39.89	51.15	74.00	-22.85	Peak

STEMO710:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3973.62	42.89	29.75	5.40	40.35	37.69	74.00	-36.31	Peak
2	5747.59	41.76	31.90	6.67	39.36	40.97	74.00	-33.03	Peak
3	6851.19	41.76	34.40	7.41	39.39	44.18	74.00	-29.82	Peak
4	10944.09	40.45	40.50	8.82	40.64	49.13	74.00	-24.87	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3096.33	44.14	28.79	4.58	40.88	36.63	74.00	-37.37	Peak
2	4797.27	42.11	31.29	5.88	40.29	38.99	74.00	-35.01	Peak
3	7820.82	40.87	36.28	8.01	39.98	45.18	74.00	-28.82	Peak
4	10944.09	39.93	40.50	8.82	40.64	48.61	74.00	-25.39	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3096.33	43.15	28.79	4.58	40.88	35.64	74.00	-38.36	Peak
2	3903.44	43.09	29.70	5.32	40.43	37.68	74.00	-36.32	Peak
3	6203.70	41.26	32.71	6.77	39.20	41.54	74.00	-32.46	Peak
4	10400.86	39.39	39.90	8.92	40.14	48.07	74.00	-25.93	Peak

Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	50.93	28.90	4.76	40.82	43.77	74.00	-30.23	Peak
2	4267.18	50.81	30.07	5.81	40.49	46.20	74.00	-27.80	Peak
3	4883.52	45.87	31.20	5.93	40.25	42.75	74.00	-31.25	Peak
4	10916.26	41.56	40.50	8.83	40.62	50.27	74.00	-23.73	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4055.37	44.05	29.90	5.51	40.26	39.20	74.00	-34.80	Peak
2	7081.70	41.00	35.55	7.40	39.55	44.40	74.00	-29.60	Peak
3	8506.17	42.64	37.21	8.24	40.20	47.89	74.00	-26.11	Peak
4	10888.51	41.45	40.48	8.84	40.59	50.18	74.00	-23.82	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2927.69	48.51	28.50	4.53	41.00	40.54	74.00	-33.46	Peak
2	4958.68	46.37	31.23	5.97	40.22	43.35	74.00	-30.65	Peak
3	7432.62	42.00	36.20	7.73	39.91	46.02	74.00	-27.98	Peak
4	9935.05	41.46	39.30	8.60	39.89	49.47	74.00	-24.53	Peak

BLE 2Mbps:**STEMO730:**

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	58.52	28.50	4.53	40.96	50.59	74.00	-23.41	Peak
2	4983.99	48.95	31.34	5.99	40.21	46.07	74.00	-27.93	Peak
3	7961.43	42.21	36.92	8.03	39.95	47.21	74.00	-26.79	Peak
4	10944.09	41.25	40.50	8.82	40.64	49.93	74.00	-24.07	Peak
Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	58.48	28.50	4.53	40.95	50.56	74.00	-23.44	Peak
2	3983.75	48.68	29.77	5.41	40.33	43.53	74.00	-30.47	Peak
3	4983.99	49.49	31.34	5.99	40.21	46.61	74.00	-27.39	Peak
4	9611.66	40.54	39.12	8.60	39.82	48.44	74.00	-25.56	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2481.23	43.67	27.34	4.18	41.04	34.15	74.00	-39.85	Peak
2	3993.90	48.13	29.79	5.43	40.32	43.03	74.00	-30.97	Peak
3	4883.52	47.17	31.20	5.93	40.25	44.05	74.00	-29.95	Peak
4	10971.98	40.81	40.50	8.81	40.67	49.45	74.00	-24.55	Peak
Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4983.99	50.03	31.34	5.99	40.21	47.15	74.00	-26.85	Peak
2	6379.86	42.35	33.32	6.89	39.20	43.36	74.00	-30.64	Peak
3	8002.06	41.27	37.00	8.04	39.94	46.37	74.00	-27.63	Peak
4	10916.26	40.84	40.50	8.83	40.62	49.55	74.00	-24.45	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4065.71	43.28	29.90	5.52	40.25	38.45	74.00	-35.55	Peak
2	4958.68	43.40	31.23	5.97	40.22	40.38	74.00	-33.62	Peak
3	8083.96	40.00	37.00	8.05	39.92	45.13	74.00	-28.87	Peak
4	10888.51	39.36	40.48	8.84	40.59	48.09	74.00	-25.91	Peak
Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3534.54	41.79	29.14	5.14	40.97	35.10	74.00	-38.90	Peak
2	4958.68	41.24	31.23	5.97	40.22	38.22	74.00	-35.78	Peak
3	7117.84	39.72	35.45	7.44	39.59	43.02	74.00	-30.98	Peak
4	10374.42	39.43	39.82	8.90	40.12	48.03	74.00	-25.97	Peak

STEMO720:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	59.05	28.50	4.53	40.96	51.12	74.00	-22.88	Peak
2	3993.90	46.85	29.79	5.43	40.32	41.75	74.00	-32.25	Peak
3	4809.50	48.95	31.28	5.89	40.28	45.84	74.00	-28.16	Peak
4	4996.69	47.22	31.39	6.00	40.20	44.41	74.00	-29.59	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	58.24	28.50	4.53	40.96	50.31	74.00	-23.69	Peak
2	4267.18	48.56	30.07	5.81	40.49	43.95	74.00	-30.05	Peak
3	4809.50	47.91	31.28	5.89	40.28	44.80	74.00	-29.20	Peak
4	4996.69	50.28	31.39	6.00	40.20	47.47	74.00	-26.53	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	57.66	28.50	4.53	40.95	49.74	74.00	-24.26	Peak
2	3993.90	48.02	29.79	5.43	40.32	42.92	74.00	-31.08	Peak
3	4883.52	47.90	31.20	5.93	40.25	44.78	74.00	-29.22	Peak
4	8002.06	42.59	37.00	8.04	39.94	47.69	74.00	-26.31	Peak

Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	55.18	28.50	4.53	40.95	47.26	74.00	-26.74	Peak
2	3983.75	45.82	29.77	5.41	40.33	40.67	74.00	-33.33	Peak
3	4883.52	47.62	31.20	5.93	40.25	44.50	74.00	-29.50	Peak
4	4996.69	47.25	31.39	6.00	40.20	44.44	74.00	-29.56	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	59.55	28.50	4.53	40.96	51.62	74.00	-22.38	Peak
2	3993.90	48.14	29.79	5.43	40.32	43.04	74.00	-30.96	Peak
3	4983.99	49.84	31.34	5.99	40.21	46.96	74.00	-27.04	Peak
4	9834.41	40.13	39.37	8.60	39.87	48.23	74.00	-25.77	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	59.07	28.50	4.53	40.96	51.14	74.00	-22.86	Peak
2	4676.70	41.40	31.05	5.86	40.34	37.97	74.00	-36.03	Peak
3	4983.99	47.98	31.34	5.99	40.21	45.10	74.00	-28.90	Peak
4	6379.86	45.89	33.32	6.89	39.20	46.90	74.00	-27.10	Peak

STEMO710:

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2927.69	46.99	28.50	4.53	41.00	39.02	74.00	-34.98	Peak
2	4797.27	46.10	31.29	5.88	40.29	42.98	74.00	-31.02	Peak
3	7045.74	42.27	35.28	7.37	39.51	45.41	74.00	-28.59	Peak
4	11486.41	40.85	40.49	9.19	40.21	50.32	74.00	-23.68	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4797.27	42.82	31.29	5.88	40.29	39.70	74.00	-34.30	Peak
2	6140.85	39.80	32.58	6.73	39.20	39.91	74.00	-34.09	Peak
3	8681.17	39.48	37.66	8.30	40.13	45.31	74.00	-28.69	Peak
4	10191.20	39.64	39.29	8.75	40.01	47.67	74.00	-26.33	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3543.55	42.64	29.17	5.16	40.99	35.98	74.00	-38.02	Peak
2	6577.75	40.64	34.16	7.22	39.26	42.76	74.00	-31.24	Peak
3	8022.46	39.74	37.00	8.04	39.93	44.85	74.00	-29.15	Peak
4	10723.47	39.98	40.07	8.91	40.42	48.54	74.00	-25.46	Peak


Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2912.82	46.95	28.50	4.51	41.01	38.95	74.00	-35.05	Peak
2	4883.52	46.03	31.20	5.93	40.25	42.91	74.00	-31.09	Peak
3	7840.75	42.73	36.36	8.01	39.98	47.12	74.00	-26.88	Peak
4	10971.98	41.57	40.50	8.81	40.67	50.21	74.00	-23.79	Peak


Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4736.60	41.38	31.17	5.86	40.31	38.10	74.00	-35.90	Peak
2	4958.68	44.02	31.23	5.97	40.22	41.00	74.00	-33.00	Peak
3	6172.20	41.49	32.64	6.75	39.20	41.68	74.00	-32.32	Peak
4	10888.51	40.75	40.48	8.84	40.59	49.48	74.00	-24.52	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3049.39	45.63	28.60	4.54	40.92	37.85	74.00	-36.15	Peak
2	4958.68	46.94	31.23	5.97	40.22	43.92	74.00	-30.08	Peak
3	6886.15	43.10	34.47	7.40	39.41	45.56	74.00	-28.44	Peak
4	10944.09	41.33	40.50	8.82	40.64	50.01	74.00	-23.99	Peak

6. TEST SETUP PHOTOS

Radiated Emission

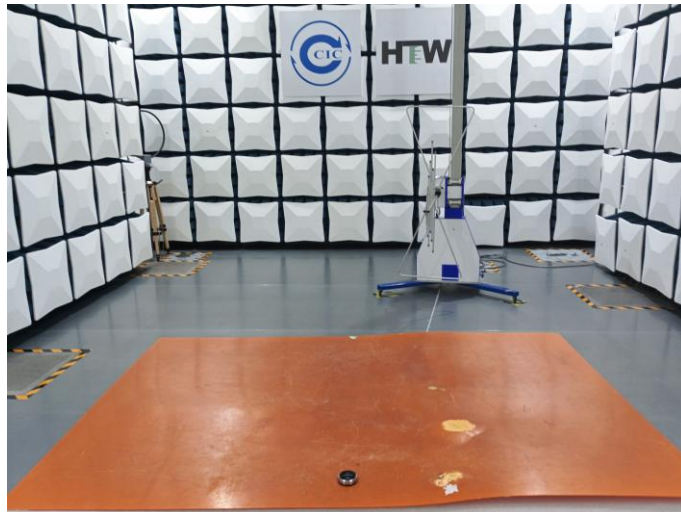

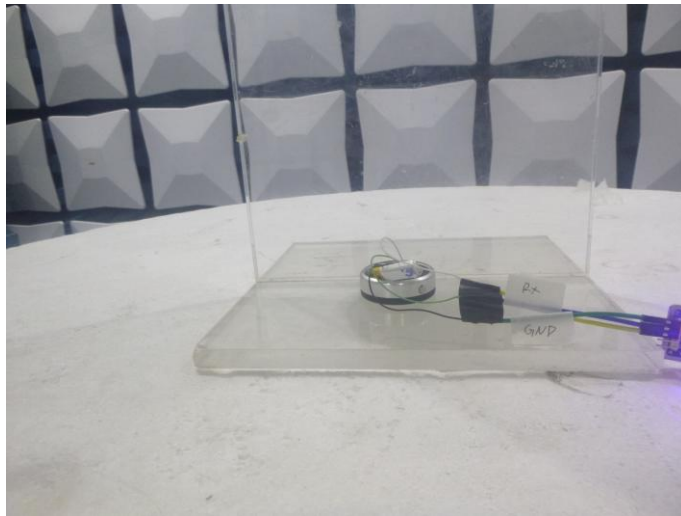




AC Conducted Emission





7. EXTERNAL AND INTERNAL PHOTOS


7.1. External Photos



STEMO730

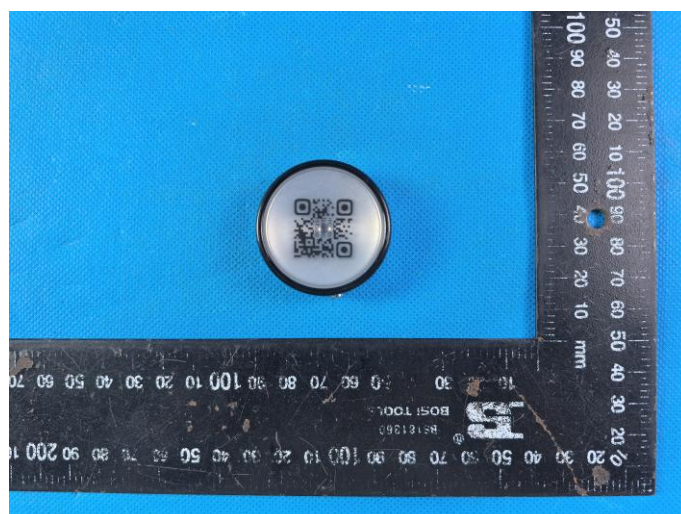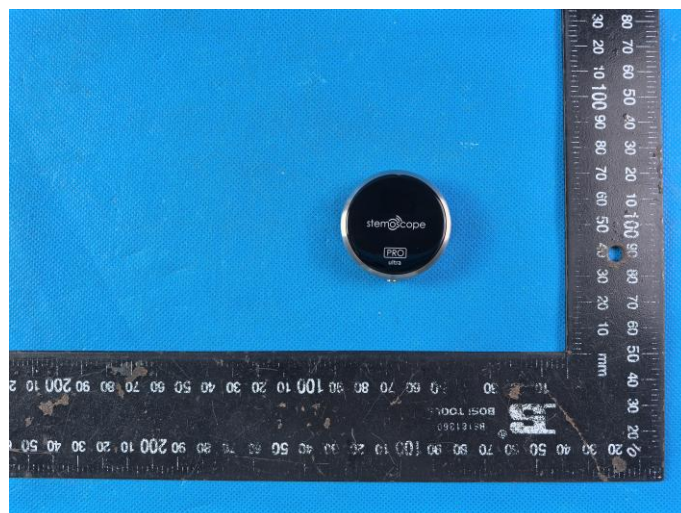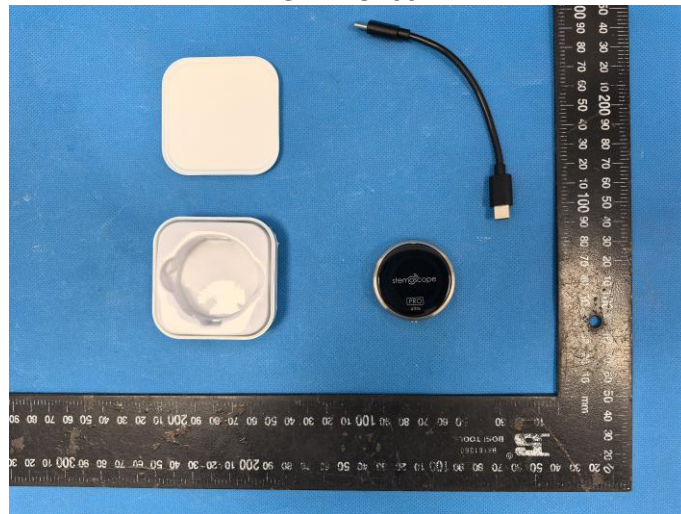

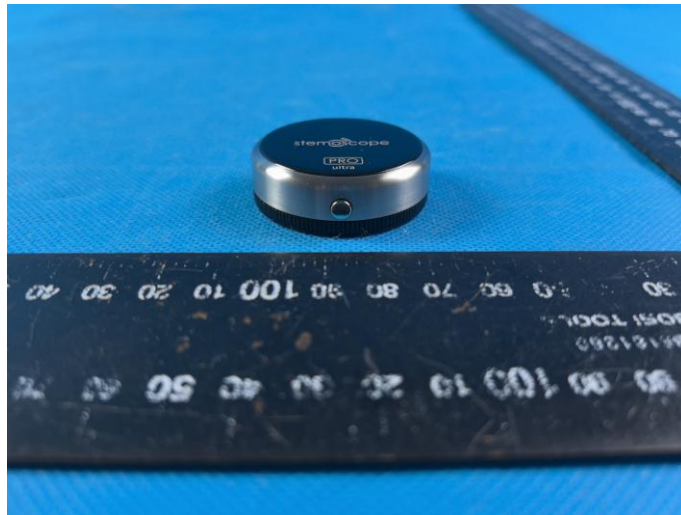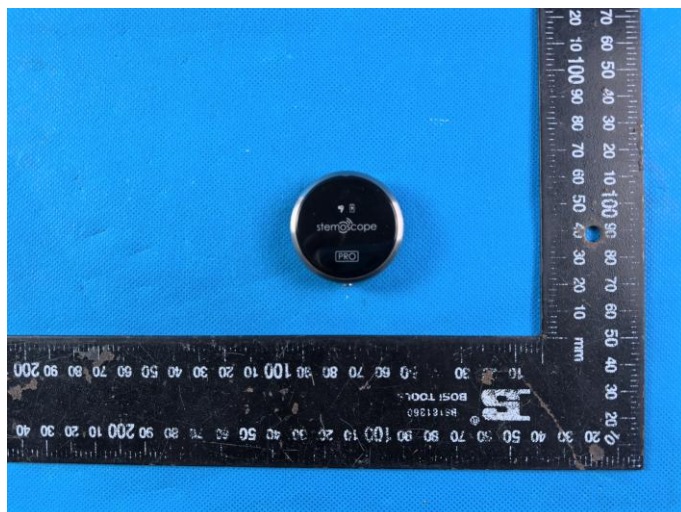

**STEMO720**

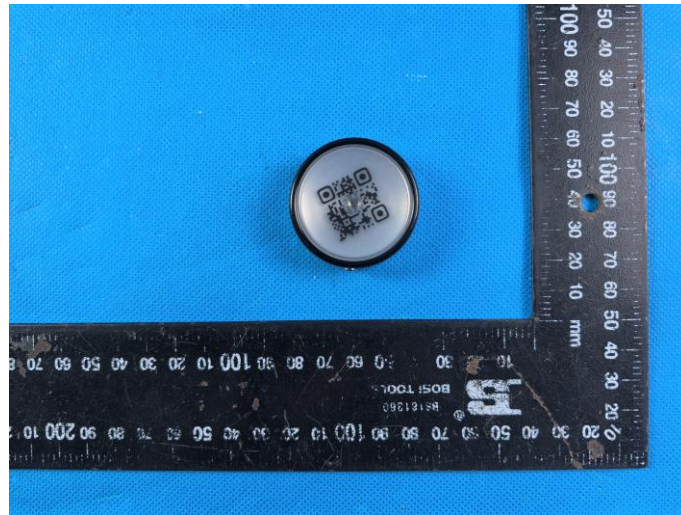

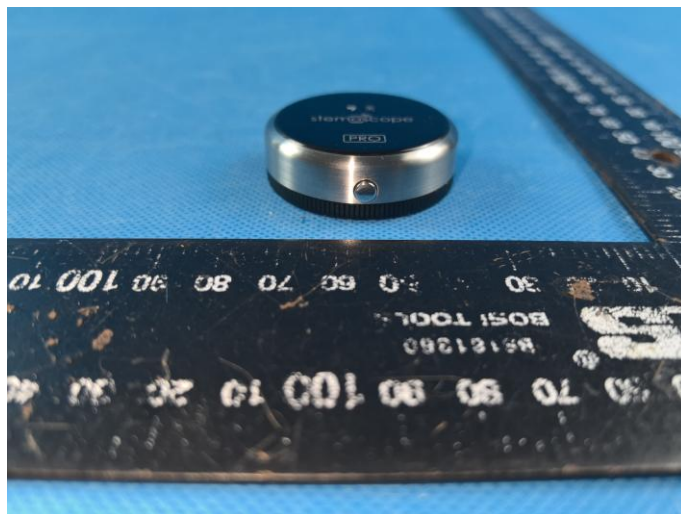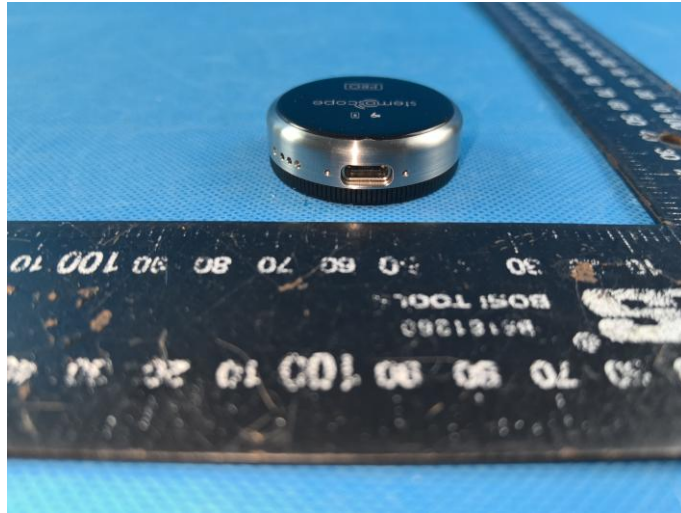**STEMO710**

