



The Photos of SAR test

No. I19Z60464-SEM06

For

Jiaxing Yongrui Electron Technology Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Modelname: SM-T295

With

Hardware Version: V0.3

Software Version: T295XXU0ASE8

FCC ID: ZCASMT295



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

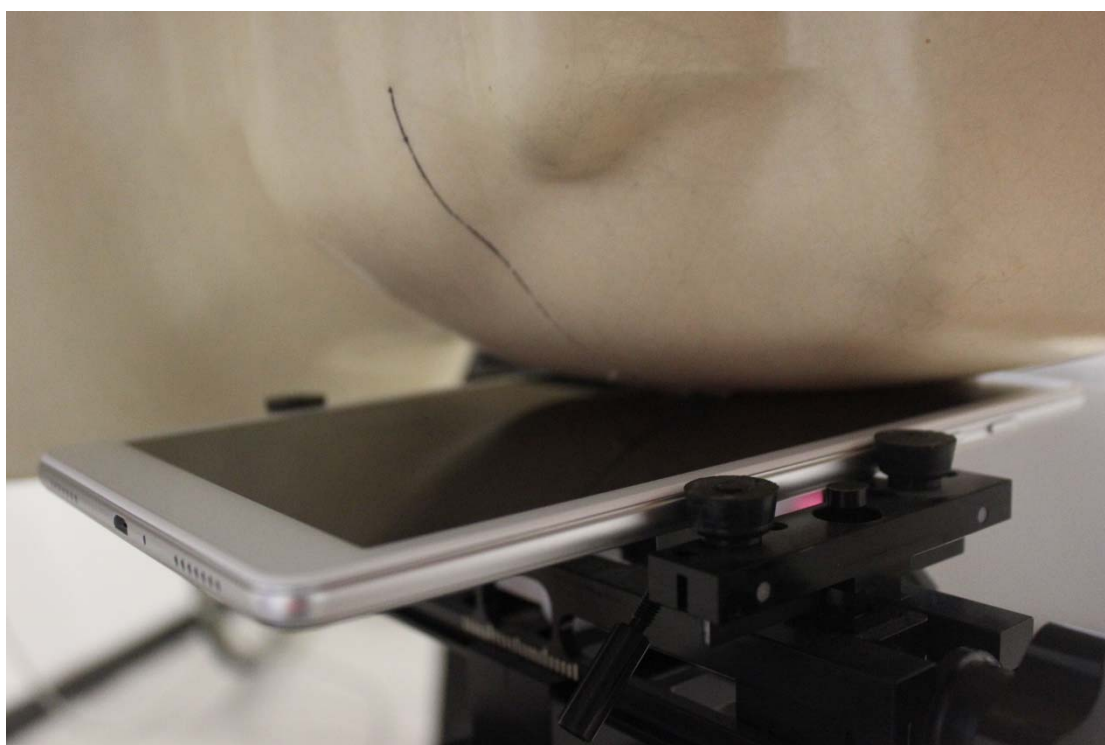


Picture 2: Left Hand Touch Cheek Position

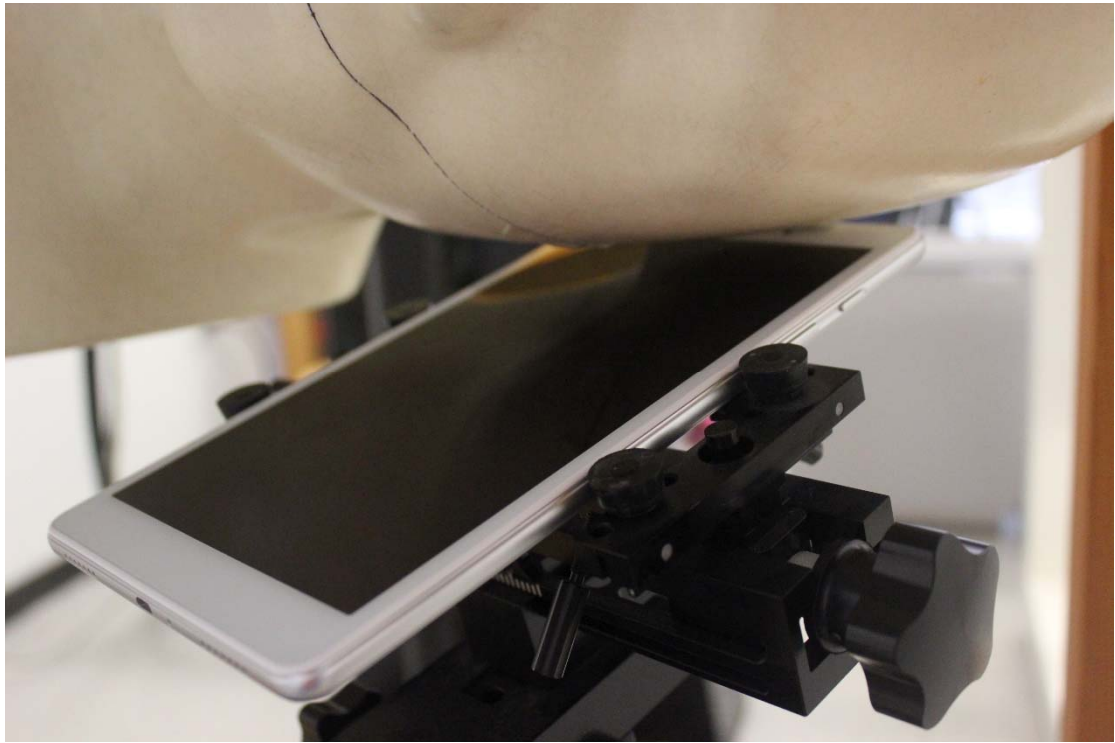

Picture 3: Left Hand Tilt 15° Position

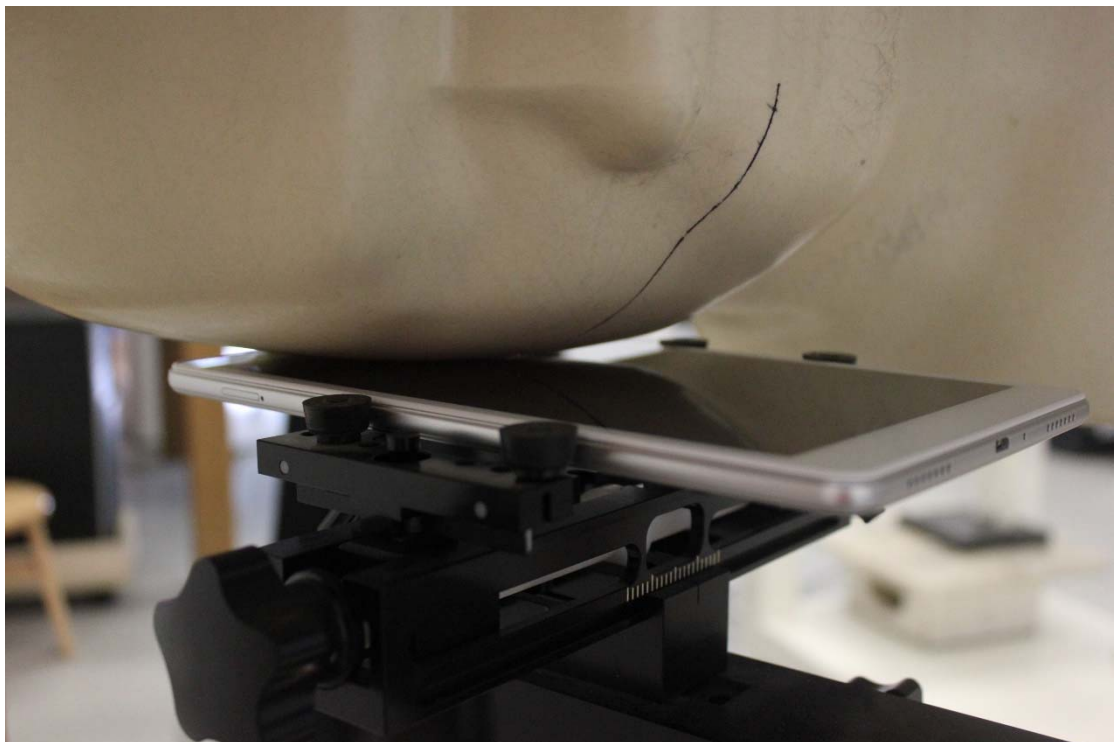

Picture 4: Right Hand Touch Cheek Position

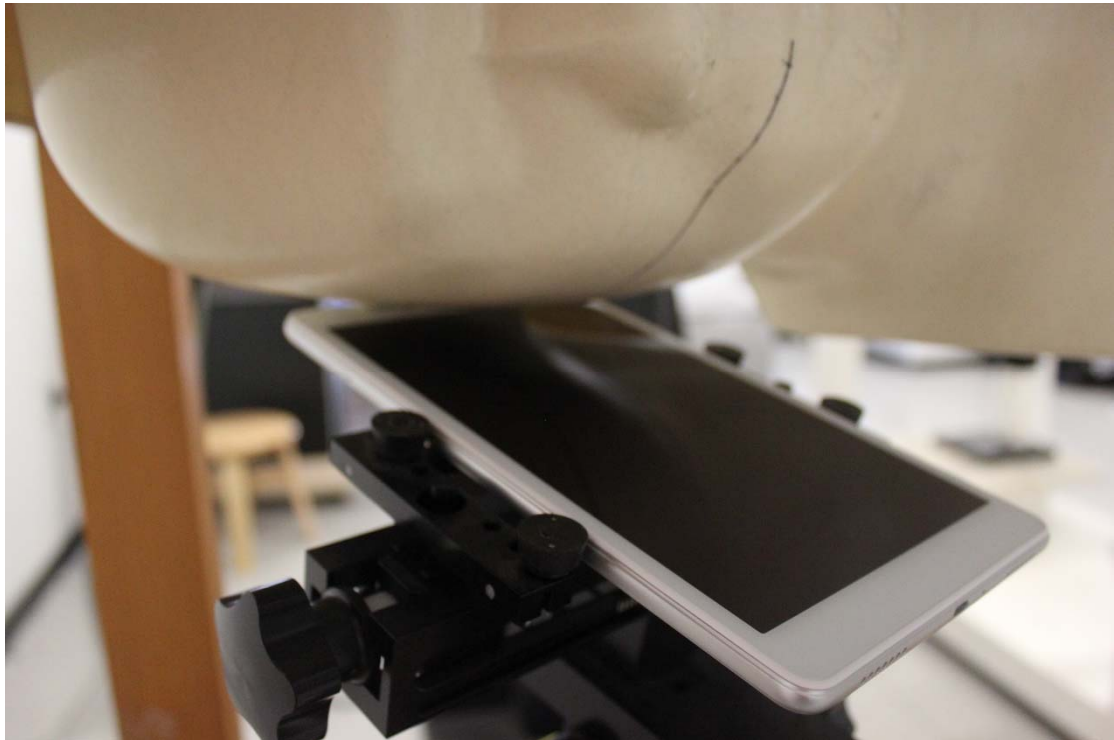

Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance =0/4/14/19/29/mm between the EUT and the phantom bottom:




Picture 6: Left 0mm




Picture 7: Left 14mm

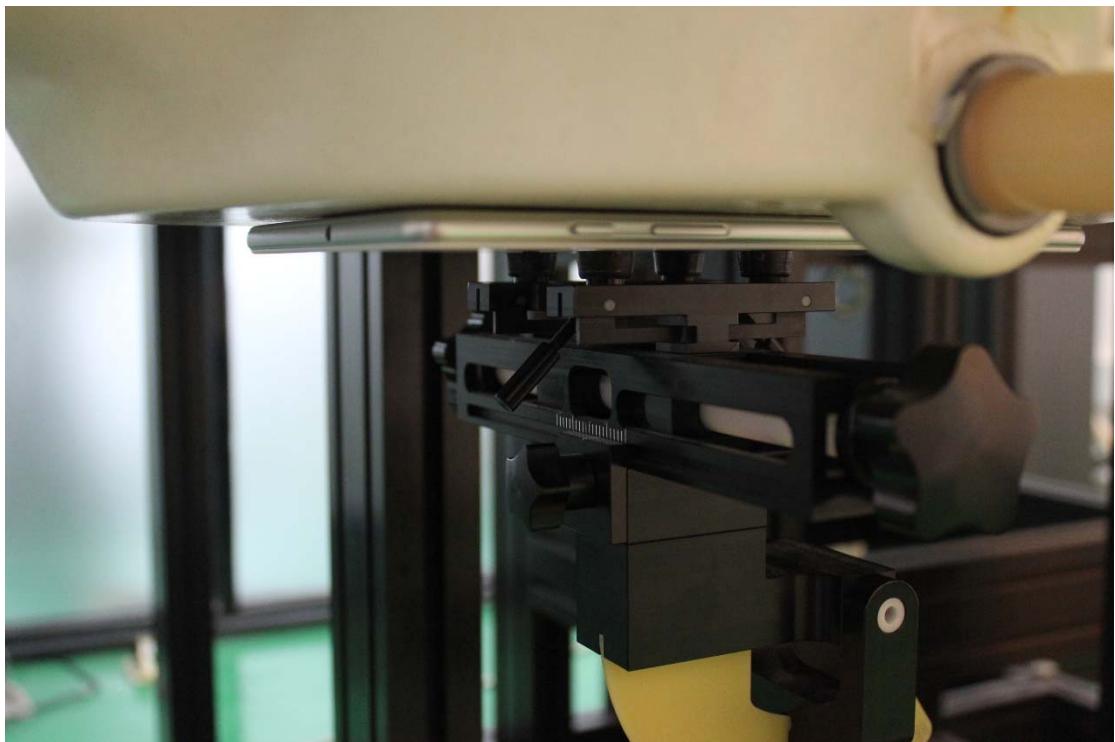


Picture 8: Rear 0mm

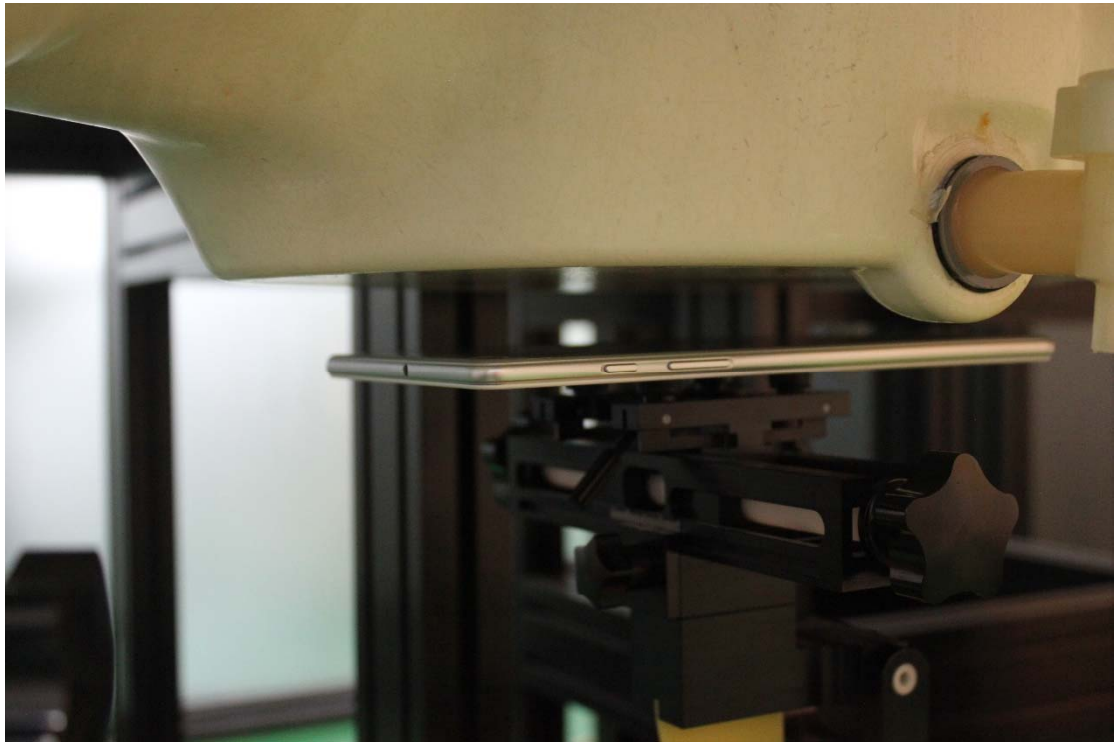

Picture 8: Rear 19mm

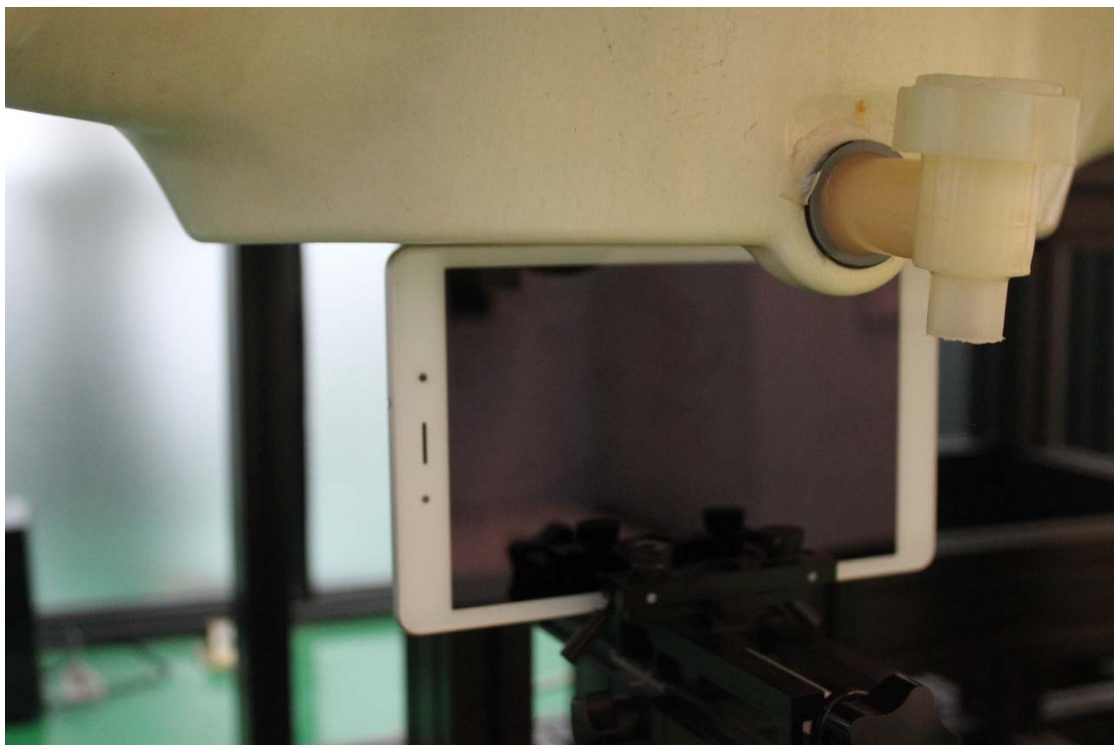

Picture 9: Right 0mm

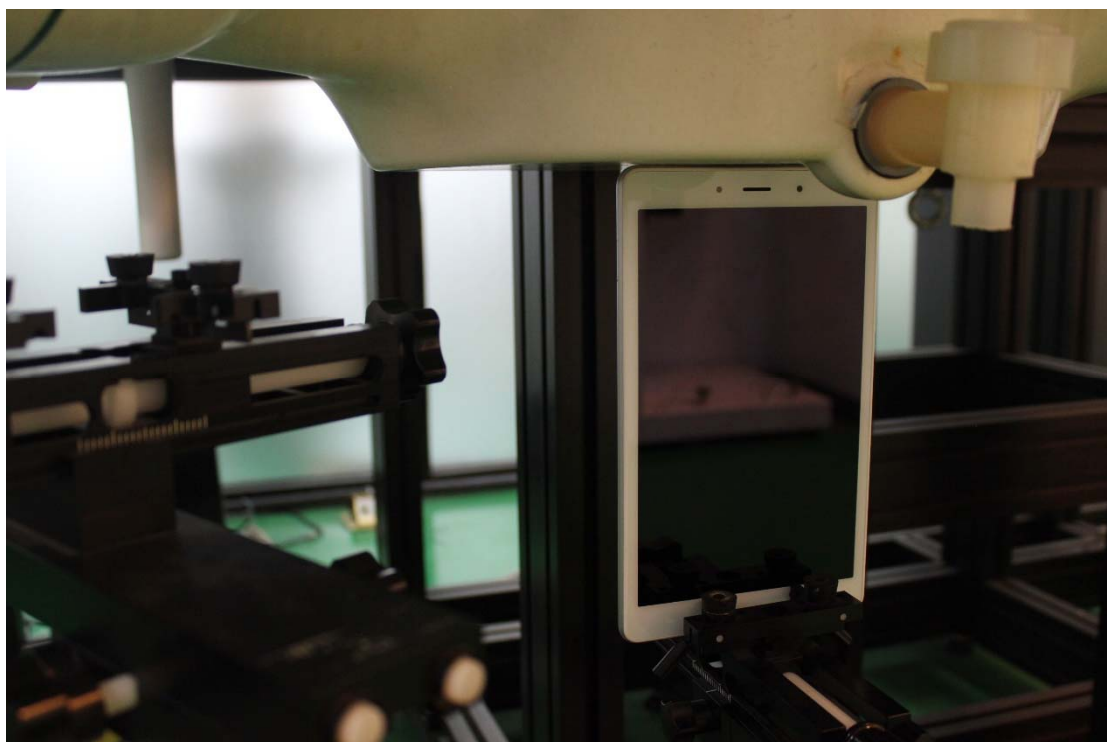

Picture 10: Top 0mm



Picture 10: Top 4mm



Picture 12: Top 29mm