

Prüfbericht-Nr.: Test report no.:	CN213MUT 003	Auftrags-Nr.: Order no.:	244290778	Seite 1 von 53 Page 1 of 53
Kunden-Referenz-Nr.: Client reference no.:	P00053126	Auftragsdatum: Order date:	2021-01-07	
Auftraggeber: Client:	Dyaco International Inc. (for FCC) 12 th floor, No 111, Songjiang Rd, Taipei City 104, Taiwan, ROC Dyaco Canada Inc (for IC) 5955 Don Murie Street, Niagara Falls, ON L2G 0A9, Canada			
Prüfgegenstand: Test item:	Treadmill			
Bezeichnung / Typ-Nr.: Identification / Type no.:	TRX5500(XTERRA), GT90D(DYACO) FCC ID: 2AHVL-GT90DNT041 IC: 22282-GT90DNT041			
Auftrags-Inhalt: Order content:	Complete test			
Prüfgrundlage: Test specification:	FCC CFR47 Part 15, Subpart C Section 15.247 RSS-Gen Issue 5, Amendment 2, February 2021 RSS-247 Issue 2, February 2017 ANSI C63.10: 2013			
Wareneingangsdatum: Date of sample receipt:	2021-05-16			
Prüfmuster-Nr.: Test sample no.:	A003053162-001 A003053162-002			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by: 		genehmigt von: authorized by: 		
Datum: Date: 2021-11-09 Signed by: Elliot Zhang		Ausstellungsdatum: Issue date: 2021-11-09 Signed by: Hongfei Wu		
Stellung / Position: PE/Elliot Zhang		Stellung / Position: Reviewer/Hongfei Wu		
Sonstiges / HVIN: TRX5500, GT90D Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				



TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 6dB & 99% BANDWIDTH

RESULT: Pass

5.1.3 PEAK OUTPUT POWER

RESULT: Pass

5.1.4 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.5 CONDUCTED BAND EDGE AND OUT-OF BAND EMISSIONS

RESULT: Pass

5.2.1 CONDUCTED EMISSION

RESULT: Pass

5.3.1 RADIATED BAND-EDGE

RESULT: Pass

5.3.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS.....	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
3.	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS.....	7
3.3	INDEPENDENT OPERATION MODES.....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS.....	8
4.	TEST SET-UP AND OPERATION MODES.....	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
5.	TEST RESULTS	10
5.1	CONDUCTED TESTING AT ANTENNA PORT	10
5.1.1	Antenna Requirement.....	10
5.1.2	6dB & 99% Bandwidth.....	12
5.1.3	Peak Output Power	17
5.1.4	Power Spectral Density	20
5.1.5	Conducted Band Edge and out-of Band Emissions	23
5.2	EMISSION IN THE FREQUENCY RANGE UP TO 30MHZ.....	29
5.2.1	Conducted Emission.....	29
5.3	EMISSION IN THE FREQUENCY RANGE ABOVE 30MHZ	31
5.3.1	Radiated Band-Edge	31
5.3.2	Radiated Spurious Emission.....	34
6.	LIST OF TABLES	54
7.	LIST OF FIGURES	54

1. General Remarks

1.1 Complementary Materials

Null.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shanghai) Co., Ltd.

Shanghai TUV Rheinland Building No. 177, 178 Lane 777, West Guangzhong Rd, Jing'an District, Shanghai, China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 958801.

The Innovation, Science and Economic Development Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under chambers filing number 2932F.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
3m modified semi-anechoic chamber	Frankonia	SAC3	G1811378	2022-06-27
Bilog antenna	Teseq	CBL 6112D	G1811425	2023-03-10
EMI test receiver	Rohde & Schwarz	ESCI	G1811402	2022-09-17
Spectrum analyser	Rohde & Schwarz	FSV40	G1822702	2021-11-01
Preamplifier	Taiwan EMCI	EMC184045SE	G1825372	2023-03-06
Log periodic antenna	Rohde & Schwarz	HL050	G1811417	2023-03-10
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	9170-305	2022-07-08
Preamplifier	Taiwan EMCI	EMC051845SE	G1825371	2023-03-06
Spectrum Analyzer	Keysight	N9020A	MY54500180	2022-09-08
Thermohygrometer	Testo	608-H1	1241320614	2021-10-13
EMI test receiver	R&S	ESIB26	G1811380	2023-03-06
Artificial main network	R&S	ENV432	G1830003	2022-11-01
EMC measurement software	R&S	EMC32 (Ver 10.20.01)	G1824845	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Conducted Emission	150kHz - 30MHz	±3.39dB
Radiated Emission	9kHz – 30MHz	±2.93dB
	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Treadmill which supports Wi-Fi and Bluetooth. The aim of this report is to evaluate the RF characteristic of the Wi-Fi Part of this EUT. For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Description of EUT	
Product Name:	Treadmill
Model No.:	TRX5500,GT90D
Test Voltage:	DC 5V for RF Conducted and Radiated Test AC 120V/60Hz for Conducted Emission Test
Technical Specification of Bluetooth Classic(EW-BLED-26)	
Frequency Range:	2402 to 2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate:	1Mbps(GFSK), 2Mbps($\pi/4$ DQPSK)
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)
Technical Specification of Bluetooth Classic(AP6236)	
Frequency Range:	2402 to 2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate:	1Mbps(GFSK), 2Mbps($\pi/4$ DQPSK), 3Mbps(8DPSK)
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)
Technical Specification of Wi-Fi(AP6236)	
Frequency Range:	2412 to 2462MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (QPSK/BPSK/16QAM/64QAM)
Date Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Antenna Type:	PCB Antenna
Antenna Gain:	2dBi (Provided by the Client)

Note: The above two models are all the same except the model number, so only the GT90D was chosen to perform the test.

3.3 Independent Operation Modes

Table 4: Independent Operation Modes

Test Mode	Operating Mode	Channel Number	Channel Frequency [MHz]
TM1	802.11b	1	2412
TM2	802.11b	6	2437
TM3	802.11b	11	2462
TM4	802.11g	1	2412
TM5	802.11g	6	2437
TM6	802.11g	11	2462
TM7	802.11n-HT20	1	2412
TM8	802.11n-HT20	6	2437
TM9	802.11n-HT20	11	2462
TM10	Normal Operating Mode		

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

Test Software used: Ampak RFTestTool, VER: 5.6

Table 5: Power parameter value

Operating Mode	Power Parameter Value
802.11b	Auto
802.11g	Auto
802.11n-HT20	Auto

4.3 Special Accessories and Auxiliary Equipment

Null.

4.4 Countermeasures to achieve EMC Compliance

Null.

5. Test Results

5.1 Conducted Testing at Antenna Port

5.1.1 Antenna Requirement

RESULT:**Pass**

According to the manufacturer declared, the EUT has one PCB antenna, the directional gain of antenna is 2 dBi and the antenna is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Table 6: Antenna Requirement**FCC 15.203 – Antenna Requirement 1**

Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	Antenna type:	PCB antenna
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2

Requirement:	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.	
Results:	Only one PCB antenna can be used	
Verdict:	Pass	

RSS-Gen 6.4 – External Control

Requirement:	The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the regulatory requirements, including RSS-Gen and the applicable RSSs	
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	PASS	

Prüfbericht - Nr.: CN213MUT 003

Test Report No.

Seite 11 von 54

Page 11 of 54

RSS-Gen 6.8 – Antenna Requirement

Requirement: When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

Results:

a) Antenna Type:	PCB Antenna
b) Manufacture:	N/A
c) Model No.:	N/A
d) Gain with reference to an isotropic radiator:	2dBi

Verdict: PASS

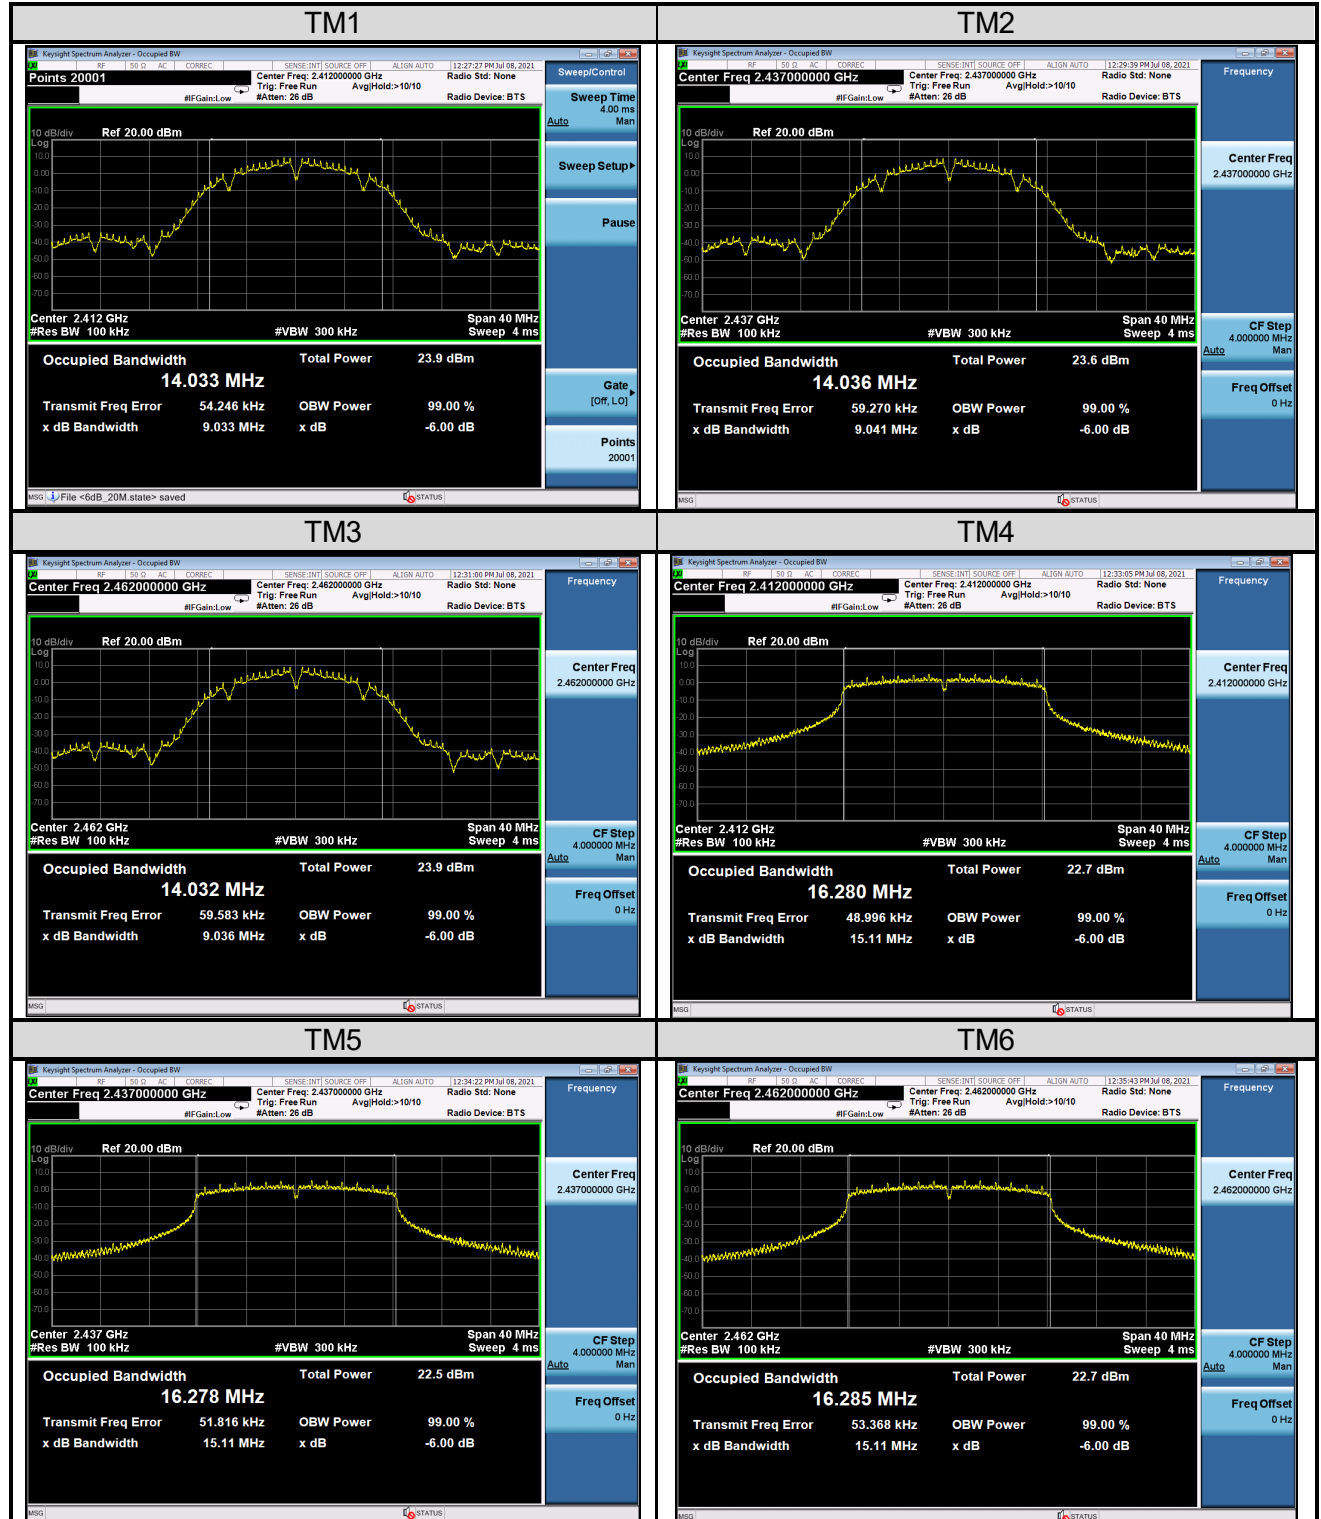
5.1.2 6dB & 99% Bandwidth

RESULT:**Pass**

Date of testing : 2021-07-08
Ambient temperature : 20.6°C
Relative humidity : 58.6%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(a)(2)
RSS-247 Issue 2, February 2017, Clause 5.2(a)
Test procedure : ANSI C63.10: 2013
Test voltage : DC 5V
Test modes applied : TM1 to TM9

Table 7: 6dB & 99% Bandwidth

Test Mode	Data rate/ MCS	CH.	Freq. [MHz]	6dB Bandwidth [MHz]	6dB Bandwidth limit [kHz]	99% Bandwidth [MHz]
TM1	1Mbps	1	2412	9.033	≥500	14.045
TM2	1Mbps	6	2437	9.041	≥500	14.039
TM3	1Mbps	11	2462	9.036	≥500	14.047
TM4	6Mbps	1	2412	15.11	≥500	16.479
TM5	6Mbps	6	2437	15.11	≥500	16.469
TM6	6Mbps	11	2462	15.11	≥500	16.482
TM7	MCS0	1	2412	15.11	≥500	17.570
TM8	MCS0	6	2437	15.11	≥500	17.569
TM9	MCS0	11	2462	15.11	≥500	17.569

Figure 1: 6dB Bandwidth


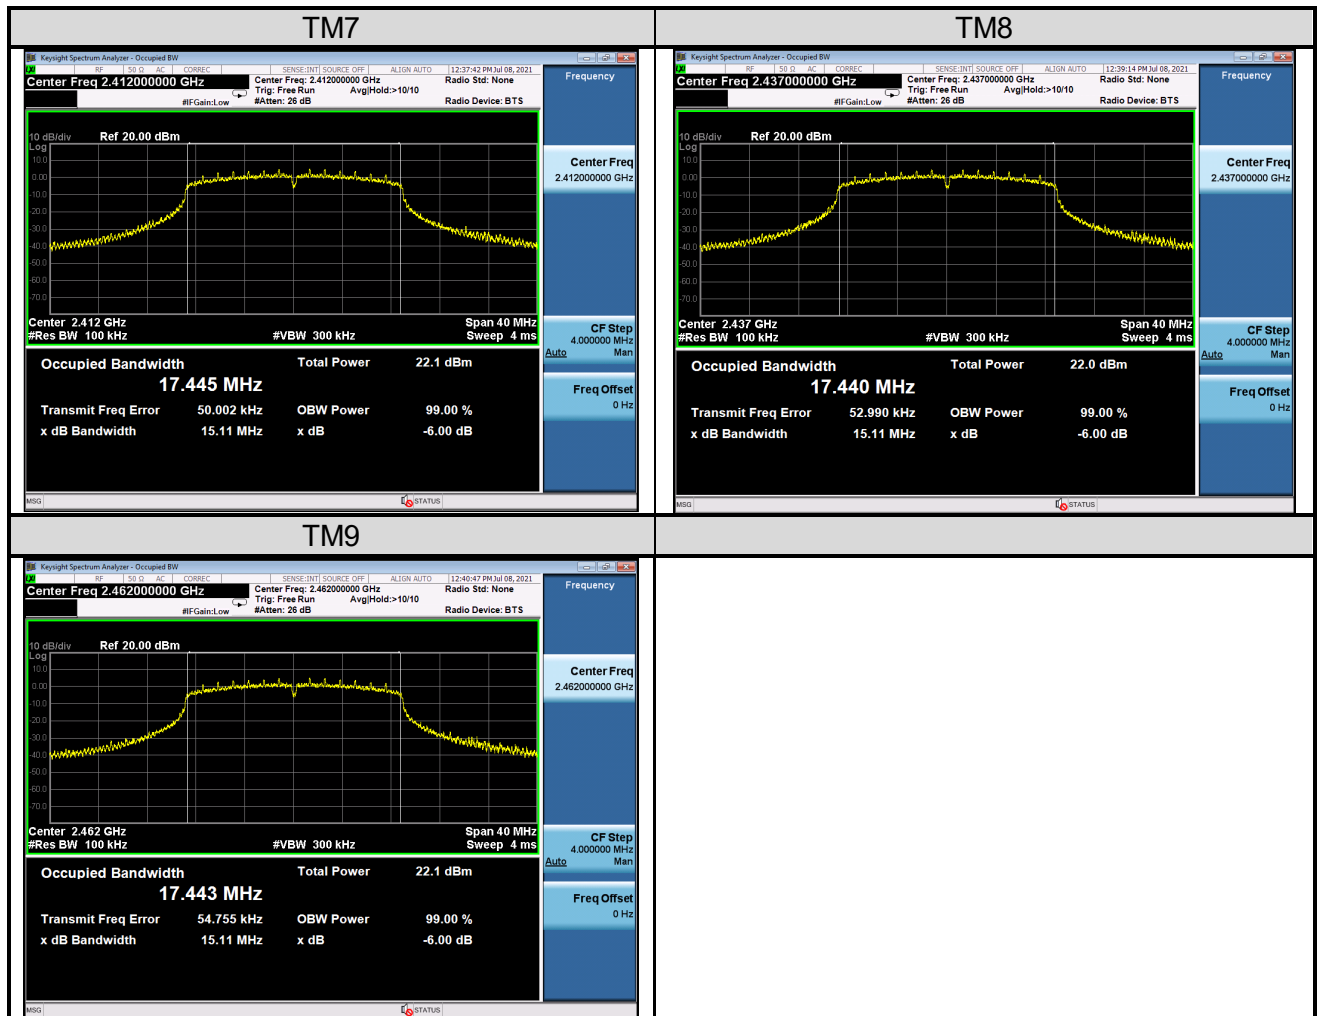
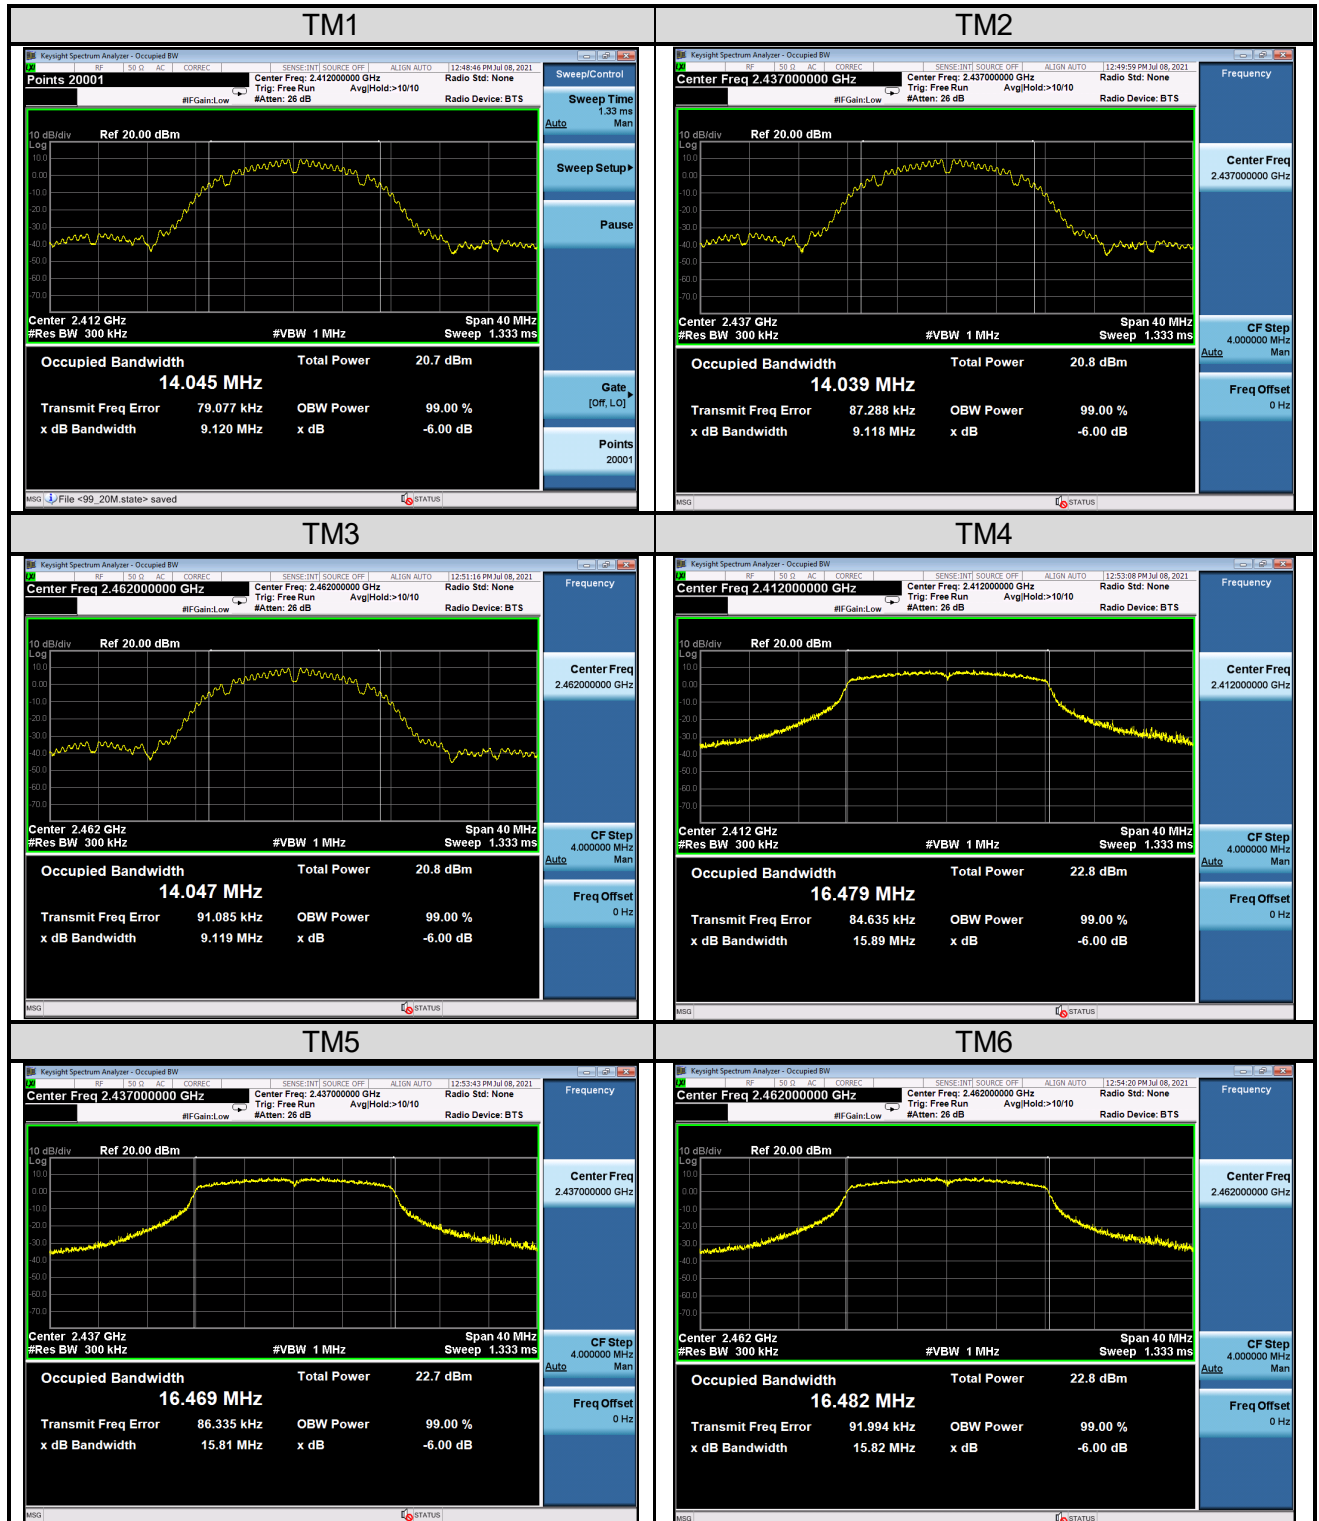
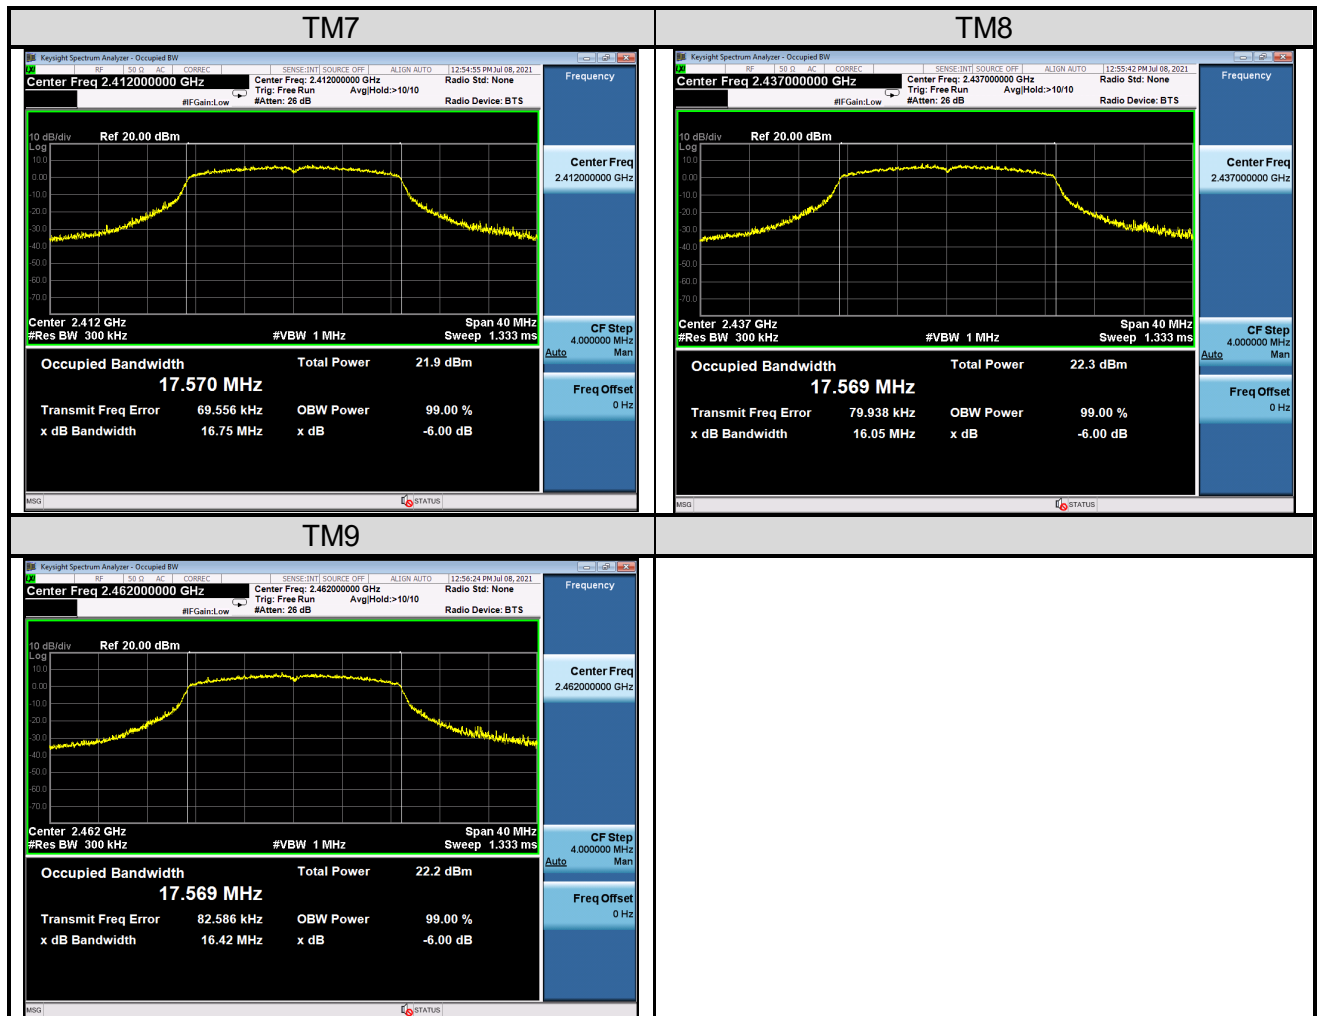
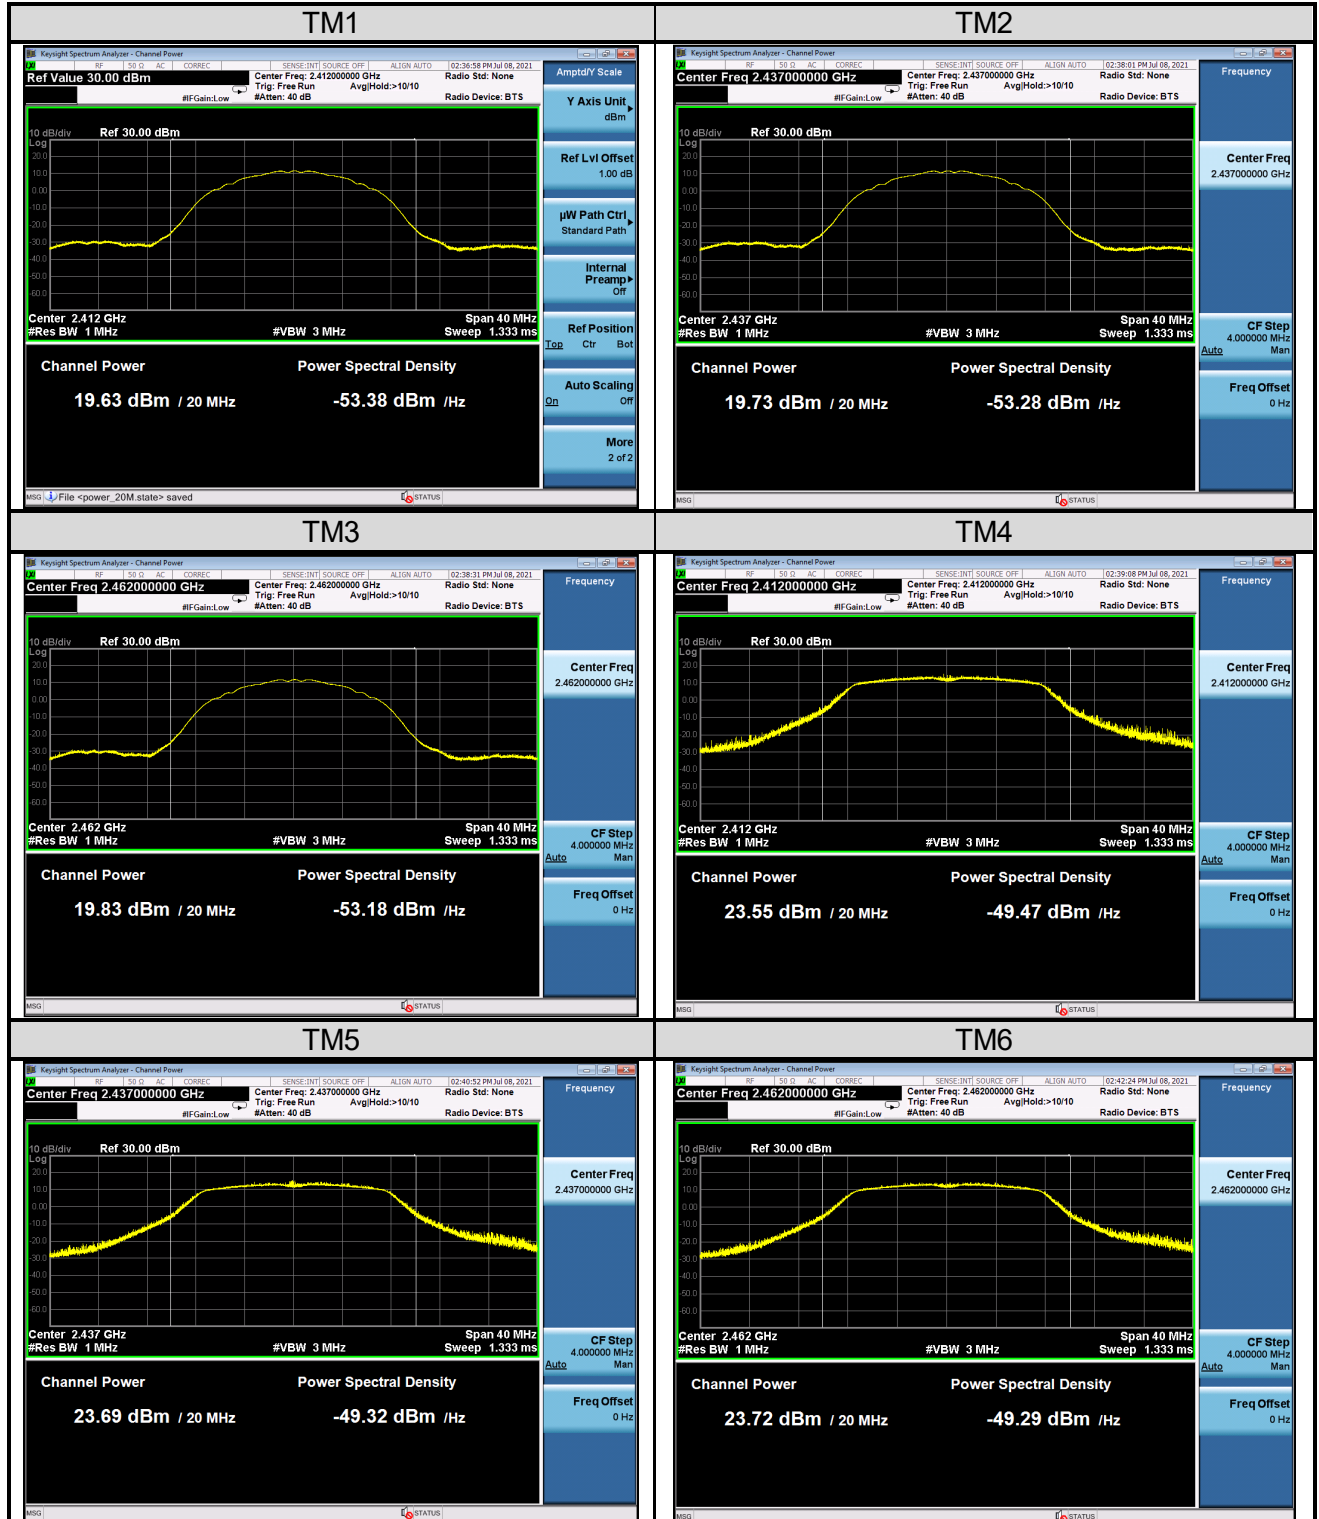
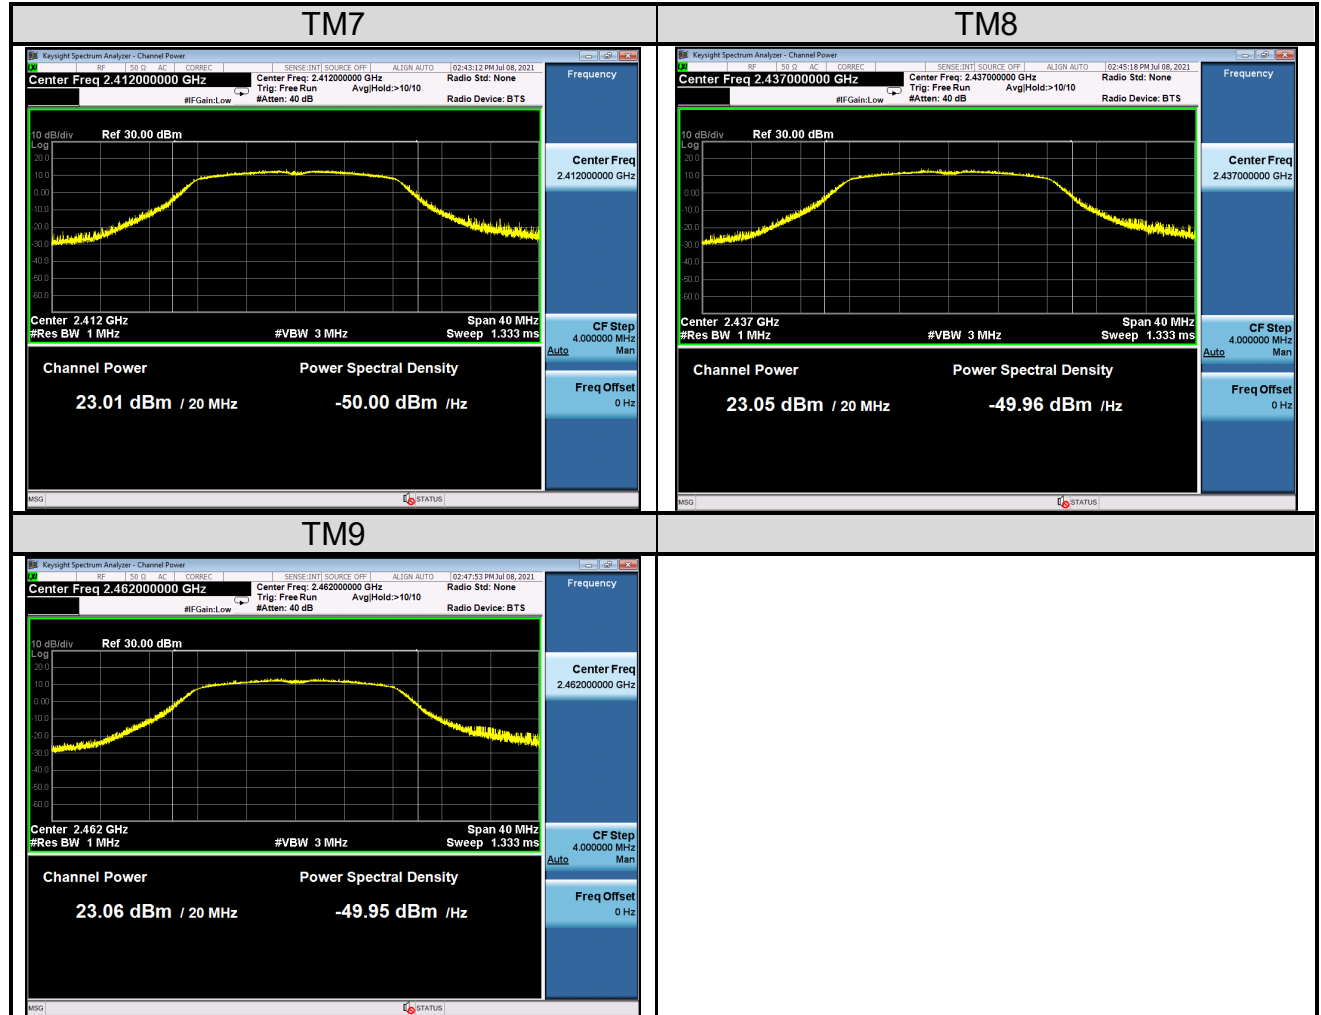


Figure 2: 99% Bandwidth




The cable loss=1dB was provided by the client, and was factored in the result Peak Conducted Output Power

Figure 3: Peak Output Power, TM1 to TM9




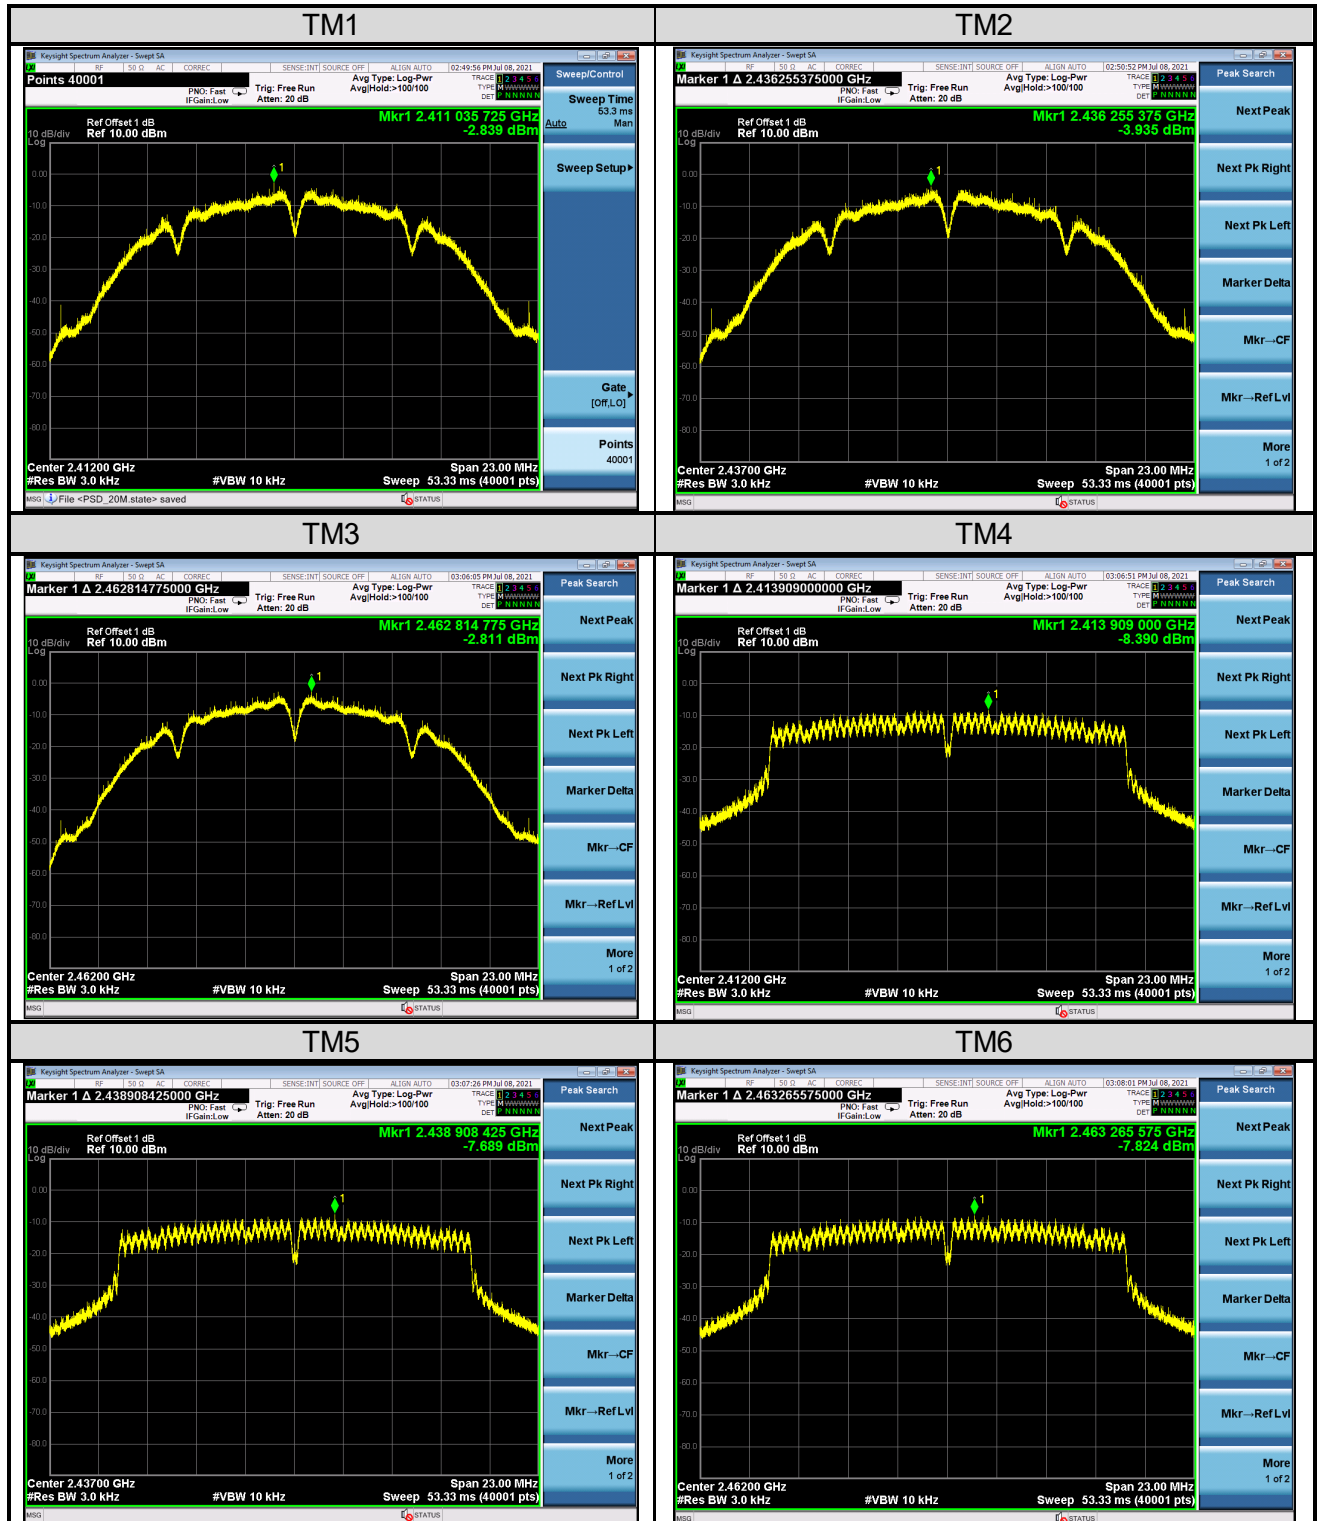
5.1.4 Power Spectral Density

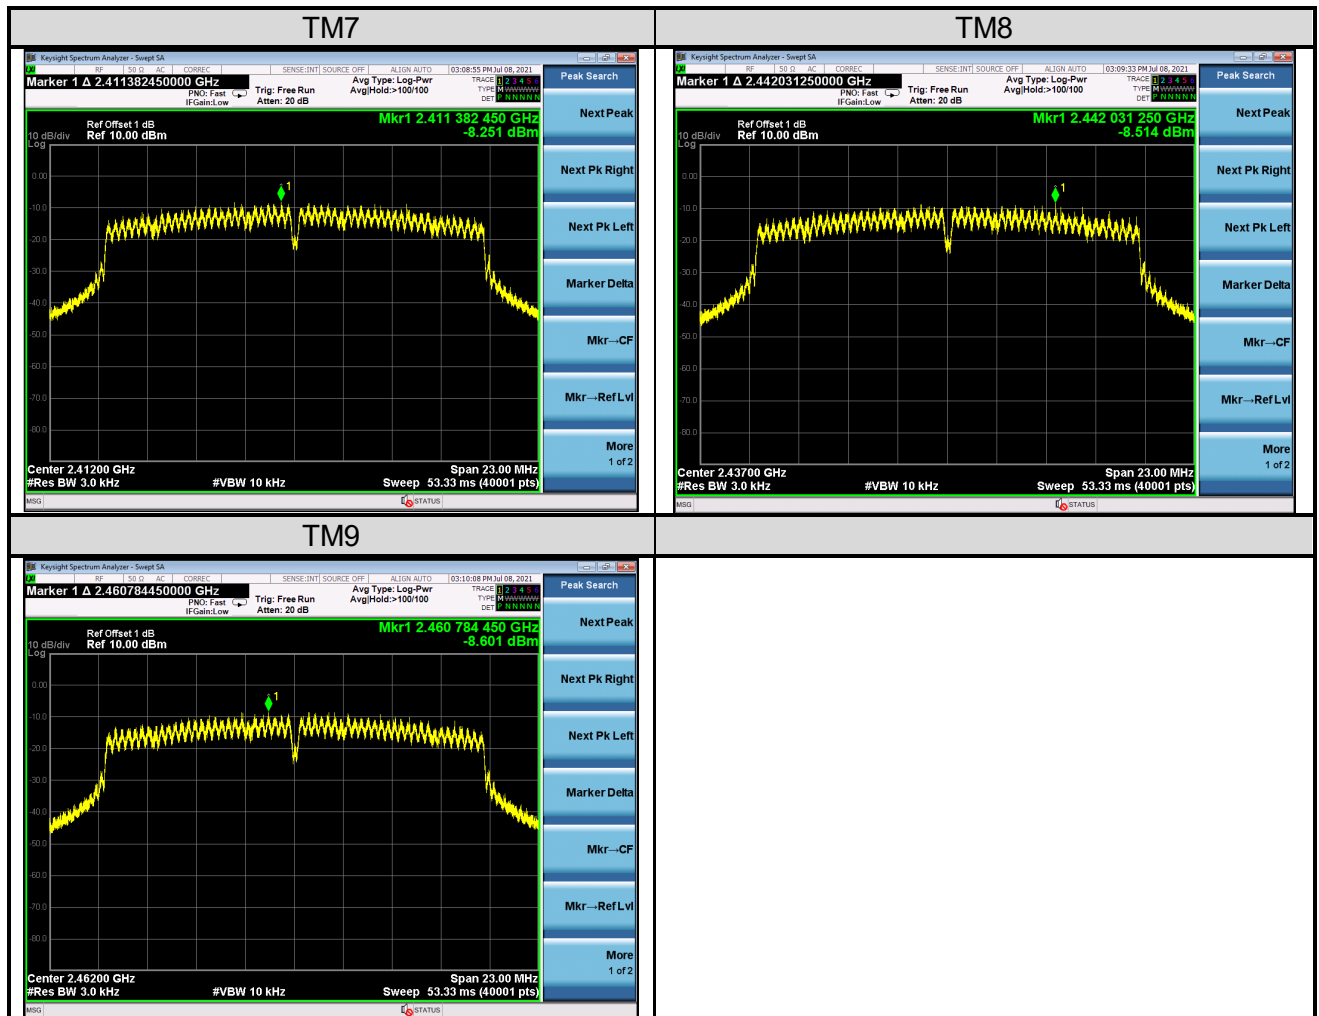
RESULT:**Pass**

Date of testing : 2021-07-08
Ambient temperature : 23.1°C
Relative humidity : 48.5%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(e)
RSS-247 Issue 2, February 2017, Clause 5.2(b)
Test procedure : ANSI C63.10: 2013
Test voltage : DC 5V
Test modes applied : TM1 to TM9

Table 9: Power Spectral Density

Mode	Data rate/ MCS	CH.	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]
TM1	1Mbps	1	2412	-2.839	8
TM2	1Mbps	6	2437	-3.935	8
TM3	1Mbps	11	2462	-2.811	8
TM4	6Mbps	1	2412	-8.390	8
TM5	6Mbps	6	2437	-7.689	8
TM6	6Mbps	11	2462	-7.824	8
TM7	MCS0	1	2412	-8.251	8
TM8	MCS0	6	2437	-8.514	8
TM9	MCS0	11	2462	-8.601	8

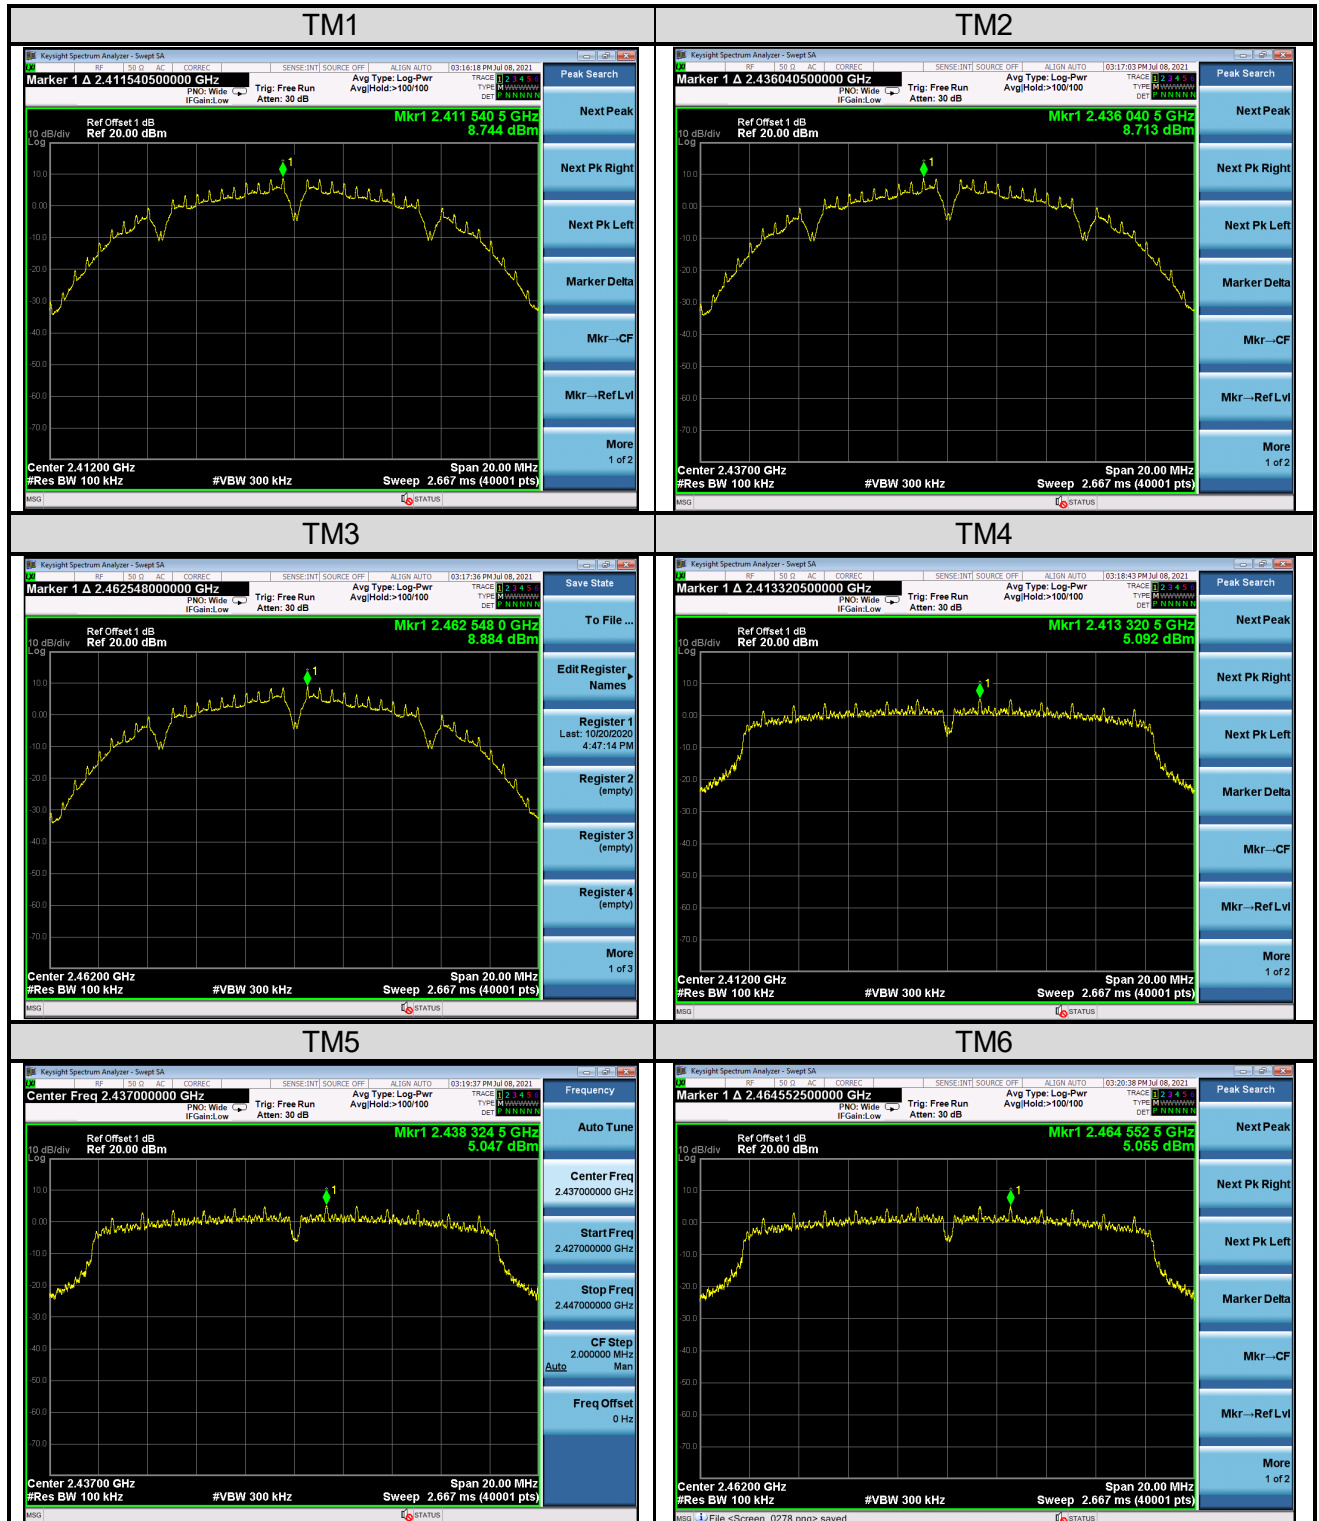
Figure 4: Power Spectral Density




5.1.5 Conducted Band Edge and out-of Band Emissions

RESULT:**Pass**

Date of testing	:	2021-07-08
Ambient temperature	:	21.4°C
Relative humidity	:	56.1%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) RSS-247 Issue 2, February 2017, Clause 5.5
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	DC 5V
Test modes applied	:	TM1 to TM9

Figure 5: Reference level


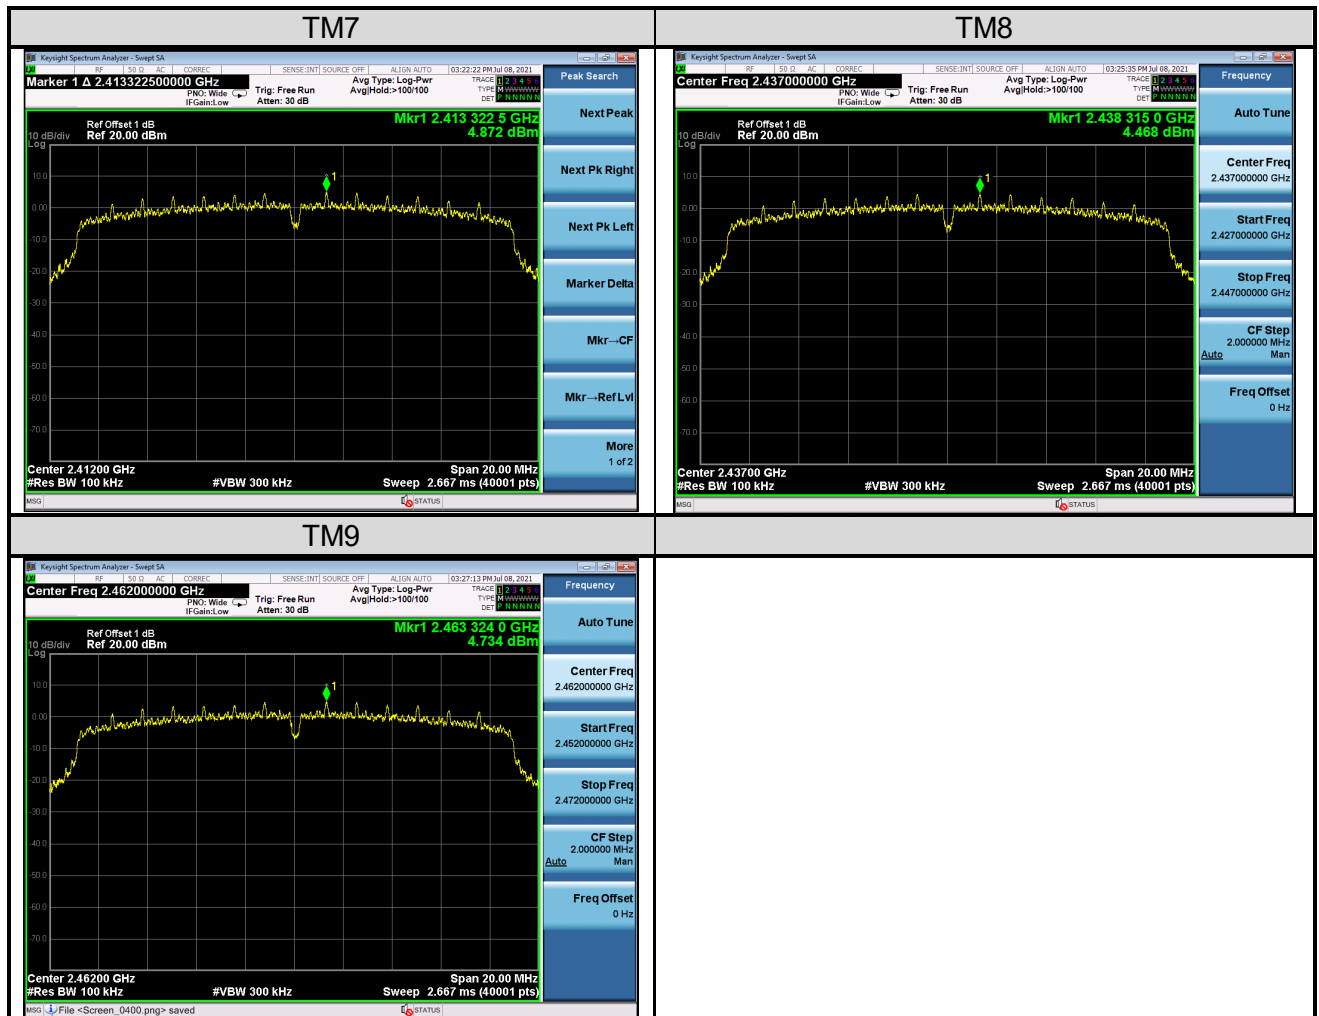


Figure 6: Conducted Spurious Emission
