



Testing Tomorrow's Technology

Application

For

Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247

And

ISED Radio Standards Specification: RSS-Gen Issue 5 and RSS-247 Issue 2

For the

Cognosos, Inc

Model: PCB-10032

FCC ID: 2AKFQ10032

IC: 22165-10032

UST Project: 22-0290

Issue Date: October 27, 2022

Total Pages in This Report: 42

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com



Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:


US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: *Alan Ghasiani*

Title: Compliance Engineer – President

Date October 27, 2022

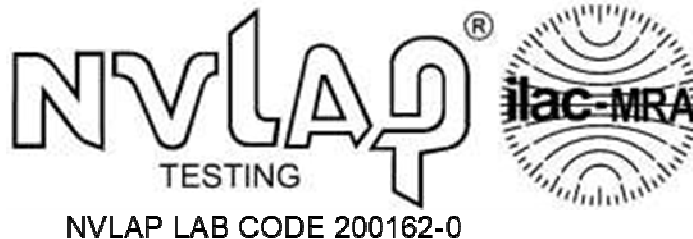

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

MEASUREMENT TECHNICAL REPORT

COMPANYS NAME: Cognosos, Inc
MODEL: PCB-10032
FCC ID: 2AKFQ10032
IC: 22165-10032
DATE: October 27, 2022

This report concerns (check one): Original grant ☒
Class II change

Equipment type: 902-928MHz FHSS Transmitter device

FCC Rule	Description of Test	Result
15.247(b)(3)	Peak Output Power	PASS
15.247(a)(2)	6 dB Bandwidth	PASS
15.247(d)	Conducted & Radiated Spurious Emissions	PASS
15.247(a)	Channel Separation	PASS
15.247(a)(i)	Number of Channels/ Occupancy Time	PASS
15.247(b)	Output power	PASS
15.209	Spurious Radiated Emissions	PASS
15.207	Power line Conducted Emissions	PASS

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information.....	7
1.1	Purpose of this Report.....	7
1.2	Characterization of Test Sample	7
1.3	Product Description	7
1.4	Configuration of Tested System	7
1.5	Test Facility	8
1.6	Related Submittals	8
1.6.1	The EUT is subject to the following FCC authorizations:	8
1.6.2	Verification of the Digital apparatus	8
2	Tests and Measurements	9
2.1	Test Equipment	9
2.2	Modifications to EUT Hardware.....	9
2.3	Number of Measurements for Intentional Radiators (15.31(m))	10
2.4	Frequency Range of Radiated Measurements (Part 15.33)	10
2.4.1	Intentional Radiator.....	10
2.4.2	Unintentional Radiator	10
2.5	Measurement Detector Function and Bandwidth (CFR 15.35)	10
2.5.1	Detector Function and Associated Bandwidth	11
2.5.2	Corresponding Peak and Average Requirements.....	11
2.5.3	Pulsed Transmitter Averaging.....	11
2.6	Transmitter Duty Cycle (CFR 15.35 (c))	12
2.7	EUT Antenna Requirements (CFR 15.203)	12
2.9	Power Line Conducted Emissions (CFR 15.207)	14
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) (IC RSS 247 5.1 & 5.2).....	14
2.11	Band Edge Measurements – (CFR 15.247 (d)).....	25
2.12	99% Occupied Bandwidth (IC RSS 247 5.1 & 5.2, CFR 15.247 (a) (1)).....	28
2.13	Number of Hopping Frequencies (CFR 15.247 (a)(1)) (CFR 15.247(b)(1)) ..	32
2.14	Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))	33
2.15	Frequency Separation (CFR 15.247(a)(1)).....	37
2.16	Average Time of Occupancy (CFR 15.247(a)(1))	38
2.17	Powerline Emissions (CFR 15.207).....	39
2.18	Intentional Radiator, Radiated Emissions (CFR 15.209)	40
2.19	Measurement Uncertainty	42
2.19.1	Conducted Emissions Measurement Uncertainty	42
2.19.2	Radiated Emissions Measurement Uncertainty	42
3	Conclusion	42

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Test Configuration	13
Figure 2.	Conducted Spurious Emissions-Low Channel, 30MHz – 1 GHz.....	15
Figure 3.	Conducted Spurious Emissions - Low Channel, 1 GHz – 10 GHz.....	16
Figure 4.	Conducted Spurious Emissions - Mid Channel, 30MHz – 1 GHz	17
Figure 5.	Conducted Spurious Emissions - Mid Channel, 1 GHz – 10 GHz.....	18
Figure 6.	Conducted Spurious Emissions - High Channel, 30 MHz – 1 GHz.....	19
Figure 7.	Conducted Spurious Emissions - High Channel, 1 GHz – 10 GHz	20
Figure 8.	Band Edge Compliance, Low Channel Delta - Peak.....	26
Figure 9.	Band Edge Compliance, High Channel Delta – Peak	27
Figure 10.	Bandwidth – Low Channel	29
Figure 11.	Bandwidth – Mid Channel.....	30
Figure 12.	Bandwidth – High Channel	31
Figure 13.	Hopping Channels 0 through 99	32
Figure 14.	Peak Antenna Conducted Output Power, Low Channel	34
Figure 15.	Peak Antenna Conducted Output Power, Mid Channel	35
Figure 16.	Peak Antenna Conducted Output Power, High Channel	36
Figure 17.	Channel Separation	37
Figure 18.	Average Time of Occupancy.....	38

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	8
Table 2.	Test Instruments	9
Table 3.	Number of Test Frequencies for Intentional Radiators.....	10
Table 4.	Allowed Antenna(s).....	12
Table 5.	Peak Radiated Fundamental & Harmonic Emissions.....	21
Table 6.	Average Radiated Fundamental & Harmonic Emissions	23
Table 7.	20 dB Bandwidth and 99% Occupied Bandwidth	28
Table 8.	Peak Antenna Conducted Output Power per Part 15.247 (b) (3)	33
Table 9.	Transmitter Power Line Conducted Emissions Test Data, Part 15.107	39
Table 10.	Radiated Emissions, 9 kHz - 30 MHz.....	40
Table 11.	Radiated Emissions 30 MHz to 1000 MHz (CFR 15.209)	41
Table 12.	Radiated Emissions 1 GHz to 10 GHz (CFR 15.209)	41

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

List of Attachments

Agency Agreement
Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Test Configuration Photographs

Internal Photographs
External Photographs
Antenna Photographs
Theory of Operation
RF Exposure
User's Manual

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

1 General Information

1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 247 and IC RSS 247 Issue 2.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on October 27, 2022 in good operating condition.

1.3 Product Description

The Equipment under Test (EUT) is the Cognosos, Inc. Model PCB-10032. The EUT is a small battery powered GPS tracking device mounted on the sun visor or rearview mirror of the vehicle being tracked. When the EUT senses motion, then senses a stop, the location of the vehicle is obtained through the GPS receiver. The location and serial number are transmitted to one of the Cognosos gateway towers, over a 915 MHz radio, in tracking mode.

The EUT uses proprietary 902-928 MHz radio technology along with BLE technology. This report is written to evaluate the 902-928 MHz radio technology used within the device. This report covers only the 902-928 MHz radio technology. The BLE feature has been evaluated in a separate test report.

Antenna: Trace Antenna, 0.17 dBi Peak Gain @ 914 MHz
Modulation: FHSS (902.075 - 927.950 MHz)
Maximum Output Power: +17.4 dBm (measured)

1.4 Configuration of Tested System

The Test Sample was tested per ANSI C63.4:2014 and ANSI C63.4:2013, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz for FCC subpart A Digital equipment Verification requirements and per ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices for FCC subpart C Intentional Radiators.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is US5301. Additionally, this site has also been fully described and submitted to Industry Canada (ISED), and has been approved under file number 9900A-1.

1.6 Related Submittals

1.6.1 The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.247 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

1.6.2 Verification of the Digital apparatus

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 15.109) for the EUT is included herein.

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER.	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Cognosos, Inc	PCB-10032	Engineering Sample	FCC ID: 2AKFQ10032 (Pending) IC:22165-10032 (Pending)	None
Antenna See antenna details	--	--	--	--

U= Unshielded S= Shielded P= Power D= Data

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
Spectrum Analyzer	Hewlett-Packard	8593E	3205A00124	2/28/2024 2 yr.
Spectrum Analyzer	Agilent	E4407B	US41442935	9/21/2024 2 yr.
Loop Antenna	ETS Lindgren	6502	9810-3246	Calibrated Before Use
Biconical Antenna	EMCO	3110B	9306-1708	8/17/2023 2 yr.
Log Periodic Antenna	EMCO	3146	9110-3236	12/13/2023 2 yr.
Horn Antenna	Ah Systems	SAS-571	605	4/28/2024 2 yr.
Preamp 100 kHz to 1.3 GHz	Hewlett-Packard	8447D	1937A02980	6/9/2023
Preamp 1.0 GHz to 26.0 GHz	Hewlett-Packard	8449B	3008A00914	2/11/2023
High Pass Filter	Microwave Circuits	H3R020G2	001DC9528	8/1/2023

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates over 10 MHz span, 3 test frequencies were used.

2.4 Frequency Range of Radiated Measurements (Part 15.33)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e., 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified, there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz .

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG) the duty cycle factor calculated will be applied.

Based on the Theory of Operation exhibit for this radio device, the worst case duty cycle is said to be 3.3% therefore the Duty Cycle Correction Factor used will be:

$$20 * \log (3.3\%) = -29.63 \text{ dB.}$$

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.6 Transmitter Duty Cycle (CFR 15.35 (c))

When the radiated emissions limits are expressed in terms of AVERAGE values and pulse operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

In this case the Duty Cycle was calculated. The calculation for the Duty Cycle factor is included in the Theory of Operation exhibit.

2.7 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Antenna	Cognosos, Inc	Monopole Trace antenna	Trace Antenna	0.17	Permanent

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

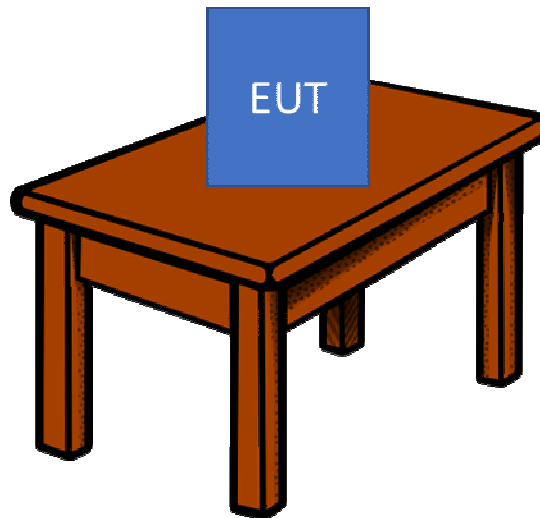


Figure 1. Test Configuration

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.9 Power Line Conducted Emissions (CFR 15.207)

Since the EUT is battery powered, this test was not applied.

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d)) (IC RSS 247 5.1 & 5.2)

Radiated Spurious measurements: The EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per FCC Public Notice DA 00-705 and ANSI C63.10:2013. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the device. A preliminary scan was performed on the EUT to find the worse case results the EUT was tested in X, Y, and Z axes or in the orientation of normal operation if the device is designed to operate in a fixed position.

Radiated measurements were then conducted between the frequency range of 9 kHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (no greater than 40 GHz). In the band below 30 MHz a resolution bandwidth (RBW) of 9 kHz was used, emissions below 1 GHz were tested with a RBW of 120 kHz and emissions above 1 GHz were tested with a RBW of 1 MHz . All video bandwidth settings were at least three times the RBW value.

The EUT was investigated to CFR 15.209, General requirements for unwanted spurious emissions. The conducted spurious method as described below was used to investigate all other emissions emanating from the antenna port.

Conducted Spurious measurements: The EUT was put into a continuous-transmit mode of operation (>98% duty cycle) and tested per FCC Public Notice DA 00-705 for conducted out of band emissions emanating from the antenna port over the frequency range of 30 MHz to 25 GHz. A conducted scan was performed on the EUT to identify and record the spurious signals that were related to the transmitter.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

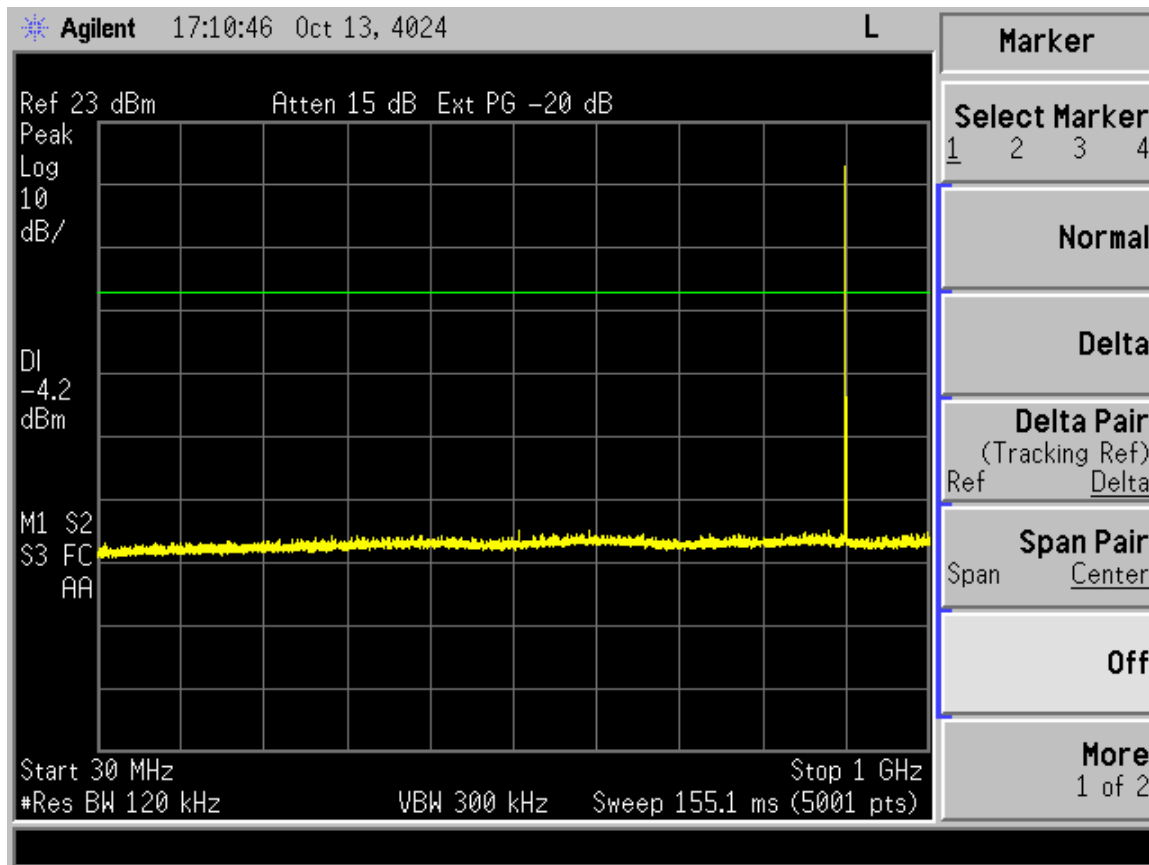


Figure 2. Conducted Spurious Emissions-Low Channel, 30MHz – 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

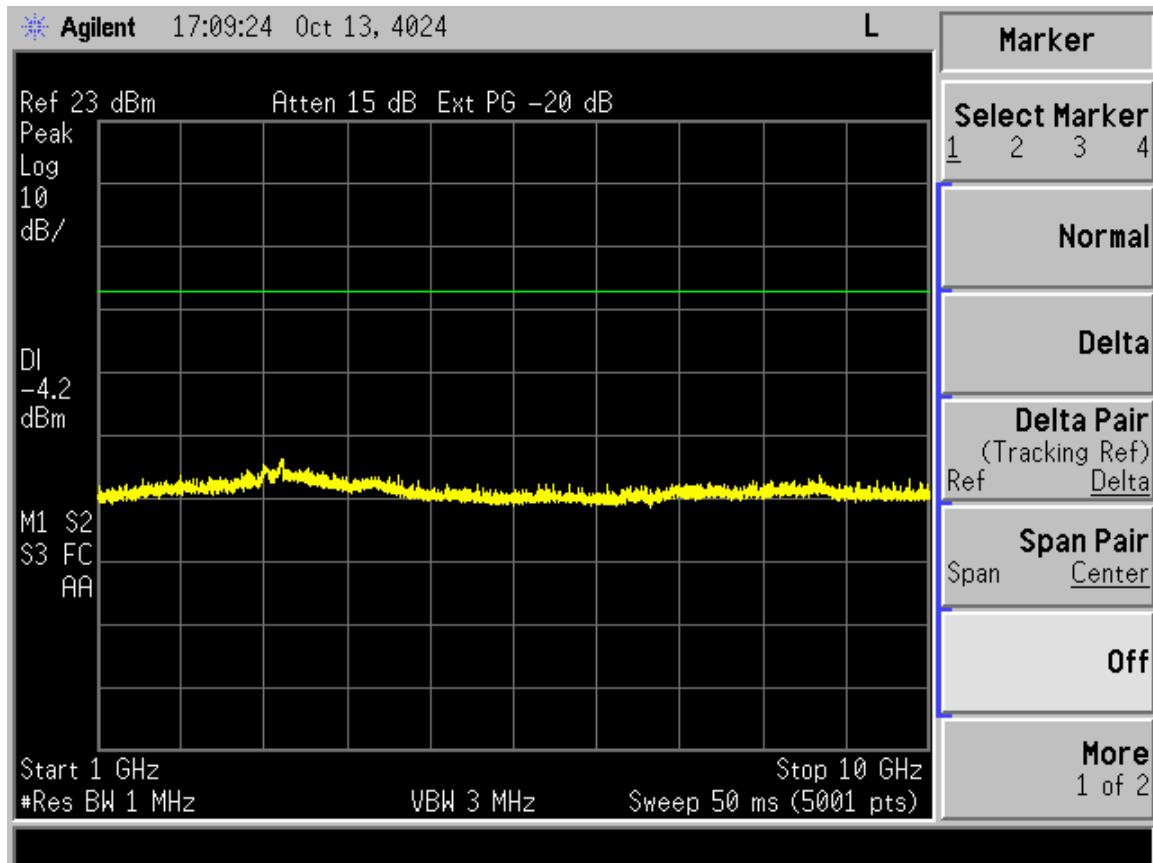


Figure 3. Conducted Spurious Emissions - Low Channel, 1 GHz – 10 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

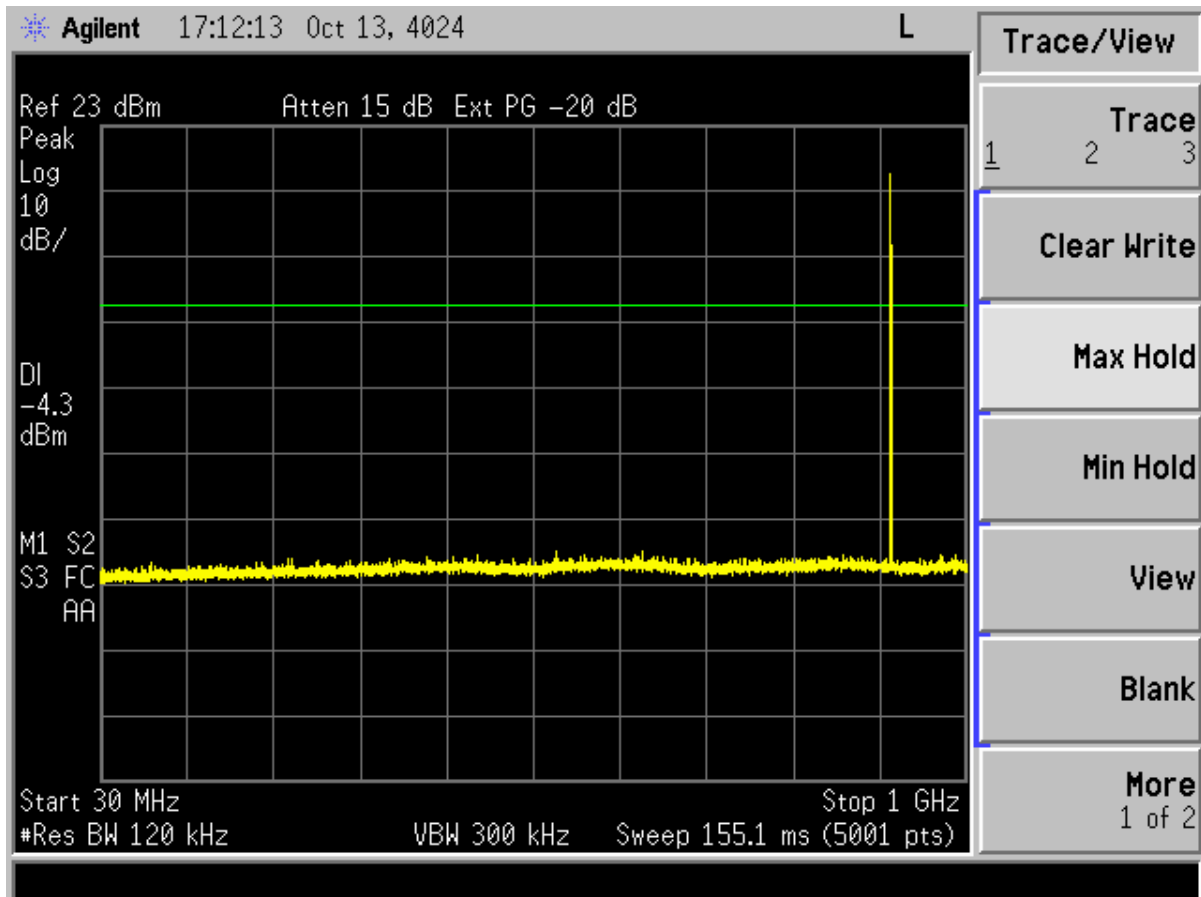


Figure 4. Conducted Spurious Emissions - Mid Channel, 30MHz – 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

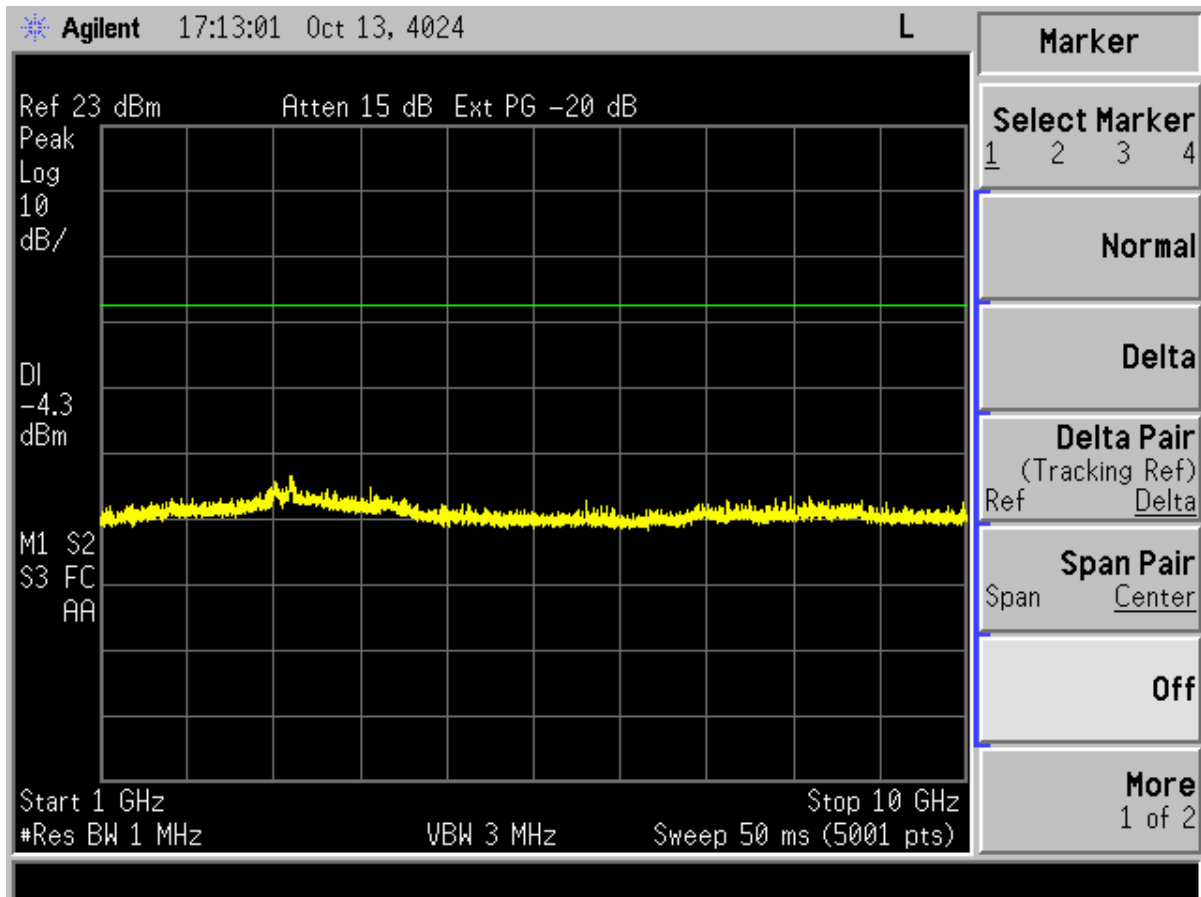


Figure 5. Conducted Spurious Emissions - Mid Channel, 1 GHz – 10 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

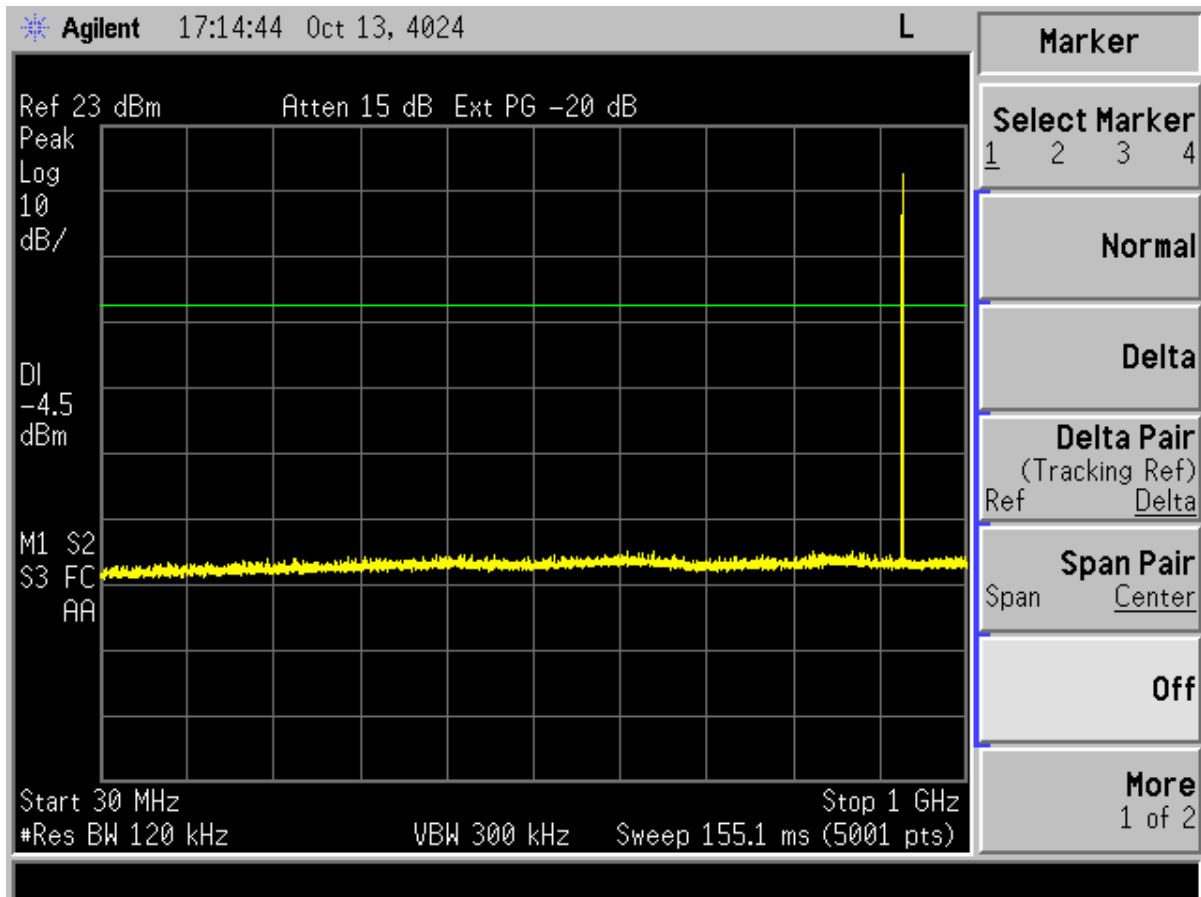


Figure 6. Conducted Spurious Emissions - High Channel, 30 MHz – 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

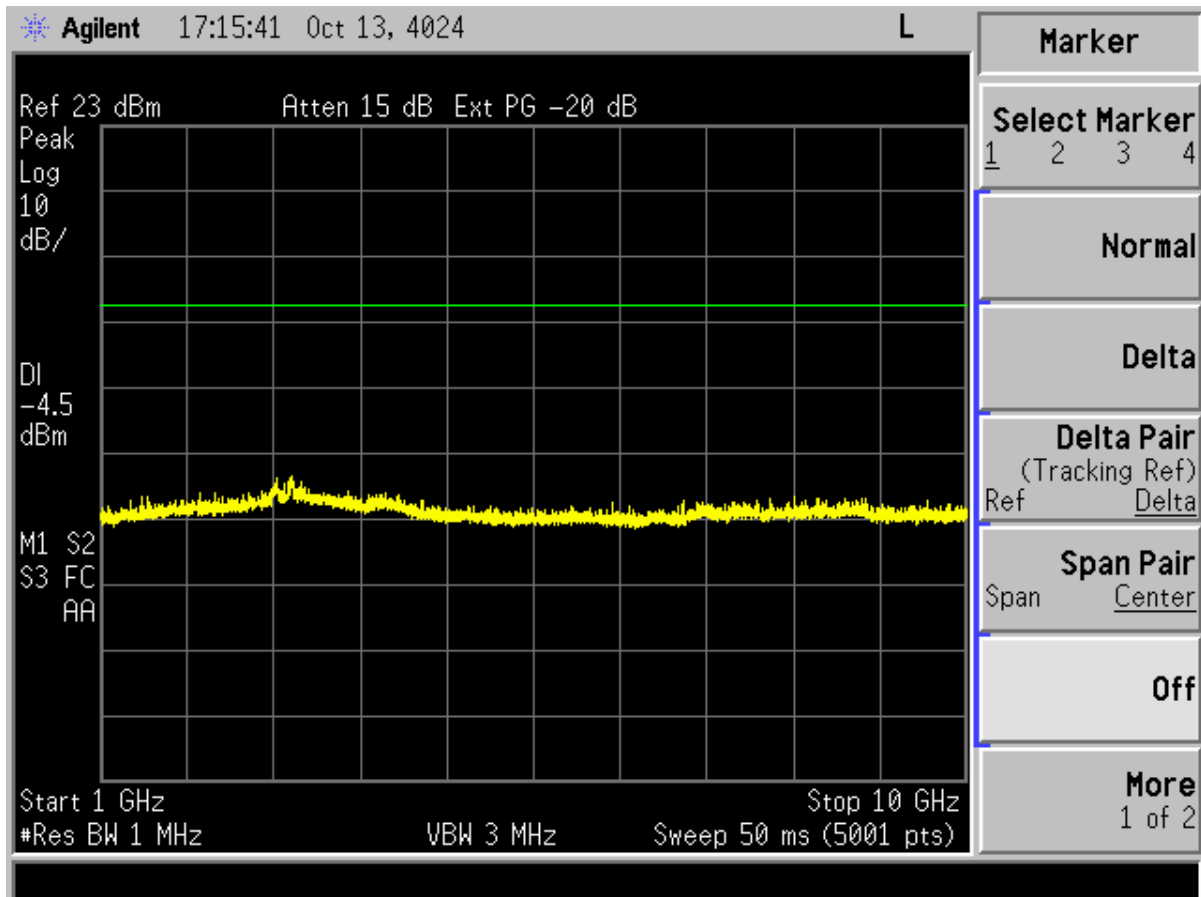


Figure 7. Conducted Spurious Emissions - High Channel, 1 GHz – 10 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

Table 5. Peak Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.247(d)								
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel								
902.16	83.02	--	22.56	105.58	--	3m./VERT	--	PK
1804.00	76.20	--	-8.95	67.25	74.0	3.0m./VERT	6.7	PK
*2706.00	60.25	--	-5.01	55.24	74.0	3.0m./VERT	18.8	PK
*3608.00	60.27	--	-3.24	57.03	74.0	3.0m./VERT	17.0	PK
*4510.00	54.56	--	-0.48	54.08	74.0	3.0m./VERT	19.9	PK
*5413.00	49.83	--	3.40	53.23	74.0	3.0m./VERT	20.8	PK
~6315.00	55.19	-9.5	8.05	53.74	74.0	1.0m./VERT	20.3	PK
~*7217.00	54.45	-9.5	10.02	54.97	74.0	1.0m./VERT	19.0	PK
~*8119.00	57.77	-9.5	9.71	57.98	74.0	1.0m./VERT	16.0	PK
~*9021.00	58.83	-9.5	9.35	58.68	74.0	1.0m./VERT	15.3	PK
Mid Channel								
915.00	85.65	--	24.40	110.05	--	3.0m./VERT	--	PK
1829.00	91.33	--	-8.70	82.63	88.0	3.0m./VERT	5.4	PK
*2745.00	64.99	--	-4.86	60.13	74.0	3.0m./VERT	13.9	PK
*3659.00	58.62	--	-3.06	55.56	74.0	3.0m./VERT	18.4	PK
*4575.00	55.80	--	0.09	55.89	74.0	3.0m./VERT	18.1	PK
*5490.00	49.97	--	3.72	53.69	74.0	3.0m./VERT	20.3	PK
~6404.00	57.30	-9.5	8.54	56.34	74.0	1.0m./VERT	17.7	PK
~*7320.00	55.74	-9.5	10.35	56.59	74.0	1.0m./VERT	17.4	PK
~*8235.00	56.98	-9.5	9.68	57.16	74.0	1.0m./VERT	16.8	PK
~*9149.00	55.34	-9.5	9.58	55.42	74.0	1.0m./VERT	18.6	PK
High Channel								
927.81	85.80	--	24.22	110.02	--	3m./HORZ	--	PK
1855.00	93.19	--	-8.55	84.64	90.4	3.0m./HORZ	5.7	PK
2783.00	65.76	--	-5.00	60.76	74.0	3.0m./HORZ	13.2	PK
3711.00	62.50	--	-2.64	59.86	74.0	3.0m./HORZ	14.1	PK
4639.00	52.84	--	0.62	53.46	74.0	3.0m./HORZ	20.5	PK
5566.00	51.81	--	3.48	55.29	74.0	3.0m./HORZ	18.7	PK
6494.00	43.84	-9.5	8.59	52.43	74.0	1.0m./HORZ	21.6	PK
7422.00	44.84	-9.5	9.69	54.53	74.0	1.0m./HORZ	19.5	PK
8350.00	54.22	-9.5	10.30	64.52	74.0	1.0m./HORZ	9.5	PK
9278.00	45.49	-9.5	10.30	55.79	74.0	1.0m./HORZ	18.2	PK

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032


1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for peak measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
3. (~)Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 902.16 MHz:

Magnitude of Measured Frequency	83.02	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	22.56	dB/m
1 meter to 3-meter extrapolation	0.00	dB
Corrected Result	105.58	dBuV/m

Test Date: October 10, 2022

Tested By
Signature:

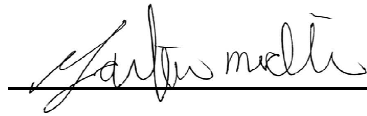

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

Table 6. Average Radiated Fundamental & Harmonic Emissions

Test: FCC Part 15, Para 15.209, 15.247(d)								
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA-DC -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel								
902.17	78.31	--	24.16	102.47	--	3m./HORZ	--	QP
1804.00	81.87	--	-29.07	52.80	70.0	3.0m./HORZ	17.2	AVG
*2706.00	63.42	--	-24.97	38.45	54.0	3.0m./HORZ	15.6	AVG
*3608.00	59.29	--	-23.26	36.03	54.0	3.0m./HORZ	18.0	AVG
*4510.00	44.27	--	0.23	44.50	54.0	3.0m./HORZ	9.5	AVG
*5412.00	40.10	--	-16.55	23.55	54.0	3.0m./HORZ	30.5	AVG
~6315.00	45.64	-9.5	-11.82	33.82	54.0	1.0m./HORZ	20.2	AVG
~*7217.00	46.22	-9.5	-9.95	36.27	54.0	1.0m./HORZ	17.7	AVG
~*8119.00	49.21	-9.5	-10.32	38.89	54.0	1.0m./HORZ	15.1	AVG
~*9021.00	50.99	-9.5	-10.64	40.35	54.0	1.0m./HORZ	13.7	AVG
Mid Channel								
915.00	79.92	--	24.58	104.50	--	3.0m./HORZ	--	QP
1829.00	90.63	--	-28.82	61.81	70.0	3.0m./HORZ	8.2	AVG
2745.00	64.59	--	-24.82	39.77	54.0	3.0m./HORZ	14.2	AVG
3659.00	58.69	--	-23.03	35.66	54.0	3.0m./HORZ	18.3	AVG
4575.00	39.04	--	0.23	39.27	54.0	3.0m./HORZ	14.7	AVG
5489.00	36.44	--	-16.27	20.17	54.0	3.0m./HORZ	33.8	AVG
6494.00	43.84	-9.5	-11.41	32.43	54.0	1.0m./HORZ	21.6	AVG
7422.00	44.84	-9.5	-10.31	34.53	54.0	1.0m./HORZ	19.5	AVG
8350.00	54.22	-9.5	-9.70	44.52	54.0	1.0m./HORZ	9.5	AVG
9278.00	45.49	-9.5	-9.70	35.79	54.0	1.0m./HORZ	18.2	AVG
High Channel								
927.81	79.92	--	24.22	104.14	--	3m./HORZ	--	QP
1855.00	92.57	--	-28.55	64.02	70.0	3.0m./HORZ	6.0	AVG
2783.00	64.52	--	-25.00	39.52	54.0	3.0m./HORZ	14.5	AVG
3711.00	60.71	--	-22.64	38.07	54.0	3.0m./HORZ	15.9	AVG
4639.00	44.12	--	0.23	44.35	54.0	3.0m./HORZ	9.6	AVG
5566.00	43.58	--	-16.52	27.06	54.0	3.0m./HORZ	26.9	AVG
6494.00	43.84	-9.5	-11.41	32.43	54.0	1.0m./HORZ	21.6	AVG
7422.00	44.84	-9.5	-10.31	34.53	54.0	1.0m./HORZ	19.5	AVG
8350.00	54.22	-9.5	-9.70	44.52	54.0	1.0m./HORZ	9.5	AVG
9278.00	45.49	-9.5	-9.70	35.79	54.0	1.0m./HORZ	18.2	AVG

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032


1. (*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 20 dB relaxation for **peak** measurements of CFR 15.35.
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic.
3. (~)Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
5. DC correction factor of -20.00 applied for all average values.

Sample Calculation at 902.17 MHz:

Magnitude of Measured Frequency	78.31	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle	24.16	dB/m
1 meter to 3-meter extrapolation	0.00	dB
Corrected Result	102.47	dBuV/m

Test Date: October 10, 2022

Tested By
Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.11 Band Edge Measurements – (CFR 15.247 (d))

Band Edge measurements are made following the guidelines in FCC KDB Publication No. DA 00-705 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 3 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW $\geq 1\%$ of the frequency span. In all cases, the VBW is set \geq RBW. See figure and calculations below for more detail. This measurement was performed with the EUT continuously transmitting on the low and high channels as well as in normal use mode (frequency hopping ON).

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15 Certification/ RSS 247
 2AKFQ10032
 22165-10032
 22-0290
 October 27, 2022
 Cognosos, Inc
 PCB-10032

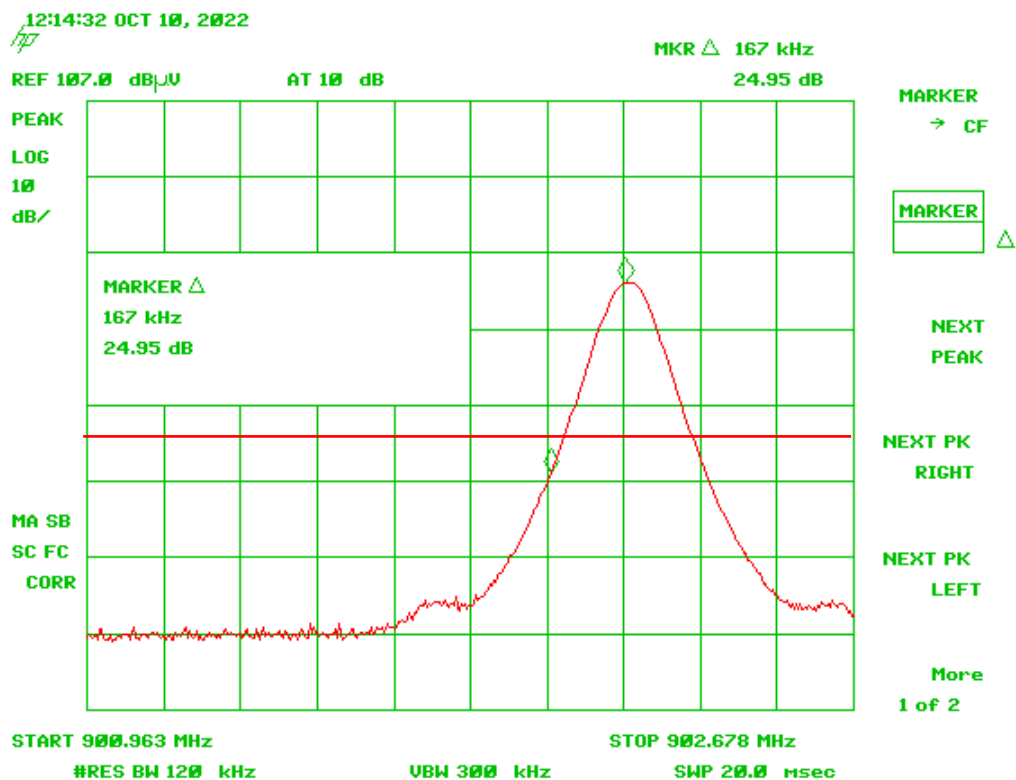


Figure 8. Band Edge Compliance, Low Channel Delta - Peak

All emissions greater than 100 kHz bandwidth outside the frequency band in which the FHSS intentional radiator is operating is at least 20 dB below the fundamental.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

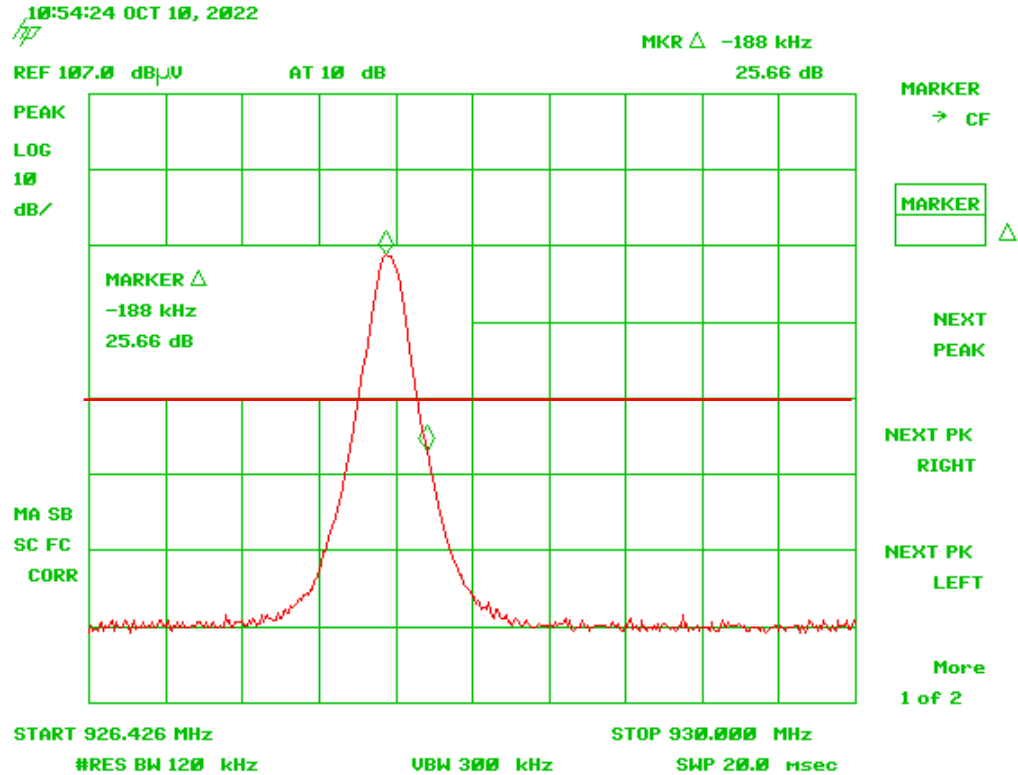


Figure 9. Band Edge Compliance, High Channel Delta – Peak

All emissions greater than 100 kHz bandwidth outside the frequency band in which the FHSS intentional radiator is operating is at least 20 dB below the fundamental.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.12 99% Occupied Bandwidth (IC RSS 247 5.1 & 5.2, CFR 15.247 (a) (1))

For frequency hopping systems operating in the 902-928 MHz band the maximum allowed 20 dB bandwidth is 500 kHz.

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW \geq RBW. The results of this test are given in Table 12 and Figures 21-23.

Table 7. 20 dB Bandwidth and 99% Occupied Bandwidth

Frequency (MHz)	20 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
902.17	17.548	16.745
915.00	18.712	16.965
927.77	17.451	15.803

Test Date: October 26, 2022

Tested By
Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

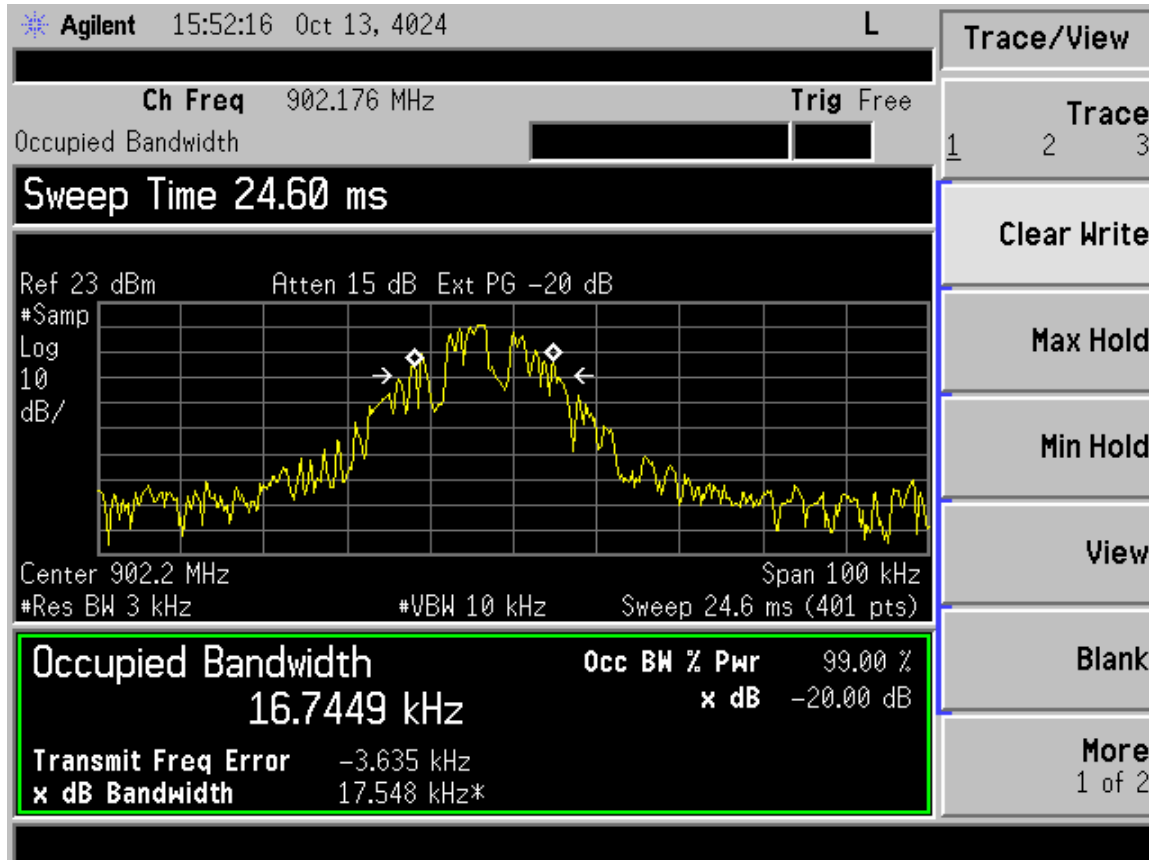


Figure 10. Bandwidth – Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

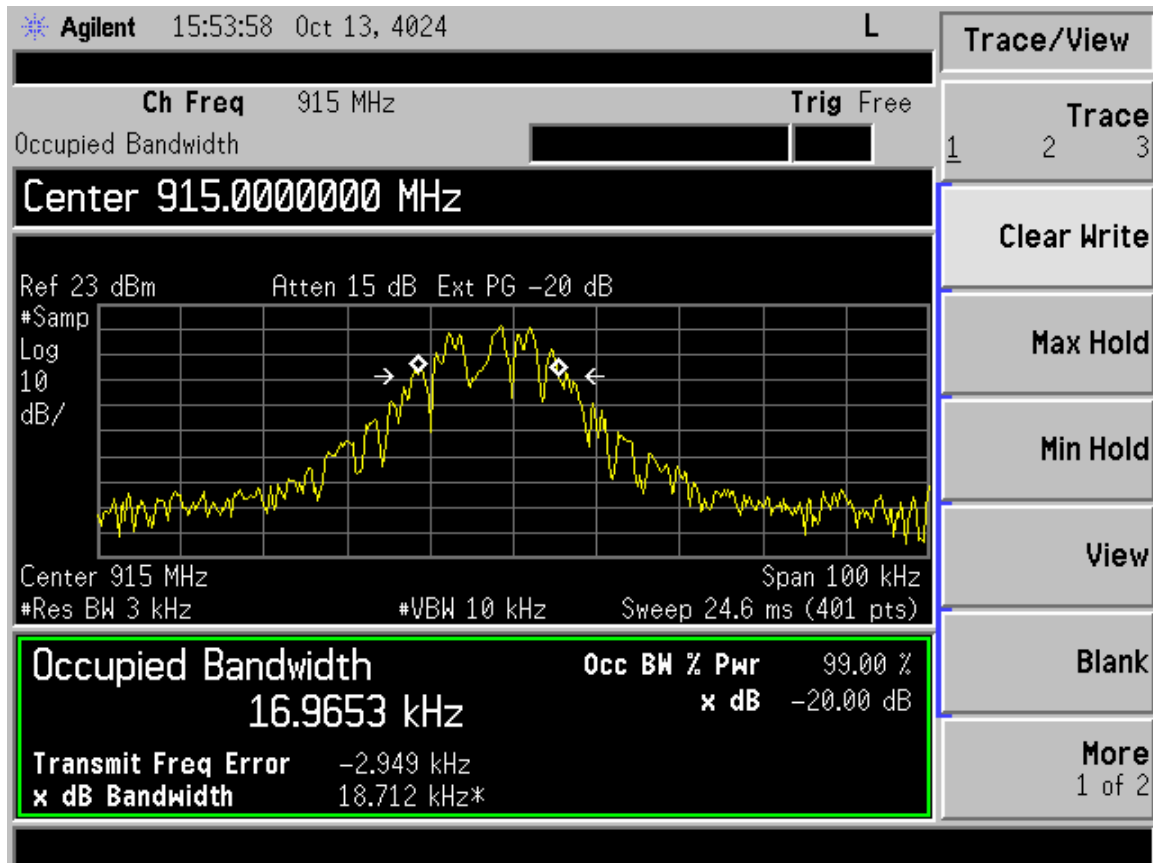


Figure 11. Bandwidth – Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

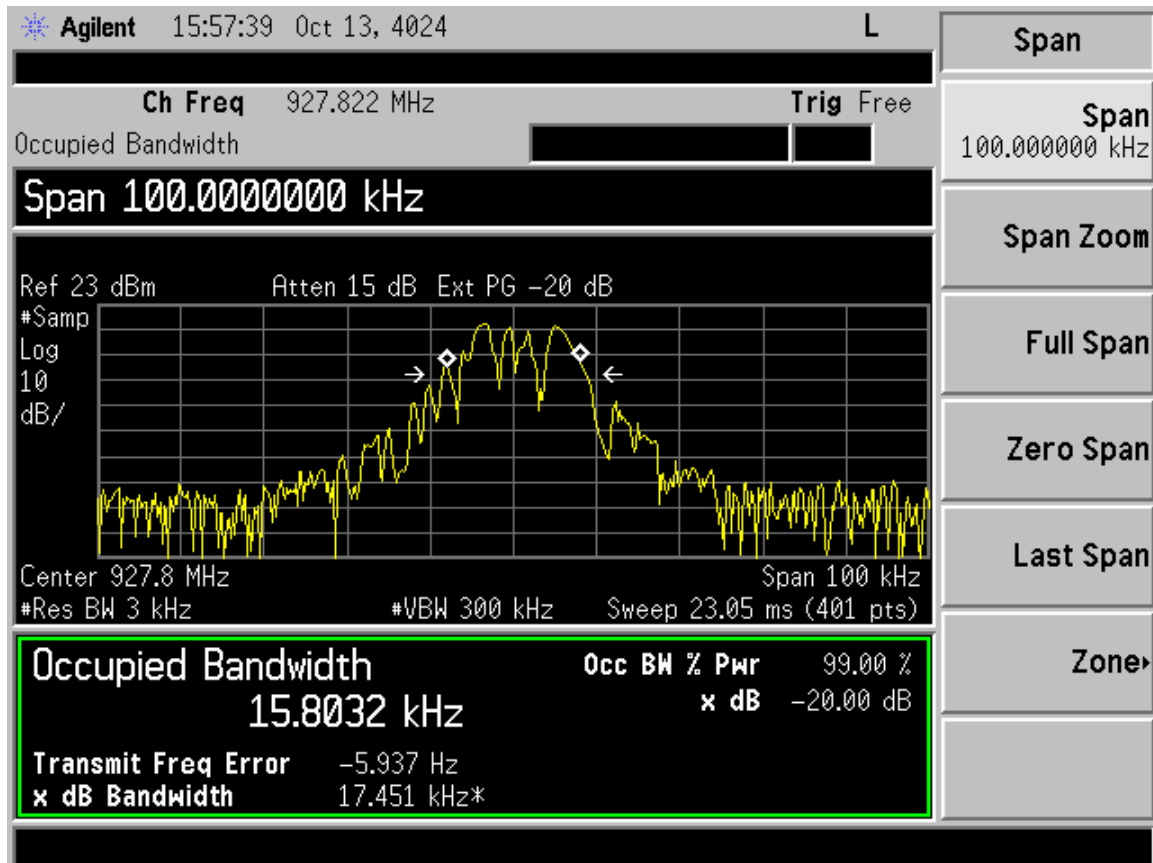


Figure 12. Bandwidth – High Channel

2.13 Number of Hopping Frequencies (CFR 15.247 (a)(1)) (CRF 15.247(b)(1))

Frequency hopping systems in the 902-928 MHz band shall have at least 50 hopping frequencies if the 20 dB bandwidth is less than 250 kHz. If the 20 dB bandwidth is 250 kHz or greater, then the system shall have at least 25 hopping frequencies. Since the EUT has a 20 dB bandwidth less than 250 kHz, then at least 50 hopping frequencies shall be used.

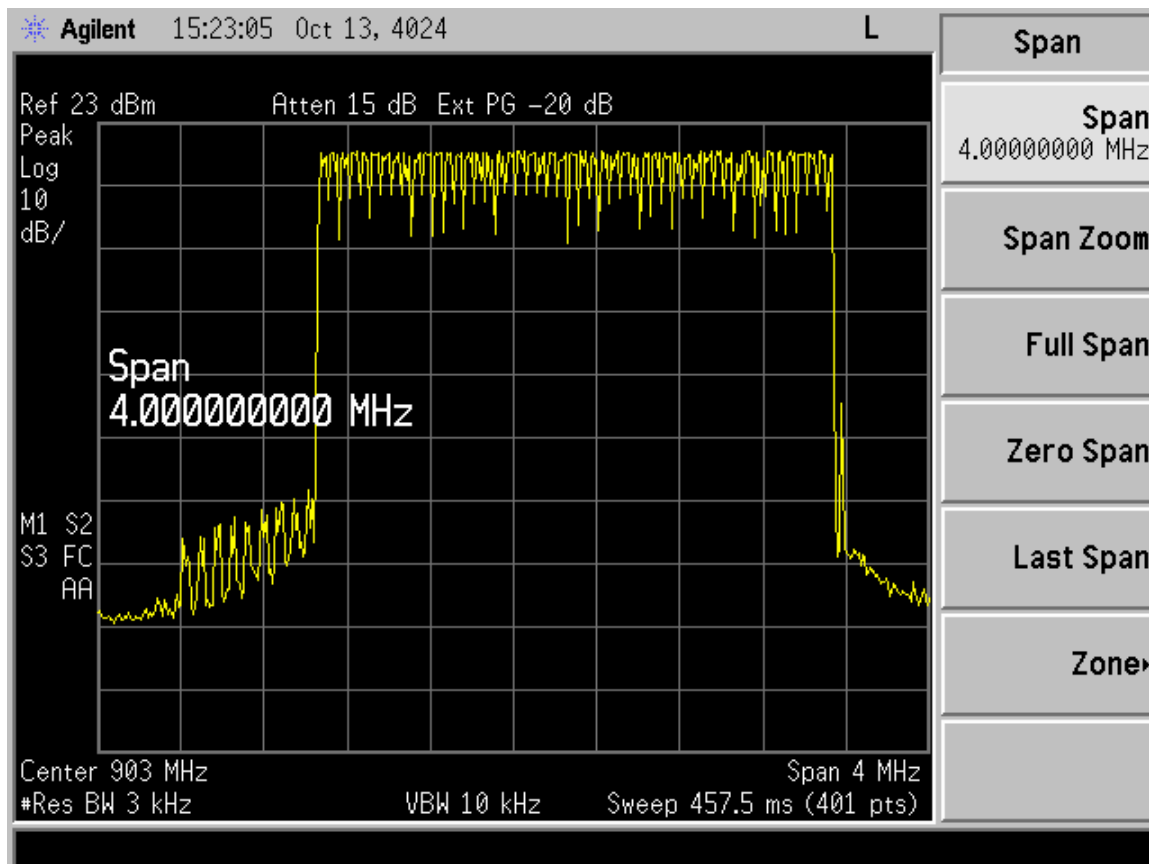


Figure 13. Hopping Channels 0 through 99

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.14 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

For frequency hopping systems in the 902-928 MHz band with at least 50 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt. Systems with less than 50 hopping channels, but at least 25 hopping channels, the maximum peak conducted output power of the intentional radiator shall not exceed .25 watts. Since the EUT has 100 hopping channels, the maximum peak conducted output power shall not exceed 1 watt.


Peak power within the band 902.125 MHz to 927.80 MHz was measured per FCC KDB Publication DA 00-705 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set for an impedance of 50 Ω with the RBW set greater than the 6 dB bandwidth of the EUT, and the VBW \geq RBW. Peak antenna conducted output power is tabulated in the table below.

Table 8. Peak Antenna Conducted Output Power per Part 15.247 (b) (3)

Frequency of Fundamental (MHz)	Raw Test Data dBm	Converted Data (mW)	FCC Limit (mW Maximum)
902.12	17.38	54.70	1000
915.00	17.27	53.33	1000
927.77	17.10	51.28	1000

Test Date: October 19, 2022

Tested By
Signature:

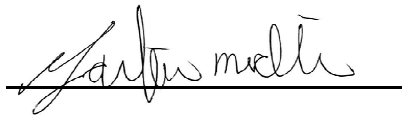

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

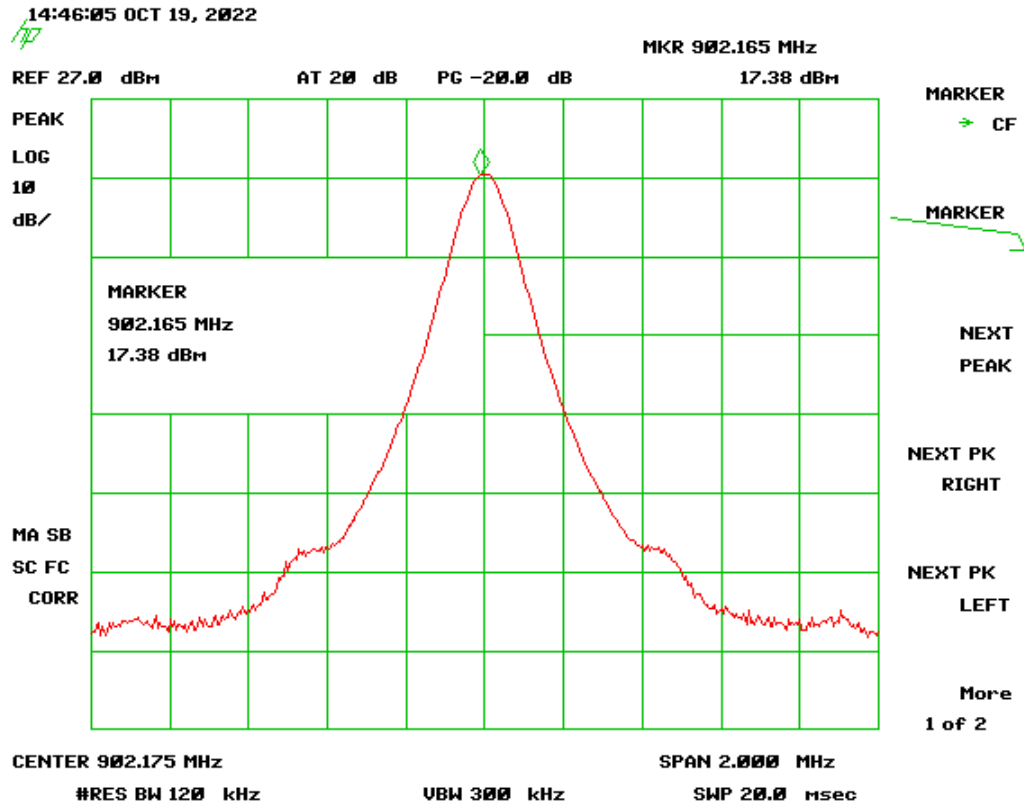


Figure 14. Peak Antenna Conducted Output Power, Low Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

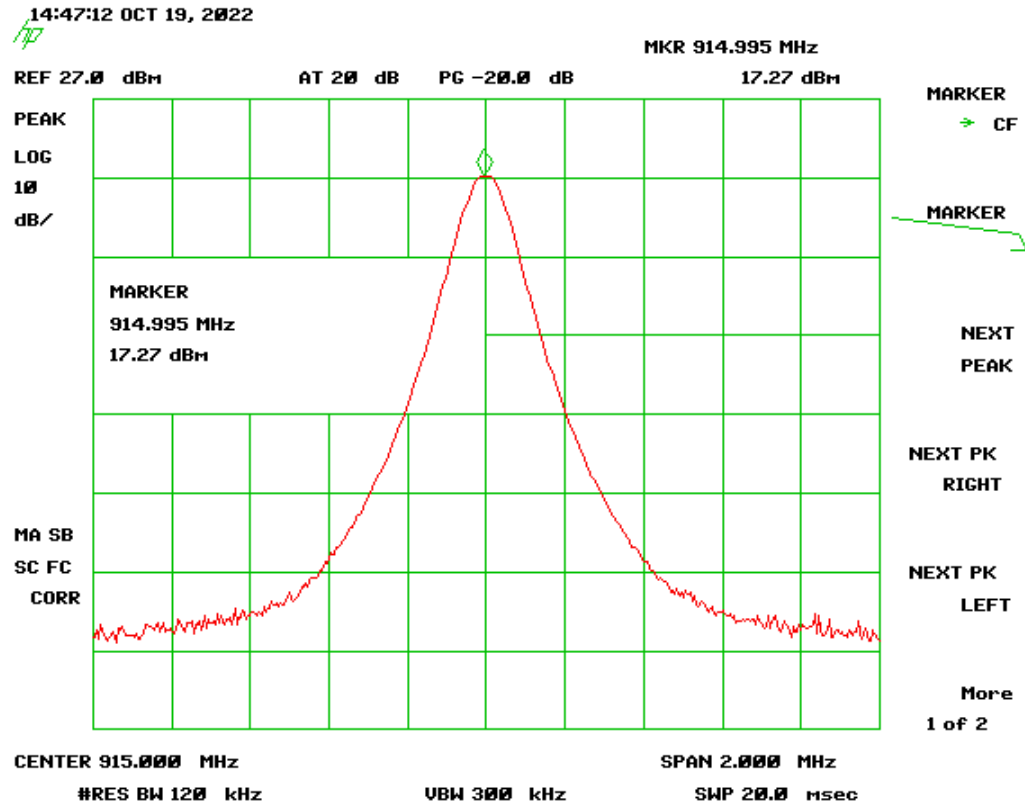


Figure 15. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

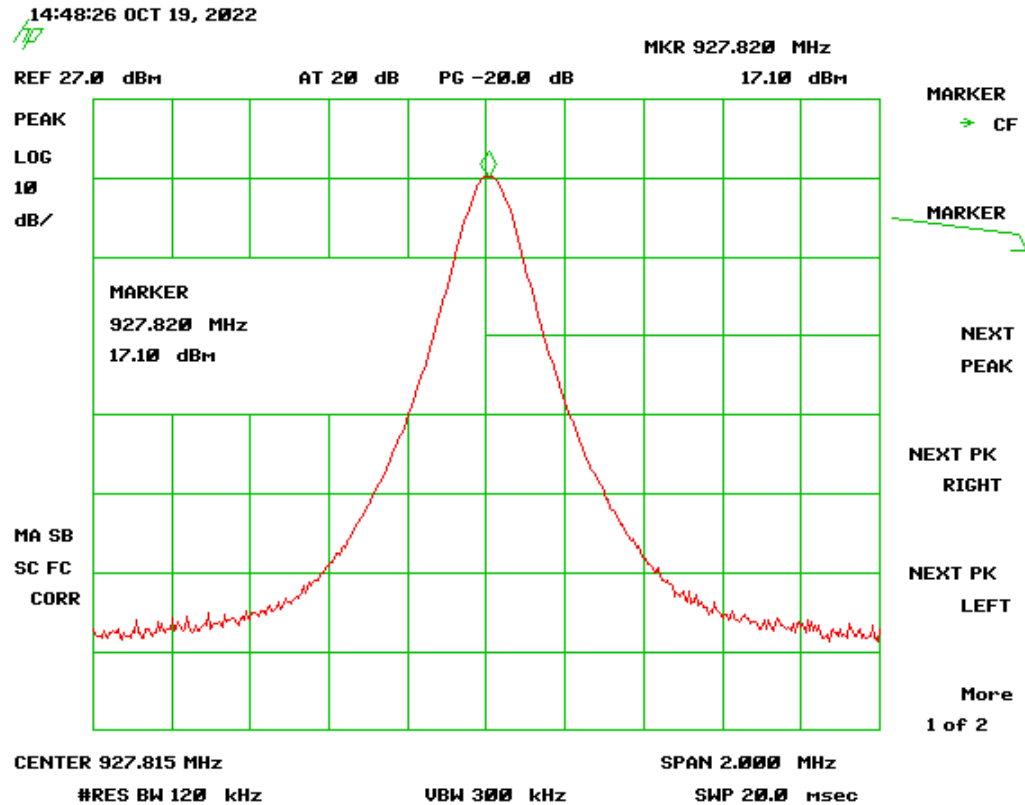


Figure 16. Peak Antenna Conducted Output Power, High Channel

2.15 Frequency Separation (CRF 15.247(a)(1))

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. In this case, the 20 dB bandwidth of the hopping channel is less than the 25 kHz, so the minimum requirement used was the 25 kHz.

The EUT met the frequency separation requirement.

The test procedures outlined in Clause 7.8 of ANSI C63.10-2013 was used to conduct measurements. The EUT hopping function was enabled during the testing.

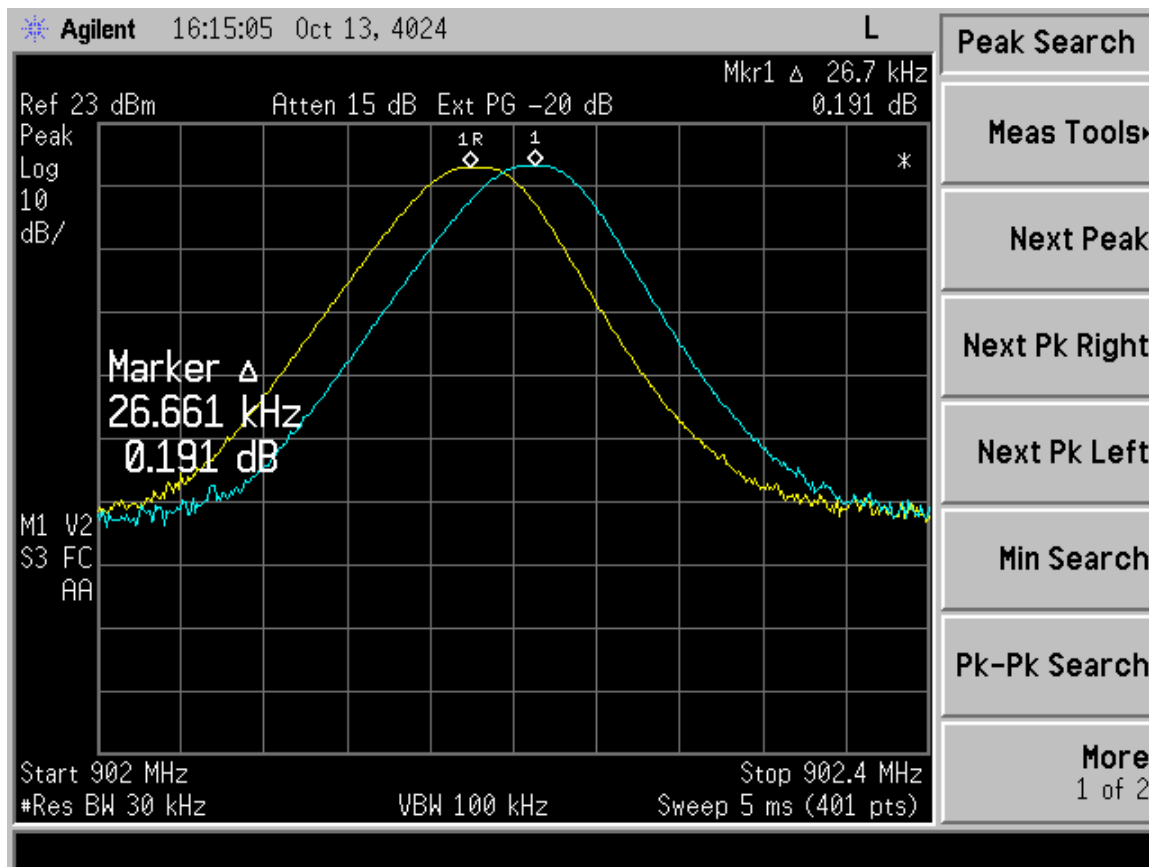


Figure 17. Channel Separation

Measured Delta (Figure 27)	26.6	kHz
-Limit (25 kHz)	25.0	kHz
Margin	01.6	kHz

2.16 Average Time of Occupancy (CFR 15.247(a)(1))

Frequency hopping system in the 902-928 MHz bands with a 20 dB bandwidth less than 250 kHz shall have an average time occupancy not greater than 0.4 seconds within a 20 second period. If the 20 dB bandwidth of the hopping channels is 250 kHz or greater, then the average time of occupancy shall not be greater than 0.4 seconds within a 10 second period. In this case, since the 20 dB bandwidth was less than 250 kHz the average time of occupancy shall not be greater than 0.4 seconds.

In this case the radio uses 50 channels, therefore the maximum occupancy time 1 0.4 seconds in a 20 second period.

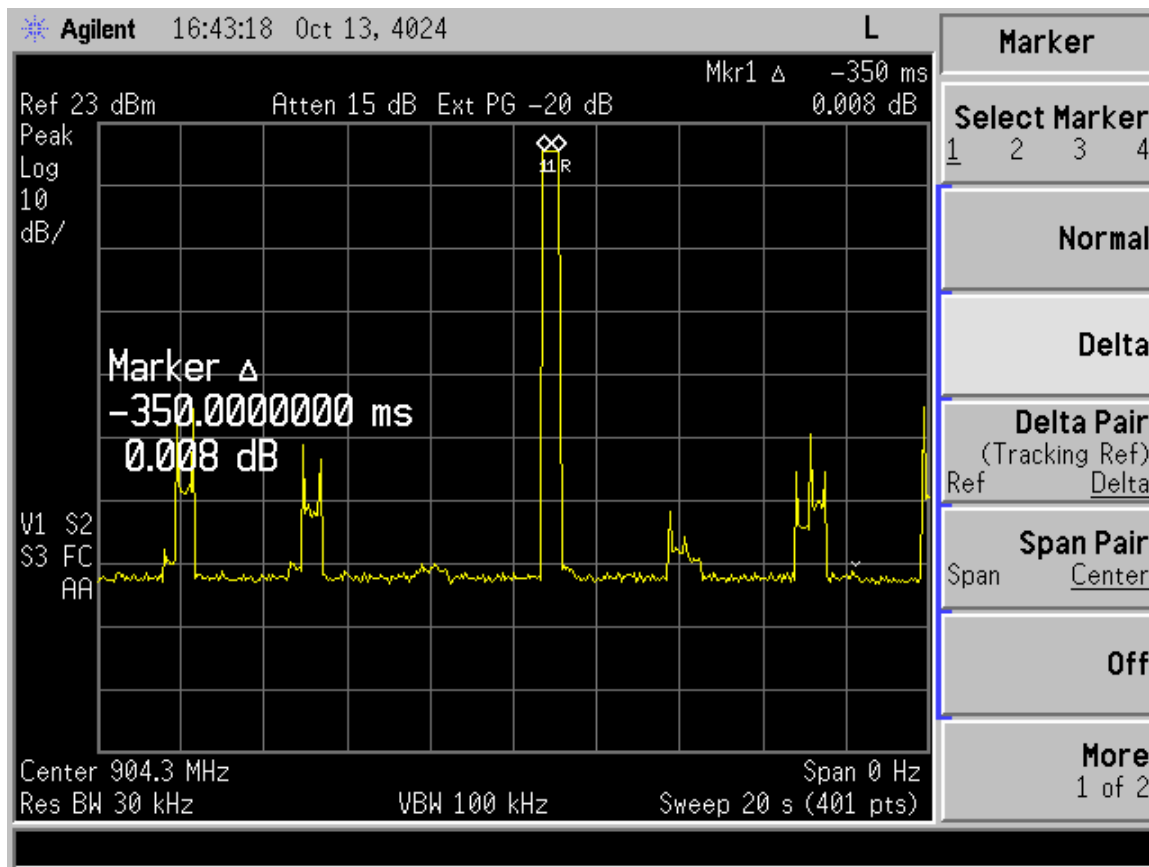


Figure 18. Average Time of Occupancy

Limit	400.0 ms
-Total Time on (Figure above)	350.0 ms
Margin	50.0 ms

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.17 Powerline Emissions (CFR 15.207)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.107, per ANSI C63.4:2014, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

The EUT was battery powered; therefore, this test was not applied.

Table 9. Transmitter Power Line Conducted Emissions Test Data, Part 15.107

150KHz to 30 MHz with Class A Limits						
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
This test is not applicable to this EUT						

Sample calculation: N/A

Test Date: October 10, 2022

Tested By
Signature:



Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.18 Intentional Radiator, Radiated Emissions (CFR 15.209)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 9 KHz to 10 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

Table 10. Radiated Emissions, 9 kHz - 30 MHz


9 kHz to 30 MHz, 15.209 limits							
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions were greater than 20 dB below the limit							

Sample Calculation: N/A

Test Date: October 12, 2022

Tested By

Signature:

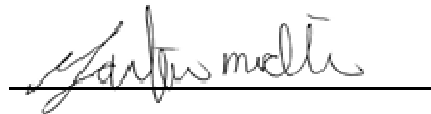

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

Table 11. Radiated Emissions 30 MHz to 1000 MHz (CFR 15.209)

30 MHz to 1000 MHz, 15.209 limits							
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
All emissions less than 6dB above the noise floor other than the fundamental							

Sample calculation: N/A

Test date: October 10, 2022

Tested By

Signature:



Name: Gabriel Medina

Table 12. Radiated Emissions 1 GHz to 10 GHz (CFR 15.209)


1 GHz to 10 GHz, 15.209 limits							
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
All emissions less than 6dB above the noise floor other than the harmonics							

Sample calculation: N/A

Test date: October 10, 2022

Tested By

Signature:

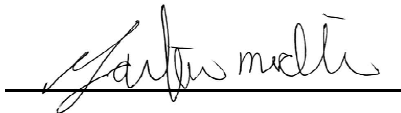

Name: Gabriel Medina

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15 Certification/ RSS 247
2AKFQ10032
22165-10032
22-0290
October 27, 2022
Cognosos, Inc
PCB-10032

2.19 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

219.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 2.78 dB.

2.19.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.39 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.18 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna (1 GHz to 18 GHz) is ± 5.21 dB.

3 Conclusion

The EUT is deemed to have met the requirements of this subpart as tested and presented in this test report.