



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No. : CTL2412061021-WF02

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Wuqiang Wu
(Test Engineer)

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)



Product Name : PORTABLE SPEAKER

Model/Type reference : MPD141TS

List Model(s)..... : MPD11TS, MPD1081TS, MPD1082TS, MPD1083TS,
MPD122TS, MPD1231TS, MPD1232TS, MPD1233TS,
MPD1235TS, MPD1281TS, MPD1282TS, MPD1283TS,
MPD1284TS, MPD1285TS, MPD1292TS, MPD1293TS,
MPD1294TS, MPD1295TS, MPD1296TS, MPD1581TS,
MPD1582TS, MPD1583TS, MPD1584TS

Trade Mark..... : N/A

FCC ID..... : 2AS7H-MPD141TS

Applicant's name : GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Address of applicant : XIPU WEST STREET NO.21, SHIMA VILLAGE, JUNHE
STREET, BAIYUN DISTRICT, GUANGZHOU, CHINA

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : Dec. 11, 2024

Date of Test Date..... : Dec. 11, 2024-Dec. 26, 2024

Date of Issue : Dec. 27, 2024

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2412061021-WF02	Dec. 27, 2024
		Date of issue

Equipment under Test : PORTABLE SPEAKER

Sample No : CTL2412061021

Model /Type : MPD141TS

Listed Models : MPD11TS, MPD1081TS, MPD1082TS,
MPD1083TS, MPD122TS, MPD1231TS,
MPD1232TS, MPD1233TS, MPD1235TS,
MPD1281TS, MPD1282TS, MPD1283TS,
MPD1284TS, MPD1285TS, MPD1292TS,
MPD1293TS, MPD1294TS, MPD1295TS,
MPD1296TS, MPD1581TS, MPD1582TS,
MPD1583TS, MPD1584TS

Applicant : GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Address : XIPU WEST STREET NO.21, SHIMA VILLAGE,
JUNHE STREET, BAIYUN DISTRICT,
GUANGZHOU, CHINA

Manufacturer : GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Address : XIPU WEST STREET NO.21, SHIMA VILLAGE,
JUNHE STREET, BAIYUN DISTRICT,
GUANGZHOU, CHINA

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

The device (Product Name: PORTABLE SPEAKER) Models Name: MPD141TS , MPD11TS, MPD1081TS, MPD1082TS, MPD1083TS, MPD122TS, MPD1231TS, MPD1232TS, MPD1233TS, MPD1235TS, MPD1281TS, MPD1282TS, MPD1283TS, MPD1284TS, MPD1285TS, MPD1292TS, MPD1293TS, MPD1294TS, MPD1295TS, MPD1296TS, MPD1581TS, MPD1582TS, MPD1583TS, MPD1584TS have same electrical, PCB and BOM, only the colour and model' s names are different for marketing requirements.

**** Modified History ****

[illegible]

Table of Contents

Page

1. SUMMARY	6
1.1. TEST STANDARDS	6
1.2. TEST DESCRIPTION	6
1.3. TEST FACILITY	7
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	9
2.1. ENVIRONMENTAL CONDITIONS	9
2.2. GENERAL DESCRIPTION OF EUT	9
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	10
2.4. EQUIPMENTS USED DURING THE TEST	11
2.5. RELATED SUBMITTAL(s) / GRANT (s)	11
2.6. MODIFICATIONS	11
3. TEST CONDITIONS AND RESULTS	12
3.1. CONDUCTED EMISSIONS TEST	12
3.2. RADIATED EMISSIONS AND BAND EDGE	15
3.3. MAXIMUM CONDUCTED OUTPUT POWER	25
3.4. POWER SPECTRAL DENSITY	26
3.5. 6dB BANDWIDTH	27
3.6. OUT-OF-BAND EMISSIONS	28
3.7. ANTENNA REQUIREMENT	29
4. TEST SETUP PHOTOS OF THE EUT	30
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	32

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shaheixi Road, Nanshan District, Shenzhen, China 518055

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 9KHz~30MHz	± 3.66 dB	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Automotive Diagnostic Tool
Model/Type reference:	DS100
Power supply:	AC120V/60Hz&Powered by a 11.1V DC battery
Adapter information:	MODEL: SJ-13520009 INPUT: 100-240V,50/60Hz 0.8A OUTPUT: 13.5V==2.0A

2.4G WIFI

Supported type:	802.11b/802.11g/802.11n(HT20)
Modulation:	802.11b: DSSS 802.11g/802.11n(HT20):OFDM
Operation frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz
Channel number:	802.11b/802.11g/802.11n(HT20): 11
Channel separation:	5MHz
Antenna type:	PIFA Antenna
Antenna gain:	2.16dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 11 channels provided to the EUT and Channel 01/03/06/09/11 were selected for WIFI test.

Operation Frequency WIFI :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Note: The line display in grey were the channel selected for testing

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Conducted Output Power	11b/DSSS	1 Mbps	1/6/11
Power Spectral Density	11g/OFDM	6 Mbps	1/6/11
6dB Bandwidth	11n(20MHz)/OFDM	6.5Mbps	1/6/11
Spurious RF conducted emission			
Radiated Emission 9kHz~1GHz&			
Radiated Emission 1GHz~10th Harmonic			
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11

There was 2 test Modes. TM1 to TM2 were shown below:

TM1 : Operate in 2.4G WIFI mode;
TM2 : Idle mode;

***Note:

1. All test modes were tested, but we only recorded the worst case in this report.

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Agilent	N9020A	US46220290	2024/05/02	2025/05/01
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/02	2025/05/01
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2024/12/21	2027/12/20
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Amplifier	Agilent	8449B	3008A02306	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03
Power measurement module	TSTPASS	TSPS2023R	TSCB220016	2024/05/03	2025/05/02
Power Sensor	Agilent	U2021XA	MY53340004	2024/05/04	2025/05/03
Power Sensor	Agilent	U2021XA	MY54080012	2024/05/03	2025/05/02
Spectrum Analyzer	RS	FSP	1164.4391.38	2024/05/03	2025/05/02
Test Software					
Name of Software			Version		
TST-PASS			V2.0		
EZ_EMC(Below 1GHz)			V1.1.4.2		
EZ_EMC((Above 1GHz)			V1.1.4.2		

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

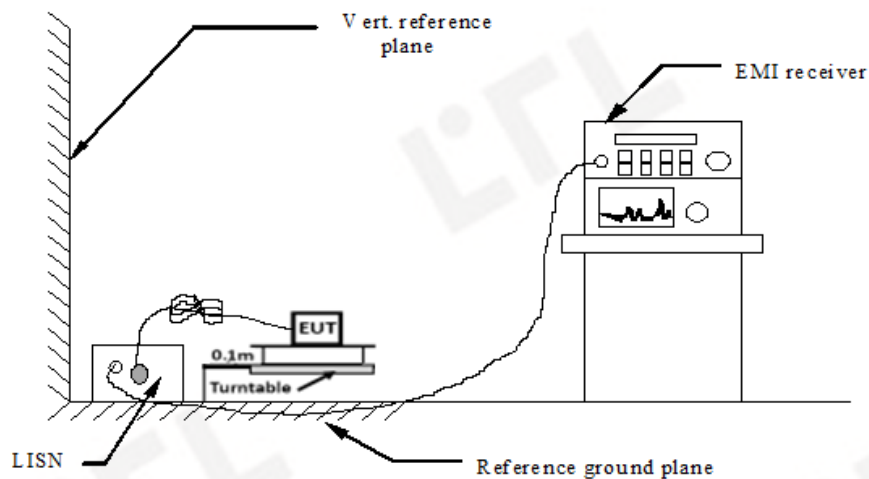


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Speaker; a wooden table with a height of 0.1 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Line:	L
Test Modes	TM2

SCAN TABLE: "Voltage (9K-30M)FIN"
Short Description: 150K-30M Voltage

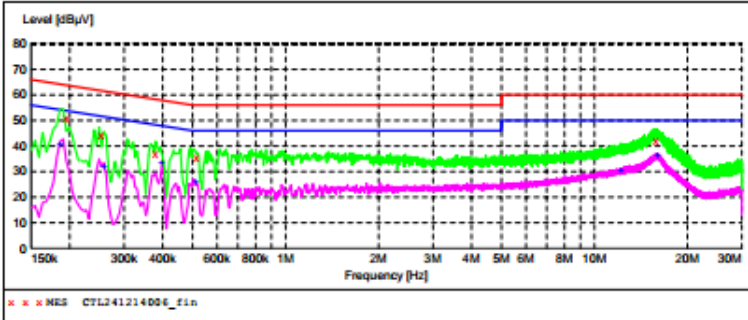

x x x NES CTL241214006_fin

MEASUREMENT RESULT: "CTL241214006_fin"

12/17/2024 9:01AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.195000	51.00	10.0	64	12.8	QP	L1	GND
0.253500	44.20	10.0	62	17.4	QP	L1	GND
0.379500	37.20	10.0	58	21.1	QP	L1	GND
0.514500	35.80	10.0	56	20.2	QP	L1	GND
15.814500	41.80	11.2	60	18.2	QP	L1	GND


MEASUREMENT RESULT: "CTL241214006_fin2"

12/17/2024 9:01AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.186000	40.30	10.0	54	13.9	AV	L1	GND
0.258000	32.00	10.0	52	19.5	AV	L1	GND
0.397500	33.60	10.0	48	14.3	AV	L1	GND
0.510000	26.00	10.0	46	20.0	AV	L1	GND
12.169500	30.30	10.9	50	19.7	AV	L1	GND
16.012500	35.90	11.2	50	14.1	AV	L1	GND

Line:	N
Test Modes	TM2

SCAN TABLE: "Voltage (9K-30M)_fin"
Short Description: 150K-30M Voltage

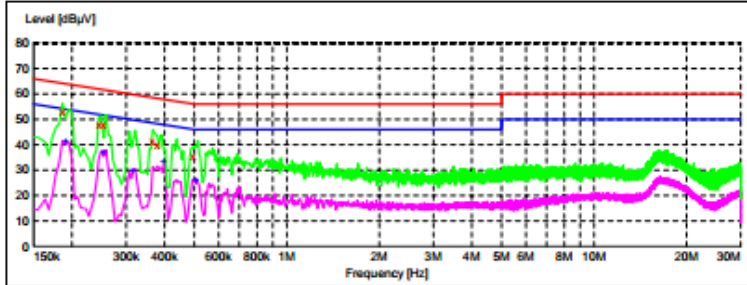

* * * NRES CTL241214005_fin

MEASUREMENT RESULT: "CTL241214005_fin"

12/17/2024 8:58AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.186000	53.10	10.0	64	11.1	QP	N	GND
0.244500	47.80	10.0	62	14.1	QP	N	GND
0.253500	47.80	10.0	62	13.8	QP	N	GND
0.366000	41.10	10.0	59	17.5	QP	N	GND
0.379500	40.20	10.0	58	18.1	QP	N	GND
0.496500	35.30	10.0	56	20.8	QP	N	GND

MEASUREMENT RESULT: "CTL241214005_fin2"

12/17/2024 8:58AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.190500	41.60	10.0	54	12.4	AV	N	GND
0.253500	37.00	10.0	52	14.6	AV	N	GND
0.316500	29.70	10.0	50	20.1	AV	N	GND
0.397500	33.50	10.0	48	14.4	AV	N	GND
0.505500	25.80	10.0	46	20.2	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

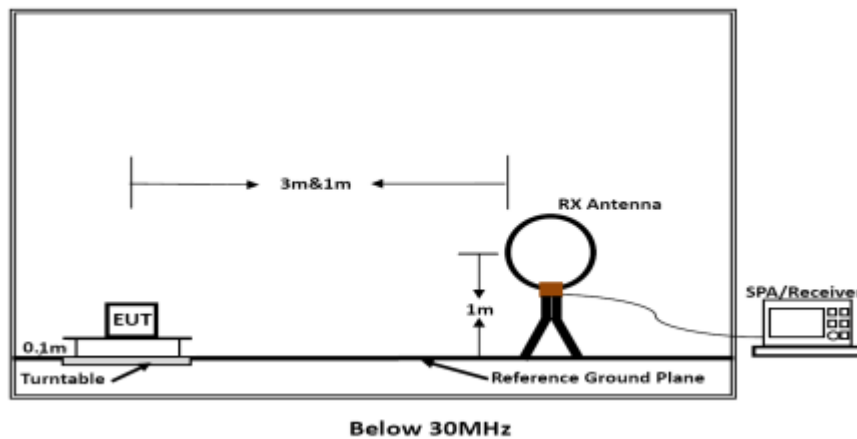

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

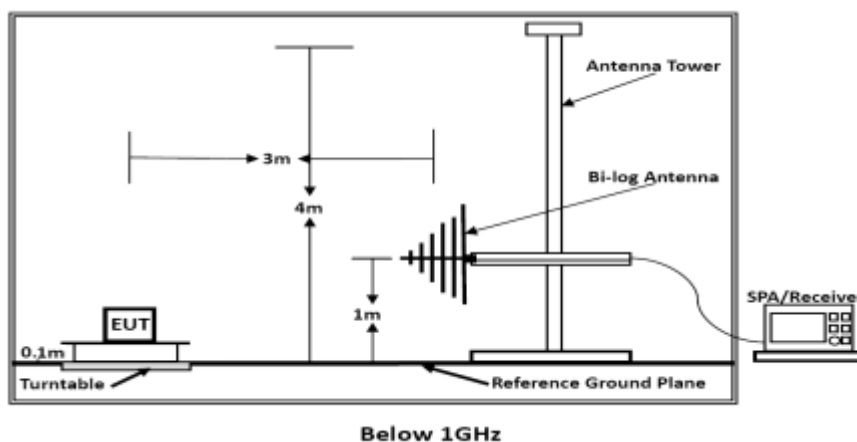

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

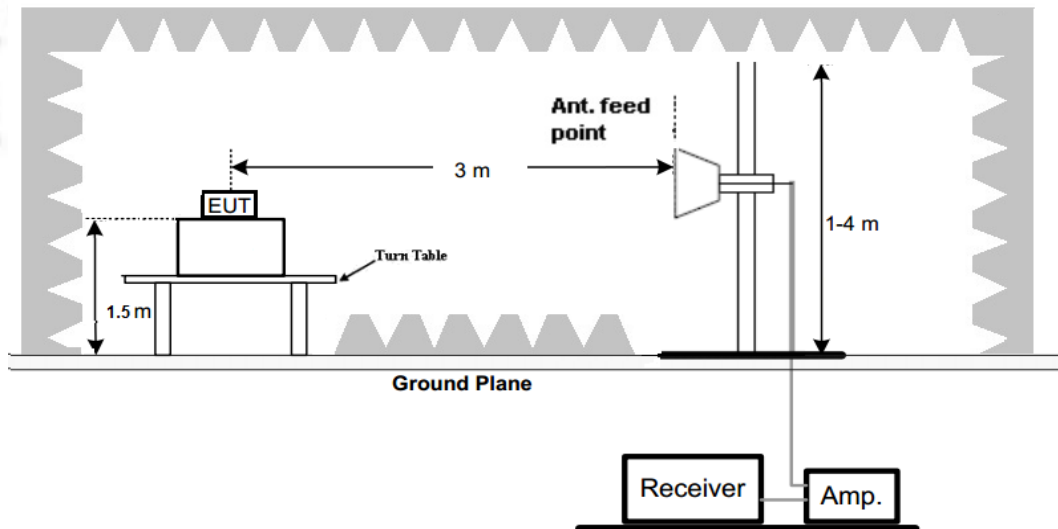
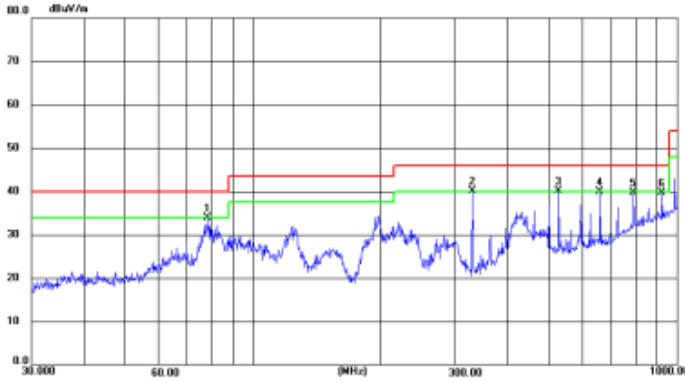
**Test Procedure**


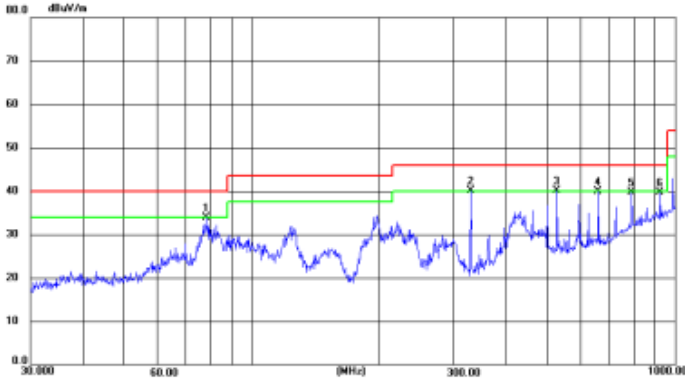
1. Below 1GHz measurement the EUT is placed on a turntable which is 0.1m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

TEST RESULTS**Remark:**

1. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
2. All three channels (lowest/middle/highest) of each mode were measured above 1GHz and recorded worst case at 802.11b mode.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.

For 30MHz-1GHz

Test mode:	TM1	Polarization:	Horizontal								
<div style="text-align: center;">Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194</div>											
<div style="text-align: center;">Radiated Emission Measurement File: RF_12 Date: #2093 Date: 2024/12/12 Time: 19:19:42 00.0 dBuV/m</div> 											
Site: LAB Chamber 2 Polarization: Horizontal Temperature: 25(C) Limit: FCC Part15 RE-Class C_30-1000MHz Power: Humidity: 50 % EUT: Distance: 3m MN: MPD141TS Mode: Wi-Fi2.4G 2412MHz Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	78.0361	22.44	11.46	33.90	40.00	6.10	peak	100	227	P	
2	330.0500	24.15	15.89	40.04	46.00	5.96	peak	100	132	P	
3	528.0143	19.68	20.48	40.16	46.00	5.84	peak	100	111	P	
4	659.9923	16.61	23.30	39.91	46.00	6.09	peak	100	54	P	
5	792.0060	13.35	26.45	39.80	46.00	6.20	peak	100	98	P	
6	924.1345	11.69	28.09	39.78	46.00	6.22	peak	100	121	P	


Test mode:	TM1	Polarization:	Vertical								
<div style="text-align: center;">Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194</div>											
<div style="text-align: center;">Radiated Emission Measurement File: RF_12 Date: #2093 Date: 2024/12/12 Time: 19:19:42 00.0 dBuV/m</div> 											
Site: LAB Chamber 2 Polarization: Horizontal Temperature: 25(C) Limit: FCC Part15 RE-Class C_30-1000MHz Power: Humidity: 50 % EUT: Distance: 3m MN: MPD141TS Mode: Wi-Fi2.4G 2412MHz Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD											
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	78.0361	22.44	11.46	33.90	40.00	6.10	peak	100	227	P	
2	330.0500	24.15	15.89	40.04	46.00	5.96	peak	100	132	P	
3	528.0143	19.68	20.48	40.16	46.00	5.84	peak	100	111	P	
4	659.9923	16.61	23.30	39.91	46.00	6.09	peak	100	54	P	
5	792.0060	13.35	26.45	39.80	46.00	6.20	peak	100	98	P	
6	924.1345	11.69	28.09	39.78	46.00	6.22	peak	100	121	P	

For 1GHz to 25GHz**802.11b Mode (above 1GHz)**

Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11g is reported

Horizontal**Channel 1**


Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

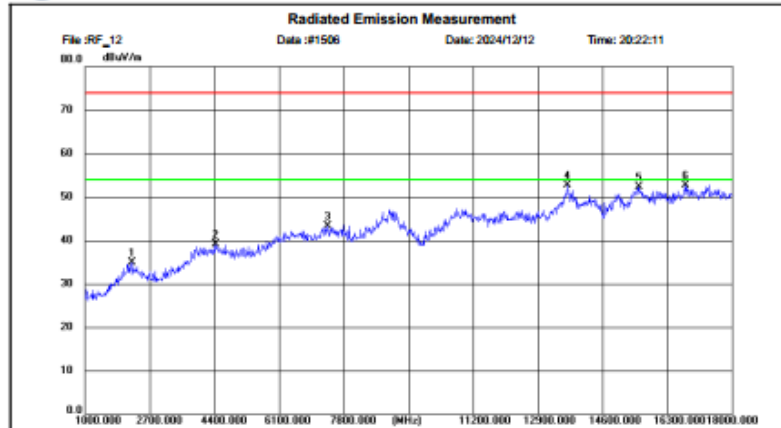

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2234.625	52.39	-17.51	34.88	74.00	39.12	peak	150	0	P	
2	4438.250	47.78	-8.71	39.07	74.00	34.93	peak	150	0	P	
3	7379.250	46.03	-2.82	43.21	74.00	30.79	peak	150	0	P	
4	13692.625	48.81	3.90	52.71	74.00	21.29	peak	150	0	P	
5	15569.000	48.38	3.92	52.30	74.00	21.70	peak	150	0	P	
6	16807.875	46.18	6.59	52.77	74.00	21.23	peak	150	0	P	

Vertical**Channel 1**

Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

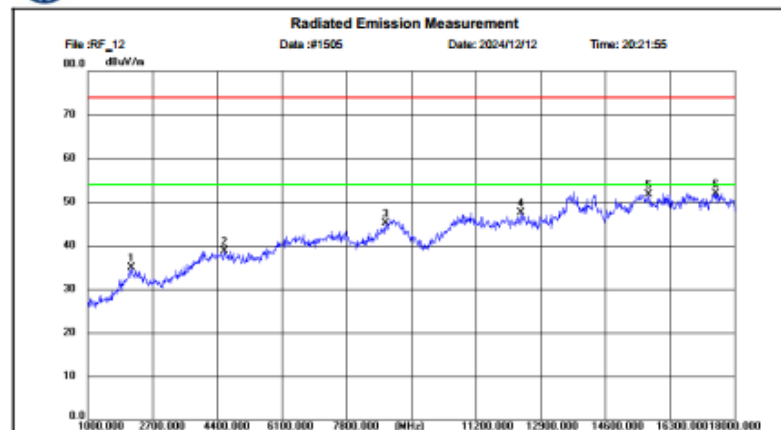


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2139.000	52.93	-17.97	34.96	74.00	39.04	peak	150	0	P	
2	4601.875	47.03	-8.23	38.80	74.00	35.20	peak	150	0	P	
3	8828.500	45.78	-0.75	45.03	74.00	28.97	peak	150	0	P	
4	12398.500	45.24	2.23	47.47	74.00	26.53	peak	150	0	P	
5	15745.375	47.58	4.11	51.69	74.00	22.31	peak	150	0	P	
6	17521.875	42.81	9.14	51.95	74.00	22.05	peak	150	0	P	

Horizontal

Channel 6



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

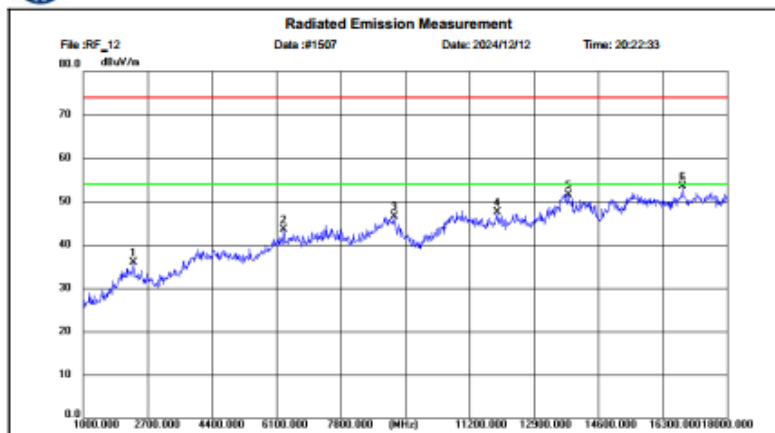

Site: LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: MPD141TS

Mode: Wi-Fi2.4G 2437MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2336.625	53.00	-17.15	35.85	74.00	38.15	peak	150	0	P	
2	6295.500	48.25	-4.80	43.45	74.00	30.55	peak	150	0	P	
3	9217.375	46.64	-0.04	46.60	74.00	27.40	peak	150	0	P	
4	11945.875	45.47	2.03	47.50	74.00	26.50	peak	150	0	P	
5	13830.750	47.76	3.74	51.50	74.00	22.50	peak	150	0	P	
6	16837.625	46.86	6.61	53.47	74.00	20.53	peak	150	0	P	

Vertical

Channel 6



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

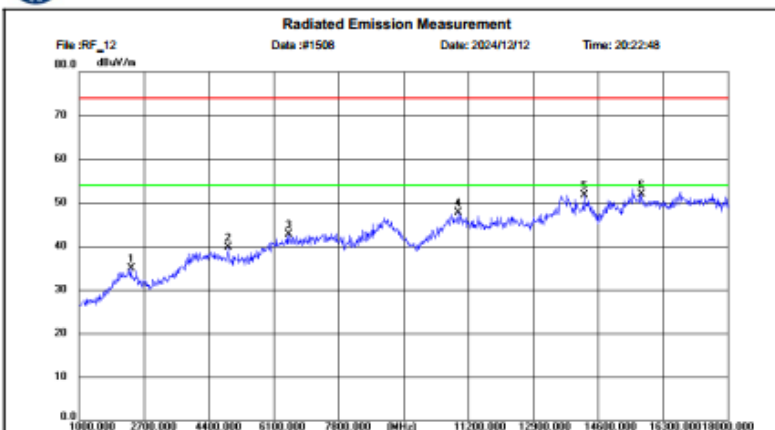

Site: LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: MPD141TS

Mode: Wi-Fi2.4G 2437MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2374.875	52.02	-17.03	34.99	74.00	39.01	peak	150	0	P	
2	4924.875	47.63	-7.89	39.74	74.00	34.26	peak	150	0	P	
3	6505.875	46.94	-4.30	42.64	74.00	31.36	peak	150	0	P	
4	10940.750	47.00	0.70	47.70	74.00	26.30	peak	150	0	P	
5	14257.875	48.86	2.92	51.78	74.00	22.22	peak	150	0	P	
6	15753.875	47.84	4.12	51.96	74.00	22.04	peak	150	0	P	

Horizontal

Channel 11



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

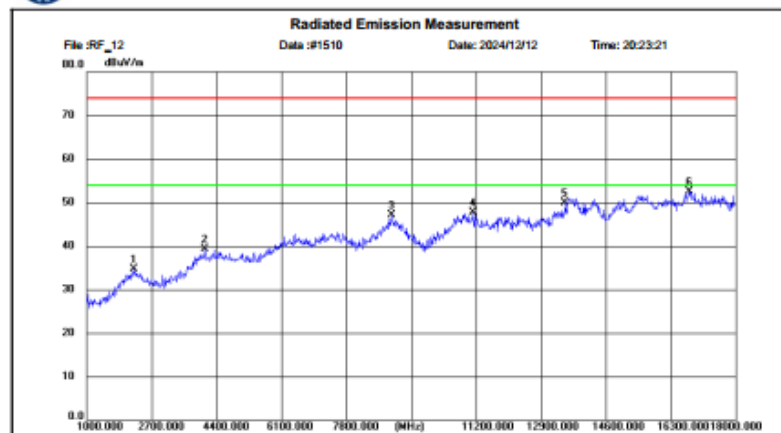

Site: LAB Chamber 2

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2462MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Horizontal**

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2234.625	52.13	-17.51	34.62	74.00	39.38	peak	150	0	P	
2	4104.625	49.27	-9.90	39.37	74.00	34.63	peak	150	0	P	
3	8992.125	47.33	-0.30	47.03	74.00	26.97	peak	150	0	P	
4	11117.125	46.88	0.79	47.67	74.00	26.33	peak	150	0	P	
5	13541.750	45.93	3.94	49.87	74.00	24.13	peak	150	0	P	
6	16786.625	45.95	6.55	52.50	74.00	21.50	peak	150	0	P	

Vertical

Channel 11



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

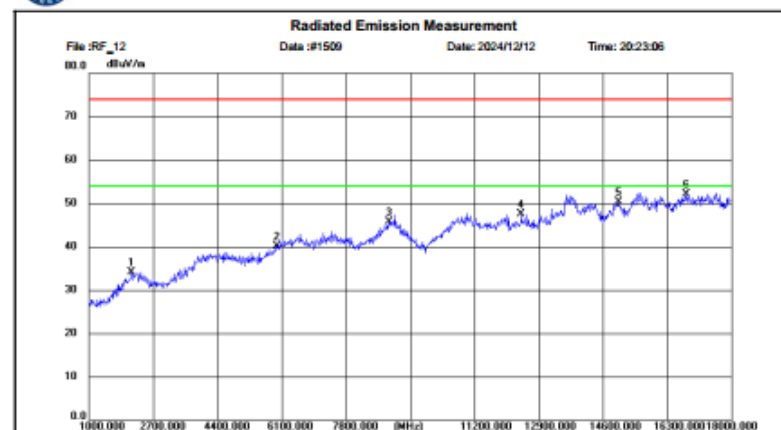

Site: LAB Chamber 2

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2462MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Vertical**

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2134.750	52.16	-18.01	34.15	74.00	39.85	peak	150	0	P	
2	5972.500	45.89	-5.74	40.15	74.00	33.85	peak	150	0	P	
3	8949.625	46.04	-0.41	45.63	74.00	28.37	peak	150	0	P	
4	12441.000	45.18	2.24	47.42	74.00	26.58	peak	150	0	P	
5	15022.875	46.90	3.36	50.26	74.00	23.74	peak	150	0	P	
6	16820.625	45.44	6.59	52.03	74.00	21.97	peak	150	0	P	

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW 1MHz VBW 3MHz Peak detector is for PK value; RBW 1MHz VBW 10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.
7. 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

Results of Band Edges Test (Radiated)


Note: 802.11b/802.11g/802.11n (H20) all have been tested, only worse case 802.11g is reported

Horizontal

Channel 1



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

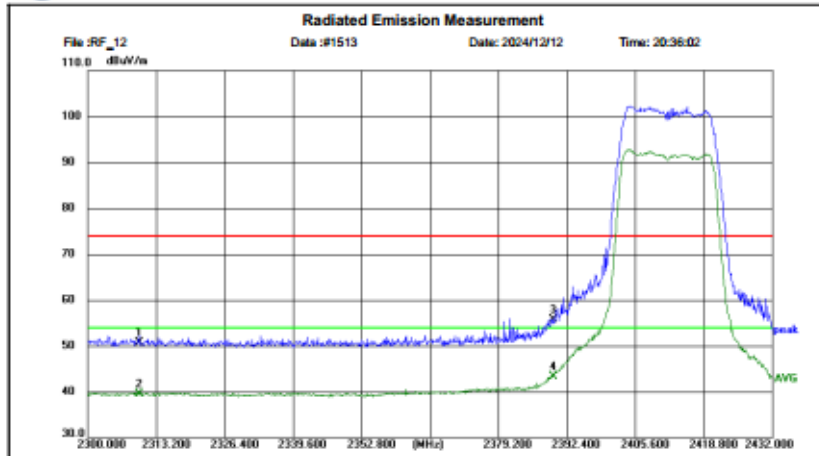

Site: LAB Chamber 2

Limit: FCC Part 15 C

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2412MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Horizontal**

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.01	9.69	50.70	74.00	23.30	peak	150	46	P	
2	2310.000	29.76	9.69	39.45	54.00	14.55	AVG	150	46	P	
3	2390.000	46.03	9.77	55.80	74.00	18.20	peak	150	2	P	
4	2390.000	33.60	9.77	43.37	54.00	10.63	AVG	150	2	P	

Vertical

Channel 1



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

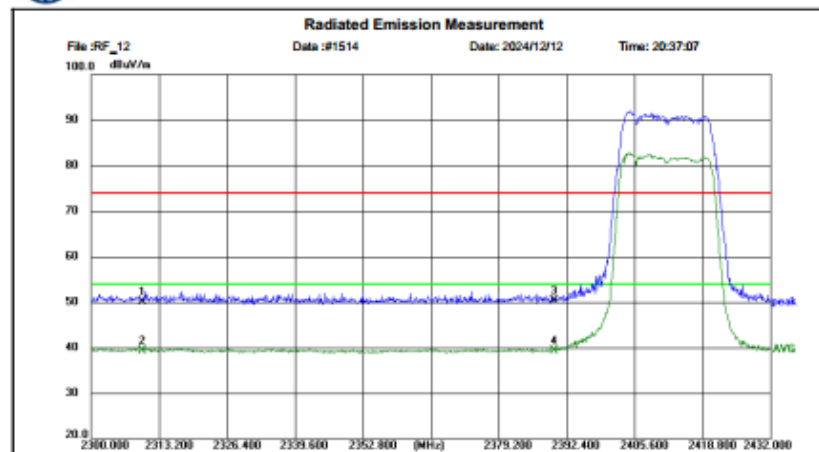

Site: LAB Chamber 2

Limit: FCC Part 15 C

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2412MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Vertical**

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.45	9.69	50.14	74.00	23.86	peak	150	84	P	
2	2310.000	29.57	9.69	39.26	54.00	14.74	AVG	150	84	P	
3	2390.000	40.56	9.77	50.33	74.00	23.67	peak	150	8	P	
4	2390.000	29.53	9.77	39.30	54.00	14.70	AVG	150	8	P	

Horizontal

Channel 11



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

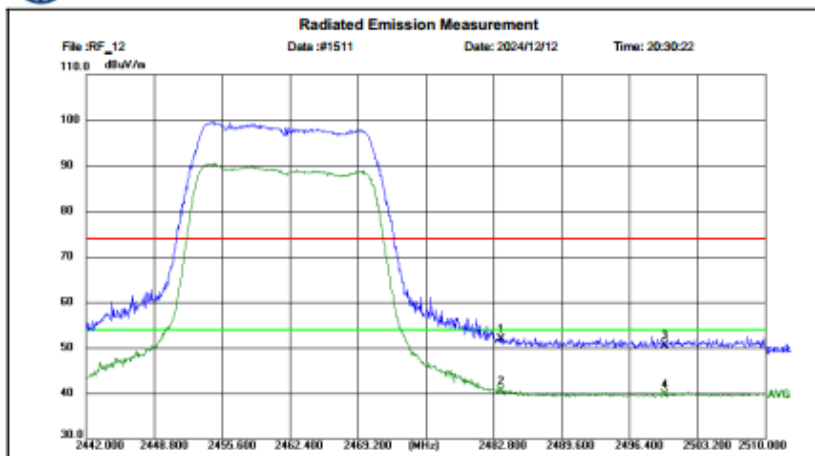

Site: LAB Chamber 2

Limit: FCC Part 15 C

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2462MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Horizontal**

Power:

Distance: 3m

Temperature: 25(C)

Humidity: 50 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	42.07	9.93	52.00	74.00	22.00	peak	150	170	P	
2	2483.500	30.56	9.93	40.49	54.00	13.51	AVG	150	170	P	
3	2500.000	40.41	10.00	50.41	74.00	23.59	peak	150	124	P	
4	2500.000	29.80	10.00	39.80	54.00	14.20	AVG	150	124	P	

Vertical

Channel 11



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

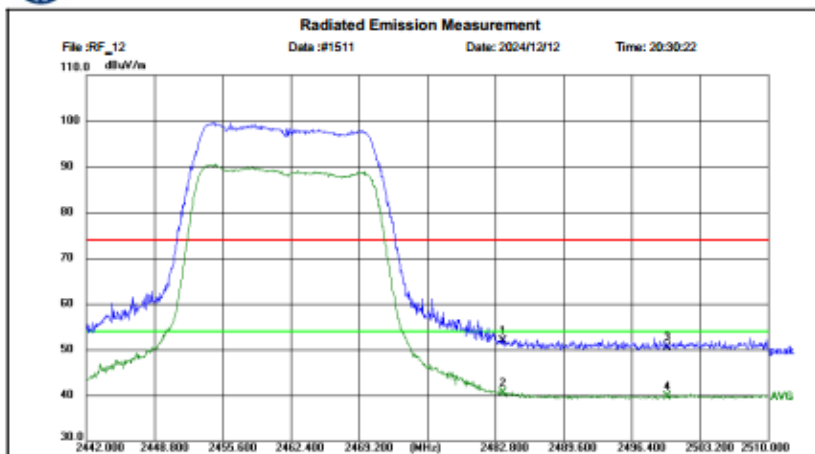

Site: LAB Chamber 2

Limit: FCC Part 15 C

EUT:

M/N: MPD141TS

Mode: Wi-Fi2.4G 2462MHz

Note: GUANGZHOU MAITENG TECHNOLOGY CO.,LTD

Polarization: **Horizontal**

Power:

Distance: 3m

Temperature: 25(C)

Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	42.07	9.93	52.00	74.00	22.00	peak	150	170	P	
2	2483.500	30.56	9.93	40.49	54.00	13.51	AVG	150	170	P	
3	2500.000	40.41	10.00	50.41	74.00	23.59	peak	150	124	P	
4	2500.000	29.80	10.00	39.80	54.00	14.20	AVG	150	124	P	

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. RBW 1MHz VBW 3MHz Peak detector is for PK value; RBW 1MHz VBW 10Hz Peak detector is for AV value.
6. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.
7. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration



Test Results

Raw data reference to Section 3 from CTL2412061021-WF02_2.4G_WIFI_Appendix. .

3.4. Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = Average.
6. Sweep points = 40001
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting PSD level must be 8dBm.

Test Configuration



Test Results

Raw data reference to Section 4 from CTL2412061021-WF02_2.4G_WIFI_Appendix. .

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Raw data reference to Section 2 from CTL2412061021-WF02_2.4G_WIFI_Appendix. .

3.6. Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

Test Configuration



Test Results

Raw data reference to Section 5 from CTL2412061021-WF02_2.4G_WIFI_Appendix. .

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4):



(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Test Result:

The maximum gain of 2.4G_WIFI Antenna was 2.16dBi.

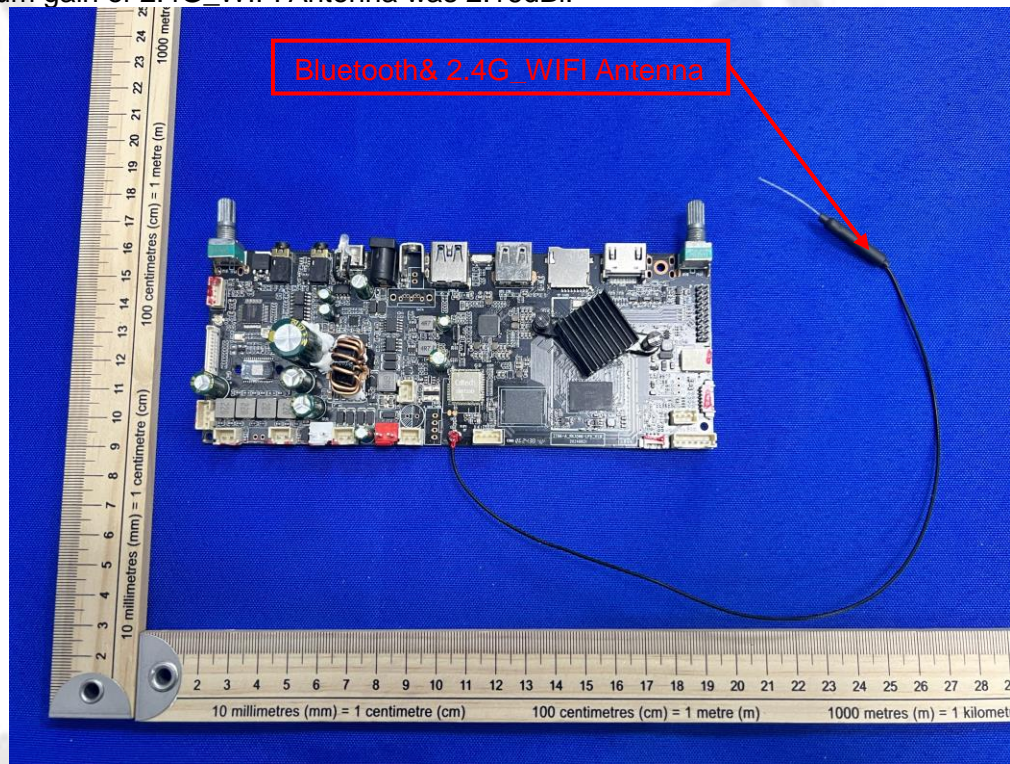

4. Test Setup Photos of the EUT

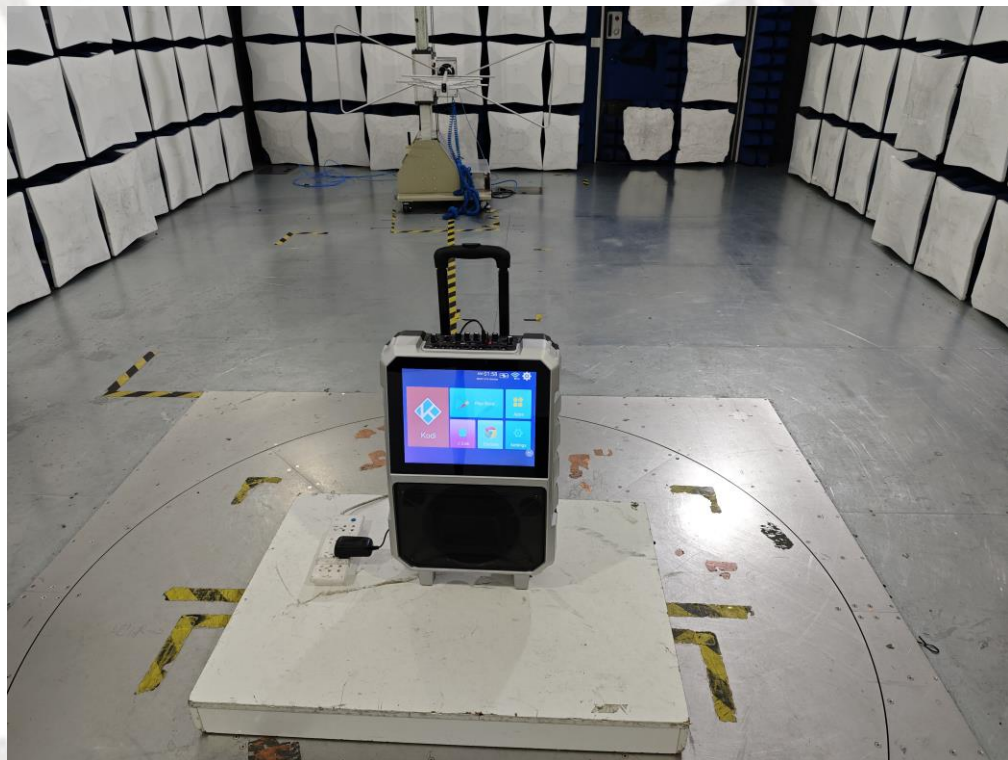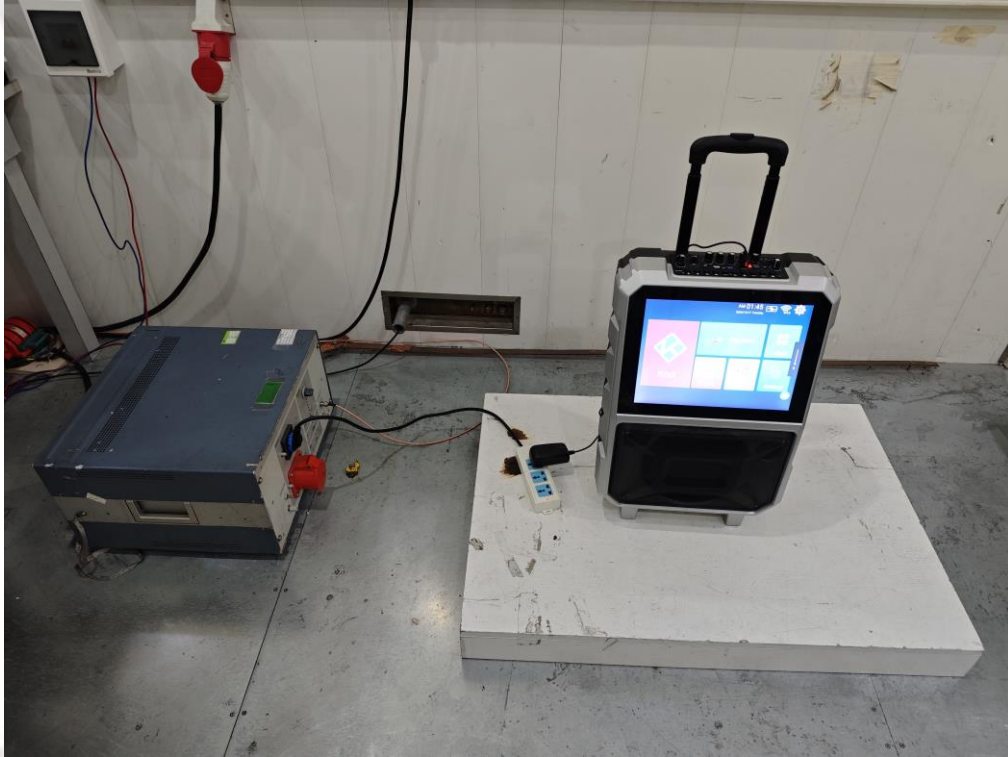

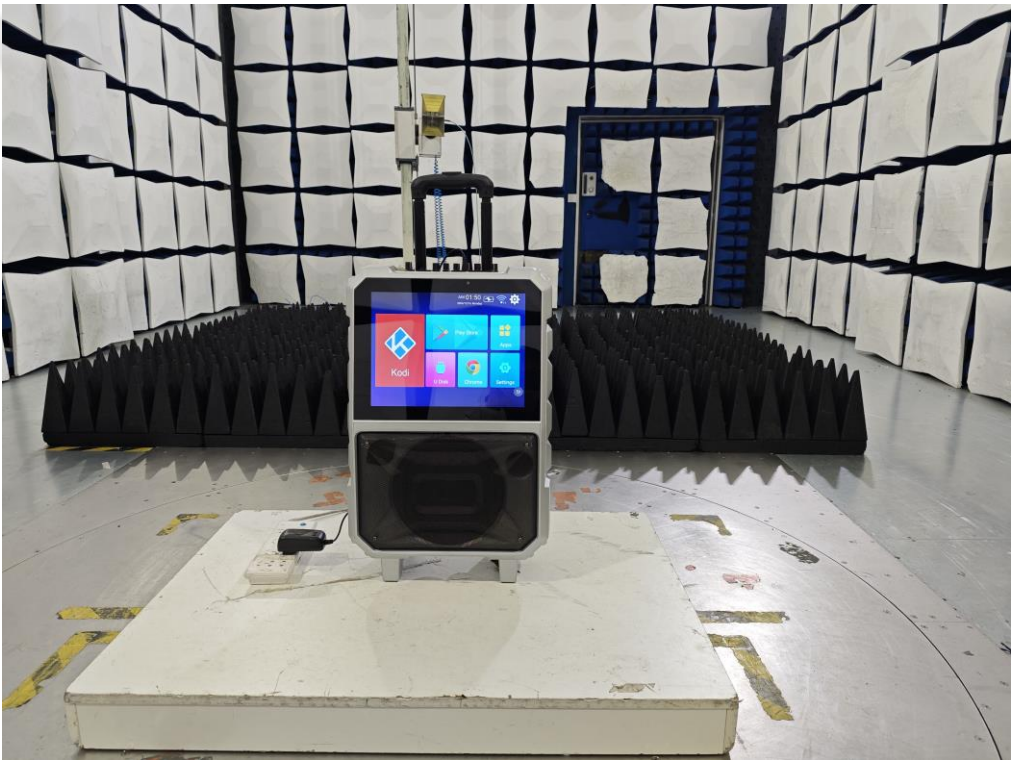

5. External and Internal Photos of the EUT

Reference to the test report No.CTL2412061021-WF01

***** End of Report *****