

SPECIFICATION FOR APPROVAL

CUSTOMER: **Dongguan Jufu Electronics Co., LTD**

Operation frequency: **113kHz-205kHz**

FINE P/N: **G43.5 Double slot -6.5UH single coil 0.08*24P*2*10TS**

DESC: **Φ43.5MMX5.0MMX0.6MM PC95 Material**

DATE: **2023/3/23**

Version: **A.0**

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE

Dongguan Jufu Electronics Co., LTD

Factory address: Sukeng village, Changping Town, Dongguan City

TEL: 0769-36820766


FAX: 0769-84526500

E-mail: 281749556@qq.com

Version Change History

SPECIFICATION

DESC:	Φ 20.5x40-6.5uH-0.15x18-15mm-	Rev: A.0	客户 CUST:	XXX	
			客户料号 CUST P/N:		
一、DIMENSION:(mm)			A	38.50±1.5	

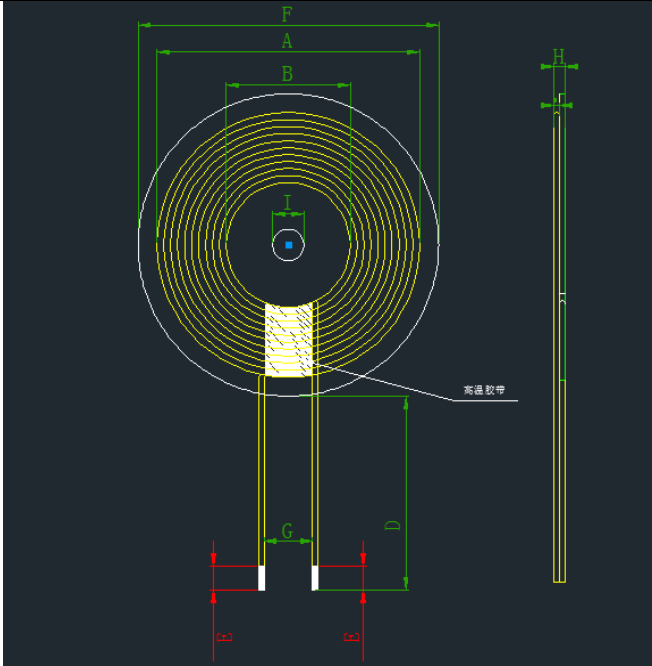

B	20.5±0.5
C	1.25 Max
D	15±2
E	4±2
F	43.5±1
G	10.0 ref
H	1.6 Max
I	5.3 ref


Note:

1. Cross out wire;

2. Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position;

3. The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 43.5±1mm, the inner hole is 5.3mm, and the thickness is 0.6±0.2mm.

二、 SCHEMATIC DIAGRAM:

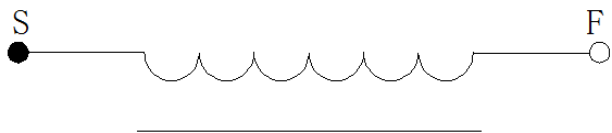

三、 Winding Specification:

NO.	TERMINAL		WIRE	Turns	Winding Direction
1	S	F	Enamelled wire 0.08*24*2	10Ts	CCW

四、 ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20% Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.3uH ±10% Magnetic sheet	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50m Ω		LCZ METER 502B

PREPARED BY/DATE	CHECKED BY/DATE
2023/03/23	2023/07/4