

# Fuzhou Ulandpower Technology Co., LTD.

## RF TEST REPORT

**REPORT TYPE:**

FCC Part 15.225 RF Report

**MODEL:**

UNR1-A40T, UNR1-A48T

**REPORT NUMBER:**

2410B0983SHA-001

**ISSUE DATE:**

March 15, 2025

**DOCUMENT CONTROL NUMBER:**

TTRF15.225\_V1 © 2018 Intertek



**Applicant:** Fuzhou Ulandpower Technology Co., LTD.  
902, Building 1, Wanfu Center, High-Tech Zone, Minhou County,  
Fuzhou City, Fujian Province, 35000

**Manufacturer:** Fuzhou Ulandpower Technology Co., LTD.  
902, Building 1, Wanfu Center, High-Tech Zone, Minhou County,  
Fuzhou City, Fujian Province, 35000

**Factory:** Fuzhou Ulandpower Technology Co., LTD.  
902, Building 1, Wanfu Center, High-Tech Zone, Minhou County,  
Fuzhou City, Fujian Province, 35000

**FCC ID:** 2BG8P-UNR148T

#### SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:


**47CFR Part 15 (2023):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2020):** American National Standard of Procedures for Compliance Testing of  
Unlicensed Wireless Devices

#### PREPARED BY:

#### REVIEWED BY:

Project Engineer  
Scout Gong

  
Reviewer  
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## TEST REPORT

## Content

<b>REVISION HISTORY.....</b>	<b>4</b>
<b>MEASUREMENT RESULT SUMMARY .....</b>	<b>5</b>
<b>1 GENERAL INFORMATION .....</b>	<b>6</b>
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....	6
1.2 TECHNICAL SPECIFICATION.....	6
1.3 DESCRIPTION OF TEST FACILITY.....	7
<b>2 TEST SPECIFICATIONS.....</b>	<b>8</b>
2.1 STANDARDS OR SPECIFICATION .....	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST SOFTWARE LIST .....	8
2.4 TEST PERIPHERALS LIST.....	8
2.5 TEST ENVIRONMENT CONDITION:.....	8
2.6 INSTRUMENT LIST .....	9
2.7 MEASUREMENT UNCERTAINTY.....	10
<b>3 FUNDAMENTAL EMISSION .....</b>	<b>11</b>
3.1 LIMIT .....	11
3.2 MEASUREMENT PROCEDURE .....	11
3.3 TEST CONFIGURATION .....	12
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS .....	13
<b>4 SPURIOUS EMISSION .....</b>	<b>15</b>
4.1 LIMIT .....	15
4.2 MEASUREMENT PROCEDURE .....	15
4.3 TEST RESULTS OF RADIATED EMISSIONS .....	17
<b>5 FREQUENCY STABILITY (TEMPERATURE VARIATION) .....</b>	<b>21</b>
5.1 TEST LIMIT .....	21
5.2 TEST CONFIGURATION .....	21
5.3 TEST PROCEDURE AND TEST SETUP .....	22
5.4 TEST PROTOCOL.....	22
<b>6 FREQUENCY STABILITY (VOLTAGE VARIATION) .....</b>	<b>23</b>
6.1 TEST LIMIT .....	23
6.2 TEST CONFIGURATION .....	23
6.3 TEST PROCEDURE AND TEST SETUP .....	23
6.4 TEST PROTOCOL.....	24
<b>7 CONDUCTED EMISSIONS .....</b>	<b>25</b>
7.1 LIMIT .....	25
7.2 TEST CONFIGURATION .....	25
7.3 MEASUREMENT PROCEDURE .....	26
7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	27
<b>8 20DB BANDWIDTH .....</b>	<b>29</b>
8.1 LIMIT .....	29
8.2 TEST CONFIGURATION.....	29
8.3 TEST PROCEDURE AND TEST SET UP.....	30
8.4 TEST PROTOCOL.....	31
<b>9 ANTENNA REQUIREMENT .....</b>	<b>32</b>

## Revision History

Report No.	Version	Description	Issued Date
2410B0983SHA-001	Rev. 01	Initial issue of report	March 15, 2025

## Measurement Result Summary

TEST ITEM	FCC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	Pass
Spurious emission	15.225(d)	Pass
Frequency stability	15.225(e)	Pass
Conducted emissions	15.207	Pass
99% and 20dB Bandwidth	15.215(c)	Pass
Antenna requirement	15.203	Pass

**Notes:**

1. NA =Not Applicable
2. The determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.
3. Additions, Deviations and Exclusions from Standards: None.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	Electric Vehicle Charging Station
Type/Model:	UNR1-A40T, UNR1-A48T
Description of EUT:	EUT is an electric vehicle AC charger with RFID function. There are two models, the products are electrically identical except for differences in rated output current. UNR1-A48T was tested as a representative. EUT supports Wi-Fi/BLE function. Here is the certificate information about the Wi-Fi module, FCC ID: 2AC7Z-ESPWROOM32UE.
Rating:	For UNR1-A40T: 240V, 40A For UNR1-A48T: 240V, 48A
EUT type:	<input checked="" type="checkbox"/> Tabletop <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Serial numbers:	A250301-22-001
Sample received date:	March 1, 2025
Date of test:	March 1, 2025, to March 15, 2025

### 1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

### 1.3 Description of Test Facility

Name:	Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address:	Building 86, No. 1198 Qinzhou Road (North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L21189
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2023)  
ANSI C63.10 (2020)

### 2.2 Mode of operation during the test

While testing, the internal modulation and continuous transmission was applied.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

### 2.4 Test peripherals list

Item No	Description	Band and Model	S/No
1	Resistor Load	-	-

### 2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH



## 2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2026-02-26
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2025-05-18
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2025-06-06
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2026-01-10
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2025-08-18
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2025-09-11
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2025-08-10
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2026-03-17
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2026-03-06
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2025-08-29
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6643	2025-08-29

## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ )
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

### 3 Fundamental Emission

Test result: **PASS**

#### 3.1 Limit


Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

#### 3.2 Measurement Procedure

- The EUT was placed on a 0.8m plank above the ground at a 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.


#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

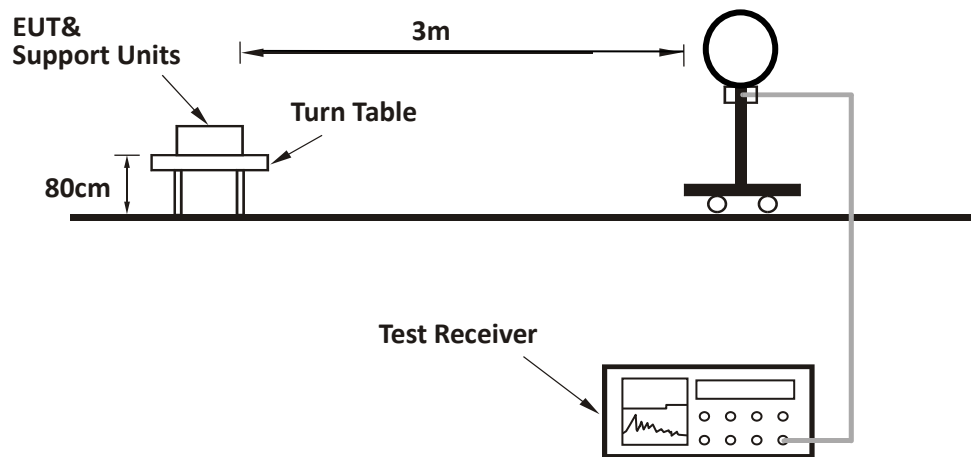
**TEST REPORT****3.3 Test Configuration**

### 3.4 Test Results of Fundamental Emissions


Antenna Polarization: X axis

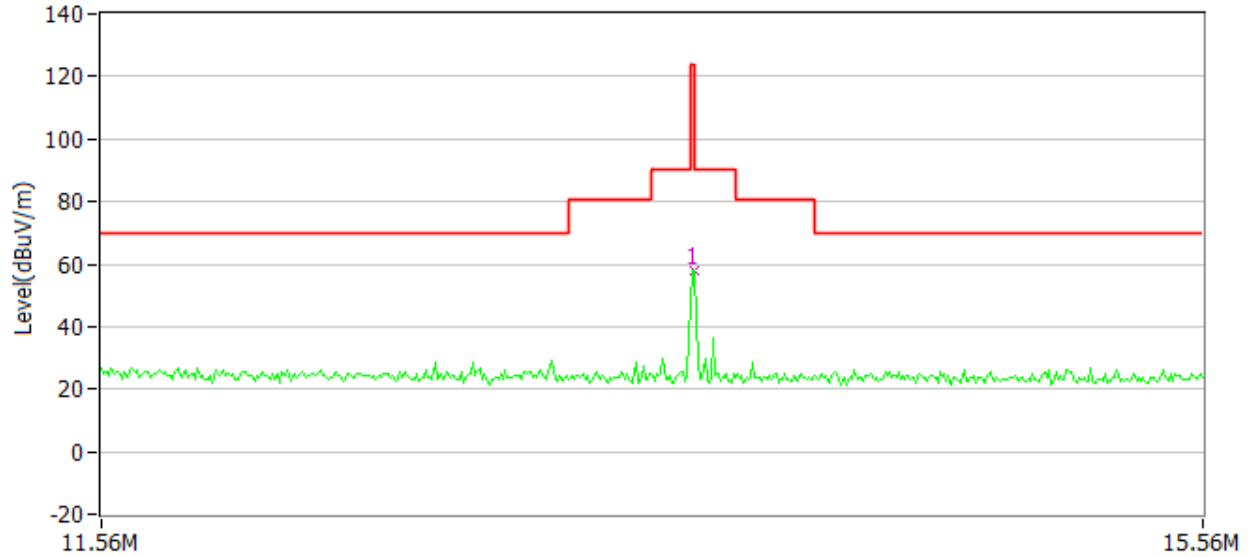

Antenna Polarization: Y axis

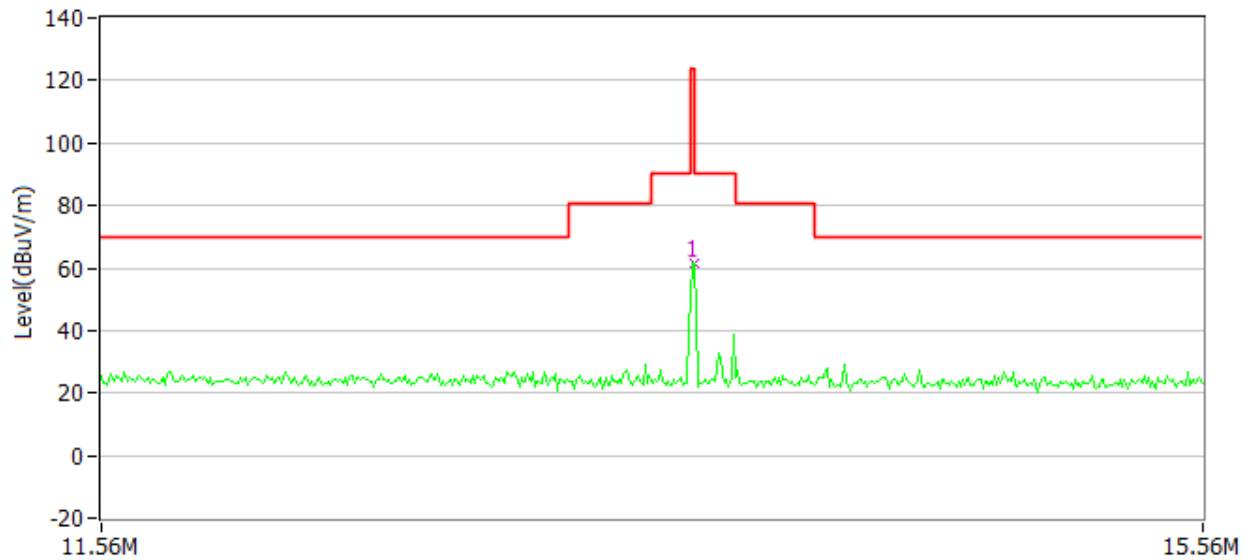

## Antenna Polarization: Z axis

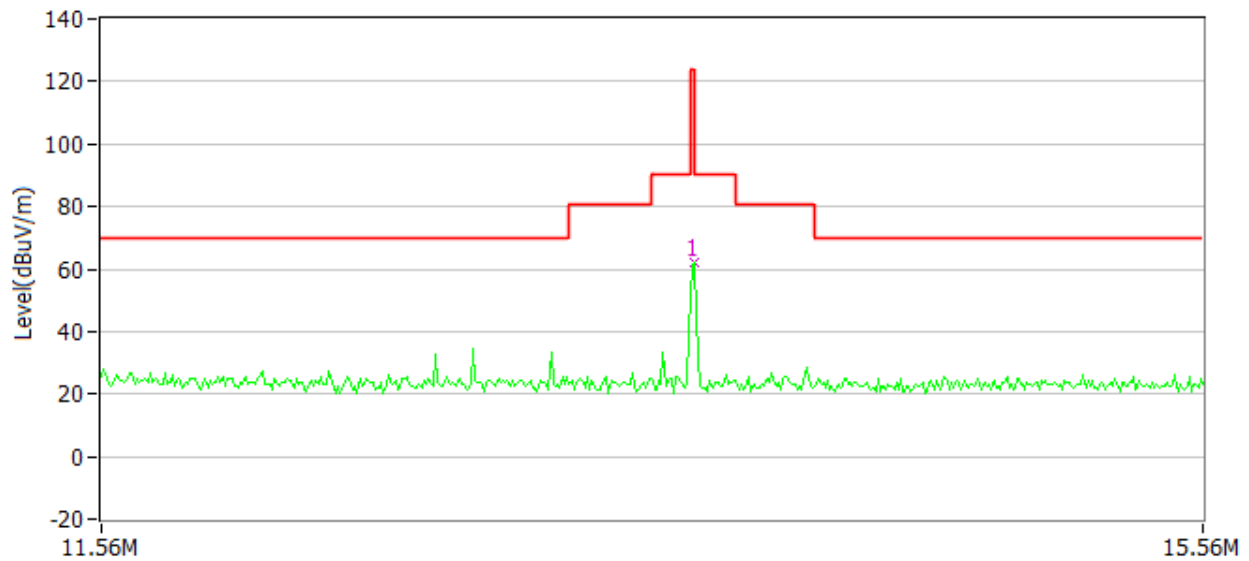

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
X	13.56	58.10	20.50	124.00	65.90	PK
Y	13.56	61.70	20.50	124.00	62.30	PK
Z	13.56	<b>61.90</b>	20.50	124.00	62.10	PK

## Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading

## Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV

Limit = 40.00dBuV/m

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m

Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m

Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB

## 4 Spurious Emission

Test result: **PASS**

### 4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 4.2 Measurement Procedure

#### For Radiated emission below 30MHz:

- The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

**TEST REPORT****For Radiated emission above 30MHz:**

- a) The EUT was placed on a 0.8m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported




### 4.3 Test Results of Radiated Emissions

Test Curve (below 30MHz):


Antenna Polarization: X axis

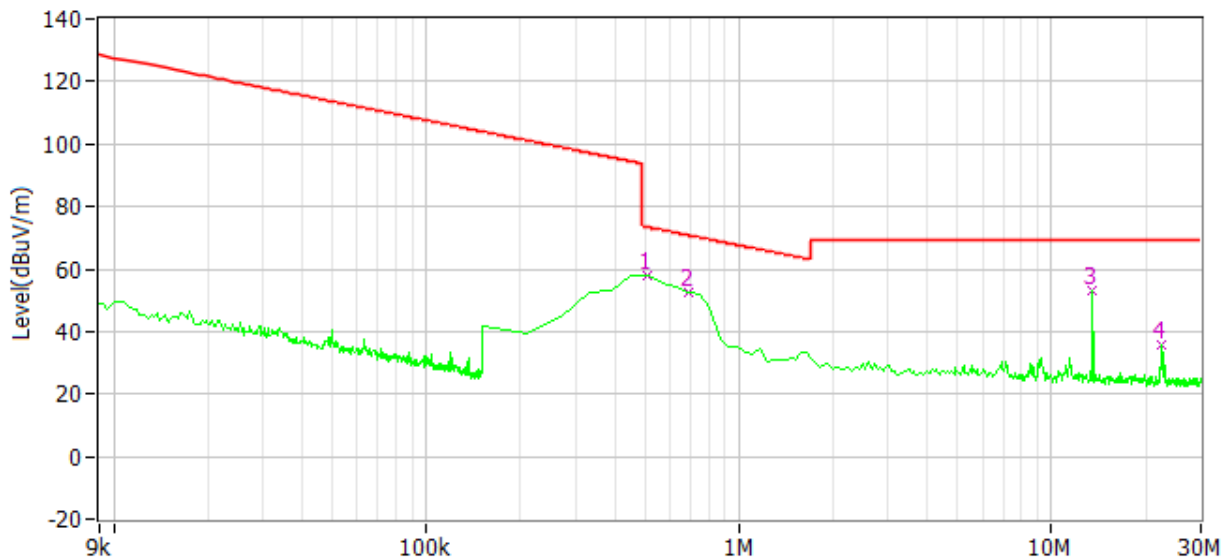

Antenna Polarization: Y axis

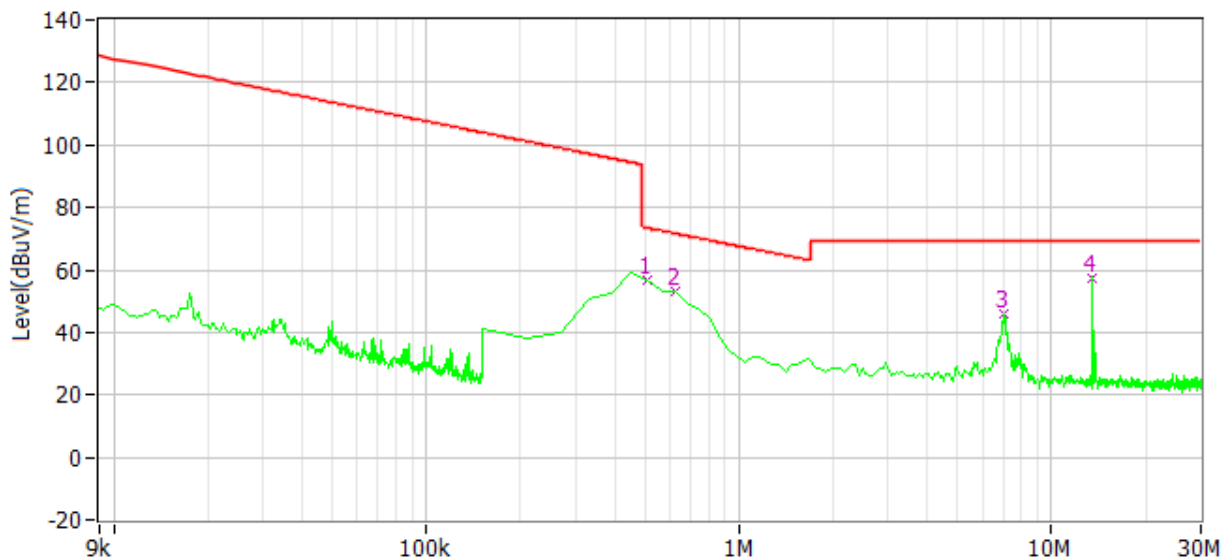

Antenna Polarization: Z axis

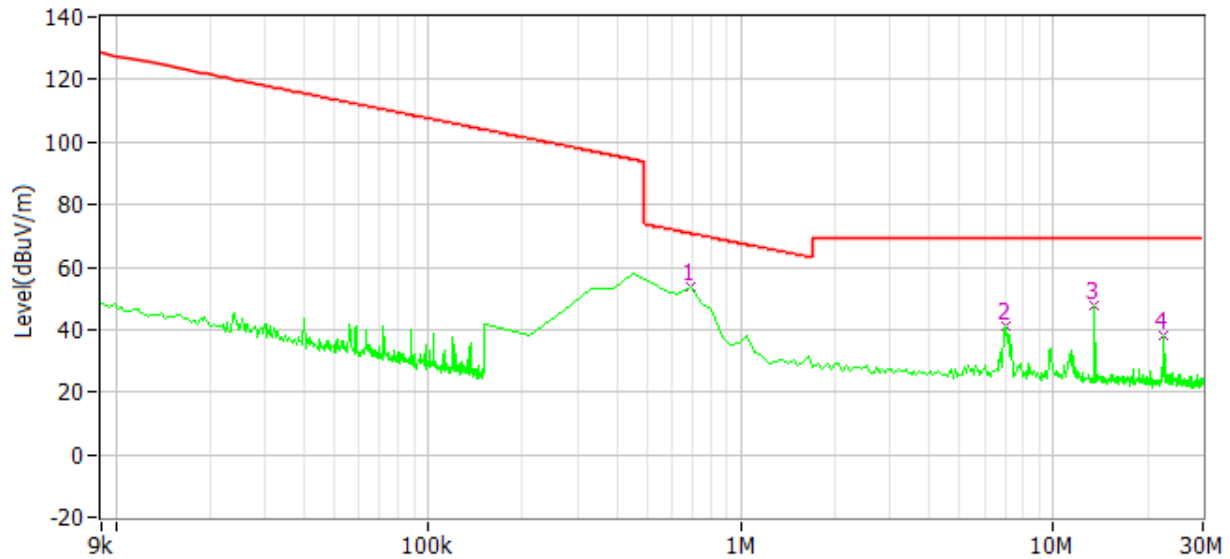

**Test data below 30MHz:**

Frequency	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Reading (dBuV)	Factor (dB/m)	Detector	Polarity
508.918kHz	73.50	57.80	15.70	37.60	20.20	PK	X
688.377kHz	70.90	52.40	18.50	32.20	20.20	PK	X
22.582MHz	69.50	35.90	33.60	15.20	20.70	PK	X
508.918kHz	73.50	56.70	16.80	36.50	20.20	PK	Y
628.557kHz	71.60	53.30	18.30	33.10	20.20	PK	Y
7.029MHz	69.50	46.10	23.40	25.70	20.40	PK	Y
688.377kHz	70.90	53.80	17.10	33.60	20.20	PK	Z
7.029MHz	69.50	40.90	28.60	20.50	20.40	PK	Z
22.523MHz	69.50	38.10	31.40	17.40	20.70	PK	Z


**Remark:**

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.


**TEST REPORT**

**Test Curve (30MHz to 1000MHz):**

Horizontal

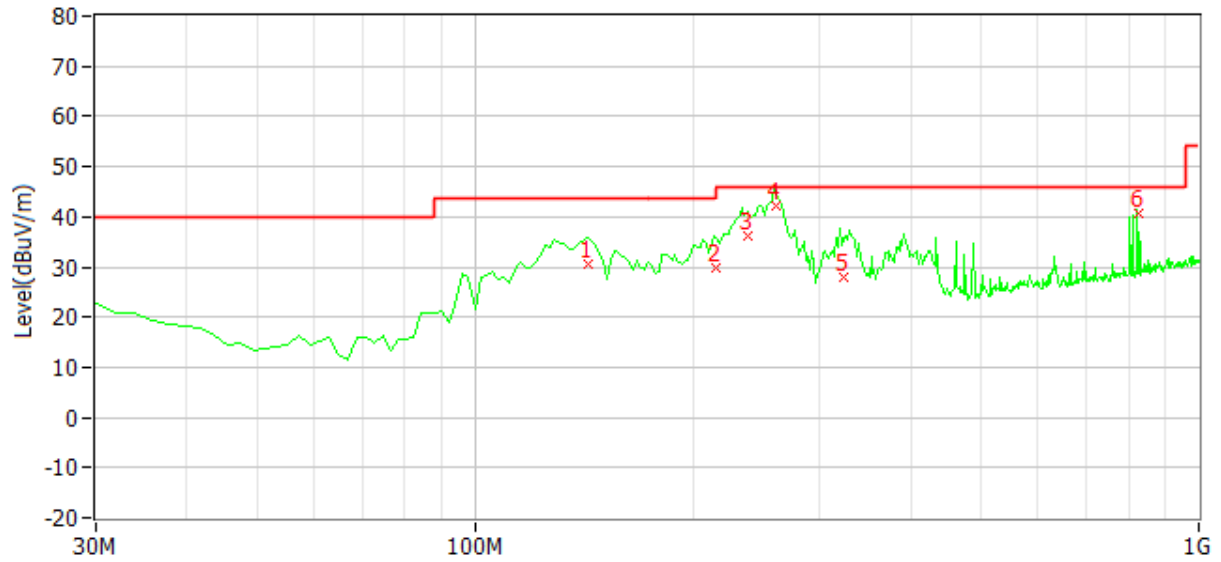

Vertical

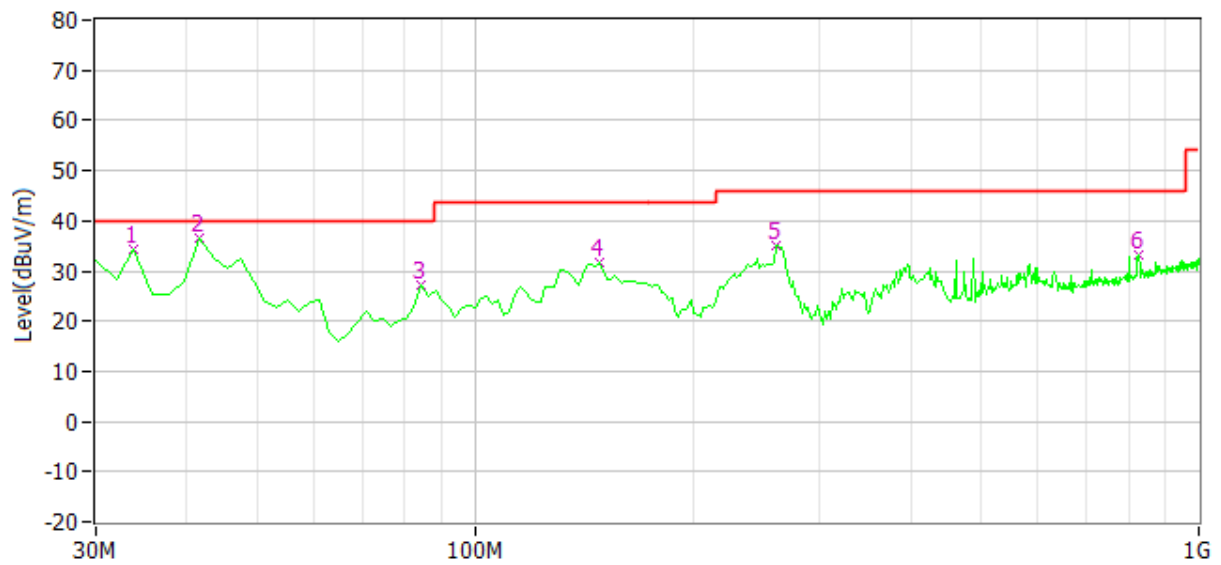

## TEST REPORT

### Test data (30MHz to 1000MHz)

Frequency (MHz)	Limit (dBuV/m)	Corrected Reading (dBuV/m)	Margin (dB)	Original Reading (dBuV)	Correct Factor (dB/m)	Detector	Polar
143.786	43.50	30.60	12.90	18.30	12.30	QP	Hor
215.285	43.50	29.90	13.60	19.00	10.90	QP	Hor
237.793	46.00	36.10	9.90	23.20	12.90	QP	Hor
260.353	46.00	42.10	3.90	26.90	15.20	QP	Hor
322.888	46.00	27.80	18.20	11.90	15.90	QP	Hor
826.671	46.00	40.50	5.50	17.40	23.10	QP	Hor
33.888	40.00	34.20	5.80	16.50	17.70	PK	Ver
41.663	40.00	36.40	3.60	22.90	13.50	PK	Ver
84.429	40.00	27.30	12.70	18.20	9.10	PK	Ver
148.577	43.50	31.80	11.70	19.70	12.10	PK	Ver
261.323	46.00	34.90	11.10	19.70	15.20	PK	Ver
825.050	46.00	33.10	12.90	10.00	23.10	PK	Ver

#### Remark:

1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

#### Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
Limit = 40.00dBuV/m.  
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;  
Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


## 5 Frequency Stability (Temperature Variation)

Test result: **PASS**

### 5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage.

### 5.2 Test Configuration

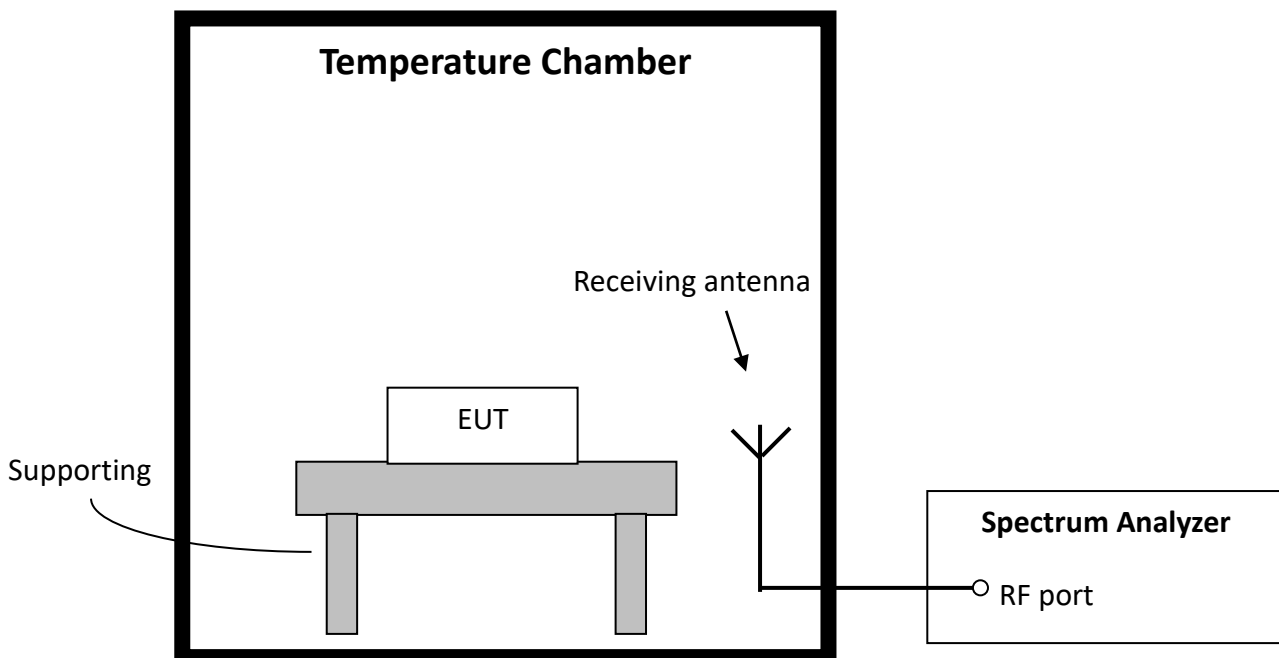

### 5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

### 5.4 Test protocol

Voltage (V)	Temp (°C)	Freq Measured (MHz)	Freq Nominal (MHz)	Tolerance (%)	Limit (%)
240	-20	13.5602	13.5600	0.0015	± 0.0100
	-10	13.5603		0.0023	
	0	13.5602		0.0015	
	10	13.5604		0.0030	
	20	13.5602		0.0015	
	30	13.5603		0.0023	
	40	13.5604		0.0030	
	50	13.5604		0.0030	


## 6 Frequency Stability (Voltage Variation)

Test result: **PASS**

### 6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 Test Configuration

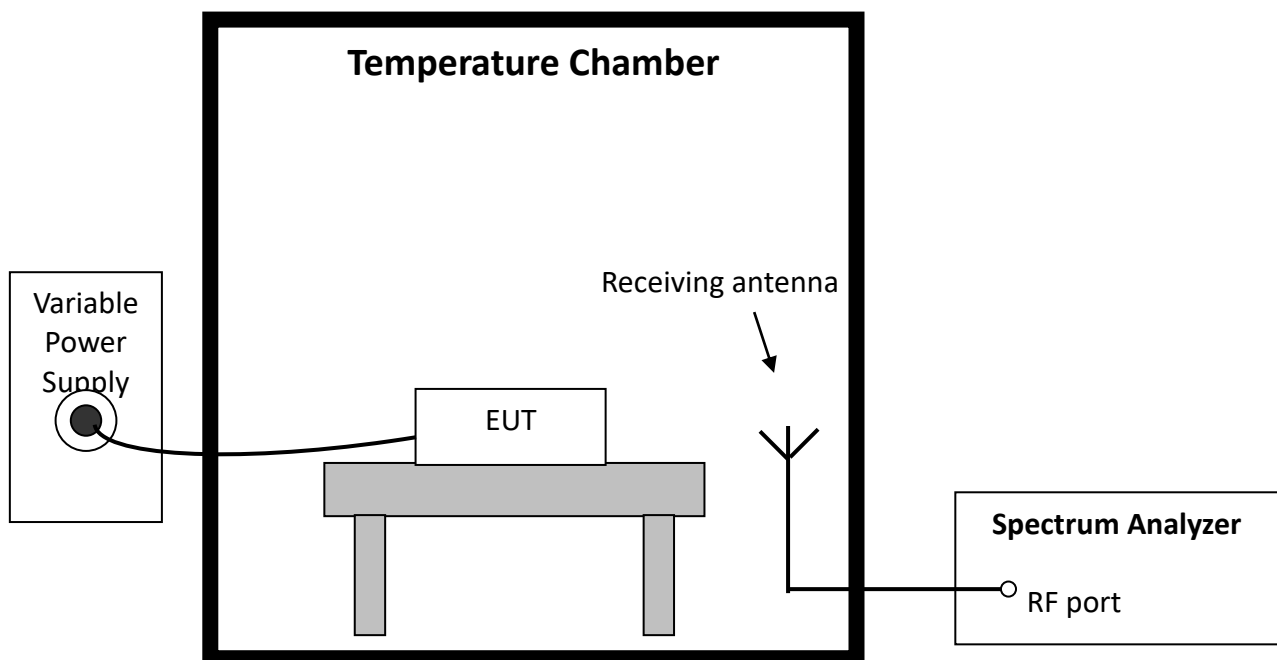

### 6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

## 6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	204	13.5603	13.5600	0.0023	± 0.0100
	240	13.5604		0.0030	
	276	13.5604		0.0030	



## 7 Conducted emissions

Test result: **PASS**


### 7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

Note:

1. \* Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz
2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

### 7.2 Test Configuration

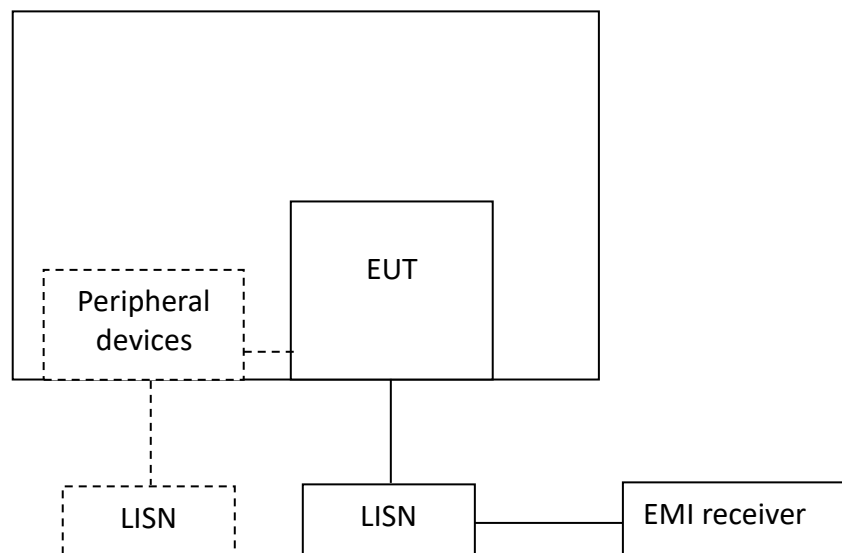

### 7.3 Measurement Procedure


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

## 7.4 Test Results of Conducted Emissions

### Test Curve:

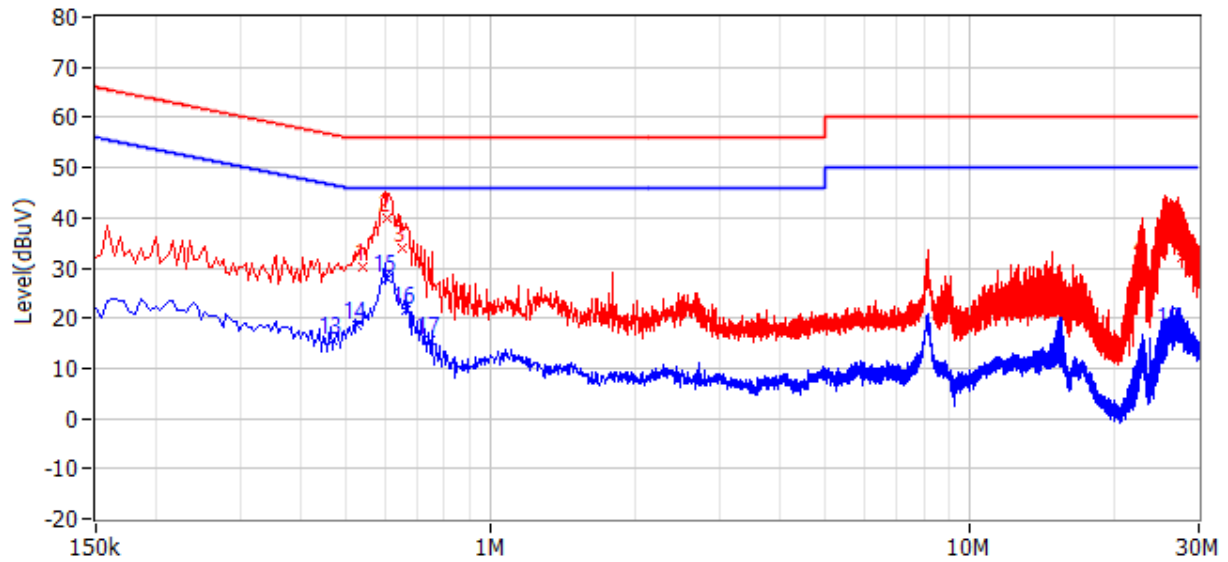

Line L1

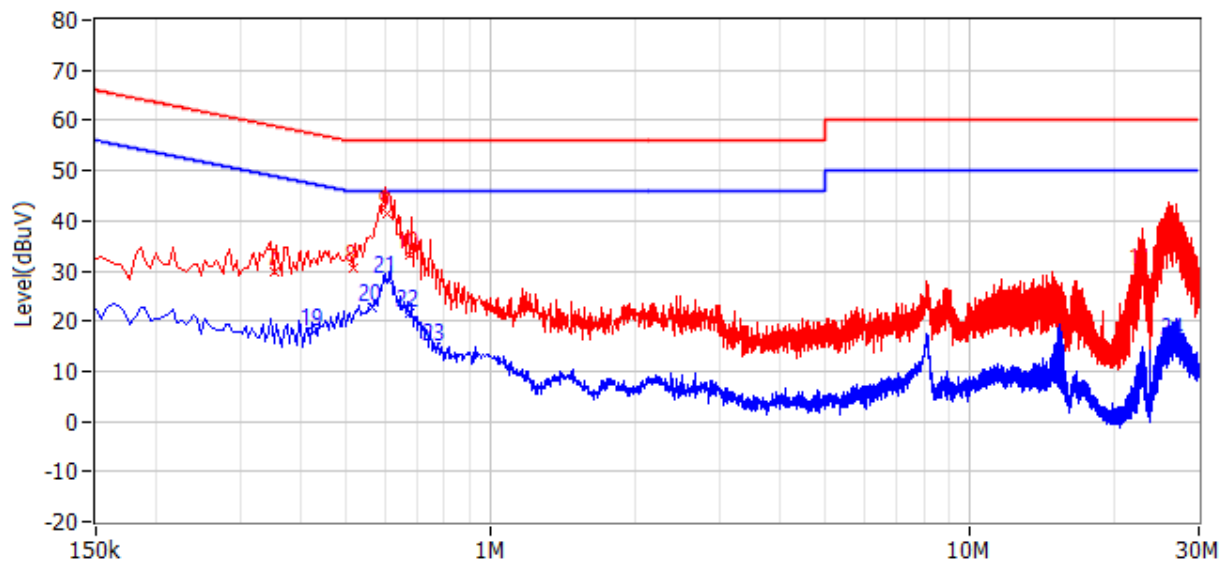

Line L2

# TEST REPORT

Frequency	Limit (dBuV)	Level (dBuV)	Delta (dB)	Original Receiver Reading (dBuV)	Correct Factor (dB)	Detector	Phase
541.500kHz	56.00	30.16	-25.84	23.96	6.20	QP	L1
609.000kHz	56.00	39.84	-16.16	33.64	6.20	QP	L1
654.000kHz	56.00	33.95	-22.05	27.75	6.20	QP	L1
22.889MHz	60.00	31.68	-28.32	24.28	7.40	QP	L1
25.742MHz	60.00	35.90	-24.10	28.30	7.60	QP	L1
27.744MHz	60.00	32.19	-27.81	24.39	7.80	QP	L1
352.500kHz	58.90	29.84	-29.06	23.64	6.20	QP	L2
514.500kHz	56.00	30.72	-25.28	24.52	6.20	QP	L2
609.000kHz	56.00	41.57	-14.43	35.37	6.20	QP	L2
676.500kHz	56.00	33.27	-22.73	27.07	6.20	QP	L2
22.965MHz	60.00	29.72	-30.28	22.42	7.30	QP	L2
25.940MHz	60.00	34.24	-25.76	26.74	7.50	QP	L2
469.500kHz	46.52	15.42	-31.10	9.22	6.20	CAV	L1
528.000kHz	46.00	18.48	-27.52	12.28	6.20	CAV	L1
609.000kHz	46.00	27.92	-18.08	21.72	6.20	CAV	L1
667.500kHz	46.00	21.63	-24.37	15.43	6.20	CAV	L1
748.500kHz	46.00	15.61	-30.39	9.41	6.20	CAV	L1
26.151MHz	50.00	17.57	-32.43	9.97	7.60	CAV	L1
429.000kHz	47.27	17.85	-29.42	11.65	6.20	CAV	L2
564.000kHz	46.00	22.81	-23.19	16.61	6.20	CAV	L2
609.000kHz	46.00	28.40	-17.60	22.20	6.20	CAV	L2
676.500kHz	46.00	21.49	-24.51	15.29	6.20	CAV	L2
766.500kHz	46.00	15.01	-30.99	8.81	6.20	CAV	L2
26.754MHz	50.00	15.79	-34.21	8.19	7.60	CAV	L2

## Remark:

1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
2. Level = Original Receiver Reading + Correct Factor
3. Delta = Level – Limit
4. If the PK Level is lower than AV limit, the AV test can be elided.
5. the emissions of 13.56MHz are the product's RF signal.


## 8 20dB Bandwidth

**Test result:**      **PASS**

### 8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.  
No limit for 99% bandwidth.

### 8.2 Test configuration

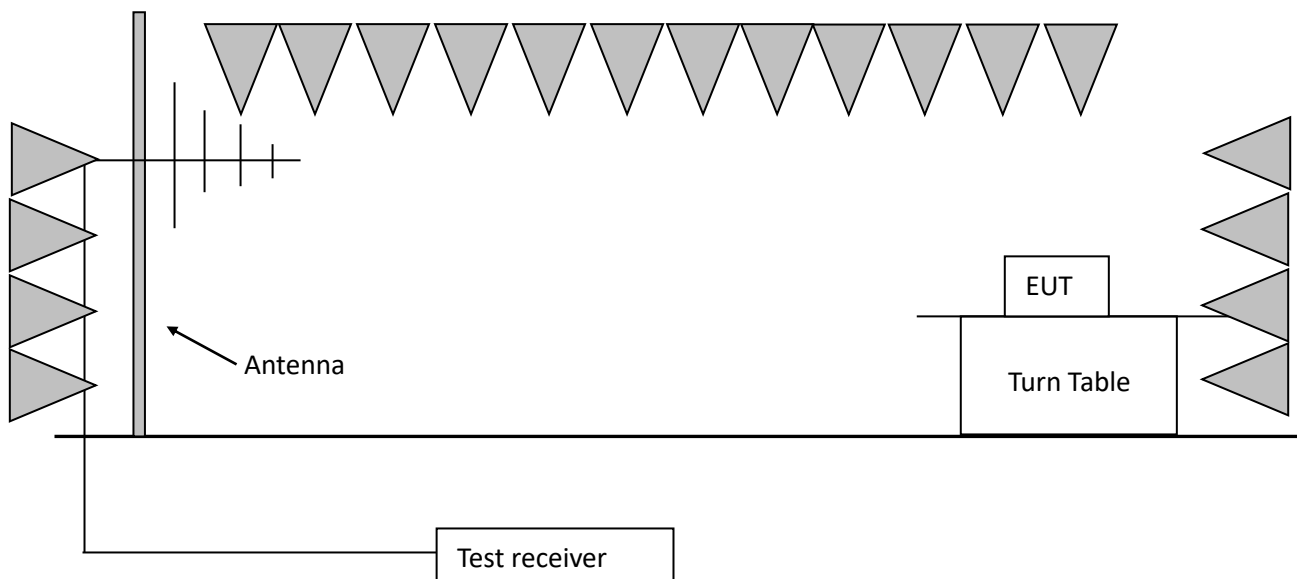

### 8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.


The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW  $\geq 3 \cdot$  RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

## 8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.559599	13.561937	2.378	13.553 ~ 13.567
Occupied bandwidth	13.559692	13.561834	2.142	13.553 ~ 13.567

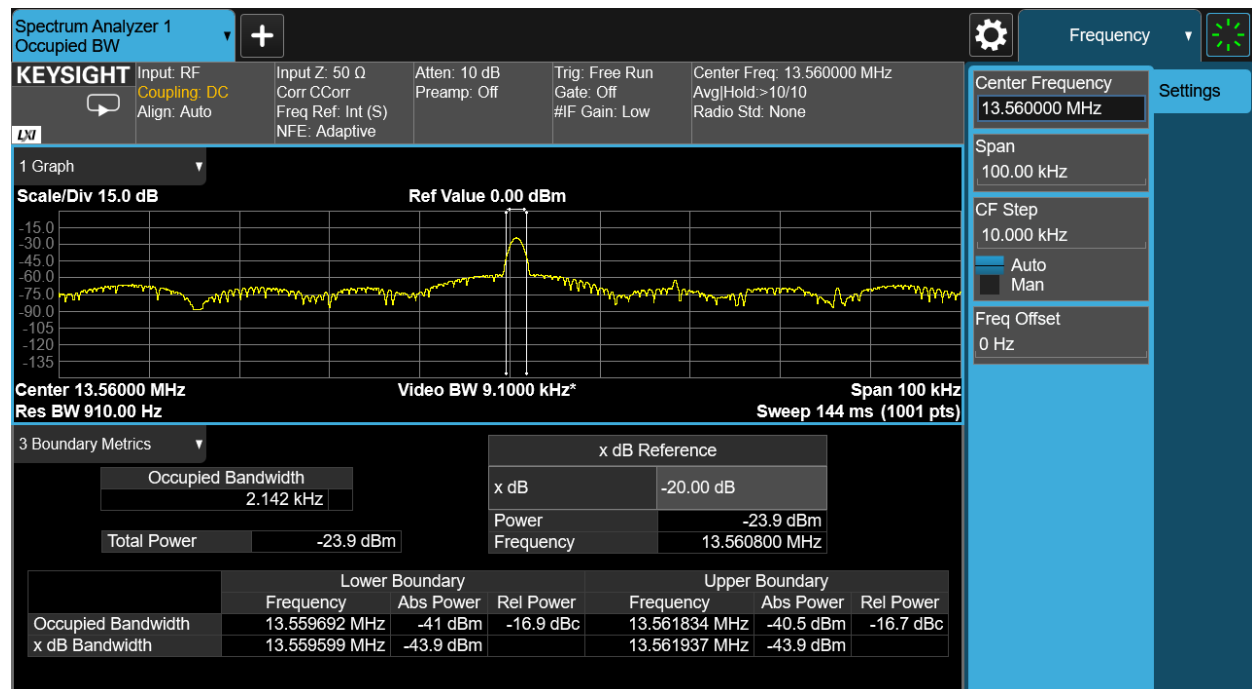

## 9 Antenna requirement

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

\*\*\*\*\* END \*\*\*\*\*