



TEST REPORT

No.I20N03225-SAR

For

HMD Global Oy

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: TA-1334

With

Hardware Version: 99652_1_11

Software Version: 000T_0_080

FCC ID: 2AJOTTA-1334

Issued Date: 2021-01-22

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@saict.ac.cn. www.saict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20N03225-SAR	Rev.0	1st edition	2021-01-22

TCONTENTS

1. SUMMARY OF TEST REPORT	5
1.1. TEST ITEMS	5
1.2. TEST STANDARDS	5
1.3. TEST RESULT.....	5
1.4. TESTING LOCATION	5
1.5. PROJECT DATA	5
1.6. SIGNATURE.....	5
2. STATEMENT OF COMPLIANCE	6
3. CLIENT INFORMATION	8
3.1. APPLICANT INFORMATION.....	8
3.2. MANUFACTURER INFORMATION	8
4. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1. ABOUT EUT	9
4.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	10
4.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	10
5. TEST METHODOLOGY	11
5.1. APPLICABLE LIMIT REGULATIONS.....	11
5.2. APPLICABLE MEASUREMENT STANDARDS	11
6. SPECIFIC ABSORPTION RATE (SAR).....	12
6.1. INTRODUCTION.....	12
6.2. SAR DEFINITION.....	12
7. TISSUE SIMULATING LIQUIDS	13
7.1. TARGETS FOR TISSUE SIMULATING LIQUID	13
7.2. DIELECTRIC PERFORMANCE	13
8. SYSTEM VERIFICATION	16
8.1. SYSTEM SETUP.....	16
8.2. SYSTEM VERIFICATION	17
9. MEASUREMENT PROCEDURES	18
9.1. TESTS TO BE PERFORMED.....	18
9.2. GENERAL MEASUREMENT PROCEDURE	20
9.3. WCDMA MEASUREMENT PROCEDURES FOR SAR	21
9.4. SAR MEASUREMENT FOR LTE.....	22
9.5. LTE (TDD) CONSIDERATIONS.....	22
9.6. BLUETOOTH & WLAN MEASUREMENT PROCEDURES FOR SAR.....	23
9.7. POWER DRIFT	24
9.8. PROXIMITY SENSOR CONSIDERATIONS	24

10. CONDUCTED OUTPUT POWER	25
10.1. GSM MEASUREMENT RESULT	25
10.2. WCDMA MEASUREMENT RESULT	27
10.3. LTE MEASUREMENT RESULT	28
10.4. BLUETOOTH AND WLAN MEASUREMENT RESULT	48
11. SIMULTANEOUS TX SAR CONSIDERATIONS	49
11.1. INTRODUCTION	49
11.2. TRANSMIT ANTENNA SEPARATION DISTANCES	49
11.3. SAR MEASUREMENT POSITIONS	50
11.4. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	50
12. EVALUATION OF SIMULTANEOUS	51
13. SUMMARY OF TEST RESULTS	52
13.1. TESTING ENVIRONMENT	52
13.2. SAR RESULTS	53
13.3. WLAN EVALUATION FOR 2.4G	61
14. SAR MEASUREMENT VARIABILITY	63
15. MEASUREMENT UNCERTAINTY	64
15.1. MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	64
16. MAIN TEST INSTRUMENTS	65
ANNEX A: GRAPH RESULTS	66
ANNEX B: SYSTEM VERIFICATION RESULTS	80
ANNEX C: SAR MEASUREMENT SETUP	84
ANNEX D: POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	90
ANNEX E: EQUIVALENT MEDIA RECIPES	93
ANNEX F: SYSTEM VALIDATION	94
ANNEX G: DAE CALIBRATION CERTIFICATE	95
ANNEX H: PROBE CALIBRATION CERTIFICATE	98
ANNEX I: DIPOLE CALIBRATION CERTIFICATE	108
ANNEX J: EXTENDED CALIBRATION SAR DIPOLE	140
ANNEX K: SENSOR TRIGGERING DATA SUMMARY	141

1. Summary of Test Report

1.1. Test Items

Description: Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name: TA-1334
Applicant's name: HMD Global Oy
Manufacturer's Name: HMD Global Oy

1.2. Test Standards

ANSI C95.1-1992, IEEE 1528-2013

1.3. Test Result

Pass. Please refer to "13. Summary of Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,
Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project Data

Testing Start Date: 2021-01-04

Testing End Date: 2021-01-08

1.6. Signature




Li Yongfu

(Prepared this test report)



Zhang Yunzhuan

(Reviewed this test report)



Cao Junfei

(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for HMD Global Oy Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN TA-1334 are as follows:

Table 2.1: Highest Reported SAR for Head (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head	GSM850	0.31	PCE
	GSM1900	0.06	
	WCDMA Band 5	0.31	
	LTE Band 5	0.31	
	LTE Band 7	0.12	
	LTE Band 41	0.08	
	WLAN 2.4GHz	0.87	DTS

Table 2.2: Highest Reported SAR for Hotspot (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Hotspot	GSM850	0.59	PCE
	GSM1900	0.89	
	WCDMA Band 5	0.37	
	LTE Band 5	0.33	
	LTE Band 7	0.99	
	LTE Band 41	0.79	
	WLAN 2.4GHz	0.35	DTS

Table 2.3: Highest Reported SAR for Body-worn (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Body-worn	GSM850	0.59	PCE
	GSM1900	0.60	
	WCDMA Band 5	0.37	
	LTE Band 5	0.33	
	LTE Band 7	0.78	
	LTE Band 41	0.57	
	WLAN 2.4GHz	0.35	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1 & 2.2 & 2.3)**, and the value is: **0.99 W/kg (1g)**.

Table2.4: The sum of reported SAR values for main antenna and WLAN

<i>I</i>	Position	Main Antenna (W/kg)	WLAN (W/kg)	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek	0.31	0.87	1.18
Highest reported SAR value for Hotspot	Rear	0.82	0.35	1.17
Highest reported SAR value for Body-worn	Rear	0.59	0.35	0.94

Note: the test positions of above tables are for the worse case that has been evaluated.

Table2.5: The sum of reported SAR values for main antenna and Bluetooth

<i>I</i>	Position	Main Antenna (W/kg)	Bluetooth (W/kg)	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek	0.31	0.19	0.50
Highest reported SAR value for Hotspot	Bottom	0.99	0.09	1.08
Highest reported SAR value for Body-worn	Front	0.78	0.09	0.87

Note: the test positions of above tables are for the worse case that has been evaluated.

According to the above tables, the highest sum of reported SAR values is **1.18 W/kg (1g)**.

The detail for simultaneous transmission consideration is described in chapter 12.

3. Client Information

3.1. Applicant Information

Company Name:	HMD Global Oy
Address:	Bertel Jungin aukio 902600 Espoo, Finland
City:	/
Country:	/
Telephone:	/

3.2. Manufacturer Information

Company Name:	HMD Global Oy
Address:	Bertel Jungin aukio 902600 Espoo, Finland
City:	/
Country:	/
Telephone:	/

4. Equipment under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

Description:	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model Name:	TA-1334
Operating mode(s):	GSM850/1900, WCDMA Band5, LTE Band5/7/38/41, Bluetooth, WLAN2.4G
Condition of EUT as received:	No obvious damage in appearance
Tested Tx Frequency:	824 – 849MHz (GSM 850)
	1850 – 1910MHz (GSM 1900)
	824 – 849MHz (WCDMA Band 5)
	824 – 849MHz (LTE Band 5)
	2500 – 2570MHz (LTE Band 7)
	2570 – 2620MHz (LTE Band 38)
	2535 – 2655MHz (LTE Band 41)
	2402 – 2480MHz (Bluetooth)
	2412 – 2462MHz (WLAN 2.4G)
GPRS / EGPRS Multislot Class:	12
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
Product Dimensions:	Long 164.86mm ;Wide 76mm ; Overall Diagonal 174mm
Display Diagonal:	164.2mm
Remark: 1. This device does not support DTM operation. 2. DIV antenna has only signaled receiving function.	

4.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
UT01aa	358078140014360	99652_1_11	000T_0_080
UT02aa	358078140014543	99652_1_11	000T_0_080
UT03aa	358078140014287	99652_1_11	000T_0_080
UT12aa	358078140043740	99652_1_11	000T_0_080
UT14aa	358078140043062	99652_1_11	000T_0_080

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the UT12aa&14aa, and conducted power with the UT01aa&02aa&03aa.

4.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery	WT340	Guangdong Fenghua New Energy Co.,Ltd
AE2	Headset	HS-34	New Leader Industry Co.,Ltd

*AE ID: is used to identify the test sample in the lab internally.

5. Test Methodology

5.1. Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB 648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB 941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB 941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB 941225 D06 Hot Spot SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters.

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

TCB workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids)

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2550	Head	1.91	1.81~2.01	39.1	37.1~41.0

7.2. Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Conductivity σ (S/m)	Drift (%)	Permittivity ϵ	Drift (%)
2021-01-04	Head	835	0.917	1.89	40.84	-1.59
2021-01-08	Head	1900	1.416	1.14	39.35	-1.63
2021-01-05	Head	2450	1.833	1.83	38.26	-2.40
2021-01-06	Head	2550	1.941	1.62	38.11	-2.53


Note: The liquid temperature is 22.0°C.

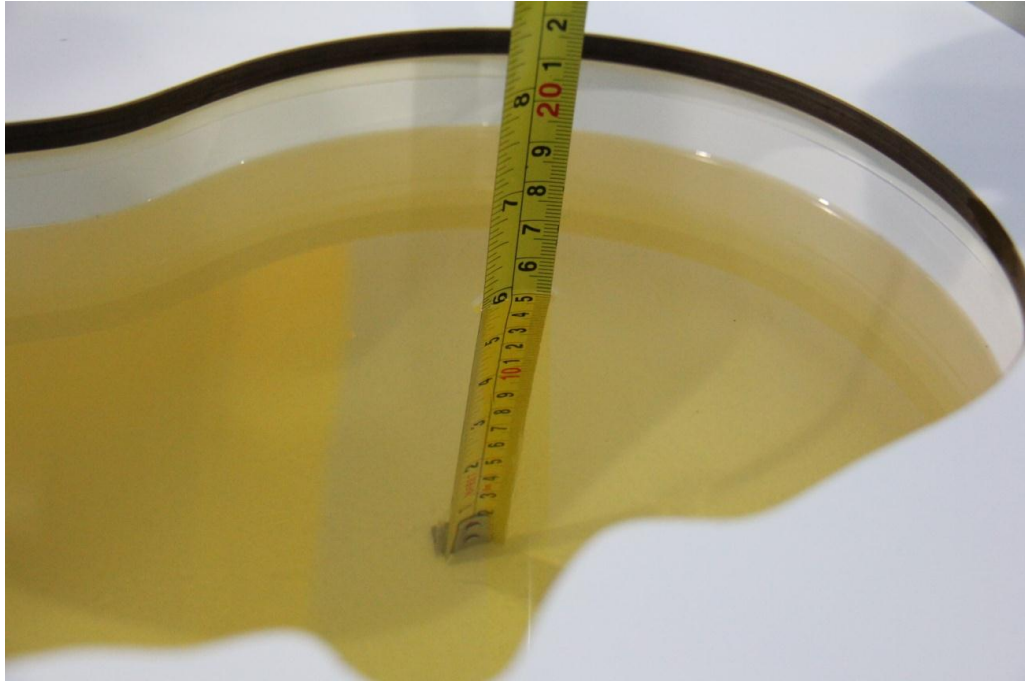


Picture 7-1: Liquid depth in the Head Phantom (835MHz)



Picture 7-2: Liquid depth in the Head Phantom (1900MHz)

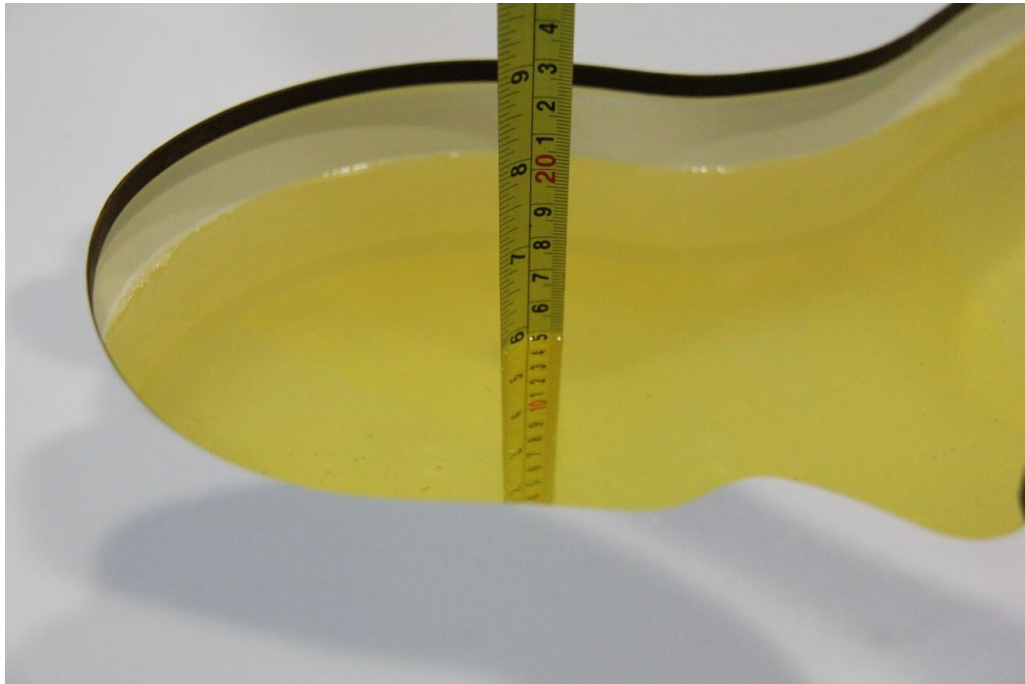

Picture 7-3: Liquid depth in the Head Phantom(2450MHz)

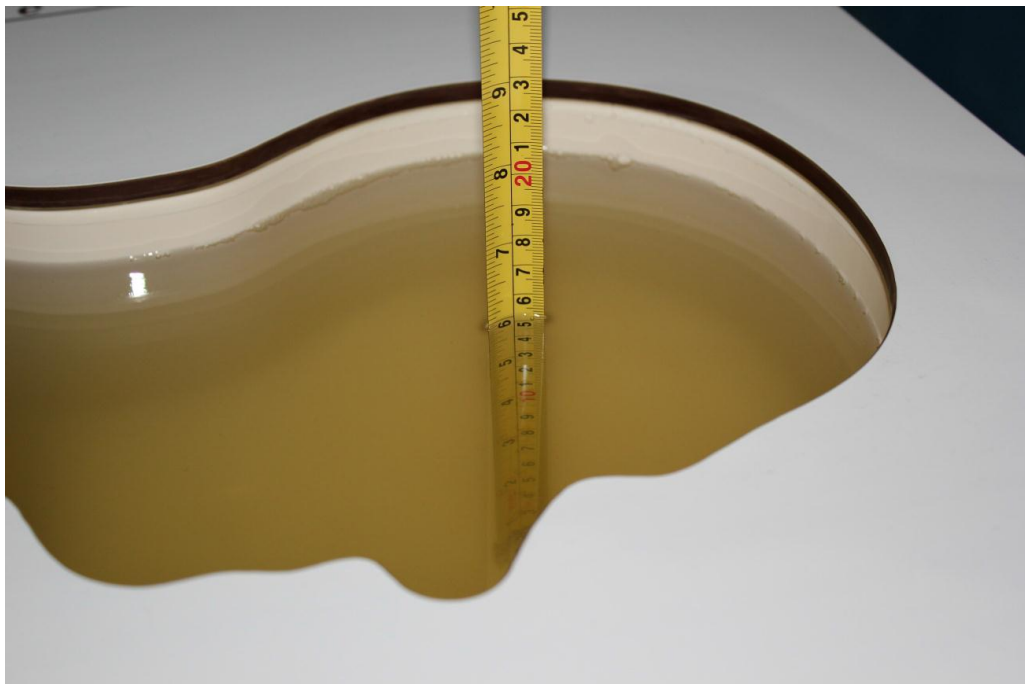


Picture 7-4: Liquid depth in the Head Phantom(2550MHz)

8. System verification


8.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

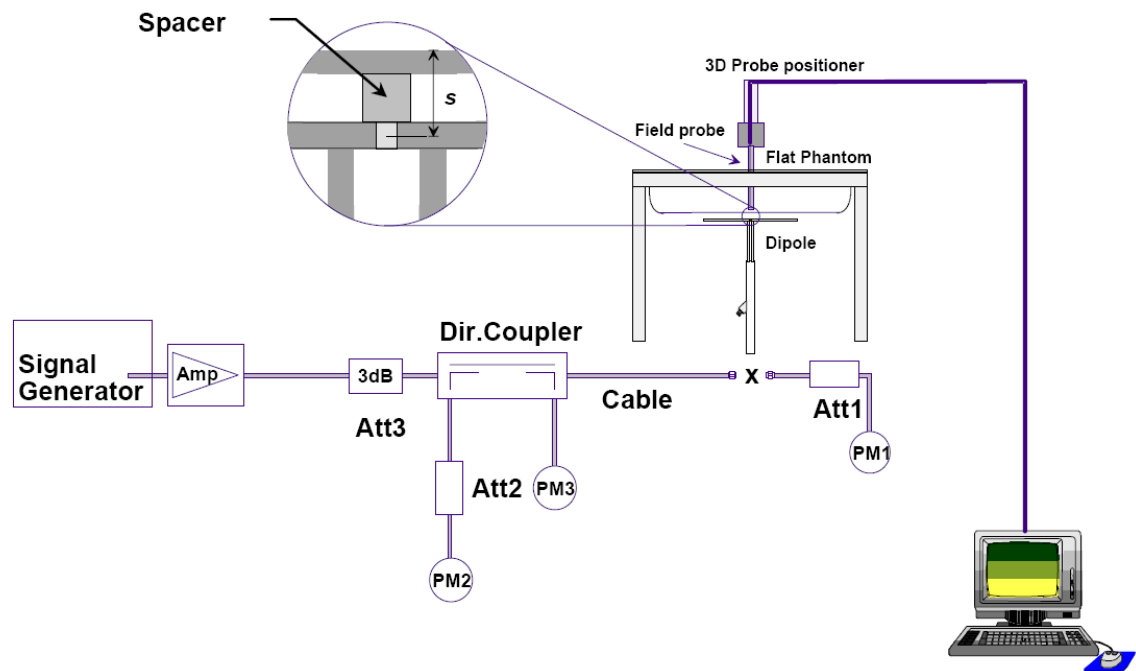

Picture 8.1 System Setup for System Evaluation

For the dipole below 3GHz, the output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

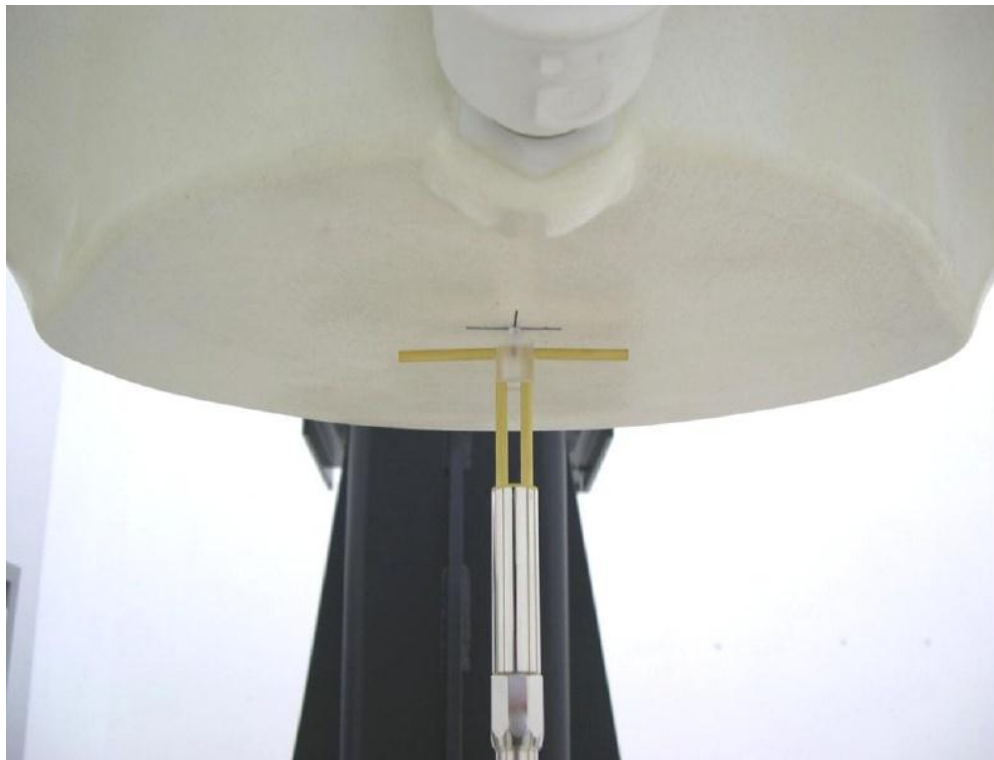

Picture 8.2 Photo of Dipole Setup

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Head

Measurement Date	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)				Deviation (%)	
				/		Normalize to 1W			
		10 g	1 g	10 g	1 g	10 g	1 g	10 g	1 g
2021-01-04	835	6.29	9.62	1.62	2.52	6.48	10.08	3.02	4.78
2021-01-08	1900	21.00	40.50	5.37	10.5	21.48	42.00	2.29	3.70
2021-01-05	2450	24.10	52.00	6.11	13.3	24.44	53.20	1.41	2.31
2021-01-06	2550	26.50	57.80	6.78	15.0	27.12	60.00	2.34	3.81

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

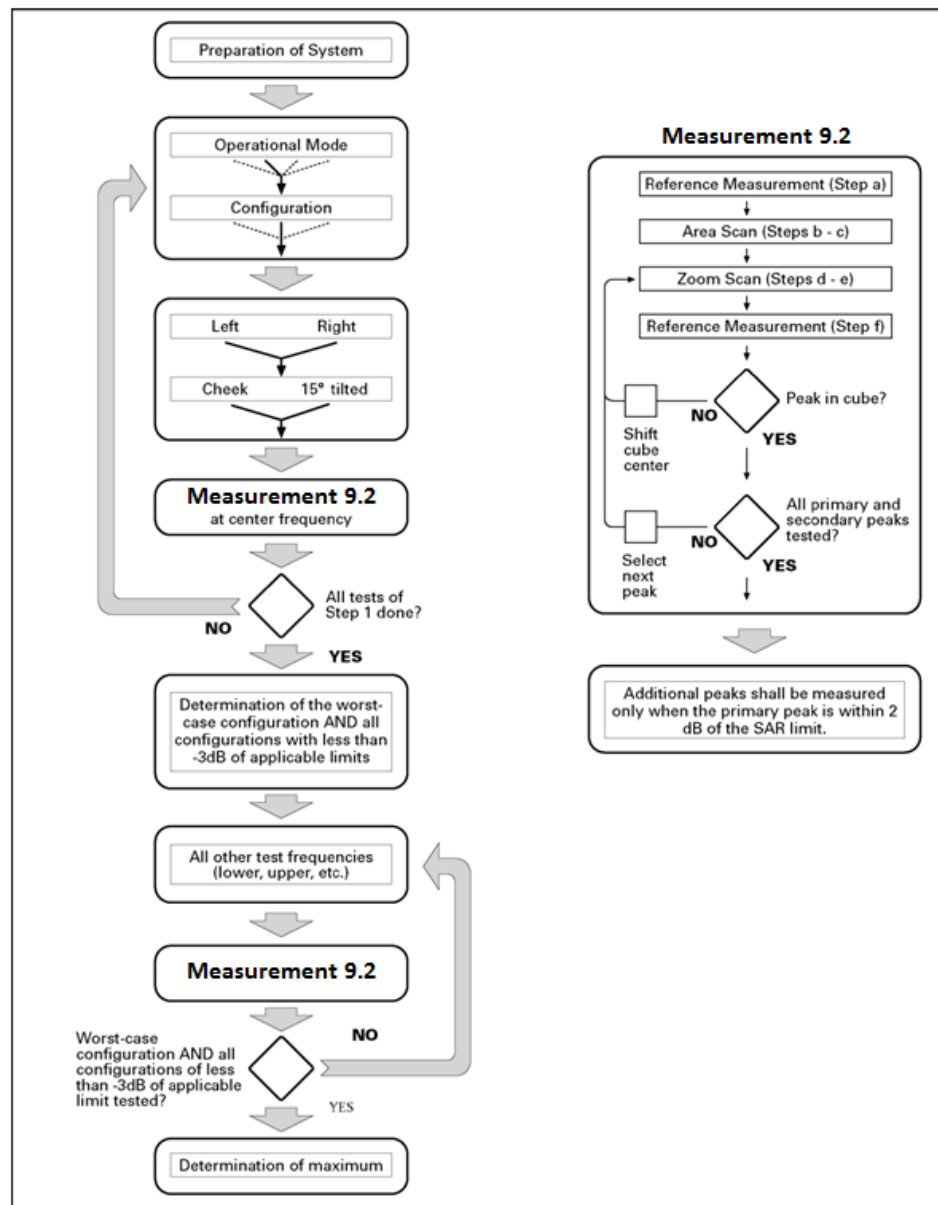

Picture 9.1 Block diagram of the tests to be performed

9.2. General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \pm 1 \text{ mm}$	$\frac{1}{4} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 3 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4. SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 38 and LTE TDD Band 41 support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

Where

$T_s = 1/(15000 \times 2048)$ seconds

9.6. Bluetooth & WLAN Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.7. Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

9.8. Proximity Sensor Considerations

This device uses a proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device. Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the tablet is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios: To reduce the output power of main antennas during body operating configurations. . It is also set an output power leveled to the lowest one to make sure that in any case of SAR sensor hardware failure the SAR requirements can still be satisfied.

Sensor triggering distance summary data is included in Appendix K.

10. Conducted Output Power

10.1. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 10.1: The conducted power measurement results for GSM

GSM 850MHz	Tune up 34.5	Conducted Power(dBm)		
		Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
		32.96	32.93	32.88
GSM 1900MHz	Tune up 31.0	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
		30.01	30.15	30.21

Table 10.2: The conducted power measurement results for GPRS and EGPRS

GPRS850/ EGPRS850	Tune up 34.5	Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	34.5	32.92	32.91	32.87	-9.03dB	23.89	23.88	23.84
2Tx-slots	33.0	31.99	31.95	31.94	-6.02dB	25.97	25.93	25.92
3Tx-slots	31.0	29.98	29.93	29.92	-4.26dB	25.72	25.67	25.66
4Tx-slots	29.5	28.89	28.85	28.76	-3.01dB	25.88	25.84	25.75
EGPRS 850 (8PSK)	Tune up 29.0	Measured Power (dBm)			calculation	Measured Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	29.0	28.26	28.29	28.20	-9.03dB	19.23	19.26	19.17
2Tx-slots	28.0	27.23	27.07	26.96	-6.02dB	21.21	21.05	20.94
3Tx-slots	26.0	24.89	24.82	24.81	-4.26dB	20.63	20.56	20.55
4Tx-slots	24.5	23.57	23.52	23.50	-3.01dB	20.56	20.51	20.49

Full Power								
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	31.0	29.98	30.13	30.20	-9.03dB	20.95	21.10	21.17
2Tx-slots	30.0	29.04	29.20	29.27	-6.02dB	23.02	23.18	23.25
3Tx-slots	28.0	27.05	27.21	27.27	-4.26dB	22.79	22.95	23.01
4Tx-slots	26.5	26.00	26.17	26.23	-3.01dB	22.99	23.16	23.22
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	29.5	28.79	28.96	28.99	-9.03dB	19.76	19.93	19.96
2Tx-slots	28.5	27.52	27.69	27.65	-6.02dB	21.50	21.67	21.63
3Tx-slots	26.0	25.11	25.22	25.27	-4.26dB	20.85	20.96	21.01
4Tx-slots	24.5	23.85	23.97	24.06	-3.01dB	20.84	20.96	21.05
Sensor on								
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	31.0	29.79	29.82	29.85	-9.03dB	20.76	20.79	20.82
2Tx-slots	28.0	27.07	27.06	27.12	-6.02dB	21.05	21.04	21.10
3Tx-slots	26.0	25.07	25.07	25.12	-4.26dB	20.81	20.81	20.86
4Tx-slots	24.5	23.98	24.01	24.04	-3.01dB	20.97	21.00	21.03
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	29.0	28.49	28.36	28.45	-9.03dB	19.46	19.33	19.42
2Tx-slots	26.0	25.02	24.92	24.95	-6.02dB	19.00	18.90	18.93
3Tx-slots	23.5	22.72	22.62	22.63	-4.26dB	18.46	18.36	18.37
4Tx-slots	22.0	21.54	21.47	21.48	-3.01dB	18.53	18.46	18.47

Note:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for 850MHz and 1900MHz.

10.2. WCDMA Measurement result

Table 10.3: T The conducted power measurement results WCDMA

Item	band	WCDMA Band 5			
	ARFCN	Tune up	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	1	25.0	24.2	24.2	24.1
HSUPA	1	22.5	21.8	21.7	21.7
	2	22.0	21.3	21.2	21.2
	3	23.0	22.3	22.2	22.1
	4	21.5	20.8	20.7	20.7
	5	23.0	22.2	22.2	22.1
HSDPA	1	23.5	23.3	23.2	23.1
	2	23.5	23.2	23.2	23.1
	3	23.5	22.8	22.7	22.7
	4	23.5	22.7	22.7	22.7
DC-HSDPA	1	23.5	23.2	23.2	23.2
	2	23.5	23.1	23.1	23.1
	3	23.5	22.7	22.7	22.7
	4	23.5	22.6	22.7	22.6

10.3. LTE Measurement result

According to April 2015 TCB workshop, SAR Test exclusion can be applied for testing overlapping LTE Bands as follows:

- The maximum out power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for SAR test exclusion.
- The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 38 (2570-2620MHz) is covered by LTE Band 41 (2535-2655MHz)

Table 10.4: The conducted Power for LTE

LTE Band 5			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4 MHz	1RB_5	848.3MHz	23.29	22.60	21.50	25.0	24.0	23.0
		836.5MHz	23.31	22.54	21.38	25.0	24.0	23.0
		824.7MHz	23.32	22.60	21.55	25.0	24.0	23.0
	1RB_3	848.3MHz	23.37	22.68	21.52	25.0	24.0	23.0
		836.5MHz	23.41	22.59	21.51	25.0	24.0	23.0
		824.7MHz	23.50	22.68	21.64	25.0	24.0	23.0
	1RB_0	848.3MHz	23.29	22.57	21.44	25.0	24.0	23.0
		836.5MHz	23.30	22.55	21.39	25.0	24.0	23.0
		824.7MHz	23.33	22.59	21.54	25.0	24.0	23.0
	3RB_3	848.3MHz	23.38	22.31	21.45	25.0	24.0	23.0
		836.5MHz	23.41	22.33	21.54	25.0	24.0	23.0
		824.7MHz	23.46	22.44	21.55	25.0	24.0	23.0
	3RB_1	848.3MHz	23.38	22.34	21.52	25.0	24.0	23.0
		836.5MHz	23.46	22.45	21.61	25.0	24.0	23.0
		824.7MHz	23.46	22.52	21.61	25.0	24.0	23.0
	3RB_0	848.3MHz	23.37	22.29	21.49	25.0	24.0	23.0
		836.5MHz	23.41	22.38	21.49	25.0	24.0	23.0
		824.7MHz	23.44	22.45	21.56	25.0	24.0	23.0
	6RB_0	848.3MHz	22.39	21.45	20.43	24.0	23.0	22.0
		836.5MHz	22.44	21.51	20.46	24.0	23.0	22.0
		824.7MHz	22.42	21.56	20.53	24.0	23.0	22.0

LTE Band 5			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3 MHz	1RB_14	847.5MHz	23.36	22.63	21.53	25.0	24.0	23.0
		836.5MHz	23.39	22.57	21.61	25.0	24.0	23.0
		825.5MHz	23.42	22.62	21.72	25.0	24.0	23.0
	1RB_7	847.5MHz	23.42	22.73	21.80	25.0	24.0	23.0
		836.5MHz	23.49	22.72	21.73	25.0	24.0	23.0
		825.5MHz	23.58	22.74	22.04	25.0	24.0	23.0
	1RB_0	847.5MHz	23.37	22.67	21.53	25.0	24.0	23.0
		836.5MHz	23.40	22.57	21.57	25.0	24.0	23.0
		825.5MHz	23.39	22.59	21.69	25.0	24.0	23.0
	8RB_7	847.5MHz	22.40	21.48	20.54	24.0	23.0	22.0
		836.5MHz	22.45	21.49	20.51	24.0	23.0	22.0
		825.5MHz	22.48	21.60	20.54	24.0	23.0	22.0
	8RB_4	847.5MHz	22.44	21.47	20.58	24.0	23.0	22.0
		836.5MHz	22.50	21.53	20.57	24.0	23.0	22.0
		825.5MHz	22.58	21.68	20.59	24.0	23.0	22.0
	8RB_0	847.5MHz	22.42	21.49	20.55	24.0	23.0	22.0
		836.5MHz	22.44	21.54	20.57	24.0	23.0	22.0
		825.5MHz	22.45	21.61	20.53	24.0	23.0	22.0
	15RB_0	847.5MHz	22.40	21.40	20.51	24.0	23.0	22.0
		836.5MHz	22.45	21.42	20.54	24.0	23.0	22.0
		825.5MHz	22.45	21.53	20.54	24.0	23.0	22.0

LTE Band 5			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	846.5MHz	23.28	22.44	21.37	25.0	24.0	23.0
		836.5MHz	23.23	22.47	21.38	25.0	24.0	23.0
		826.5MHz	23.34	22.56	21.53	25.0	24.0	23.0
	1RB_12	846.5MHz	23.49	22.88	21.67	25.0	24.0	23.0
		836.5MHz	23.74	22.77	21.70	25.0	24.0	23.0
		826.5MHz	23.71	22.86	21.88	25.0	24.0	23.0
	1RB_0	846.5MHz	23.31	22.57	21.39	25.0	24.0	23.0
		836.5MHz	23.36	22.56	21.46	25.0	24.0	23.0
		826.5MHz	23.29	22.60	21.55	25.0	24.0	23.0
	12RB_13	846.5MHz	22.38	21.37	20.48	24.0	23.0	22.0
		836.5MHz	22.41	21.41	20.50	24.0	23.0	22.0
		826.5MHz	22.49	21.53	20.62	24.0	23.0	22.0
	12RB_6	846.5MHz	22.50	21.46	20.57	24.0	23.0	22.0
		836.5MHz	22.52	21.47	20.57	24.0	23.0	22.0
		826.5MHz	22.51	21.62	20.63	24.0	23.0	22.0
	12RB_0	846.5MHz	22.45	21.43	20.51	24.0	23.0	22.0
		836.5MHz	22.49	21.44	20.54	24.0	23.0	22.0
		826.5MHz	22.45	21.49	20.55	24.0	23.0	22.0
	25RB_0	846.5MHz	22.41	21.42	20.50	24.0	23.0	22.0
		836.5MHz	22.46	21.42	20.55	24.0	23.0	22.0
		826.5MHz	22.48	21.54	20.57	24.0	23.0	22.0

LTE Band 5			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	844.0MHz	23.40	22.66	21.45	25.0	24.0	23.0
		836.5MHz	23.45	22.61	21.63	25.0	24.0	23.0
		829.0MHz	23.45	22.67	21.57	25.0	24.0	23.0
	1RB_24	844.0MHz	23.50	22.74	21.67	25.0	24.0	23.0
		836.5MHz	23.57	22.76	21.63	25.0	24.0	23.0
		829.0MHz	23.61	22.81	21.69	25.0	24.0	23.0
	1RB_0	844.0MHz	23.40	22.56	21.41	25.0	24.0	23.0
		836.5MHz	23.41	22.63	21.52	25.0	24.0	23.0
		829.0MHz	23.42	22.74	21.53	25.0	24.0	23.0
	25RB_25	844.0MHz	22.48	21.44	20.53	24.0	23.0	22.0
		836.5MHz	22.49	21.46	20.55	24.0	23.0	22.0
		829.0MHz	22.54	21.57	20.58	24.0	23.0	22.0
	25RB_12	844.0MHz	22.52	21.47	20.58	24.0	23.0	22.0
		836.5MHz	22.49	21.48	20.54	24.0	23.0	22.0
		829.0MHz	22.48	21.56	20.56	24.0	23.0	22.0
	25RB_0	844.0MHz	22.51	21.50	20.55	24.0	23.0	22.0
		836.5MHz	22.53	21.56	20.58	24.0	23.0	22.0
		829.0MHz	22.51	21.53	20.53	24.0	23.0	22.0
	50RB_0	844.0MHz	22.45	21.44	20.53	24.0	23.0	22.0
		836.5MHz	22.55	21.58	20.56	24.0	23.0	22.0
		829.0MHz	22.54	21.57	20.56	24.0	23.0	22.0

Full Power								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	2567.4MHz	23.18	22.39	21.39	24.5	23.5	22.5
		2535.0MHz	23.25	22.55	21.39	24.5	23.5	22.5
		2502.5MHz	23.25	22.52	21.42	24.5	23.5	22.5
	1RB_12	2567.4MHz	23.39	22.69	21.56	24.5	23.5	22.5
		2535.0MHz	23.56	22.81	21.59	24.5	23.5	22.5
		2502.5MHz	23.58	22.65	21.61	24.5	23.5	22.5
	1RB_0	2567.4MHz	23.21	22.12	21.38	24.5	23.5	22.5
		2535.0MHz	23.21	22.52	21.39	24.5	23.5	22.5
		2502.5MHz	23.27	22.47	21.39	24.5	23.5	22.5
	12RB_13	2567.4MHz	22.33	21.25	20.41	23.5	22.5	21.5
		2535.0MHz	22.45	21.38	20.38	23.5	22.5	21.5
		2502.5MHz	22.51	21.35	20.42	23.5	22.5	21.5
	12RB_6	2567.4MHz	22.43	21.43	20.41	23.5	22.5	21.5
		2535.0MHz	22.48	21.45	20.41	23.5	22.5	21.5
		2502.5MHz	22.48	21.44	20.46	23.5	22.5	21.5
	12RB_0	2567.4MHz	22.44	21.36	20.34	23.5	22.5	21.5
		2535.0MHz	22.46	21.33	20.39	23.5	22.5	21.5
		2502.5MHz	22.41	21.36	20.36	23.5	22.5	21.5
	25RB_0	2567.4MHz	22.44	21.43	20.36	23.5	22.5	21.5
		2535.0MHz	22.51	21.43	20.40	23.5	22.5	21.5
		2502.5MHz	22.48	21.47	20.40	23.5	22.5	21.5

Full Power								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	2565.0MHz	23.31	22.57	21.51	24.5	23.5	22.5
		2535.0MHz	23.38	22.50	21.52	24.5	23.5	22.5
		2505.0MHz	23.32	22.55	21.56	24.5	23.5	22.5
	1RB_24	2565.0MHz	23.39	22.58	21.63	24.5	23.5	22.5
		2535.0MHz	23.43	22.61	21.66	24.5	23.5	22.5
		2505.0MHz	23.42	22.59	21.57	24.5	23.5	22.5
	1RB_0	2565.0MHz	23.34	22.41	21.58	24.5	23.5	22.5
		2535.0MHz	23.30	22.44	21.55	24.5	23.5	22.5
		2505.0MHz	23.32	22.41	21.49	24.5	23.5	22.5
	25RB_25	2565.0MHz	22.45	21.43	20.37	23.5	22.5	21.5
		2535.0MHz	22.54	21.48	20.45	23.5	22.5	21.5
		2505.0MHz	22.58	21.53	20.47	23.5	22.5	21.5
	25RB_12	2565.0MHz	22.53	21.47	20.45	23.5	22.5	21.5
		2535.0MHz	22.50	21.46	20.43	23.5	22.5	21.5
		2505.0MHz	22.55	21.47	20.43	23.5	22.5	21.5
	25RB_0	2565.0MHz	22.49	21.47	20.39	23.5	22.5	21.5
		2535.0MHz	22.51	21.43	20.44	23.5	22.5	21.5
		2505.0MHz	22.45	21.50	20.43	23.5	22.5	21.5
	50RB_0	2565.0MHz	22.47	21.50	20.42	23.5	22.5	21.5
		2535.0MHz	22.59	21.49	20.48	23.5	22.5	21.5
		2505.0MHz	22.53	21.48	20.48	23.5	22.5	21.5

Full Power								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	2562.5MHz	23.21	22.57	21.46	24.5	23.5	22.5
		2535.0MHz	23.31	22.62	21.50	24.5	23.5	22.5
		2507.5MHz	23.37	22.65	21.57	24.5	23.5	22.5
	1RB_37	2562.5MHz	23.33	22.67	21.56	24.5	23.5	22.5
		2535.0MHz	23.35	22.57	21.42	24.5	23.5	22.5
		2507.5MHz	23.39	22.59	21.49	24.5	23.5	22.5
	1RB_0	2562.5MHz	23.25	22.57	21.50	24.5	23.5	22.5
		2535.0MHz	23.22	22.52	21.34	24.5	23.5	22.5
		2507.5MHz	23.23	22.36	21.37	24.5	23.5	22.5
	36RB_38	2562.5MHz	22.42	21.40	20.43	23.5	22.5	21.5
		2535.0MHz	22.54	21.46	20.52	23.5	22.5	21.5
		2507.5MHz	22.58	21.53	20.52	23.5	22.5	21.5
	36RB_19	2562.5MHz	22.48	21.42	20.45	23.5	22.5	21.5
		2535.0MHz	22.52	21.45	20.49	23.5	22.5	21.5
		2507.5MHz	22.54	21.49	20.48	23.5	22.5	21.5
	36RB_0	2562.5MHz	22.44	21.48	20.45	23.5	22.5	21.5
		2535.0MHz	22.47	21.40	20.43	23.5	22.5	21.5
		2507.5MHz	22.46	21.45	20.47	23.5	22.5	21.5
	75RB_0	2562.5MHz	22.46	21.43	20.45	23.5	22.5	21.5
		2535.0MHz	22.55	21.45	20.43	23.5	22.5	21.5
		2507.5MHz	22.56	21.48	20.50	23.5	22.5	21.5

Full Power								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	2560.0MHz	23.10	22.41	21.39	24.5	23.5	22.5
		2535.0MHz	23.13	22.39	21.40	24.5	23.5	22.5
		2510.0MHz	23.17	22.54	21.47	24.5	23.5	22.5
	1RB_50	2560.0MHz	23.49	22.80	21.73	24.5	23.5	22.5
		2535.0MHz	23.41	22.57	21.59	24.5	23.5	22.5
		2510.0MHz	23.42	22.66	21.65	24.5	23.5	22.5
	1RB_0	2560.0MHz	23.00	22.36	21.36	24.5	23.5	22.5
		2535.0MHz	23.01	22.30	21.29	24.5	23.5	22.5
		2510.0MHz	23.04	22.18	21.21	24.5	23.5	22.5
	50RB_50	2560.0MHz	22.43	21.44	20.40	23.5	22.5	21.5
		2535.0MHz	22.52	21.46	20.47	23.5	22.5	21.5
		2510.0MHz	22.54	21.48	20.51	23.5	22.5	21.5
	50RB_25	2560.0MHz	22.49	21.50	20.47	23.5	22.5	21.5
		2535.0MHz	22.54	21.46	20.49	23.5	22.5	21.5
		2510.0MHz	22.55	21.52	20.51	23.5	22.5	21.5
	50RB_0	2560.0MHz	22.47	21.42	20.45	23.5	22.5	21.5
		2535.0MHz	22.37	21.35	20.37	23.5	22.5	21.5
		2510.0MHz	22.43	21.36	20.38	23.5	22.5	21.5
	100RB_0	2560.0MHz	22.43	21.45	20.44	23.5	22.5	21.5
		2535.0MHz	22.41	21.37	20.39	23.5	22.5	21.5
		2510.0MHz	22.54	21.44	20.45	23.5	22.5	21.5

Sensor on								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	2567.4MHz	19.20	18.56	17.50	20.5	19.5	18.5
		2535.0MHz	19.19	18.48	17.57	20.5	19.5	18.5
		2502.5MHz	19.27	18.58	17.56	20.5	19.5	18.5
	1RB_12	2567.4MHz	19.52	18.81	17.74	20.5	19.5	18.5
		2535.0MHz	19.44	18.79	17.76	20.5	19.5	18.5
		2502.5MHz	19.47	18.86	17.87	20.5	19.5	18.5
	1RB_0	2567.4MHz	19.23	18.55	17.48	20.5	19.5	18.5
		2535.0MHz	19.18	18.51	17.52	20.5	19.5	18.5
		2502.5MHz	19.35	18.61	17.63	20.5	19.5	18.5
	12RB_13	2567.4MHz	18.39	17.46	16.43	19.5	18.5	17.5
		2535.0MHz	18.34	17.40	16.44	19.5	18.5	17.5
		2502.5MHz	18.52	17.54	16.56	19.5	18.5	17.5
	12RB_6	2567.4MHz	18.39	17.47	16.53	19.5	18.5	17.5
		2535.0MHz	18.38	17.44	16.52	19.5	18.5	17.5
		2502.5MHz	18.56	17.51	16.61	19.5	18.5	17.5
	12RB_0	2567.4MHz	18.40	17.41	16.45	19.5	18.5	17.5
		2535.0MHz	18.29	17.39	16.40	19.5	18.5	17.5
		2502.5MHz	18.43	17.40	16.50	19.5	18.5	17.5
	25RB_0	2567.4MHz	18.38	17.47	16.39	19.5	18.5	17.5
		2535.0MHz	18.33	17.42	16.42	19.5	18.5	17.5
		2502.5MHz	18.41	17.57	16.53	19.5	18.5	17.5

Sensor on								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	2565.0MHz	19.35	18.75	17.72	20.5	19.5	18.5
		2535.0MHz	19.34	18.76	17.47	20.5	19.5	18.5
		2505.0MHz	19.37	18.70	17.64	20.5	19.5	18.5
	1RB_24	2565.0MHz	19.44	18.89	17.75	20.5	19.5	18.5
		2535.0MHz	19.46	18.82	17.62	20.5	19.5	18.5
		2505.0MHz	19.51	18.89	17.77	20.5	19.5	18.5
	1RB_0	2565.0MHz	19.33	18.71	17.49	20.5	19.5	18.5
		2535.0MHz	19.29	18.66	17.60	20.5	19.5	18.5
		2505.0MHz	19.42	18.81	17.72	20.5	19.5	18.5
	25RB_25	2565.0MHz	18.41	17.50	16.45	19.5	18.5	17.5
		2535.0MHz	18.39	17.44	16.46	19.5	18.5	17.5
		2505.0MHz	18.48	17.54	16.53	19.5	18.5	17.5
	25RB_12	2565.0MHz	18.44	17.48	16.51	19.5	18.5	17.5
		2535.0MHz	18.39	17.47	16.47	19.5	18.5	17.5
		2505.0MHz	18.48	17.60	16.51	19.5	18.5	17.5
	25RB_0	2565.0MHz	18.40	17.46	16.42	19.5	18.5	17.5
		2535.0MHz	18.30	17.35	16.38	19.5	18.5	17.5
		2505.0MHz	18.43	17.54	16.42	19.5	18.5	17.5
	50RB_0	2565.0MHz	18.43	17.55	16.45	19.5	18.5	17.5
		2535.0MHz	18.36	17.43	16.39	19.5	18.5	17.5
		2505.0MHz	18.39	17.45	16.44	19.5	18.5	17.5

Sensor on								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	2562.5MHz	19.30	18.72	17.65	20.5	19.5	18.5
		2535.0MHz	19.31	18.65	17.56	20.5	19.5	18.5
		2507.5MHz	19.29	18.58	17.43	20.5	19.5	18.5
	1RB_37	2562.5MHz	19.36	18.75	17.55	20.5	19.5	18.5
		2535.0MHz	19.34	18.72	17.57	20.5	19.5	18.5
		2507.5MHz	19.43	18.78	17.58	20.5	19.5	18.5
	1RB_0	2562.5MHz	19.23	18.61	17.56	20.5	19.5	18.5
		2535.0MHz	19.15	18.48	17.54	20.5	19.5	18.5
		2507.5MHz	19.35	18.67	17.55	20.5	19.5	18.5
	36RB_38	2562.5MHz	18.32	17.50	16.49	19.5	18.5	17.5
		2535.0MHz	18.38	17.47	16.51	19.5	18.5	17.5
		2507.5MHz	18.44	17.49	16.53	19.5	18.5	17.5
	36RB_19	2562.5MHz	18.42	17.49	16.53	19.5	18.5	17.5
		2535.0MHz	18.39	17.45	16.48	19.5	18.5	17.5
		2507.5MHz	18.48	17.50	16.58	19.5	18.5	17.5
	36RB_0	2562.5MHz	18.39	17.52	16.45	19.5	18.5	17.5
		2535.0MHz	18.32	17.36	16.40	19.5	18.5	17.5
		2507.5MHz	18.42	17.47	16.47	19.5	18.5	17.5
	75RB_0	2562.5MHz	18.42	17.52	16.46	19.5	18.5	17.5
		2535.0MHz	18.35	17.46	16.41	19.5	18.5	17.5
		2507.5MHz	18.43	17.51	16.49	19.5	18.5	17.5

Sensor on								
LTE Band 7			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	2560.0MHz	19.28	18.43	17.54	20.5	19.5	18.5
		2535.0MHz	19.28	18.48	17.46	20.5	19.5	18.5
		2510.0MHz	19.31	18.48	17.45	20.5	19.5	18.5
	1RB_50	2560.0MHz	19.44	18.78	17.83	20.5	19.5	18.5
		2535.0MHz	19.41	18.75	17.74	20.5	19.5	18.5
		2510.0MHz	19.47	18.84	17.83	20.5	19.5	18.5
	1RB_0	2560.0MHz	19.26	18.31	17.37	20.5	19.5	18.5
		2535.0MHz	19.21	18.21	17.32	20.5	19.5	18.5
		2510.0MHz	19.37	18.47	17.41	20.5	19.5	18.5
	50RB_50	2560.0MHz	18.37	17.47	16.50	19.5	18.5	17.5
		2535.0MHz	18.37	17.53	16.51	19.5	18.5	17.5
		2510.0MHz	18.48	17.54	16.56	19.5	18.5	17.5
	50RB_25	2560.0MHz	18.42	17.43	16.47	19.5	18.5	17.5
		2535.0MHz	18.39	17.49	16.47	19.5	18.5	17.5
		2510.0MHz	18.51	17.50	16.56	19.5	18.5	17.5
	50RB_0	2560.0MHz	18.40	17.42	16.44	19.5	18.5	17.5
		2535.0MHz	18.30	17.41	16.37	19.5	18.5	17.5
		2510.0MHz	18.43	17.42	16.41	19.5	18.5	17.5
	100RB_0	2560.0MHz	18.41	17.43	16.42	19.5	18.5	17.5
		2535.0MHz	18.35	17.41	16.43	19.5	18.5	17.5
		2510.0MHz	18.42	17.50	16.49	19.5	18.5	17.5

Full Power								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	2652.5MHz	23.06	22.14	21.13	25.0	24.0	23.0
		2595.0MHz	23.25	22.38	21.12	25.0	24.0	23.0
		2537.5MHz	23.54	22.52	21.34	25.0	24.0	23.0
	1RB_12	2652.5MHz	23.22	22.29	21.17	25.0	24.0	23.0
		2595.0MHz	23.52	22.54	21.40	25.0	24.0	23.0
		2537.5MHz	23.70	22.70	21.52	25.0	24.0	23.0
	1RB_0	2652.5MHz	23.07	22.15	21.08	25.0	24.0	23.0
		2595.0MHz	23.36	22.42	21.15	25.0	24.0	23.0
		2537.5MHz	23.59	22.56	21.36	25.0	24.0	23.0
	12RB_13	2652.5MHz	22.28	21.14	20.18	24.0	23.0	22.0
		2595.0MHz	22.53	21.43	20.43	24.0	23.0	22.0
		2537.5MHz	22.76	21.70	20.72	24.0	23.0	22.0
	12RB_6	2652.5MHz	22.36	21.23	20.26	24.0	23.0	22.0
		2595.0MHz	22.63	21.55	20.52	24.0	23.0	22.0
		2537.5MHz	22.81	21.73	20.77	24.0	23.0	22.0
	12RB_0	2652.5MHz	22.34	21.20	20.23	24.0	23.0	22.0
		2595.0MHz	22.57	21.46	20.45	24.0	23.0	22.0
		2537.5MHz	22.77	21.69	20.72	24.0	23.0	22.0
	25RB_0	2652.5MHz	22.25	21.28	20.28	24.0	23.0	22.0
		2595.0MHz	22.53	21.54	20.57	24.0	23.0	22.0
		2537.5MHz	22.68	21.76	20.79	24.0	23.0	22.0

Full Power								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	2650.0MHz	23.18	22.24	21.15	25.0	24.0	23.0
		2595.0MHz	23.38	22.49	21.17	25.0	24.0	23.0
		2540.0MHz	23.65	22.71	21.46	25.0	24.0	23.0
	1RB_24	2650.0MHz	23.32	22.35	21.09	25.0	24.0	23.0
		2595.0MHz	23.58	22.66	21.31	25.0	24.0	23.0
		2540.0MHz	23.77	22.79	21.58	25.0	24.0	23.0
	1RB_0	2650.0MHz	23.20	22.29	21.26	25.0	24.0	23.0
		2595.0MHz	23.46	22.54	21.25	25.0	24.0	23.0
		2540.0MHz	23.71	22.73	21.47	25.0	24.0	23.0
	25RB_25	2650.0MHz	22.28	21.25	20.26	24.0	23.0	22.0
		2595.0MHz	22.53	21.57	20.57	24.0	23.0	22.0
		2540.0MHz	22.71	21.81	20.79	24.0	23.0	22.0
	25RB_12	2650.0MHz	22.28	21.34	20.32	24.0	23.0	22.0
		2595.0MHz	22.55	21.57	20.58	24.0	23.0	22.0
		2540.0MHz	22.77	21.84	20.83	24.0	23.0	22.0
	25RB_0	2650.0MHz	22.30	21.35	20.32	24.0	23.0	22.0
		2595.0MHz	22.56	21.58	20.57	24.0	23.0	22.0
		2540.0MHz	22.70	21.77	20.78	24.0	23.0	22.0
	50RB_0	2650.0MHz	22.18	21.24	20.24	24.0	23.0	22.0
		2595.0MHz	22.47	21.52	20.51	24.0	23.0	22.0
		2540.0MHz	22.63	21.73	20.72	24.0	23.0	22.0

Full Power								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	2647.5MHz	23.07	22.15	21.05	25.0	24.0	23.0
		2595.0MHz	23.32	22.42	21.06	25.0	24.0	23.0
		2542.5MHz	23.58	22.59	21.36	25.0	24.0	23.0
	1RB_37	2647.5MHz	23.22	22.26	21.18	25.0	24.0	23.0
		2595.0MHz	23.43	22.55	21.23	25.0	24.0	23.0
		2542.5MHz	23.67	22.70	21.47	25.0	24.0	23.0
	1RB_0	2647.5MHz	23.13	22.21	21.15	25.0	24.0	23.0
		2595.0MHz	23.40	22.44	21.17	25.0	24.0	23.0
		2542.5MHz	23.64	22.61	21.38	25.0	24.0	23.0
	36RB_38	2647.5MHz	22.28	21.19	20.20	24.0	23.0	22.0
		2595.0MHz	22.57	21.48	20.48	24.0	23.0	22.0
		2542.5MHz	22.77	21.74	20.68	24.0	23.0	22.0
	36RB_19	2647.5MHz	22.33	21.21	20.23	24.0	23.0	22.0
		2595.0MHz	22.57	21.47	20.50	24.0	23.0	22.0
		2542.5MHz	22.80	21.71	20.75	24.0	23.0	22.0
	36RB_0	2647.5MHz	22.34	21.24	20.23	24.0	23.0	22.0
		2595.0MHz	22.56	21.45	20.47	24.0	23.0	22.0
		2542.5MHz	22.79	21.73	20.70	24.0	23.0	22.0
	75RB_0	2647.5MHz	22.22	21.20	20.24	24.0	23.0	22.0
		2595.0MHz	22.49	21.53	20.51	24.0	23.0	22.0
		2542.5MHz	22.66	21.72	20.74	24.0	23.0	22.0

Full Power								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	2645.0MHz	23.06	22.08	21.12	25.0	24.0	23.0
		2595.0MHz	23.14	22.21	21.22	25.0	24.0	23.0
		2545.0MHz	23.38	22.44	21.19	25.0	24.0	23.0
	1RB_50	2645.0MHz	23.31	22.38	21.15	25.0	24.0	23.0
		2595.0MHz	23.53	22.57	21.30	25.0	24.0	23.0
		2545.0MHz	23.75	22.73	21.54	25.0	24.0	23.0
	1RB_0	2645.0MHz	22.95	22.05	21.17	25.0	24.0	23.0
		2595.0MHz	23.18	22.31	21.02	25.0	24.0	23.0
		2545.0MHz	23.47	22.47	21.21	25.0	24.0	23.0
	50RB_50	2645.0MHz	22.09	21.17	20.19	24.0	23.0	22.0
		2595.0MHz	22.43	21.47	20.54	24.0	23.0	22.0
		2545.0MHz	22.58	21.65	20.73	24.0	23.0	22.0
	50RB_25	2645.0MHz	22.10	21.20	20.19	24.0	23.0	22.0
		2595.0MHz	22.45	21.49	20.52	24.0	23.0	22.0
		2545.0MHz	22.59	21.67	20.72	24.0	23.0	22.0
	50RB_0	2645.0MHz	22.13	21.25	20.24	24.0	23.0	22.0
		2595.0MHz	22.47	21.46	20.51	24.0	23.0	22.0
		2545.0MHz	22.56	21.67	20.66	24.0	23.0	22.0
	100RB_0	2645.0MHz	22.26	21.27	20.25	24.0	23.0	22.0
		2595.0MHz	22.50	21.56	20.55	24.0	23.0	22.0
		2545.0MHz	22.67	21.67	20.71	24.0	23.0	22.0

Sensor on								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	2652.5MHz	20.48	19.59	18.31	22.0	21.0	20.0
		2595.0MHz	20.35	19.46	18.20	22.0	21.0	20.0
		2537.5MHz	20.26	19.40	18.12	22.0	21.0	20.0
	1RB_12	2652.5MHz	20.68	19.81	18.51	22.0	21.0	20.0
		2595.0MHz	20.68	19.82	18.44	22.0	21.0	20.0
		2537.5MHz	20.63	19.73	18.36	22.0	21.0	20.0
	1RB_0	2652.5MHz	20.47	19.59	18.37	22.0	21.0	20.0
		2595.0MHz	20.39	19.51	18.28	22.0	21.0	20.0
		2537.5MHz	20.31	19.43	18.14	22.0	21.0	20.0
	12RB_13	2652.5MHz	19.62	18.57	17.56	21.0	20.0	19.0
		2595.0MHz	19.46	18.46	17.48	21.0	20.0	19.0
		2537.5MHz	19.48	18.38	17.40	21.0	20.0	19.0
	12RB_6	2652.5MHz	19.66	18.63	17.65	21.0	20.0	19.0
		2595.0MHz	19.55	18.55	17.51	21.0	20.0	19.0
		2537.5MHz	19.53	18.46	17.46	21.0	20.0	19.0
	12RB_0	2652.5MHz	19.57	18.53	17.54	21.0	20.0	19.0
		2595.0MHz	19.48	18.49	17.44	21.0	20.0	19.0
		2537.5MHz	19.42	18.37	17.40	21.0	20.0	19.0
	25RB_0	2652.5MHz	19.66	18.72	17.67	21.0	20.0	19.0
		2595.0MHz	19.49	18.60	17.57	21.0	20.0	19.0
		2537.5MHz	19.52	18.56	17.54	21.0	20.0	19.0

Sensor on								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	2650.0MHz	20.51	19.69	18.40	22.0	21.0	20.0
		2595.0MHz	20.39	19.57	18.28	22.0	21.0	20.0
		2540.0MHz	20.40	19.54	18.19	22.0	21.0	20.0
	1RB_24	2650.0MHz	20.63	19.81	18.49	22.0	21.0	20.0
		2595.0MHz	20.47	19.60	18.44	22.0	21.0	20.0
		2540.0MHz	20.38	19.61	18.34	22.0	21.0	20.0
	1RB_0	2650.0MHz	20.51	19.69	18.33	22.0	21.0	20.0
		2595.0MHz	20.41	19.62	18.26	22.0	21.0	20.0
		2540.0MHz	20.45	19.54	18.20	22.0	21.0	20.0
	25RB_25	2650.0MHz	19.60	18.69	17.64	21.0	20.0	19.0
		2595.0MHz	19.56	18.61	17.61	21.0	20.0	19.0
		2540.0MHz	19.48	18.52	17.53	21.0	20.0	19.0
	25RB_12	2650.0MHz	19.66	18.65	17.70	21.0	20.0	19.0
		2595.0MHz	19.59	18.61	17.62	21.0	20.0	19.0
		2540.0MHz	19.48	18.53	17.57	21.0	20.0	19.0
	25RB_0	2650.0MHz	19.65	18.68	17.61	21.0	20.0	19.0
		2595.0MHz	19.54	18.54	17.63	21.0	20.0	19.0
		2540.0MHz	19.50	18.51	17.57	21.0	20.0	19.0
	50RB_0	2650.0MHz	19.66	18.75	17.65	21.0	20.0	19.0
		2595.0MHz	19.58	18.66	17.60	21.0	20.0	19.0
		2540.0MHz	19.48	18.58	17.54	21.0	20.0	19.0

Sensor on								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	2647.5MHz	20.47	19.57	18.26	22.0	21.0	20.0
		2595.0MHz	20.38	19.54	18.15	22.0	21.0	20.0
		2542.5MHz	20.30	19.44	18.16	22.0	21.0	20.0
	1RB_37	2647.5MHz	20.56	19.65	18.35	22.0	21.0	20.0
		2595.0MHz	20.50	19.58	18.33	22.0	21.0	20.0
		2542.5MHz	20.39	19.51	18.25	22.0	21.0	20.0
	1RB_0	2647.5MHz	20.43	19.57	18.27	22.0	21.0	20.0
		2595.0MHz	20.37	19.49	18.25	22.0	21.0	20.0
		2542.5MHz	20.40	19.50	18.15	22.0	21.0	20.0
	36RB_38	2647.5MHz	19.65	18.55	17.57	21.0	20.0	19.0
		2595.0MHz	19.59	18.55	17.57	21.0	20.0	19.0
		2542.5MHz	19.52	18.41	17.47	21.0	20.0	19.0
	36RB_19	2647.5MHz	19.63	18.59	17.54	21.0	20.0	19.0
		2595.0MHz	19.53	18.53	17.52	21.0	20.0	19.0
		2542.5MHz	19.55	18.52	17.50	21.0	20.0	19.0
	36RB_0	2647.5MHz	19.60	18.50	17.55	21.0	20.0	19.0
		2595.0MHz	19.56	18.51	17.49	21.0	20.0	19.0
		2542.5MHz	19.51	18.47	17.47	21.0	20.0	19.0
	75RB_0	2647.5MHz	19.64	18.63	17.64	21.0	20.0	19.0
		2595.0MHz	19.60	18.60	17.63	21.0	20.0	19.0
		2542.5MHz	19.53	18.60	17.50	21.0	20.0	19.0

Sensor on								
LTE Band 41			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	2645.0MHz	20.28	19.38	18.12	22.0	21.0	20.0
		2595.0MHz	20.16	19.30	18.04	22.0	21.0	20.0
		2545.0MHz	20.14	19.33	18.02	22.0	21.0	20.0
	1RB_50	2645.0MHz	20.60	19.66	18.44	22.0	21.0	20.0
		2595.0MHz	20.65	19.76	18.36	22.0	21.0	20.0
		2545.0MHz	20.53	19.59	18.31	22.0	21.0	20.0
	1RB_0	2645.0MHz	20.29	19.41	18.10	22.0	21.0	20.0
		2595.0MHz	20.13	19.33	18.03	22.0	21.0	20.0
		2545.0MHz	20.16	19.30	18.01	22.0	21.0	20.0
	50RB_50	2645.0MHz	19.56	18.65	17.59	21.0	20.0	19.0
		2595.0MHz	19.63	18.66	17.63	21.0	20.0	19.0
		2545.0MHz	19.48	18.54	17.54	21.0	20.0	19.0
	50RB_25	2645.0MHz	19.57	18.64	17.58	21.0	20.0	19.0
		2595.0MHz	19.58	18.65	17.60	21.0	20.0	19.0
		2545.0MHz	19.48	18.61	17.58	21.0	20.0	19.0
	50RB_0	2645.0MHz	19.53	18.63	17.65	21.0	20.0	19.0
		2595.0MHz	19.50	18.57	17.52	21.0	20.0	19.0
		2545.0MHz	19.50	18.56	17.57	21.0	20.0	19.0
	100RB_0	2645.0MHz	19.56	18.66	17.61	21.0	20.0	19.0
		2595.0MHz	19.59	18.59	17.55	21.0	20.0	19.0
		2545.0MHz	19.49	18.51	17.51	21.0	20.0	19.0

10.4. Bluetooth and WLAN Measurement result

Table 10.5: The conducted Power measurement results for Bluetooth

Bluetooth	Tune up	Averaged Power (dBm)		
Mode		Ch.0 (2402MHz)	Ch.39 (2441MHz)	Ch.78 (2480MHz)
GFSK	6.5	4.99	5.78	6.15
EDR2M-4_DQPSK	6.0	4.30	5.13	5.44
EDR3M-8DPSK	6.0	4.28	5.12	5.59
/	/	Ch.0 (2402MHz)	Ch.19 (2440MHz)	Ch.39 (2480MHz)
BLE	-2.0	-3.81	-2.81	-2.43

Table 10.6: The conducted Power measurement results for WLAN 2.4G


Averaged Power (dBm)		Duty Cycle: 100%		
Mode	Tune up	Ch.1 (2412MHz)	Ch.6 (2437Mhz)	Ch.11 (2462MHz)
802.11b	18.5	17.53	18.09	18.06
802.11g	16.0	15.05	15.56	15.47
802.11n(20MHz)	14.0	13.01	13.41	13.43

11. Simultaneous TX SAR Considerations

11.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the Bluetooth and WLAN can transmit simultaneous with other transmitters.

11.2. Transmit Antenna Separation Distances

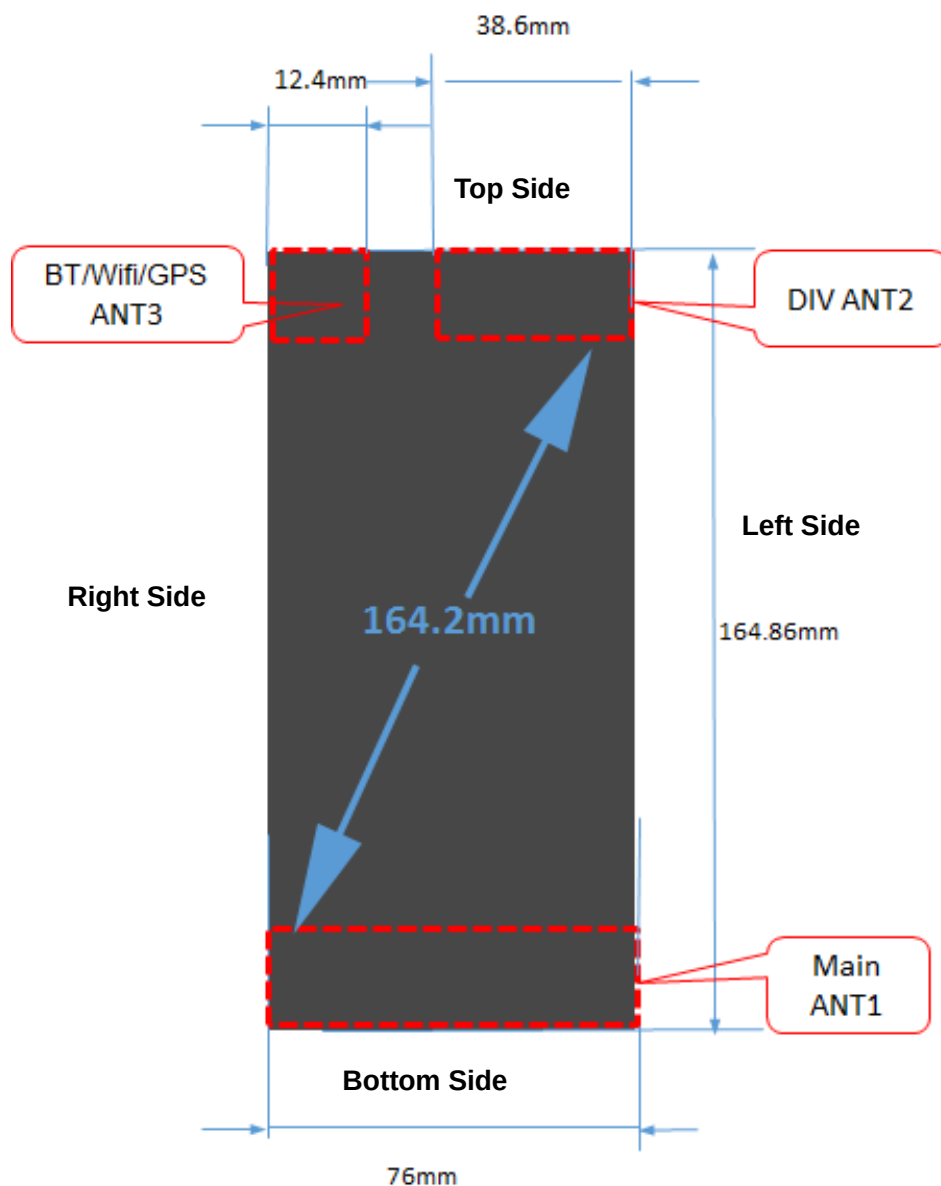

Picture 11.1 Antenna Locations (Back View)

11.3. SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR, the edges with less than 25mm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN antenna	Yes	Yes	Yes	Yes	Yes	No

11.4. Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 11.1: Standalone SAR test exclusion considerations

Band	f(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	6.5	4.47	Yes
		Body	19.20	6.5	4.47	Yes
WLAN 2.4G	2.45	Head	9.58	18.5	70.79	No
		Body	19.17	18.5	70.79	No

12. Evaluation of Simultaneous

Table 12.1: The sum of reported SAR values for main antenna and WLAN

<i>I</i>	Position	Main Antenna (W/kg)	WLAN (W/kg)	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek	0.31	0.87	1.18
Highest reported SAR value for Hotspot	Rear	0.82	0.35	1.17
Highest reported SAR value for Body-worn	Rear	0.59	0.35	0.94

Note: the test positions of above tables are for the worse case that has been evaluated.

Table 12.2: The sum of reported SAR values for main antenna and Bluetooth

<i>I</i>	Position	Main Antenna (W/kg)	Bluetooth (W/kg)	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek	0.31	0.19	0.50
Highest reported SAR value for Hotspot	Bottom	0.99	0.09	1.08
Highest reported SAR value for Body-worn	Front	0.78	0.09	0.87

Note: the test positions of above tables are for the worse case that has been evaluated.

Table 12.3: Estimated SAR for Bluetooth

Position	f (GHz)	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
			dBm	mW	
Head	2.441	5	6.5	4.47	0.19
Body	2.441	10	6.5	4.47	0.09

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm) · [$\sqrt{f(\text{GHz})/x}$] W/kg for test separation distances ≤ 50 mm;

Where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

13. Summary of Test Results

According to the client's decision rule in the test registration form, which is "based on the measurement results as the basis of the conformity statement", the test conclusion of this report meets the limit requirements.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 10.

The device support dual SIMs, SIM1 was used for the all configuration SAR testing and SIM2 test the worst case SAR of SIM1.

Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS for GSM850/1900	1:4
WCDMA Band5	1:1
FDD_LTE Band 5/7	1:1
TDD_LTE Band 38/41	1:1.58

13.1. Testing Environment

Temperature:	18°C~25°C
Relative humidity:	30%~70%
Ground system resistance:	<4Ω
Ambient noise & Reflection:	< 0.012 W/kg

13.2. SAR results

Table 13.1: SAR Values (GSM 850 - Head)

Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Ambient Temperature: 22.0°C Liquid Temperature: 21.5°C		
MHz	Ch.						Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
836.6	190	Speech	Left Cheek	1	32.93	34.5	0.214	0.31	0.02
836.6	190	Speech	Left Tilt	/	32.93	34.5	0.097	0.14	0.04
836.6	190	Speech	Right Cheek	/	32.93	34.5	0.205	0.29	0.03
836.6	190	Speech	Right Tilt	/	32.93	34.5	0.080	0.11	0.03

Table 13.2: SAR Values (GSM 850 - Body)

Ambient Temperature: 22.0°C					Liquid Temperature: 21.5°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
836.6	190	GPRS	Front	/	31.95	33.0	0.347	0.44	0.03
836.6	190	GPRS	Rear	2	31.95	33.0	0.460	0.59	0.02
836.6	190	GPRS	Left	/	31.95	33.0	0.378	0.48	-0.05
836.6	190	GPRS	Right	/	31.95	33.0	0.381	0.49	0.01
836.6	190	GPRS	Bottom	/	31.95	33.0	0.095	0.12	0.11
Body-Worn Test Data									
836.6	190	GPRS	Front	10mm	31.95	33.0	0.347	0.44	0.03
836.6	190	GPRS	Rear	10mm	31.95	33.0	0.460	0.59	0.20

Table 13.3: SAR Values (GSM 1900 - Head)

Ambient Temperature: 22.8°C					Liquid Temperature: 22.2°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
1880	661	Speech	Left Cheek	3	30.15	31.0	0.049	0.06	0.03
1880	661	Speech	Left Tilt	/	30.15	31.0	0.033	0.04	0.07
1880	661	Speech	Right Cheek	/	30.15	31.0	0.040	0.05	0.06
1880	661	Speech	Right Tilt	/	30.15	31.0	0.031	0.04	0.12

Table 13.4: SAR Values (GSM 1900 - Body)

Ambient Temperature: 22.8°C					Liquid Temperature: 22.2°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
1880	661	GPRS	Front	/	27.06	28.0	0.243	0.30	0.11
1880	661	GPRS	Rear	/	27.06	28.0	0.455	0.56	0.12
1880	661	GPRS	Left	/	29.20	30.0	0.030	0.04	0.11
1880	661	GPRS	Right	/	29.20	30.0	0.020	0.02	0.05
1880	661	GPRS	Bottom	/	27.06	28.0	0.660	0.82	-0.03
1909.8	810	GPRS	Bottom	/	27.07	28.0	0.663	0.82	-0.06
1850.2	512	GPRS	Bottom	4	27.12	28.0	0.724	0.89	-0.04
Body-Worn Test Data									
1880	661	GPRS	Front	11mm	29.20	30.0	0.501	0.60	0.01
1880	661	GPRS	Rear	10mm	27.06	28.0	0.455	0.56	0.12
Sensor off Test Data									
1880	661	GPRS	Front	11mm	29.20	30.0	0.501	0.60	0.01
1880	661	GPRS	Rear	17mm	29.20	30.0	0.335	0.40	0.02
1880	661	GPRS	Bottom	17mm	29.20	30.0	0.395	0.47	-0.03

Table 13.5: SAR Values (WCDMA Band 5 - Head)

Ambient Temperature: 22.0°C					Liquid Temperature: 21.5°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
836.4	4182	RMC	Left Cheek	5	24.20	25.0	0.257	0.31	0.02
836.4	4182	RMC	Left Tilt	/	24.20	25.0	0.133	0.16	0.12
836.4	4182	RMC	Right Cheek	/	24.20	25.0	0.223	0.27	0.04
836.4	4182	RMC	Right Tilt	/	24.20	25.0	0.114	0.14	0.06
836.4	4182	RMC	Left Cheek	SIM2	24.20	25.0	0.246	0.30	0.08

Table 13.6: SAR Values (WCDMA Band 5 - Body)

Ambient Temperature: 22.0°C					Liquid Temperature: 21.5°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
836.4	4182	RMC	Front	/	24.20	25.0	0.212	0.25	0.05
836.4	4182	RMC	Rear	6	24.20	25.0	0.307	0.37	-0.02
836.4	4182	RMC	Left	/	24.20	25.0	0.246	0.30	-0.03
836.4	4182	RMC	Right	/	24.20	25.0	0.245	0.29	0.12
836.4	4182	RMC	Bottom	/	24.20	25.0	0.038	0.05	0.01
Body-Worn Test Data									
836.4	4182	RMC	Front	10mm	24.20	25.0	0.212	0.25	0.05
836.4	4182	RMC	Rear	10mm	24.20	25.0	0.307	0.37	-0.02

Table 13.7: SAR Values (LTE Band 5 - Head)

Ambient Temperature: 22.0°C					Liquid Temperature: 21.5°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
829	20450	1RB_24	Left Cheek	7	23.61	25.0	0.228	0.31	-0.02
829	20450	25RB_25	Left Cheek	/	22.54	24.0	0.175	0.24	0.14
829	20450	1RB_24	Left Tilt	/	23.61	25.0	0.103	0.14	0.03
829	20450	25RB_25	Left Tilt	/	22.54	24.0	0.079	0.11	0.05
829	20450	1RB_24	Right Cheek	/	23.61	25.0	0.208	0.29	0.04
829	20450	25RB_25	Right Cheek	/	22.54	24.0	0.154	0.22	-0.14
829	20450	1RB_24	Right Tilt	/	23.61	25.0	0.104	0.14	0.12
829	20450	25RB_25	Right Tilt	/	22.54	24.0	0.087	0.12	-0.07

Table 13.8: SAR Values (LTE Band 5 - Body)

Ambient Temperature: 22.0°C					Liquid Temperature: 21.5°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
829	20450	1RB_24	Front	/	23.61	25.0	0.183	0.25	0.01
829	20450	25RB_25	Front	/	22.54	24.0	0.137	0.19	-0.02
829	20450	1RB_24	Rear	8	23.61	25.0	0.236	0.33	0.02
829	20450	25RB_25	Rear	/	22.54	24.0	0.179	0.25	-0.01
829	20450	1RB_24	Left	/	23.61	25.0	0.205	0.28	-0.01
829	20450	25RB_25	Left	/	22.54	24.0	0.160	0.22	0.00
829	20450	1RB_24	Right	/	23.61	25.0	0.211	0.29	0.00
829	20450	25RB_25	Right	/	22.54	24.0	0.168	0.24	0.04
829	20450	1RB_24	Bottom	/	23.61	25.0	0.050	0.07	0.11
829	20450	25RB_25	Bottom	/	22.54	24.0	0.038	0.05	0.01
Body-Worn Test Data									
829	20450	1RB_24	Front	10mm	23.61	25.0	0.183	0.25	0.01
829	20450	25RB_25	Front	10mm	22.54	24.0	0.137	0.19	-0.02
829	20450	1RB_24	Rear	10mm	23.61	25.0	0.236	0.33	0.02
829	20450	25RB_25	Rear	10mm	22.54	24.0	0.179	0.25	-0.01

Table 13.9: SAR Values (LTE Band 7 - Head)

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C									
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
2560	21350	1RB_50	Left Cheek	/	23.49	24.5	0.071	0.09	0.03
2510	20850	50RB_25	Left Cheek	/	22.55	23.5	0.057	0.07	0.05
2560	21350	1RB_50	Left Tilt	/	23.49	24.5	0.065	0.08	0.12
2510	20850	50RB_25	Left Tilt	/	22.55	23.5	0.057	0.07	0.07
2560	21350	1RB_50	Right Cheek	9	23.49	24.5	0.096	0.12	0.12
2510	20850	50RB_25	Right Cheek	/	22.55	23.5	0.088	0.11	0.07
2560	21350	1RB_50	Right Tilt	/	23.49	24.5	0.053	0.07	0.06
2510	20850	50RB_25	Right Tilt	/	22.55	23.5	0.043	0.05	0.12

Table 13.10: SAR Values (LTE Band 7 - Body)

Ambient Temperature: 22.2°C					Liquid Temperature: 21.7°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
2510	20850	1RB_50	Front	/	19.47	20.5	0.220	0.28	0.00
2510	20850	50RB_25	Front	/	18.51	19.5	0.191	0.24	0.03
2510	20850	1RB_50	Rear	/	19.47	20.5	0.438	0.56	0.04
2510	20850	50RB_25	Rear	/	18.51	19.5	0.345	0.43	0.07
2560	21350	1RB_50	Left	/	23.49	24.5	0.094	0.12	0.14
2510	20850	50RB_25	Left	/	22.55	23.5	0.060	0.07	-0.17
2560	21350	1RB_50	Right	/	23.49	24.5	0.182	0.23	0.03
2510	20850	50RB_25	Right	/	22.55	23.5	0.139	0.17	-0.01
2510	20850	1RB_50	Bottom	/	19.47	20.5	0.616	0.78	-0.07
2510	20850	50RB_25	Bottom	/	18.51	19.5	0.429	0.54	-0.06
Body-Worn Test Data									
2560	21350	1RB_50	Front	11mm	23.49	24.5	0.622	0.78	0.05
2510	20850	50RB_25	Front	11mm	22.55	23.5	0.394	0.49	0.07
2510	20850	1RB_50	Rear	10mm	19.47	20.5	0.438	0.56	0.04
2510	20850	50RB_25	Rear	10mm	18.51	19.5	0.345	0.43	0.07
Sensor off Test Data									
2560	21350	1RB_50	Front	11mm	23.49	24.5	0.625	0.78	0.05
2510	20850	50RB_25	Front	11mm	22.55	23.5	0.394	0.49	0.07
2560	21350	1RB_50	Rear	17mm	23.49	24.5	0.649	0.82	0.05
2510	20850	50RB_25	Rear	17mm	22.55	23.5	0.361	0.45	0.04
2560	21350	1RB_50	Bottom	10/17mm	23.49	24.5	0.781	0.99	0.14
2510	20850	50RB_25	Bottom	17mm	22.55	23.5	0.479	0.60	0.07
2535	21100	1RB_50	Bottom	17mm	23.41	24.5	0.661	0.85	0.01
2510	20850	1RB_50	Bottom	17mm	23.42	24.5	0.596	0.76	0.11
2510	20850	100RB	Bottom	17mm	22.54	23.5	0.472	0.59	0.08
2560	21350	1RB_50	Bottom	SIM2/17mm	23.49	24.5	0.765	0.97	0.05

Table 13.11: SAR Values (LTE Band 41 - Head)

Ambient Temperature: 22.2°C					Liquid Temperature: 21.7°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
2545	40140	1RB_50	Left Cheek	/	23.75	25.0	0.041	0.05	0.00
2545	40140	50RB_25	Left Cheek	/	22.59	24.0	0.031	0.04	0.09
2545	40140	1RB_50	Left Tilt	/	23.75	25.0	0.056	0.08	0.04
2545	40140	50RB_25	Left Tilt	/	22.59	24.0	0.037	0.05	0.03
2545	40140	1RB_50	Right Cheek	11	23.75	25.0	0.058	0.08	0.05
2545	40140	50RB_25	Right Cheek	/	22.59	24.0	0.049	0.07	0.04
2545	40140	1RB_50	Right Tilt	/	23.75	25.0	0.026	0.03	0.04
2545	40140	50RB_25	Right Tilt	/	22.59	24.0	0.020	0.03	0.05

Note: SAR for LTE Band 38 is covered by LTE Band 41 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

Table 13.12: SAR Values (LTE Band 41 - Body)

Ambient Temperature: 22.2°C					Liquid Temperature: 21.7°C				
Frequency		Test Mode	Test Position	Figure No. / Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.								
Hotspot Test Data (10mm)									
2595	40640	1RB_50	Front	/	20.65	22.0	0.215	0.29	0.16
2595	40640	50RB_25	Front	/	19.63	21.0	0.172	0.24	0.18
2595	40640	1RB_50	Rear	/	20.65	22.0	0.416	0.57	-0.03
2595	40640	50RB_25	Rear	/	19.63	21.0	0.321	0.44	0.00
2545	40140	1RB_50	Left	/	23.75	25.0	0.055	0.07	-0.07
2545	40140	50RB_25	Left	/	22.59	24.0	0.044	0.06	0.01
2545	40140	1RB_50	Right	/	23.75	25.0	0.122	0.16	0.17
2545	40140	50RB_25	Right	/	22.59	24.0	0.095	0.13	0.07
2595	40640	1RB_50	Bottom	12	20.65	22.0	0.582	0.79	-0.07
2595	40640	50RB_25	Bottom	/	19.63	21.0	0.416	0.57	0.03
Body-Worn Test Data									
2545	40140	1RB_50	Front	11mm	23.75	25.0	0.389	0.52	0.03
2545	40140	50RB_25	Front	11mm	22.59	24.0	0.309	0.43	0.12
2595	40640	1RB_50	Rear	10mm	20.65	22.0	0.416	0.57	-0.03
2595	40640	50RB_25	Rear	10mm	19.63	21.0	0.321	0.44	0.00
Sensor off Test Data									
2545	40140	1RB_50	Front	11mm	23.75	25.0	0.389	0.52	0.03
2545	40140	50RB_25	Front	11mm	22.59	24.0	0.309	0.43	0.12
2545	40140	1RB_50	Rear	17mm	23.75	25.0	0.402	0.54	0.07
2545	40140	50RB_25	Rear	17mm	22.59	24.0	0.321	0.44	0.06
2545	40140	1RB_50	Bottom	17mm	23.75	25.0	0.488	0.65	0.09
2545	40140	50RB_25	Bottom	17mm	22.59	24.0	0.369	0.51	0.05

Note: SAR for LTE Band 38 is covered by LTE Band 41 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.