


5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5865MHz

CF
5.865GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

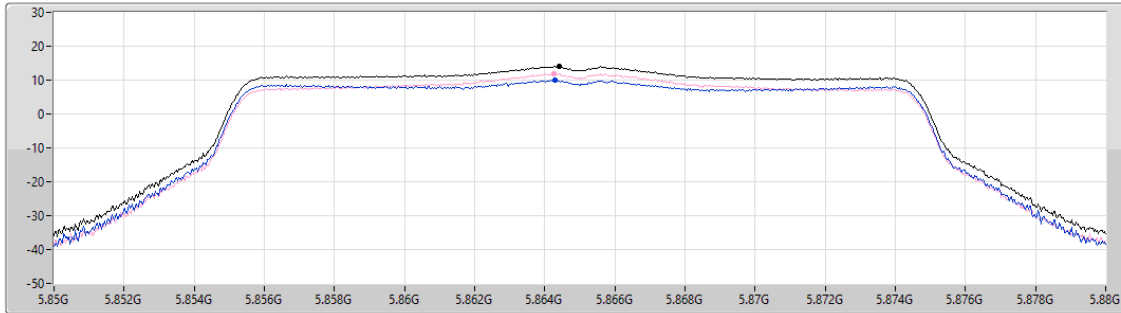

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.95	13.95	10.09	11.94

5.85-5.895GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5885MHz

CF
5.885GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

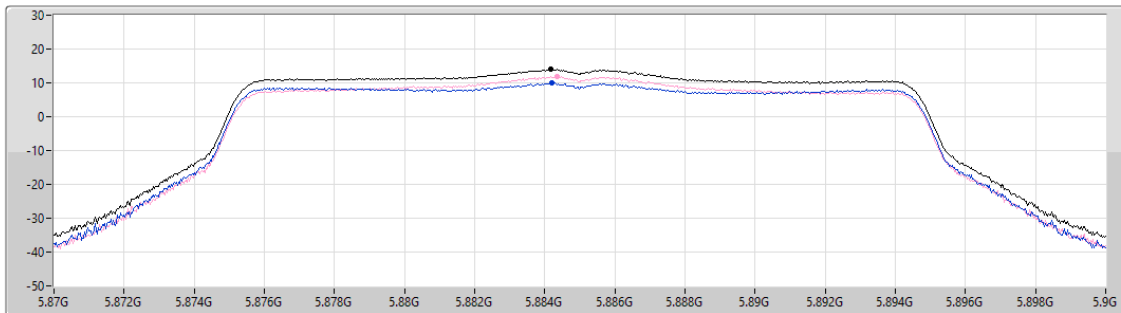

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.97	13.97	10.02	11.96

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5190MHz

CF
5.19GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

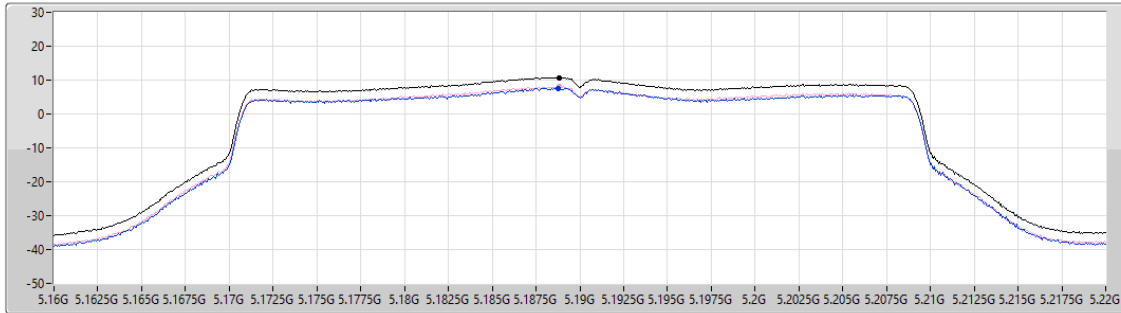

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	7.53	8.01

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

CF
5.23GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

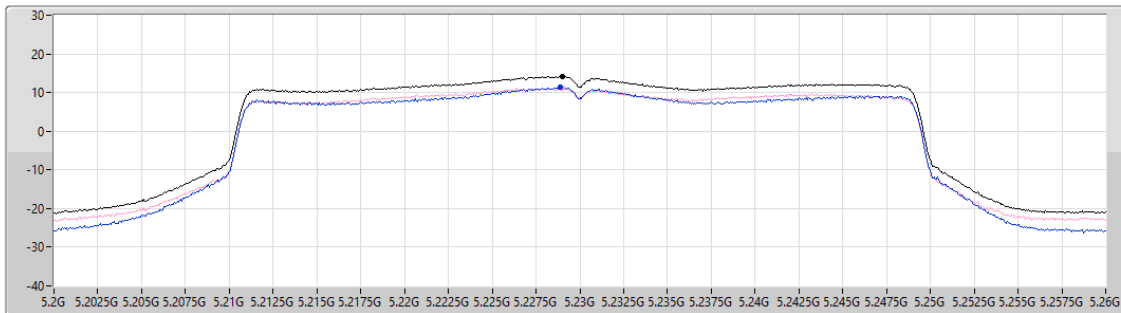


Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.17	14.17	11.53	11.12

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5270MHz

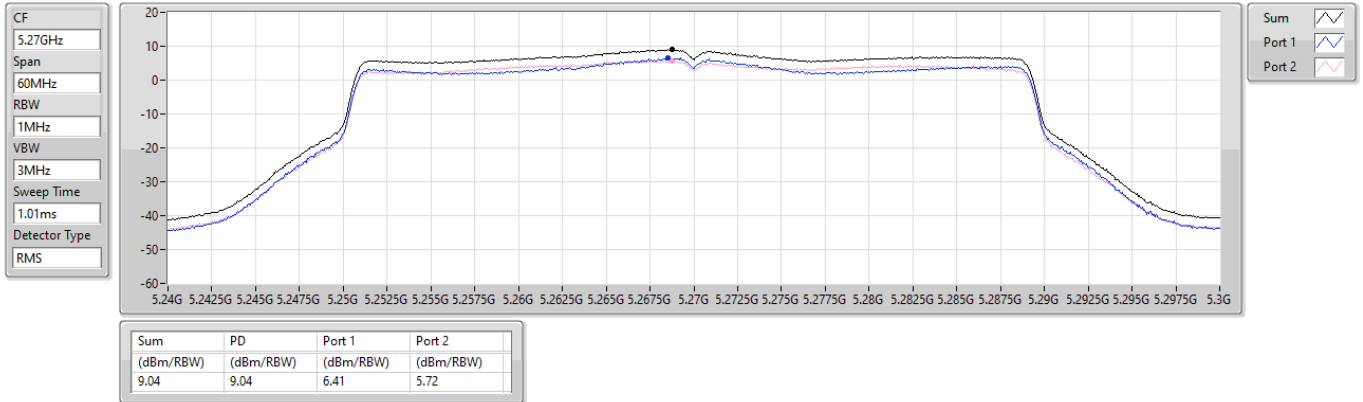

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5310MHz

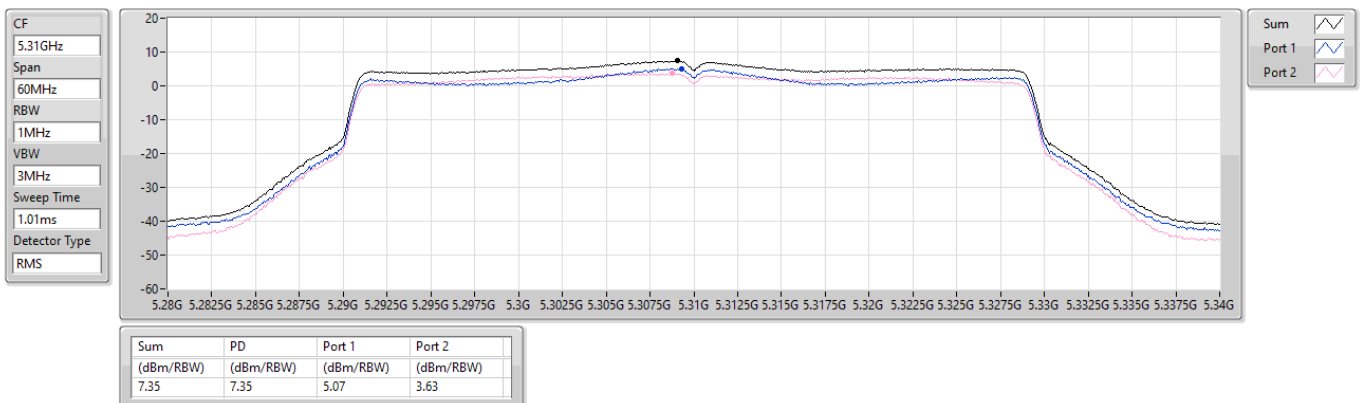




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5510MHz

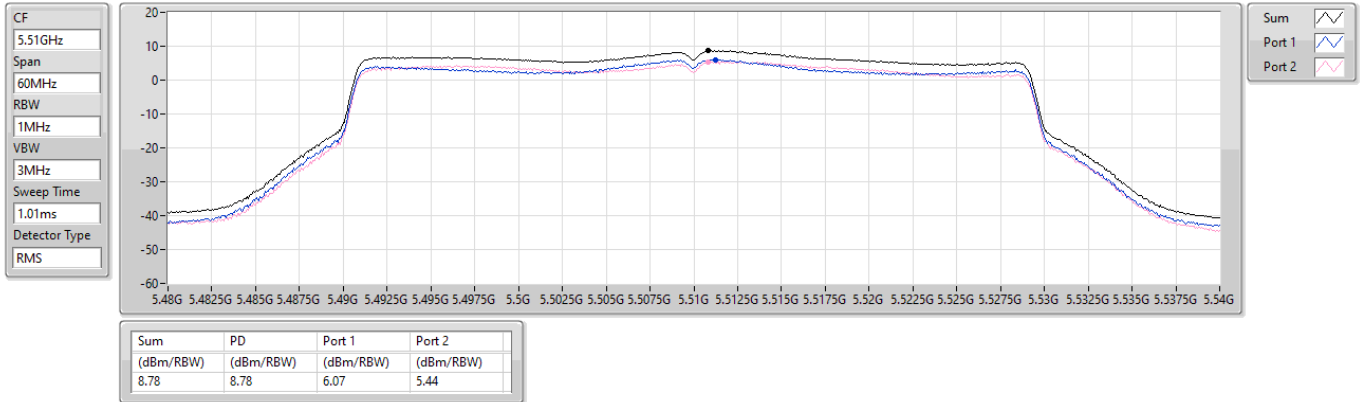

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5590MHz

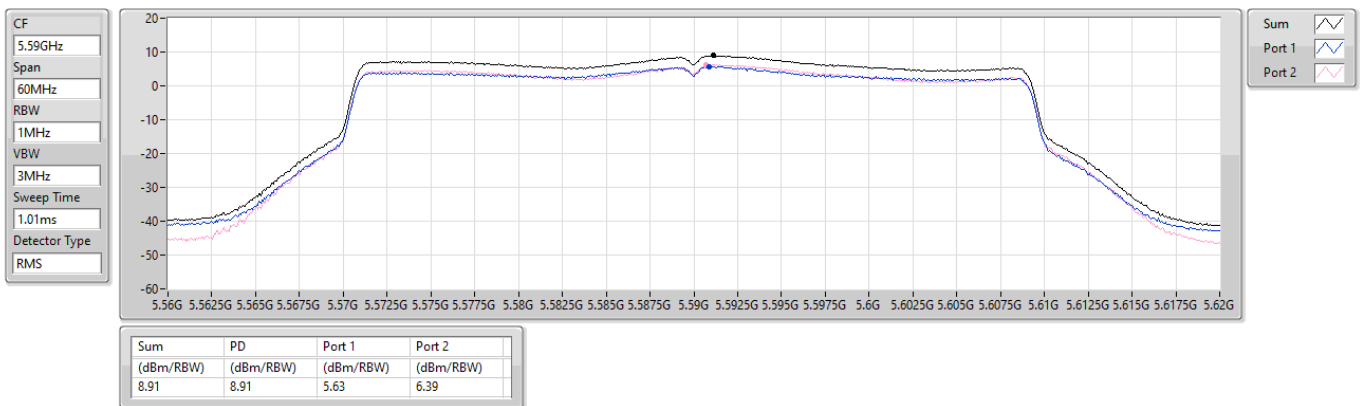




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5670MHz

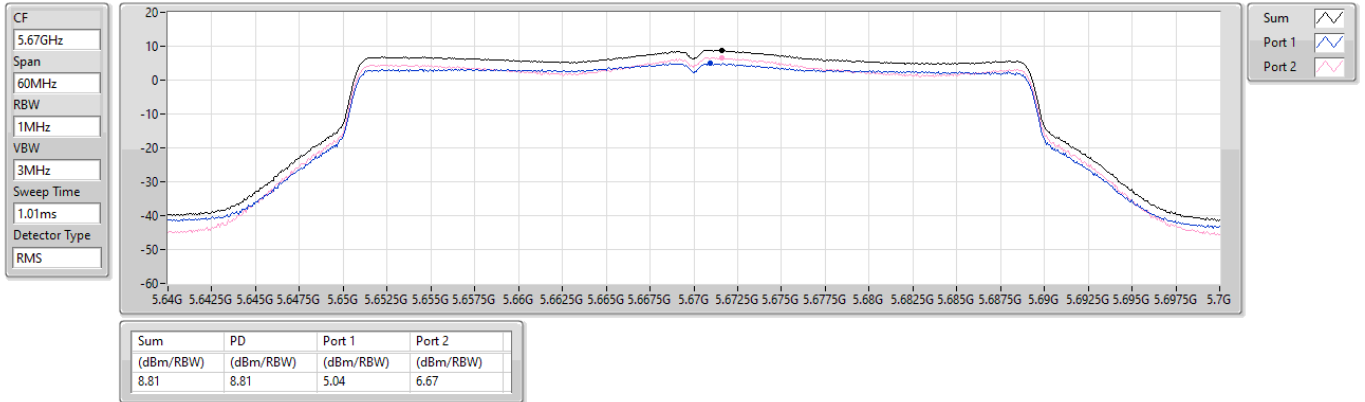

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

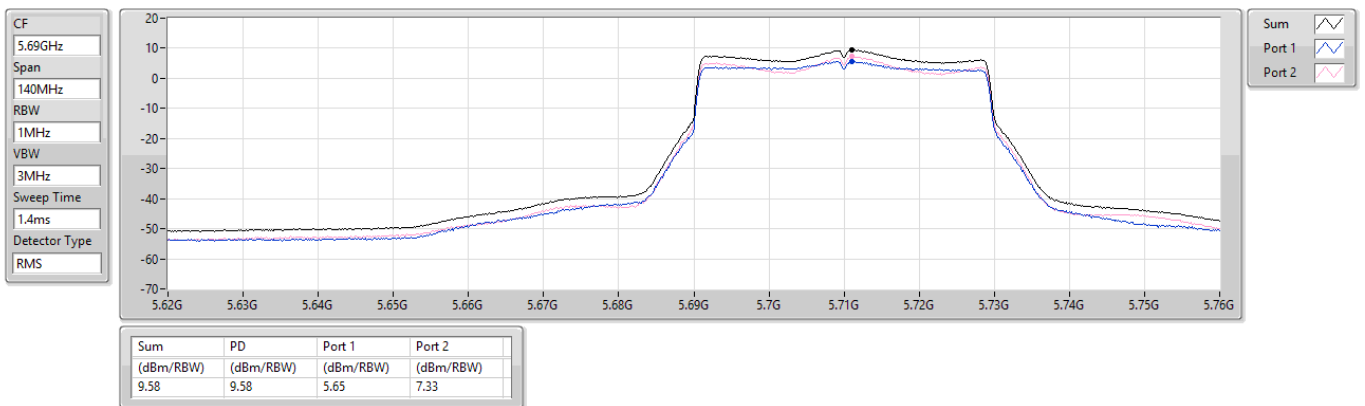




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5710MHz Straddle 5.725-5.85GHz

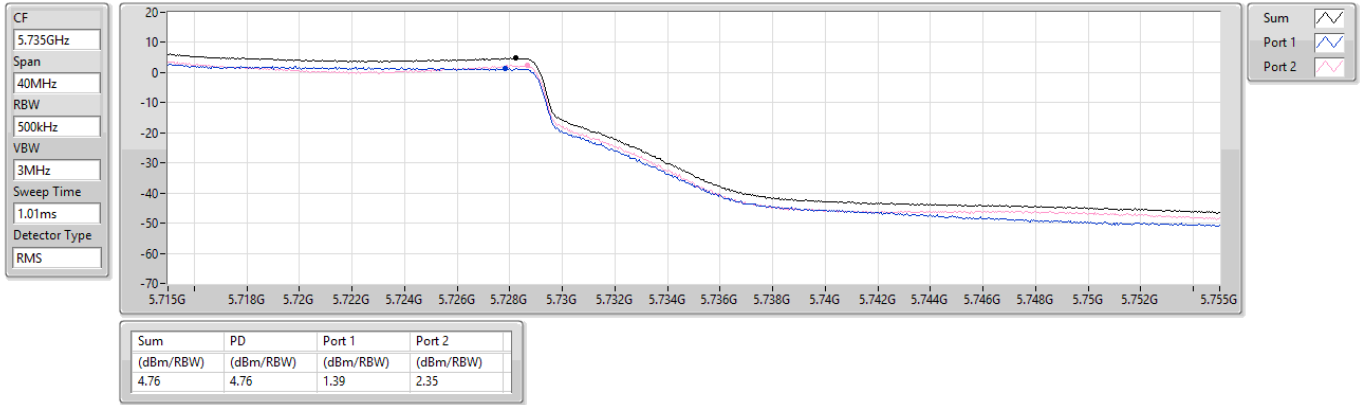

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

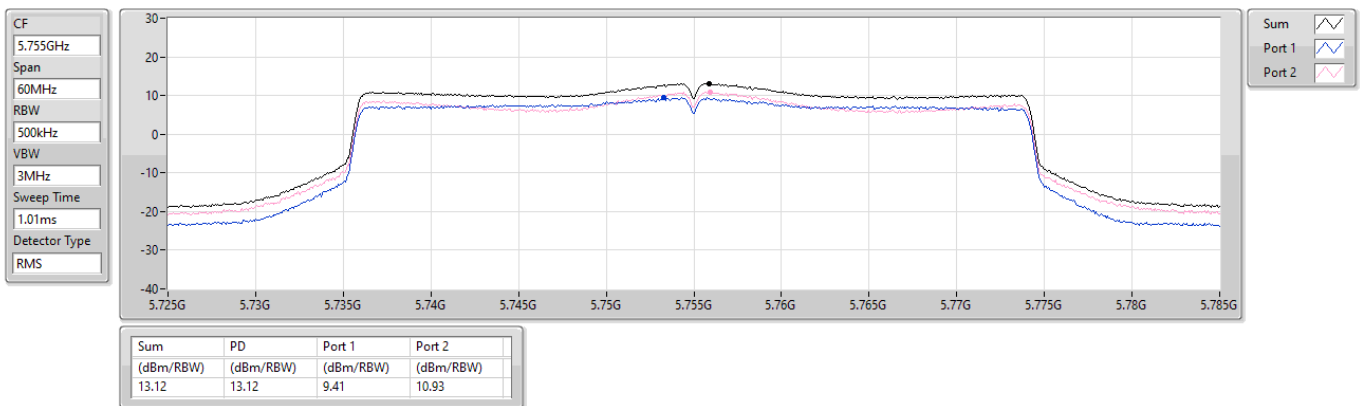




5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5795MHz

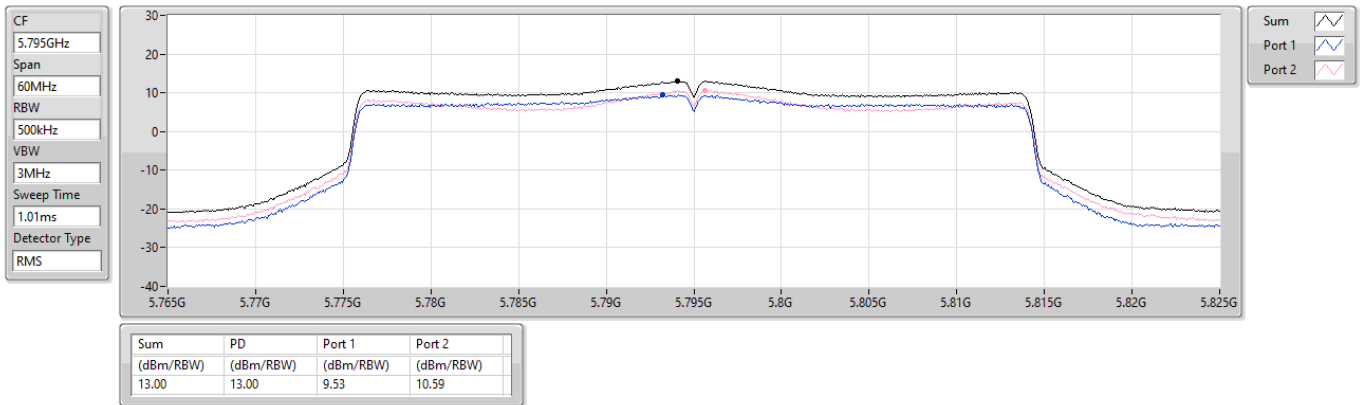

5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5835MHz

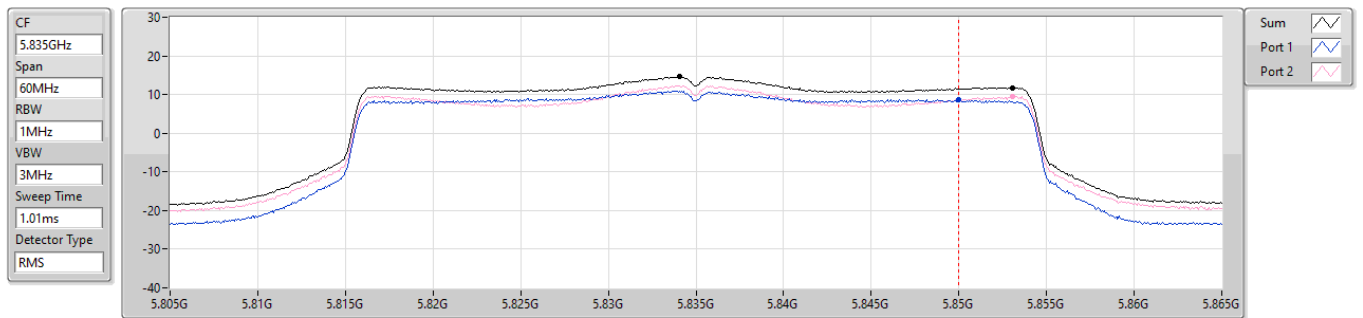

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
14.60	11.59	500k	-3.01


5850-5895MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.81	11.81	8.59	9.46

5.85-5.895GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD


5875MHz

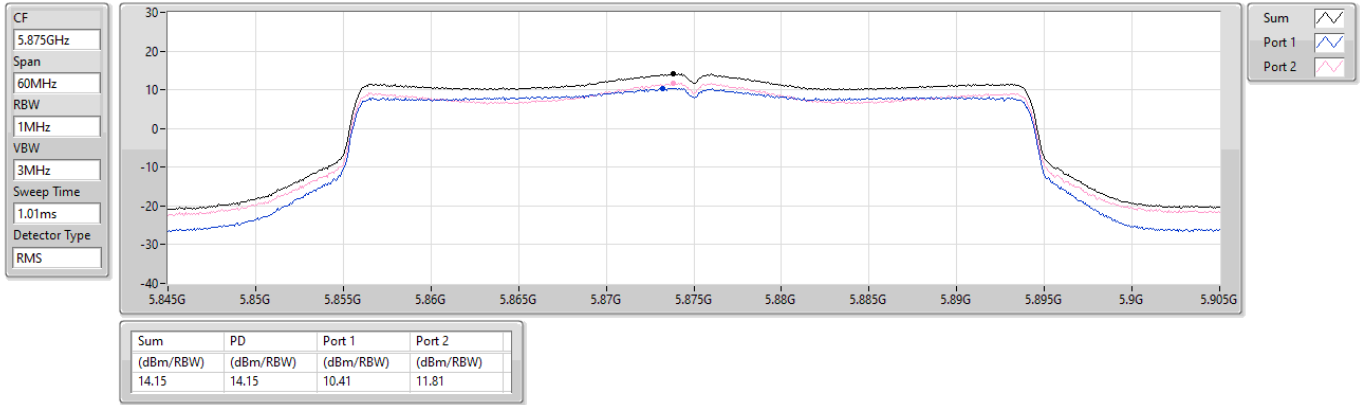

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

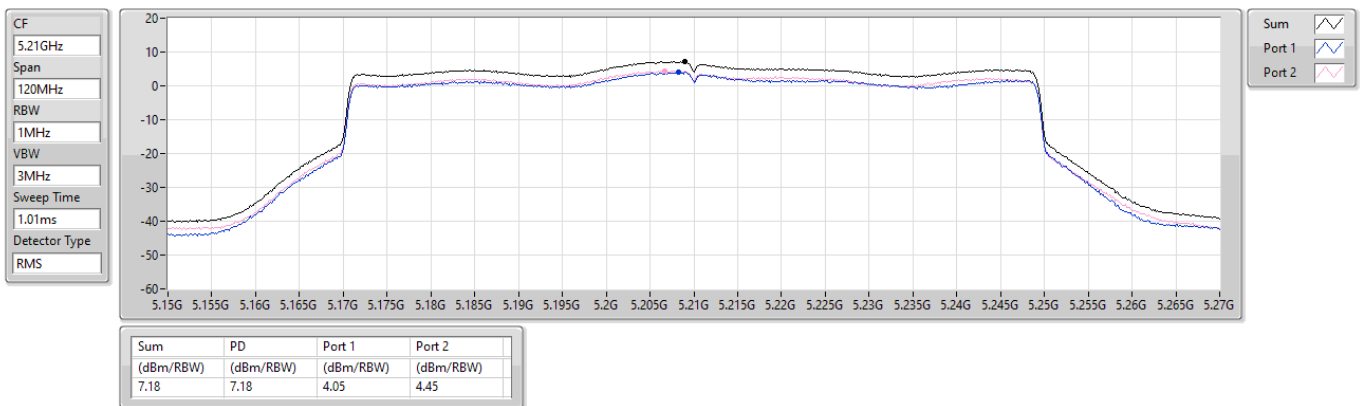


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

CF
5.29GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

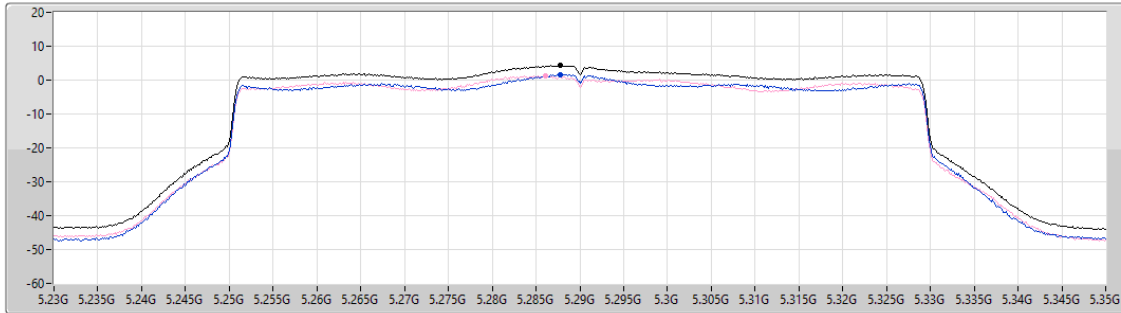

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.31	4.31	1.64	1.34

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

CF
5.53GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

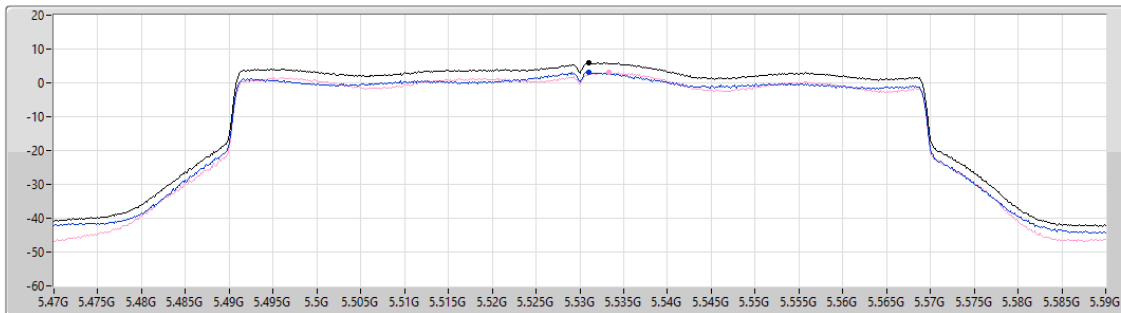

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.92	5.92	3.15	3.01



5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD


5610MHz

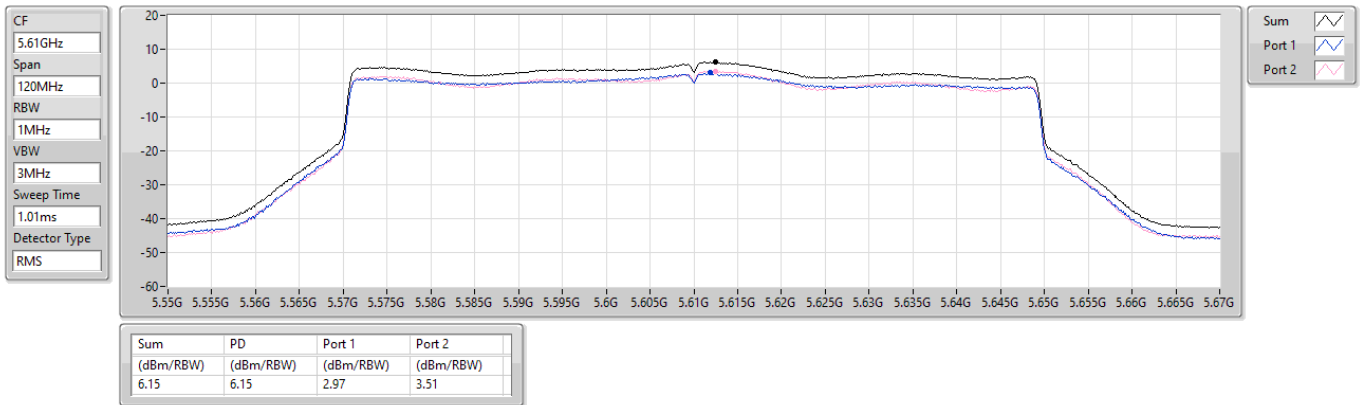

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

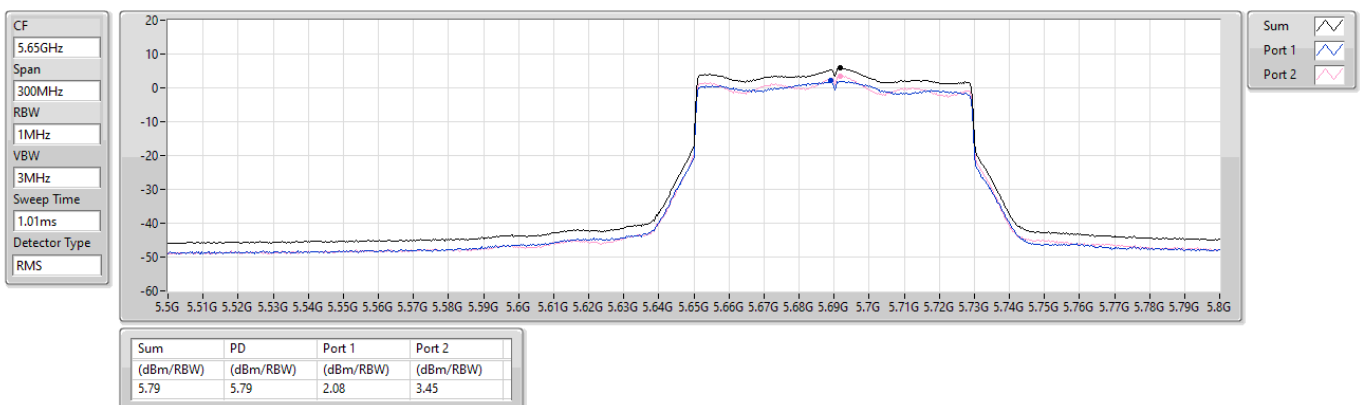




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD


5690MHz Straddle 5.725-5.85GHz

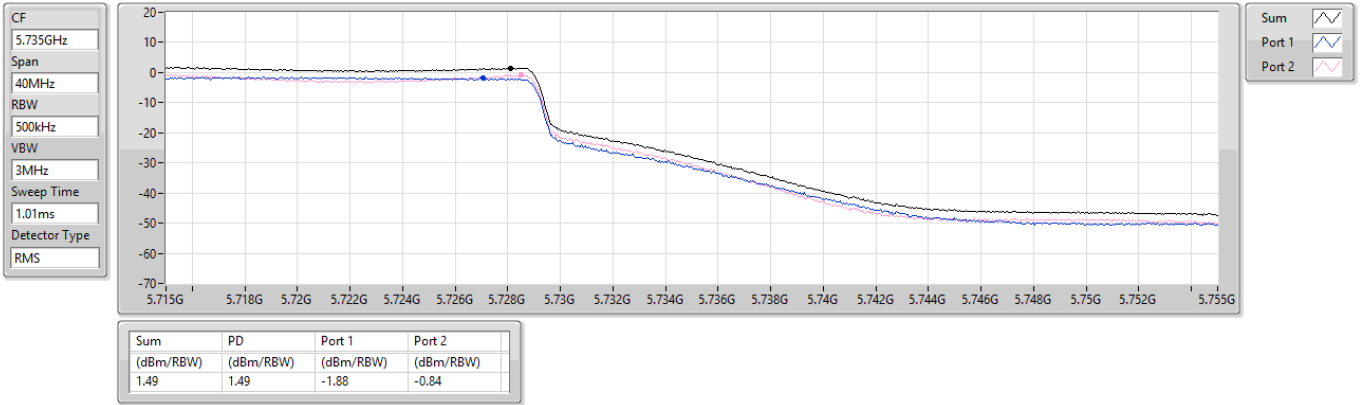

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5775MHz

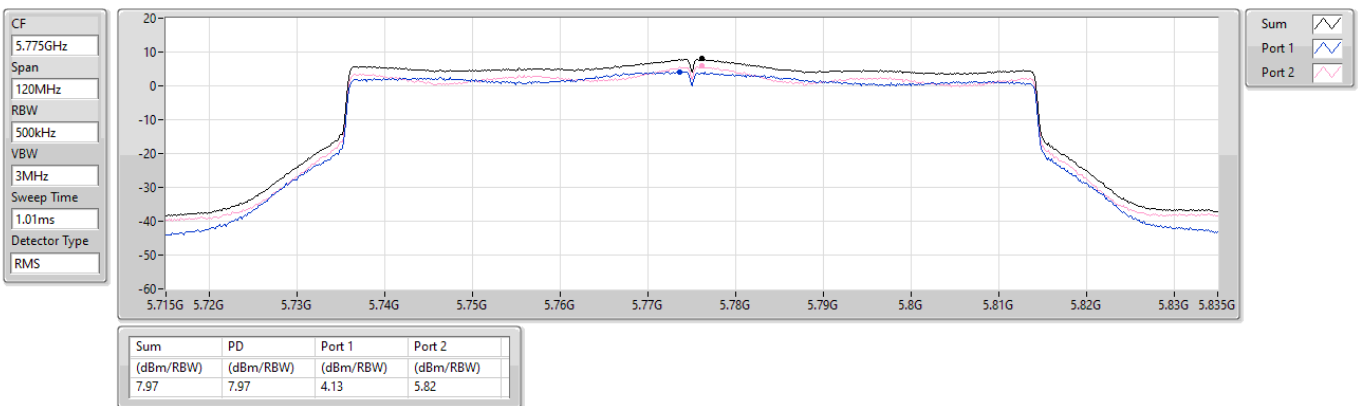




5.85-5.895GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5855MHz

CF
5.855GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

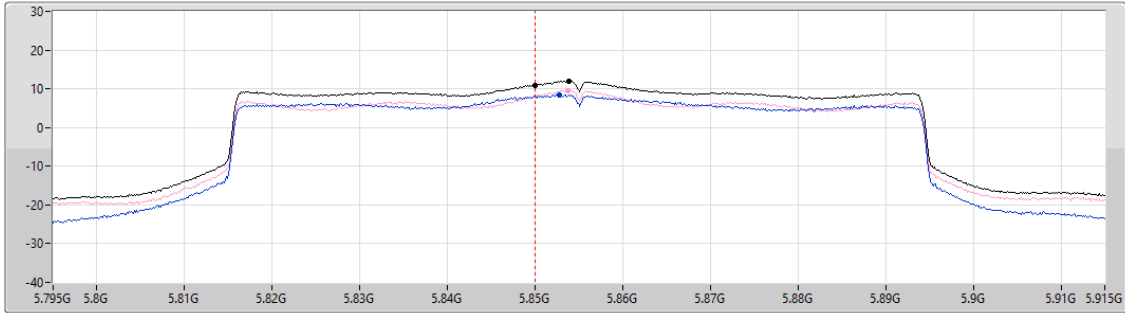

Sum
Port 1
Port 2

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
10.95	7.94	500k	-3.01

5850-5895MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.05	12.05	8.51	9.61

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

CF
5.17GHz
Span
320MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

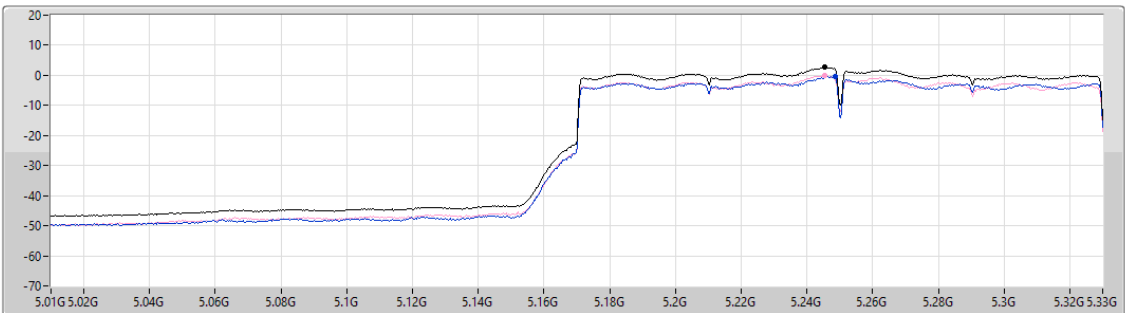

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.70	2.70	-0.42	-0.14



5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD


5250MHz Straddle 5.25-5.35GHz

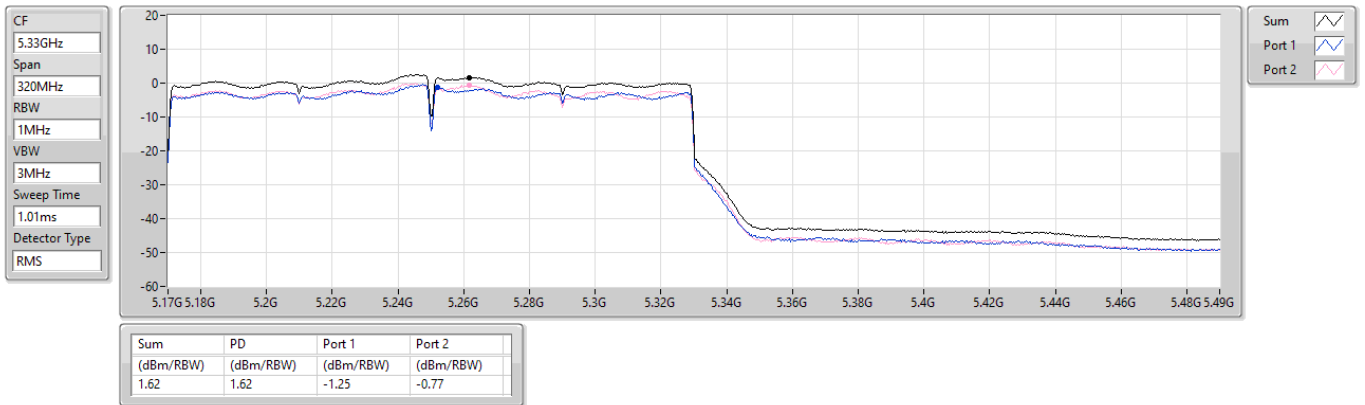

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD


5570MHz

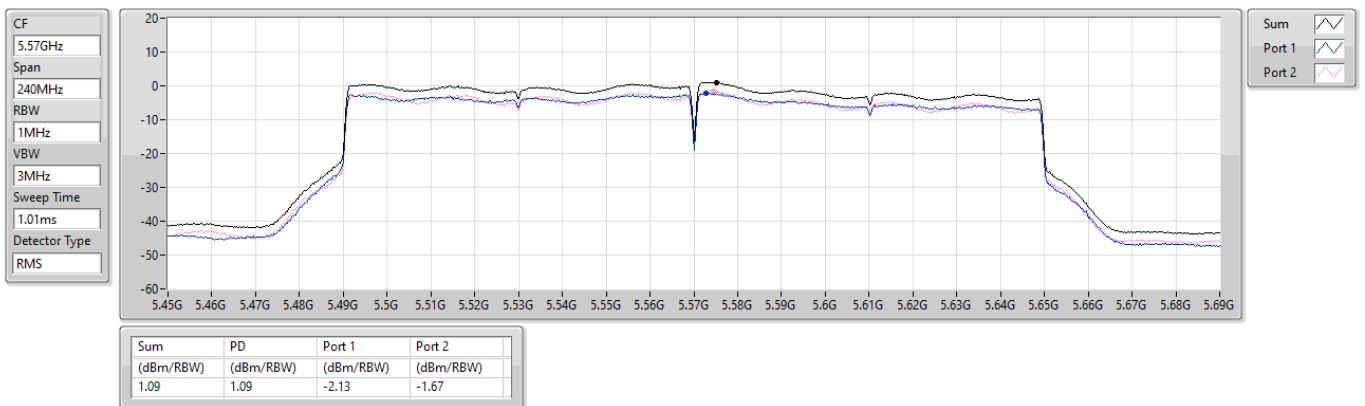

5.85-5.895GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5815MHz

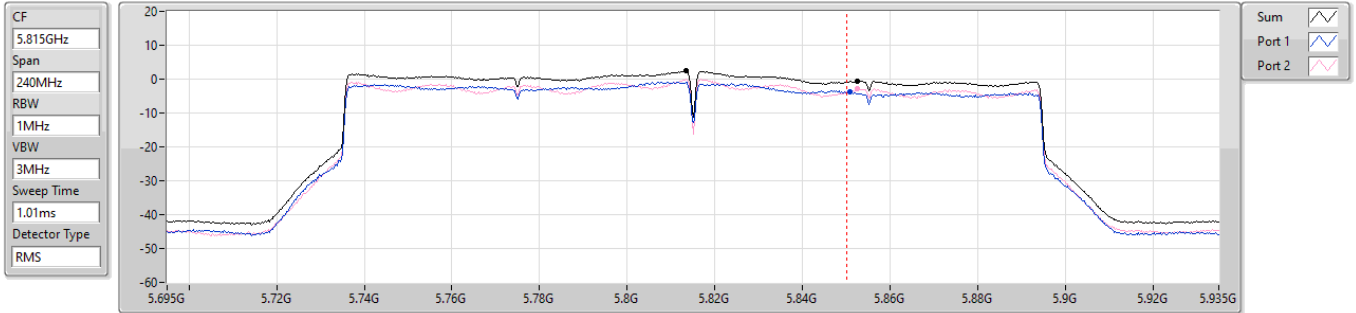

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
2.48	-0.53	500k	-3.01


5850-5895MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.55	-0.55	-3.83	-2.93

5.47-5.725GHz_be240_240MHz_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.47-5.725GHz

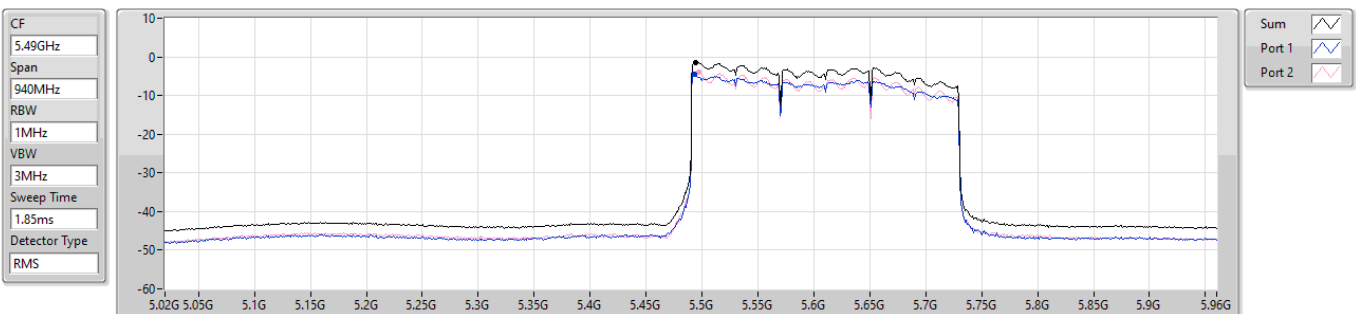


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.40	-1.40	-4.57	-3.81



5.725-5.85GHz_be240_240MHz_Nss1,(MCS0)_2TX

PSD

5610MHz Straddle 5.725-5.85GHz

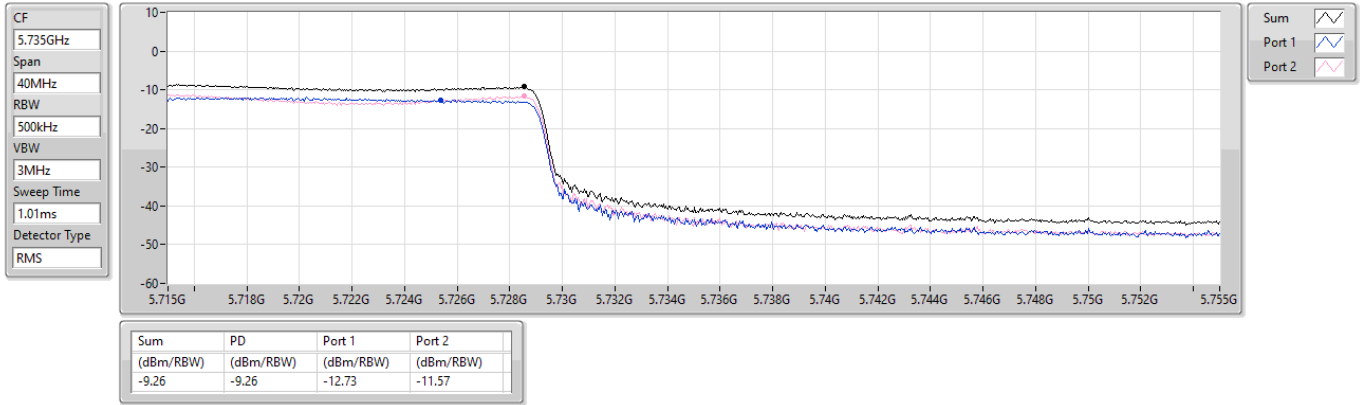

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.67	20.38
802.11be EHT40_Nss2,(MCS0)_2TX	13.90	17.61
802.11be EHT80_Nss2,(MCS0)_2TX	7.30	11.01
802.11be EHT160_Nss2,(MCS0)_2TX	2.63	6.34
5.25-5.35GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	10.57	14.69
802.11be EHT40_Nss2,(MCS0)_2TX	8.67	12.79
802.11be EHT80_Nss2,(MCS0)_2TX	4.87	8.99
802.11be EHT160_Nss2,(MCS0)_2TX	2.75	6.87
5.47-5.725GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	10.56	14.25
802.11be EHT40_Nss2,(MCS0)_2TX	9.02	12.71
802.11be EHT80_Nss2,(MCS0)_2TX	6.09	9.78
802.11be EHT160_Nss2,(MCS0)_2TX	0.66	4.35
802.11be EHT240_Nss2,(MCS0)_2TX	-0.64	3.05
5.85-5.895GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.40	19.81
802.11be EHT40_Nss2,(MCS0)_2TX	14.17	17.58
802.11be EHT80_Nss2,(MCS0)_2TX	11.54	14.95
802.11be EHT160_Nss2,(MCS0)_2TX	-0.48	2.93
5.725-5.85GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	16.11	19.49
802.11be EHT40_Nss2,(MCS0)_2TX	13.01	16.39
802.11be EHT80_Nss2,(MCS0)_2TX	7.67	11.05
802.11be EHT240_Nss2,(MCS0)_2TX	-7.51	-4.13

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	3.71	12.56	12.84	15.61	17.00	19.32	23.00
5200MHz	Pass	3.71	13.57	13.91	16.67	17.00	20.38	23.00
5240MHz	Pass	3.71	13.35	13.78	16.48	17.00	20.19	23.00
5260MHz	Pass	4.12	7.51	7.81	10.57	11.00	14.69	17.00
5300MHz	Pass	4.12	7.46	7.83	10.51	11.00	14.63	17.00
5320MHz	Pass	4.12	7.57	7.72	10.50	11.00	14.62	17.00
5500MHz	Pass	3.69	7.63	7.50	10.53	11.00	14.22	17.00
5580MHz	Pass	3.69	7.53	7.91	10.54	11.00	14.23	17.00
5700MHz	Pass	3.69	7.45	7.82	10.54	11.00	14.23	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	3.69	7.45	7.78	10.56	11.00	14.25	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	3.38	3.22	3.77	6.45	30.00	9.83	36.00
5745MHz	Pass	3.38	12.94	13.43	16.11	30.00	19.49	36.00
5785MHz	Pass	3.38	12.79	13.15	15.97	30.00	19.35	36.00
5825MHz	Pass	3.38	12.90	13.01	15.91	30.00	19.29	36.00
5845MHz	Pass	3.41	11.90	12.06	14.95	Inf	18.36	20.00
5865MHz	Pass	3.41	13.18	13.71	16.40	Inf	19.81	20.00
5885MHz	Pass	3.41	13.13	13.57	16.32	Inf	19.73	20.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	3.71	7.79	8.03	10.88	17.00	14.59	23.00
5230MHz	Pass	3.71	10.71	11.23	13.90	17.00	17.61	23.00
5270MHz	Pass	4.12	5.48	5.92	8.67	11.00	12.79	17.00
5310MHz	Pass	4.12	4.22	4.43	7.17	11.00	11.29	17.00
5510MHz	Pass	3.69	5.68	5.48	8.47	11.00	12.16	17.00
5590MHz	Pass	3.69	5.48	5.77	8.51	11.00	12.20	17.00
5670MHz	Pass	3.69	5.51	5.81	8.65	11.00	12.34	17.00
5710MHz Straddle 5.47-5.725GHz	Pass	3.69	5.95	6.28	9.02	11.00	12.71	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	3.38	1.62	1.96	4.72	30.00	8.10	36.00
5755MHz	Pass	3.38	9.96	10.29	13.01	30.00	16.39	36.00
5795MHz	Pass	3.38	9.90	10.03	12.84	30.00	16.22	36.00
5835MHz	Pass	3.41	8.26	8.66	11.38	Inf	14.79	20.00
5875MHz	Pass	3.41	10.97	11.61	14.17	Inf	17.58	20.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.71	4.24	4.57	7.30	17.00	11.01	23.00
5290MHz	Pass	4.12	1.50	2.20	4.87	11.00	8.99	17.00
5530MHz	Pass	3.69	2.72	2.97	5.83	11.00	9.52	17.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5610MHz	Pass	3.69	2.84	3.05	5.91	11.00	9.60	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	3.69	3.01	3.32	6.09	11.00	9.78	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	3.38	-1.62	-1.24	1.45	30.00	4.83	36.00
5775MHz	Pass	3.38	4.49	4.92	7.67	30.00	11.05	36.00
5855MHz	Pass	3.41	8.42	8.71	11.54	Inf	14.95	20.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.71	-0.51	-0.15	2.63	17.00	6.34	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.12	-0.52	-0.02	2.75	11.00	6.87	17.00
5570MHz	Pass	3.69	-2.31	-2.33	0.66	11.00	4.35	17.00
5815MHz	Pass	3.41	-3.51	-3.11	-0.48	Inf	2.93	20.00
802.11be EHT240_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5610MHz Straddle 5.47-5.725GHz	Pass	3.69	-3.86	-3.44	-0.64	11.00	3.05	17.00
5610MHz Straddle 5.725-5.85GHz	Pass	3.38	-10.54	-10.26	-7.51	30.00	-4.13	36.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Directional Gain = $10 \log \left[\frac{(10^{G1/10} + 10^{G2/10})}{N_{ANT}} \right]$


Antenna Model	Operating Frequencies (MHz) / Antenna Gain (dBi)				
	5150 ~ 5250	5250 ~ 5350	5470 ~ 5725	5725 ~ 5850	5850 ~ 5895
JP887-5G-P1 (5G-1)	3.66	3.88	3.24	2.99	3.33
JP887-5G-P2-V2 (5G-2)	3.76	4.34	4.09	3.74	3.48
Directional Gain (dBi)	3.71	4.12	3.69	3.38	3.41

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5180MHz

CF
5.18GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

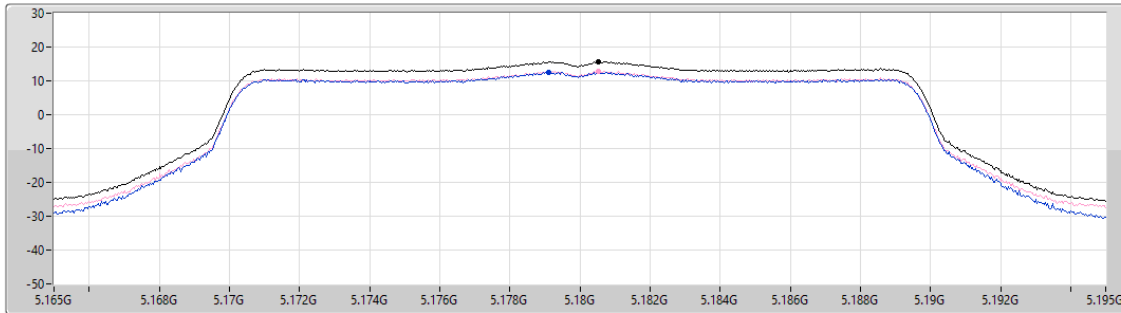


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.61	15.61	12.56	12.84

5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5200MHz

CF
5.2GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

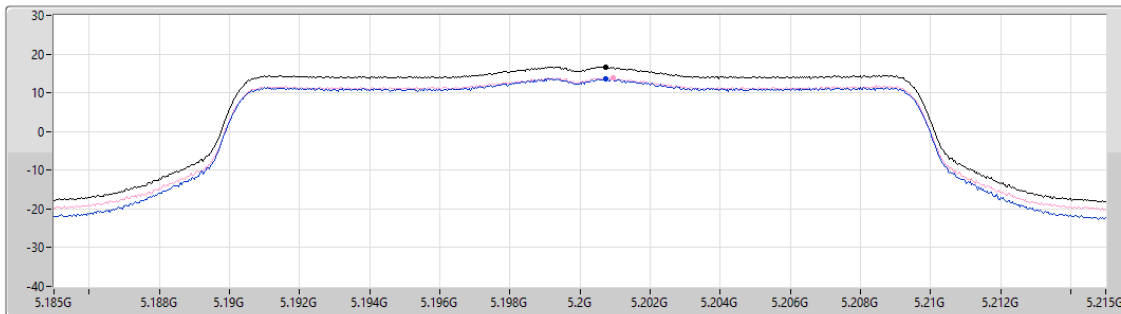

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.67	16.67	13.57	13.91




5.15-5.25GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5240MHz

CF
5.24GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

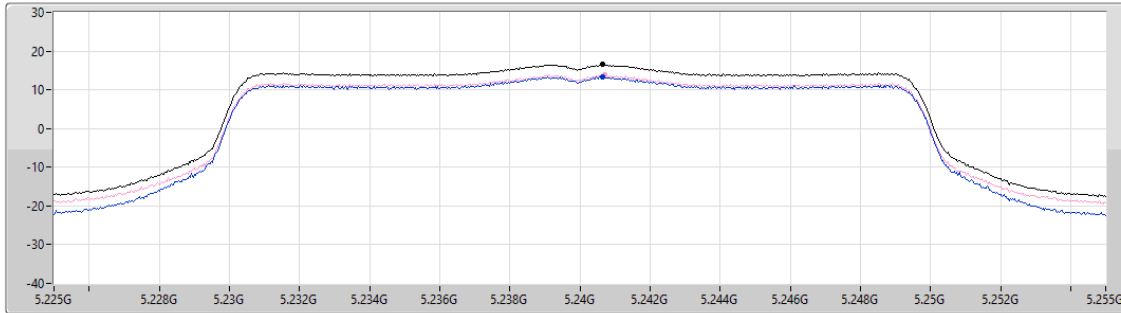

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
16.48	16.48	13.35	13.78


Sum
Port 1
Port 2

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5260MHz

CF
5.26GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

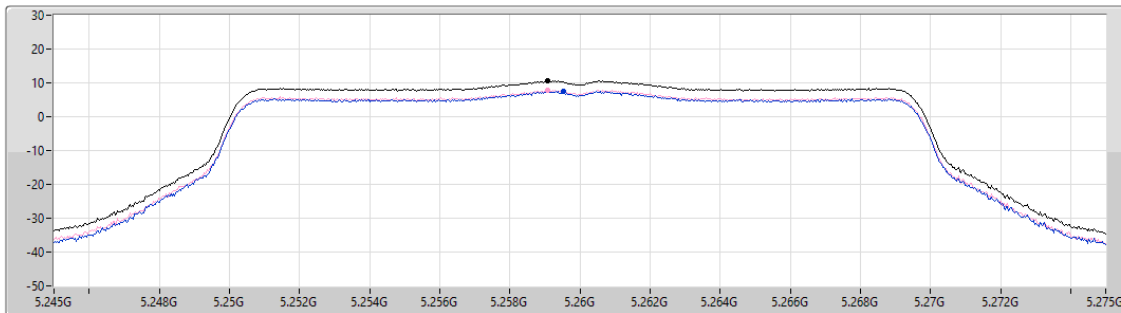

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
10.57	10.57	7.51	7.81

Sum
Port 1
Port 2




5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5300MHz

CF
5.3GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

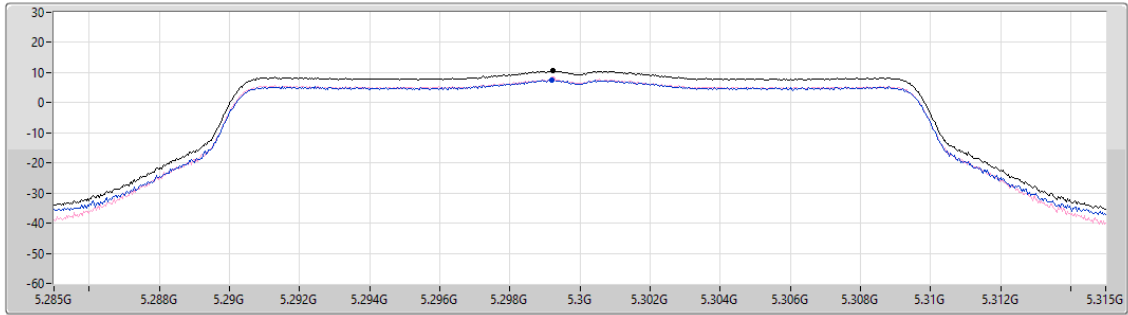

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.51	10.51	7.46	7.83


Sum
Port 1
Port 2

5.25-5.35GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5320MHz

CF
5.32GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

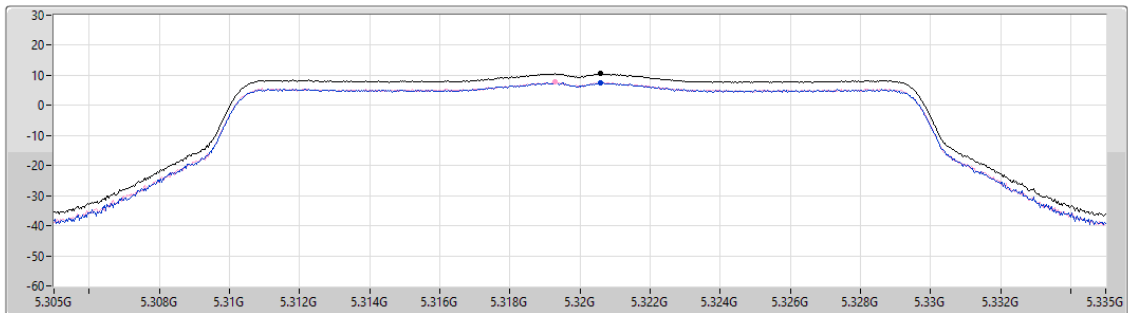

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.50	10.50	7.57	7.72


Sum
Port 1
Port 2



5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5500MHz

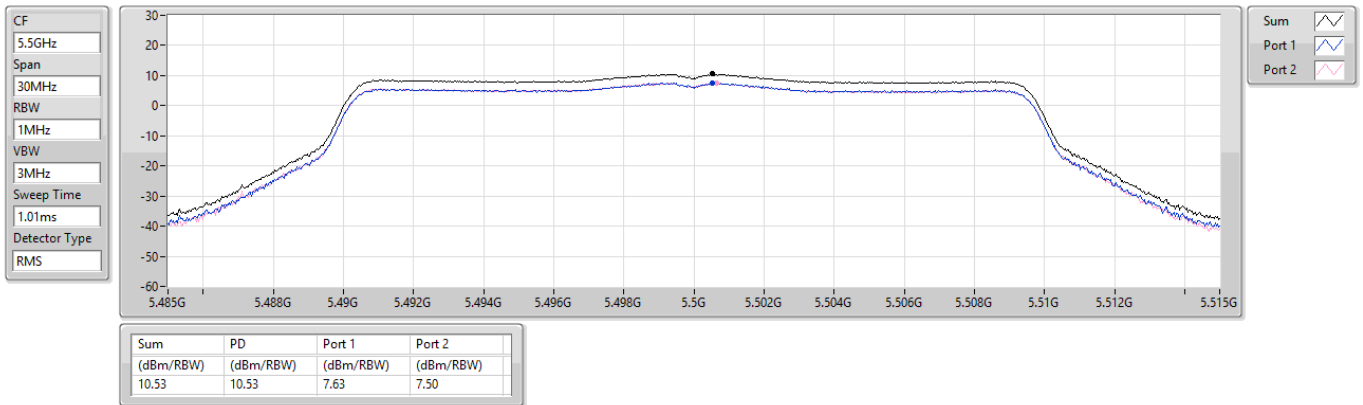

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5580MHz

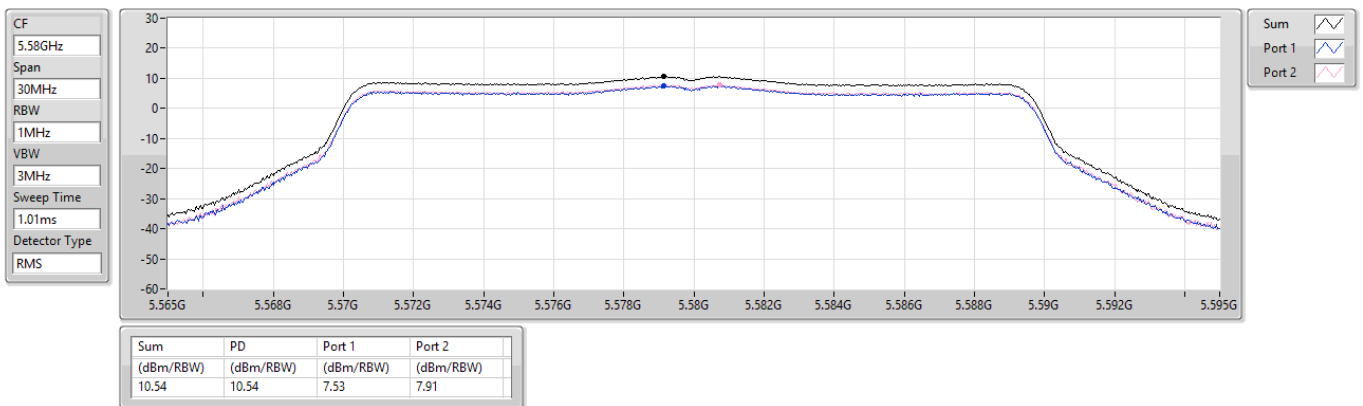




5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5700MHz

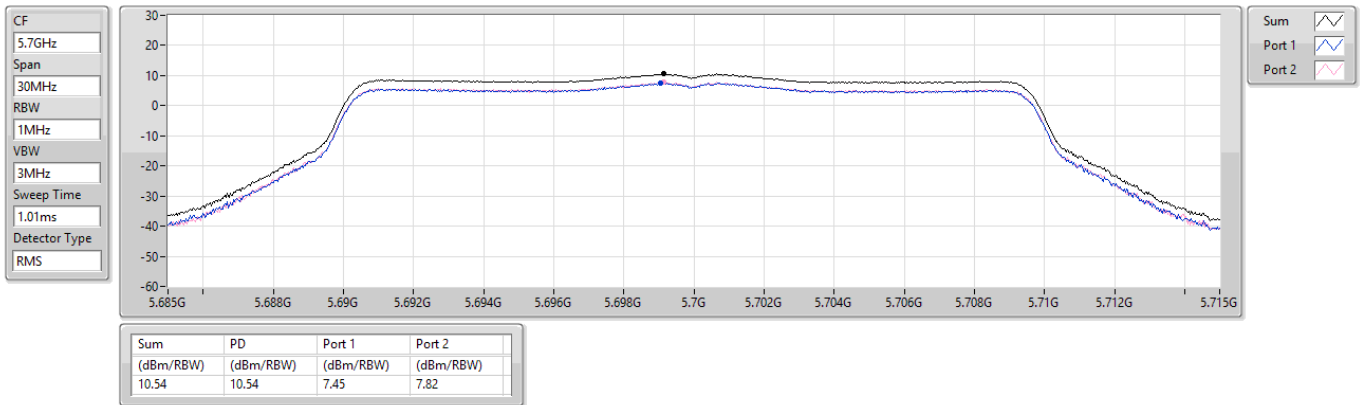

5.47-5.725GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

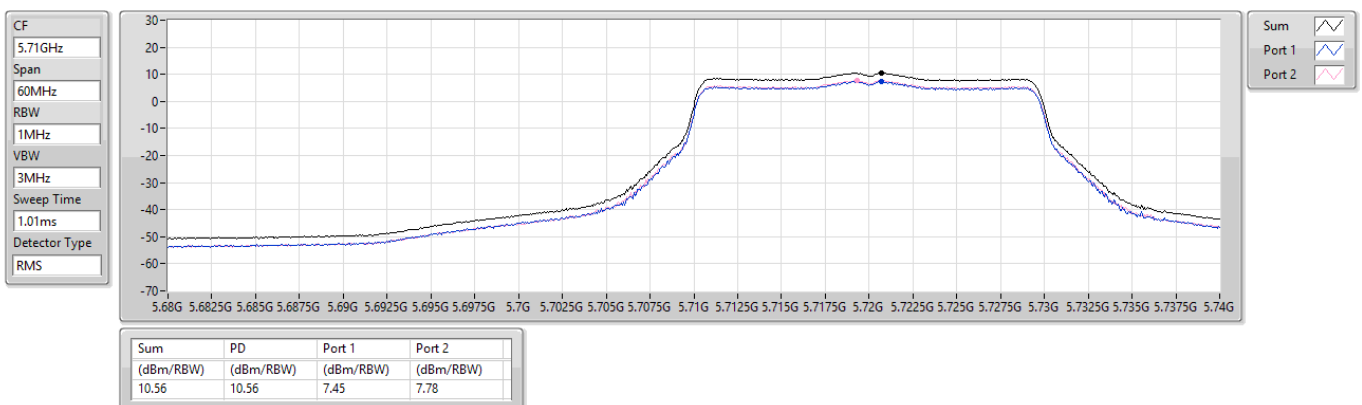




5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5720MHz Straddle 5.725-5.85GHz

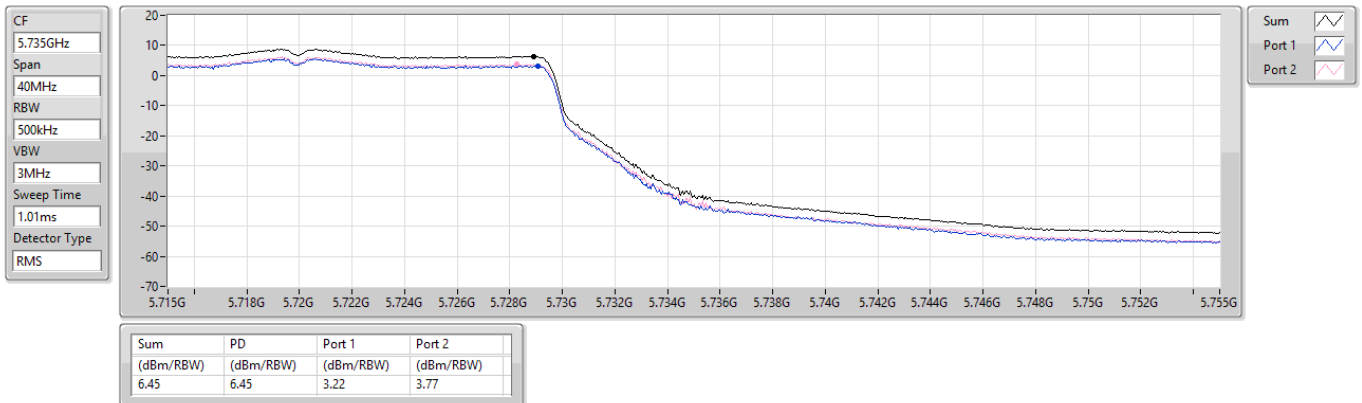

5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5745MHz

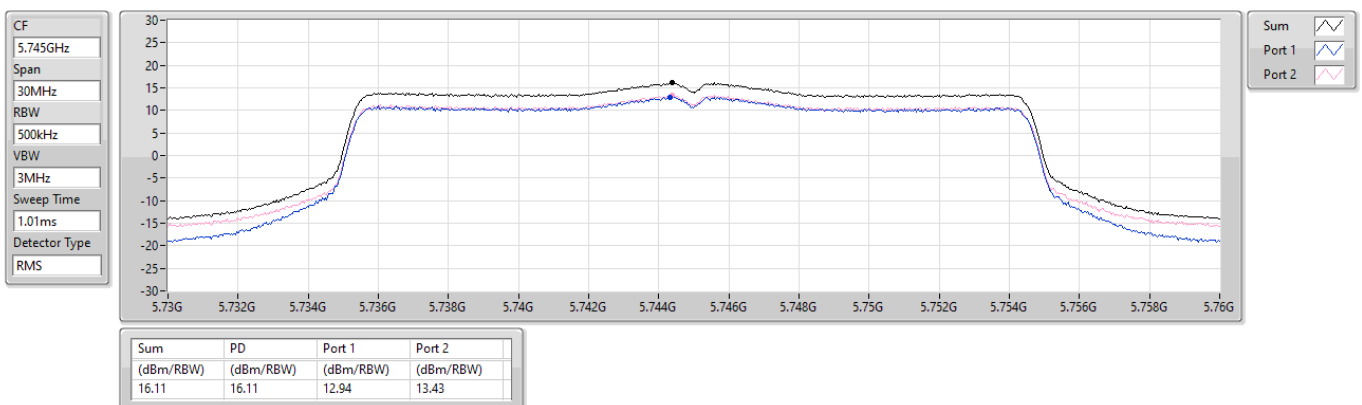




5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5785MHz

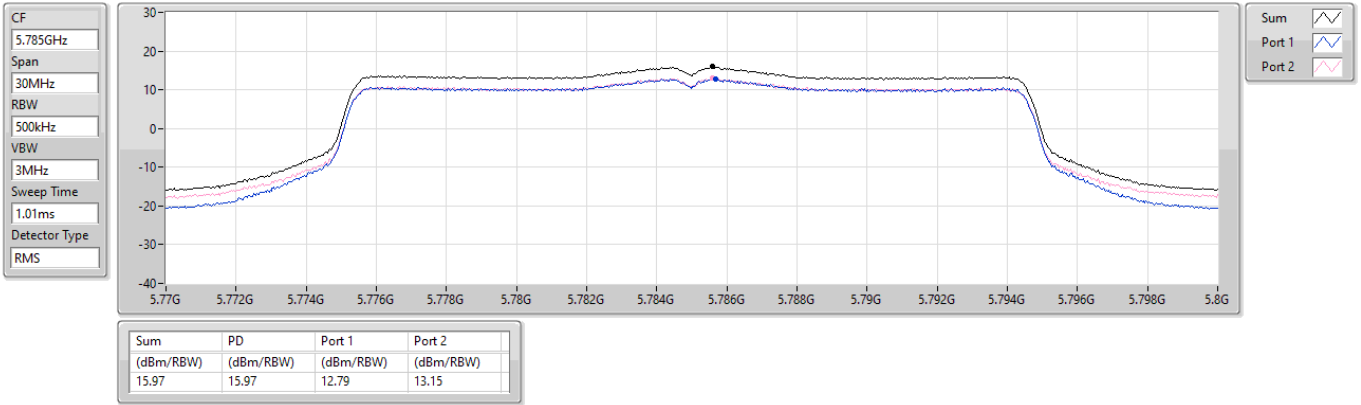

5.725-5.85GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5825MHz

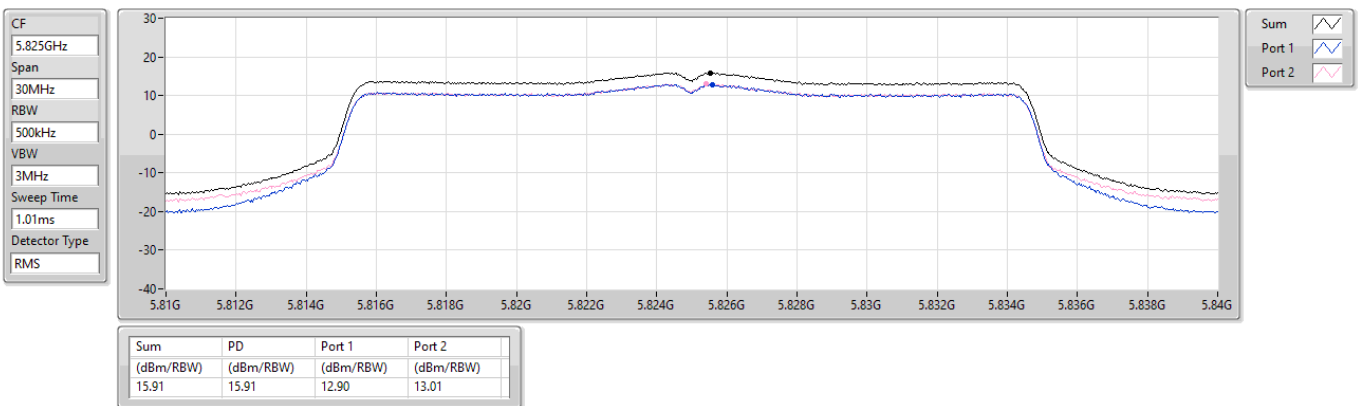




5.85-5.895GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5845MHz

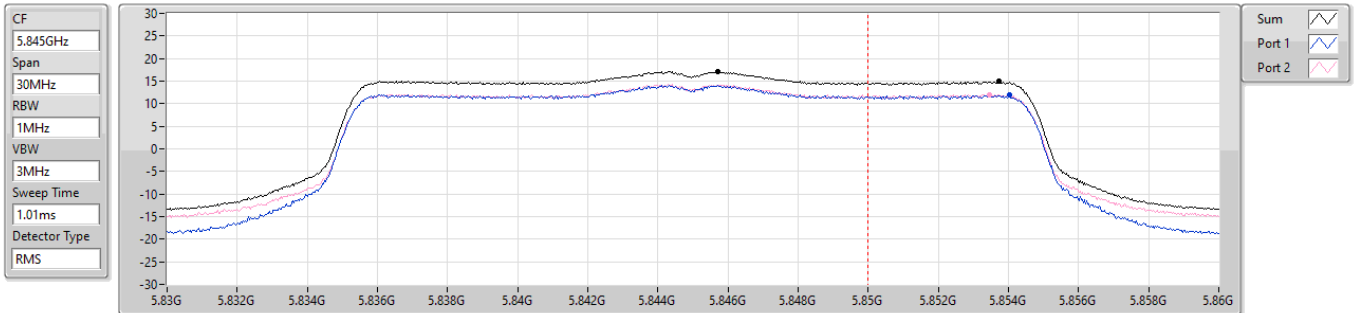

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
17.13	14.12	500k	-3.01


5850-5895MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.95	14.95	11.90	12.06

5.85-5.895GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

5865MHz

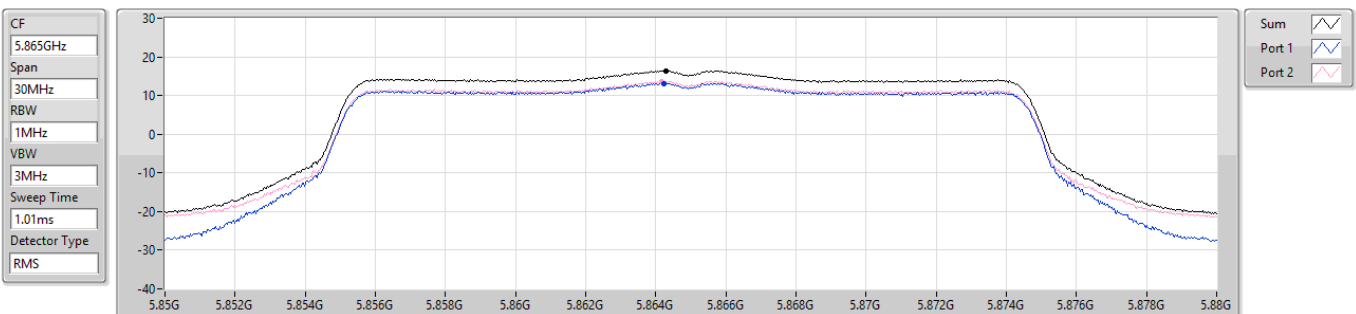


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.40	16.40	13.18	13.71

5.85-5.895GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5885MHz

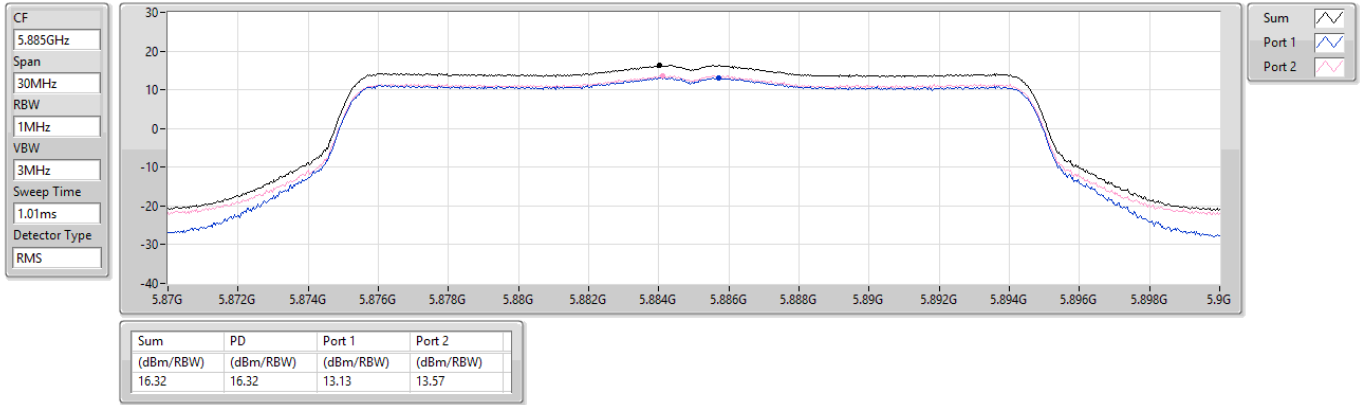

5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5190MHz

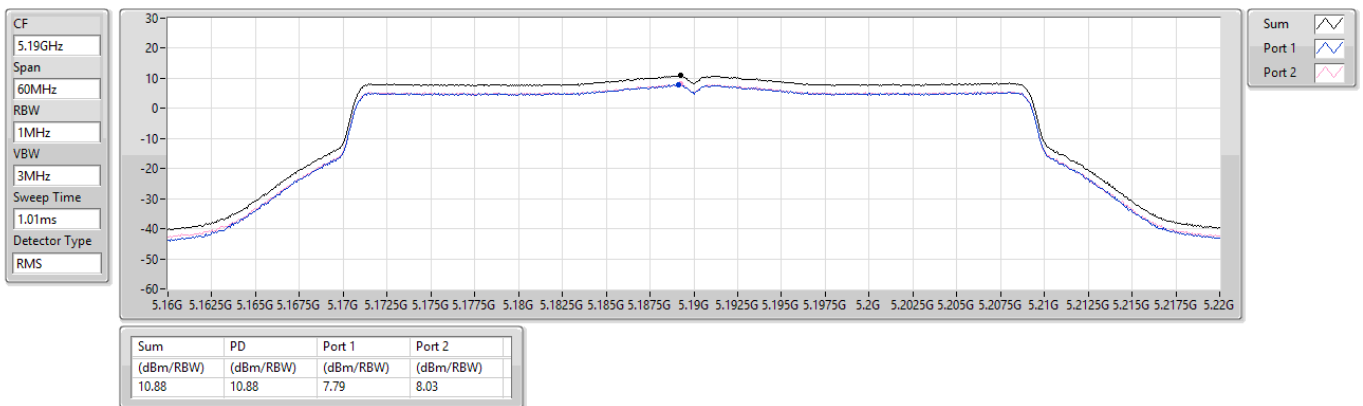




5.15-5.25GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


5230MHz

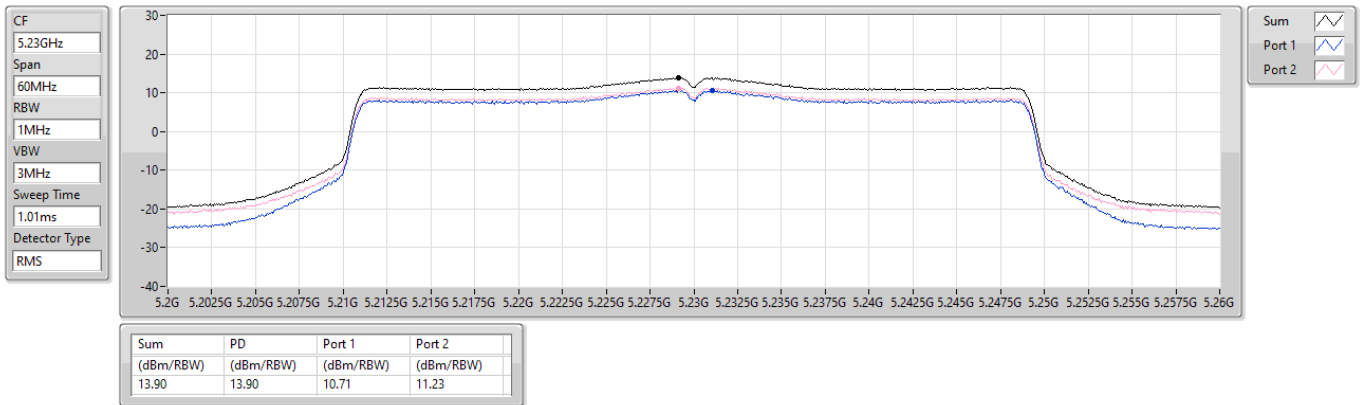

5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5270MHz

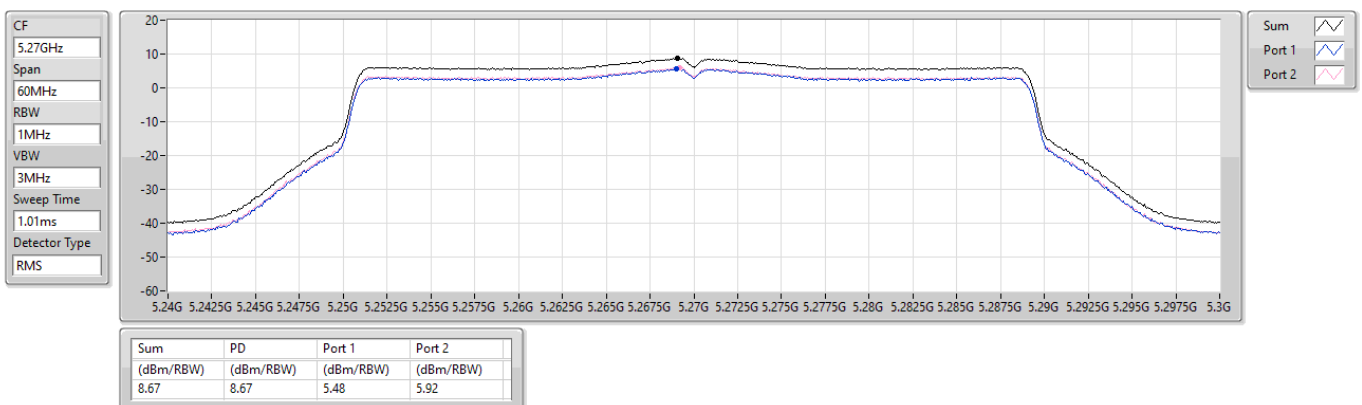




5.25-5.35GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


5310MHz

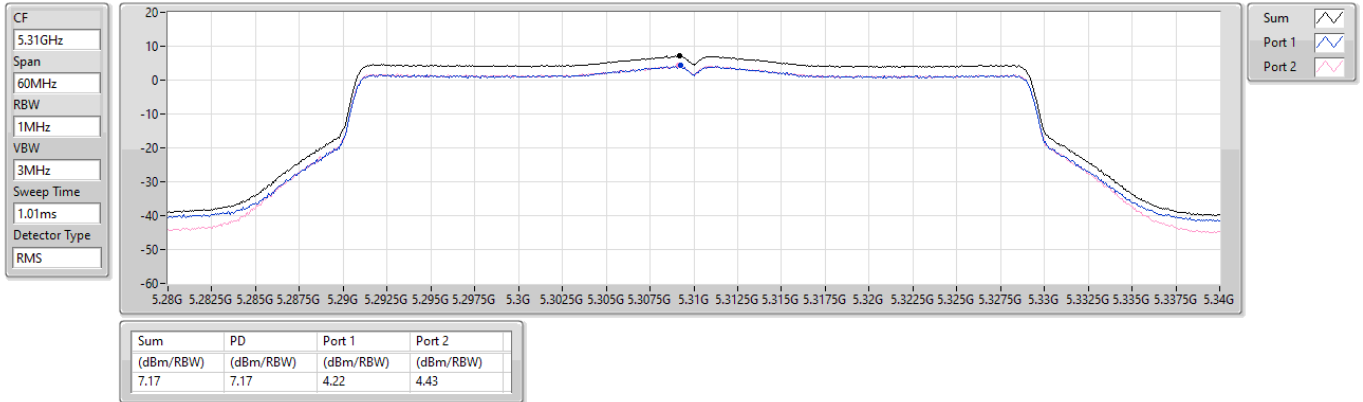

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5510MHz

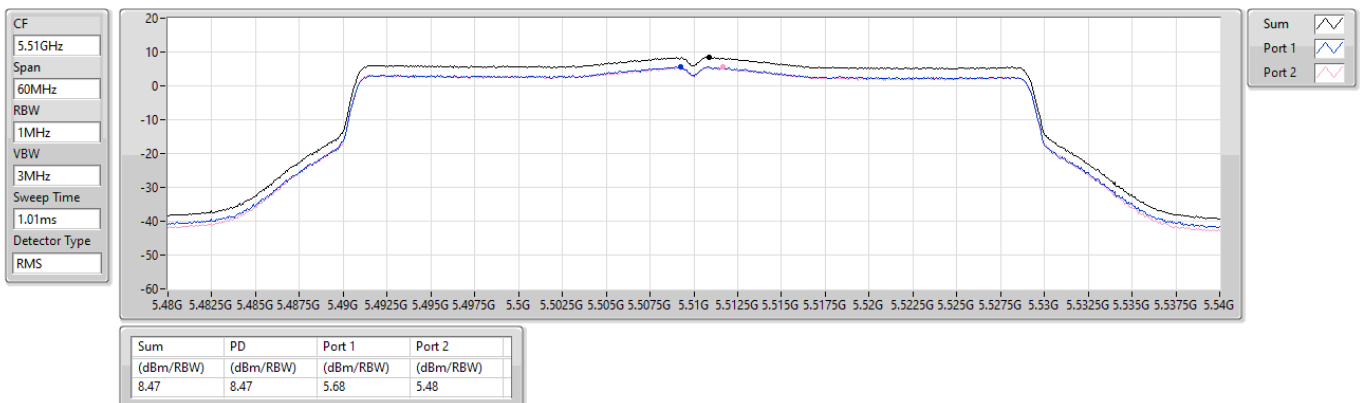




5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5590MHz

CF
5.59GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

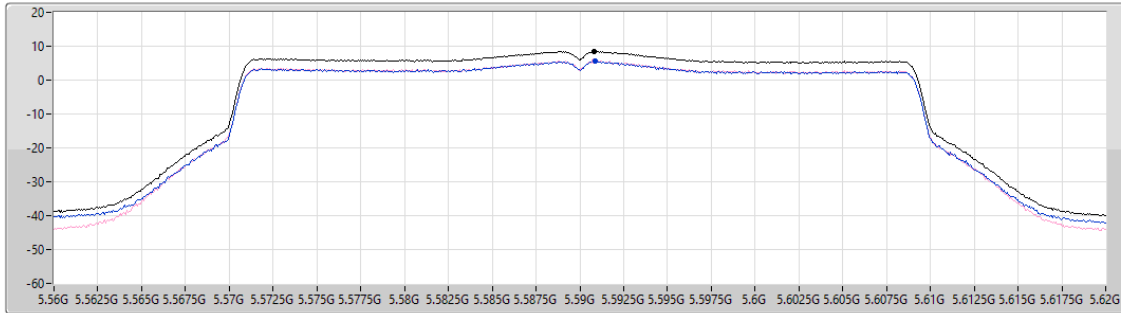

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.51	8.51	5.48	5.77


Sum
Port 1
Port 2

5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5670MHz

CF
5.67GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

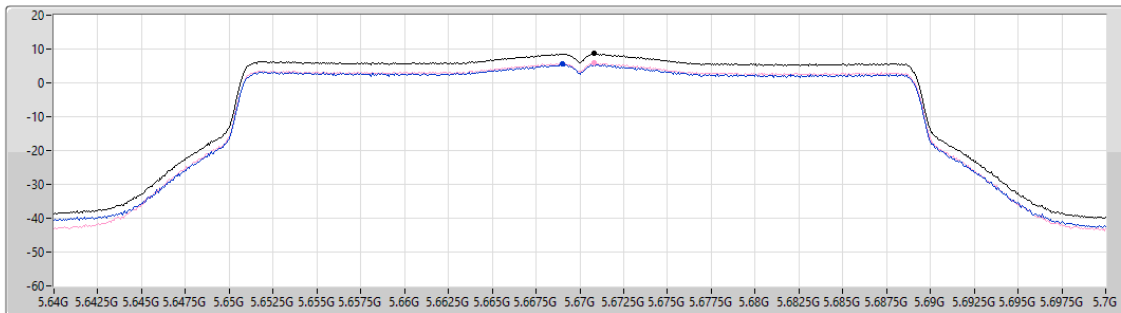

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.65	8.65	5.51	5.81


Sum
Port 1
Port 2



5.47-5.725GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


5710MHz Straddle 5.47-5.725GHz

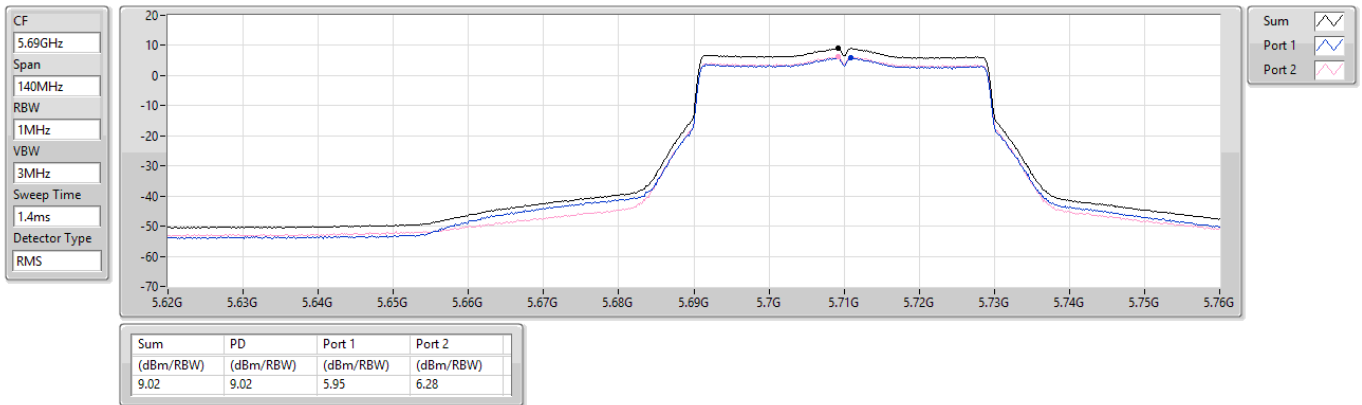

5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

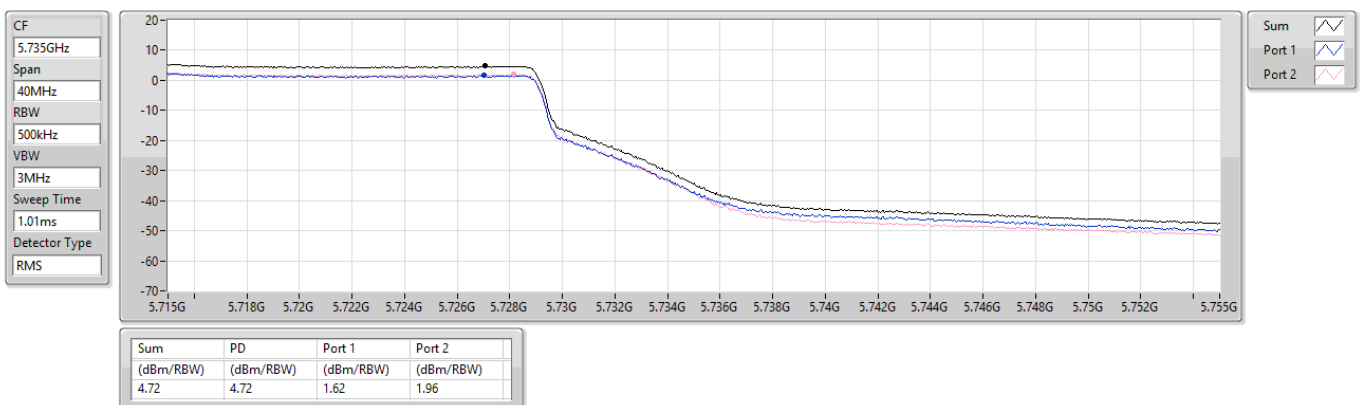




5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5755MHz

CF
5.755GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

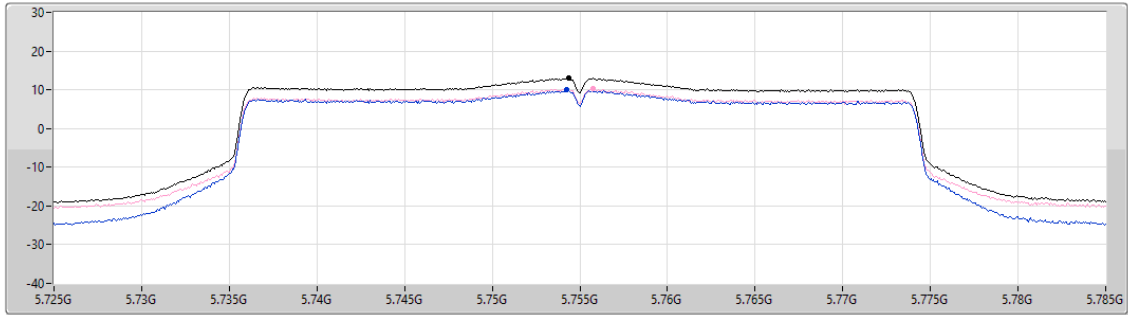

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.01	13.01	9.96	10.29

5.725-5.85GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5795MHz

CF
5.795GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

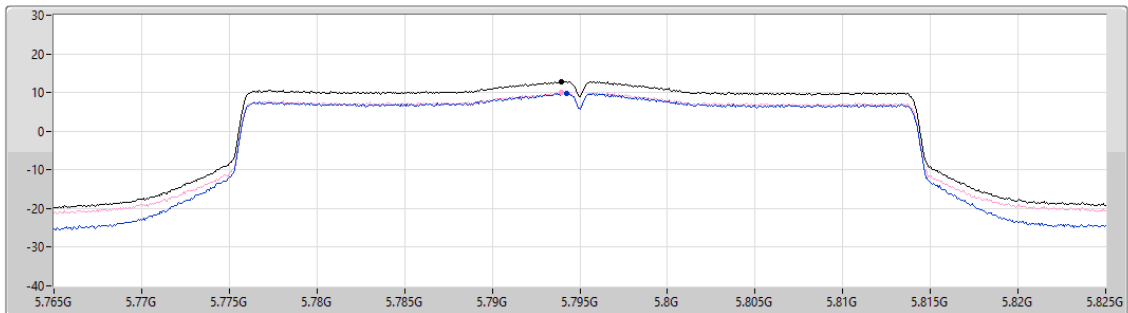

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.84	12.84	9.90	10.03



5.85-5.895GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5835MHz

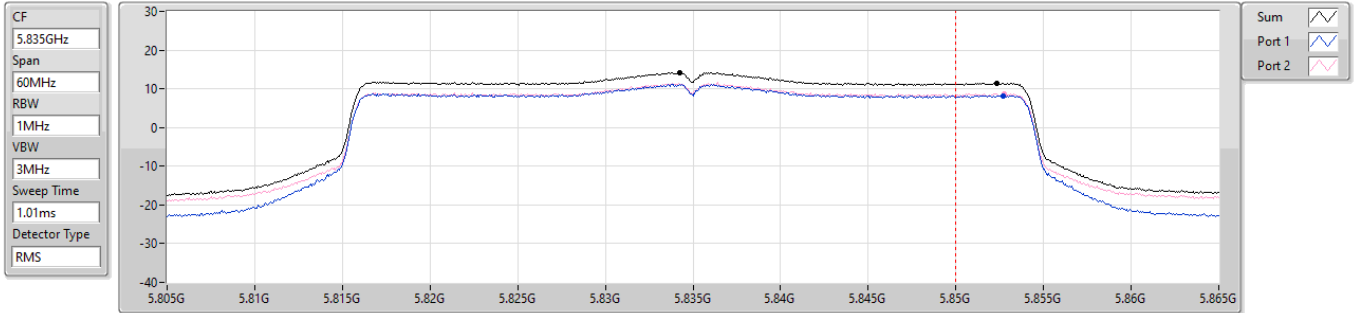

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
14.21	11.20	500k	-3.01


5850-5895MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.38	11.38	8.26	8.66

5.85-5.895GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

5875MHz

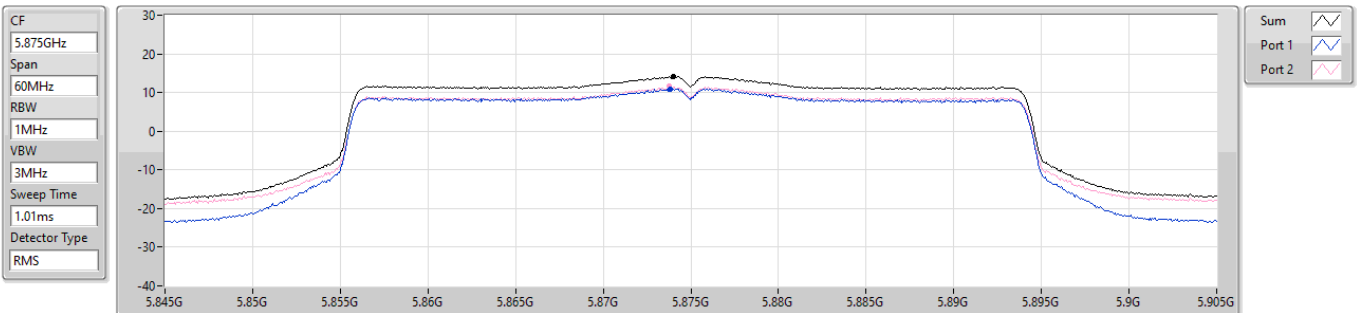

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.17	14.17	10.97	11.61




5.15-5.25GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5210MHz

CF
5.21GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

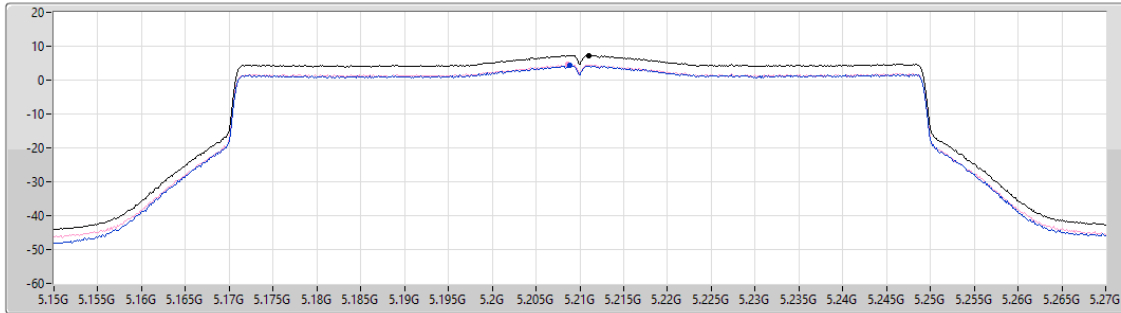

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.30	7.30	4.24	4.57

5.25-5.35GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5290MHz

CF
5.29GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

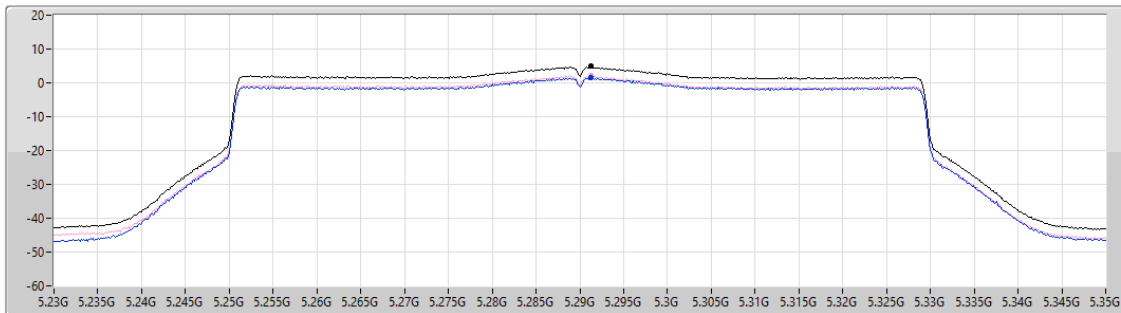

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.87	4.87	1.50	2.20




5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5530MHz

CF
5.53GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

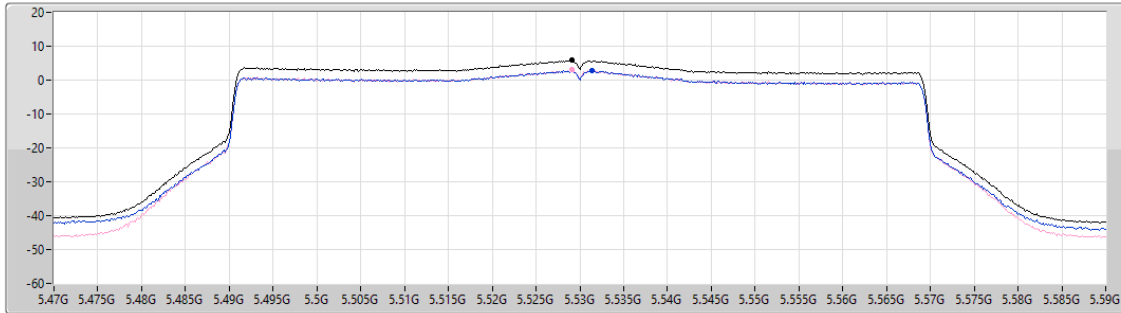

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.83	5.83	2.72	2.97


Sum
Port 1
Port 2

5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5610MHz

CF
5.61GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

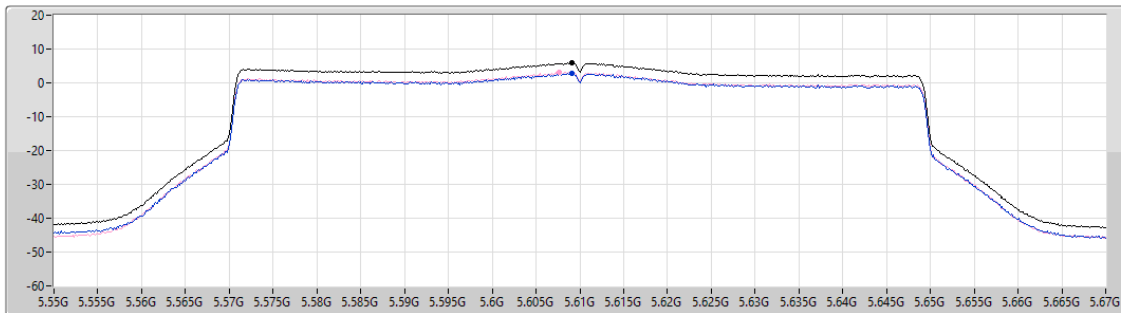

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.91	5.91	2.84	3.05


Sum
Port 1
Port 2



5.47-5.725GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


5690MHz Straddle 5.47-5.725GHz

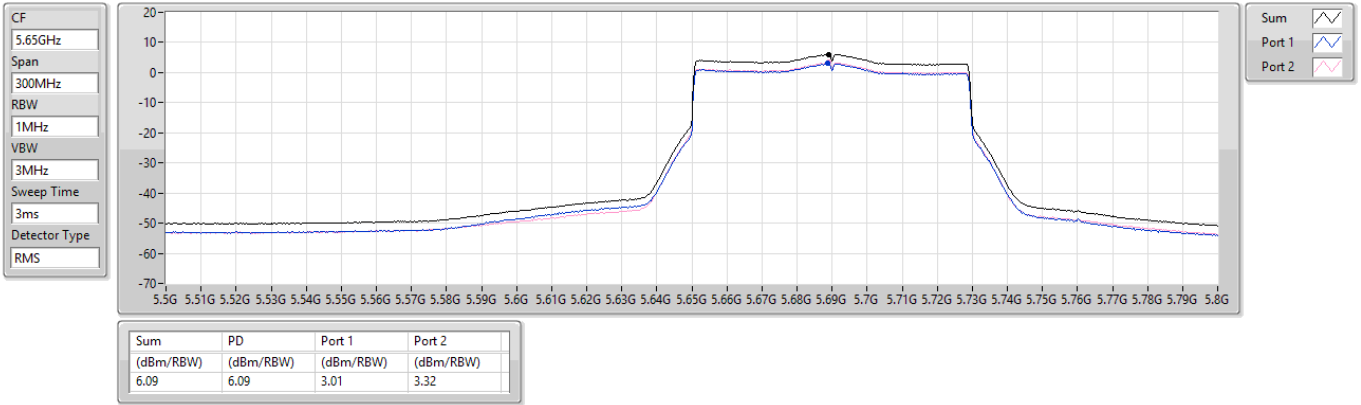

5.725-5.85GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

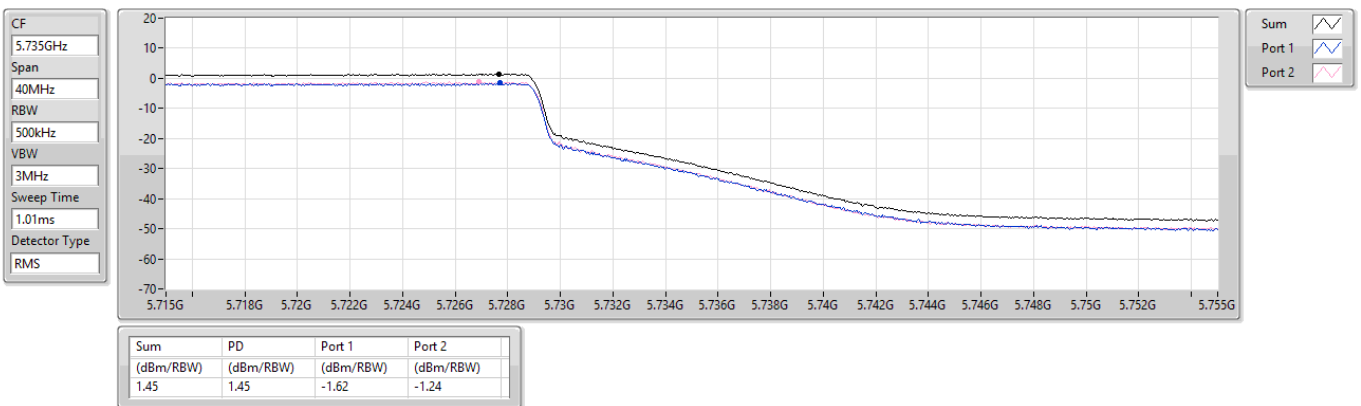


5.725-5.85GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5775MHz

CF
5.775GHz
Span
120MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

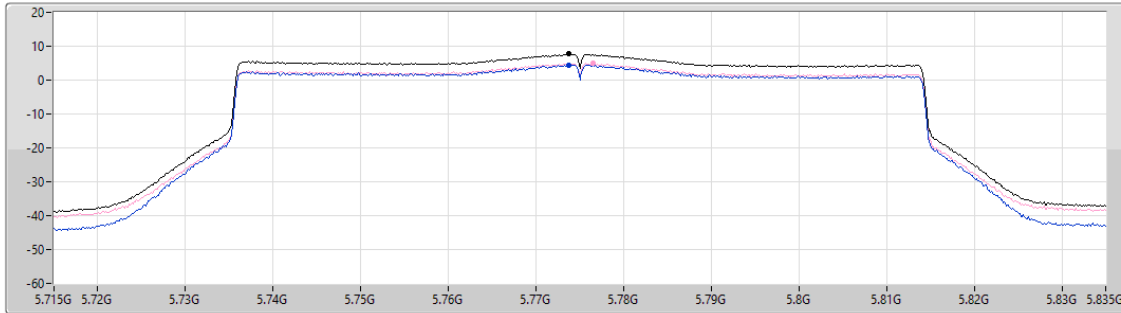

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.67	7.67	4.49	4.92

5.85-5.895GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

5855MHz

CF
5.855GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

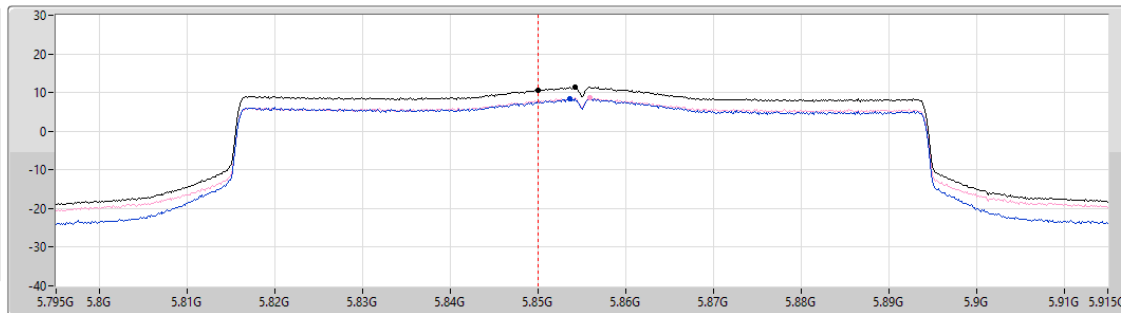

Sum
Port 1
Port 2

5725-5850MHz

Sum	PD	Limit RBW	BWCF
(dBm)	(dBm)	(Hz)	(dB)
10.66	7.65	500k	-3.01

5850-5895MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.54	11.54	8.42	8.71



5.15-5.25GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD


5250MHz Straddle 5.15-5.25GHz

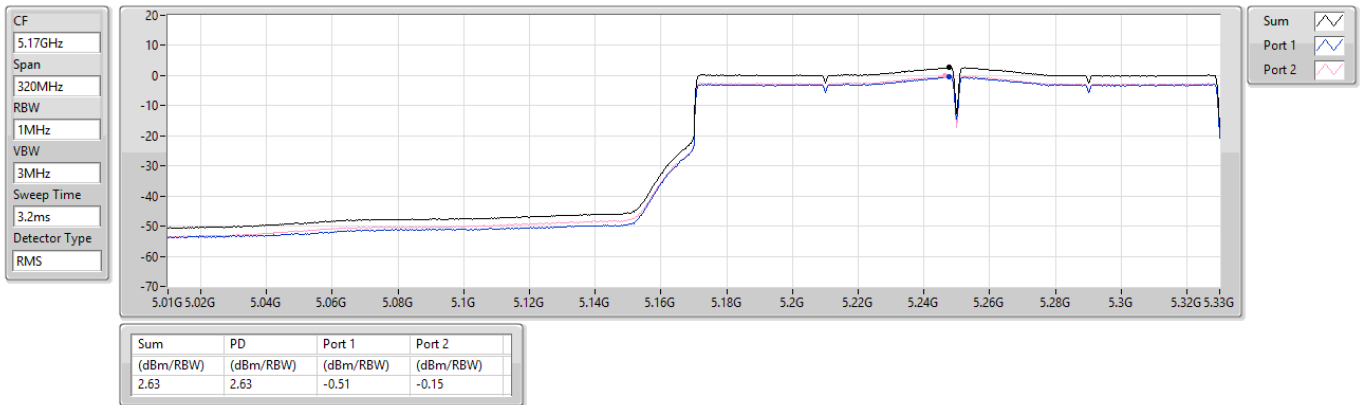

5.25-5.35GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

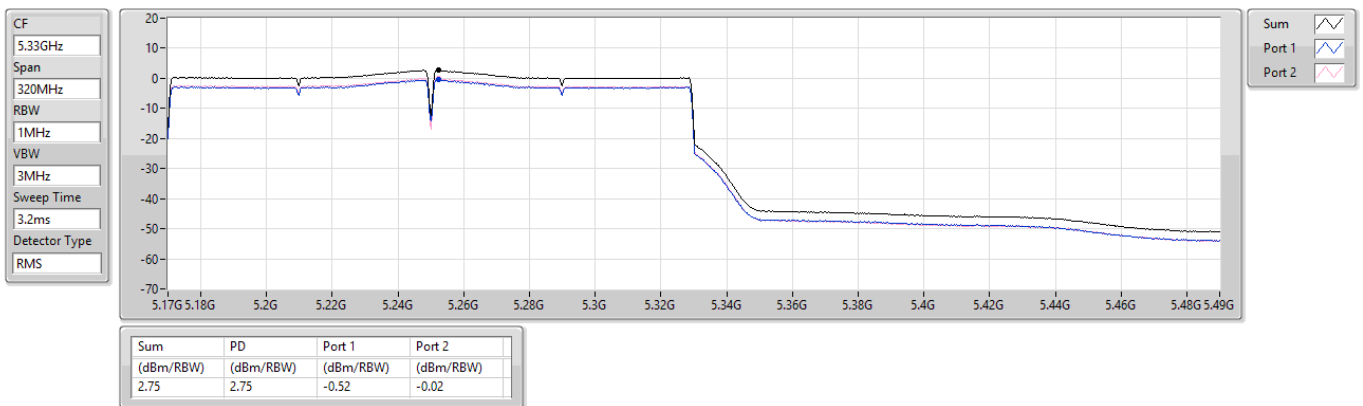




5.47-5.725GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD


5570MHz

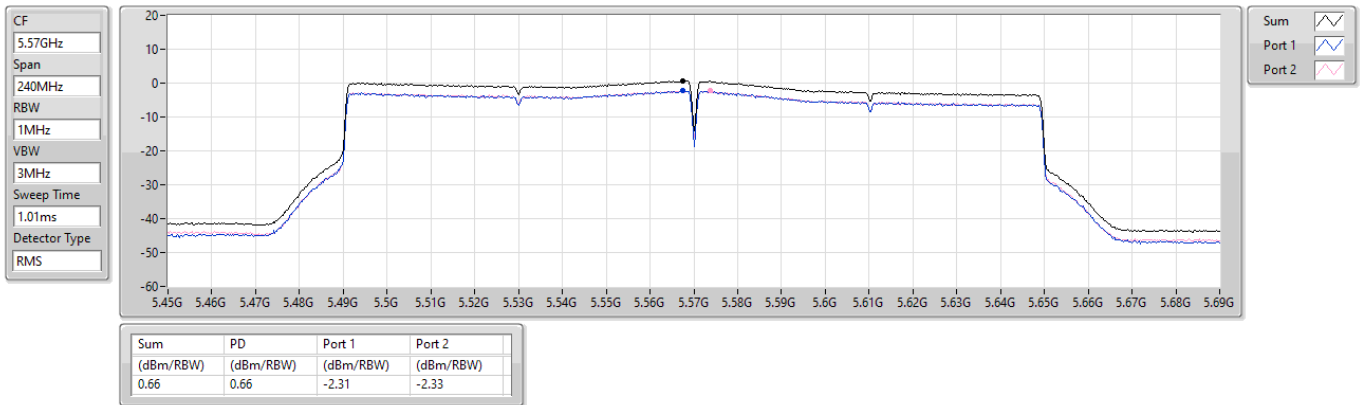

5.85-5.895GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

5815MHz

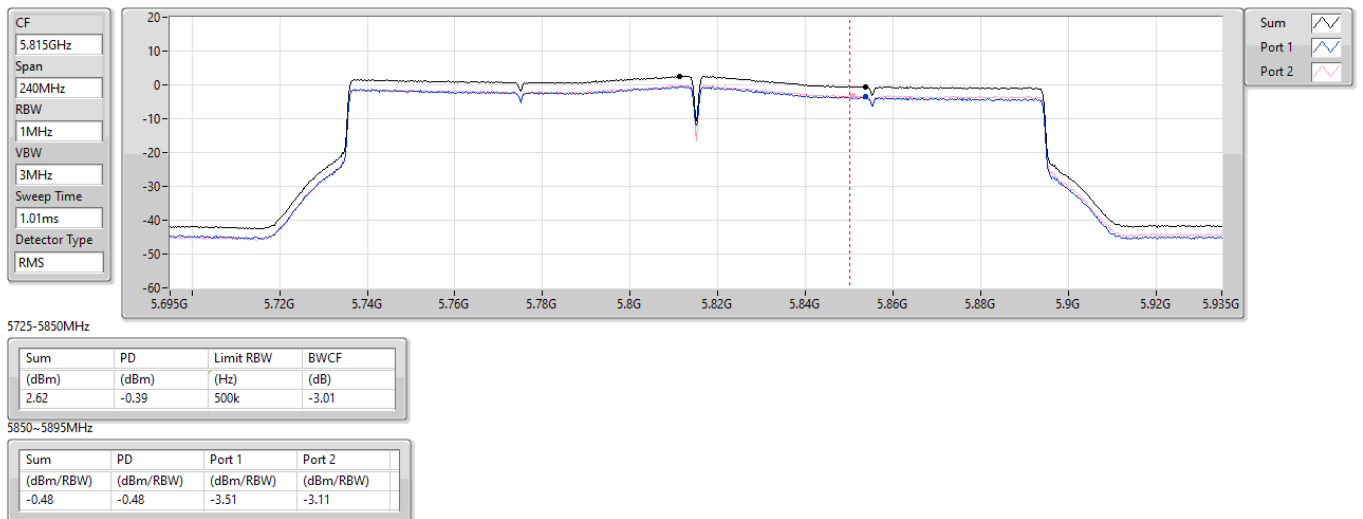




5.47-5.725GHz_be240_240MHz_Nss2,(MCS0)_2TX

PSD


5610MHz Straddle 5.47-5.725GHz

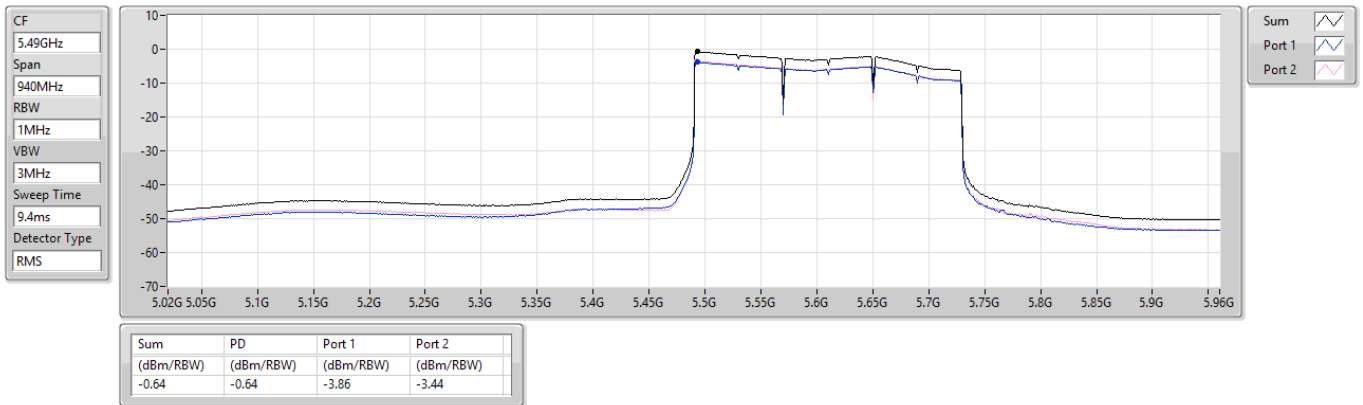

5.725-5.85GHz_be240_240MHz_Nss2,(MCS0)_2TX

PSD

5610MHz Straddle 5.725-5.85GHz

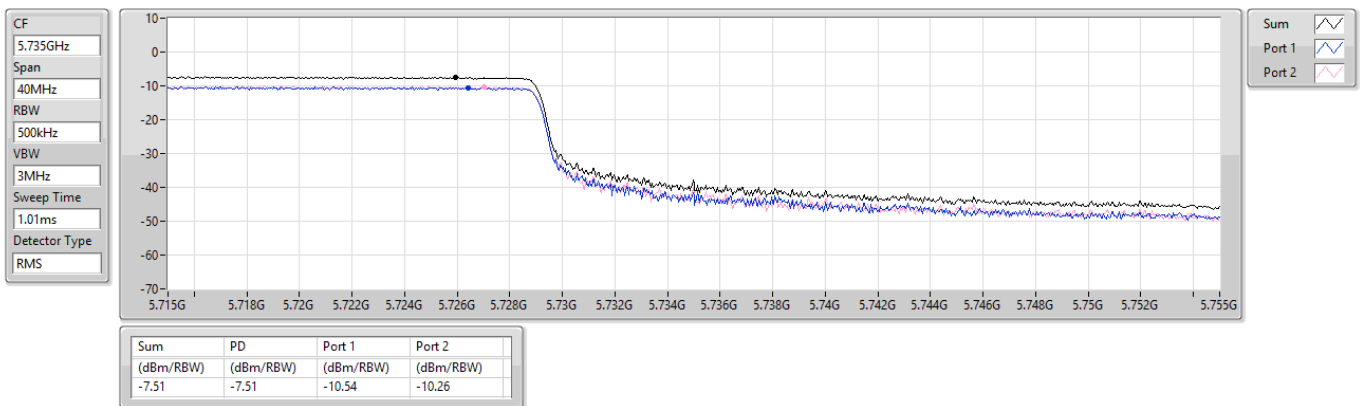



For 2T1S mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By :Sean Yu

Temperature(°C):23

Humidity(%):62

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	50.37	23.82	40.00	-16.18	31.83	-8.01	Peak	---	---
2	93.05	28.41	43.50	-15.09	42.44	-14.03	Peak	---	---
3	101.78	30.27	43.50	-13.23	42.96	-12.69	Peak	---	---
4	155.13	25.19	43.50	-18.31	33.43	-8.24	Peak	---	---
5	197.81	22.90	43.50	-20.60	34.54	-11.64	Peak	---	---
6	327.79	23.58	46.00	-22.42	30.44	-6.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			

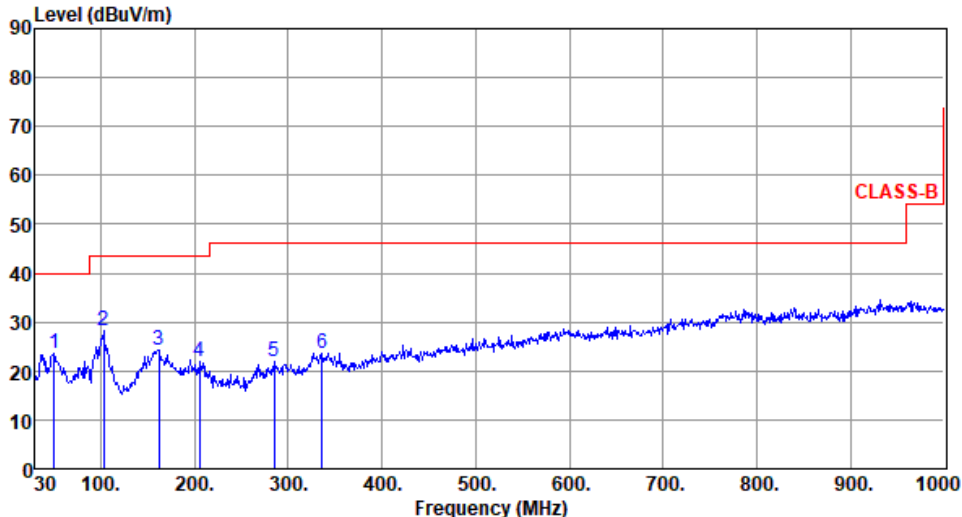

Modulation	be EHT80	Test Freq. (MHz)	5855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>50.37</td><td>23.50</td><td>40.00</td><td>-16.50</td><td>31.51</td><td>-8.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>102.75</td><td>28.30</td><td>43.50</td><td>-15.20</td><td>40.76</td><td>-12.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>161.92</td><td>24.25</td><td>43.50</td><td>-19.25</td><td>32.92</td><td>-8.67</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>205.57</td><td>21.91</td><td>43.50</td><td>-21.59</td><td>33.74</td><td>-11.83</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>285.11</td><td>21.87</td><td>46.00</td><td>-24.13</td><td>30.22</td><td>-8.35</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>336.52</td><td>23.71</td><td>46.00</td><td>-22.29</td><td>30.48</td><td>-6.77</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	50.37	23.50	40.00	-16.50	31.51	-8.01	Peak	---	---	2	102.75	28.30	43.50	-15.20	40.76	-12.46	Peak	---	---	3	161.92	24.25	43.50	-19.25	32.92	-8.67	Peak	---	---	4	205.57	21.91	43.50	-21.59	33.74	-11.83	Peak	---	---	5	285.11	21.87	46.00	-24.13	30.22	-8.35	Peak	---	---	6	336.52	23.71	46.00	-22.29	30.48	-6.77	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	50.37	23.50	40.00	-16.50	31.51	-8.01	Peak	---	---																																																																
2	102.75	28.30	43.50	-15.20	40.76	-12.46	Peak	---	---																																																																
3	161.92	24.25	43.50	-19.25	32.92	-8.67	Peak	---	---																																																																
4	205.57	21.91	43.50	-21.59	33.74	-11.83	Peak	---	---																																																																
5	285.11	21.87	46.00	-24.13	30.22	-8.35	Peak	---	---																																																																
6	336.52	23.71	46.00	-22.29	30.48	-6.77	Peak	---	---																																																																



Modulation	be EHT80	Test Freq. (MHz)	5855																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>46.49</td><td>36.86</td><td>40.00</td><td>-3.14</td><td>44.93</td><td>-8.07</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>61.04</td><td>29.22</td><td>40.00</td><td>-10.78</td><td>38.26</td><td>-9.04</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>103.72</td><td>27.12</td><td>43.50</td><td>-16.38</td><td>39.28</td><td>-12.16</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>154.16</td><td>25.18</td><td>43.50</td><td>-18.32</td><td>33.56</td><td>-8.38</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>270.56</td><td>21.92</td><td>46.00</td><td>-24.08</td><td>30.82</td><td>-8.90</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>337.49</td><td>24.03</td><td>46.00</td><td>-21.97</td><td>30.79</td><td>-6.76</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	46.49	36.86	40.00	-3.14	44.93	-8.07	Peak	---	---	2	61.04	29.22	40.00	-10.78	38.26	-9.04	Peak	---	---	3	103.72	27.12	43.50	-16.38	39.28	-12.16	Peak	---	---	4	154.16	25.18	43.50	-18.32	33.56	-8.38	Peak	---	---	5	270.56	21.92	46.00	-24.08	30.82	-8.90	Peak	---	---	6	337.49	24.03	46.00	-21.97	30.79	-6.76	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	46.49	36.86	40.00	-3.14	44.93	-8.07	Peak	---	---																																																																
2	61.04	29.22	40.00	-10.78	38.26	-9.04	Peak	---	---																																																																
3	103.72	27.12	43.50	-16.38	39.28	-12.16	Peak	---	---																																																																
4	154.16	25.18	43.50	-18.32	33.56	-8.38	Peak	---	---																																																																
5	270.56	21.92	46.00	-24.08	30.82	-8.90	Peak	---	---																																																																
6	337.49	24.03	46.00	-21.97	30.79	-6.76	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	11a	Test Freq. (MHz)	5825																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>37.76</td><td>24.23</td><td>40.00</td><td>-15.77</td><td>33.26</td><td>-9.03</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>94.99</td><td>25.44</td><td>43.50</td><td>-18.06</td><td>39.25</td><td>-13.81</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>102.75</td><td>28.01</td><td>43.50</td><td>-15.49</td><td>40.47</td><td>-12.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>164.83</td><td>24.68</td><td>43.50</td><td>-18.82</td><td>33.43</td><td>-8.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>199.75</td><td>22.48</td><td>43.50</td><td>-21.02</td><td>34.23</td><td>-11.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>334.58</td><td>24.17</td><td>46.00</td><td>-21.83</td><td>30.95</td><td>-6.78</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	37.76	24.23	40.00	-15.77	33.26	-9.03	Peak	---	---	2	94.99	25.44	43.50	-18.06	39.25	-13.81	Peak	---	---	3	102.75	28.01	43.50	-15.49	40.47	-12.46	Peak	---	---	4	164.83	24.68	43.50	-18.82	33.43	-8.75	Peak	---	---	5	199.75	22.48	43.50	-21.02	34.23	-11.75	Peak	---	---	6	334.58	24.17	46.00	-21.83	30.95	-6.78	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	37.76	24.23	40.00	-15.77	33.26	-9.03	Peak	---	---																																																																
2	94.99	25.44	43.50	-18.06	39.25	-13.81	Peak	---	---																																																																
3	102.75	28.01	43.50	-15.49	40.47	-12.46	Peak	---	---																																																																
4	164.83	24.68	43.50	-18.82	33.43	-8.75	Peak	---	---																																																																
5	199.75	22.48	43.50	-21.02	34.23	-11.75	Peak	---	---																																																																
6	334.58	24.17	46.00	-21.83	30.95	-6.78	Peak	---	---																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	11a	Test Freq. (MHz)	5825																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) CLASS-B Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>39.70</td><td>31.44</td><td>40.00</td><td>-8.56</td><td>40.22</td><td>-8.78</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>49.40</td><td>36.88</td><td>40.00</td><td>-3.12</td><td>44.99</td><td>-8.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>62.01</td><td>28.61</td><td>40.00</td><td>-11.39</td><td>37.74</td><td>-9.13</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>102.75</td><td>27.20</td><td>43.50</td><td>-16.30</td><td>39.66</td><td>-12.46</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>157.07</td><td>25.40</td><td>43.50</td><td>-18.10</td><td>33.90</td><td>-8.50</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>278.32</td><td>23.56</td><td>46.00</td><td>-22.44</td><td>32.12</td><td>-8.56</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	39.70	31.44	40.00	-8.56	40.22	-8.78	Peak	---	---	2	49.40	36.88	40.00	-3.12	44.99	-8.11	Peak	---	---	3	62.01	28.61	40.00	-11.39	37.74	-9.13	Peak	---	---	4	102.75	27.20	43.50	-16.30	39.66	-12.46	Peak	---	---	5	157.07	25.40	43.50	-18.10	33.90	-8.50	Peak	---	---	6	278.32	23.56	46.00	-22.44	32.12	-8.56	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	39.70	31.44	40.00	-8.56	40.22	-8.78	Peak	---	---																																																																
2	49.40	36.88	40.00	-3.12	44.99	-8.11	Peak	---	---																																																																
3	62.01	28.61	40.00	-11.39	37.74	-9.13	Peak	---	---																																																																
4	102.75	27.20	43.50	-16.30	39.66	-12.46	Peak	---	---																																																																
5	157.07	25.40	43.50	-18.10	33.90	-8.50	Peak	---	---																																																																
6	278.32	23.56	46.00	-22.44	32.12	-8.56	Peak	---	---																																																																



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5200																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000 10000 14000 18000 22000 26000 30000 34000 40000 Frequency (MHz) UN1 1~2-PK UN1 1~2-AV 1 2 3 9 10 11 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4160.00</td><td>29.76</td><td>54.00</td><td>-24.24</td><td>30.89</td><td>-1.13</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>2</td><td>4160.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>44.12</td><td>-1.13</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>3</td><td>5150.00</td><td>44.84</td><td>54.00</td><td>-9.16</td><td>44.19</td><td>0.65</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>4</td><td>5150.00</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>56.68</td><td>0.65</td><td>Peak</td><td>100</td><td>140</td></tr><tr><td>5 *</td><td>5200.00</td><td>108.55</td><td></td><td></td><td>107.99</td><td>0.56</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>6 *</td><td>5200.00</td><td>118.52</td><td></td><td></td><td>117.96</td><td>0.56</td><td>Peak</td><td>100</td><td>140</td></tr><tr><td>7</td><td>5350.00</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>43.56</td><td>0.14</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>8</td><td>5350.00</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>56.42</td><td>0.14</td><td>Peak</td><td>100</td><td>140</td></tr><tr><td>9</td><td>10400.00</td><td>55.44</td><td>68.20</td><td>-12.76</td><td>46.98</td><td>8.46</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>10</td><td>15600.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>38.20</td><td>4.67</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>11</td><td>15600.00</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>51.26</td><td>4.67</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4160.00	29.76	54.00	-24.24	30.89	-1.13	Average	100	26	2	4160.00	42.99	74.00	-31.01	44.12	-1.13	Peak	100	26	3	5150.00	44.84	54.00	-9.16	44.19	0.65	Average	100	140	4	5150.00	57.33	74.00	-16.67	56.68	0.65	Peak	100	140	5 *	5200.00	108.55			107.99	0.56	Average	100	140	6 *	5200.00	118.52			117.96	0.56	Peak	100	140	7	5350.00	43.70	54.00	-10.30	43.56	0.14	Average	100	140	8	5350.00	56.56	74.00	-17.44	56.42	0.14	Peak	100	140	9	10400.00	55.44	68.20	-12.76	46.98	8.46	Peak	100	21	10	15600.00	42.87	54.00	-11.13	38.20	4.67	Average	100	35	11	15600.00	55.93	74.00	-18.07	51.26	4.67	Peak	100	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4160.00	29.76	54.00	-24.24	30.89	-1.13	Average	100	26																																																																																																																		
2	4160.00	42.99	74.00	-31.01	44.12	-1.13	Peak	100	26																																																																																																																		
3	5150.00	44.84	54.00	-9.16	44.19	0.65	Average	100	140																																																																																																																		
4	5150.00	57.33	74.00	-16.67	56.68	0.65	Peak	100	140																																																																																																																		
5 *	5200.00	108.55			107.99	0.56	Average	100	140																																																																																																																		
6 *	5200.00	118.52			117.96	0.56	Peak	100	140																																																																																																																		
7	5350.00	43.70	54.00	-10.30	43.56	0.14	Average	100	140																																																																																																																		
8	5350.00	56.56	74.00	-17.44	56.42	0.14	Peak	100	140																																																																																																																		
9	10400.00	55.44	68.20	-12.76	46.98	8.46	Peak	100	21																																																																																																																		
10	15600.00	42.87	54.00	-11.13	38.20	4.67	Average	100	35																																																																																																																		
11	15600.00	55.93	74.00	-18.07	51.26	4.67	Peak	100	35																																																																																																																		



Modulation	11a	Test Freq. (MHz)	5200																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4160.00</td><td>29.72</td><td>54.00</td><td>-24.28</td><td>30.85</td><td>-1.13</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>2</td><td>4160.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>44.21</td><td>-1.13</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>3</td><td>5150.00</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>45.12</td><td>0.65</td><td>Average</td><td>149</td><td>7</td></tr><tr><td>4</td><td>5150.00</td><td>59.17</td><td>74.00</td><td>-14.83</td><td>58.52</td><td>0.65</td><td>Peak</td><td>149</td><td>7</td></tr><tr><td>5 *</td><td>5200.00</td><td>110.95</td><td></td><td></td><td>110.39</td><td>0.56</td><td>Average</td><td>149</td><td>7</td></tr><tr><td>6 *</td><td>5200.00</td><td>120.77</td><td></td><td></td><td>120.21</td><td>0.56</td><td>Peak</td><td>149</td><td>7</td></tr><tr><td>7</td><td>5350.00</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>43.45</td><td>0.14</td><td>Average</td><td>149</td><td>7</td></tr><tr><td>8</td><td>5350.00</td><td>56.30</td><td>74.00</td><td>-17.70</td><td>56.16</td><td>0.14</td><td>Peak</td><td>149</td><td>7</td></tr><tr><td>9</td><td>10400.00</td><td>55.04</td><td>68.20</td><td>-13.16</td><td>46.58</td><td>8.46</td><td>Peak</td><td>100</td><td>18</td></tr><tr><td>10</td><td>15600.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>37.96</td><td>4.67</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>11</td><td>15600.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>50.66</td><td>4.67</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4160.00	29.72	54.00	-24.28	30.85	-1.13	Average	100	16	2	4160.00	43.08	74.00	-30.92	44.21	-1.13	Peak	100	16	3	5150.00	45.77	54.00	-8.23	45.12	0.65	Average	149	7	4	5150.00	59.17	74.00	-14.83	58.52	0.65	Peak	149	7	5 *	5200.00	110.95			110.39	0.56	Average	149	7	6 *	5200.00	120.77			120.21	0.56	Peak	149	7	7	5350.00	43.59	54.00	-10.41	43.45	0.14	Average	149	7	8	5350.00	56.30	74.00	-17.70	56.16	0.14	Peak	149	7	9	10400.00	55.04	68.20	-13.16	46.58	8.46	Peak	100	18	10	15600.00	42.63	54.00	-11.37	37.96	4.67	Average	100	22	11	15600.00	55.33	74.00	-18.67	50.66	4.67	Peak	100	22
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4160.00	29.72	54.00	-24.28	30.85	-1.13	Average	100	16																																																																																																																		
2	4160.00	43.08	74.00	-30.92	44.21	-1.13	Peak	100	16																																																																																																																		
3	5150.00	45.77	54.00	-8.23	45.12	0.65	Average	149	7																																																																																																																		
4	5150.00	59.17	74.00	-14.83	58.52	0.65	Peak	149	7																																																																																																																		
5 *	5200.00	110.95			110.39	0.56	Average	149	7																																																																																																																		
6 *	5200.00	120.77			120.21	0.56	Peak	149	7																																																																																																																		
7	5350.00	43.59	54.00	-10.41	43.45	0.14	Average	149	7																																																																																																																		
8	5350.00	56.30	74.00	-17.70	56.16	0.14	Peak	149	7																																																																																																																		
9	10400.00	55.04	68.20	-13.16	46.58	8.46	Peak	100	18																																																																																																																		
10	15600.00	42.63	54.00	-11.37	37.96	4.67	Average	100	22																																																																																																																		
11	15600.00	55.33	74.00	-18.67	50.66	4.67	Peak	100	22																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	11a	Test Freq. (MHz)	5240																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>5240.00</td><td>108.69</td><td></td><td></td><td>108.35</td><td>0.34</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>2</td><td>*</td><td>5240.00</td><td>118.64</td><td></td><td></td><td>118.30</td><td>0.34</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>43.60</td><td>0.14</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>56.61</td><td>74.00</td><td>-17.39</td><td>56.47</td><td>0.14</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>5</td><td></td><td>10480.00</td><td>55.63</td><td>68.20</td><td>-12.57</td><td>47.13</td><td>8.50</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>6</td><td></td><td>15720.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>38.00</td><td>4.95</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>7</td><td></td><td>15720.00</td><td>56.04</td><td>74.00</td><td>-17.96</td><td>51.09</td><td>4.95</td><td>Peak</td><td>100</td><td>36</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level			reading			High	Table				dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	5240.00	108.69			108.35	0.34	Average	100	145	2	*	5240.00	118.64			118.30	0.34	Peak	100	145	3		5350.00	43.74	54.00	-10.26	43.60	0.14	Average	100	145	4		5350.00	56.61	74.00	-17.39	56.47	0.14	Peak	100	145	5		10480.00	55.63	68.20	-12.57	47.13	8.50	Peak	100	29	6		15720.00	42.95	54.00	-11.05	38.00	4.95	Average	100	36	7		15720.00	56.04	74.00	-17.96	51.09	4.95	Peak	100	36
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																							
		MHz	level			reading			High	Table																																																																																																							
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																							
1	*	5240.00	108.69			108.35	0.34	Average	100	145																																																																																																							
2	*	5240.00	118.64			118.30	0.34	Peak	100	145																																																																																																							
3		5350.00	43.74	54.00	-10.26	43.60	0.14	Average	100	145																																																																																																							
4		5350.00	56.61	74.00	-17.39	56.47	0.14	Peak	100	145																																																																																																							
5		10480.00	55.63	68.20	-12.57	47.13	8.50	Peak	100	29																																																																																																							
6		15720.00	42.95	54.00	-11.05	38.00	4.95	Average	100	36																																																																																																							
7		15720.00	56.04	74.00	-17.96	51.09	4.95	Peak	100	36																																																																																																							



Modulation	11a	Test Freq. (MHz)	5240																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000. 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5240.00</td><td>111.05</td><td></td><td></td><td>110.71</td><td>0.34</td><td>Average</td><td>146</td><td>9</td></tr><tr><td>2 *</td><td>5240.00</td><td>120.84</td><td></td><td></td><td>120.50</td><td>0.34</td><td>Peak</td><td>146</td><td>9</td></tr><tr><td>3</td><td>5350.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>43.51</td><td>0.14</td><td>Average</td><td>146</td><td>9</td></tr><tr><td>4</td><td>5350.00</td><td>56.42</td><td>74.00</td><td>-17.58</td><td>56.28</td><td>0.14</td><td>Peak</td><td>146</td><td>9</td></tr><tr><td>5</td><td>10480.00</td><td>55.16</td><td>68.20</td><td>-13.04</td><td>46.66</td><td>8.50</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>6</td><td>15720.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>37.80</td><td>4.95</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>7</td><td>15720.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>50.53</td><td>4.95</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	5240.00	111.05			110.71	0.34	Average	146	9	2 *	5240.00	120.84			120.50	0.34	Peak	146	9	3	5350.00	43.65	54.00	-10.35	43.51	0.14	Average	146	9	4	5350.00	56.42	74.00	-17.58	56.28	0.14	Peak	146	9	5	10480.00	55.16	68.20	-13.04	46.66	8.50	Peak	100	21	6	15720.00	42.75	54.00	-11.25	37.80	4.95	Average	100	34	7	15720.00	55.48	74.00	-18.52	50.53	4.95	Peak	100	34
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level			reading			High	Table																																																																																														
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																														
1 *	5240.00	111.05			110.71	0.34	Average	146	9																																																																																														
2 *	5240.00	120.84			120.50	0.34	Peak	146	9																																																																																														
3	5350.00	43.65	54.00	-10.35	43.51	0.14	Average	146	9																																																																																														
4	5350.00	56.42	74.00	-17.58	56.28	0.14	Peak	146	9																																																																																														
5	10480.00	55.16	68.20	-13.04	46.66	8.50	Peak	100	21																																																																																														
6	15720.00	42.75	54.00	-11.25	37.80	4.95	Average	100	34																																																																																														
7	15720.00	55.48	74.00	-18.52	50.53	4.95	Peak	100	34																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	11a	Test Freq. (MHz)	5260																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>5260.00</td><td>102.54</td><td></td><td></td><td>102.27</td><td>0.27</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2 *</td><td>5260.00</td><td>112.46</td><td></td><td></td><td>112.19</td><td>0.27</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>5350.00</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>42.95</td><td>0.14</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>4</td><td>5350.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>56.67</td><td>0.14</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>5</td><td>10520.00</td><td>53.84</td><td>68.20</td><td>-14.36</td><td>45.46</td><td>8.38</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>6</td><td>15780.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>36.48</td><td>4.74</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>7</td><td>15780.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>49.10</td><td>4.74</td><td>Peak</td><td>100</td><td>34</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5260.00	102.54			102.27	0.27	Average	100	136	2 *	5260.00	112.46			112.19	0.27	Peak	100	136	3	5350.00	43.09	54.00	-10.91	42.95	0.14	Average	100	136	4	5350.00	56.81	74.00	-17.19	56.67	0.14	Peak	100	136	5	10520.00	53.84	68.20	-14.36	45.46	8.38	Peak	100	23	6	15780.00	41.22	54.00	-12.78	36.48	4.74	Average	100	34	7	15780.00	53.84	74.00	-20.16	49.10	4.74	Peak	100	34
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1 *	5260.00	102.54			102.27	0.27	Average	100	136																																																																																														
2 *	5260.00	112.46			112.19	0.27	Peak	100	136																																																																																														
3	5350.00	43.09	54.00	-10.91	42.95	0.14	Average	100	136																																																																																														
4	5350.00	56.81	74.00	-17.19	56.67	0.14	Peak	100	136																																																																																														
5	10520.00	53.84	68.20	-14.36	45.46	8.38	Peak	100	23																																																																																														
6	15780.00	41.22	54.00	-12.78	36.48	4.74	Average	100	34																																																																																														
7	15780.00	53.84	74.00	-20.16	49.10	4.74	Peak	100	34																																																																																														




Modulation	11a	Test Freq. (MHz)	5260																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5260.00</td><td>105.02</td><td></td><td></td><td>104.75</td><td>0.27</td><td>Average</td><td>138</td><td>12</td></tr><tr><td>2 *</td><td>5260.00</td><td>115.08</td><td></td><td></td><td>114.81</td><td>0.27</td><td>Peak</td><td>138</td><td>12</td></tr><tr><td>3</td><td>5350.00</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>44.07</td><td>0.14</td><td>Average</td><td>138</td><td>12</td></tr><tr><td>4</td><td>5350.00</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>56.90</td><td>0.14</td><td>Peak</td><td>138</td><td>12</td></tr><tr><td>5</td><td>10520.00</td><td>54.44</td><td>68.20</td><td>-13.76</td><td>46.06</td><td>8.38</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>6</td><td>15780.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>37.10</td><td>4.74</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>7</td><td>15780.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>49.88</td><td>4.74</td><td>Peak</td><td>100</td><td>16</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5260.00	105.02			104.75	0.27	Average	138	12	2 *	5260.00	115.08			114.81	0.27	Peak	138	12	3	5350.00	44.21	54.00	-9.79	44.07	0.14	Average	138	12	4	5350.00	57.04	74.00	-16.96	56.90	0.14	Peak	138	12	5	10520.00	54.44	68.20	-13.76	46.06	8.38	Peak	100	28	6	15780.00	41.84	54.00	-12.16	37.10	4.74	Average	100	16	7	15780.00	54.62	74.00	-19.38	49.88	4.74	Peak	100	16
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1 *	5260.00	105.02			104.75	0.27	Average	138	12																																																																																														
2 *	5260.00	115.08			114.81	0.27	Peak	138	12																																																																																														
3	5350.00	44.21	54.00	-9.79	44.07	0.14	Average	138	12																																																																																														
4	5350.00	57.04	74.00	-16.96	56.90	0.14	Peak	138	12																																																																																														
5	10520.00	54.44	68.20	-13.76	46.06	8.38	Peak	100	28																																																																																														
6	15780.00	41.84	54.00	-12.16	37.10	4.74	Average	100	16																																																																																														
7	15780.00	54.62	74.00	-19.38	49.88	4.74	Peak	100	16																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	11a	Test Freq. (MHz)	5300																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) UNII 1-2-PK UNII 1-2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4240.00</td><td>29.32</td><td>54.00</td><td>-24.68</td><td>30.55</td><td>-1.23</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>4240.00</td><td>43.41</td><td>74.00</td><td>-30.59</td><td>44.64</td><td>-1.23</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>5150.00</td><td>43.31</td><td>54.00</td><td>-10.69</td><td>42.66</td><td>0.65</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>5150.00</td><td>58.01</td><td>74.00</td><td>-15.99</td><td>57.36</td><td>0.65</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5 *</td><td>5300.00</td><td>102.99</td><td></td><td></td><td>102.78</td><td>0.21</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>6 *</td><td>5300.00</td><td>112.85</td><td></td><td></td><td>112.64</td><td>0.21</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>7</td><td>5350.00</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>42.99</td><td>0.14</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>8</td><td>5350.00</td><td>56.84</td><td>74.00</td><td>-17.16</td><td>56.70</td><td>0.14</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>9</td><td>10600.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>32.61</td><td>8.33</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>10</td><td>10600.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>45.43</td><td>8.33</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>11</td><td>15900.00</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>36.43</td><td>4.72</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>12</td><td>15900.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>48.95</td><td>4.72</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4240.00	29.32	54.00	-24.68	30.55	-1.23	Average	100	29	2	4240.00	43.41	74.00	-30.59	44.64	-1.23	Peak	100	29	3	5150.00	43.31	54.00	-10.69	42.66	0.65	Average	100	138	4	5150.00	58.01	74.00	-15.99	57.36	0.65	Peak	100	138	5 *	5300.00	102.99			102.78	0.21	Average	100	138	6 *	5300.00	112.85			112.64	0.21	Peak	100	138	7	5350.00	43.13	54.00	-10.87	42.99	0.14	Average	100	138	8	5350.00	56.84	74.00	-17.16	56.70	0.14	Peak	100	138	9	10600.00	40.94	54.00	-13.06	32.61	8.33	Average	100	19	10	10600.00	53.76	74.00	-20.24	45.43	8.33	Peak	100	19	11	15900.00	41.15	54.00	-12.85	36.43	4.72	Average	100	22	12	15900.00	53.67	74.00	-20.33	48.95	4.72	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4240.00	29.32	54.00	-24.68	30.55	-1.23	Average	100	29																																																																																																																												
2	4240.00	43.41	74.00	-30.59	44.64	-1.23	Peak	100	29																																																																																																																												
3	5150.00	43.31	54.00	-10.69	42.66	0.65	Average	100	138																																																																																																																												
4	5150.00	58.01	74.00	-15.99	57.36	0.65	Peak	100	138																																																																																																																												
5 *	5300.00	102.99			102.78	0.21	Average	100	138																																																																																																																												
6 *	5300.00	112.85			112.64	0.21	Peak	100	138																																																																																																																												
7	5350.00	43.13	54.00	-10.87	42.99	0.14	Average	100	138																																																																																																																												
8	5350.00	56.84	74.00	-17.16	56.70	0.14	Peak	100	138																																																																																																																												
9	10600.00	40.94	54.00	-13.06	32.61	8.33	Average	100	19																																																																																																																												
10	10600.00	53.76	74.00	-20.24	45.43	8.33	Peak	100	19																																																																																																																												
11	15900.00	41.15	54.00	-12.85	36.43	4.72	Average	100	22																																																																																																																												
12	15900.00	53.67	74.00	-20.33	48.95	4.72	Peak	100	22																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																					

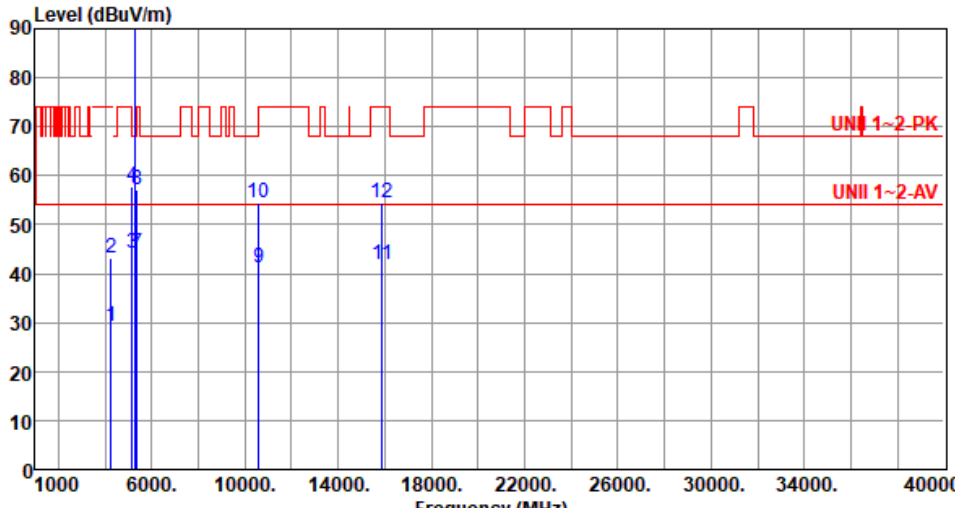

Modulation	11a	Test Freq. (MHz)	5300						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4240.00	29.22	54.00	-24.78	30.45	-1.23	Average	100	28
2	4240.00	43.28	74.00	-30.72	44.51	-1.23	Peak	100	28
3	5150.00	44.17	54.00	-9.83	43.52	0.65	Average	139	9
4	5150.00	57.81	74.00	-16.19	57.16	0.65	Peak	139	9
5 *	5300.00	105.46			105.25	0.21	Average	139	9
6 *	5300.00	115.50			115.29	0.21	Peak	139	9
7	5350.00	44.24	54.00	-9.76	44.10	0.14	Average	139	9
8	5350.00	57.06	74.00	-16.94	56.92	0.14	Peak	139	9
9	10600.00	41.08	54.00	-12.92	32.75	8.33	Average	100	26
10	10600.00	54.35	74.00	-19.65	46.02	8.33	Peak	100	26
11	15900.00	41.77	54.00	-12.23	37.05	4.72	Average	100	18
12	15900.00	54.53	74.00	-19.47	49.81	4.72	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5320							
Polarization	Vertical									
Test By :Brad Wu Temperature(°C):21 Humidity(%):63										
Level (dBuV/m) Frequency (MHz)										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level			reading			High	Table	
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	*	5320.00	105.21		105.02	0.19	Average	128	10	
2	*	5320.00	115.48		115.29	0.19	Peak	128	10	
3		5350.00	44.39	54.00	-9.61	44.25	0.14	Average	128	10
4		5350.00	57.15	74.00	-16.85	57.01	0.14	Peak	128	10
5		10640.00	41.18	54.00	-12.82	32.79	8.39	Average	100	29
6		10640.00	54.46	74.00	-19.54	46.07	8.39	Peak	100	29
7		15960.00	41.82	54.00	-12.18	37.19	4.63	Average	100	33
8		15960.00	54.69	74.00	-19.31	50.06	4.63	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.08	54.00	-9.92	43.58	0.50	Average	211	335
2	5460.00	56.72	74.00	-17.28	56.22	0.50	Peak	211	335
3	5470.00	56.94	68.20	-11.26	56.42	0.52	Peak	211	335
4 *	5500.00	102.90			102.31	0.59	Average	211	335
5 *	5500.00	112.17			111.58	0.59	Peak	211	335
6	11000.00	41.04	54.00	-12.96	32.34	8.70	Average	100	60
7	11000.00	53.85	74.00	-20.15	45.15	8.70	Peak	100	60
8	16500.00	56.61	68.20	-11.59	50.35	6.26	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5500																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.26</td><td>54.00</td><td>-9.74</td><td>43.76</td><td>0.50</td><td>Average</td><td>212</td><td>324</td></tr><tr><td>2</td><td>5460.00</td><td>56.92</td><td>74.00</td><td>-17.08</td><td>56.42</td><td>0.50</td><td>Peak</td><td>212</td><td>324</td></tr><tr><td>3</td><td>5470.00</td><td>57.06</td><td>68.20</td><td>-11.14</td><td>56.54</td><td>0.52</td><td>Peak</td><td>212</td><td>324</td></tr><tr><td>4 *</td><td>5500.00</td><td>105.15</td><td></td><td></td><td>104.56</td><td>0.59</td><td>Average</td><td>212</td><td>324</td></tr><tr><td>5 *</td><td>5500.00</td><td>114.35</td><td></td><td></td><td>113.76</td><td>0.59</td><td>Peak</td><td>212</td><td>324</td></tr><tr><td>6</td><td>11000.00</td><td>41.09</td><td>54.00</td><td>-12.91</td><td>32.39</td><td>8.70</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>7</td><td>11000.00</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>45.22</td><td>8.70</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>8</td><td>16500.00</td><td>56.54</td><td>68.20</td><td>-11.66</td><td>50.28</td><td>6.26</td><td>Peak</td><td>100</td><td>65</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	44.26	54.00	-9.74	43.76	0.50	Average	212	324	2	5460.00	56.92	74.00	-17.08	56.42	0.50	Peak	212	324	3	5470.00	57.06	68.20	-11.14	56.54	0.52	Peak	212	324	4 *	5500.00	105.15			104.56	0.59	Average	212	324	5 *	5500.00	114.35			113.76	0.59	Peak	212	324	6	11000.00	41.09	54.00	-12.91	32.39	8.70	Average	100	70	7	11000.00	53.92	74.00	-20.08	45.22	8.70	Peak	100	70	8	16500.00	56.54	68.20	-11.66	50.28	6.26	Peak	100	65
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5460.00	44.26	54.00	-9.74	43.76	0.50	Average	212	324																																																																																																								
2	5460.00	56.92	74.00	-17.08	56.42	0.50	Peak	212	324																																																																																																								
3	5470.00	57.06	68.20	-11.14	56.54	0.52	Peak	212	324																																																																																																								
4 *	5500.00	105.15			104.56	0.59	Average	212	324																																																																																																								
5 *	5500.00	114.35			113.76	0.59	Peak	212	324																																																																																																								
6	11000.00	41.09	54.00	-12.91	32.39	8.70	Average	100	70																																																																																																								
7	11000.00	53.92	74.00	-20.08	45.22	8.70	Peak	100	70																																																																																																								
8	16500.00	56.54	68.20	-11.66	50.28	6.26	Peak	100	65																																																																																																								



Modulation	11a	Test Freq. (MHz)	5580																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4464.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>44.88</td><td>-0.56</td><td>Peak</td><td>100</td><td>146</td></tr><tr><td>2</td><td>5460.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>43.48</td><td>0.50</td><td>Average</td><td>213</td><td>333</td></tr><tr><td>3</td><td>5460.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>56.13</td><td>0.50</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>4</td><td>5470.00</td><td>56.81</td><td>68.20</td><td>-11.39</td><td>56.29</td><td>0.52</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>5 *</td><td>5580.00</td><td>103.58</td><td></td><td></td><td>103.05</td><td>0.53</td><td>Average</td><td>213</td><td>333</td></tr><tr><td>6 *</td><td>5580.00</td><td>113.42</td><td></td><td></td><td>112.89</td><td>0.53</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>7</td><td>5725.00</td><td>57.28</td><td>68.20</td><td>-10.92</td><td>56.33</td><td>0.95</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>8</td><td>11160.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>32.41</td><td>8.27</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>9</td><td>11160.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>45.25</td><td>8.27</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>10</td><td>16740.00</td><td>56.72</td><td>68.20</td><td>-11.48</td><td>50.41</td><td>6.31</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	4464.00	44.32	68.20	-23.88	44.88	-0.56	Peak	100	146	2	5460.00	43.98	54.00	-10.02	43.48	0.50	Average	213	333	3	5460.00	56.63	74.00	-17.37	56.13	0.50	Peak	213	333	4	5470.00	56.81	68.20	-11.39	56.29	0.52	Peak	213	333	5 *	5580.00	103.58			103.05	0.53	Average	213	333	6 *	5580.00	113.42			112.89	0.53	Peak	213	333	7	5725.00	57.28	68.20	-10.92	56.33	0.95	Peak	213	333	8	11160.00	40.68	54.00	-13.32	32.41	8.27	Average	100	20	9	11160.00	53.52	74.00	-20.48	45.25	8.27	Peak	100	20	10	16740.00	56.72	68.20	-11.48	50.41	6.31	Peak	100	90
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																												
		dBuV/m			dBuV			cm	deg																																																																																																																												
1	4464.00	44.32	68.20	-23.88	44.88	-0.56	Peak	100	146																																																																																																																												
2	5460.00	43.98	54.00	-10.02	43.48	0.50	Average	213	333																																																																																																																												
3	5460.00	56.63	74.00	-17.37	56.13	0.50	Peak	213	333																																																																																																																												
4	5470.00	56.81	68.20	-11.39	56.29	0.52	Peak	213	333																																																																																																																												
5 *	5580.00	103.58			103.05	0.53	Average	213	333																																																																																																																												
6 *	5580.00	113.42			112.89	0.53	Peak	213	333																																																																																																																												
7	5725.00	57.28	68.20	-10.92	56.33	0.95	Peak	213	333																																																																																																																												
8	11160.00	40.68	54.00	-13.32	32.41	8.27	Average	100	20																																																																																																																												
9	11160.00	53.52	74.00	-20.48	45.25	8.27	Peak	100	20																																																																																																																												
10	16740.00	56.72	68.20	-11.48	50.41	6.31	Peak	100	90																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	11a	Test Freq. (MHz)	5580																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4464.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>44.91</td><td>-0.56</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>2</td><td>5460.00</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>43.55</td><td>0.50</td><td>Average</td><td>213</td><td>326</td></tr><tr><td>3</td><td>5460.00</td><td>56.72</td><td>74.00</td><td>-17.28</td><td>56.22</td><td>0.50</td><td>Peak</td><td>213</td><td>326</td></tr><tr><td>4</td><td>5470.00</td><td>56.87</td><td>68.20</td><td>-11.33</td><td>56.35</td><td>0.52</td><td>Peak</td><td>213</td><td>326</td></tr><tr><td>5 *</td><td>5580.00</td><td>105.65</td><td></td><td></td><td>105.12</td><td>0.53</td><td>Average</td><td>213</td><td>326</td></tr><tr><td>6 *</td><td>5580.00</td><td>115.22</td><td></td><td></td><td>114.69</td><td>0.53</td><td>Peak</td><td>213</td><td>326</td></tr><tr><td>7</td><td>5725.00</td><td>57.37</td><td>68.20</td><td>-10.83</td><td>56.42</td><td>0.95</td><td>Peak</td><td>213</td><td>326</td></tr><tr><td>8</td><td>11160.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>32.50</td><td>8.27</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>9</td><td>11160.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>45.34</td><td>8.27</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>10</td><td>16740.00</td><td>56.85</td><td>68.20</td><td>-11.35</td><td>50.54</td><td>6.31</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4464.00	44.35	68.20	-23.85	44.91	-0.56	Peak	100	26	2	5460.00	44.05	54.00	-9.95	43.55	0.50	Average	213	326	3	5460.00	56.72	74.00	-17.28	56.22	0.50	Peak	213	326	4	5470.00	56.87	68.20	-11.33	56.35	0.52	Peak	213	326	5 *	5580.00	105.65			105.12	0.53	Average	213	326	6 *	5580.00	115.22			114.69	0.53	Peak	213	326	7	5725.00	57.37	68.20	-10.83	56.42	0.95	Peak	213	326	8	11160.00	40.77	54.00	-13.23	32.50	8.27	Average	100	60	9	11160.00	53.61	74.00	-20.39	45.34	8.27	Peak	100	60	10	16740.00	56.85	68.20	-11.35	50.54	6.31	Peak	100	50
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	4464.00	44.35	68.20	-23.85	44.91	-0.56	Peak	100	26																																																																																																								
2	5460.00	44.05	54.00	-9.95	43.55	0.50	Average	213	326																																																																																																								
3	5460.00	56.72	74.00	-17.28	56.22	0.50	Peak	213	326																																																																																																								
4	5470.00	56.87	68.20	-11.33	56.35	0.52	Peak	213	326																																																																																																								
5 *	5580.00	105.65			105.12	0.53	Average	213	326																																																																																																								
6 *	5580.00	115.22			114.69	0.53	Peak	213	326																																																																																																								
7	5725.00	57.37	68.20	-10.83	56.42	0.95	Peak	213	326																																																																																																								
8	11160.00	40.77	54.00	-13.23	32.50	8.27	Average	100	60																																																																																																								
9	11160.00	53.61	74.00	-20.39	45.34	8.27	Peak	100	60																																																																																																								
10	16740.00	56.85	68.20	-11.35	50.54	6.31	Peak	100	50																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5700																																																																																														
Polarization	Horizontal																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5700.00</td><td>103.65</td><td></td><td>102.75</td><td>0.90</td><td>Average</td><td>215</td><td>336</td></tr><tr><td>2</td><td>*</td><td>5700.00</td><td>113.15</td><td></td><td>112.25</td><td>0.90</td><td>Peak</td><td>215</td><td>336</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>60.16</td><td>68.20</td><td>-8.04</td><td>59.21</td><td>0.95</td><td>Peak</td><td>215</td><td>336</td></tr><tr><td>4</td><td></td><td>11400.00</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>32.42</td><td>8.06</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>5</td><td></td><td>11400.00</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>45.29</td><td>8.06</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>6</td><td></td><td>17100.00</td><td>56.19</td><td>68.20</td><td>-12.01</td><td>50.42</td><td>5.77</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	5700.00	103.65		102.75	0.90	Average	215	336	2	*	5700.00	113.15		112.25	0.90	Peak	215	336	3		5725.00	60.16	68.20	-8.04	59.21	0.95	Peak	215	336	4		11400.00	40.48	54.00	-13.52	32.42	8.06	Average	100	100	5		11400.00	53.35	74.00	-20.65	45.29	8.06	Peak	100	100	6		17100.00	56.19	68.20	-12.01	50.42	5.77	Peak	100	80
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																								
1	*	5700.00	103.65		102.75	0.90	Average	215	336																																																																																								
2	*	5700.00	113.15		112.25	0.90	Peak	215	336																																																																																								
3		5725.00	60.16	68.20	-8.04	59.21	0.95	Peak	215	336																																																																																							
4		11400.00	40.48	54.00	-13.52	32.42	8.06	Average	100	100																																																																																							
5		11400.00	53.35	74.00	-20.65	45.29	8.06	Peak	100	100																																																																																							
6		17100.00	56.19	68.20	-12.01	50.42	5.77	Peak	100	80																																																																																							




Modulation	11a	Test Freq. (MHz)	5700																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5700.00</td><td>105.82</td><td></td><td></td><td>104.92</td><td>0.90</td><td>Average</td><td>215</td><td>326</td></tr><tr><td>2 *</td><td>5700.00</td><td>114.76</td><td></td><td></td><td>113.86</td><td>0.90</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>3</td><td>5725.00</td><td>62.34</td><td>68.20</td><td>-5.86</td><td>61.39</td><td>0.95</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>4</td><td>11400.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>32.45</td><td>8.06</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>5</td><td>11400.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>45.46</td><td>8.06</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>6</td><td>17100.00</td><td>56.39</td><td>68.20</td><td>-11.81</td><td>50.62</td><td>5.77</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5700.00	105.82			104.92	0.90	Average	215	326	2 *	5700.00	114.76			113.86	0.90	Peak	215	326	3	5725.00	62.34	68.20	-5.86	61.39	0.95	Peak	215	326	4	11400.00	40.51	54.00	-13.49	32.45	8.06	Average	100	20	5	11400.00	53.52	74.00	-20.48	45.46	8.06	Peak	100	20	6	17100.00	56.39	68.20	-11.81	50.62	5.77	Peak	100	60
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1 *	5700.00	105.82			104.92	0.90	Average	215	326																																																																																				
2 *	5700.00	114.76			113.86	0.90	Peak	215	326																																																																																				
3	5725.00	62.34	68.20	-5.86	61.39	0.95	Peak	215	326																																																																																				
4	11400.00	40.51	54.00	-13.49	32.45	8.06	Average	100	20																																																																																				
5	11400.00	53.52	74.00	-20.48	45.46	8.06	Peak	100	20																																																																																				
6	17100.00	56.39	68.20	-11.81	50.62	5.77	Peak	100	60																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	11a	Test Freq. (MHz)	5720																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4576.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>41.23</td><td>-0.27</td><td>Average</td><td>129</td><td>140</td></tr><tr><td>2</td><td>4576.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>48.47</td><td>-0.27</td><td>Peak</td><td>129</td><td>140</td></tr><tr><td>3 *</td><td>5720.00</td><td>103.59</td><td></td><td></td><td>102.65</td><td>0.94</td><td>Average</td><td>213</td><td>333</td></tr><tr><td>4 *</td><td>5720.00</td><td>112.53</td><td></td><td></td><td>111.59</td><td>0.94</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>5</td><td>5850.00</td><td>57.19</td><td>68.20</td><td>-11.01</td><td>56.11</td><td>1.08</td><td>Peak</td><td>213</td><td>333</td></tr><tr><td>6</td><td>11440.00</td><td>40.36</td><td>54.00</td><td>-13.64</td><td>32.22</td><td>8.14</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>7</td><td>11440.00</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>45.19</td><td>8.14</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>8</td><td>17160.00</td><td>55.90</td><td>68.20</td><td>-12.30</td><td>50.44</td><td>5.46</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	4576.00	40.96	54.00	-13.04	41.23	-0.27	Average	129	140	2	4576.00	48.20	74.00	-25.80	48.47	-0.27	Peak	129	140	3 *	5720.00	103.59			102.65	0.94	Average	213	333	4 *	5720.00	112.53			111.59	0.94	Peak	213	333	5	5850.00	57.19	68.20	-11.01	56.11	1.08	Peak	213	333	6	11440.00	40.36	54.00	-13.64	32.22	8.14	Average	100	50	7	11440.00	53.33	74.00	-20.67	45.19	8.14	Peak	100	50	8	17160.00	55.90	68.20	-12.30	50.44	5.46	Peak	100	70
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	4576.00	40.96	54.00	-13.04	41.23	-0.27	Average	129	140																																																																																																								
2	4576.00	48.20	74.00	-25.80	48.47	-0.27	Peak	129	140																																																																																																								
3 *	5720.00	103.59			102.65	0.94	Average	213	333																																																																																																								
4 *	5720.00	112.53			111.59	0.94	Peak	213	333																																																																																																								
5	5850.00	57.19	68.20	-11.01	56.11	1.08	Peak	213	333																																																																																																								
6	11440.00	40.36	54.00	-13.64	32.22	8.14	Average	100	50																																																																																																								
7	11440.00	53.33	74.00	-20.67	45.19	8.14	Peak	100	50																																																																																																								
8	17160.00	55.90	68.20	-12.30	50.44	5.46	Peak	100	70																																																																																																								

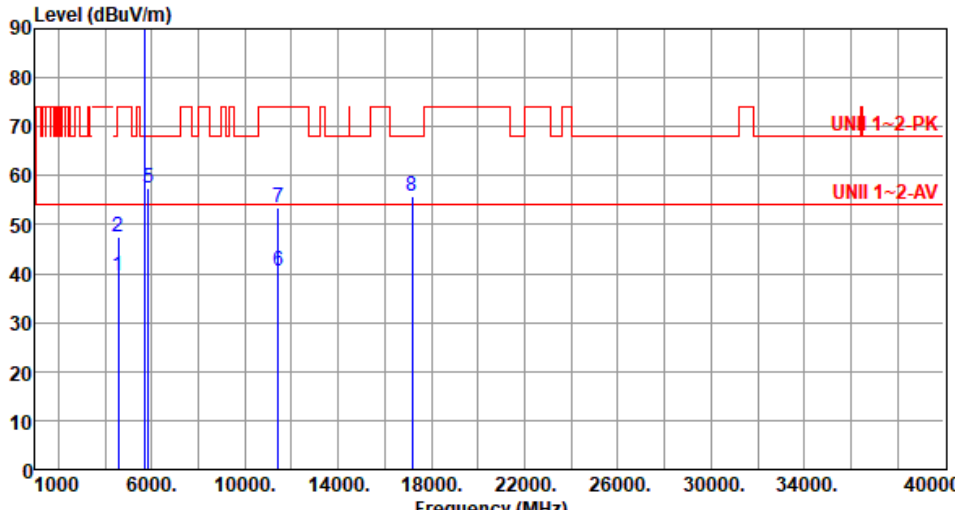

Modulation	11a	Test Freq. (MHz)	5720						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4576.00	39.41	54.00	-14.59	39.68	-0.27	Average	170	12
2	4576.00	47.52	74.00	-26.48	47.79	-0.27	Peak	170	12
3 *	5720.00	105.82			104.88	0.94	Average	212	325
4 *	5720.00	115.09			114.15	0.94	Peak	212	325
5	5850.00	57.30	68.20	-10.90	56.22	1.08	Peak	212	325
6	11440.00	40.52	54.00	-13.48	32.38	8.14	Average	100	80
7	11440.00	53.63	74.00	-20.37	45.49	8.14	Peak	100	80
8	17160.00	55.77	68.20	-12.43	50.31	5.46	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m)			

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		
Test By	:Roger Lu	Temperature(°C):21	Humidity(%):63

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4596.00	47.31	54.00	-6.69	47.57	-0.26	Average	174	11
2	4596.00	52.61	74.00	-21.39	52.87	-0.26	Peak	174	11
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	168	325
4	5700.00	63.14	105.20	-42.06	62.24	0.90	Peak	168	325
5	5720.00	75.98	110.80	-34.82	75.04	0.94	Peak	168	325
6	5725.00	85.17	122.20	-37.03	84.22	0.95	Peak	168	325
7 *	5745.00	114.13			113.13	1.00	Average	168	325
8 *	5745.00	123.86			122.86	1.00	Peak	168	325
9	5925.00	57.99	68.20	-10.21	56.55	1.44	Peak	168	325
10	11490.00	41.01	54.00	-12.99	32.62	8.39	Average	100	30
11	11490.00	54.97	74.00	-19.03	46.58	8.39	Peak	100	30
12	17235.00	57.66	68.20	-10.54	52.22	5.44	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5785						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4628.00	49.97	54.00	-4.03	50.12	-0.15	Average	117	126
2	4628.00	53.96	74.00	-20.04	54.11	-0.15	Peak	117	126
3	5650.00	56.82	68.20	-11.38	56.16	0.66	Peak	105	333
4 *	5785.00	112.89			111.85	1.04	Average	105	333
5 *	5785.00	121.73			120.69	1.04	Peak	105	333
6	5925.00	57.89	68.20	-10.31	56.45	1.44	Peak	105	333
7	11570.00	41.45	54.00	-12.55	33.12	8.33	Average	100	50
8	11570.00	55.24	74.00	-18.76	46.91	8.33	Peak	100	50
9	17355.00	58.13	68.20	-10.07	52.29	5.84	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	11a	Test Freq. (MHz)	5785																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4628.00</td><td>47.85</td><td>54.00</td><td>-6.15</td><td>48.00</td><td>-0.15</td><td>Average</td><td>173</td><td>7</td></tr><tr><td>2</td><td>4628.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>53.18</td><td>-0.15</td><td>Peak</td><td>173</td><td>7</td></tr><tr><td>3</td><td>5650.00</td><td>56.91</td><td>68.20</td><td>-11.29</td><td>56.25</td><td>0.66</td><td>Peak</td><td>180</td><td>323</td></tr><tr><td>4 *</td><td>5785.00</td><td>114.74</td><td></td><td></td><td>113.70</td><td>1.04</td><td>Average</td><td>180</td><td>323</td></tr><tr><td>5 *</td><td>5785.00</td><td>123.84</td><td></td><td></td><td>122.80</td><td>1.04</td><td>Peak</td><td>180</td><td>323</td></tr><tr><td>6</td><td>5925.00</td><td>58.10</td><td>68.20</td><td>-10.10</td><td>56.66</td><td>1.44</td><td>Peak</td><td>180</td><td>323</td></tr><tr><td>7</td><td>11570.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>32.85</td><td>8.33</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>8</td><td>11570.00</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>46.87</td><td>8.33</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>9</td><td>17355.00</td><td>58.03</td><td>68.20</td><td>-10.17</td><td>52.19</td><td>5.84</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4628.00	47.85	54.00	-6.15	48.00	-0.15	Average	173	7	2	4628.00	53.03	74.00	-20.97	53.18	-0.15	Peak	173	7	3	5650.00	56.91	68.20	-11.29	56.25	0.66	Peak	180	323	4 *	5785.00	114.74			113.70	1.04	Average	180	323	5 *	5785.00	123.84			122.80	1.04	Peak	180	323	6	5925.00	58.10	68.20	-10.10	56.66	1.44	Peak	180	323	7	11570.00	41.18	54.00	-12.82	32.85	8.33	Average	100	40	8	11570.00	55.20	74.00	-18.80	46.87	8.33	Peak	100	40	9	17355.00	58.03	68.20	-10.17	52.19	5.84	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	4628.00	47.85	54.00	-6.15	48.00	-0.15	Average	173	7																																																																																														
2	4628.00	53.03	74.00	-20.97	53.18	-0.15	Peak	173	7																																																																																														
3	5650.00	56.91	68.20	-11.29	56.25	0.66	Peak	180	323																																																																																														
4 *	5785.00	114.74			113.70	1.04	Average	180	323																																																																																														
5 *	5785.00	123.84			122.80	1.04	Peak	180	323																																																																																														
6	5925.00	58.10	68.20	-10.10	56.66	1.44	Peak	180	323																																																																																														
7	11570.00	41.18	54.00	-12.82	32.85	8.33	Average	100	40																																																																																														
8	11570.00	55.20	74.00	-18.80	46.87	8.33	Peak	100	40																																																																																														
9	17355.00	58.03	68.20	-10.17	52.19	5.84	Peak	100	30																																																																																														




Modulation	11a	Test Freq. (MHz)	5825																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4660.00</td><td>51.50</td><td>54.00</td><td>-2.50</td><td>51.54</td><td>-0.04</td><td>Average</td><td>126</td><td>127</td></tr><tr><td>2</td><td>4660.00</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>55.52</td><td>-0.04</td><td>Peak</td><td>126</td><td>127</td></tr><tr><td>3</td><td>5650.00</td><td>56.82</td><td>68.20</td><td>-11.38</td><td>56.16</td><td>0.66</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>4 *</td><td>5825.00</td><td>112.12</td><td></td><td></td><td>111.06</td><td>1.06</td><td>Average</td><td>105</td><td>334</td></tr><tr><td>5 *</td><td>5825.00</td><td>121.51</td><td></td><td></td><td>120.45</td><td>1.06</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>6</td><td>5850.00</td><td>74.36</td><td>122.20</td><td>-47.84</td><td>73.28</td><td>1.08</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>7</td><td>5855.00</td><td>72.67</td><td>110.80</td><td>-38.13</td><td>71.55</td><td>1.12</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>8</td><td>5875.00</td><td>61.40</td><td>105.20</td><td>-43.80</td><td>60.15</td><td>1.25</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>9</td><td>5925.00</td><td>57.69</td><td>68.20</td><td>-10.51</td><td>56.25</td><td>1.44</td><td>Peak</td><td>105</td><td>334</td></tr><tr><td>10</td><td>11650.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>32.33</td><td>7.92</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>11</td><td>11650.00</td><td>54.31</td><td>74.00</td><td>-19.69</td><td>46.39</td><td>7.92</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>12</td><td>17475.00</td><td>58.65</td><td>68.20</td><td>-9.55</td><td>52.33</td><td>6.32</td><td>Peak</td><td>100</td><td>55</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4660.00	51.50	54.00	-2.50	51.54	-0.04	Average	126	127	2	4660.00	55.48	74.00	-18.52	55.52	-0.04	Peak	126	127	3	5650.00	56.82	68.20	-11.38	56.16	0.66	Peak	105	334	4 *	5825.00	112.12			111.06	1.06	Average	105	334	5 *	5825.00	121.51			120.45	1.06	Peak	105	334	6	5850.00	74.36	122.20	-47.84	73.28	1.08	Peak	105	334	7	5855.00	72.67	110.80	-38.13	71.55	1.12	Peak	105	334	8	5875.00	61.40	105.20	-43.80	60.15	1.25	Peak	105	334	9	5925.00	57.69	68.20	-10.51	56.25	1.44	Peak	105	334	10	11650.00	40.25	54.00	-13.75	32.33	7.92	Average	100	80	11	11650.00	54.31	74.00	-19.69	46.39	7.92	Peak	100	80	12	17475.00	58.65	68.20	-9.55	52.33	6.32	Peak	100	55
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4660.00	51.50	54.00	-2.50	51.54	-0.04	Average	126	127																																																																																																																												
2	4660.00	55.48	74.00	-18.52	55.52	-0.04	Peak	126	127																																																																																																																												
3	5650.00	56.82	68.20	-11.38	56.16	0.66	Peak	105	334																																																																																																																												
4 *	5825.00	112.12			111.06	1.06	Average	105	334																																																																																																																												
5 *	5825.00	121.51			120.45	1.06	Peak	105	334																																																																																																																												
6	5850.00	74.36	122.20	-47.84	73.28	1.08	Peak	105	334																																																																																																																												
7	5855.00	72.67	110.80	-38.13	71.55	1.12	Peak	105	334																																																																																																																												
8	5875.00	61.40	105.20	-43.80	60.15	1.25	Peak	105	334																																																																																																																												
9	5925.00	57.69	68.20	-10.51	56.25	1.44	Peak	105	334																																																																																																																												
10	11650.00	40.25	54.00	-13.75	32.33	7.92	Average	100	80																																																																																																																												
11	11650.00	54.31	74.00	-19.69	46.39	7.92	Peak	100	80																																																																																																																												
12	17475.00	58.65	68.20	-9.55	52.33	6.32	Peak	100	55																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

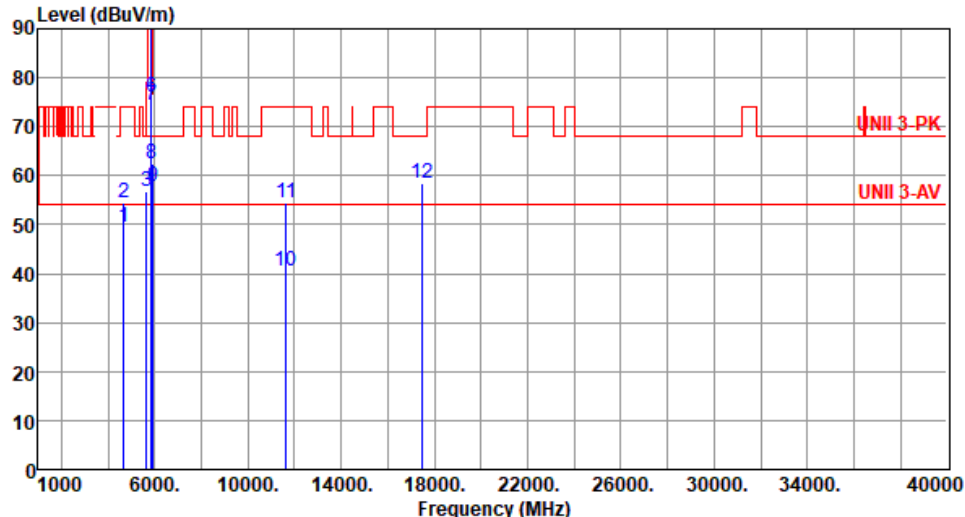

Modulation	11a	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4660.00	49.34	54.00	-4.66	49.38	-0.04	Average	174	8
2	4660.00	54.54	74.00	-19.46	54.58	-0.04	Peak	174	8
3	5650.00	56.95	68.20	-11.25	56.29	0.66	Peak	203	337
4 *	5825.00	114.24			113.18	1.06	Average	203	337
5 *	5825.00	123.75			122.69	1.06	Peak	203	337
6	5850.00	76.17	122.20	-46.03	75.09	1.08	Peak	203	337
7	5855.00	74.54	110.80	-36.26	73.42	1.12	Peak	203	337
8	5875.00	62.43	105.20	-42.77	61.18	1.25	Peak	203	337
9	5925.00	57.89	68.20	-10.31	56.45	1.44	Peak	203	337
10	11650.00	40.37	54.00	-13.63	32.45	7.92	Average	100	70
11	11650.00	54.34	74.00	-19.66	46.42	7.92	Peak	100	70
12	17475.00	58.36	68.20	-9.84	52.04	6.32	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

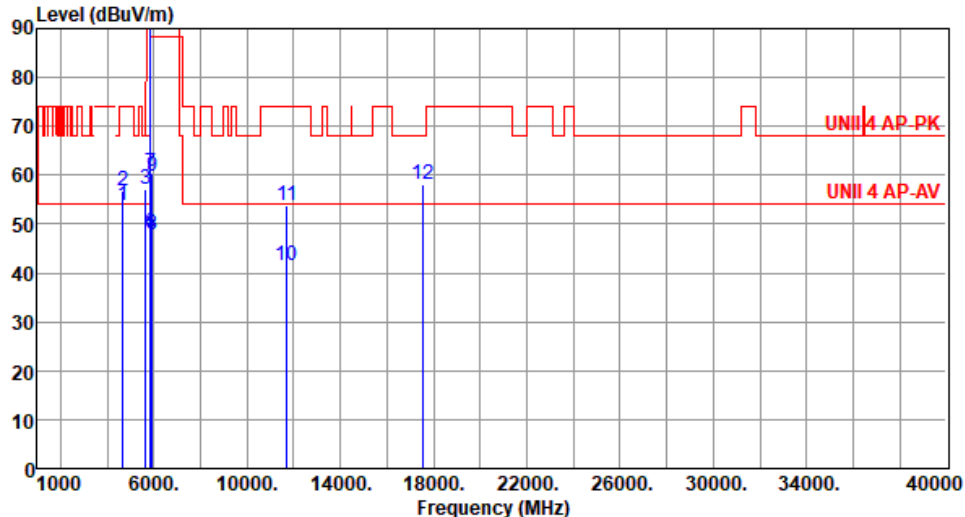

Modulation	11a	Test Freq. (MHz)	5845						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4676.00	53.88	54.00	-0.12	53.89	-0.01	Average	103	128
2	4676.00	56.67	74.00	-17.33	56.68	-0.01	Peak	103	128
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	105	333
4 *	5845.00	109.73			108.65	1.08	Average	105	333
5 *	5845.00	118.97			117.89	1.08	Peak	105	333
6	5895.00	48.21	110.20	-61.99	46.83	1.38	Average	105	333
7	5895.00	60.40	130.20	-69.80	59.02	1.38	Peak	105	333
8	5925.00	47.73	88.20	-40.47	46.29	1.44	Average	105	333
9	5925.00	59.66	108.20	-48.54	58.22	1.44	Peak	105	333
10	11690.00	41.39	54.00	-12.61	33.45	7.94	Average	100	60
11	11690.00	53.83	74.00	-20.17	45.89	7.94	Peak	100	60
12	17535.00	58.12	68.20	-10.08	51.46	6.66	Peak	100	30


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

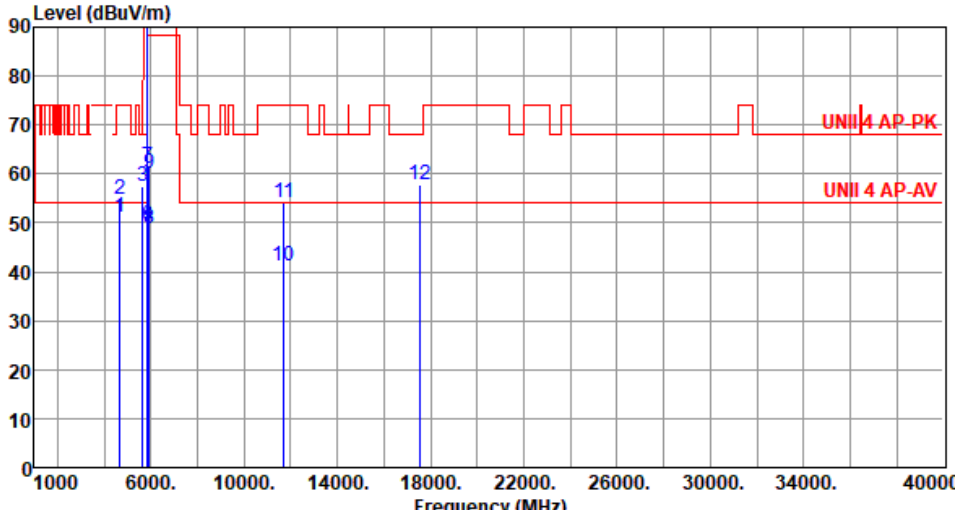


Modulation	11a	Test Freq. (MHz)	5845						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4676.00	51.31	54.00	-2.69	51.32	-0.01	Average	159	5
2	4676.00	54.67	74.00	-19.33	54.68	-0.01	Peak	159	5
3	5650.00	57.55	68.20	-10.65	56.89	0.66	Peak	205	336
4 *	5845.00	111.79			110.71	1.08	Average	205	336
5 *	5845.00	121.05			119.97	1.08	Peak	205	336
6	5895.00	49.35	110.20	-60.85	47.97	1.38	Average	205	336
7	5895.00	61.28	130.20	-68.92	59.90	1.38	Peak	205	336
8	5925.00	48.86	88.20	-39.34	47.42	1.44	Average	205	336
9	5925.00	60.07	108.20	-48.13	58.63	1.44	Peak	205	336
10	11690.00	41.14	54.00	-12.86	33.20	7.94	Average	100	35
11	11690.00	53.99	74.00	-20.01	46.05	7.94	Peak	100	35
12	17535.00	57.95	68.20	-10.25	51.29	6.66	Peak	100	50

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

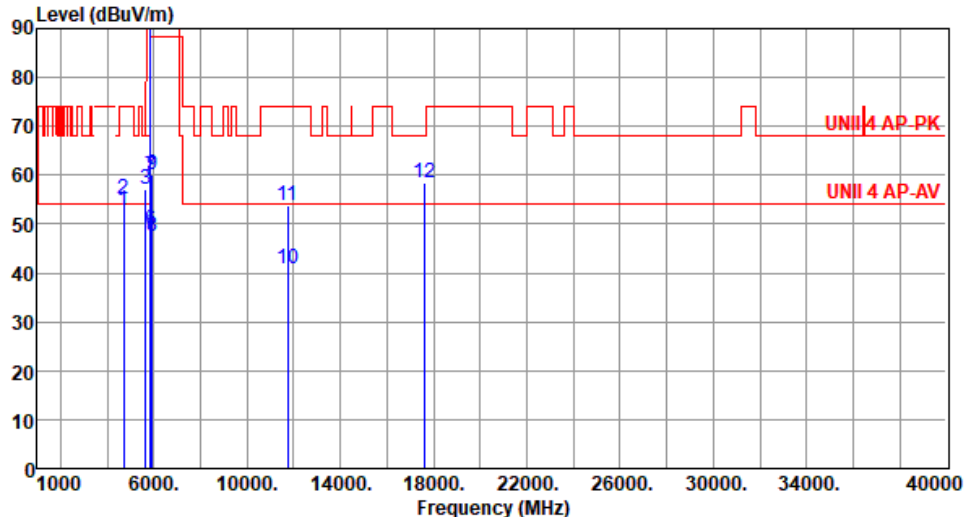


Modulation	11a	Test Freq. (MHz)	5865																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4692.00</td><td>52.65</td><td>54.00</td><td>-1.35</td><td>52.63</td><td>0.02</td><td>Average</td><td>125</td><td>156</td></tr><tr><td>2</td><td>4692.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>55.10</td><td>0.02</td><td>Peak</td><td>125</td><td>156</td></tr><tr><td>3</td><td>5650.00</td><td>57.08</td><td>68.20</td><td>-11.12</td><td>56.42</td><td>0.66</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>4 *</td><td>5865.00</td><td>107.31</td><td></td><td></td><td>106.12</td><td>1.19</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>5 *</td><td>5865.00</td><td>116.64</td><td></td><td></td><td>115.45</td><td>1.19</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>6</td><td>5895.00</td><td>48.83</td><td>110.20</td><td>-61.37</td><td>47.45</td><td>1.38</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>7</td><td>5895.00</td><td>59.93</td><td>130.20</td><td>-70.27</td><td>58.55</td><td>1.38</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>8</td><td>5925.00</td><td>47.65</td><td>88.20</td><td>-40.55</td><td>46.21</td><td>1.44</td><td>Average</td><td>100</td><td>331</td></tr><tr><td>9</td><td>5925.00</td><td>60.03</td><td>108.20</td><td>-48.17</td><td>58.59</td><td>1.44</td><td>Peak</td><td>100</td><td>331</td></tr><tr><td>10</td><td>11730.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>33.11</td><td>7.66</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>11</td><td>11730.00</td><td>53.68</td><td>74.00</td><td>-20.32</td><td>46.02</td><td>7.66</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>12</td><td>17595.00</td><td>58.41</td><td>68.20</td><td>-9.79</td><td>51.42</td><td>6.99</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4692.00	52.65	54.00	-1.35	52.63	0.02	Average	125	156	2	4692.00	55.12	74.00	-18.88	55.10	0.02	Peak	125	156	3	5650.00	57.08	68.20	-11.12	56.42	0.66	Peak	100	331	4 *	5865.00	107.31			106.12	1.19	Average	100	331	5 *	5865.00	116.64			115.45	1.19	Peak	100	331	6	5895.00	48.83	110.20	-61.37	47.45	1.38	Average	100	331	7	5895.00	59.93	130.20	-70.27	58.55	1.38	Peak	100	331	8	5925.00	47.65	88.20	-40.55	46.21	1.44	Average	100	331	9	5925.00	60.03	108.20	-48.17	58.59	1.44	Peak	100	331	10	11730.00	40.77	54.00	-13.23	33.11	7.66	Average	100	20	11	11730.00	53.68	74.00	-20.32	46.02	7.66	Peak	100	20	12	17595.00	58.41	68.20	-9.79	51.42	6.99	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4692.00	52.65	54.00	-1.35	52.63	0.02	Average	125	156																																																																																																																												
2	4692.00	55.12	74.00	-18.88	55.10	0.02	Peak	125	156																																																																																																																												
3	5650.00	57.08	68.20	-11.12	56.42	0.66	Peak	100	331																																																																																																																												
4 *	5865.00	107.31			106.12	1.19	Average	100	331																																																																																																																												
5 *	5865.00	116.64			115.45	1.19	Peak	100	331																																																																																																																												
6	5895.00	48.83	110.20	-61.37	47.45	1.38	Average	100	331																																																																																																																												
7	5895.00	59.93	130.20	-70.27	58.55	1.38	Peak	100	331																																																																																																																												
8	5925.00	47.65	88.20	-40.55	46.21	1.44	Average	100	331																																																																																																																												
9	5925.00	60.03	108.20	-48.17	58.59	1.44	Peak	100	331																																																																																																																												
10	11730.00	40.77	54.00	-13.23	33.11	7.66	Average	100	20																																																																																																																												
11	11730.00	53.68	74.00	-20.32	46.02	7.66	Peak	100	20																																																																																																																												
12	17595.00	58.41	68.20	-9.79	51.42	6.99	Peak	100	60																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

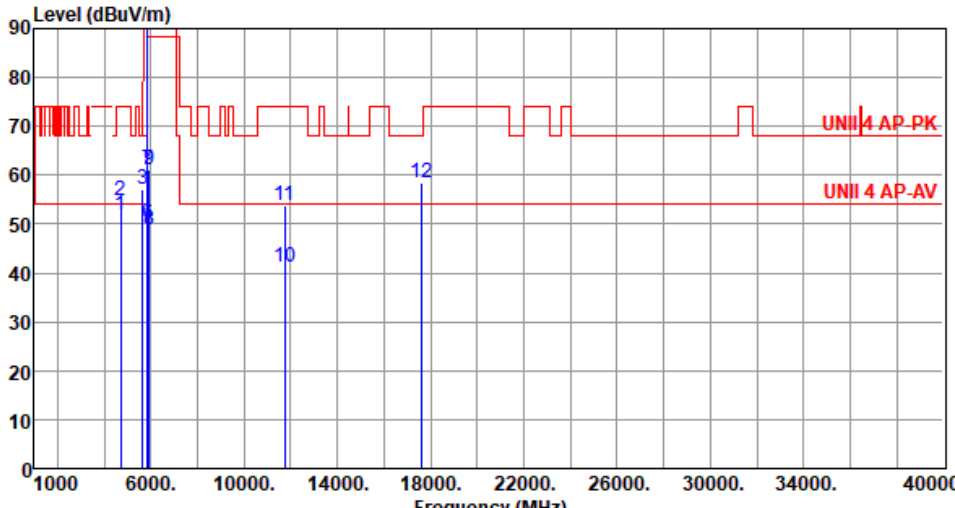

Modulation	11a	Test Freq. (MHz)	5865						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4692.00	51.92	54.00	-2.08	51.90	0.02	Average	132	3
2	4692.00	54.81	74.00	-19.19	54.79	0.02	Peak	132	3
3	5650.00	57.24	68.20	-10.96	56.58	0.66	Peak	205	335
4 *	5865.00	109.44			108.25	1.19	Average	205	335
5 *	5865.00	118.66			117.47	1.19	Peak	205	335
6	5895.00	50.06	110.20	-60.14	48.68	1.38	Average	205	335
7	5895.00	61.07	130.20	-69.13	59.69	1.38	Peak	205	335
8	5925.00	48.91	88.20	-39.29	47.47	1.44	Average	205	335
9	5925.00	60.99	108.20	-47.21	59.55	1.44	Peak	205	335
10	11730.00	41.11	54.00	-12.89	33.45	7.66	Average	100	90
11	11730.00	53.88	74.00	-20.12	46.22	7.66	Peak	100	90
12	17595.00	58.44	68.20	-9.76	51.45	6.99	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

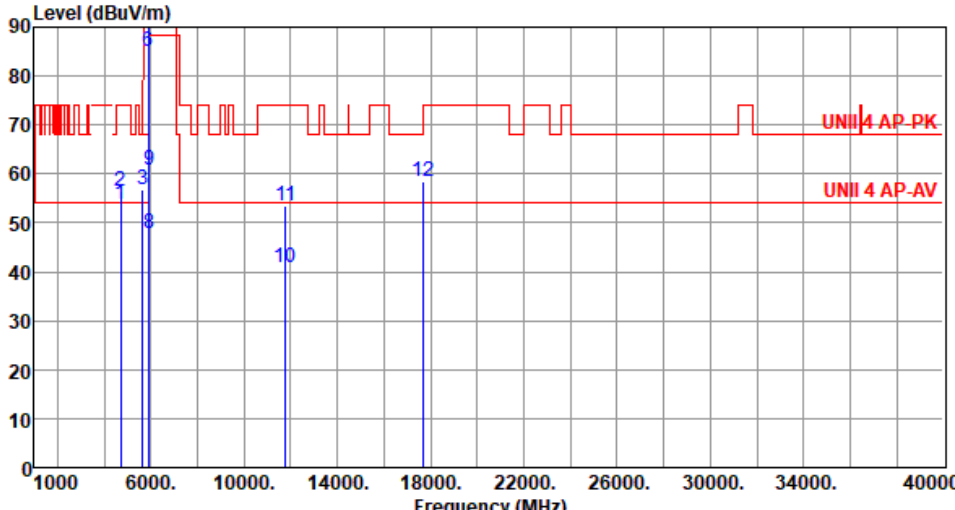

Modulation	11a	Test Freq. (MHz)	5885						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4708.00	53.84	54.00	-0.16	53.81	0.03	Average	103	147
2	4708.00	56.36	74.00	-17.64	56.33	0.03	Peak	103	147
3	5650.00	56.87	68.20	-11.33	56.21	0.66	Peak	103	334
4 *	5885.00	107.57			106.26	1.31	Average	103	334
5 *	5885.00	117.43			116.12	1.31	Peak	103	334
6	5895.00	84.94	110.20	-25.26	83.56	1.38	Average	103	334
7	5895.00	98.27	130.20	-31.93	96.89	1.38	Peak	103	334
8	5925.00	47.99	88.20	-40.21	46.55	1.44	Average	103	334
9	5925.00	60.66	108.20	-47.54	59.22	1.44	Peak	103	334
10	11770.00	40.73	54.00	-13.27	33.33	7.40	Average	100	50
11	11770.00	53.51	74.00	-20.49	46.11	7.40	Peak	100	50
12	17655.00	58.46	68.20	-9.74	51.22	7.24	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5885						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4708.00	51.44	54.00	-2.56	51.41	0.03	Average	144	3
2	4708.00	54.79	74.00	-19.21	54.76	0.03	Peak	144	3
3	5650.00	57.08	68.20	-11.12	56.42	0.66	Peak	202	334
4 *	5885.00	109.64			108.33	1.31	Average	202	334
5 *	5885.00	119.44			118.13	1.31	Peak	202	334
6	5895.00	87.22	110.20	-22.98	85.84	1.38	Average	202	334
7	5895.00	100.51	130.20	-29.69	99.13	1.38	Peak	202	334
8	5925.00	49.05	88.20	-39.15	47.61	1.44	Average	202	334
9	5925.00	61.59	108.20	-46.61	60.15	1.44	Peak	202	334
10	11770.00	40.92	54.00	-13.08	33.52	7.40	Average	100	60
11	11770.00	53.71	74.00	-20.29	46.31	7.40	Peak	100	60
12	17655.00	58.79	68.20	-9.41	51.55	7.24	Peak	100	50

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBUV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4160.00	29.78	54.00	-24.22	30.91	-1.13	Average	100	21
2	4160.00	43.04	74.00	-30.96	44.17	-1.13	Peak	100	21
3	5150.00	48.10	54.00	-5.90	47.45	0.65	Average	115	131
4	5150.00	59.44	74.00	-14.56	58.79	0.65	Peak	115	131
5 *	5200.00	110.45			109.89	0.56	Average	115	131
6 *	5200.00	122.01			121.45	0.56	Peak	115	131
7	5350.00	43.36	54.00	-10.64	43.22	0.14	Average	115	131
8	5350.00	55.25	74.00	-18.75	55.11	0.14	Peak	115	131
9	10400.00	54.70	68.20	-13.50	46.24	8.46	Peak	100	55
10	15600.00	42.16	54.00	-11.84	37.49	4.67	Average	100	40
11	15600.00	54.80	74.00	-19.20	50.13	4.67	Peak	100	40
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

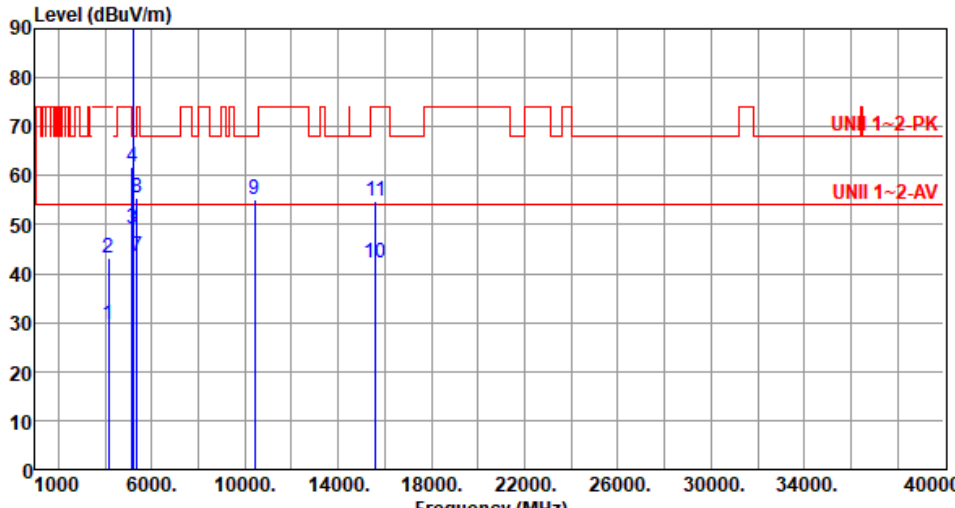

Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4160.00	29.68	54.00	-24.32	30.81	-1.13	Average	100	11
2	4160.00	43.02	74.00	-30.98	44.15	-1.13	Peak	100	11
3	5150.00	49.26	54.00	-4.74	48.61	0.65	Average	127	10
4	5150.00	61.61	74.00	-12.39	60.96	0.65	Peak	127	10
5 *	5200.00	111.61			111.05	0.56	Average	127	10
6 *	5200.00	124.52			123.96	0.56	Peak	127	10
7	5350.00	43.64	54.00	-10.36	43.50	0.14	Average	127	10
8	5350.00	55.39	74.00	-18.61	55.25	0.14	Peak	127	10
9	10400.00	55.13	68.20	-13.07	46.67	8.46	Peak	100	50
10	15600.00	42.32	54.00	-11.68	37.65	4.67	Average	100	30
11	15600.00	54.92	74.00	-19.08	50.25	4.67	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>45.12</td><td>0.65</td><td>Average</td><td>111</td><td>125</td></tr><tr><td>2</td><td>5150.00</td><td>56.67</td><td>74.00</td><td>-17.33</td><td>56.02</td><td>0.65</td><td>Peak</td><td>111</td><td>125</td></tr><tr><td>3 *</td><td>5240.00</td><td>110.49</td><td></td><td></td><td>110.15</td><td>0.34</td><td>Average</td><td>111</td><td>125</td></tr><tr><td>4 *</td><td>5240.00</td><td>122.92</td><td></td><td></td><td>122.58</td><td>0.34</td><td>Peak</td><td>111</td><td>125</td></tr><tr><td>5</td><td>5350.00</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>43.22</td><td>0.14</td><td>Average</td><td>111</td><td>125</td></tr><tr><td>6</td><td>5350.00</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>55.11</td><td>0.14</td><td>Peak</td><td>111</td><td>125</td></tr><tr><td>7</td><td>10480.00</td><td>54.76</td><td>68.20</td><td>-13.44</td><td>46.26</td><td>8.50</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>8</td><td>15720.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>37.56</td><td>4.95</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>9</td><td>15720.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>50.29</td><td>4.95</td><td>Peak</td><td>100</td><td>20</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5150.00	45.77	54.00	-8.23	45.12	0.65	Average	111	125	2	5150.00	56.67	74.00	-17.33	56.02	0.65	Peak	111	125	3 *	5240.00	110.49			110.15	0.34	Average	111	125	4 *	5240.00	122.92			122.58	0.34	Peak	111	125	5	5350.00	43.36	54.00	-10.64	43.22	0.14	Average	111	125	6	5350.00	55.25	74.00	-18.75	55.11	0.14	Peak	111	125	7	10480.00	54.76	68.20	-13.44	46.26	8.50	Peak	100	50	8	15720.00	42.51	54.00	-11.49	37.56	4.95	Average	100	20	9	15720.00	55.24	74.00	-18.76	50.29	4.95	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level			reading			High	Table																																																																																																																		
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	5150.00	45.77	54.00	-8.23	45.12	0.65	Average	111	125																																																																																																																		
2	5150.00	56.67	74.00	-17.33	56.02	0.65	Peak	111	125																																																																																																																		
3 *	5240.00	110.49			110.15	0.34	Average	111	125																																																																																																																		
4 *	5240.00	122.92			122.58	0.34	Peak	111	125																																																																																																																		
5	5350.00	43.36	54.00	-10.64	43.22	0.14	Average	111	125																																																																																																																		
6	5350.00	55.25	74.00	-18.75	55.11	0.14	Peak	111	125																																																																																																																		
7	10480.00	54.76	68.20	-13.44	46.26	8.50	Peak	100	50																																																																																																																		
8	15720.00	42.51	54.00	-11.49	37.56	4.95	Average	100	20																																																																																																																		
9	15720.00	55.24	74.00	-18.76	50.29	4.95	Peak	100	20																																																																																																																		



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>46.20</td><td>54.00</td><td>-7.80</td><td>45.55</td><td>0.65</td><td>Average</td><td>126</td><td>9</td></tr><tr><td>2</td><td>5150.00</td><td>56.97</td><td>74.00</td><td>-17.03</td><td>56.32</td><td>0.65</td><td>Peak</td><td>126</td><td>9</td></tr><tr><td>3 *</td><td>5240.00</td><td>111.79</td><td></td><td></td><td>111.45</td><td>0.34</td><td>Average</td><td>126</td><td>9</td></tr><tr><td>4 *</td><td>5240.00</td><td>123.99</td><td></td><td></td><td>123.65</td><td>0.34</td><td>Peak</td><td>126</td><td>9</td></tr><tr><td>5</td><td>5350.00</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>43.45</td><td>0.14</td><td>Average</td><td>126</td><td>9</td></tr><tr><td>6</td><td>5350.00</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>55.31</td><td>0.14</td><td>Peak</td><td>126</td><td>9</td></tr><tr><td>7</td><td>10480.00</td><td>55.05</td><td>68.20</td><td>-13.15</td><td>46.55</td><td>8.50</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>8</td><td>15720.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>37.48</td><td>4.95</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>9</td><td>15720.00</td><td>55.40</td><td>74.00</td><td>-18.60</td><td>50.45</td><td>4.95</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	46.20	54.00	-7.80	45.55	0.65	Average	126	9	2	5150.00	56.97	74.00	-17.03	56.32	0.65	Peak	126	9	3 *	5240.00	111.79			111.45	0.34	Average	126	9	4 *	5240.00	123.99			123.65	0.34	Peak	126	9	5	5350.00	43.59	54.00	-10.41	43.45	0.14	Average	126	9	6	5350.00	55.45	74.00	-18.55	55.31	0.14	Peak	126	9	7	10480.00	55.05	68.20	-13.15	46.55	8.50	Peak	100	60	8	15720.00	42.43	54.00	-11.57	37.48	4.95	Average	100	50	9	15720.00	55.40	74.00	-18.60	50.45	4.95	Peak	100	50
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
		dBuV/m			dBuV			cm	deg																																																																																																																		
1	5150.00	46.20	54.00	-7.80	45.55	0.65	Average	126	9																																																																																																																		
2	5150.00	56.97	74.00	-17.03	56.32	0.65	Peak	126	9																																																																																																																		
3 *	5240.00	111.79			111.45	0.34	Average	126	9																																																																																																																		
4 *	5240.00	123.99			123.65	0.34	Peak	126	9																																																																																																																		
5	5350.00	43.59	54.00	-10.41	43.45	0.14	Average	126	9																																																																																																																		
6	5350.00	55.45	74.00	-18.55	55.31	0.14	Peak	126	9																																																																																																																		
7	10480.00	55.05	68.20	-13.15	46.55	8.50	Peak	100	60																																																																																																																		
8	15720.00	42.43	54.00	-11.57	37.48	4.95	Average	100	50																																																																																																																		
9	15720.00	55.40	74.00	-18.60	50.45	4.95	Peak	100	50																																																																																																																		



Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>43.28</td><td>0.65</td><td>Average</td><td>103</td><td>120</td></tr><tr><td>2</td><td>5150.00</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>56.03</td><td>0.65</td><td>Peak</td><td>103</td><td>120</td></tr><tr><td>3 *</td><td>5260.00</td><td>104.55</td><td></td><td></td><td>104.28</td><td>0.27</td><td>Average</td><td>103</td><td>120</td></tr><tr><td>4 *</td><td>5260.00</td><td>116.80</td><td></td><td></td><td>116.53</td><td>0.27</td><td>Peak</td><td>103</td><td>120</td></tr><tr><td>5</td><td>5350.00</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>43.78</td><td>0.14</td><td>Average</td><td>103</td><td>120</td></tr><tr><td>6</td><td>5350.00</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>56.43</td><td>0.14</td><td>Peak</td><td>103</td><td>120</td></tr><tr><td>7</td><td>10520.00</td><td>54.70</td><td>68.20</td><td>-13.50</td><td>46.32</td><td>8.38</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>8</td><td>15780.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>37.15</td><td>4.74</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>9</td><td>15780.00</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>49.43</td><td>4.74</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.93	54.00	-10.07	43.28	0.65	Average	103	120	2	5150.00	56.68	74.00	-17.32	56.03	0.65	Peak	103	120	3 *	5260.00	104.55			104.28	0.27	Average	103	120	4 *	5260.00	116.80			116.53	0.27	Peak	103	120	5	5350.00	43.92	54.00	-10.08	43.78	0.14	Average	103	120	6	5350.00	56.57	74.00	-17.43	56.43	0.14	Peak	103	120	7	10520.00	54.70	68.20	-13.50	46.32	8.38	Peak	100	30	8	15780.00	41.89	54.00	-12.11	37.15	4.74	Average	100	40	9	15780.00	54.17	74.00	-19.83	49.43	4.74	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.93	54.00	-10.07	43.28	0.65	Average	103	120																																																																																														
2	5150.00	56.68	74.00	-17.32	56.03	0.65	Peak	103	120																																																																																														
3 *	5260.00	104.55			104.28	0.27	Average	103	120																																																																																														
4 *	5260.00	116.80			116.53	0.27	Peak	103	120																																																																																														
5	5350.00	43.92	54.00	-10.08	43.78	0.14	Average	103	120																																																																																														
6	5350.00	56.57	74.00	-17.43	56.43	0.14	Peak	103	120																																																																																														
7	10520.00	54.70	68.20	-13.50	46.32	8.38	Peak	100	30																																																																																														
8	15780.00	41.89	54.00	-12.11	37.15	4.74	Average	100	40																																																																																														
9	15780.00	54.17	74.00	-19.83	49.43	4.74	Peak	100	40																																																																																														




Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>43.42</td><td>0.65</td><td>Average</td><td>123</td><td>11</td></tr><tr><td>2</td><td>5150.00</td><td>56.87</td><td>74.00</td><td>-17.13</td><td>56.22</td><td>0.65</td><td>Peak</td><td>123</td><td>11</td></tr><tr><td>3 *</td><td>5260.00</td><td>105.86</td><td></td><td></td><td>105.59</td><td>0.27</td><td>Average</td><td>123</td><td>11</td></tr><tr><td>4 *</td><td>5260.00</td><td>118.14</td><td></td><td></td><td>117.87</td><td>0.27</td><td>Peak</td><td>123</td><td>11</td></tr><tr><td>5</td><td>5350.00</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>44.15</td><td>0.14</td><td>Average</td><td>123</td><td>11</td></tr><tr><td>6</td><td>5350.00</td><td>56.89</td><td>74.00</td><td>-17.11</td><td>56.75</td><td>0.14</td><td>Peak</td><td>123</td><td>11</td></tr><tr><td>7</td><td>10520.00</td><td>54.58</td><td>68.20</td><td>-13.62</td><td>46.20</td><td>8.38</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>8</td><td>15780.00</td><td>41.95</td><td>54.00</td><td>-12.05</td><td>37.21</td><td>4.74</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>9</td><td>15780.00</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>49.56</td><td>4.74</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	44.07	54.00	-9.93	43.42	0.65	Average	123	11	2	5150.00	56.87	74.00	-17.13	56.22	0.65	Peak	123	11	3 *	5260.00	105.86			105.59	0.27	Average	123	11	4 *	5260.00	118.14			117.87	0.27	Peak	123	11	5	5350.00	44.29	54.00	-9.71	44.15	0.14	Average	123	11	6	5350.00	56.89	74.00	-17.11	56.75	0.14	Peak	123	11	7	10520.00	54.58	68.20	-13.62	46.20	8.38	Peak	100	35	8	15780.00	41.95	54.00	-12.05	37.21	4.74	Average	100	55	9	15780.00	54.30	74.00	-19.70	49.56	4.74	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
		dBuV/m			dBuV			cm	deg																																																																																																																		
1	5150.00	44.07	54.00	-9.93	43.42	0.65	Average	123	11																																																																																																																		
2	5150.00	56.87	74.00	-17.13	56.22	0.65	Peak	123	11																																																																																																																		
3 *	5260.00	105.86			105.59	0.27	Average	123	11																																																																																																																		
4 *	5260.00	118.14			117.87	0.27	Peak	123	11																																																																																																																		
5	5350.00	44.29	54.00	-9.71	44.15	0.14	Average	123	11																																																																																																																		
6	5350.00	56.89	74.00	-17.11	56.75	0.14	Peak	123	11																																																																																																																		
7	10520.00	54.58	68.20	-13.62	46.20	8.38	Peak	100	35																																																																																																																		
8	15780.00	41.95	54.00	-12.05	37.21	4.74	Average	100	55																																																																																																																		
9	15780.00	54.30	74.00	-19.70	49.56	4.74	Peak	100	55																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) <			

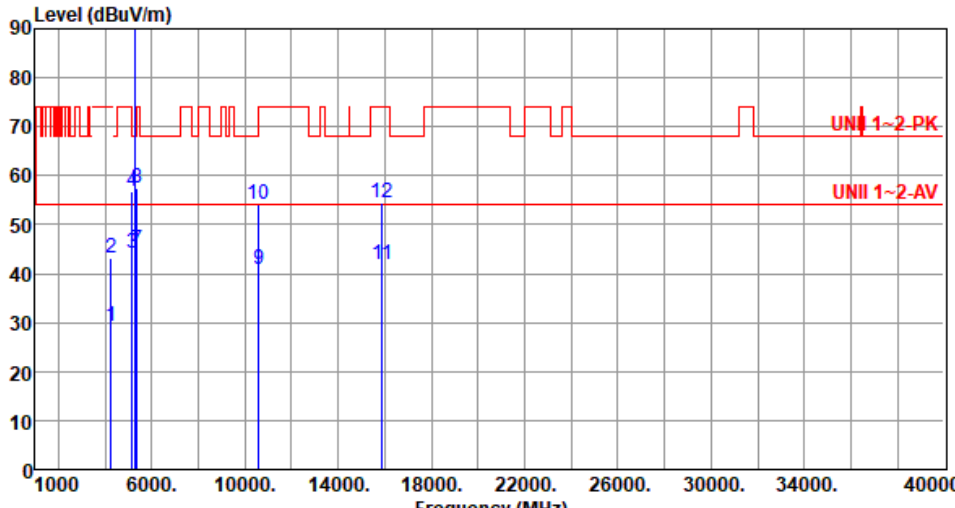


Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4240.00	29.25	54.00	-24.75	30.48	-1.23	Average	100	24
2	4240.00	43.31	74.00	-30.69	44.54	-1.23	Peak	100	24
3	5150.00	44.21	54.00	-9.79	43.56	0.65	Average	126	15
4	5150.00	56.77	74.00	-17.23	56.12	0.65	Peak	126	15
5 *	5300.00	105.64			105.43	0.21	Average	126	15
6 *	5300.00	118.43			118.22	0.21	Peak	126	15
7	5350.00	44.79	54.00	-9.21	44.65	0.14	Average	126	15
8	5350.00	57.29	74.00	-16.71	57.15	0.14	Peak	126	15
9	10600.00	40.88	54.00	-13.12	32.55	8.33	Average	100	40
10	10600.00	54.22	74.00	-19.78	45.89	8.33	Peak	100	40
11	15900.00	41.88	54.00	-12.12	37.16	4.72	Average	100	60
12	15900.00	54.59	74.00	-19.41	49.87	4.72	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5320.00</td><td>104.64</td><td></td><td></td><td>104.45</td><td>0.19</td><td>Average</td><td>105</td><td>123</td></tr><tr><td>2</td><td>*</td><td>5320.00</td><td>117.24</td><td></td><td></td><td>117.05</td><td>0.19</td><td>Peak</td><td>105</td><td>123</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>45.21</td><td>0.14</td><td>Average</td><td>105</td><td>123</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>57.25</td><td>74.00</td><td>-16.75</td><td>57.11</td><td>0.14</td><td>Peak</td><td>105</td><td>123</td></tr><tr><td>5</td><td></td><td>10640.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>32.46</td><td>8.39</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td></td><td>10640.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>45.88</td><td>8.39</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>7</td><td></td><td>15960.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>37.11</td><td>4.63</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>8</td><td></td><td>15960.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>49.48</td><td>4.63</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	5320.00	104.64			104.45	0.19	Average	105	123	2	*	5320.00	117.24			117.05	0.19	Peak	105	123	3		5350.00	45.35	54.00	-8.65	45.21	0.14	Average	105	123	4		5350.00	57.25	74.00	-16.75	57.11	0.14	Peak	105	123	5		10640.00	40.85	54.00	-13.15	32.46	8.39	Average	100	40	6		10640.00	54.27	74.00	-19.73	45.88	8.39	Peak	100	40	7		15960.00	41.74	54.00	-12.26	37.11	4.63	Average	100	30	8		15960.00	54.11	74.00	-19.89	49.48	4.63	Peak	100	30
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	5320.00	104.64			104.45	0.19	Average	105	123																																																																																																																		
2	*	5320.00	117.24			117.05	0.19	Peak	105	123																																																																																																																		
3		5350.00	45.35	54.00	-8.65	45.21	0.14	Average	105	123																																																																																																																		
4		5350.00	57.25	74.00	-16.75	57.11	0.14	Peak	105	123																																																																																																																		
5		10640.00	40.85	54.00	-13.15	32.46	8.39	Average	100	40																																																																																																																		
6		10640.00	54.27	74.00	-19.73	45.88	8.39	Peak	100	40																																																																																																																		
7		15960.00	41.74	54.00	-12.26	37.11	4.63	Average	100	30																																																																																																																		
8		15960.00	54.11	74.00	-19.89	49.48	4.63	Peak	100	30																																																																																																																		

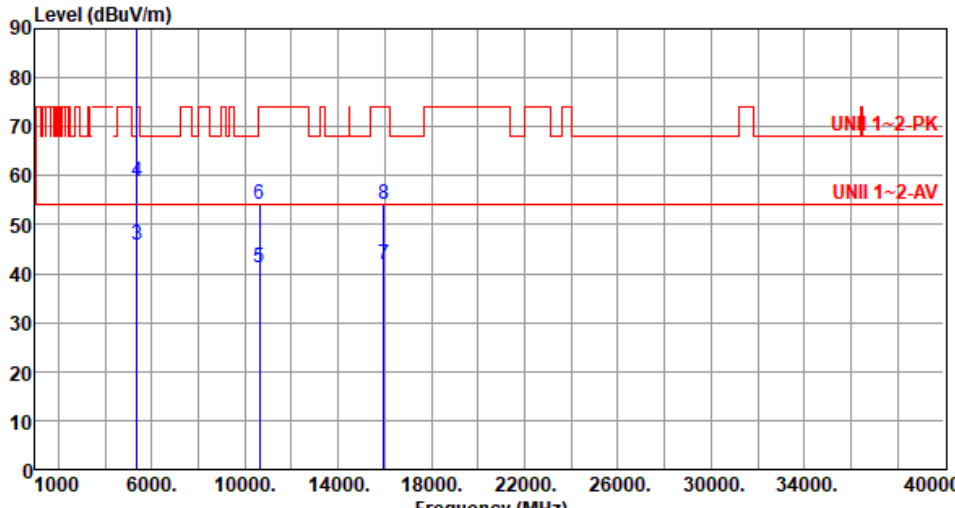


Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5320.00</td><td>105.69</td><td></td><td></td><td>105.50</td><td>0.19</td><td>Average</td><td>127</td><td>13</td></tr><tr><td>2 *</td><td>5320.00</td><td>118.34</td><td></td><td></td><td>118.15</td><td>0.19</td><td>Peak</td><td>127</td><td>13</td></tr><tr><td>3</td><td>5350.00</td><td>45.98</td><td>54.00</td><td>-8.02</td><td>45.84</td><td>0.14</td><td>Average</td><td>127</td><td>13</td></tr><tr><td>4</td><td>5350.00</td><td>58.81</td><td>74.00</td><td>-15.19</td><td>58.67</td><td>0.14</td><td>Peak</td><td>127</td><td>13</td></tr><tr><td>5</td><td>10640.00</td><td>41.05</td><td>54.00</td><td>-12.95</td><td>32.66</td><td>8.39</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>10640.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>45.90</td><td>8.39</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>7</td><td>15960.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>37.21</td><td>4.63</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>8</td><td>15960.00</td><td>54.28</td><td>74.00</td><td>-19.72</td><td>49.65</td><td>4.63</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5320.00	105.69			105.50	0.19	Average	127	13	2 *	5320.00	118.34			118.15	0.19	Peak	127	13	3	5350.00	45.98	54.00	-8.02	45.84	0.14	Average	127	13	4	5350.00	58.81	74.00	-15.19	58.67	0.14	Peak	127	13	5	10640.00	41.05	54.00	-12.95	32.66	8.39	Average	100	31	6	10640.00	54.29	74.00	-19.71	45.90	8.39	Peak	100	31	7	15960.00	41.84	54.00	-12.16	37.21	4.63	Average	100	20	8	15960.00	54.28	74.00	-19.72	49.65	4.63	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5320.00	105.69			105.50	0.19	Average	127	13																																																																																																								
2 *	5320.00	118.34			118.15	0.19	Peak	127	13																																																																																																								
3	5350.00	45.98	54.00	-8.02	45.84	0.14	Average	127	13																																																																																																								
4	5350.00	58.81	74.00	-15.19	58.67	0.14	Peak	127	13																																																																																																								
5	10640.00	41.05	54.00	-12.95	32.66	8.39	Average	100	31																																																																																																								
6	10640.00	54.29	74.00	-19.71	45.90	8.39	Peak	100	31																																																																																																								
7	15960.00	41.84	54.00	-12.16	37.21	4.63	Average	100	20																																																																																																								
8	15960.00	54.28	74.00	-19.72	49.65	4.63	Peak	100	20																																																																																																								

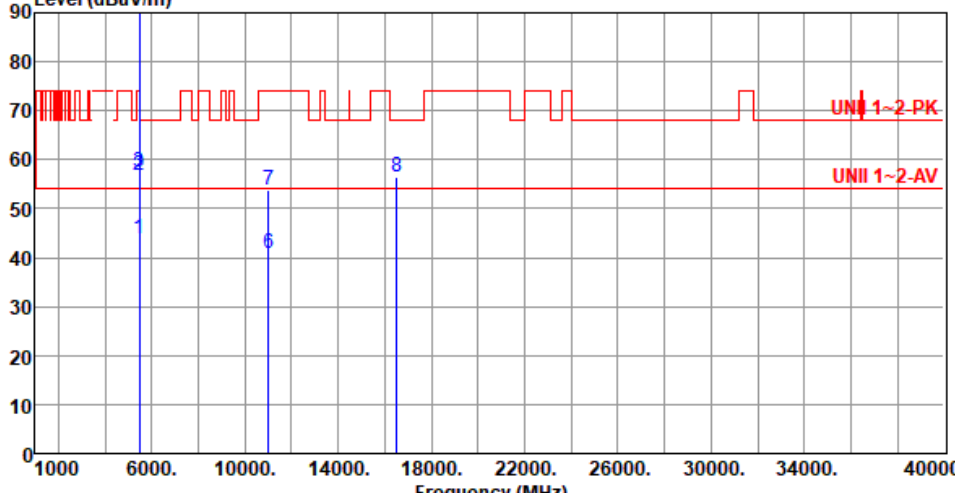

Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>43.45</td><td>0.50</td><td>Average</td><td>211</td><td>336</td></tr><tr><td>2</td><td>5460.00</td><td>56.65</td><td>74.00</td><td>-17.35</td><td>56.15</td><td>0.50</td><td>Peak</td><td>211</td><td>336</td></tr><tr><td>3</td><td>5470.00</td><td>57.31</td><td>68.20</td><td>-10.89</td><td>56.79</td><td>0.52</td><td>Peak</td><td>211</td><td>336</td></tr><tr><td>4 *</td><td>5500.00</td><td>103.74</td><td></td><td></td><td>103.15</td><td>0.59</td><td>Average</td><td>211</td><td>336</td></tr><tr><td>5 *</td><td>5500.00</td><td>116.17</td><td></td><td></td><td>115.58</td><td>0.59</td><td>Peak</td><td>211</td><td>336</td></tr><tr><td>6</td><td>11000.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>32.28</td><td>8.70</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>7</td><td>11000.00</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>45.20</td><td>8.70</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>8</td><td>16500.00</td><td>56.41</td><td>68.20</td><td>-11.79</td><td>50.15</td><td>6.26</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.95	54.00	-10.05	43.45	0.50	Average	211	336	2	5460.00	56.65	74.00	-17.35	56.15	0.50	Peak	211	336	3	5470.00	57.31	68.20	-10.89	56.79	0.52	Peak	211	336	4 *	5500.00	103.74			103.15	0.59	Average	211	336	5 *	5500.00	116.17			115.58	0.59	Peak	211	336	6	11000.00	40.98	54.00	-13.02	32.28	8.70	Average	100	50	7	11000.00	53.90	74.00	-20.10	45.20	8.70	Peak	100	50	8	16500.00	56.41	68.20	-11.79	50.15	6.26	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	43.95	54.00	-10.05	43.45	0.50	Average	211	336																																																																																				
2	5460.00	56.65	74.00	-17.35	56.15	0.50	Peak	211	336																																																																																				
3	5470.00	57.31	68.20	-10.89	56.79	0.52	Peak	211	336																																																																																				
4 *	5500.00	103.74			103.15	0.59	Average	211	336																																																																																				
5 *	5500.00	116.17			115.58	0.59	Peak	211	336																																																																																				
6	11000.00	40.98	54.00	-13.02	32.28	8.70	Average	100	50																																																																																				
7	11000.00	53.90	74.00	-20.10	45.20	8.70	Peak	100	50																																																																																				
8	16500.00	56.41	68.20	-11.79	50.15	6.26	Peak	100	40																																																																																				

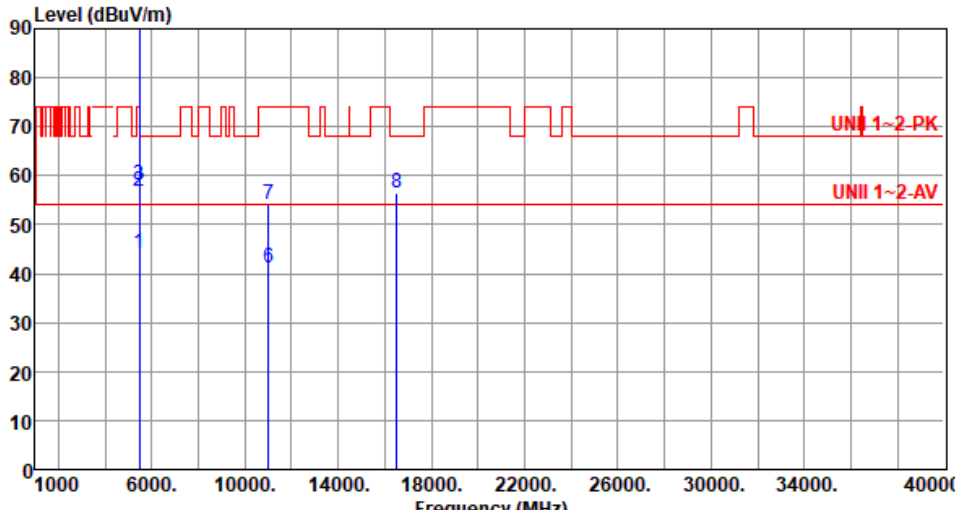

Modulation	be EHT20	Test Freq. (MHz)	5500						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.15	54.00	-9.85	43.65	0.50	Average	198	331
2	5460.00	56.95	74.00	-17.05	56.45	0.50	Peak	198	331
3	5470.00	58.17	68.20	-10.03	57.65	0.52	Peak	198	331
4 *	5500.00	105.83			105.24	0.59	Average	198	331
5 *	5500.00	118.08			117.49	0.59	Peak	198	331
6	11000.00	41.15	54.00	-12.85	32.45	8.70	Average	100	60
7	11000.00	54.16	74.00	-19.84	45.46	8.70	Peak	100	60
8	16500.00	56.59	68.20	-11.61	50.33	6.26	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m)			




Modulation	be EHT20	Test Freq. (MHz)	5700																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																													
Level (dBuV/m) UNI 1-2-PK UNI 1-2-AV <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5700.00</td><td>104.00</td><td></td><td>103.10</td><td>0.90</td><td>Average</td><td>211</td><td>336</td></tr><tr><td>2</td><td>*</td><td>5700.00</td><td>116.34</td><td></td><td>115.44</td><td>0.90</td><td>Peak</td><td>211</td><td>336</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>65.10</td><td>68.20</td><td>-3.10</td><td>64.15</td><td>0.95</td><td>Peak</td><td>211</td></tr><tr><td>4</td><td></td><td>11400.00</td><td>40.54</td><td>54.00</td><td>-13.46</td><td>32.48</td><td>8.06</td><td>Average</td><td>100</td></tr><tr><td>5</td><td></td><td>11400.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>45.46</td><td>8.06</td><td>Peak</td><td>100</td></tr><tr><td>6</td><td></td><td>17100.00</td><td>56.35</td><td>68.20</td><td>-11.85</td><td>50.58</td><td>5.77</td><td>Peak</td><td>100</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	*	5700.00	104.00		103.10	0.90	Average	211	336	2	*	5700.00	116.34		115.44	0.90	Peak	211	336	3		5725.00	65.10	68.20	-3.10	64.15	0.95	Peak	211	4		11400.00	40.54	54.00	-13.46	32.48	8.06	Average	100	5		11400.00	53.52	74.00	-20.48	45.46	8.06	Peak	100	6		17100.00	56.35	68.20	-11.85	50.58	5.77	Peak	100
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
								cm	deg																																																																																				
1	*	5700.00	104.00		103.10	0.90	Average	211	336																																																																																				
2	*	5700.00	116.34		115.44	0.90	Peak	211	336																																																																																				
3		5725.00	65.10	68.20	-3.10	64.15	0.95	Peak	211																																																																																				
4		11400.00	40.54	54.00	-13.46	32.48	8.06	Average	100																																																																																				
5		11400.00	53.52	74.00	-20.48	45.46	8.06	Peak	100																																																																																				
6		17100.00	56.35	68.20	-11.85	50.58	5.77	Peak	100																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m)			

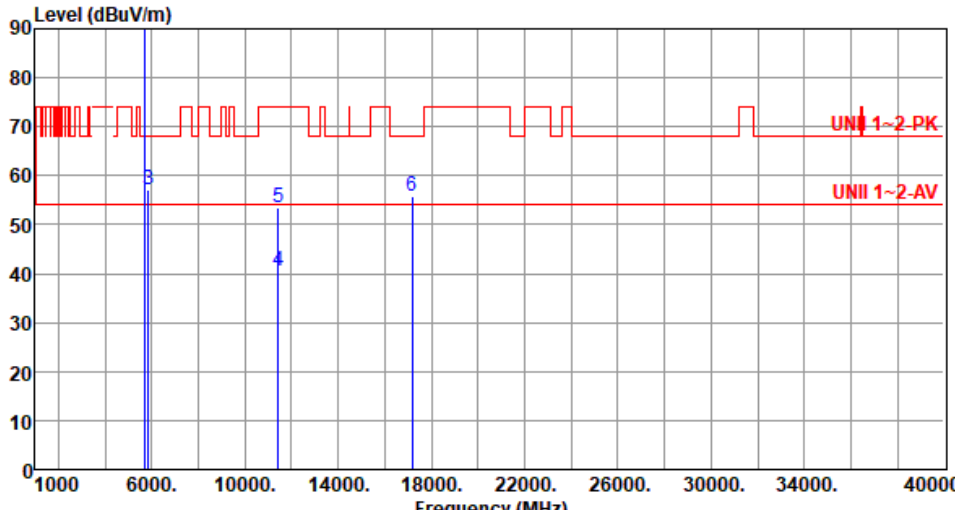


Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>104.50</td><td></td><td></td><td>103.56</td><td>0.94</td><td>Average</td><td>212</td><td>334</td></tr><tr><td>2</td><td>5720.00</td><td>116.62</td><td></td><td></td><td>115.68</td><td>0.94</td><td>Peak</td><td>212</td><td>334</td></tr><tr><td>3</td><td>5850.00</td><td>57.23</td><td>68.20</td><td>-10.97</td><td>56.15</td><td>1.08</td><td>Peak</td><td>212</td><td>334</td></tr><tr><td>4</td><td>11440.00</td><td>40.45</td><td>54.00</td><td>-13.55</td><td>32.31</td><td>8.14</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>5</td><td>11440.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>45.46</td><td>8.14</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>6</td><td>17160.00</td><td>55.71</td><td>68.20</td><td>-12.49</td><td>50.25</td><td>5.46</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5720.00	104.50			103.56	0.94	Average	212	334	2	5720.00	116.62			115.68	0.94	Peak	212	334	3	5850.00	57.23	68.20	-10.97	56.15	1.08	Peak	212	334	4	11440.00	40.45	54.00	-13.55	32.31	8.14	Average	100	40	5	11440.00	53.60	74.00	-20.40	45.46	8.14	Peak	100	40	6	17160.00	55.71	68.20	-12.49	50.25	5.46	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	5720.00	104.50			103.56	0.94	Average	212	334																																																																																				
2	5720.00	116.62			115.68	0.94	Peak	212	334																																																																																				
3	5850.00	57.23	68.20	-10.97	56.15	1.08	Peak	212	334																																																																																				
4	11440.00	40.45	54.00	-13.55	32.31	8.14	Average	100	40																																																																																				
5	11440.00	53.60	74.00	-20.40	45.46	8.14	Peak	100	40																																																																																				
6	17160.00	55.71	68.20	-12.49	50.25	5.46	Peak	100	30																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													




Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) <			

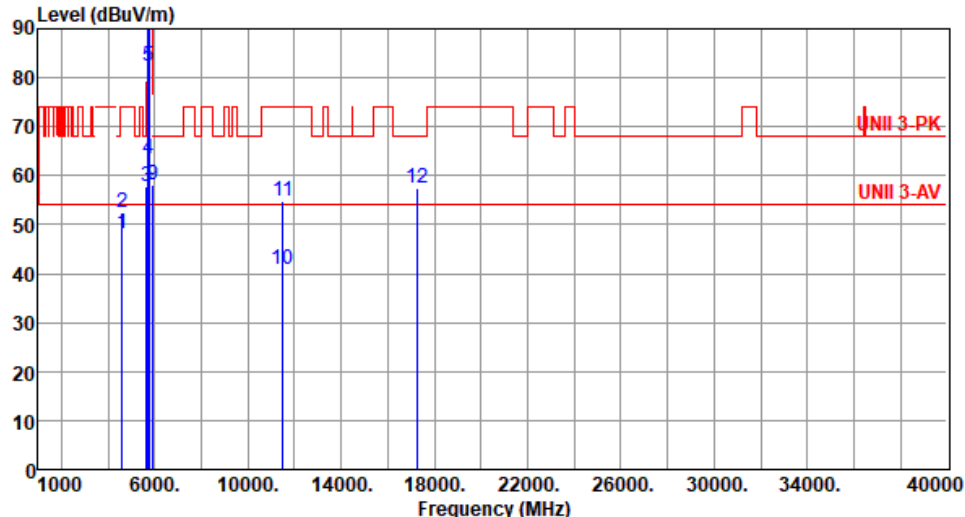

Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4596.00	48.11	54.00	-5.89	48.37	-0.26	Average	126	125
2	4596.00	52.56	74.00	-21.44	52.82	-0.26	Peak	126	125
3	5650.00	57.91	68.20	-10.29	57.25	0.66	Peak	100	333
4	5700.00	63.47	105.20	-41.73	62.57	0.90	Peak	100	333
5	5720.00	82.39	110.80	-28.41	81.45	0.94	Peak	100	333
6	5725.00	90.07	122.20	-32.13	89.12	0.95	Peak	100	333
7 *	5745.00	113.26			112.26	1.00	Average	100	333
8 *	5745.00	124.45			123.45	1.00	Peak	100	333
9	5925.00	58.06	68.20	-10.14	56.62	1.44	Peak	100	333
10	11490.00	41.01	54.00	-12.99	32.62	8.39	Average	100	60
11	11490.00	54.87	74.00	-19.13	46.48	8.39	Peak	100	60
12	17235.00	57.59	68.20	-10.61	52.15	5.44	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

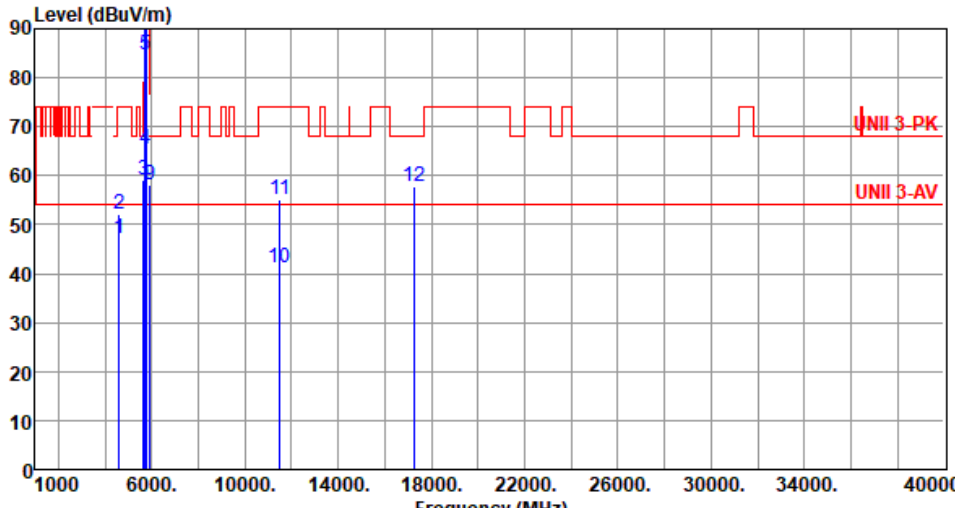

Modulation	be EHT20	Test Freq. (MHz)	5745						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4596.00	47.02	54.00	-6.98	47.28	-0.26	Average	176	14
2	4596.00	52.28	74.00	-21.72	52.54	-0.26	Peak	176	14
3	5650.00	59.22	68.20	-8.98	58.56	0.66	Peak	190	331
4	5700.00	65.48	105.20	-39.72	64.58	0.90	Peak	190	331
5	5720.00	84.57	110.80	-26.23	83.63	0.94	Peak	190	331
6	5725.00	90.99	122.20	-31.21	90.04	0.95	Peak	190	331
7 *	5745.00	115.45			114.45	1.00	Average	190	331
8 *	5745.00	126.33			125.33	1.00	Peak	190	331
9	5925.00	58.19	68.20	-10.01	56.75	1.44	Peak	190	331
10	11490.00	41.14	54.00	-12.86	32.75	8.39	Average	100	40
11	11490.00	55.05	74.00	-18.95	46.66	8.39	Peak	100	40
12	17235.00	57.80	68.20	-10.40	52.36	5.44	Peak	100	30

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5785						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4628.00	50.30	54.00	-3.70	50.45	-0.15	Average	116	128
2	4628.00	54.42	74.00	-19.58	54.57	-0.15	Peak	116	128
3	5650.00	56.87	68.20	-11.33	56.21	0.66	Peak	105	332
4 *	5785.00	113.17			112.13	1.04	Average	105	332
5 *	5785.00	124.41			123.37	1.04	Peak	105	332
6	5925.00	57.86	68.20	-10.34	56.42	1.44	Peak	105	332
7	11570.00	40.97	54.00	-13.03	32.64	8.33	Average	100	40
8	11570.00	54.91	74.00	-19.09	46.58	8.33	Peak	100	40
9	17355.00	58.13	68.20	-10.07	52.29	5.84	Peak	100	15


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency

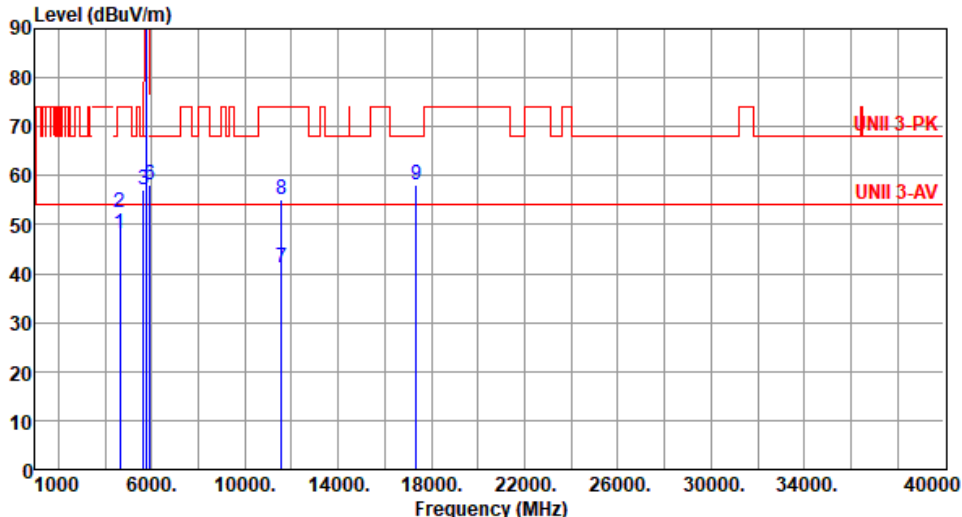


Modulation	be EHT20	Test Freq. (MHz)	5785						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4628.00	48.09	54.00	-5.91	48.24	-0.15	Average	175	8
2	4628.00	52.59	74.00	-21.41	52.74	-0.15	Peak	175	8
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	192	334
4 *	5785.00	115.29			114.25	1.04	Average	192	334
5 *	5785.00	126.47			125.43	1.04	Peak	192	334
6	5925.00	57.99	68.20	-10.21	56.55	1.44	Peak	192	334
7	11570.00	41.17	54.00	-12.83	32.84	8.33	Average	100	60
8	11570.00	55.10	74.00	-18.90	46.77	8.33	Peak	100	60
9	17355.00	58.26	68.20	-9.94	52.42	5.84	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20		Test Freq. (MHz)		5825				
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4660.00	51.54	54.00	-2.46	51.58	-0.04	Average	125	127
2	4660.00	55.55	74.00	-18.45	55.59	-0.04	Peak	125	127
3	5650.00	56.89	68.20	-11.31	56.23	0.66	Peak	100	333
4 *	5825.00	113.48			112.42	1.06	Average	100	333
5 *	5825.00	124.64			123.58	1.06	Peak	100	333
6	5850.00	81.53	122.20	-40.67	80.45	1.08	Peak	100	333
7	5855.00	73.67	110.80	-37.13	72.55	1.12	Peak	100	333
8	5875.00	62.81	105.20	-42.39	61.56	1.25	Peak	100	333
9	5925.00	57.99	68.20	-10.21	56.55	1.44	Peak	100	333
10	11650.00	40.54	54.00	-13.46	32.62	7.92	Average	100	35
11	11650.00	54.34	74.00	-19.66	46.42	7.92	Peak	100	35
12	17475.00	58.48	68.20	-9.72	52.16	6.32	Peak	100	50
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

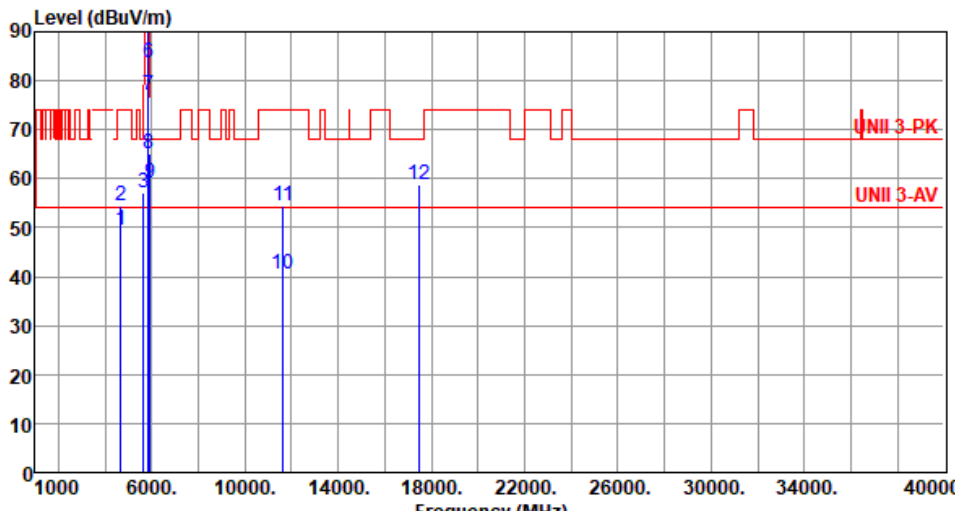


Modulation	be EHT20	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4660.00	49.38	54.00	-4.62	49.42	-0.04	Average	177	9
2	4660.00	54.56	74.00	-19.44	54.60	-0.04	Peak	177	9
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	186	333
4 *	5825.00	115.62			114.56	1.06	Average	186	333
5 *	5825.00	126.84			125.78	1.06	Peak	186	333
6	5850.00	83.68	122.20	-38.52	82.60	1.08	Peak	186	333
7	5855.00	77.01	110.80	-33.79	75.89	1.12	Peak	186	333
8	5875.00	65.16	105.20	-40.04	63.91	1.25	Peak	186	333
9	5925.00	59.01	68.20	-9.19	57.57	1.44	Peak	186	333
10	11650.00	40.67	54.00	-13.33	32.75	7.92	Average	100	20
11	11650.00	54.51	74.00	-19.49	46.59	7.92	Peak	100	20
12	17475.00	58.62	68.20	-9.58	52.30	6.32	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5845																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4676.00</td><td>53.14</td><td>54.00</td><td>-0.86</td><td>53.15</td><td>-0.01</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>4676.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>56.34</td><td>-0.01</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>5650.00</td><td>56.68</td><td>68.20</td><td>-11.52</td><td>56.02</td><td>0.66</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>4 *</td><td>5845.00</td><td>111.30</td><td></td><td></td><td>110.22</td><td>1.08</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>5 *</td><td>5845.00</td><td>122.50</td><td></td><td></td><td>121.42</td><td>1.08</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>6</td><td>5895.00</td><td>48.64</td><td>110.20</td><td>-61.56</td><td>47.26</td><td>1.38</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>7</td><td>5895.00</td><td>59.84</td><td>130.20</td><td>-70.36</td><td>58.46</td><td>1.38</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>8</td><td>5925.00</td><td>47.32</td><td>88.20</td><td>-40.88</td><td>45.88</td><td>1.44</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>9</td><td>5925.00</td><td>53.73</td><td>108.20</td><td>-54.47</td><td>52.29</td><td>1.44</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>10</td><td>11690.00</td><td>40.97</td><td>54.00</td><td>-13.03</td><td>33.03</td><td>7.94</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>11</td><td>11690.00</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>46.05</td><td>7.94</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>12</td><td>17535.00</td><td>58.14</td><td>68.20</td><td>-10.06</td><td>51.48</td><td>6.66</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4676.00	53.14	54.00	-0.86	53.15	-0.01	Average	100	126	2	4676.00	56.33	74.00	-17.67	56.34	-0.01	Peak	100	126	3	5650.00	56.68	68.20	-11.52	56.02	0.66	Peak	100	334	4 *	5845.00	111.30			110.22	1.08	Average	100	334	5 *	5845.00	122.50			121.42	1.08	Peak	100	334	6	5895.00	48.64	110.20	-61.56	47.26	1.38	Average	100	334	7	5895.00	59.84	130.20	-70.36	58.46	1.38	Peak	100	334	8	5925.00	47.32	88.20	-40.88	45.88	1.44	Average	100	334	9	5925.00	53.73	108.20	-54.47	52.29	1.44	Peak	100	334	10	11690.00	40.97	54.00	-13.03	33.03	7.94	Average	100	30	11	11690.00	53.99	74.00	-20.01	46.05	7.94	Peak	100	30	12	17535.00	58.14	68.20	-10.06	51.48	6.66	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4676.00	53.14	54.00	-0.86	53.15	-0.01	Average	100	126																																																																																																																												
2	4676.00	56.33	74.00	-17.67	56.34	-0.01	Peak	100	126																																																																																																																												
3	5650.00	56.68	68.20	-11.52	56.02	0.66	Peak	100	334																																																																																																																												
4 *	5845.00	111.30			110.22	1.08	Average	100	334																																																																																																																												
5 *	5845.00	122.50			121.42	1.08	Peak	100	334																																																																																																																												
6	5895.00	48.64	110.20	-61.56	47.26	1.38	Average	100	334																																																																																																																												
7	5895.00	59.84	130.20	-70.36	58.46	1.38	Peak	100	334																																																																																																																												
8	5925.00	47.32	88.20	-40.88	45.88	1.44	Average	100	334																																																																																																																												
9	5925.00	53.73	108.20	-54.47	52.29	1.44	Peak	100	334																																																																																																																												
10	11690.00	40.97	54.00	-13.03	33.03	7.94	Average	100	30																																																																																																																												
11	11690.00	53.99	74.00	-20.01	46.05	7.94	Peak	100	30																																																																																																																												
12	17535.00	58.14	68.20	-10.06	51.48	6.66	Peak	100	90																																																																																																																												

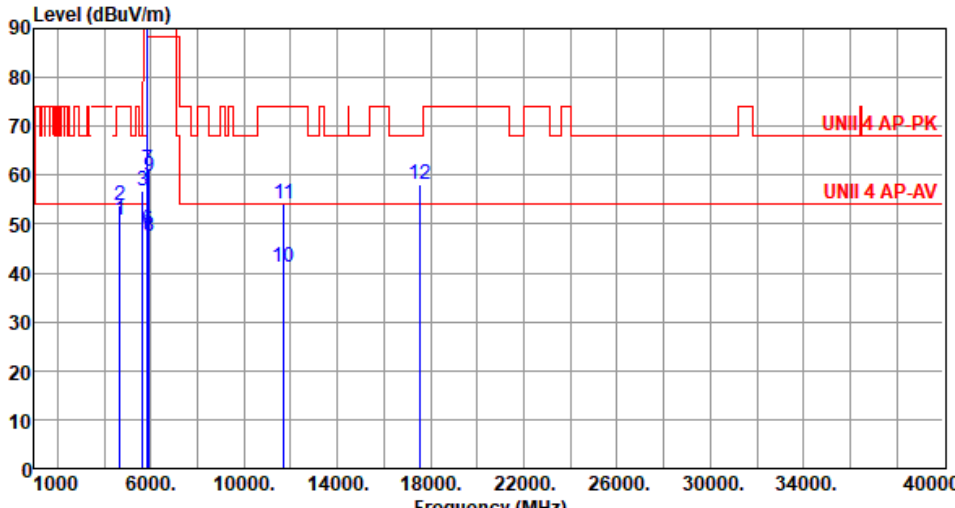

Modulation	be EHT20	Test Freq. (MHz)	5845						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4676.00	50.78	54.00	-3.22	50.79	-0.01	Average	137	1
2	4676.00	53.96	74.00	-20.04	53.97	-0.01	Peak	137	1
3	5650.00	56.78	68.20	-11.42	56.12	0.66	Peak	187	329
4 *	5845.00	113.51			112.43	1.08	Average	187	329
5 *	5845.00	124.26			123.18	1.08	Peak	187	329
6	5895.00	48.95	110.20	-61.25	47.57	1.38	Average	187	329
7	5895.00	61.22	130.20	-68.98	59.84	1.38	Peak	187	329
8	5925.00	47.60	88.20	-40.60	46.16	1.44	Average	187	329
9	5925.00	59.70	108.20	-48.50	58.26	1.44	Peak	187	329
10	11690.00	41.09	54.00	-12.91	33.15	7.94	Average	100	40
11	11690.00	54.19	74.00	-19.81	46.25	7.94	Peak	100	40
12	17535.00	58.02	68.20	-10.18	51.36	6.66	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5865																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBUV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4692.00</td><td>53.43</td><td>54.00</td><td>-0.57</td><td>53.41</td><td>0.02</td><td>Average</td><td>125</td><td>153</td></tr><tr><td>2</td><td>4692.00</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>56.12</td><td>0.02</td><td>Peak</td><td>125</td><td>153</td></tr><tr><td>3</td><td>5650.00</td><td>56.77</td><td>68.20</td><td>-11.43</td><td>56.11</td><td>0.66</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>4 *</td><td>5865.00</td><td>107.63</td><td></td><td></td><td>106.44</td><td>1.19</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>5 *</td><td>5865.00</td><td>118.70</td><td></td><td></td><td>117.51</td><td>1.19</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>6</td><td>5895.00</td><td>48.26</td><td>110.20</td><td>-61.94</td><td>46.88</td><td>1.38</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>7</td><td>5895.00</td><td>60.53</td><td>130.20</td><td>-69.67</td><td>59.15</td><td>1.38</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>8</td><td>5925.00</td><td>46.59</td><td>88.20</td><td>-41.61</td><td>45.15</td><td>1.44</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>9</td><td>5925.00</td><td>58.10</td><td>108.20</td><td>-50.10</td><td>56.66</td><td>1.44</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>10</td><td>11730.00</td><td>40.84</td><td>54.00</td><td>-13.16</td><td>33.18</td><td>7.66</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>11</td><td>11730.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>46.15</td><td>7.66</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>12</td><td>17595.00</td><td>58.51</td><td>68.20</td><td>-9.69</td><td>51.52</td><td>6.99</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4692.00	53.43	54.00	-0.57	53.41	0.02	Average	125	153	2	4692.00	56.14	74.00	-17.86	56.12	0.02	Peak	125	153	3	5650.00	56.77	68.20	-11.43	56.11	0.66	Peak	100	334	4 *	5865.00	107.63			106.44	1.19	Average	100	334	5 *	5865.00	118.70			117.51	1.19	Peak	100	334	6	5895.00	48.26	110.20	-61.94	46.88	1.38	Average	100	334	7	5895.00	60.53	130.20	-69.67	59.15	1.38	Peak	100	334	8	5925.00	46.59	88.20	-41.61	45.15	1.44	Average	100	334	9	5925.00	58.10	108.20	-50.10	56.66	1.44	Peak	100	334	10	11730.00	40.84	54.00	-13.16	33.18	7.66	Average	100	30	11	11730.00	53.81	74.00	-20.19	46.15	7.66	Peak	100	30	12	17595.00	58.51	68.20	-9.69	51.52	6.99	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4692.00	53.43	54.00	-0.57	53.41	0.02	Average	125	153																																																																																																																												
2	4692.00	56.14	74.00	-17.86	56.12	0.02	Peak	125	153																																																																																																																												
3	5650.00	56.77	68.20	-11.43	56.11	0.66	Peak	100	334																																																																																																																												
4 *	5865.00	107.63			106.44	1.19	Average	100	334																																																																																																																												
5 *	5865.00	118.70			117.51	1.19	Peak	100	334																																																																																																																												
6	5895.00	48.26	110.20	-61.94	46.88	1.38	Average	100	334																																																																																																																												
7	5895.00	60.53	130.20	-69.67	59.15	1.38	Peak	100	334																																																																																																																												
8	5925.00	46.59	88.20	-41.61	45.15	1.44	Average	100	334																																																																																																																												
9	5925.00	58.10	108.20	-50.10	56.66	1.44	Peak	100	334																																																																																																																												
10	11730.00	40.84	54.00	-13.16	33.18	7.66	Average	100	30																																																																																																																												
11	11730.00	53.81	74.00	-20.19	46.15	7.66	Peak	100	30																																																																																																																												
12	17595.00	58.51	68.20	-9.69	51.52	6.99	Peak	100	60																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	be EHT20	Test Freq. (MHz)	5865
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5885																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4708.00</td><td>53.86</td><td>54.00</td><td>-0.14</td><td>53.83</td><td>0.03</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>2</td><td>4708.00</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>56.42</td><td>0.03</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>3</td><td>5650.00</td><td>56.81</td><td>68.20</td><td>-11.39</td><td>56.15</td><td>0.66</td><td>Peak</td><td>100</td><td>336</td></tr><tr><td>4 *</td><td>5885.00</td><td>107.86</td><td></td><td></td><td>106.55</td><td>1.31</td><td>Average</td><td>100</td><td>336</td></tr><tr><td>5 *</td><td>5885.00</td><td>119.67</td><td></td><td></td><td>118.36</td><td>1.31</td><td>Peak</td><td>100</td><td>336</td></tr><tr><td>6</td><td>5895.00</td><td>91.53</td><td>110.20</td><td>-18.67</td><td>90.15</td><td>1.38</td><td>Average</td><td>100</td><td>323</td></tr><tr><td>7</td><td>5895.00</td><td>104.92</td><td>130.20</td><td>-25.28</td><td>103.54</td><td>1.38</td><td>Peak</td><td>100</td><td>323</td></tr><tr><td>8</td><td>5925.00</td><td>46.69</td><td>88.20</td><td>-41.51</td><td>45.25</td><td>1.44</td><td>Average</td><td>100</td><td>323</td></tr><tr><td>9</td><td>5925.00</td><td>57.70</td><td>108.20</td><td>-50.50</td><td>56.26</td><td>1.44</td><td>Peak</td><td>100</td><td>323</td></tr><tr><td>10</td><td>11770.00</td><td>40.55</td><td>54.00</td><td>-13.45</td><td>33.15</td><td>7.40</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>11</td><td>11770.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>46.23</td><td>7.40</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>12</td><td>17655.00</td><td>58.50</td><td>68.20</td><td>-9.70</td><td>51.26</td><td>7.24</td><td>Peak</td><td>100</td><td>25</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4708.00	53.86	54.00	-0.14	53.83	0.03	Average	100	142	2	4708.00	56.45	74.00	-17.55	56.42	0.03	Peak	100	142	3	5650.00	56.81	68.20	-11.39	56.15	0.66	Peak	100	336	4 *	5885.00	107.86			106.55	1.31	Average	100	336	5 *	5885.00	119.67			118.36	1.31	Peak	100	336	6	5895.00	91.53	110.20	-18.67	90.15	1.38	Average	100	323	7	5895.00	104.92	130.20	-25.28	103.54	1.38	Peak	100	323	8	5925.00	46.69	88.20	-41.51	45.25	1.44	Average	100	323	9	5925.00	57.70	108.20	-50.50	56.26	1.44	Peak	100	323	10	11770.00	40.55	54.00	-13.45	33.15	7.40	Average	100	60	11	11770.00	53.63	74.00	-20.37	46.23	7.40	Peak	100	60	12	17655.00	58.50	68.20	-9.70	51.26	7.24	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4708.00	53.86	54.00	-0.14	53.83	0.03	Average	100	142																																																																																																																												
2	4708.00	56.45	74.00	-17.55	56.42	0.03	Peak	100	142																																																																																																																												
3	5650.00	56.81	68.20	-11.39	56.15	0.66	Peak	100	336																																																																																																																												
4 *	5885.00	107.86			106.55	1.31	Average	100	336																																																																																																																												
5 *	5885.00	119.67			118.36	1.31	Peak	100	336																																																																																																																												
6	5895.00	91.53	110.20	-18.67	90.15	1.38	Average	100	323																																																																																																																												
7	5895.00	104.92	130.20	-25.28	103.54	1.38	Peak	100	323																																																																																																																												
8	5925.00	46.69	88.20	-41.51	45.25	1.44	Average	100	323																																																																																																																												
9	5925.00	57.70	108.20	-50.50	56.26	1.44	Peak	100	323																																																																																																																												
10	11770.00	40.55	54.00	-13.45	33.15	7.40	Average	100	60																																																																																																																												
11	11770.00	53.63	74.00	-20.37	46.23	7.40	Peak	100	60																																																																																																																												
12	17655.00	58.50	68.20	-9.70	51.26	7.24	Peak	100	25																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	be EHT20	Test Freq. (MHz)	5885																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4708.00</td><td>53.11</td><td>54.00</td><td>-0.89</td><td>53.08</td><td>0.03</td><td>Average</td><td>148</td><td>2</td></tr><tr><td>2</td><td>4708.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>55.83</td><td>0.03</td><td>Peak</td><td>148</td><td>2</td></tr><tr><td>3</td><td>5650.00</td><td>57.01</td><td>68.20</td><td>-11.19</td><td>56.35</td><td>0.66</td><td>Peak</td><td>189</td><td>332</td></tr><tr><td>4 *</td><td>5885.00</td><td>110.27</td><td></td><td></td><td>108.96</td><td>1.31</td><td>Average</td><td>189</td><td>332</td></tr><tr><td>5 *</td><td>5885.00</td><td>121.77</td><td></td><td></td><td>120.46</td><td>1.31</td><td>Peak</td><td>189</td><td>332</td></tr><tr><td>6</td><td>5895.00</td><td>94.64</td><td>110.20</td><td>-15.56</td><td>93.26</td><td>1.38</td><td>Average</td><td>189</td><td>315</td></tr><tr><td>7</td><td>5895.00</td><td>107.79</td><td>130.20</td><td>-22.41</td><td>106.41</td><td>1.38</td><td>Peak</td><td>189</td><td>315</td></tr><tr><td>8</td><td>5925.00</td><td>47.02</td><td>88.20</td><td>-41.18</td><td>45.58</td><td>1.44</td><td>Average</td><td>189</td><td>315</td></tr><tr><td>9</td><td>5925.00</td><td>57.98</td><td>108.20</td><td>-50.22</td><td>56.54</td><td>1.44</td><td>Peak</td><td>189</td><td>315</td></tr><tr><td>10</td><td>11770.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>33.31</td><td>7.40</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>11</td><td>11770.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>46.15</td><td>7.40</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>12</td><td>17655.00</td><td>58.73</td><td>68.20</td><td>-9.47</td><td>51.49</td><td>7.24</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4708.00	53.11	54.00	-0.89	53.08	0.03	Average	148	2	2	4708.00	55.86	74.00	-18.14	55.83	0.03	Peak	148	2	3	5650.00	57.01	68.20	-11.19	56.35	0.66	Peak	189	332	4 *	5885.00	110.27			108.96	1.31	Average	189	332	5 *	5885.00	121.77			120.46	1.31	Peak	189	332	6	5895.00	94.64	110.20	-15.56	93.26	1.38	Average	189	315	7	5895.00	107.79	130.20	-22.41	106.41	1.38	Peak	189	315	8	5925.00	47.02	88.20	-41.18	45.58	1.44	Average	189	315	9	5925.00	57.98	108.20	-50.22	56.54	1.44	Peak	189	315	10	11770.00	40.71	54.00	-13.29	33.31	7.40	Average	100	55	11	11770.00	53.55	74.00	-20.45	46.15	7.40	Peak	100	55	12	17655.00	58.73	68.20	-9.47	51.49	7.24	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4708.00	53.11	54.00	-0.89	53.08	0.03	Average	148	2																																																																																																																												
2	4708.00	55.86	74.00	-18.14	55.83	0.03	Peak	148	2																																																																																																																												
3	5650.00	57.01	68.20	-11.19	56.35	0.66	Peak	189	332																																																																																																																												
4 *	5885.00	110.27			108.96	1.31	Average	189	332																																																																																																																												
5 *	5885.00	121.77			120.46	1.31	Peak	189	332																																																																																																																												
6	5895.00	94.64	110.20	-15.56	93.26	1.38	Average	189	315																																																																																																																												
7	5895.00	107.79	130.20	-22.41	106.41	1.38	Peak	189	315																																																																																																																												
8	5925.00	47.02	88.20	-41.18	45.58	1.44	Average	189	315																																																																																																																												
9	5925.00	57.98	108.20	-50.22	56.54	1.44	Peak	189	315																																																																																																																												
10	11770.00	40.71	54.00	-13.29	33.31	7.40	Average	100	55																																																																																																																												
11	11770.00	53.55	74.00	-20.45	46.15	7.40	Peak	100	55																																																																																																																												
12	17655.00	58.73	68.20	-9.47	51.49	7.24	Peak	100	30																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					




Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBUV/m) <			




Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBUV/m)			

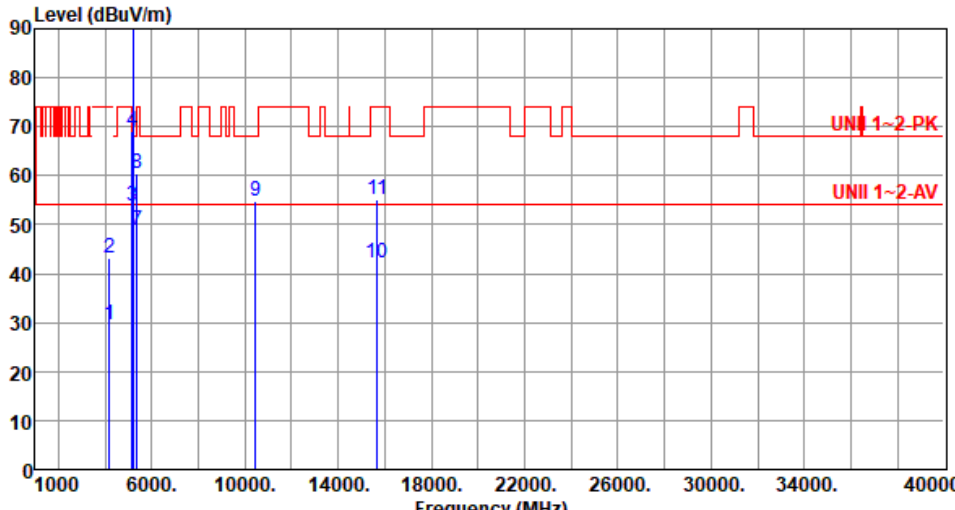

Modulation	be EHT40	Test Freq. (MHz)	5230						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):22 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4184.00	29.57	54.00	-24.43	30.75	-1.18	Average	100	16
2	4184.00	43.20	74.00	-30.80	44.38	-1.18	Peak	100	16
3	5150.00	53.81	54.00	-0.19	53.16	0.65	Average	111	125
4	5150.00	69.09	74.00	-4.91	68.44	0.65	Peak	111	125
5 *	5230.00	109.04			108.65	0.39	Average	104	125
6 *	5230.00	122.08			121.69	0.39	Peak	104	125
7	5350.00	48.75	54.00	-5.25	48.61	0.14	Average	104	125
8	5350.00	60.29	74.00	-13.71	60.15	0.14	Peak	104	125
9	10460.00	54.83	68.20	-13.37	46.29	8.54	Peak	100	40
10	15690.00	42.02	54.00	-11.98	37.16	4.86	Average	100	20
11	15690.00	54.98	74.00	-19.02	50.12	4.86	Peak	100	20

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

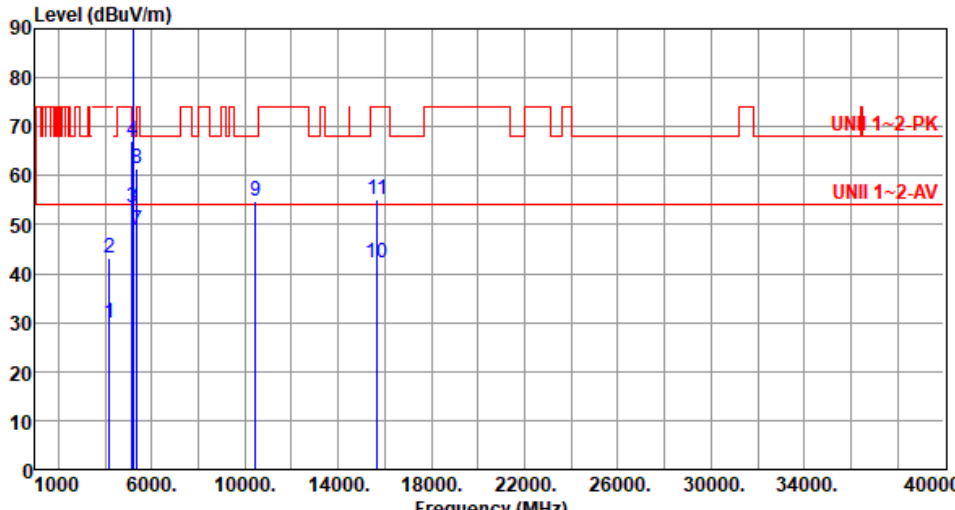

Modulation	be EHT40	Test Freq. (MHz)	5230						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):22 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4184.00	29.81	54.00	-24.19	30.99	-1.18	Average	100	32
2	4184.00	43.02	74.00	-30.98	44.20	-1.18	Peak	100	32
3	5150.00	53.59	54.00	-0.41	52.94	0.65	Average	100	219
4	5150.00	67.13	74.00	-6.87	66.48	0.65	Peak	100	219
5 *	5230.00	109.67			109.28	0.39	Average	106	2
6 *	5230.00	122.51			122.12	0.39	Peak	106	2
7	5350.00	48.85	54.00	-5.15	48.71	0.14	Average	106	2
8	5350.00	61.52	74.00	-12.48	61.38	0.14	Peak	106	2
9	10460.00	54.96	68.20	-13.24	46.42	8.54	Peak	100	50
10	15690.00	42.12	54.00	-11.88	37.26	4.86	Average	100	30
11	15690.00	55.12	74.00	-18.88	50.26	4.86	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																											
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4216.00</td><td>29.28</td><td>54.00</td><td>-24.72</td><td>30.50</td><td>-1.22</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>2</td><td>4216.00</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>44.47</td><td>-1.22</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>3</td><td>5150.00</td><td>43.90</td><td>54.00</td><td>-10.10</td><td>43.25</td><td>0.65</td><td>Average</td><td>114</td><td>6</td></tr><tr><td>4</td><td>5150.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>55.89</td><td>0.65</td><td>Peak</td><td>114</td><td>6</td></tr><tr><td>5 *</td><td>5270.00</td><td>105.17</td><td></td><td></td><td>104.91</td><td>0.26</td><td>Average</td><td>114</td><td>6</td></tr><tr><td>6 *</td><td>5270.00</td><td>117.33</td><td></td><td></td><td>117.07</td><td>0.26</td><td>Peak</td><td>114</td><td>6</td></tr><tr><td>7</td><td>5350.00</td><td>44.43</td><td>54.00</td><td>-9.57</td><td>44.29</td><td>0.14</td><td>Average</td><td>114</td><td>6</td></tr><tr><td>8</td><td>5350.00</td><td>56.26</td><td>74.00</td><td>-17.74</td><td>56.12</td><td>0.14</td><td>Peak</td><td>114</td><td>6</td></tr><tr><td>9</td><td>10540.00</td><td>54.41</td><td>68.20</td><td>-13.79</td><td>46.12</td><td>8.29</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>10</td><td>15810.00</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>37.18</td><td>4.57</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>11</td><td>15810.00</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>49.30</td><td>4.57</td><td>Peak</td><td>100</td><td>55</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4216.00	29.28	54.00	-24.72	30.50	-1.22	Average	100	16	2	4216.00	43.25	74.00	-30.75	44.47	-1.22	Peak	100	16	3	5150.00	43.90	54.00	-10.10	43.25	0.65	Average	114	6	4	5150.00	56.54	74.00	-17.46	55.89	0.65	Peak	114	6	5 *	5270.00	105.17			104.91	0.26	Average	114	6	6 *	5270.00	117.33			117.07	0.26	Peak	114	6	7	5350.00	44.43	54.00	-9.57	44.29	0.14	Average	114	6	8	5350.00	56.26	74.00	-17.74	56.12	0.14	Peak	114	6	9	10540.00	54.41	68.20	-13.79	46.12	8.29	Peak	100	30	10	15810.00	41.75	54.00	-12.25	37.18	4.57	Average	100	55	11	15810.00	53.87	74.00	-20.13	49.30	4.57	Peak	100	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4216.00	29.28	54.00	-24.72	30.50	-1.22	Average	100	16																																																																																																																		
2	4216.00	43.25	74.00	-30.75	44.47	-1.22	Peak	100	16																																																																																																																		
3	5150.00	43.90	54.00	-10.10	43.25	0.65	Average	114	6																																																																																																																		
4	5150.00	56.54	74.00	-17.46	55.89	0.65	Peak	114	6																																																																																																																		
5 *	5270.00	105.17			104.91	0.26	Average	114	6																																																																																																																		
6 *	5270.00	117.33			117.07	0.26	Peak	114	6																																																																																																																		
7	5350.00	44.43	54.00	-9.57	44.29	0.14	Average	114	6																																																																																																																		
8	5350.00	56.26	74.00	-17.74	56.12	0.14	Peak	114	6																																																																																																																		
9	10540.00	54.41	68.20	-13.79	46.12	8.29	Peak	100	30																																																																																																																		
10	15810.00	41.75	54.00	-12.25	37.18	4.57	Average	100	55																																																																																																																		
11	15810.00	53.87	74.00	-20.13	49.30	4.57	Peak	100	55																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):22 Humidity(%):63																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5310.00</td><td>103.21</td><td></td><td></td><td>103.01</td><td>0.20</td><td>Average</td><td>118</td><td>3</td></tr><tr><td>2 *</td><td>5310.00</td><td>115.93</td><td></td><td></td><td>115.73</td><td>0.20</td><td>Peak</td><td>118</td><td>3</td></tr><tr><td>3</td><td>5350.00</td><td>53.87</td><td>54.00</td><td>-0.13</td><td>53.73</td><td>0.14</td><td>Average</td><td>108</td><td>3</td></tr><tr><td>4</td><td>5350.00</td><td>67.26</td><td>74.00</td><td>-6.74</td><td>67.12</td><td>0.14</td><td>Peak</td><td>108</td><td>3</td></tr><tr><td>5</td><td>10620.00</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>32.44</td><td>8.37</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>10620.00</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>45.64</td><td>8.37</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>7</td><td>15930.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>37.11</td><td>4.65</td><td>Average</td><td>100</td><td>15</td></tr><tr><td>8</td><td>15930.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>49.28</td><td>4.65</td><td>Peak</td><td>100</td><td>15</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5310.00	103.21			103.01	0.20	Average	118	3	2 *	5310.00	115.93			115.73	0.20	Peak	118	3	3	5350.00	53.87	54.00	-0.13	53.73	0.14	Average	108	3	4	5350.00	67.26	74.00	-6.74	67.12	0.14	Peak	108	3	5	10620.00	40.81	54.00	-13.19	32.44	8.37	Average	100	40	6	10620.00	54.01	74.00	-19.99	45.64	8.37	Peak	100	40	7	15930.00	41.76	54.00	-12.24	37.11	4.65	Average	100	15	8	15930.00	53.93	74.00	-20.07	49.28	4.65	Peak	100	15
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5310.00	103.21			103.01	0.20	Average	118	3																																																																																																								
2 *	5310.00	115.93			115.73	0.20	Peak	118	3																																																																																																								
3	5350.00	53.87	54.00	-0.13	53.73	0.14	Average	108	3																																																																																																								
4	5350.00	67.26	74.00	-6.74	67.12	0.14	Peak	108	3																																																																																																								
5	10620.00	40.81	54.00	-13.19	32.44	8.37	Average	100	40																																																																																																								
6	10620.00	54.01	74.00	-19.99	45.64	8.37	Peak	100	40																																																																																																								
7	15930.00	41.76	54.00	-12.24	37.11	4.65	Average	100	15																																																																																																								
8	15930.00	53.93	74.00	-20.07	49.28	4.65	Peak	100	15																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>46.76</td><td>0.50</td><td>Average</td><td>210</td><td>337</td></tr><tr><td>2</td><td>5460.00</td><td>63.47</td><td>74.00</td><td>-10.53</td><td>62.97</td><td>0.50</td><td>Peak</td><td>210</td><td>337</td></tr><tr><td>3</td><td>5470.00</td><td>65.85</td><td>68.20</td><td>-2.35</td><td>65.33</td><td>0.52</td><td>Peak</td><td>210</td><td>337</td></tr><tr><td>4 *</td><td>5510.00</td><td>101.47</td><td></td><td></td><td>100.90</td><td>0.57</td><td>Average</td><td>210</td><td>337</td></tr><tr><td>5 *</td><td>5510.00</td><td>114.67</td><td></td><td></td><td>114.10</td><td>0.57</td><td>Peak</td><td>210</td><td>337</td></tr><tr><td>6</td><td>11020.00</td><td>41.06</td><td>54.00</td><td>-12.94</td><td>32.49</td><td>8.57</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>7</td><td>11020.00</td><td>53.96</td><td>74.00</td><td>-20.04</td><td>45.39</td><td>8.57</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>8</td><td>16530.00</td><td>56.61</td><td>68.20</td><td>-11.59</td><td>50.57</td><td>6.04</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.26	54.00	-6.74	46.76	0.50	Average	210	337	2	5460.00	63.47	74.00	-10.53	62.97	0.50	Peak	210	337	3	5470.00	65.85	68.20	-2.35	65.33	0.52	Peak	210	337	4 *	5510.00	101.47			100.90	0.57	Average	210	337	5 *	5510.00	114.67			114.10	0.57	Peak	210	337	6	11020.00	41.06	54.00	-12.94	32.49	8.57	Average	100	10	7	11020.00	53.96	74.00	-20.04	45.39	8.57	Peak	100	10	8	16530.00	56.61	68.20	-11.59	50.57	6.04	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	47.26	54.00	-6.74	46.76	0.50	Average	210	337																																																																																				
2	5460.00	63.47	74.00	-10.53	62.97	0.50	Peak	210	337																																																																																				
3	5470.00	65.85	68.20	-2.35	65.33	0.52	Peak	210	337																																																																																				
4 *	5510.00	101.47			100.90	0.57	Average	210	337																																																																																				
5 *	5510.00	114.67			114.10	0.57	Peak	210	337																																																																																				
6	11020.00	41.06	54.00	-12.94	32.49	8.57	Average	100	10																																																																																				
7	11020.00	53.96	74.00	-20.04	45.39	8.57	Peak	100	10																																																																																				
8	16530.00	56.61	68.20	-11.59	50.57	6.04	Peak	100	40																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																	
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4472.00</td><td>45.52</td><td>68.20</td><td>-22.68</td><td>46.08</td><td>-0.56</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>2</td><td>5460.00</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>43.42</td><td>0.50</td><td>Average</td><td>211</td><td>333</td></tr><tr><td>3</td><td>5460.00</td><td>56.39</td><td>74.00</td><td>-17.61</td><td>55.89</td><td>0.50</td><td>Peak</td><td>211</td><td>333</td></tr><tr><td>4</td><td>5470.00</td><td>56.53</td><td>68.20</td><td>-11.67</td><td>56.01</td><td>0.52</td><td>Peak</td><td>211</td><td>333</td></tr><tr><td>5 *</td><td>5590.00</td><td>102.59</td><td></td><td></td><td>102.06</td><td>0.53</td><td>Average</td><td>211</td><td>333</td></tr><tr><td>6 *</td><td>5590.00</td><td>114.96</td><td></td><td></td><td>114.43</td><td>0.53</td><td>Peak</td><td>211</td><td>333</td></tr><tr><td>7</td><td>5725.00</td><td>57.28</td><td>68.20</td><td>-10.92</td><td>56.33</td><td>0.95</td><td>Peak</td><td>211</td><td>333</td></tr><tr><td>8</td><td>11180.00</td><td>40.64</td><td>54.00</td><td>-13.36</td><td>32.42</td><td>8.22</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>9</td><td>11180.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>45.47</td><td>8.22</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>10</td><td>16770.00</td><td>57.02</td><td>68.20</td><td>-11.18</td><td>50.67</td><td>6.35</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4472.00	45.52	68.20	-22.68	46.08	-0.56	Peak	100	141	2	5460.00	43.92	54.00	-10.08	43.42	0.50	Average	211	333	3	5460.00	56.39	74.00	-17.61	55.89	0.50	Peak	211	333	4	5470.00	56.53	68.20	-11.67	56.01	0.52	Peak	211	333	5 *	5590.00	102.59			102.06	0.53	Average	211	333	6 *	5590.00	114.96			114.43	0.53	Peak	211	333	7	5725.00	57.28	68.20	-10.92	56.33	0.95	Peak	211	333	8	11180.00	40.64	54.00	-13.36	32.42	8.22	Average	100	30	9	11180.00	53.69	74.00	-20.31	45.47	8.22	Peak	100	30	10	16770.00	57.02	68.20	-11.18	50.67	6.35	Peak	100	50
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	4472.00	45.52	68.20	-22.68	46.08	-0.56	Peak	100	141																																																																																																								
2	5460.00	43.92	54.00	-10.08	43.42	0.50	Average	211	333																																																																																																								
3	5460.00	56.39	74.00	-17.61	55.89	0.50	Peak	211	333																																																																																																								
4	5470.00	56.53	68.20	-11.67	56.01	0.52	Peak	211	333																																																																																																								
5 *	5590.00	102.59			102.06	0.53	Average	211	333																																																																																																								
6 *	5590.00	114.96			114.43	0.53	Peak	211	333																																																																																																								
7	5725.00	57.28	68.20	-10.92	56.33	0.95	Peak	211	333																																																																																																								
8	11180.00	40.64	54.00	-13.36	32.42	8.22	Average	100	30																																																																																																								
9	11180.00	53.69	74.00	-20.31	45.47	8.22	Peak	100	30																																																																																																								
10	16770.00	57.02	68.20	-11.18	50.67	6.35	Peak	100	50																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) UNII 1-2-PK UNII 1-2-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4472.00</td><td>45.42</td><td>68.20</td><td>-22.78</td><td>45.98</td><td>-0.56</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>2</td><td>5460.00</td><td>44.08</td><td>54.00</td><td>-9.92</td><td>43.58</td><td>0.50</td><td>Average</td><td>209</td><td>325</td></tr><tr><td>3</td><td>5460.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>56.02</td><td>0.50</td><td>Peak</td><td>209</td><td>325</td></tr><tr><td>4</td><td>5470.00</td><td>56.64</td><td>68.20</td><td>-11.56</td><td>56.12</td><td>0.52</td><td>Peak</td><td>209</td><td>325</td></tr><tr><td>5 *</td><td>5590.00</td><td>104.65</td><td></td><td></td><td>104.12</td><td>0.53</td><td>Average</td><td>209</td><td>325</td></tr><tr><td>6 *</td><td>5590.00</td><td>116.76</td><td></td><td></td><td>116.23</td><td>0.53</td><td>Peak</td><td>209</td><td>325</td></tr><tr><td>7</td><td>5725.00</td><td>57.40</td><td>68.20</td><td>-10.80</td><td>56.45</td><td>0.95</td><td>Peak</td><td>209</td><td>325</td></tr><tr><td>8</td><td>11180.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>32.56</td><td>8.22</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>9</td><td>11180.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>45.59</td><td>8.22</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>10</td><td>16770.00</td><td>57.23</td><td>68.20</td><td>-10.97</td><td>50.88</td><td>6.35</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	4472.00	45.42	68.20	-22.78	45.98	-0.56	Peak	100	29	2	5460.00	44.08	54.00	-9.92	43.58	0.50	Average	209	325	3	5460.00	56.52	74.00	-17.48	56.02	0.50	Peak	209	325	4	5470.00	56.64	68.20	-11.56	56.12	0.52	Peak	209	325	5 *	5590.00	104.65			104.12	0.53	Average	209	325	6 *	5590.00	116.76			116.23	0.53	Peak	209	325	7	5725.00	57.40	68.20	-10.80	56.45	0.95	Peak	209	325	8	11180.00	40.78	54.00	-13.22	32.56	8.22	Average	100	50	9	11180.00	53.81	74.00	-20.19	45.59	8.22	Peak	100	50	10	16770.00	57.23	68.20	-10.97	50.88	6.35	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																												
					dBuV			cm	deg																																																																																																																												
1	4472.00	45.42	68.20	-22.78	45.98	-0.56	Peak	100	29																																																																																																																												
2	5460.00	44.08	54.00	-9.92	43.58	0.50	Average	209	325																																																																																																																												
3	5460.00	56.52	74.00	-17.48	56.02	0.50	Peak	209	325																																																																																																																												
4	5470.00	56.64	68.20	-11.56	56.12	0.52	Peak	209	325																																																																																																																												
5 *	5590.00	104.65			104.12	0.53	Average	209	325																																																																																																																												
6 *	5590.00	116.76			116.23	0.53	Peak	209	325																																																																																																																												
7	5725.00	57.40	68.20	-10.80	56.45	0.95	Peak	209	325																																																																																																																												
8	11180.00	40.78	54.00	-13.22	32.56	8.22	Average	100	50																																																																																																																												
9	11180.00	53.81	74.00	-20.19	45.59	8.22	Peak	100	50																																																																																																																												
10	16770.00	57.23	68.20	-10.97	50.88	6.35	Peak	100	20																																																																																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	be EHT40	Test Freq. (MHz)	5670																																																																																														
Polarization	Horizontal																																																																																																
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																	
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>5670.00</td><td>103.01</td><td></td><td>102.25</td><td>0.76</td><td>Average</td><td>205</td><td>332</td></tr><tr><td>2</td><td>*</td><td>5670.00</td><td>115.22</td><td></td><td>114.46</td><td>0.76</td><td>Peak</td><td>205</td><td>332</td></tr><tr><td>3</td><td></td><td>5725.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>58.31</td><td>0.95</td><td>Peak</td><td>205</td><td>332</td></tr><tr><td>4</td><td></td><td>11340.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>32.29</td><td>8.14</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>5</td><td></td><td>11340.00</td><td>53.53</td><td>74.00</td><td>-20.47</td><td>45.39</td><td>8.14</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>6</td><td></td><td>17010.00</td><td>56.82</td><td>68.20</td><td>-11.38</td><td>50.89</td><td>5.93</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	5670.00	103.01		102.25	0.76	Average	205	332	2	*	5670.00	115.22		114.46	0.76	Peak	205	332	3		5725.00	59.26	68.20	-8.94	58.31	0.95	Peak	205	332	4		11340.00	40.43	54.00	-13.57	32.29	8.14	Average	100	10	5		11340.00	53.53	74.00	-20.47	45.39	8.14	Peak	100	10	6		17010.00	56.82	68.20	-11.38	50.89	5.93	Peak	100	60
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																								
1	*	5670.00	103.01		102.25	0.76	Average	205	332																																																																																								
2	*	5670.00	115.22		114.46	0.76	Peak	205	332																																																																																								
3		5725.00	59.26	68.20	-8.94	58.31	0.95	Peak	205	332																																																																																							
4		11340.00	40.43	54.00	-13.57	32.29	8.14	Average	100	10																																																																																							
5		11340.00	53.53	74.00	-20.47	45.39	8.14	Peak	100	10																																																																																							
6		17010.00	56.82	68.20	-11.38	50.89	5.93	Peak	100	60																																																																																							
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	5670																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5670.00</td><td>105.21</td><td></td><td></td><td>104.45</td><td>0.76</td><td>Average</td><td>195</td><td>328</td></tr><tr><td>2 *</td><td>5670.00</td><td>117.35</td><td></td><td></td><td>116.59</td><td>0.76</td><td>Peak</td><td>195</td><td>328</td></tr><tr><td>3</td><td>5725.00</td><td>61.07</td><td>68.20</td><td>-7.13</td><td>60.12</td><td>0.95</td><td>Peak</td><td>195</td><td>346</td></tr><tr><td>4</td><td>11340.00</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>32.49</td><td>8.14</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>5</td><td>11340.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>45.50</td><td>8.14</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>6</td><td>17010.00</td><td>56.69</td><td>68.20</td><td>-11.51</td><td>50.76</td><td>5.93</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	5670.00	105.21			104.45	0.76	Average	195	328	2 *	5670.00	117.35			116.59	0.76	Peak	195	328	3	5725.00	61.07	68.20	-7.13	60.12	0.95	Peak	195	346	4	11340.00	40.63	54.00	-13.37	32.49	8.14	Average	100	30	5	11340.00	53.64	74.00	-20.36	45.50	8.14	Peak	100	30	6	17010.00	56.69	68.20	-11.51	50.76	5.93	Peak	100	50
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1 *	5670.00	105.21			104.45	0.76	Average	195	328																																																																																				
2 *	5670.00	117.35			116.59	0.76	Peak	195	328																																																																																				
3	5725.00	61.07	68.20	-7.13	60.12	0.95	Peak	195	346																																																																																				
4	11340.00	40.63	54.00	-13.37	32.49	8.14	Average	100	30																																																																																				
5	11340.00	53.64	74.00	-20.36	45.50	8.14	Peak	100	30																																																																																				
6	17010.00	56.69	68.20	-11.51	50.76	5.93	Peak	100	50																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m) </			