

# **FCC Test Report**

Report No.: AGC12845221008FE05

**FCC ID** : 2A9RD-SVBR01CP

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Charging pile

**BRAND NAME** : Sveabot

**MODEL NAME** : SVBR01CP

**APPLICANT**: Sveabot Tek AB

**DATE OF ISSUE** : Jan. 12, 2023

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 80


# REPORT REVISE RECORD

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |  |
|----------------|-------------|---------------|---------------|-----------------|--|
| V1.0           | /           | Jan. 12, 2023 | Valid         | Initial Release |  |




# **TABLE OF CONTENTS**

| 1. VERIFICATION OF CONFORMITY                     | 5  |
|---|----|
| 2. GENERAL INFORMATION                            | 6  |
| 2.1. PRODUCT DESCRIPTION                          | 6  |
| 2.2. TABLE OF CARRIER FREQUENCYS                  |    |
| 2.3. IEEE 802.11N MODULATION SCHEME               | 8  |
| 2.4. RELATED SUBMITTAL(S) / GRANT (S)             | 8  |
| 2.5. TEST METHODOLOGY                             | 8  |
| 2.6. SPECIAL ACCESSORIES                          | 8  |
| 2.7. EQUIPMENT MODIFICATIONS                      | 8  |
| 2.8. ANTENNA REQUIREMENT                          | 9  |
| 3. MEASUREMENT UNCERTAINTY                        | 10 |
| 4. DESCRIPTION OF TEST MODES                      | 11 |
| 5. SYSTEM TEST CONFIGURATION                      | 12 |
| 5.1. CONFIGURATION OF EUT SYSTEM                  | 12 |
| 5.2. EQUIPMENT USED IN EUT SYSTEM                 | 12 |
| 5.3. SUMMARY OF TEST RESULTS                      | 12 |
| 6. TEST FACILITY                                  | 13 |
| 7. OUTPUT POWER                                   | 14 |
| 7.1. MEASUREMENT PROCEDURE                        | 14 |
| 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 14 |
| 7.3. LIMITS AND MEASUREMENT RESULT                | 15 |
| 8. BANDWIDTH                                      | 16 |
| 8.1. MEASUREMENT PROCEDURE                        | 16 |
| 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 16 |
| 8.3. LIMITS AND MEASUREMENT RESULTS               | 17 |
| 9. CONDUCTED SPURIOUS EMISSION                    | 30 |
| 9.1. MEASUREMENT PROCEDURE                        | 30 |
| 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) | 30 |
| 9.3. MEASUREMENT EQUIPMENT USEDJN                 | 30 |
| 9.4 LIMITS AND MEASUREMENT RESULT                 | 30 |





| 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY         | 45 |
|---|----|
| 10.1 MEASUREMENT PROCEDURE                                  | 45 |
| 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)           | 45 |
| 10.3 MEASUREMENT EQUIPMENT USED                             | 45 |
| 10.4 LIMITS AND MEASUREMENT RESULT                          | 45 |
| 11. RADIATED EMISSION                                       | 52 |
| 11.1. MEASUREMENT PROCEDURE                                 |    |
| 11.2. TEST SETUP  | 53 |
| 11.3. LIMITS AND MEASUREMENT RESULT                         | 54 |
| 11.4. TEST RESULT   | 54 |
| 12. LINE CONDUCTED EMISSION TEST                            | 76 |
| 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST                | 76 |
| 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST         | 76 |
| 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST | 77 |
| 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST       | 77 |
| 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST           | 78 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP                       | 80 |
| APPENDIX B: PHOTOGRAPHS OF EUT                              | 80 |





# 1. VERIFICATION OF CONFORMITY

| Applicant                    | Sveabot Tek AB  |
|------------------------------|---|
| Address                      | Hogmossevagen 11, SE-641 39, Katrineholm, Sweden  |
| manufacturer                 | Sveabot Tek AB  |
| Address                      | Hogmossevagen 11, SE-641 39, Katrineholm, Sweden  |
| Factory                      | FJ Dynamics Technology (Fujian) Co., Ltd.   |
| Address                      | Unit 3, Yimei Zhineng Industrial Park, No. 30 Zhihui Avenue, Nanyu Town, Gaoxin District, Fuzhou City, Fujian Province, China |
| Product Designation          | Charging pile   |
| Brand Name                   | Sveabot   |
| Test Model                   | SVBR01CP  |
| Date of receipt of test item | Nov. 21, 2022   |
| Date of test                 | Nov. 23, 2022 to Jan. 12, 2023  |
| Deviation                    | No any deviation from the test method   |
| Condition of Test Sample     | Normal  |
| Test Result                  | Pass  |
| Report Template              | AGCRT-US-BGN/RF   |

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

| Prepared By | Alan Duan                         |               |
|-------------|-----------------------------------|---------------|
|             | Alan Duan<br>(Project Engineer)   | Jan. 12, 2023 |
| Reviewed By | Calin Lin                         |               |
|             | Calvin Liu<br>(Reviewer)          | Jan. 12, 2023 |
| Approved By | Max Zhang                         |               |
|             | Max Zhang<br>(Authorized Officer) | Jan. 12, 2023 |



Report No.: AGC12845221008FE05 Page 6 of 80

2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

The EUT is designed as "Charging pile". It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

| Equipment Type WLAN 2.4G |   |  |
|--------------------------|---|--|
| Frequency Band           | 2400MHz ~ 2483.5MHz   |  |
| Operation Frequency      | 2412MHz ~ 2462MHz   |  |
| Output Power (Average)   | IEEE 802.11b:10.43dBm; IEEE 802.11g:8.98dBm;                  |  |
| Output Fower (Average)   | IEEE 802.11n(HT20):8.74dBm; IEEE 802.11n(HT40):6.90dBm        |  |
| Output Power (Peak)      | IEEE 802.11b:12.95dBm; IEEE 802.11g:16.89dBm;                 |  |
| Output Fower (Feak)      | IEEE 802.11n(HT20):17.04dBm; IEEE 802.11n(HT40):15.40dBm      |  |
| Modulation               | 802.11b:DQPSK, DBPSK, CCK                                     |  |
| Woddiation               | 802.11g/n: 64-QAM, 16-QAM, QPSK, BPSK                         |  |
|                          | 802.11b: 1/2/5.5/11Mbps                                       |  |
| Data Rate                | 802.11g: 6/9/12/18/24/36/48/54Mbps                            |  |
|                          | 802.11n: up to 300Mbps  |  |
| Number of channels       | 11  |  |
| Hardware Version         | V1.0  |  |
| Software Version         | V1.0  |  |
| Antenna Designation      | FPC Antenna (Comply with requirements of the FCC part 15.203) |  |
| Antenna Gain             | 2.69dBi   |  |
| Power Supply             | DC 58.8V by adapter   |  |



Page 7 of 80

# 2.2. TABLE OF CARRIER FREQUENCYS

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
|                | 1              | 2412 MHZ  |
|                | 2              | 2417 MHZ  |
|                | 3              | 2422 MHZ  |
|                | 4              | 2427 MHZ  |
|                | 5              | 2432 MHZ  |
| 2400~2483.5MHZ | 6              | 2437 MHZ  |
|                | 7              | 2442 MHZ  |
|                | 8              | 2447 MHZ  |
|                | 9              | 2452 MHZ  |
|                | 10             | 2457 MHZ  |
|                | 11             | 2462 MHZ  |

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11. For 40MHZ bandwidth system use Channel 3 to Channel 9



Report No.: AGC12845221008FE05 Page 8 of 80

# 2.3. IEEE 802.11N MODULATION SCHEME

| MCS<br>Index | Nss | ss Modulation R NBPSC |     | NBPSC | NCBPS |       | NDBPS |       | Data<br>rate(Mbps)<br>800nsGl |       |
|--------------|-----|-----------------------|-----|-------|-------|-------|-------|-------|-------------------------------|-------|
|              |     |                       |     |       | 20MHz | 40MHz | 20MHz | 40MHz | 20MHz                         | 40MHz |
| 0            | 1   | BPSK                  | 1/2 | 1     | 52    | 108   | 26    | 54    | 6.5                           | 13.5  |
| 1            | 1   | QPSK                  | 1/2 | 2     | 104   | 216   | 52    | 108   | 13.0                          | 27.0  |
| 2            | 1   | QPSK                  | 3/4 | 2     | 104   | 216   | 78    | 162   | 19.5                          | 40.5  |
| 3            | 1   | 16-QAM                | 1/2 | 4     | 208   | 432   | 104   | 216   | 26.0                          | 54.0  |
| 4            | 1   | 16-QAM                | 3/4 | 4     | 208   | 432   | 156   | 324   | 39.0                          | 81.0  |
| 5            | 1   | 64-QAM                | 2/3 | 6     | 312   | 648   | 208   | 432   | 52.0                          | 108.0 |
| 6            | 1   | 64-QAM                | 3/4 | 6     | 312   | 648   | 234   | 489   | 58.5                          | 121.5 |
| 7            | 1   | 64-QAM                | 5/6 | 6     | 312   | 648   | 260   | 540   | 65.0                          | 135.0 |

| Symbol | Explanation                             |
|--------|---|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPSC  | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | Guard interval                          |

# 2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A9RD-SVBR01CP** filing to comply with the FCC Part 15 requirements.

# 2.5. TEST METHODOLOGY

KDB 558074 D01 15.247 Meas Guidance v05: Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

# 2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

# 2.7. EQUIPMENT MODIFICATIONS

## Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 9 of 80

### 2.8. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 10 of 80

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Item  | Measurement Uncertainty    |
|---|----------------------------|
| Uncertainty of Conducted Emission for AC Port | $U_c = \pm 3.1 \text{ dB}$ |
| Uncertainty of Radiated Emission below 1GHz   | $U_c = \pm 4.0 \text{ dB}$ |
| Uncertainty of Radiated Emission above 1GHz   | $U_c = \pm 4.8 \text{ dB}$ |
| Uncertainty of total RF power, conducted      | $U_c = \pm 0.8 \text{ dB}$ |
| Uncertainty of RF power density, conducted    | $U_c = \pm 2.6 \text{ dB}$ |
| Uncertainty of spurious emissions, conducted  | $U_c = \pm 2.7 \%$         |
| Uncertainty of Occupied Channel Bandwidth     | $U_c = \pm 2 \%$           |





# 4. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION            |
|-----|----------------------------------|
| 1   | Low channel transmitting (TX)    |
| 2   | Middle channel transmitting (TX) |
| 3   | High channel transmitting (TX)   |

### Note:

Transmit by 802.11b with Date rate (1/2/5.5/11)

Transmit by 802.11g with Date rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Date rate (6.5/13/19.5/26/39/52/58.5/65)


Transmit by 802.11n (40MHz) with Date rate (13.5/27/40.5/54/81/108/121.5/135)

The test channel for 20MHZ bandwidth system is channel 1, 6 and 11.

The test channel for 40MHZ bandwidth system is channel 3, 6 and 9.

#### Note:

- 1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.

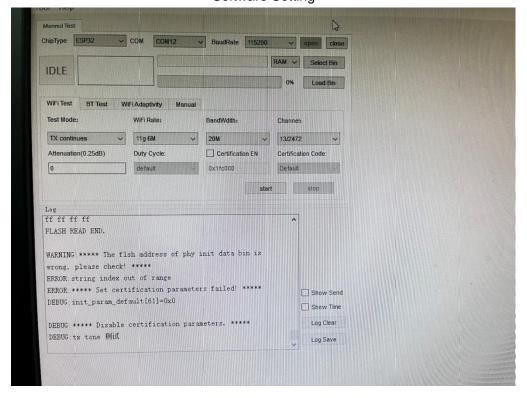

# Software Setting




Page 12 of 80

# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Configure:



# **5.2. EQUIPMENT USED IN EUT SYSTEM**

| Item | Equipment         | Model No.  | ID or Specification                                      | Remark |
|------|-------------------|------------|--|--------|
| 1    | Charging pile     | SVBR01CP   | 2A9RD-SVBR01CP   | EUT    |
| 2    | Xiaomi router     | R4A        | N/A  | AE     |
| 3    | Bluetooth speaker | SRS-XB01   | N/A  | AE     |
| 4    | Adapter           | FY58809500 | Input: 100-240V, 50/60Hz, 7.5A<br>Output: DC 58.8V, 9.5A | AE     |

### 5.3. SUMMARY OF TEST RESULTS

| FCC RULES     | DESCRIPTION OF TEST                             | RESULT    |
|---------------|---|-----------|
| §15.247(b)(3) | Output Power                                    | Compliant |
| §15.247(a)(2) | 6 dB Bandwidth                                  | Compliant |
| §15.247       | Conducted Spurious Emission                     | Compliant |
| §15.247(e)    | Maximum Conducted Output Power Spectral Density | Compliant |
| §15.209       | Radiated Emission                               | Compliant |
| §15.247(d)    | Band Edges                                      | Compliant |
| §15.207       | Line Conduction Emission                        | Compliant |



Page 13 of 80

# **6. TEST FACILITY**

| Test Site                         | Attestation of Global Compliance (Shenzhen) Co., Ltd   |
|-----------------------------------|--|
| Location                          | 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China |
| Designation Number                | CN1259   |
| FCC Test Firm Registration Number | 975832   |
| A2LA Cert. No.                    | 5054.02  |
| Description                       | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA  |

# TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment     | Manufacturer | Model   | S/N       | Cal. Date     | Cal. Due      |
|---------------|--------------|---------|-----------|---------------|---------------|
| TEST RECEIVER | R&S          | ESPI    | 101206    | Mar. 28, 2022 | Mar. 27, 2023 |
| LISN          | R&S          | ESH2-Z5 | 100086    | Jun. 08, 2022 | Jun. 07, 2023 |
| Test software | R&S          | ES-K1   | Ver.V1.71 | N/A           | N/A           |

# **TEST EQUIPMENT OF RADIATED EMISSION TEST**

| Equipment                            | Manufacturer   | Model     | S/N        | Cal. Date     | Cal. Due      |
|--------------------------------------|----------------|-----------|------------|---------------|---------------|
| TEST RECEIVER                        | R&S            | ESCI      | 10096      | Mar. 28, 2022 | Mar. 27, 2023 |
| EXA Signal<br>Analyzer               | Aglient        | N9010A    | MY53470504 | Aug. 04, 2022 | Aug. 03, 2023 |
| 2.4GHz Fliter                        | Micro-tronics  | 087       | N/A        | N/A           | N/A           |
| Attenuator                           | Weinachel Corp | 58-30-33  | N/A        | Aug. 04, 2022 | Aug. 03, 2024 |
| Horn antenna                         | SCHWARZBECK    | BBHA 9170 | #768       | Oct. 31, 2021 | Oct. 30, 2023 |
| Active loop<br>antenna<br>(9K-30MHz) | ZHINAN         | ZN30900C  | 00034609   | Mar. 12, 2022 | Mar. 21, 2024 |
| Double-Ridged<br>Waveguide Horn      | ETS LINDGREN   | 3117      | 00034609   | Apr. 23, 2021 | Apr. 22, 2023 |
| Broadband<br>Preamplifier            | ETS LINDGREN   | 3117PA    | 00225134   | Aug. 04, 2022 | Aug. 03, 2024 |
| ANTENNA                              | SCHWARZBECK    | VULB9168  | 494        | Jan. 08, 2021 | Jan. 07, 2023 |
| ANTENNA                              | SCHWARZBECK    | VULB9168  | D69250     | Jan. 05, 2023 | Jan. 04, 2025 |
| Test software                        | Tonscend       | JS32-RE   | Ver.2.5    | N/A           | N/A           |



Page 14 of 80

# 7. OUTPUT POWER


# 7.1. MEASUREMENT PROCEDURE

For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

**Note**: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)






Page 15 of 80

# 7.3. LIMITS AND MEASUREMENT RESULT

| Test Data of Conducted Output Power |                       |                     |                     |              |              |
|-------------------------------------|-----------------------|---------------------|---------------------|--------------|--------------|
| Test Mode                           | Test Channel<br>(MHz) | Average Power (dBm) | Peak Power<br>(dBm) | Limits (dBm) | Pass or Fail |
|                                     | 2412                  | 10.43               | 12.95               | ≤30          | Pass         |
| 802.11b                             | 2437                  | 7.34                | 9.91                | ≤30          | Pass         |
|                                     | 2462                  | 7.22                | 9.80                | ≤30          | Pass         |
|                                     | 2412                  | 8.98                | 16.89               | ≤30          | Pass         |
| 802.11g                             | 2437                  | 5.41                | 13.32               | ≤30          | Pass         |
|                                     | 2462                  | 5.49                | 13.40               | ≤30          | Pass         |
|                                     | 2412                  | 8.74                | 17.04               | ≤30          | Pass         |
| 802.11n20                           | 2437                  | 5.17                | 13.49               | ≤30          | Pass         |
|                                     | 2462                  | 5.23                | 13.56               | ≤30          | Pass         |
|                                     | 2422                  | 6.90                | 15.40               | ≤30          | Pass         |
| 802.11n40                           | 2437                  | 4.64                | 13.13               | ≤30          | Pass         |
|                                     | 2452                  | 4.88                | 13.38               | ≤30          | Pass         |





### 8. BANDWIDTH

### **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

# Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

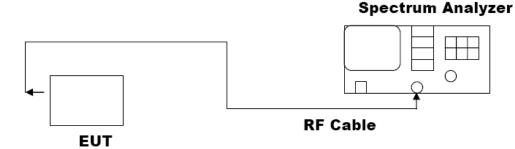






# 8.3. LIMITS AND MEASUREMENT RESULTS

| Test Data of Occupied Bandwidth and DTS Bandwidth |                       |                                 |                         |                 |              |
|---|-----------------------|---------------------------------|-------------------------|-----------------|--------------|
| Test Mode   | Test Channel<br>(MHz) | 99% Occupied<br>Bandwidth (MHz) | -6dB<br>Bandwidth (MHz) | Limits<br>(MHz) | Pass or Fail |
|   | 2412                  | 13.152                          | 9.114                   | ∌.5             | Pass         |
| 802.11b   | 2437                  | 13.167                          | 9.116                   | <b>₹</b> 0.5    | Pass         |
|   | 2462                  | 13.168                          | 9.115                   | <b>₹</b> 0.5    | Pass         |
|   | 2412                  | 16.379                          | 16.37                   | ₹0.5            | Pass         |
| 802.11g   | 2437                  | 16.382                          | 16.36                   | ₹0.5            | Pass         |
|   | 2462                  | 16.381                          | 16.36                   | <b>₹</b> 0.5    | Pass         |
|   | 2412                  | 17.186                          | 17.02                   | ₹0.5            | Pass         |
| 802.11n20   | 2437                  | 17.187                          | 17.02                   | <b>₹</b> 0.5    | Pass         |
|   | 2462                  | 17.184                          | 17.01                   | ₹0.5            | Pass         |
| 802.11n40   | 2422                  | 34.215                          | 32.79                   | ₹0.5            | Pass         |
|   | 2437                  | 34.232                          | 32.58                   | ₹0.5            | Pass         |
|   | 2452                  | 34.213                          | 32.80                   | <b>∌</b> .5     | Pass         |




# Test Graphs of Occupied Bandwidth

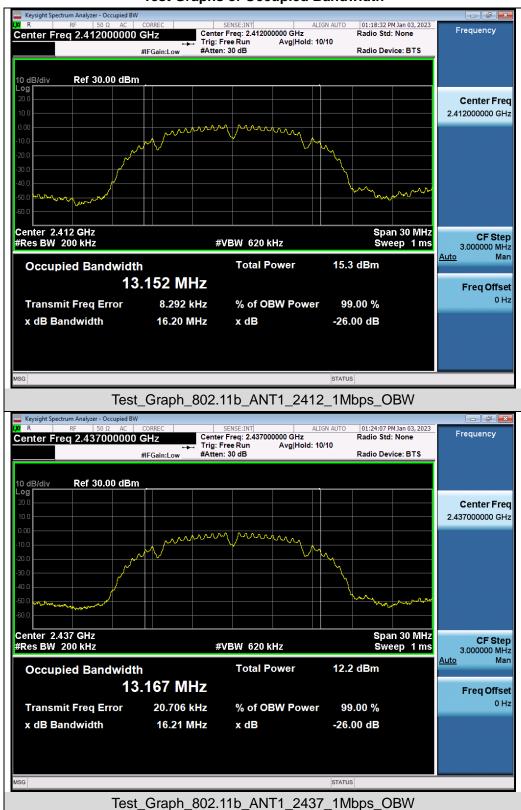


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




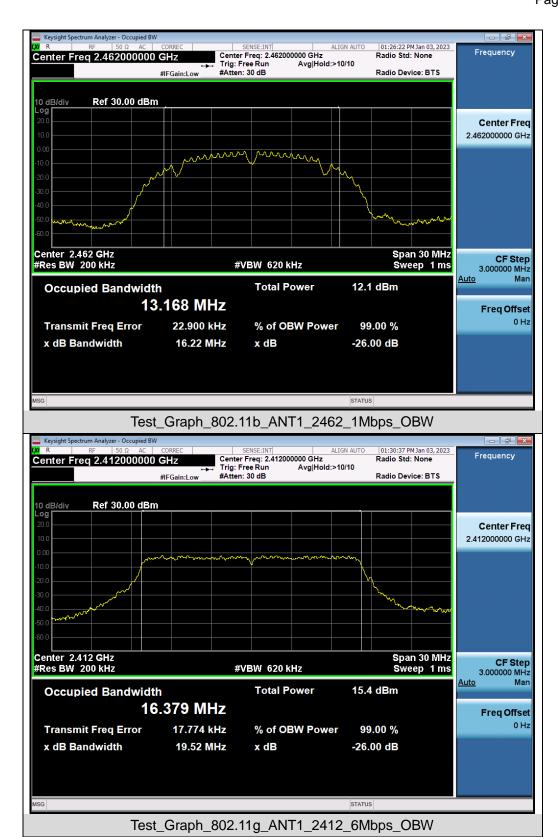




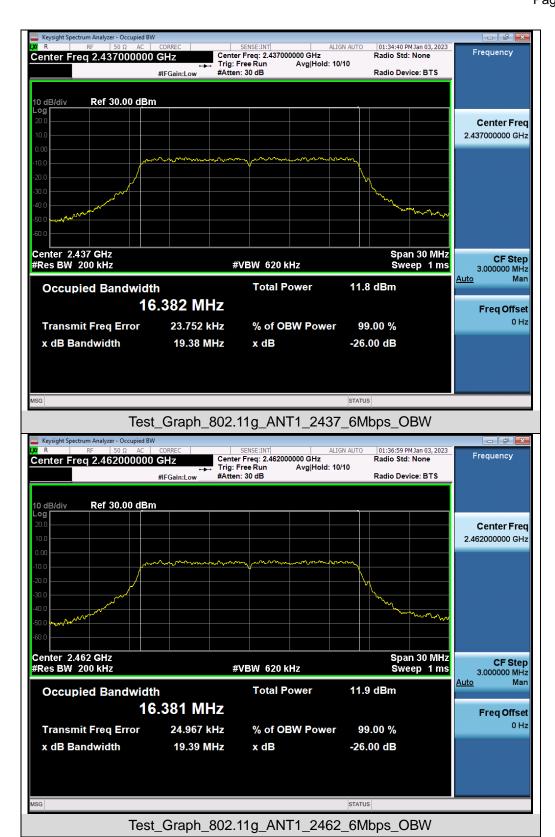




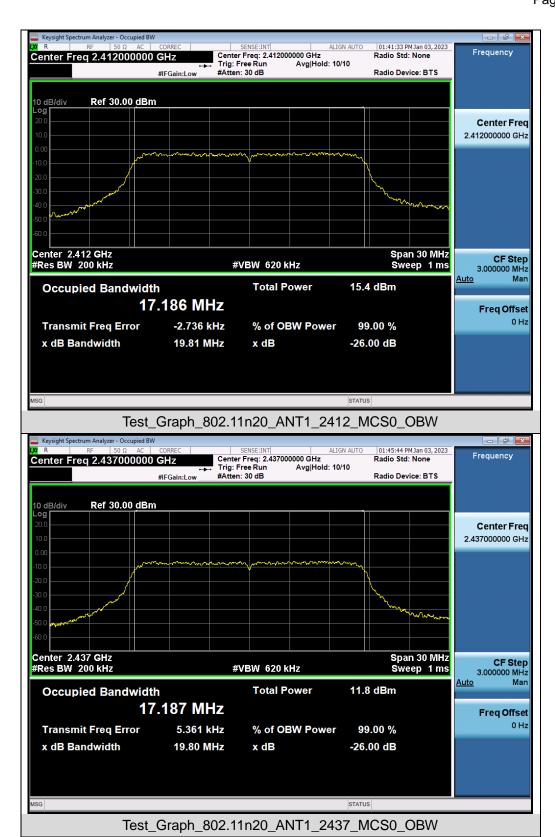



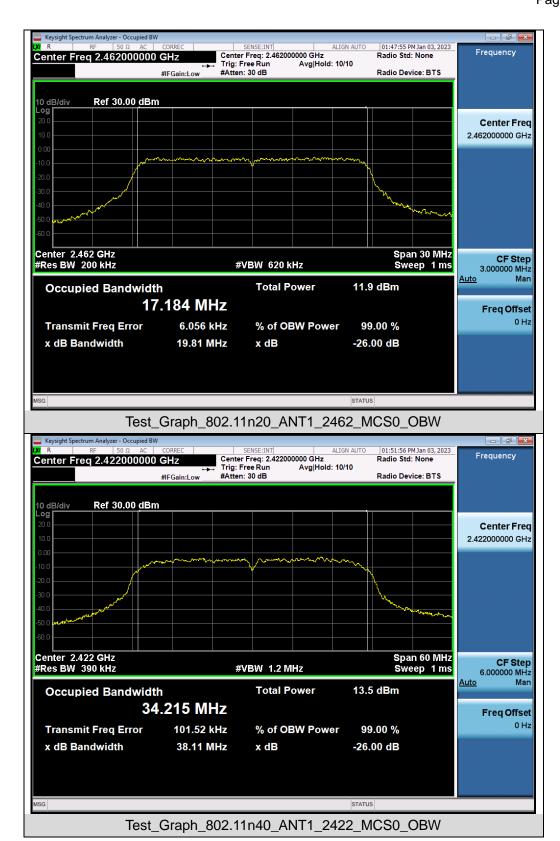




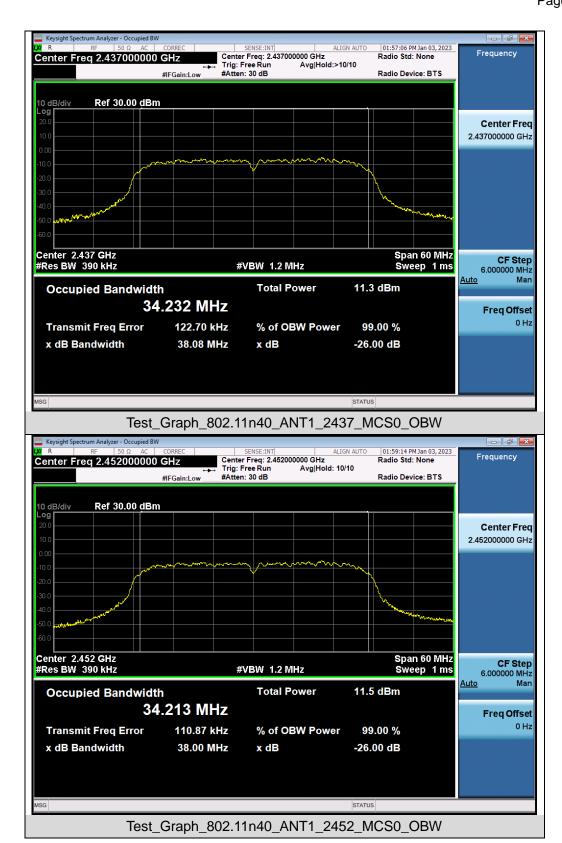




# Test Graphs of DTS Bandwidth

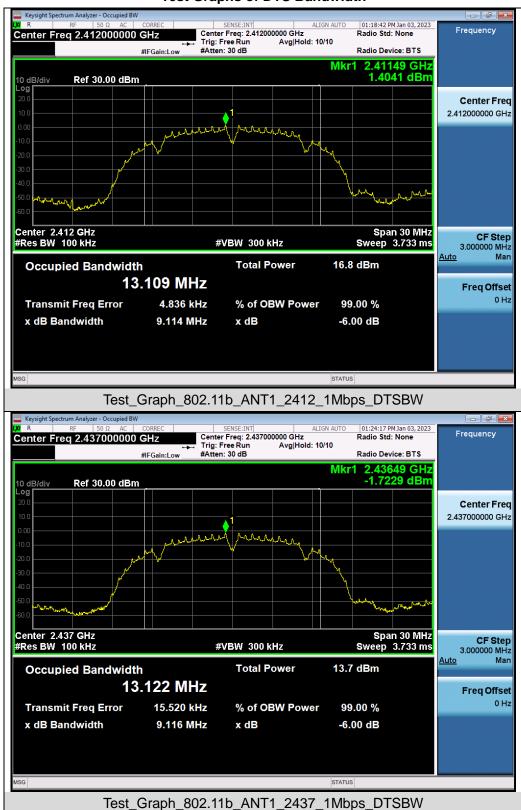


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




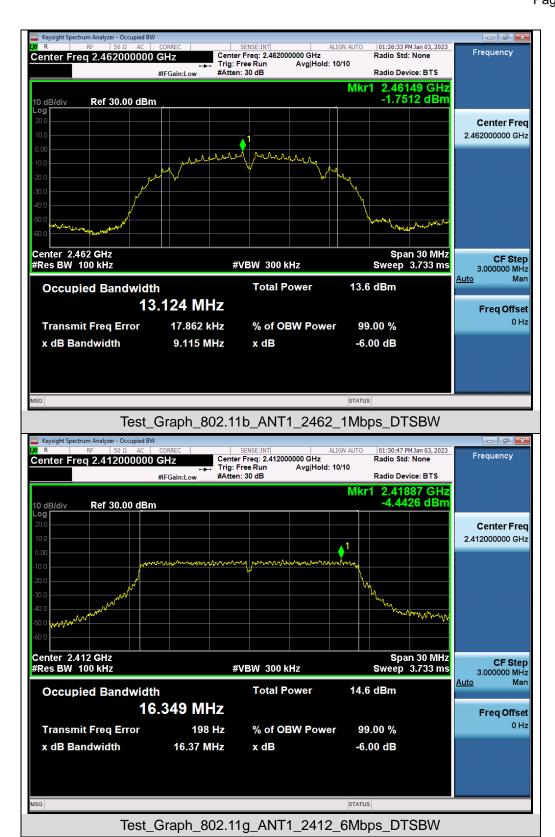




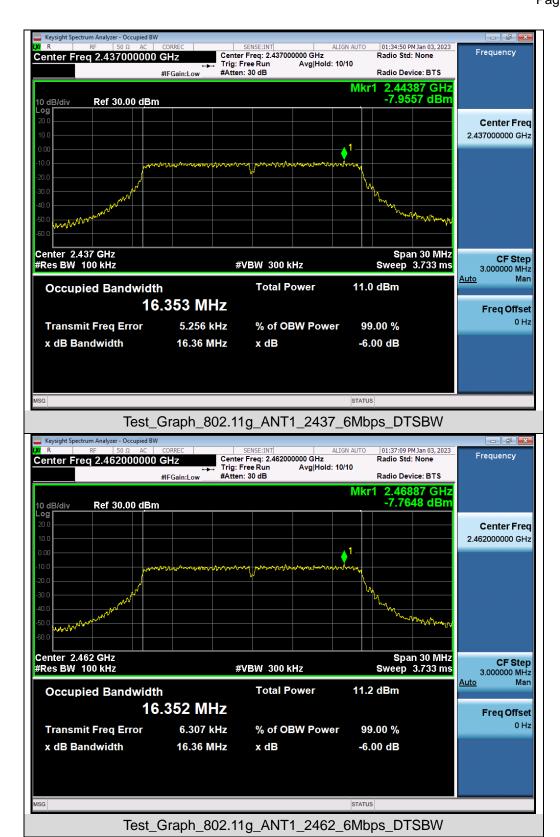




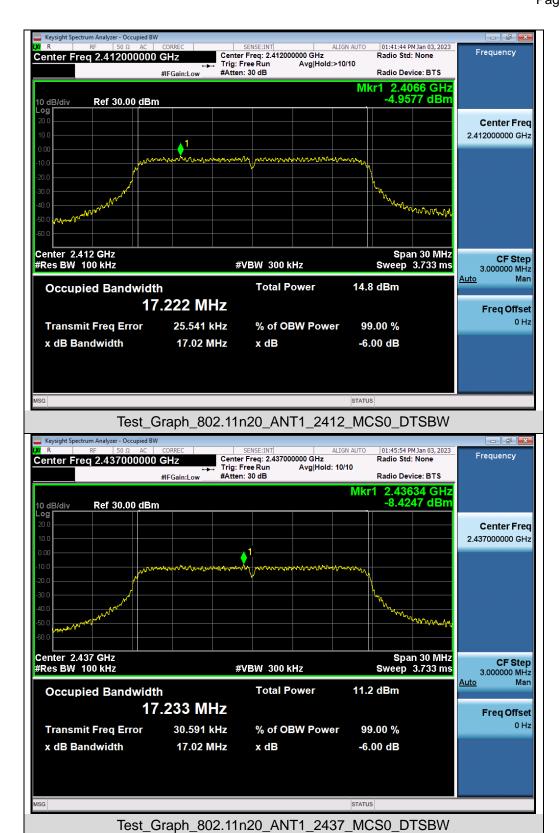



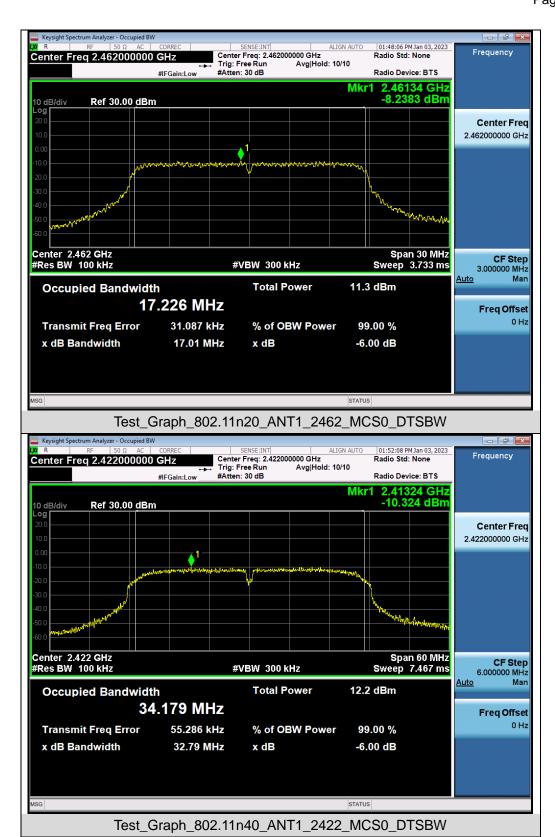



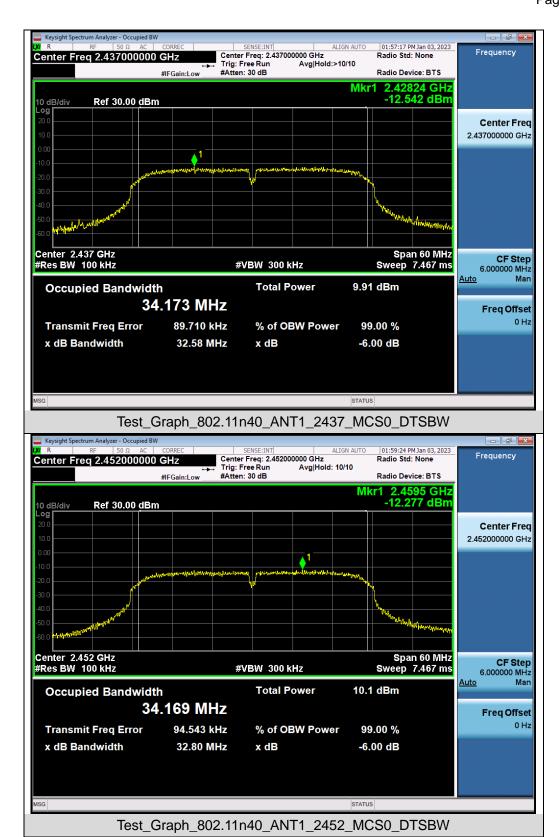



Page 30 of 80

# 9. CONDUCTED SPURIOUS EMISSION

# 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

**Note:** The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.

#### 9.3. MEASUREMENT EQUIPMENT USEDJN

The same as described in section 6.


#### 9.4. LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT                           |                                |          |  |  |
|---|--------------------------------|----------|--|--|
| Applicable Limite                                       | Measurement Result             |          |  |  |
| Applicable Limits                                       | Test Data                      | Criteria |  |  |
| In any 100 KHz Bandwidth Outside the                    | At least -20dBc than the limit |          |  |  |
| frequency band in which the spread spectrum             | Specified on the BOTTOM        | PASS     |  |  |
| intentional radiator is operating, the radio frequency  | Channel                        |          |  |  |
| power that is produce by the intentional radiator shall |                                |          |  |  |
| be at least 20 dB below that in 100KHz bandwidth        |                                |          |  |  |
| within the band that contains the highest level of the  |                                |          |  |  |
| desired power.  | At least -20dBc than the limit | PASS     |  |  |
| In addition, radiation emissions which fall in the      | Specified on the TOP Channel   | FAGG     |  |  |
| restricted bands, as defined in §15.205(a), must also   |                                |          |  |  |
| comply with the radiated emission limits specified      |                                |          |  |  |
| in§15.209(a))   |                                |          |  |  |

Note: The limits reference level is according to the test plot of -6dB bandwidth.




# Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

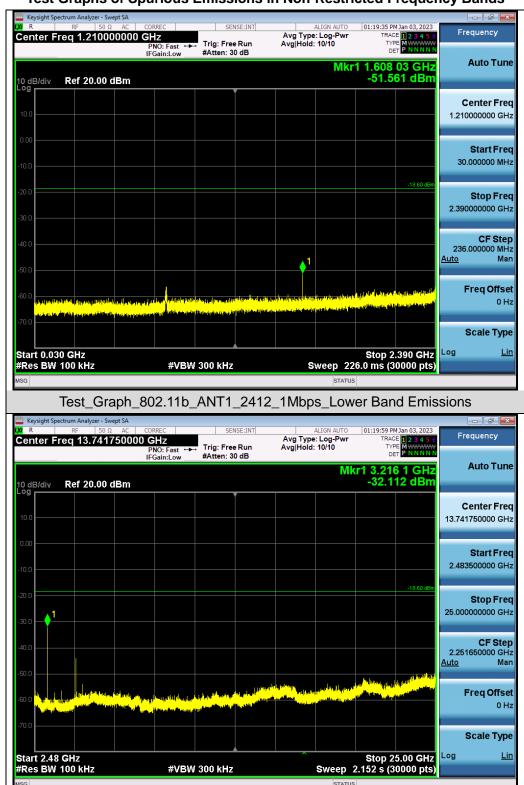

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11b\_ANT1\_2412\_1Mbps\_Higher Band Emissions



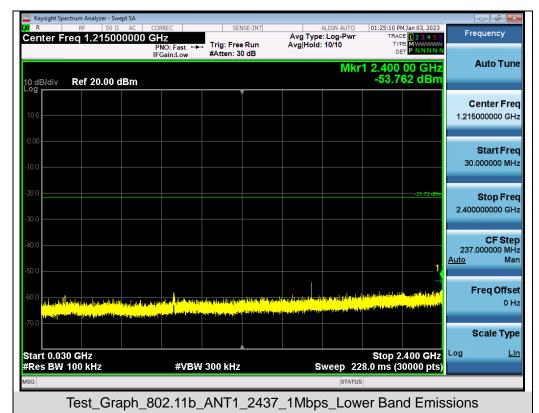





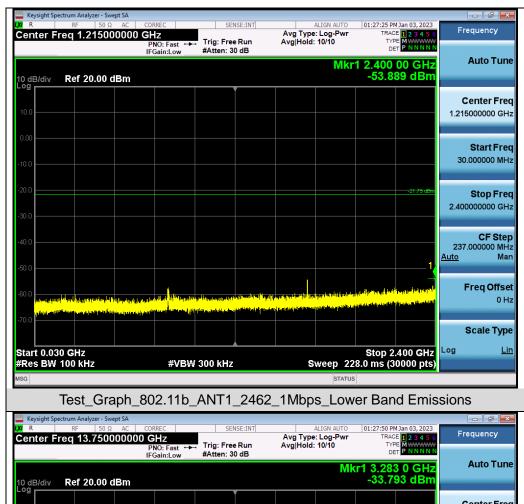



**CF Step** 2.251650000 GHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



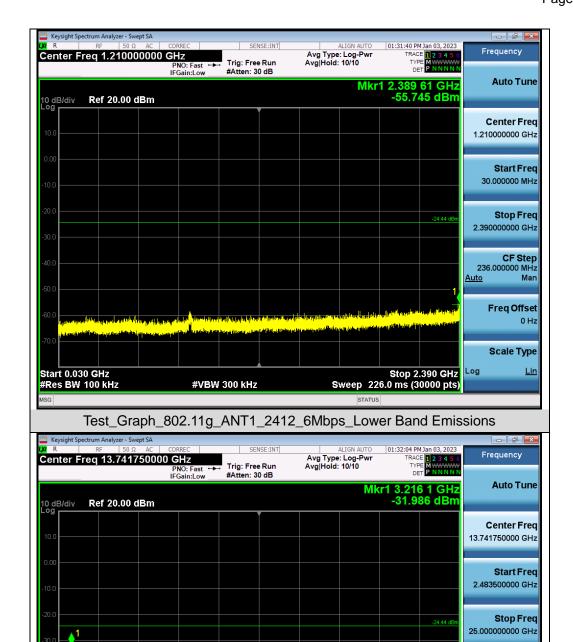


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Higher Band Emissions

#VBW 300 kHz


Start 2.48 GHz #Res BW 100 kHz



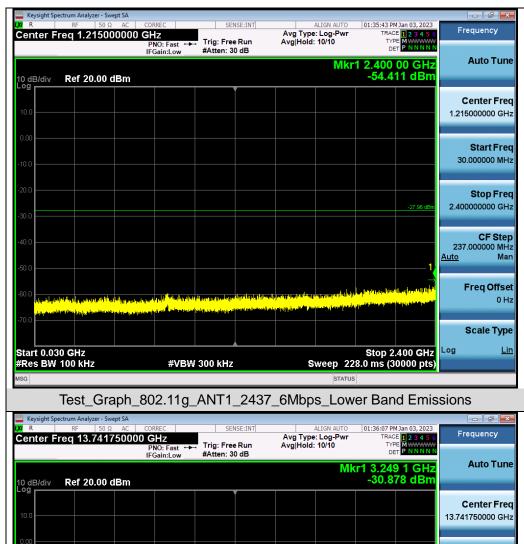







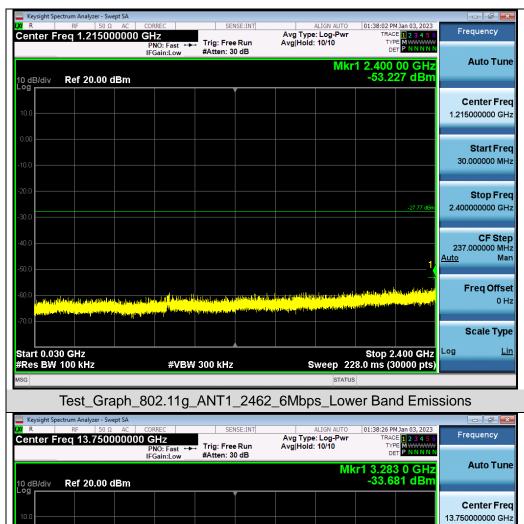







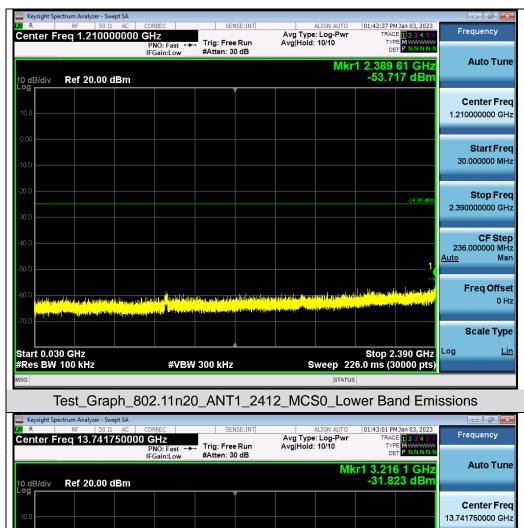

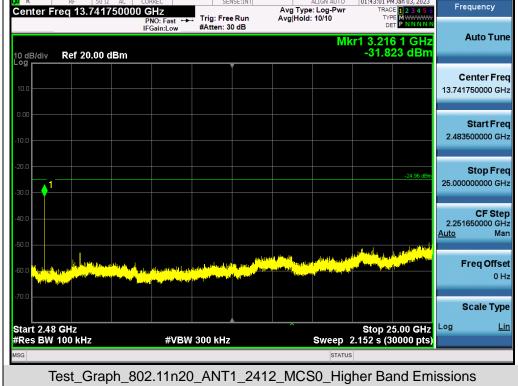




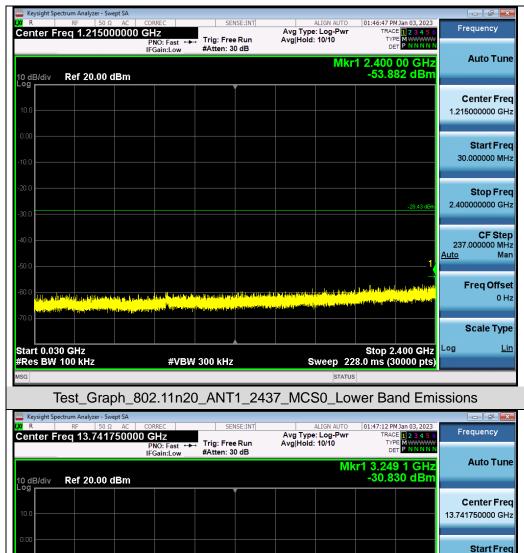

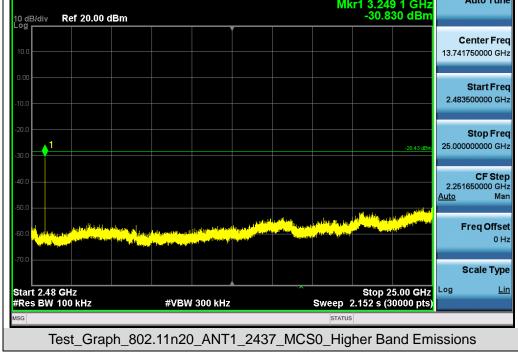

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



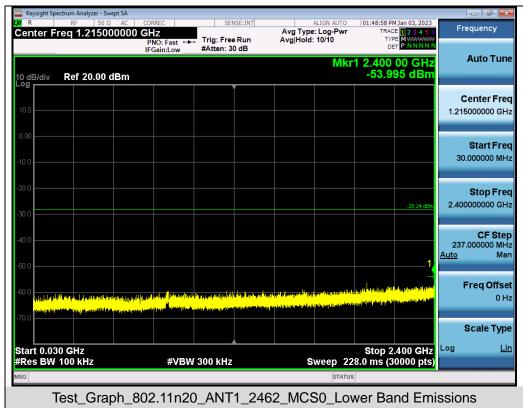



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

2.483500000 GHz

25.000000000 GHz

<u>Auto</u>


Log

Stop 25.00 GHz Sweep 2.152 s (30000 pts) **CF Step** 2.251650000 GHz

Freq Offset 0 Hz

Scale Type



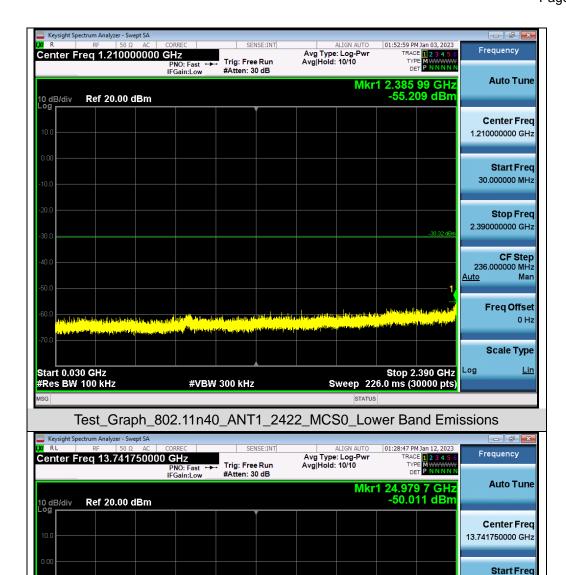


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n40\_ANT1\_2422\_MCS0\_Higher Band Emissions

#VBW 300 kHz


Start 2.48 GHz #Res BW 100 kHz



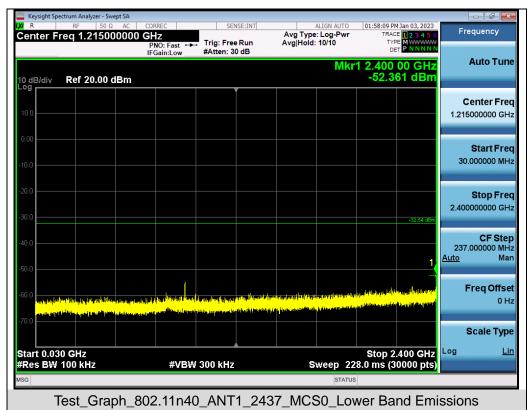





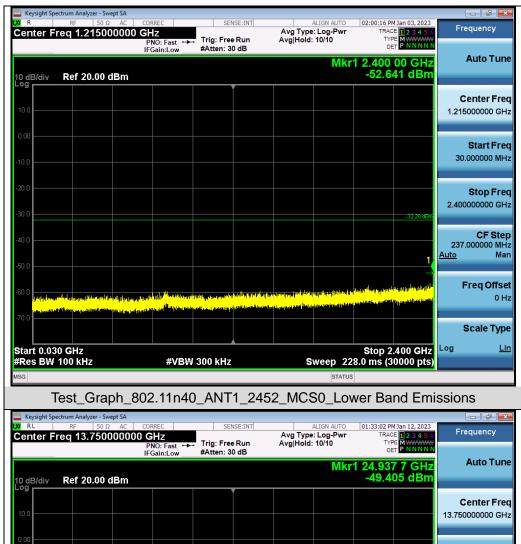




## Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_Lower Band Edge Emissions



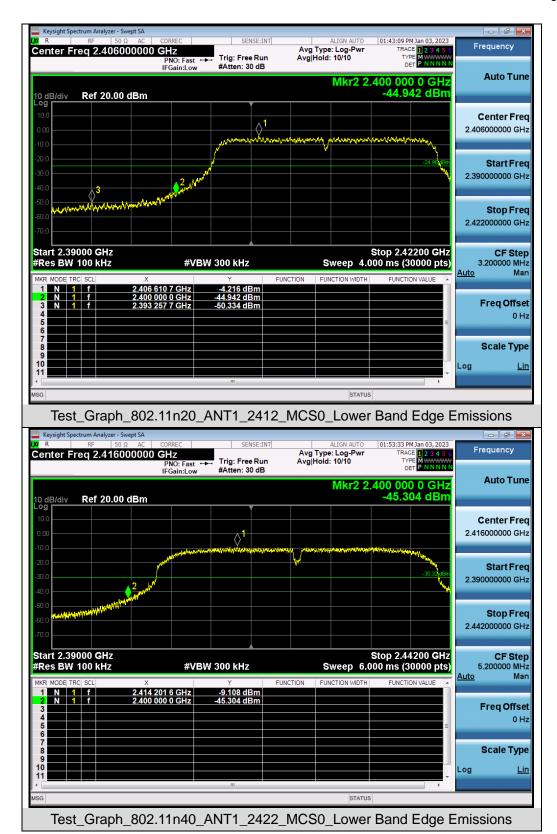

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Report No.: AGC12845221008FE05

Page 45 of 80

### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### **10.1 MEASUREMENT PROCEDURE**

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

# 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

### **10.3 MEASUREMENT EQUIPMENT USED**

Refer to Section 6.


### **10.4 LIMITS AND MEASUREMENT RESULT**

| Test Data of Conducted Output Power Spectral Density |                       |                              |                             |                     |              |
|--|-----------------------|------------------------------|-----------------------------|---------------------|--------------|
| Test Mode  | Test Channel<br>(MHz) | Power density<br>(dBm/20kHz) | Power density<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Pass or Fail |
| 802.11b  | 2412                  | -4.517                       | -12.756                     |                     | Pass         |
|  | 2437                  | -7.518                       | -15.757                     | - \$8               | Pass         |
|  | 2462                  | -7.579                       | -15.818                     | - \$8               | Pass         |
| 802.11g  | 2412                  | -9.421                       | -17.660                     | - ₹8                | Pass         |
|  | 2437                  | -12.658                      | -20.897                     | - \$8               | Pass         |
|  | 2462                  | -12.537                      | -20.776                     | - ₹8                | Pass         |
| 802.11n20  | 2412                  | -9.923                       | -18.162                     | - \$8               | Pass         |
|  | 2437                  | -13.060                      | -21.299                     | - ₹8                | Pass         |
|  | 2462                  | -13.366                      | -21.605                     |                     | Pass         |
| 802.11n40  | 2422                  | -13.950                      | -22.189                     | - ₹8                | Pass         |
|  | 2437                  | -15.870                      | -24.109                     | - ≪8                | Pass         |
|  | 2452                  | -16.241                      | -24.480                     | - ₹8                | Pass         |

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10\*log(20/3).



## **Test Graphs of Conducted Output Power Spectral Density**

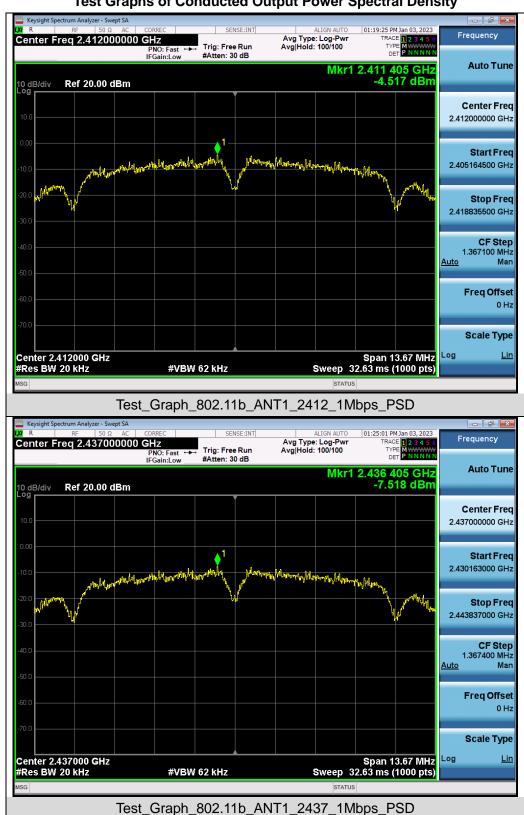


Scale Type

Log

Span 24.55 MHz Sweep 58.54 ms (1000 pts)



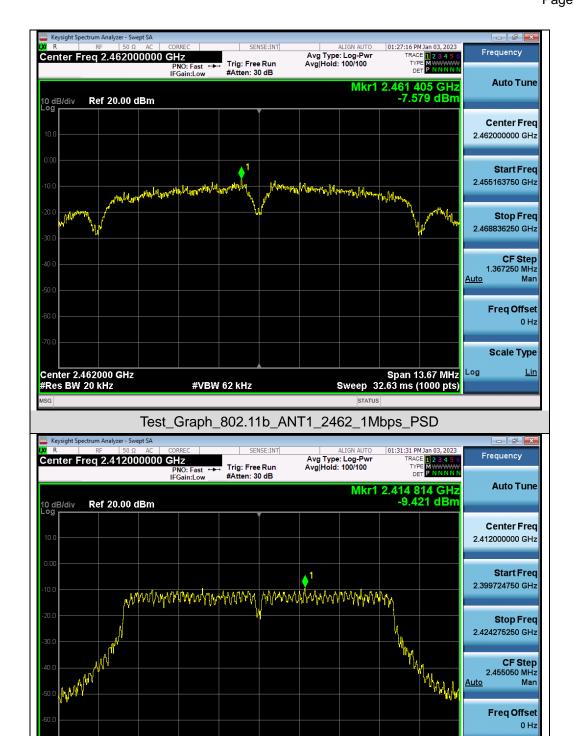


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_PSD


#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz



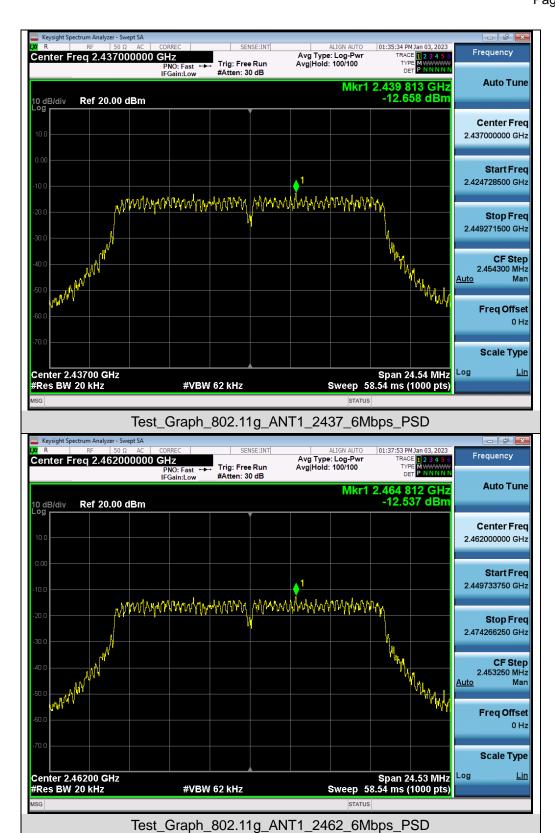




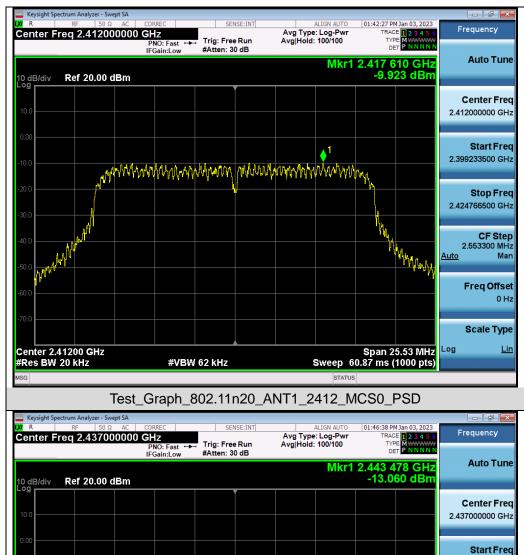


2.424236500 GHz paharahanayappahaisa  $\psi \sim V \sqrt{V_1 + V_2 + V_3 + V_4 + V_$ Stop Freq 2.449763500 GHz **CF Step** 2.552700 MHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Center 2.43700 GHz #Res BW 20 kHz Span 25.53 MHz Sweep 60.87 ms (1000 pts) Log #VBW 62 kHz Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_PSD



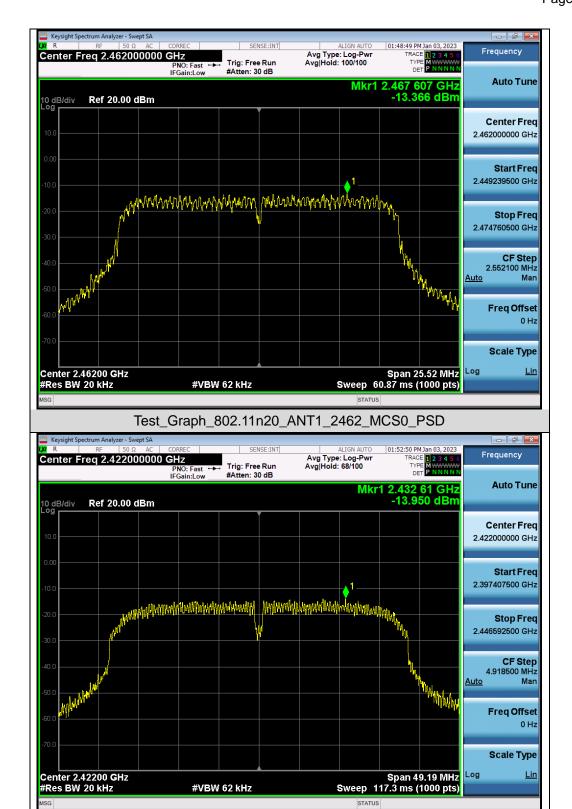

Test\_Graph\_802.11n40\_ANT1\_2422\_MCS0\_PSD



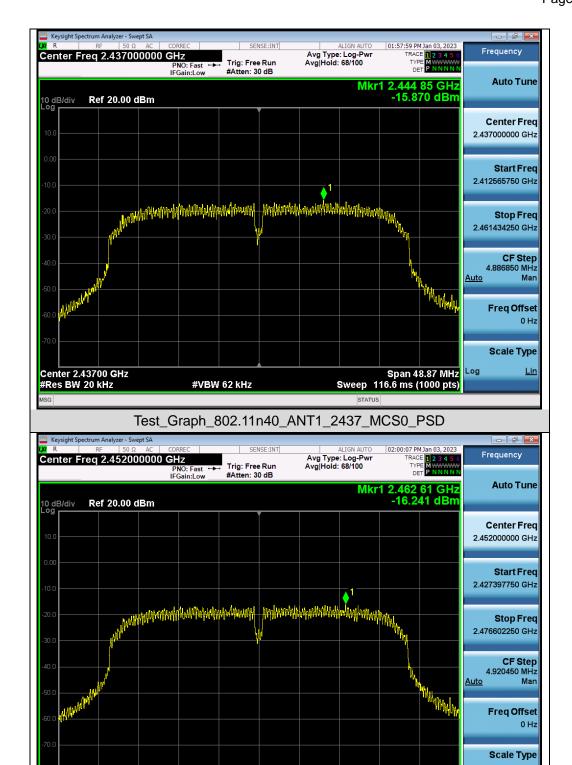

Test\_Graph\_802.11n40\_ANT1\_2452\_MCS0\_PSD

#VBW 62 kHz

Span 49.20 MHz Sweep 117.3 ms (1000 pts)

Log

Center 2.45200 GHz #Res BW 20 kHz