

FCC CERTIFICATION TEST REPORT

FOR

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Wireless Multi-Channel Soundbar
Model No.	:	CITATION MULTIBEAM 700
Trade Mark	:	harman/kardon
FCC ID	:	APIHKMB700A
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT.....	9
2.3.	Assistant equipment used for test.....	9
2.4.	Block diagram of EUT configuration for test	10
2.5.	Deviations of test standard.....	11
2.6.	Test environment conditions	11
2.7.	Test laboratory	11
2.8.	Measurement uncertainty.....	12
3.	Equipment Used During Test.....	13
4.	26dB Bandwidth	14
4.1.	Block diagram of test setup.....	14
4.2.	Limits	14
4.3.	Test procedure	14
4.4.	Test result.....	14
4.5.	Test graphs	14
5.	6dB Bandwidth	61
5.1.	Block diagram of test setup.....	61
5.2.	Limits	61
5.3.	Test procedure	61
5.4.	Test result B4	62
5.5.	Test graphs B4	62
6.	99% Bandwidth	72
6.1.	Block diagram of test setup.....	72
6.2.	Limits	72
6.3.	Test procedure	72
6.4.	Test result.....	72
6.5.	Test graphs	76
7.	Duty Cycle	120
7.1.	Block diagram of test setup.....	120
7.2.	Limit	120
7.3.	Test procedure	120
7.4.	Test result.....	121
7.5.	Test graphs	124
8.	Maximum Output Power.....	168

8.1.	Block diagram of test setup.....	168
8.2.	Limits	168
8.3.	Test procedure	168
8.4.	Test result channel power	168
9.	Power Spectral Density	172
9.1.	Block diagram of test setup.....	172
9.2.	Limits	172
9.3.	Test procedure	172
9.4.	Test result.....	173
9.5.	Test graphs	177
10.	Frequency Stability Measurement	225
10.1.	Limit of Frequency Stability	225
10.2.	Measuring Instruments.....	225
10.3.	Test procedures	225
10.4.	Test setup.....	225
10.5.	Test result.....	226
11.	Dynamic Frequency Selection	251
11.1.	Applicability of DFS requirements.....	251
11.2.	Limit.....	252
11.3.	Parameters of radar test waveforms.....	252
11.4.	Calibration of radar waveform	253
11.5.	Channel closing transmission time, channel move time and non-occupancy period	255
11.6.	Test setup.....	256
11.7.	Test result.....	256
12.	Emissions in Restricted Frequency Bands	259
12.1.	Block diagram of test setup.....	259
12.2.	Limit.....	260
12.3.	Test Procedure.....	261
12.4.	Test result.....	263
13.	Band Edge Compliance	292
13.1.	Block diagram of test setup.....	292
13.2.	Limit.....	292
13.3.	Test Procedure.....	292
13.4.	Test result.....	292
14.	Power Line Conducted Emission	382
14.1.	Block diagram of test setup.....	382
14.2.	Power Line Conducted Emission Limits	382
14.3.	Test Procedure.....	382

14.4.	Test Result	383
15.	Antenna Requirements	386
15.1.	Limit	386
15.2.	Result	386
16.	Test Setup Photograph	387
17.	Photos of the EUT	390

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Wireless Multi-Channel Soundbar
Model No.	:	CITATION MULTIBEAM 700
Trade Mark	:	harman/kardon
Manufacturer	:	Harman International Industries, Inc.
Address	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart E.

Test procedure used: ANSI C63.10:2013, 789033 D02 General U-NII Test Procedures New Rules v02r01, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No.:	DDT-RE23082223-2E04		
Date of Receipt:	Sep. 04, 2023	Date of Test:	Sep. 04, 2023 ~ Sep. 22, 2023

Prepared By:**Ella Gong/Engineer****Approved By:****Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 22, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
6/26db Bandwidth and 99% Bandwidth	FCC 15.407 (e)	PASS
Maximum Conducted Output Power	FCC 15.407 (a)	PASS
Power Spectral Density	FCC 15.407 (a)	PASS
Frequency Stability Measurement	FCC 15.407 (g)	PASS
Emissions in restricted frequency bands	FCC 15.407 (b) FCC 15.209 FCC 15.205	PASS
Band Edge Compliance	FCC 15.407 (b) FCC 15.209 FCC 15.205	PASS
Power Line Conducted Emission	FCC 15.207	PASS
Antenna requirement	FCC 15.203	PASS
Dynamic Frequency Selection	FCC 15.407 (h)	PASS

2. General Test Information

2.1. Description of EUT

EUT Name	: Wireless Multi-Channel Soundbar
Model Number	: CITATION MULTIBEAM 700
EUT function description	: Please reference user manual of this device
Power Supply	: AC 100-240V, 50-60Hz
Radio Technology	: IEEE 802.11a/n/ac
Operation frequency	: IEEE 802.11a: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz IEEE 802.11n HT20: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz IEEE 802.11n HT40: 5190MHz-5230MHz, 5270MHz-5310MHz, 5510MHz-5710MHz, 5755MHz-5795MHz IEEE 802.11ac VHT20: 5180MHz-5240MHz, 5260MHz-5320MHz, 5500MHz-5720MHz, 5745MHz-5825MHz IEEE 802.11ac VHT40: 5190MHz-5230MHz, 5270MHz-5310MHz, 5510MHz-5710MHz, 5755MHz-5795MHz IEEE 802.11ac VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Modulation	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Transmitter rate	: IEEE 802.11a: up to 54 Mbps IEEE 802.11n HT20: up to 144.4 Mbps IEEE 802.11n HT40: up to 300 Mbps IEEE 802.11ac VHT20: up to 173.4 Mbps IEEE 802.11ac VHT40: up to 400 Mbps IEEE 802.11ac VHT80: up to 866.6 Mbps
Antenna Type	: Antenna 1: FPC antenna, Maximum PK gain: 3.24 dBi Antenna 2: FPC antenna, Maximum PK gain: 3.68 dBi
TPC	: ☐ Support ☒ Not support
SISO Mode	: ☒ 11a ☒ 11n ☒ 11ac
MIMO Mode	: ☐ 11a ☒ 11n ☒ 11ac
Sample Number	: S23082223-02 for conductive, S23082223-01 for radiation

Note 1: EUT is the abbreviation of equipment under test.

Note 2: "☒" means to be chosen or applicable; "☐" means don't to be chosen or not applicable;
This note applies to entire report.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11a	3.24	3.68	/
IEEE 802.11n HT20	3.24	3.68	6.48
IEEE 802.11n HT40	3.24	3.68	6.48
IEEE 802.11ac VHT20	3.24	3.68	6.48
IEEE 802.11ac VHT40	3.24	3.68	6.48
IEEE 802.11ac VHT80	3.24	3.68	6.48

Channel information					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	/	/
44	5220	/	/	/	/
48	5240	/	/	/	/
UNII-2A					
52	5260	54	5270	58	5290
56	5280	62	5310		/
60	5300	/	/	/	/
64	5320	/	/	/	/
UNII-2C					
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630	/	/
116	5580	134	5670	/	/
120	5600	142	5710	/	/
124	5620	/	/	/	/
128	5640	/	/	/	/
132	5660	/	/	/	/
136	5680	/	/	/	/
140	5700	/	/	/	/
144	5720				
UNII-3					
149	5745	151	5755	155	5775
153	5765	159	5795	/	/
157	5785	/	/	/	/
161	5805	/	/	/	/
165	5825	/	/	/	/


2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
AC Cable	Harman	N/A	Length: 1.5m
HDMI Cable	Harman	N/A	Length: 1.5m, two magnetic rings
OPT Cable	Harman	N/A	Length: 1.5m
Remote control	Harman	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
N/A	N/A	N/A	N/A	N/A

2.4. Block diagram of EUT configuration for test



Test software: Putty.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 2 dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11a	Default	Default	6	CH36	5180
	Default	Default	6	CH40	5200
	Default	Default	6	CH48	5240
	Default	Default	6	CH52	5260
	Default	Default	6	CH56	5280
	Default	Default	6	CH64	5320
	Default	Default	6	CH100	5500
	Default	Default	6	CH116	5580
	Default	Default	6	CH140	5700
	Default	Default	6	CH144	5720
	Default	Default	6	CH149	5745
	Default	Default	6	CH157	5785
	Default	Default	6	CH165	5825
	Default	Default	6	CH165	5825
IEEE 802.11n HT20	Default	Default	MCS 8	CH36	5180
	Default	Default	MCS 8	CH40	5200
	Default	Default	MCS 8	CH48	5240
	Default	Default	MCS 8	CH52	5260
	Default	Default	MCS 8	CH56	5280
	Default	Default	MCS 8	CH64	5320
	Default	Default	MCS 8	CH100	5500
	Default	Default	MCS 8	CH116	5580
	Default	Default	MCS 8	CH140	5700
	Default	Default	MCS 8	CH144	5720
	Default	Default	MCS 8	CH149	5745
	Default	Default	MCS 8	CH157	5785
	Default	Default	MCS 8	CH165	5825
	Default	Default	MCS 8	CH165	5825
IEEE 802.11n HT40	Default	Default	MCS 8	CH38	5190
	Default	Default	MCS 8	CH46	5230
	Default	Default	MCS 8	CH54	5270
	Default	Default	MCS 8	CH62	5310
	Default	Default	MCS 8	CH102	5510
	Default	Default	MCS 8	CH110	5550
	Default	Default	MCS 8	CH134	5670
	Default	Default	MCS 8	CH142	5710
	Default	Default	MCS 8	CH151	5755
	Default	Default	MCS 8	CH159	5795
	Default	Default	MCS 8	CH159	5795
IEEE 802.11 ac VHT20	Default	Default	MCS 0	CH36	5180
	Default	Default	MCS 0	CH40	5200

	Default	Default	MCS 0	CH48	5240
	Default	Default	MCS 0	CH52	5260
	Default	Default	MCS 0	CH56	5280
	Default	Default	MCS 0	CH64	5320
	Default	Default	MCS 0	CH100	5500
	Default	Default	MCS 0	CH116	5580
	Default	Default	MCS 0	CH140	5700
	Default	Default	MCS 0	CH144	5720
	Default	Default	MCS 0	CH149	5745
	Default	Default	MCS 0	CH157	5785
	Default	Default	MCS 0	CH165	5825
IEEE 802.11 ac VHT40	Default	Default	MCS 0	CH38	5190
	Default	Default	MCS 0	CH46	5230
	Default	Default	MCS 0	CH54	5270
	Default	Default	MCS 0	CH62	5310
	Default	Default	MCS 0	CH102	5510
	Default	Default	MCS 0	CH110	5550
	Default	Default	MCS 0	CH134	5670
	Default	Default	MCS 0	CH142	5710
	Default	Default	MCS 0	CH151	5755
	Default	Default	MCS 0	CH159	5795
IEEE 802.11ac VHT80	Default	Default	MCS 0	CH42	5210
	Default	Default	MCS 0	CH58	5290
	Default	Default	MCS 0	CH106	5530
	Default	Default	MCS 0	CH122	5610
	Default	Default	MCS 0	CH138	5690
	Default	Default	MCS 0	CH155	5775

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation.

2.6. Test environment conditions

Temperature range:	+15℃ to +35 ℃
Humidity range:	20% to 75%
Pressure range:	86 kPa to 106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City,
Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☑RF Connected Test (Tonscend RF Measurement System 4#)					
Signal & Spectrum analyzer	R&S	FSV3044	101173	Apr. 23, 2023	1 Year
Wideband Radio Communication tester	R&S	CMW500	168801	Apr. 27, 2023	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Apr. 27, 2023	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 28, 2022	1 Year
RF Control Unit	Tonsend	JS0806-2	21I8060485	Apr. 27, 2023	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	May 15, 2023	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.3.2.22	N/A	N/A
☑Radiation 3#chamber					
EMI Test Receiver	R&S	ESU26	100472	Apr. 23, 2023	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Apr. 23, 2023	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Sep. 11, 2023	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	Jul. 12, 2023	2 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120 D	02468	Sep. 29, 2022	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 26, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-118A	18040084	Jul. 15, 2023	1 Year
Pre-amplifier	COM-POWER	PAM-840A	461369	Apr. 27, 2023	1 Year
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ-1.5M	4.5M+8M+1.5M	Apr. 21, 2023	1 Year
RF Cable	Yuhu Technology	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	Apr. 23, 2023	1 Year
Micro-Tronics filters	REBES	BRM50702	G555	N/A	N/A
Micro-Tronics filters	REBES	BRM50716	G392	N/A	N/A
High Pass filter	XB	XBLBQ-GTA67	210820-2-3	N/A	N/A
Test software	Tonscend	JS32-RE	V 5.0.0.1	N/A	N/A
☑Power Line Conducted Emissions Test 1#					
Test Receiver	R&S	ESCI	100551	Jul. 11, 2023	1 Year
LISN 1	R&S	ENV216	101109	Jul. 11, 2023	1 Year
LISN 2	R&S	ESH2-Z5	100309	Jul. 12, 2023	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Jul. 15, 2023	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Jul. 15, 2023	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. 26dB Bandwidth

4.1. Block diagram of test setup

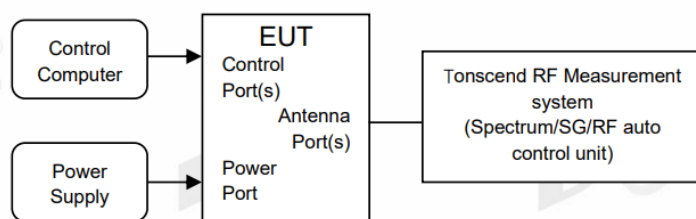

4.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Bandwidth	---	5150 - 5250
	---	5250 - 5350
	---	5470 - 5725

4.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	approximately 1% of the emission bandwidth.
VBW	> RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	21.12	5169.48	5190.60	---	---
	Ant2	5180	21.20	5169.40	5190.60	---	---
	Ant1	5200	21.20	5189.40	5210.60	---	---
	Ant2	5200	21.12	5189.48	5210.60	---	---
	Ant1	5240	21.12	5229.48	5250.60	---	---
	Ant2	5240	21.08	5229.48	5250.56	---	---
	Ant1	5260	21.04	5249.48	5270.52	---	---
	Ant2	5260	21.24	5249.40	5270.64	---	---
	Ant1	5280	21.16	5269.44	5290.60	---	---
	Ant2	5280	21.04	5269.48	5290.52	---	---
	Ant1	5320	21.16	5309.44	5330.60	---	---
	Ant2	5320	21.12	5309.44	5330.56	---	---
	Ant1	5500	21.16	5489.40	5510.56	---	---
	Ant2	5500	21.24	5489.44	5510.68	---	---
	Ant1	5580	21.04	5569.48	5590.52	---	---

	Ant2	5580	21.16	5569.40	5590.56	---	---
	Ant1	5700	21.12	5689.48	5710.60	---	---
	Ant2	5700	21.12	5689.44	5710.56	---	---
	Ant1	5720	21.32	5709.36	5730.68	---	---
	Ant2	5720	21.28	5709.32	5730.60	---	---
	Ant1	5720 UNII-2C	15.64	5709.36	5725	---	---
	Ant2	5720 UNII-2C	15.68	5709.32	5725	---	---
	Ant1	5720 UNII-3	5.68	5725	5730.68	---	---
	Ant2	5720 UNII-3	5.6	5725	5730.60	---	---
	Ant1	5745	21.16	5734.40	5755.56	---	---
	Ant2	5745	21.08	5734.44	5755.52	---	---
	Ant1	5785	21.04	5774.52	5795.56	---	---
	Ant2	5785	21.20	5774.44	5795.64	---	---
	Ant1	5825	21.20	5814.36	5835.56	---	---
	Ant2	5825	21.12	5814.48	5835.60	---	---
11N20MIMO	Ant1	5180	21.48	5169.32	5190.80	---	---
	Ant2	5180	21.80	5168.96	5190.76	---	---
	Ant1	5200	21.64	5189.20	5210.84	---	---
	Ant2	5200	21.72	5189.00	5210.72	---	---
	Ant1	5240	21.52	5229.24	5250.76	---	---
	Ant2	5240	21.76	5229.00	5250.76	---	---
	Ant1	5260	21.64	5249.20	5270.84	---	---
	Ant2	5260	21.44	5249.40	5270.84	---	---
	Ant1	5280	21.44	5269.32	5290.76	---	---
	Ant2	5280	21.56	5269.28	5290.84	---	---
	Ant1	5320	21.40	5309.36	5330.76	---	---
	Ant2	5320	21.52	5309.28	5330.80	---	---
	Ant1	5500	21.60	5489.32	5510.92	---	---
	Ant2	5500	21.52	5489.28	5510.80	---	---
	Ant1	5580	21.52	5569.32	5590.84	---	---
	Ant2	5580	21.44	5569.36	5590.80	---	---
	Ant1	5700	21.44	5689.36	5710.80	---	---
	Ant2	5700	21.40	5689.40	5710.80	---	---
	Ant1	5720	21.52	5709.24	5730.76	---	---
	Ant2	5720	21.60	5709.20	5730.80	---	---
	Ant1	5720 UNII-2C	15.76	5709.24	5725	---	---
	Ant2	5720 UNII-2C	15.8	5709.20	5725	---	---
	Ant1	5720 UNII-3	5.76	5725	5730.76	---	---
	Ant2	5720 UNII-3	5.8	5725	5730.80	---	---
	Ant1	5745	21.52	5734.28	5755.80	---	---
	Ant2	5745	21.48	5734.32	5755.80	---	---
	Ant1	5785	21.52	5774.28	5795.80	---	---
	Ant2	5785	21.40	5774.40	5795.80	---	---
	Ant1	5825	21.60	5814.28	5835.88	---	---
	Ant2	5825	21.56	5814.28	5835.84	---	---
11N40MIMO	Ant1	5190	40.64	5169.60	5210.24	---	---
	Ant2	5190	43.28	5166.72	5210.00	---	---
	Ant1	5230	40.64	5209.76	5250.40	---	---
	Ant2	5230	40.16	5210.00	5250.16	---	---
	Ant1	5270	40.72	5249.68	5290.40	---	---
	Ant2	5270	39.92	5250.16	5290.08	---	---
	Ant1	5310	40.64	5289.68	5330.32	---	---
	Ant2	5310	40.24	5290.08	5330.32	---	---
	Ant1	5510	40.64	5489.84	5530.48	---	---
	Ant2	5510	40.00	5490.16	5530.16	---	---
	Ant1	5550	40.64	5529.76	5570.40	---	---
	Ant2	5550	40.00	5530.08	5570.08	---	---
	Ant1	5670	40.72	5649.68	5690.40	---	---
	Ant2	5670	40.16	5649.92	5690.08	---	---
	Ant1	5710	40.80	5689.68	5730.48	---	---
	Ant2	5710	40.24	5689.84	5730.08	---	---
	Ant1	5710 UNII-2C	35.32	5689.68	5725	---	---
	Ant2	5710 UNII-2C	35.16	5689.84	5725	---	---
	Ant1	5710 UNII-3	5.48	5725	5730.48	---	---

	Ant2	5710 UNII-3	5.08	5725	5730.08	---	---
	Ant1	5755	40.56	5734.76	5775.32	---	---
	Ant2	5755	40.24	5735.00	5775.24	---	---
	Ant1	5795	40.40	5774.84	5815.24	---	---
	Ant2	5795	39.76	5775.08	5814.84	---	---
11AC20MIMO	Ant1	5180	21.60	5169.16	5190.76	---	---
	Ant2	5180	21.32	5169.36	5190.68	---	---
	Ant1	5200	21.44	5189.28	5210.72	---	---
	Ant2	5200	21.60	5189.12	5210.72	---	---
	Ant1	5240	21.60	5229.20	5250.80	---	---
	Ant2	5240	21.40	5229.32	5250.72	---	---
	Ant1	5260	21.48	5249.36	5270.84	---	---
	Ant2	5260	21.32	5249.40	5270.72	---	---
	Ant1	5280	21.52	5269.24	5290.76	---	---
	Ant2	5280	21.44	5269.28	5290.72	---	---
	Ant1	5320	21.44	5309.36	5330.80	---	---
	Ant2	5320	21.52	5309.28	5330.80	---	---
	Ant1	5500	21.56	5489.24	5510.80	---	---
	Ant2	5500	18.92	5490.20	5509.12	---	---
	Ant1	5580	21.56	5569.24	5590.80	---	---
	Ant2	5580	21.48	5569.28	5590.76	---	---
	Ant1	5700	21.68	5689.12	5710.80	---	---
	Ant2	5700	21.44	5689.28	5710.72	---	---
	Ant1	5720	21.52	5709.28	5730.80	---	---
	Ant2	5720	21.40	5709.36	5730.76	---	---
	Ant1	5720 UNII-2C	15.72	5709.28	5725	---	---
	Ant2	5720 UNII-2C	15.64	5709.36	5725	---	---
	Ant1	5720 UNII-3	5.8	5725	5730.80	---	---
	Ant2	5720 UNII-3	5.76	5725	5730.76	---	---
	Ant1	5745	21.44	5734.32	5755.76	---	---
	Ant2	5745	21.64	5734.16	5755.80	---	---
	Ant1	5785	21.52	5774.32	5795.84	---	---
	Ant2	5785	21.36	5774.40	5795.76	---	---
	Ant1	5825	21.52	5814.28	5835.80	---	---
	Ant2	5825	21.32	5814.40	5835.72	---	---
11AC40MIMO	Ant1	5190	40.56	5169.76	5210.32	---	---
	Ant2	5190	39.92	5170.08	5210.00	---	---
	Ant1	5230	40.32	5209.92	5250.24	---	---
	Ant2	5230	39.76	5210.24	5250.00	---	---
	Ant1	5270	40.72	5249.60	5290.32	---	---
	Ant2	5270	39.76	5250.16	5289.92	---	---
	Ant1	5310	40.80	5289.52	5330.32	---	---
	Ant2	5310	39.92	5290.16	5330.08	---	---
	Ant1	5510	40.56	5489.76	5530.32	---	---
	Ant2	5510	39.76	5490.24	5530.00	---	---
	Ant1	5550	40.64	5529.76	5570.40	---	---
	Ant2	5550	40.32	5530.08	5570.40	---	---
	Ant1	5670	40.72	5649.76	5690.48	---	---
	Ant2	5670	40.16	5650.00	5690.16	---	---
	Ant1	5710	40.56	5689.84	5730.40	---	---
	Ant2	5710	40.00	5690.00	5730.00	---	---
	Ant1	5710 UNII-2C	35.16	5689.84	5725	---	---
	Ant2	5710 UNII-2C	35	5690.00	5725	---	---
	Ant1	5710 UNII-3	5.4	5725	5730.40	---	---
	Ant2	5710 UNII-3	5	5725	5730.00	---	---
	Ant1	5755	40.72	5734.52	5775.24	---	---
	Ant2	5755	40.08	5735.00	5775.08	---	---
	Ant1	5795	40.48	5774.84	5815.32	---	---
	Ant2	5795	39.60	5775.24	5814.84	---	---
11AC80MIMO	Ant1	5210	82.88	5168.56	5251.44	---	---
	Ant2	5210	82.72	5168.72	5251.44	---	---
	Ant1	5290	83.20	5248.40	5331.60	---	---
	Ant2	5290	82.88	5248.72	5331.60	---	---
	Ant1	5530	82.56	5488.72	5571.28	---	---

Ant2	5530	82.24	5489.04	5571.28	---	---
Ant1	5610	82.72	5568.88	5651.60	---	---
Ant2	5610	83.20	5568.56	5651.76	---	---
Ant1	5690	83.52	5648.40	5731.92	---	---
Ant2	5690	82.72	5648.72	5731.44	---	---
Ant1	5690 UNII-2C	76.6	5648.40	5725	---	---
Ant2	5690 UNII-2C	76.28	5648.72	5725	---	---
Ant1	5690 UNII-3	6.92	5725	5731.92	---	---
Ant2	5690 UNII-3	6.44	5725	5731.44	---	---
Ant1	5775	82.72	5733.88	5816.60	---	---
Ant2	5775	82.72	5733.72	5816.44	---	---

4.5. Test graphs





















