


# RF TEST REPORT



## VHF Air Band Transceiver

Model Nos.: IC-A220

FCC ID: AFJ297430

IC: 202D-297430

Applicant:

ICOM Incorporated

1-1-32, Kamiminami, Hirano-ku

Osaka, Japan, 547-0003

Tested in Accordance with

Federal Communications Commission (FCC)

47 CFR, Parts 2 and 87 (Subpart D) – Aviation Services

ISED, RSS-141, Issue 2- Aeronautical Radio communication Equipment  
in the Frequency Band 117.975-137 MHz

UltraTech's File No.: 24ICOM620\_FCC87RSS141

This Test report is Issued under the Authority of  
Tri M. Luu, BASc  
Vice President of Engineering  
UltraTech Group of Labs

Date: December 17, 2024

Report Prepared by: Santhosh Fernandez

Tested by: Angus Au

Issued Date: December 17, 2024

Test Dates: November 21-December 11, 2024

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by any agency of the US Government.
- This test report shall not be reproduced, except in full, without a written approval from UltraTech

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



Lab Code: 0685



APEC TEL CA0001



1309



CA 0001/2049



AT-1945



SL2-IN-E-1119R



Korea KCC-RRR

CA2049

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION .....</b>	<b>3</b>
1.1. SCOPE.....	3
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	3
1.3. NORMATIVE REFERENCES .....	3
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT .....</b>	<b>4</b>
2.1. CLIENT INFORMATION .....	4
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	4
2.3. EUT'S TECHNICAL SPECIFICATIONS .....	5
2.4. LIST OF EUT'S PORTS .....	5
2.5. ANCILLARY EQUIPMENT .....	5
<b>EXHIBIT 3. EUT OPERATING CONDITION AND CONFIGURATIONS DURING TESTS.....</b>	<b>6</b>
3.1. CLIMATE TEST CONDITIONS .....	6
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS .....	6
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
4.1. LOCATION OF TESTS .....	7
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	7
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	7
4.4. DEVIATION OF STANDARD TEST PROCEDURES .....	7
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>	<b>8</b>
5.1. TEST PROCEDURES.....	8
5.2. MEASUREMENT UNCERTAINTIES.....	8
5.3. MEASUREMENT EQUIPMENT USED .....	8
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER .....	8
5.5. RF POWER OUTPUT [§§ 2.1046 & 87.131] [RSS-141 § 5.1] .....	9
5.5.1. Limits .....	9
5.5.2. Method of Measurements.....	9
5.5.3. Test Data .....	10
5.6. OCCUPIED BANDWIDTH AND EMISSION LIMITATIONS [§§ 2.1049, 87.135 & 87.139] [RSS-141 §§ 5.1 & 5.2.2] .....	11
5.6.1. Limits .....	11
5.6.2. Method of Measurements.....	11
5.6.3. Test Data .....	12
5.7. MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE [§§ 2.1047(A) & 87.141(A)].....	21
5.7.1. Limits .....	21
5.7.2. Method of Measurements.....	21
5.7.3. Test Data .....	22
5.8. MODULATION CHARACTERISTICS – MODULATION LIMITING [§§ 2.1047(B) & 87.141] [RSS-141 § 5.1] .....	26
5.8.1. Method of Measurements.....	26
5.8.2. Test Data .....	27
5.9. FIELD STRENGTH OF SPURIOUS EMISSIONS [§§ 2.1053, 87.139] [RSS-141 § 5.2] .....	31
5.9.1. Limits @ FCC 87.139.....	31
5.9.2. Method of Measurements.....	31
5.9.3. Test Data .....	31
5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 87.139] [RSS-141 § 5.2] .....	32
5.10.1. Limits .....	32
5.10.2. Method of Measurements.....	32

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10.3.	Test Data .....	32
5.11.	FREQUENCY STABILITY [§§ 2.1055 & 87.133] [RSS-141 § 5.1] .....	37
5.11.1.	Limits .....	37
5.11.2.	Method of Measurements.....	37
5.11.3.	Test Data .....	38
5.12.	EXPOSURE OF HUMANS TO RF FIELD [§§ 1.1310 & 2.1091] [RSS GEN SEC 5.6 & RSS-102].....	39
5.12.1.	Method of Measurements.....	41
5.12.2.	RF Evaluation.....	41
5.1.	RECEIVER SPOUROUS EMISSIONS (RADIATED) [RSS-141 § 5.3] .....	42
5.1.1.	Limits .....	42
5.1.2.	Method of Measurements.....	42
5.1.3.	Test Data .....	42
5.2.	RECEIVER SPOUROUS EMISSIONS (CONDUCTED) [RSS-141 § 5.3].....	43
5.2.1.	Limits .....	43
5.2.2.	Method of Measurements.....	43
5.2.3.	Test Data .....	43
5.3.	POWERLINE CONDUCTED EMISSIONS FROM UNINTENTIONAL RADIATORS (DIGITAL DEVICES) [RSS-GEN § 8.8 & ICES-003, ISSUE 7] .....	49
5.3.1.	Limits .....	49
5.3.2.	Method of Measurements.....	49
5.3.3.	Test Data .....	50
5.4.	RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS (DIGITAL APPARATUS) [ICES-003, ISSUE 7].....	54
5.4.1.	Limits .....	54
5.4.2.	Method of Measurements.....	54
5.4.3.	Test Data .....	54
<b>EXHIBIT 6.</b>	<b>TEST EQUIPMENT LIST AND SETUP .....</b>	<b>55</b>
6.1.	CONDUCTED POWER .....	55
6.2.	MODULATION LIMIT.....	56
6.3.	AUDIO FREQUENCY RESPONSE.....	57
6.4.	99% OBW AND MASK .....	58
6.5.	TX CONDUCTED EMISSION .....	59
6.6.	RX CONDUCTED EMISSION .....	60
6.7.	TX RADIATED .....	61
6.8.	RX RADIATED .....	62
6.9.	FREQUENCY STABILITY .....	63
6.10.	POWER LINE CONDUCTED EMISSIONS .....	64
<b>EXHIBIT 7.</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>65</b>

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Parts 2 and 87 ISSED RSS-141, Issue 2
<b>Title:</b>	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2 & 87 Aeronautical Radiocommunication Equipment in the Frequency Band 117.975-137 MHz
<b>Purpose of Test:</b>	To gain FCC Equipment Authorization Certification for Radio operating in Part 87. To gain Technical Acceptance Certificate (TAC) under RSS-141 for Category I equipment.
<b>Test Procedures:</b>	<ul style="list-style-type: none"><li>▪ ANSI/TIA-603-E-2016</li><li>▪ ANSI C63.26-2015</li><li>▪ RSS-141, Issue 2</li><li>• RSS-Gen, Issue 5</li></ul>

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2024	Code of Federal Regulations, Title 47 – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/TIA-603-E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26	2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
RSS-141, Issue 2	2010	Aeronautical Radiocommunication Equipment in the Frequency Band 117.975-137 MHz
RSS-Gen, Issue 5	2018	General Requirements for Compliance of Radio Apparatus (Amendments to 2021)
ICES-003, Issue 7	2020	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	Icom Incorporated
<b>Address:</b>	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
<b>Contact Person:</b>	Mr. Tatsuo Yano Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: <a href="mailto:isales@icom.co.jp">isales@icom.co.jp</a>

MANUFACTURER	
<b>Name:</b>	Icom Incorporated
<b>Address:</b>	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
<b>Contact Person:</b>	Mr. Tatsuo Yano Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: <a href="mailto:isales@icom.co.jp">isales@icom.co.jp</a>

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	ICOM Incorporated
<b>Product Name:</b>	VHF Air Band Transceiver
<b>Model Name or Number:</b>	IC-A220
<b>Serial Number:</b>	0000244
<b>External Power Supply:</b>	DC 13.8V / 27.5V
<b>Transmitting/Receiving Antenna Type:</b>	Non-integral
<b>Type of Equipment:</b>	Non-broadcast Radio Communication Equipment
<b>Primary User Functions of EUT:</b>	VHF air band transceiver for voice communication in Occupational environment.

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Mobile or Base
Intended Operating Environment:	Commercial, industrial or business environment
Power Supply Requirement:	DC 13.8V / 27.5V
RF Output Power Rating:	8W
Operating Frequency Range:	118.00-136.9917MHz 161.65-163.275 MHz ( Rx only)
RF Output Impedance:	50 $\Omega$
Channel Spacing:	25.0 kHz, 8.33 kHz
Emission Designation*:	6K00A3E, 5K60A3E
Antenna Connector Type:	BNC

\* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

### Calculation of Necessary Bandwidth for Telephony (Commercial Quality)

Telephony, double-sideband (single channel):

$$B_n = 2M$$

Where:  $B_n$  = Necessary bandwidth in hertz  
 $M$  = Maximum modulation frequency in hertz

$$M = 3000\text{Hz}$$

$$B_n = 2(3000) = 6000 \text{ Hz} = 6.00 \text{ KHz}$$

## 2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Antenna	1	BNC	Shielded
2	D-SUB 25 Pin Connector	1	DB 25	Non-shielded

## 2.5. ANCILLARY EQUIPMENT

The EUT was connected to a Jig for testing through the DB25 connector.

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 3. EUT OPERATING CONDITION AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	30% - 57%
Pressure:	102 kPa
Power input source:	27.5V DC Power Supply

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

<b>Operating Modes:</b>	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
<b>Special Test Software:</b>	N/A
<b>Special Hardware Used:</b>	Test jig was provided by the manufacturer.
<b>Transmitter Test Antenna:</b>	The EUT is tested with the transmitter antenna port terminated to a 50 $\Omega$ Load.

Transmitter Test Signals	
<b>Frequency Band(s):</b>	118.00-136.9917MHz
<b>Test Frequency(ies):</b> (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	25 kHz Ch. Spacing: 118.025, 127.500 and 136.975 MHz 8.33 kHz Ch. Spacing: 118.005, 127.505 and 136.990 MHz
<b>Transmitter Wanted Output Test Signals:</b> <ul style="list-style-type: none"><li>RF Power Output (measured maximum output power):</li><li>Normal Test Modulation:</li><li>Modulating signal source:</li></ul>	8 W  AM or 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation  External

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC/ISED RSS Section(s)	Test Requirements	Applicability (Yes/No)
2.1046 & 87.131 RSS-141, Section 5.1	RF Power Output	Yes
2.1047(a) & 87.141(f)	Modulation Characteristics - Audio Frequency Response	Yes
2.1047(b) & 87.141 RSS-141, Section 5.1	Modulation Characteristics - Modulation Limiting	Yes
2.1049, 87.135, 87.137 & 87.139 RSS-141, Sections 5.1 and 5.2.2	Occupied Bandwidth and Emission Limitations	Yes
2.1051, 2.1057 & 87.139, RSS-141, Section 5.2	Spurious Emissions at Antenna Terminals	Yes
2.1053, 2.1057 & 87.139 RSS-141, Section 5.2	Field Strength of Spurious Radiation	Yes
2.1055 & 87.133 RSS-141, Section 5.1	Frequency Stability	Yes
1.1307, 1.1310 & 2.1091 RSS-Gen, §3.4 & RSS-102	Radiofrequency Radiation Exposure Evaluation	Yes
RSS-Gen, § 6.4	External Controls	Yes
ICES-003, Issue 7	Digital Apparatus	Yes

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

### 4.4. DEVIATION OF STANDARD TEST PROCEDURES

None

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report.

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

### **5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER**

The essential function of the EUT is to correctly communicate to and from radios over RF link.

## 5.5. RF POWER OUTPUT [§§ 2.1046 & 87.131] [RSS-141 § 5.1]

### 5.5.1. Limits

The following table lists authorized emissions and maximum power. Power must be determined by direct measurement.

Class of station	Frequency band/ frequency	Authorized emission(s) <sup>2</sup>	Maximum power <sup>1</sup>
Aeronautical advisory	VHF	A3E	10 watts <sup>3</sup>
Aeronautical multicom	VHF	A3E	10 watts
Aeronautical search and rescue	VHF	A3E	10 watts
Aviation support	VHF	A3E	50 watts
Airport control tower	VHF	A3E	50 watts
Aeronautical utility mobile	VHF	A3E	10 watts
Aircraft	VHF	A3E	55 watts

Notes:

- (1) The power is measured at the transmitter output terminals and the type of power is determined according to the emission designator as follows:
  - (i) Mean power (pY) for amplitude modulated emissions and transmitting both sidebands using unmodulated full carrier.
  - (ii) Peak envelope power (pX) for all emission designators other than those referred to in paragraph (i) of this note.
- (2) Excludes automatic link establishment.
- (3) Power is limited to 0.5 watt, but may not exceed 2 watts when station is used in an automatic unattended mode

[RSS-141 § 5.1]Transmitters shall comply with the limits and requirements as listed below.

Ground Equipment:

- 50 W for fixed equipment with A9W, G1D or G7D emissions
- 300 W for fixed equipment with A3E emissions
- 20 W for mobile, portable and transportable equipment with A3E emissions

Airborne Equipment:

- 55 W

### 5.5.2. Method of Measurements

TIA-603-E / ANSI C63.26

### 5.5.3. Test Data

#### 13.8V Dc

Frequency MHz	25KHz/ 8.33KHz	Measured dBm	Power Rating dBm	Power Rating Watts	Actual Power Watts
118.025	25KHz	39.01	39.03	8	7.96
127.500	25KHz	39.01	39.03	8	7.96
136.975	25KHz	38.96	39.03	8	7.87
118.005	8.33KHz	39.03	39.03	8	8.00
127.505	8.33KHz	39.02	39.03	8	7.98
136.990	8.33KHz	38.96	39.03	8	7.87

#### 27.5V Dc

Frequency MHz	25KHz/ 8.33KHz	Measured dBm	Power Rating dBm	Power Rating Watts	Actual Power Watts
118.025	25KHz	38.99	39.03	8	7.93
127.500	25KHz	39.00	39.03	8	7.94
136.975	25KHz	38.98	39.03	8	7.91
118.005	8.33KHz	38.99	39.03	8	7.93
127.505	8.33KHz	39.00	39.03	8	7.94
136.990	8.33KHz	38.97	39.03	8	7.89

## 5.6. OCCUPIED BANDWIDTH AND EMISSION LIMITATIONS [§§ 2.1049, 87.135 & 87.139] [RSS-141 §§ 5.1 & 5.2.2]

### 5.6.1. Limits

§ 87.139(a) Except for ELTs and when using single sideband (R3E, H3E, J3E), or frequency modulation (F9) or digital modulation (F9Y) for telemetry or telecommand in the frequency bands 1435–1535 MHz and 2310–2390 MHz or digital modulation (G7D) for differential GPS, the mean power of any emission must be attenuated below the mean power of the transmitter (pY) as follows:

- (1) When the frequency is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth the attenuation must be at least 25 dB;
- (2) When the frequency is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth the attenuation must be at least 35 dB.
- (2) When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least  $43 + 10 \log_{10} pY$  dB.

[RSS-141 §§ 5.1 & 5.2.2]

Transmitters shall comply with the limits and requirements as listed below.

#### Necessary Bandwidth:

6 kHz for A3E emissions  
13 kHz for A9W emissions  
14 kHz for G1D and G7D emissions

#### Transmitter with A3E or A9W Emissions:

For transmitters with A3E or A9W emissions, the mean power of any emissions shall be attenuated below the mean power of the transmitter, P as follows:

- (a) When the frequency is removed from the equipment's channel centre frequency by more than 50% up to and including 100% of the channel bandwidth, the attenuation shall be at least 25 dB, measured with a bandwidth of 300 Hz;
- (b) When the frequency is removed from the equipment's channel centre frequency by more than 100% up to and including 250% of the channel bandwidth, the attenuation shall be at least 35 dB, measured with a bandwidth of 300 Hz;
- (c) When the frequency is removed from the equipment's channel centre frequency by more than 250% of the channel bandwidth, the attenuation for on-board aircraft transmitters shall be at least 40 dB; and the attenuation for ground transmitters shall be at least  $43 + 10 \log_{10} P$  (in watts) dB, measured with a bandwidth of 3 kHz.

### 5.6.2. Method of Measurements

47 CFR 2.1049, ANSI C63.26 and TIA-603-E

### 5.6.3. Test Data


#### 5.6.3.1. 99% Occupied Bandwidth

Frequency (MHz)	*Measured 99% OBW (kHz)	Authorized Bandwidth (kHz)
118.025	5.448	25.0
127.500	5.448	25.0
136.975	5.448	25.0
118.005	5.448	8.33
127.505	5.448	8.33
136.990	5.448	8.33

\* See the following plots for details of measurements

#### 5.6.3.2. Configuration: 99%OBW, 118.005MHz, 8.33 KHz channel space

OBW: 5.448 KHz

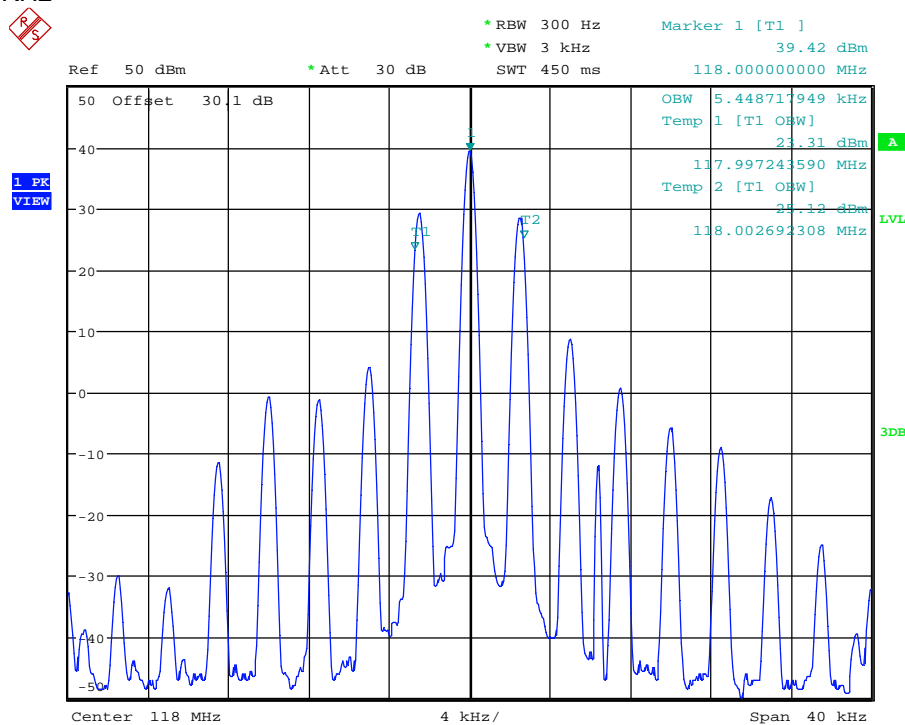

Date: 27.NOV.2024 20:43:55

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.6.3.3. Configuration: 99%OBW, 127.505MHz, 8.33 KHz channel space

OBW: 5.448 KHz

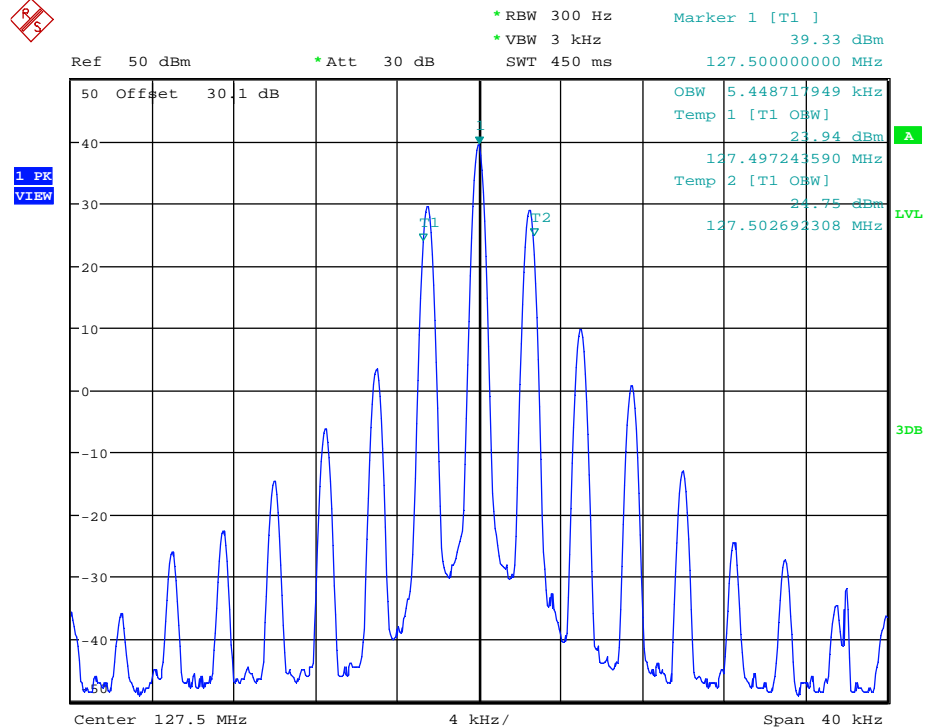

Date: 27.NOV.2024 20:45:56

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**5.6.3.4. Configuration: 99%OBW, 136.990MHz, 8.33 KHz channel space**

OBW: 5.448 KHz

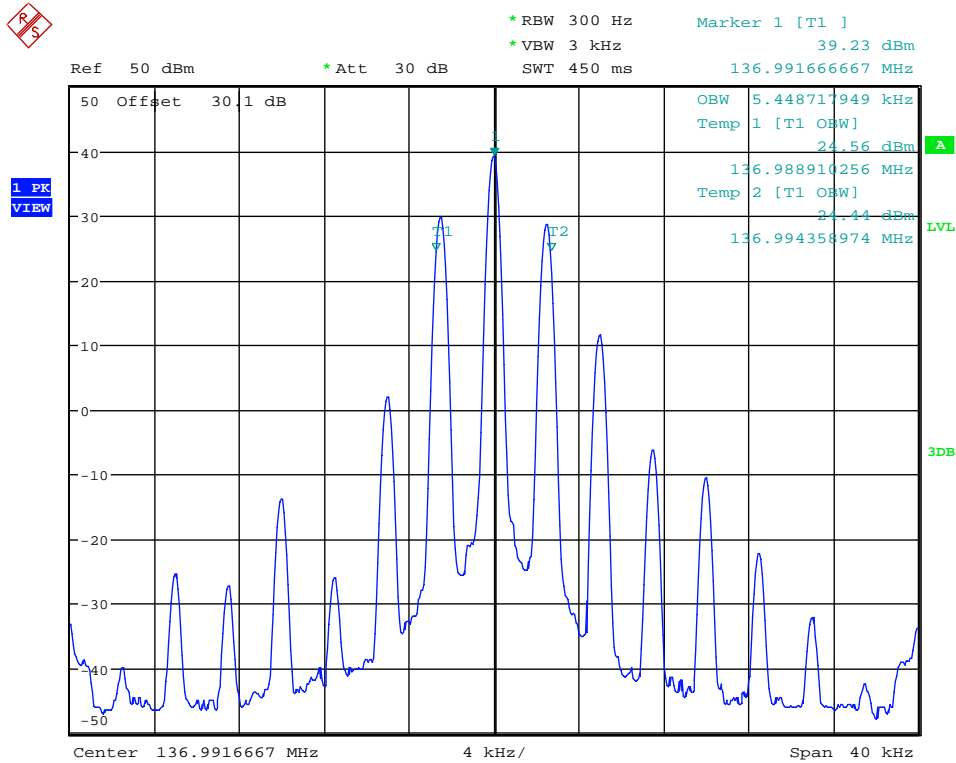

Date: 27.NOV.2024 20:50:59

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.6.3.5. Configuration: 99%OBW, 118.025MHz, 25KHz channel space

OBW: 5.448 KHz

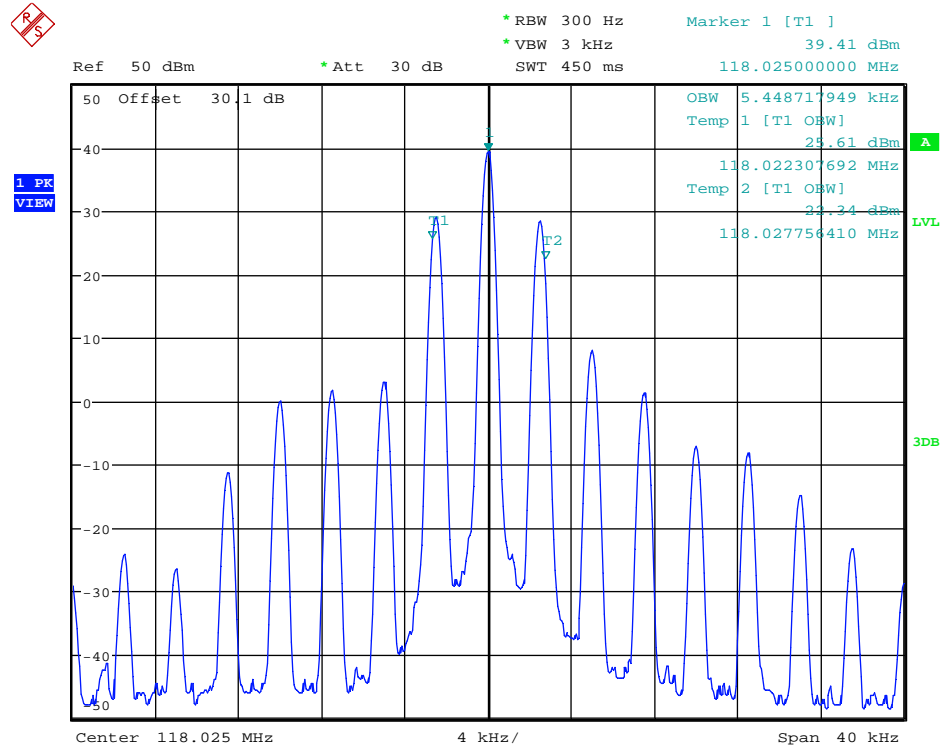

Date: 28.NOV.2024 14:20:27

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



5.6.3.6. Configuration: 99%OBW, 127.500MHz, 25KHz channel space

OBW: 5.448 KHz

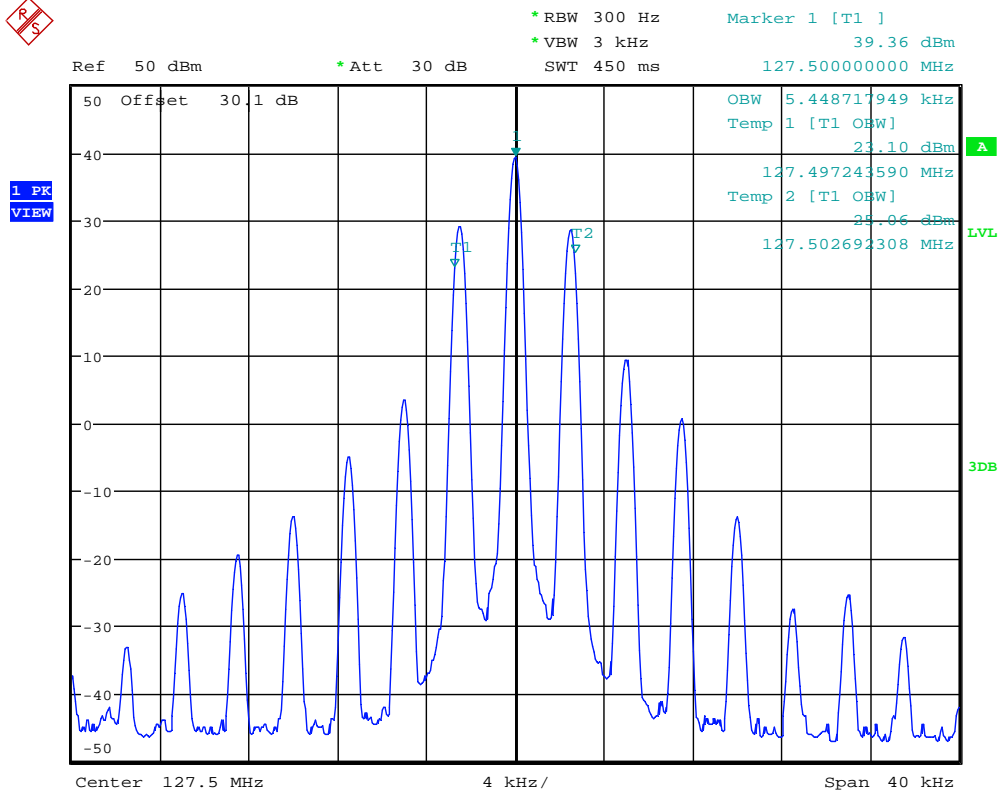

Date: 28.NOV.2024 14:23:17

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**5.6.3.7. Configuration: 99%OBW, 136.975MHz, 25KHz channel space**

OBW: 5.448 KHz

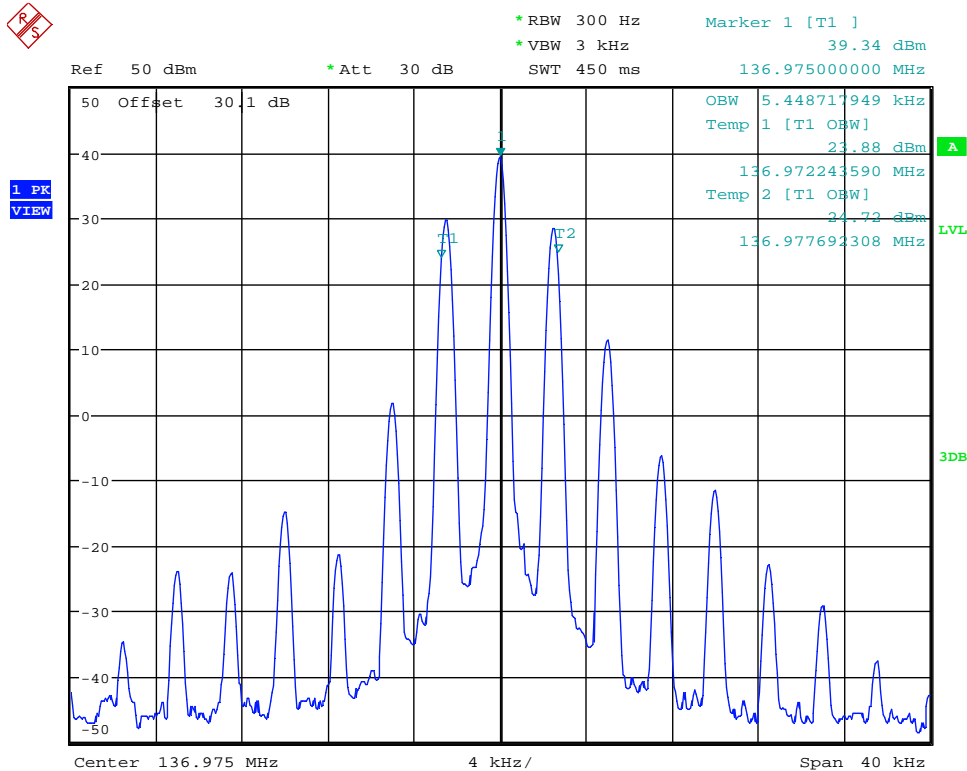

Date: 28.NOV.2024 14:24:42

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.6.3.8. Configuration: Emission limitation, 118.005MHz, 8.33 KHz channel space

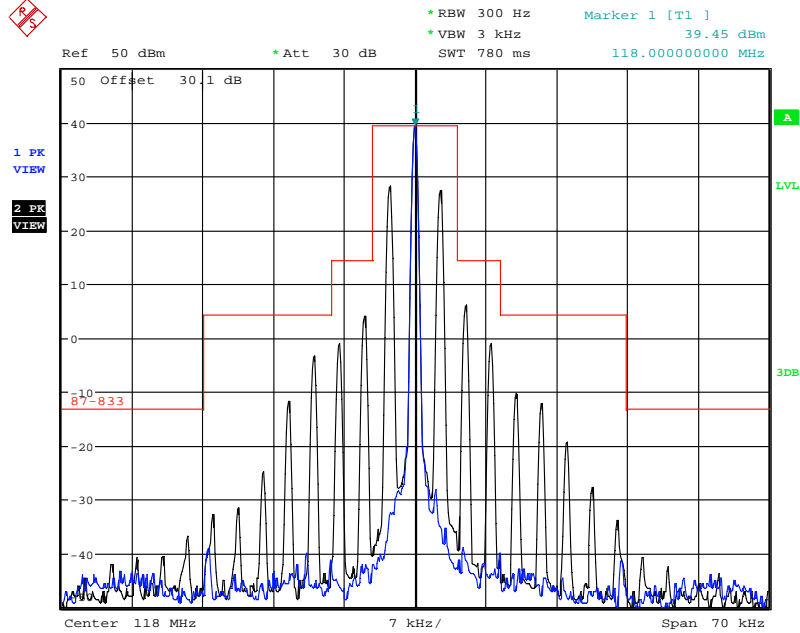

Date: 28.NOV.2024 16:17:11

#### 5.6.3.9. Configuration: Emission limitation, 127.505MHz, 8.33 KHz channel space

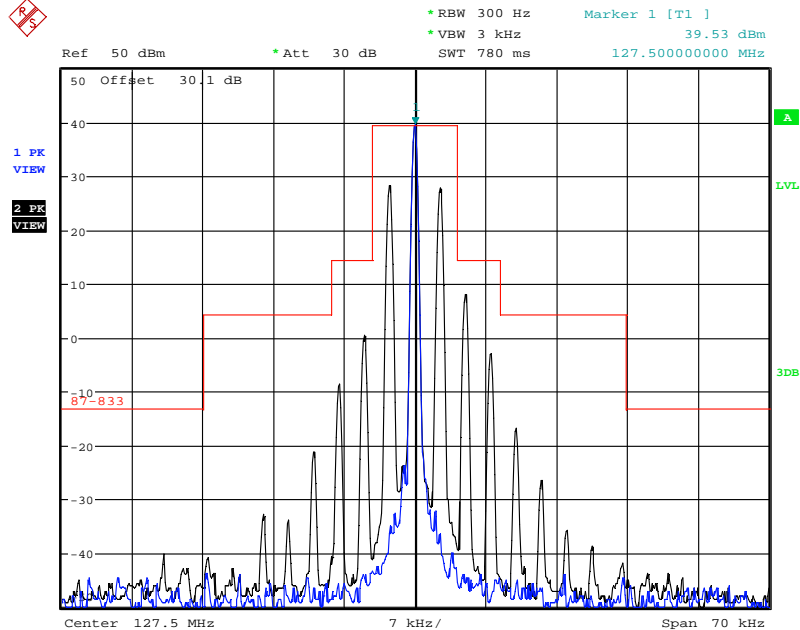

Date: 28.NOV.2024 16:26:18

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.6.3.10. Configuration: Emission limitation, 136.990MHz, 8.33 KHz channel space

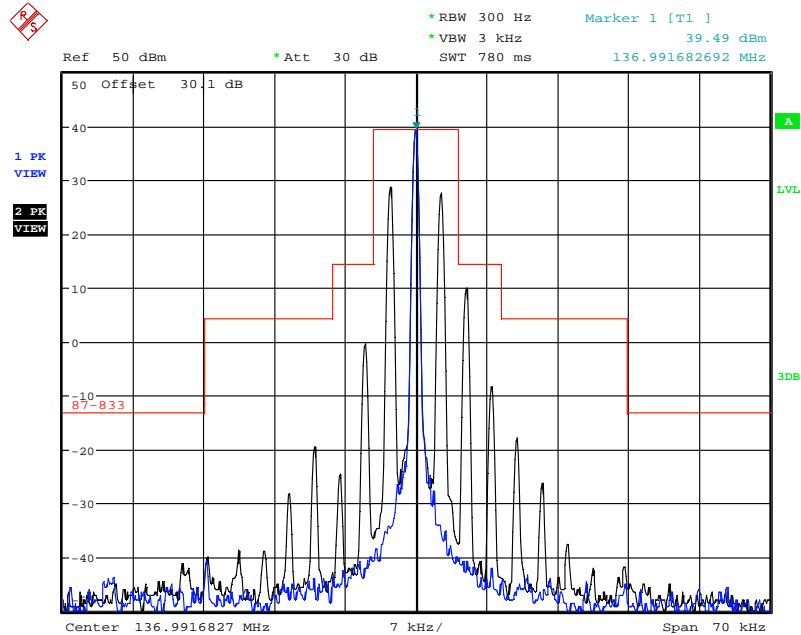

Date: 28.NOV.2024 16:35:21

### 5.6.3.11. Configuration: Emission limitation, 118.025MHz, 25 KHz channel space

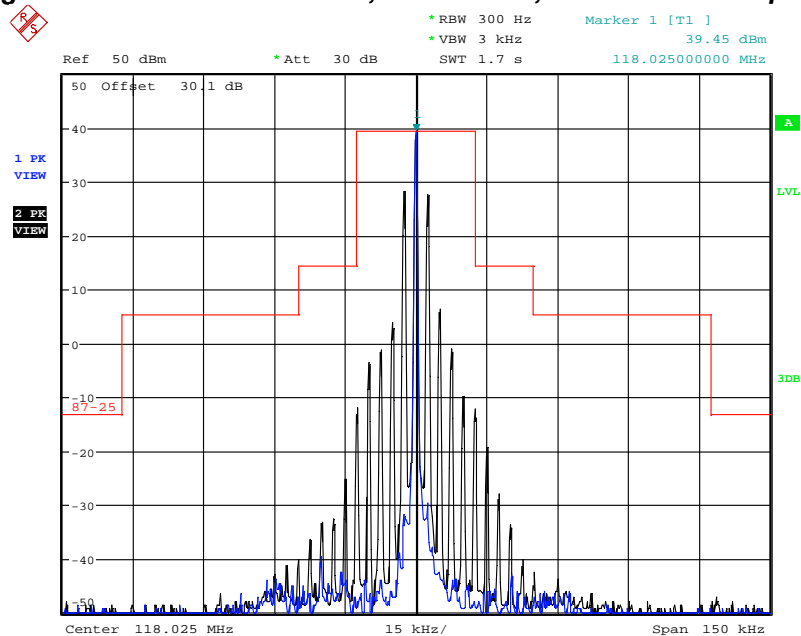

Date: 28.NOV.2024 17:41:35


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.3.12. Configuration: Emission limitation, 127.500MHz, 25 KHz channel space

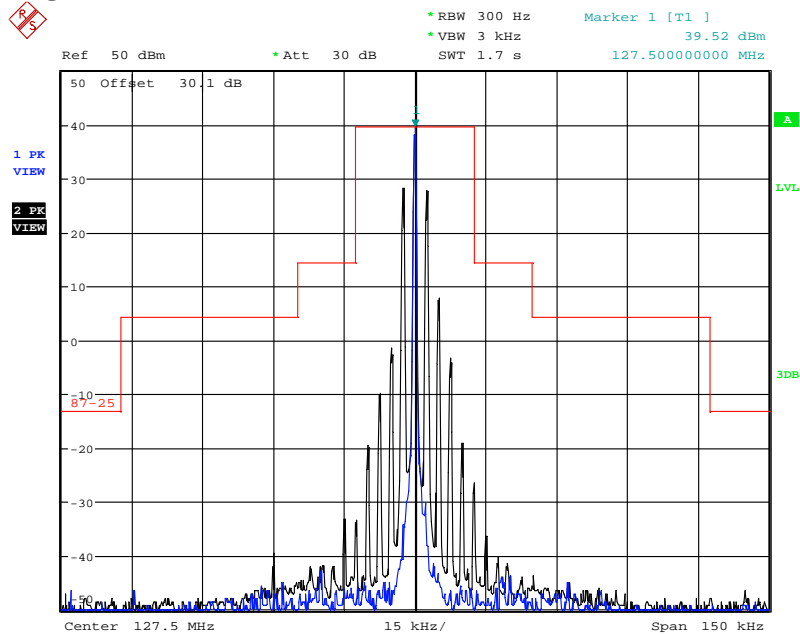

Date: 28.NOV.2024 17:59:33

5.6.3.13. Configuration: Emission limitation, 136.975MHz, 25 KHz channel space

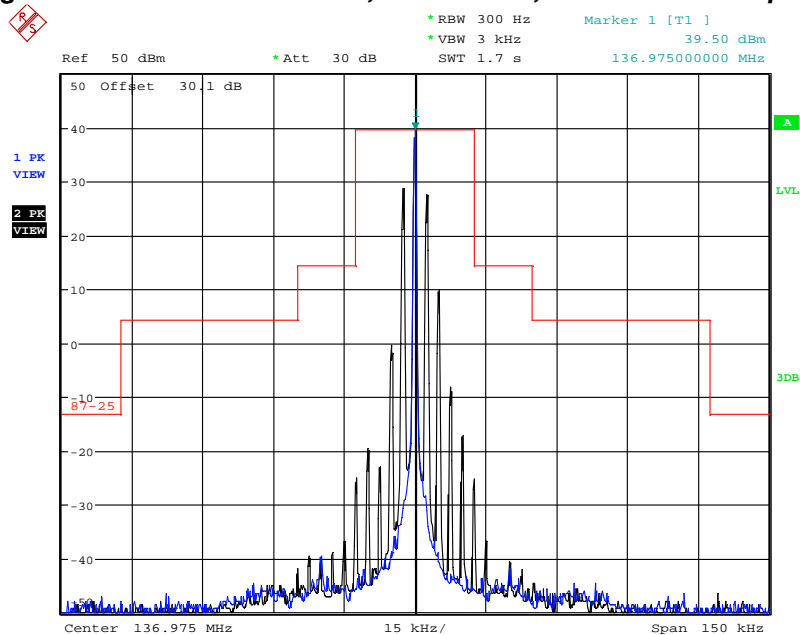

Date: 28.NOV.2024 18:07:23

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **5.7. MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE [§§ 2.1047(a) & 87.141(a)]**

### **5.7.1. Limits**

**87.141(a)** When A3E emission is used, the modulation percentage must not exceed 100 percent. This requirement does not apply to emergency locator transmitters or survival craft transmitters.

(f) Each frequency modulated transmitter equipped with a modulation limiter must have a low pass filter between the modulation limiter and the modulated stage. At audio frequencies between 3 kHz and 15 kHz, the filter must have an attenuation greater than the attenuation at 1 kHz by at least  $40 \log_{10} (f/3)$  db where “f” is the frequency in kilohertz. Above 15 kHz, the attenuation must be at least 28 db greater than the attenuation at 1 kHz.

### **5.7.2. Method of Measurements**

The rated audio input signal was applied to the input of the audio low pass filter(or of all modulation stages) using an output of Bode network analyzer. This input signal level and it's corresponding output signal were then measured and recorded using the Bode Network Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

Refer to Section 6 for Test Set up block diagram and equipment used.

### 5.7.3. Test Data

#### 5.7.3.1. Audio Frequency Response of All Modulation States for 8.33 kHz Channel Spacing

Frequency (Hz)	Trace 1: Gain: Magnitude (dB)
100	-26.7182
198.101015	-10.4823
404.825864	-1.26953
606.319172	-0.54259
801.964144	-0.54444
996.824955	-0.60098
1540.092486	-0.46999
2037.044198	-0.66697
2532.004086	-5.10155
3050.938845	-32.4971
3563.754285	-55.9668
4035.405231	-58.4036
4569.477599	-69.7116
5015.925792	-84.8685
6043.940815	-86.7403
7059.833407	-94.1958
8246.481767	-94.9412
9052.1815	-96.4426
10250.20741	-99.6142
12350.98952	-103.626
13985.60163	-103.836
15352.02622	-102.257
18498.42715	-93.9384
20305.7649	-98.4514
30412.51975	-97.7244
40225.92636	-94.0675
50000	-95.6199

---


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

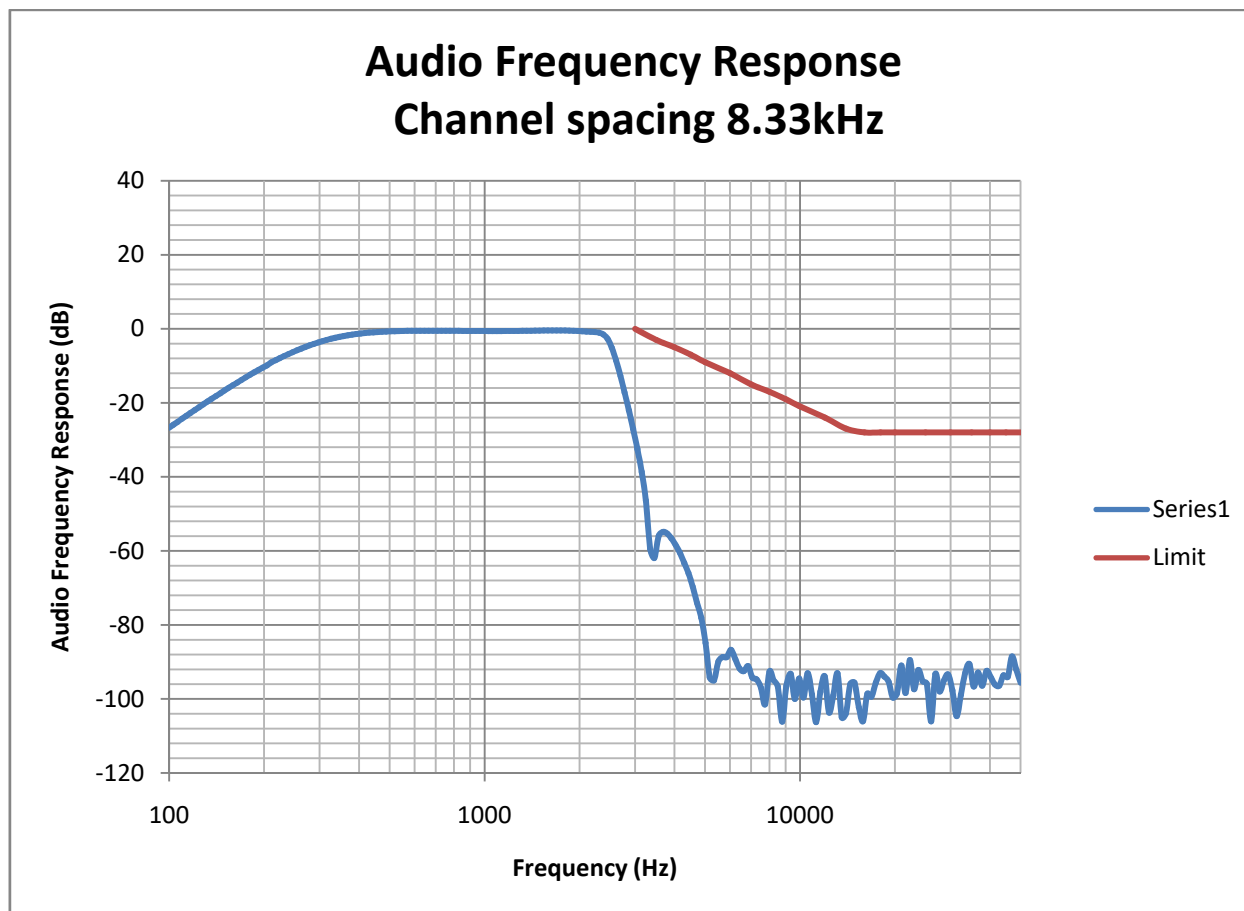

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



### 5.7.3.2. Audio Frequency Response of All Modulation States for 25 kHz Channel Spacing

Frequency (Hz)	Trace 1: Gain: Magnitude (dB)
100	-26.7792
198.101015	-10.4657
306.065657	-3.39325
404.825864	-1.32476
503.190231	-0.74088
708.232009	-0.56276
853.384305	-0.60148
996.824955	-0.63812
1492.972994	-0.51854
2532.004086	-5.16883
3050.938845	-32.649
4035.405231	-58.5334
5015.925792	-87.1858
6043.940815	-88.1968
7994.178717	-100.006
9052.1815	-97.5096
10250.20741	-102.543
11973.10809	-100.285
13985.60163	-93.9888
15352.02622	-101.974
19082.25318	-96.0523
20946.63204	-96.5958
24467.4356	-96.9387
29482.04155	-103.968
40225.92636	-90.8439
50000	-92.0538


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

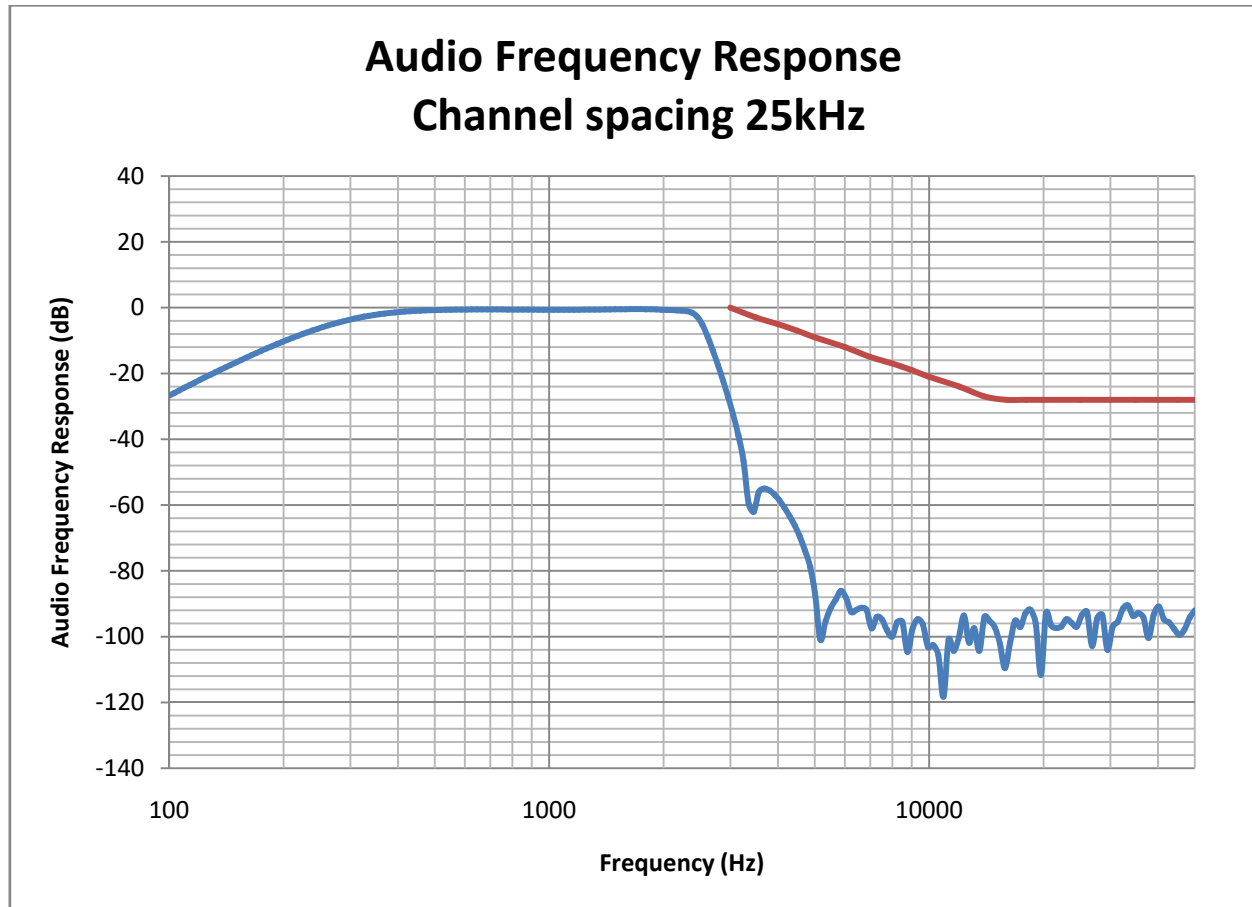

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.8. MODULATION CHARACTERISTICS – MODULATION LIMITING [§§ 2.1047(b) & 87.141] [RSS-141 § 5.1]

### § 87.141

- (a) When A3E emission is used, the modulation percentage must not exceed 100 percent. This requirement does not apply to emergency locator transmitters or survival craft transmitters.
- (c) If any licensed radiotelephone transmitter causes harmful interference to any authorized radio service because of excessive modulation, the Commission will require the use of the transmitter to be discontinued until it is rendered capable of automatically preventing modulation in excess of 100 percent.

[RSS-141 § 5.1]

Modulation Index for A3E and A9W Emissions: Shall not exceed 100%

### 5.8.1. Method of Measurements

**For Audio Transmitter:-** The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

**For Data Transmitter with Maximum Frequency Deviation set by Factory:-** The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

## 5.8.2. Test Data

118.005 MHz

### 5.8.2.1. Modulation Limiting at 8.33 kHz Channel Spacing

Modulating Signal Level	Peak Modulation depth %					Maximum Limit
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	%
1	0.13	0.95	0.96	0.26	0.25	100
2	0.17	1.89	1.86	0.30	0.26	100
4	0.24	3.62	3.65	0.36	0.27	100
6	0.32	5.37	5.37	0.42	0.25	100
8	0.42	7.32	7.39	0.50	0.26	100
10	0.45	8.72	8.84	0.55	0.26	100
15	0.63	12.97	13.41	0.72	0.25	100
20	0.83	17.48	17.94	0.89	0.26	100
25	1.04	21.29	21.90	1.06	0.27	100
30	1.20	25.07	25.50	1.23	0.27	100
35	1.37	28.56	29.47	1.39	0.27	100
40	1.55	31.97	33.29	1.55	0.26	100
45	1.73	35.44	36.90	1.71	0.26	100
50	1.92	38.94	40.50	1.90	0.26	100
55	2.15	42.80	44.60	2.04	0.25	100
60	2.32	46.50	48.80	2.21	0.26	100
65	2.49	50.50	52.80	2.37	0.25	100
70	2.70	54.70	57.20	2.52	0.27	100
75	2.90	58.50	60.50	2.69	0.26	100
80	3.20	64.00	67.10	2.95	0.26	100
85	3.28	65.80	68.70	3.04	0.25	100
90	3.39	66.20	69.20	3.02	0.27	100
100	3.82	66.10	69.10	3.05	0.26	100
120	4.62	67.1	69.30	3.04	0.26	100
200	5.5	67.5	69.70	3.07	0.26	100
250	5.69	67.4	70.00	3.06	0.26	100

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB  
= 61.0 mV+ 16 dB  
= 51.71 dB(m Vrms)  
= 384.88 mVrms

Standard Modulation Level measured at 50% Modulation @ 1.0 kHz.

Modulation Frequency (kHz)	Peak Depth (%)	Maximum Limit (%)
0.1	6.64	100.0
0.2	30.52	100.0
0.4	64.40	100.0
0.6	69.20	100.0
0.8	69.40	100.0
1.0	69.70	100.0
1.2	69.80	100.0
1.4	70.50	100.0
1.6	71.10	100.0
1.8	71.20	100.0
2.0	70.60	100.0
2.5	49.60	100.0
3.0	3.01	100.0
3.5	0.32	100.0
4.0	0.33	100.0
4.5	0.27	100.0
5.0	0.25	100.0
6.0	0.26	100.0
7.0	0.26	100.0
8.0	0.25	100.0
9.0	0.25	100.0
10.0	0.26	100.0

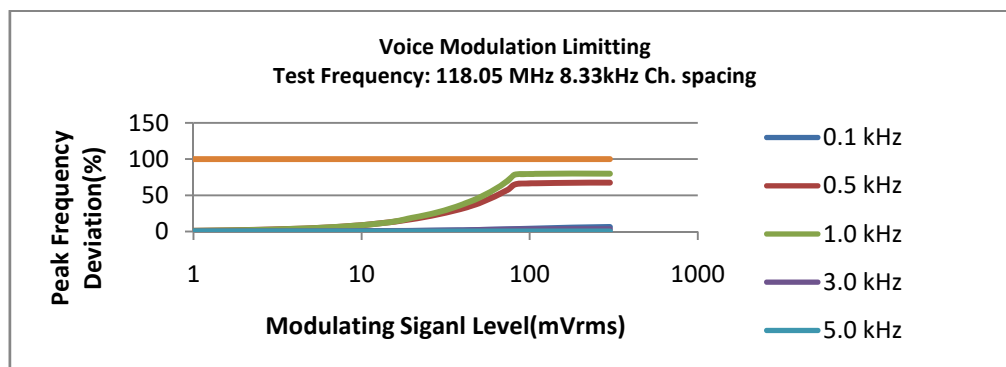

# ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**5.8.2.2. Modulation Limiting at 25 kHz Channel Spacing**  
118.025MHz

Modulating Signal Level	Peak Modulation depth %					Maximum Limit
(mVrms)	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	%
1	0.29	1.08	1.09	0.23	0.18	100
2	0.32	1.98	2.00	0.25	0.22	100
4	0.38	3.69	3.74	0.31	0.22	100
6	0.45	5.43	5.51	0.37	0.22	100
8	0.53	7.23	7.33	0.45	0.24	100
10	0.58	8.91	8.89	0.51	0.23	100
15	0.76	13.00	13.18	0.68	0.23	100
20	0.96	17.24	19.08	0.88	0.23	100
25	1.13	21.10	23.56	1.06	0.23	100
30	1.32	24.81	28.09	1.22	0.23	100
35	1.47	28.40	32.95	1.39	0.23	100
40	1.66	31.94	37.70	1.58	0.24	100
45	1.86	35.52	42.20	1.75	0.23	100
50	2.18	39.13	46.70	1.93	0.23	100
55	2.36	43.20	51.50	2.12	0.23	100
60	2.52	47.00	56.50	2.30	0.22	100
65	2.67	50.90	61.30	2.46	0.22	100
70	2.83	54.90	66.00	2.63	0.24	100
75	2.99	58.50	71.30	2.77	0.23	100
80	3.24	64.10	77.70	3.03	0.23	100
85	3.37	66.10	79.40	3.13	0.23	100
90	3.50	66.30	79.40	3.15	0.22	100
100	3.89	66.60	79.60	3.14	0.22	100
120	4.71	66.90	79.80	3.19	0.22	100
200	5.56	67.50	80.20	3.19	0.21	100
250	5.92	67.50	80.00	3.16	0.21	100
300	6.38	67.50	79.90	3.15	0.21	100

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB  
= 53.0 mV+ 16 dB  
= 50.49 dB(m Vrms)  
= 334.41 mVrms

Standard Modulation Level measured at 50% Modulation @ 1.0 kHz.

Modulation Frequency (kHz)	Peak Depth (%)	Maximum Limit (%)
0.1	7.22	100.0
0.2	34.61	100.0
0.4	75.80	100.0
0.6	80.90	100.0
0.8	81.00	100.0
1.0	80.50	100.0
1.2	81.10	100.0
1.4	81.60	100.0
1.6	82.20	100.0
1.8	82.10	100.0
2.0	81.10	100.0
2.5	56.30	100.0
3.0	3.16	100.0
3.5	0.28	100.0
4.0	0.29	100.0
4.5	0.22	100.0
5.0	0.22	100.0
6.0	0.20	100.0
7.0	0.21	100.0
8.0	0.21	100.0
9.0	0.20	100.0
10.0	0.22	100.0

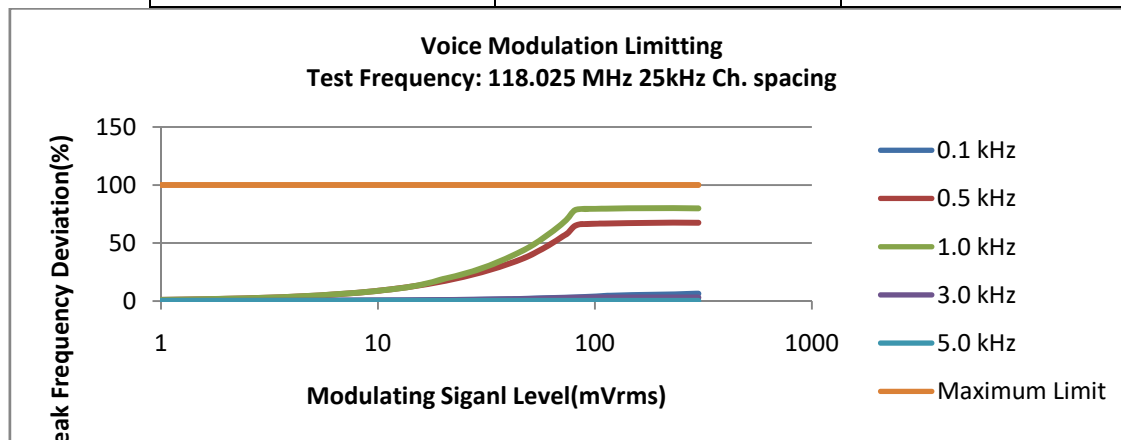

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.9. FIELD STRENGTH OF SPURIOUS EMISSIONS [§§ 2.1053, 87.139] [RSS-141 § 5.2]

### 5.9.1. Limits @ FCC 87.139

§ 87.139(a)(3) - When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least  $43 + 10 \log_{10} P$  dB.

[RSS-141 § 5.2]

#### Transmitter with A3E or A9W Emissions:

When the frequency is removed from the equipment's channel centre frequency by more than 250% of the channel bandwidth, the attenuation for on-board aircraft transmitters shall be at least 40 dB; and the attenuation for ground transmitters shall be at least  $43 + 10 \log_{10} P$  (in watts) dB, measured with a bandwidth of 3 kHz.

### 5.9.2. Method of Measurements

TIA-603-E / ANSI C63.26.

### 5.9.3. Test Data

#### Remark(s):

- The emissions were scanned from 30 MHz to 6 GHz; all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.
- There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and input voltage levels. Therefore, the RF spurious/harmonic emissions in this section would be performed for 25 KHz channel spacing with 27.5 VDC level and limit of  $43 + 10 \log_{10} P$  dB applied for worst case.
- Tx Power @ 8W

<b>Carrier Frequency:</b>	118.025 MHz
<b>Limit:</b>	-13 dBm
* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.	

<b>Carrier Frequency:</b>	127.5 MHz
<b>Limit:</b>	-13 dBm
* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.	

<b>Carrier Frequency:</b>	136.975 MHz
<b>Limit:</b>	-13 dBm
* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.	

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 87.139] [RSS-141 § 5.2]

### 5.10.1. Limits

§§ 87.139(a)(3) When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least  $43 + 10 \log_{10} P$  dB.  
[RSS-141 § 5.2]

#### Transmitter with A3E or A9W Emissions:

When the frequency is removed from the equipment's channel centre frequency by more than 250% of the channel bandwidth, the attenuation for on-board aircraft transmitters shall be at least 40 dB; and the attenuation for ground transmitters shall be at least  $43 + 10 \log_{10} P$  (in watts) dB, measured with a bandwidth of 3 kHz.


### 5.10.2. Method of Measurements

TIA-603-E / ANSI C63.26

### 5.10.3. Test Data

**Note:** There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and input voltage levels. Therefore, the RF spurious/harmonic emissions in this section would be performed for 25 KHz channel spacing with 27.5 VDC level and limit of  $43 + 10 \log_{10} P$  dB applied for worst case.

#### 5.10.3.1. Configuration: Tx Conducted, 118.025MHz, 25 KHz channel space

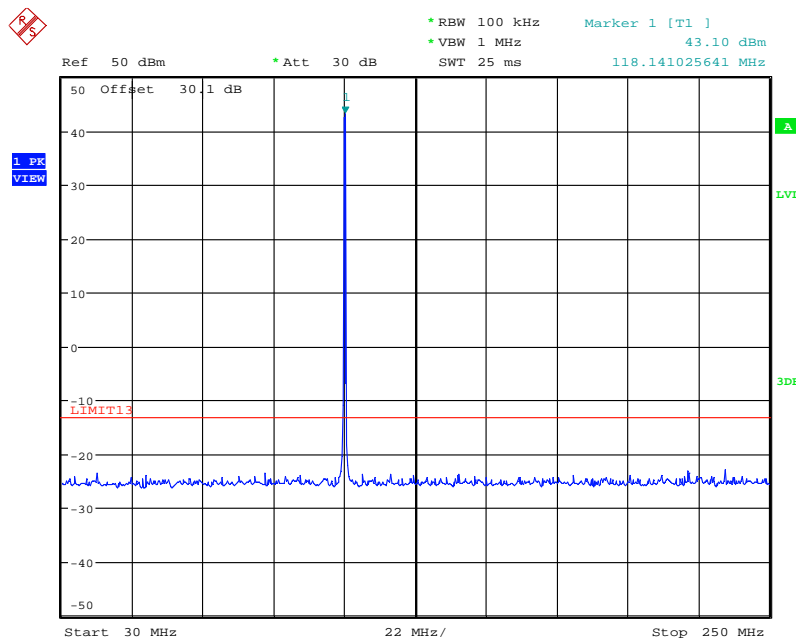

Date: 28.NOV.2024 19:10:49


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

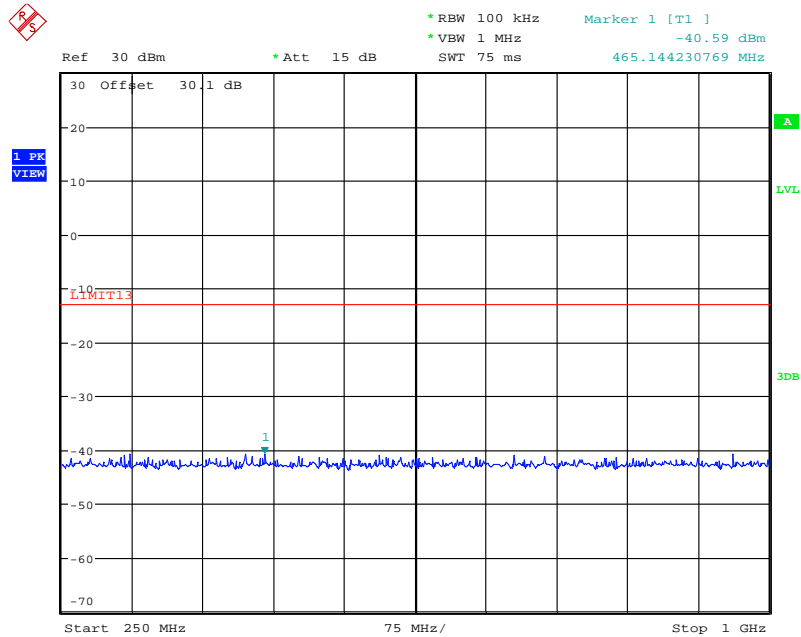

Date: 28.NOV.2024 19:43:58

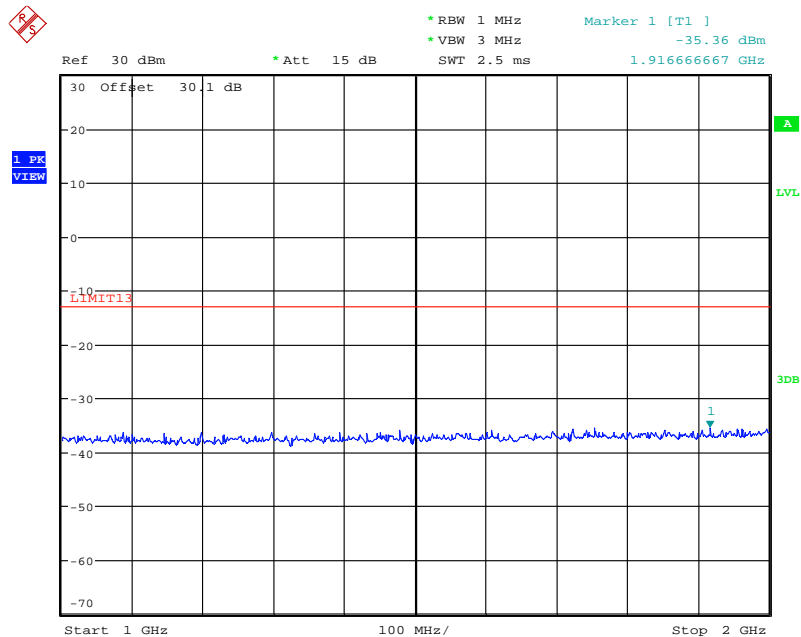

Date: 28.NOV.2024 19:36:46

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.10.3.2. Configuration: Tx Conducted, 127.500MHz, 25 KHz channel space

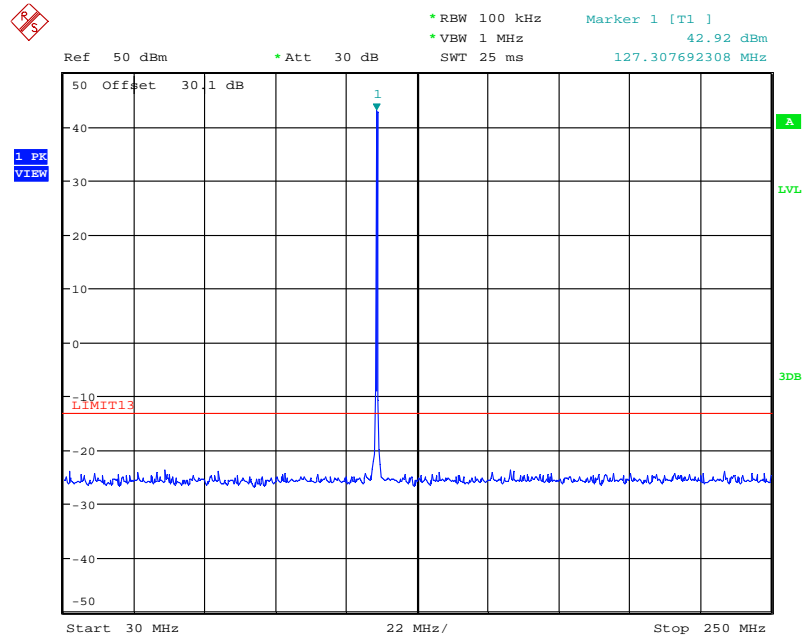

Date: 28.NOV.2024 19:59:52

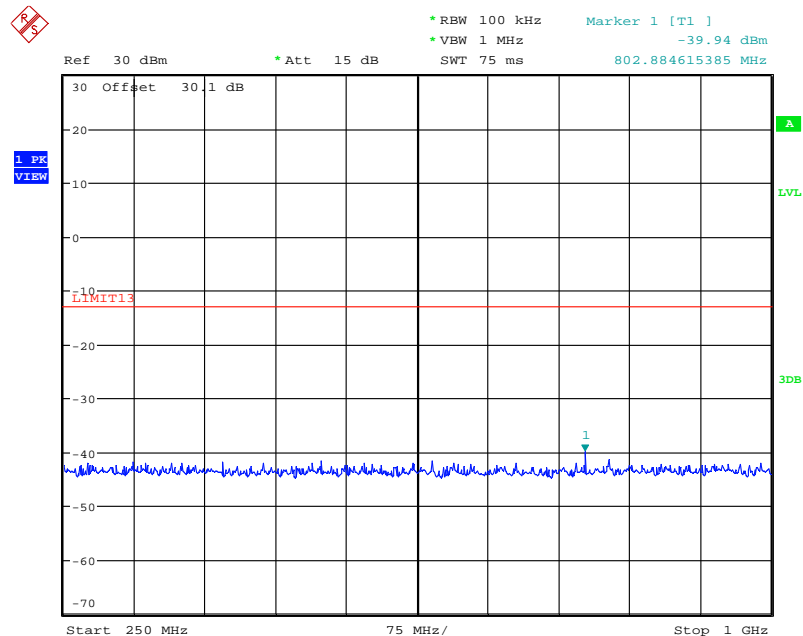

Date: 28.NOV.2024 20:17:04


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

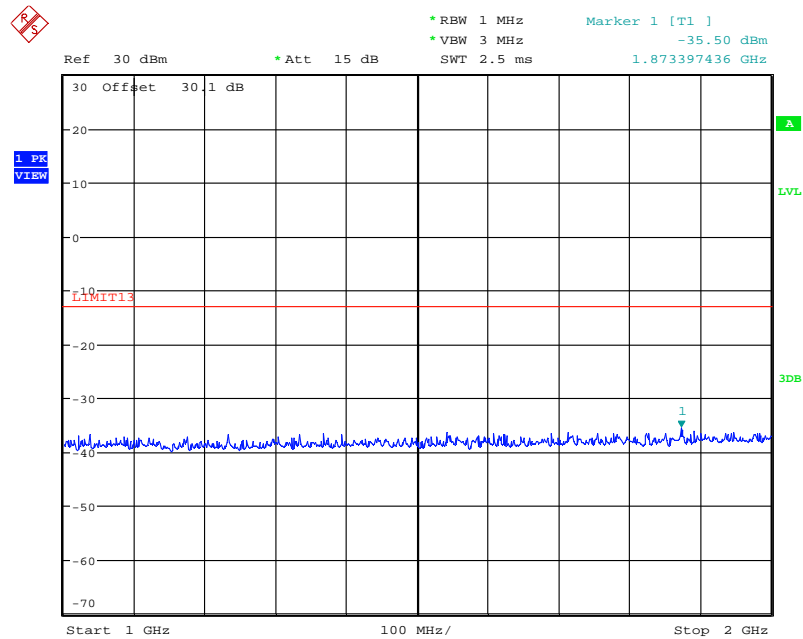

Date: 28.NOV.2024 20:18:17

### 5.10.3.3. Configuration: Tx Conducted, 136.975MHz, 25 KHz channel space

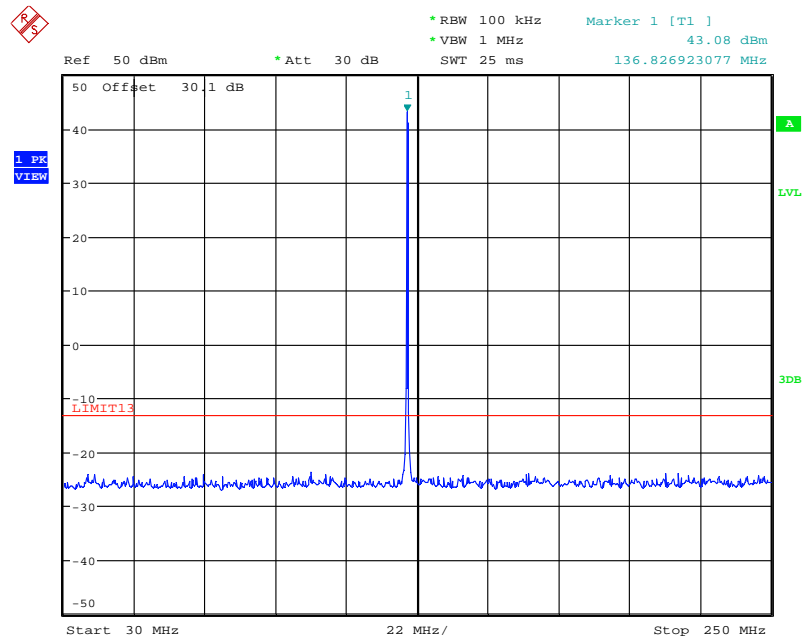


Date: 28.NOV.2024 20:23:40

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

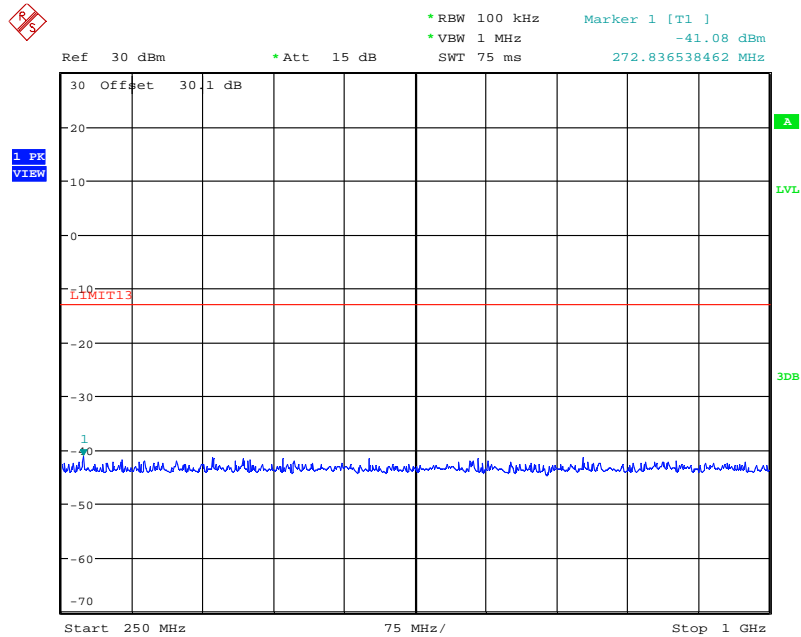

Date: 28.NOV.2024 20:25:18

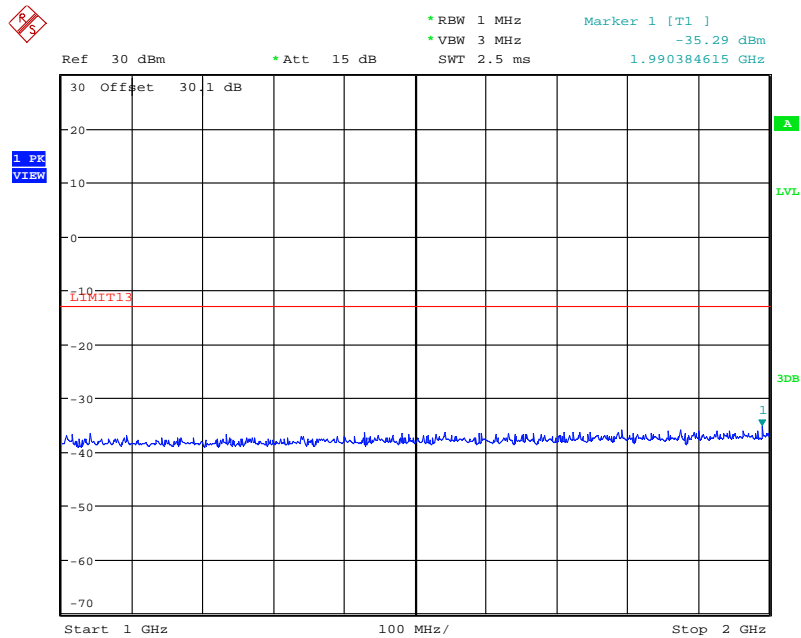

Date: 28.NOV.2024 20:27:18

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.11. FREQUENCY STABILITY [§§ 2.1055 & 87.133] [RSS-141 § 5.1]

### 5.11.1. Limits

§ 87.133 The carrier frequency of each station must be maintained within the tolerance in the following table:

Frequency band (lower limit exclusive, upper limit inclusive), and categories of station	Tolerance (ppm)
(5) Band - 108 to 137 MHz: Aircraft and other mobile stations in the Aviation Services.	*30

\* For emissions G1D and G7D, the tolerance is 5 parts per 10<sup>6</sup>.

[RSS-141 § 5.1]

The RF carrier frequency shall not depart from the reference frequency (reference frequency is the frequency at 20°C and rated supply voltage) in excess of the values given below:

Ground Equipment:  $\pm 20$  ppm for A3E and A9W emissions  
 $\pm 2$  ppm for G1D and G7D emissions

Airborne Equipment:  $\pm 30$  ppm for A3E and A9W emissions  
 $\pm 5$  ppm for G1D and G7D emissions

### 5.11.2. Method of Measurements

47 CFR 2.1049, ANSI C63.26 and TIA-603-E

### 5.11.3. Test Data

<b>Center Frequency:</b>		118.025 MHz	
<b>Full Power Level:</b>		8.0W	
<b>Frequency Tolerance Limit (Worst Case):</b>		5 ppm or 590.125 Hz (Manufacturer's rating: $\pm$ 5 ppm)	
<b>Max. Frequency Tolerance Measured:</b>		-34 Hz or -0.29 ppm	
<b>Input Voltage Rating:</b>		13.8 / 27.5 V DC	
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 27.5 VDC	Supply Voltage (Lowest, 85% of 13.8V) 11.73 VDC	Supply Voltage (115% of Nominal) 31.625 VDC
-30	-34	--	--
-20	-30	--	--
-10	-23	--	--
0	-25	--	--
10	-12	--	--
20	-22	-19	-20
30	-22	--	--
40	-22	--	--
50	-17	--	--
60	20	--	--

## 5.12. EXPOSURE OF HUMANS TO RF FIELD [[§§ 1.1310 & 2.1091] [RSS Gen Sec 5.6 & RSS-102]

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation.

### FCC 47 CFR § 1.1310:

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.



[RSS Gen Sec 5.6 & RSS-102]

The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in RSS-102.

**Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)**

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)
0.003-10 <sup>21</sup>	83	90	-	Instantaneous*
0.1-10	-	0.73/ $f$	-	6**
1.1-10	87/ $f^{0.5}$	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ $f^{0.25}$	0.1540/ $f^{0.25}$	8.944/ $f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 $f^{0.3417}$	0.008335 $f^{0.3417}$	0.02619 $f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ $f^{1.2}$
150000-300000	0.158 $f^{0.5}$	4.21 x 10 <sup>-4</sup> $f^{0.5}$	6.67 x 10 <sup>-5</sup> $f$	616000/ $f^{1.2}$
<b>Note:</b> $f$ is frequency in MHz. *Based on nerve stimulation (NS). ** Based on specific absorption rate (SAR).				

**Table 6: RF Field Strength Limits for Controlled Use Devices (Controlled Environment)**

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)
0.003-10 <sup>23</sup>	170	180	-	Instantaneous*
0.1-10	-	1.6/ $f$	-	6**
1.29-10	193/ $f^{0.5}$	-	-	6**
10-20	61.4	0.163	10	6
20-48	129.8/ $f^{0.25}$	0.3444/ $f^{0.25}$	44.72/ $f^{0.5}$	6
48-100	49.33	0.1309	6.455	6
100-6000	15.60 $f^{0.25}$	0.04138 $f^{0.25}$	0.6455 $f^{0.5}$	6
6000-15000	137	0.364	50	6
15000-150000	137	0.364	50	616000/ $f^{1.2}$
150000-300000	0.354 $f^{0.5}$	9.40 x 10 <sup>-4</sup> $f^{0.5}$	3.33 x 10 <sup>-4</sup> $f$	616000/ $f^{1.2}$
<b>Note:</b> $f$ is frequency in MHz. *Based on nerve stimulation (NS). ** Based on specific absorption rate (SAR).				

Note 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient

through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### 5.12.1. Method of Measurements

See RSS-102 & FCC 47 CFR §§ 1.1310, 2.1091

In order to demonstrate compliance with MPE requirements, the following information is typically needed:

- (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
- (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
- (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
- (4) Any other RF exposure related issues that may affect MPE compliance

### Calculation Method of RF Safety Distance:

$$S = \frac{P \cdot G}{4 \cdot \pi \cdot r^2} = \frac{EIRP}{4 \cdot \pi \cdot r^2}$$

Where:  
P: power input to the antenna in mW  
EIRP: Equivalent (effective) isotropic radiated power  
S: power density mW/cm<sup>2</sup>  
G: numeric gain of antenna relative to isotropic radiator  
r: distance to centre of radiation in cm

### 5.12.2. RF Evaluation

#### 5.12.2.1. FCC

Frequency (MHz)	Max. Conducted Power (dBm)	Max. Antenna Gain (dBi)	EIRP (dBm)	EIRP* (mW)	Evaluation Distance, r (cm)	Power Density, S (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
118.000	39.03	0	39.03	8000/2*	50	0.127	0.2

\*50% duty cycle applied

#### 5.12.2.2. RSS 102 (ISED Canada)

Frequency (MHz)	Max. Conducted Power (dBm)	Max. Antenna Gain (dBi)	EIRP (dBm)	EIRP* (mW)	Evaluation Distance, r (cm)	Power Density, S (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
118.000	39.03	0	39.03	8000/2*	50	0.127	0.1291

\*50% duty cycle applied

## 5.1. RECEIVER SPURIOUS EMISSIONS (RADIATED) [RSS-141 § 5.3]

### 5.1.1. Limits

Spurious emissions from receivers shall not exceed the radiated emissions limits shown in RSS-Gen table 3.

**RSS-Gen Table 3 - Receiver radiated emissions limits**

Frequency (MHz)	Field strength (at 3 metres) <sup>Note 1</sup>	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40
88 - 216	150	43.52
216 - 960	200	46.02
Above 960	500	53.98

Note 1: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with section 6.6.

### 5.1.2. Method of Measurements

ANSI C63.4.

### 5.1.3. Test Data

Remarks:

- The measuring receiver shall be tuned over the frequency range 30 MHz to 2GHz.
- All emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT was set in receive mode
- IF=38.85 MHz

Rx Test Frequency Frequency (MHz)	Frequency (MHz)	Peak Measurement (dBuV/m)		QP/Avg Measurement(dBuV/m)		Limit QP	Margin (dB)	
		Vertical	Horizontal	Vertical	Horizontal		Vertical	Horizontal
118.025	All emissions are lower than 20 dB below the specified limit.							
127.500	All emissions are lower than 20 dB below the specified limit.							
136.975	All emissions are lower than 20 dB below the specified limit.							
161.650	All emissions are lower than 20 dB below the specified limit.							
163.275	All emissions are lower than 20 dB below the specified limit.							

## 5.2. RECEIVER SPUROUS EMISSIONS (CONDUCTED) [RSS-141 § 5.3]

### 5.2.1. Limits


The spurious emissions from the receiver at any discrete frequency, measured at the antenna port by the antenna-conducted method, shall not exceed 2 nW in the frequency range 30-1000 MHz and 5 nW above 1 GHz.

### 5.2.2. Method of Measurements

TIA-603-E


### 5.2.3. Test Data

#### 5.2.3.1. Configuration: Rx Conducted Emission, 118.025 MHz.

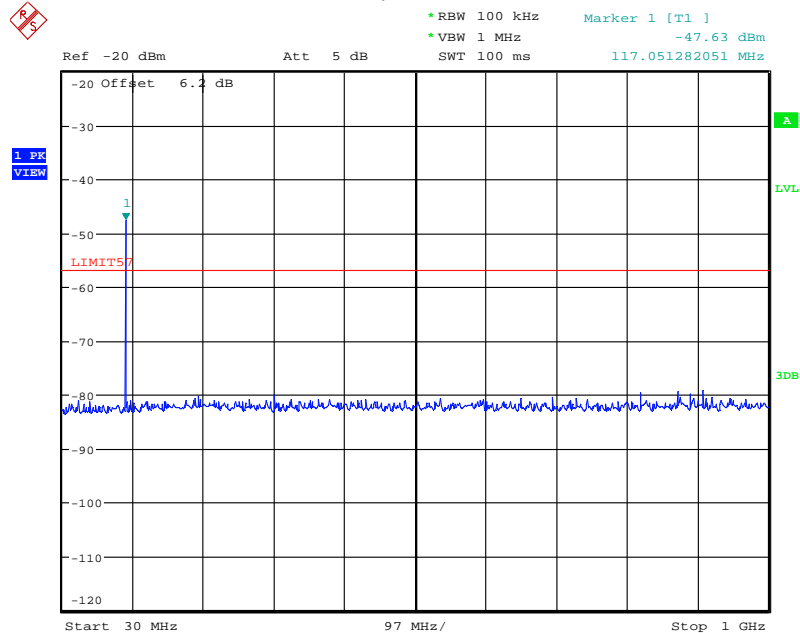


Date: 29.NOV.2024 18:50:41

Highest peak is Rx Signal input (1mV rms)

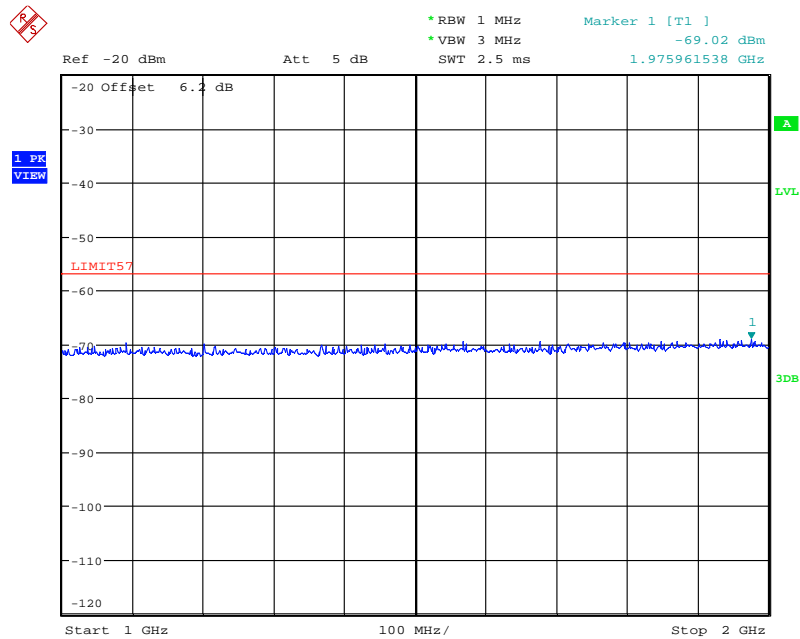

Date: 29.NOV.2024 18:49:52

### 5.2.3.2. Configuration: Rx Conducted Emission, 127.5 MHz

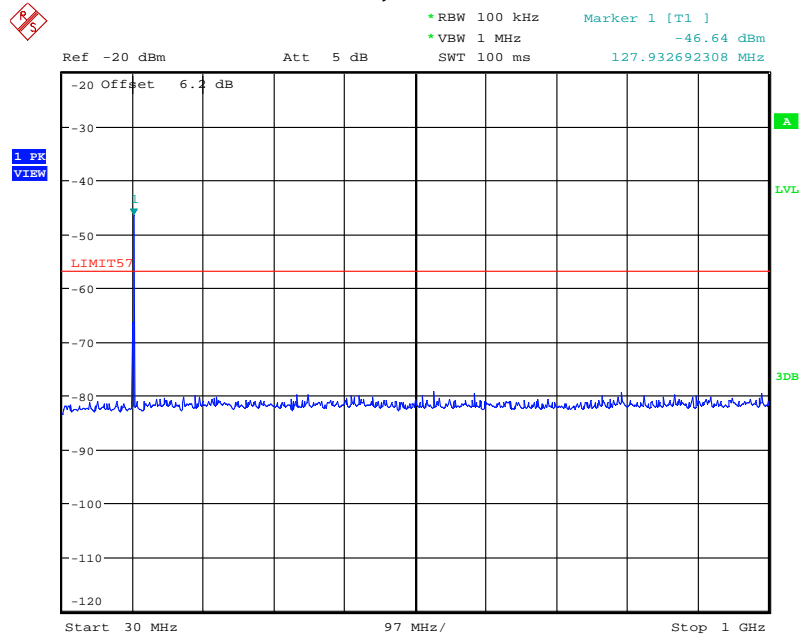

Date: 29.NOV.2024 19:01:40

Highest peak is Rx Signal input (1mV rms)


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

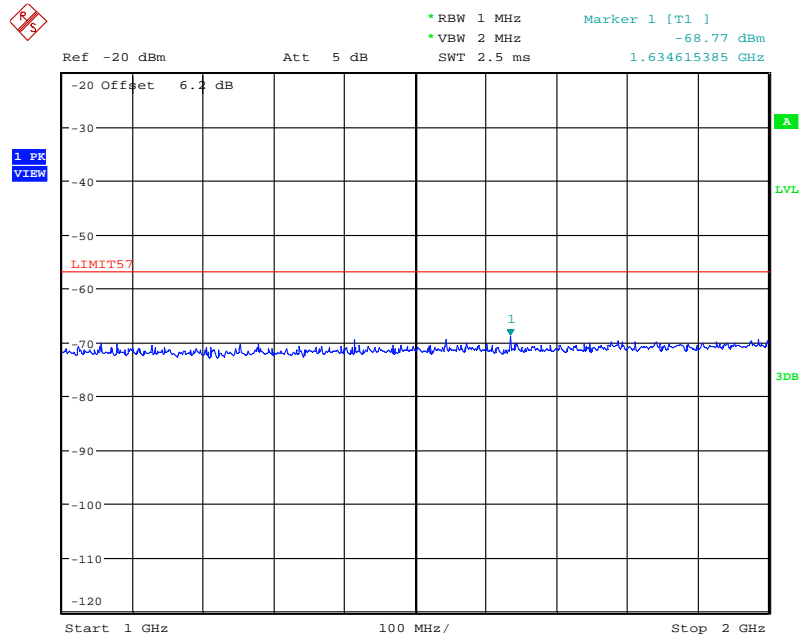

Date: 29.NOV.2024 19:10:15

### 5.2.3.3. Configuration: Rx Conducted Emission, 136.975 MHz

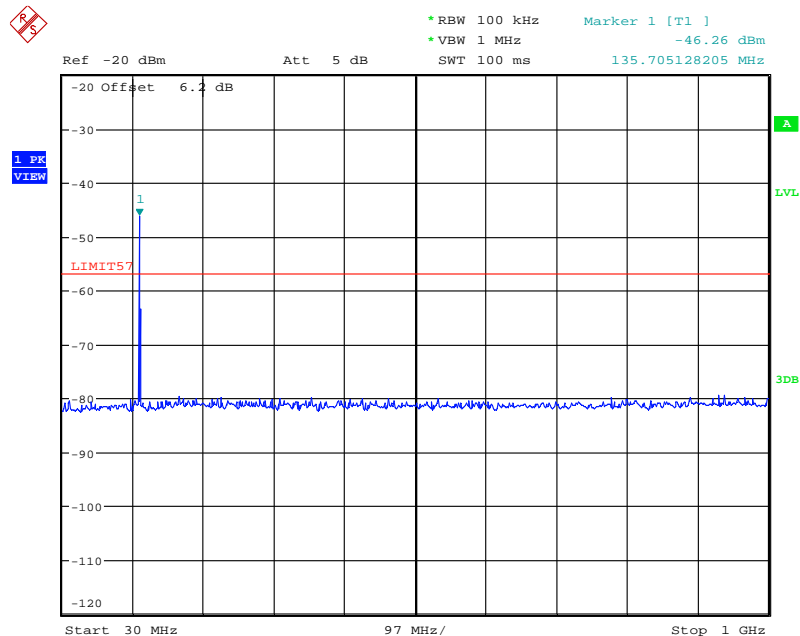

Date: 29.NOV.2024 19:13:56

Highest peak is Rx Signal input (1mV rms)


## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

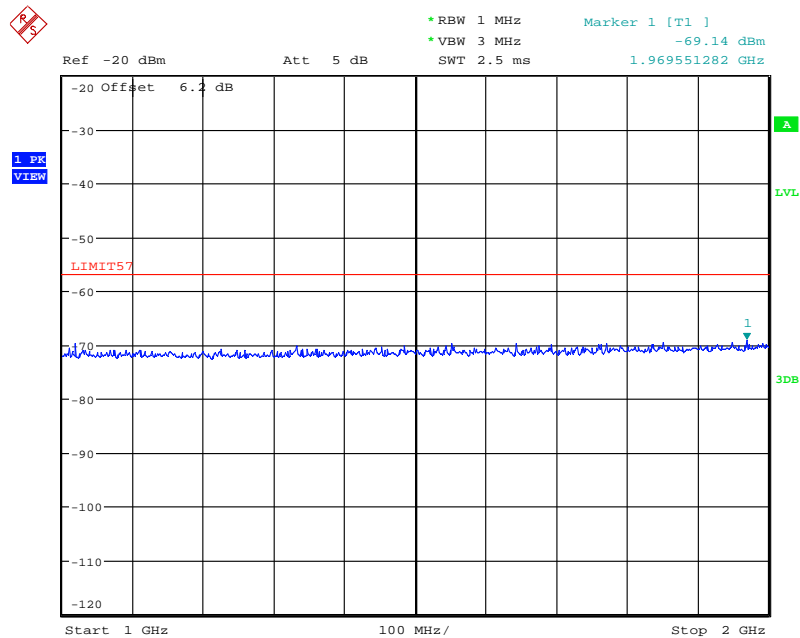

Date: 29.NOV.2024 19:18:39

#### 5.2.3.4. Configuration: Rx Conducted Emission, 161.650 MHz (WX 08)

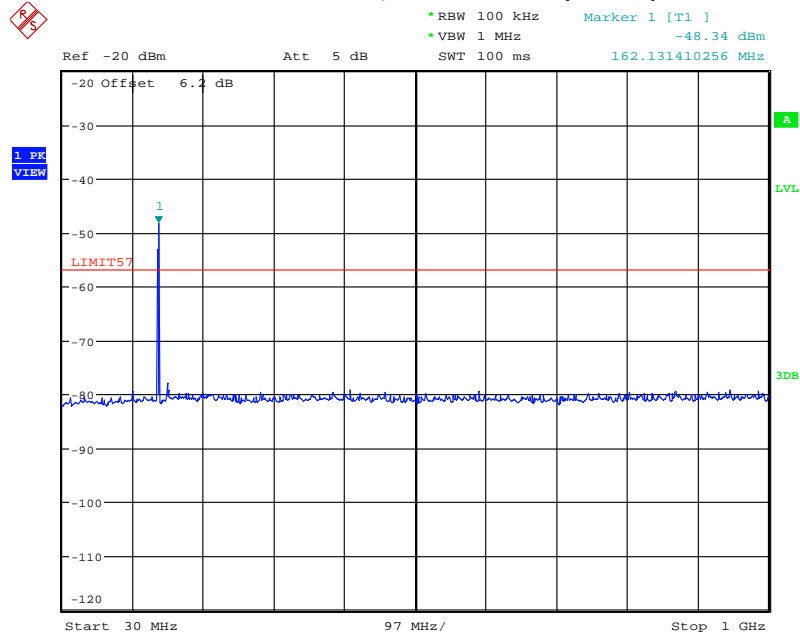

Date: 29.NOV.2024 19:27:54

Highest peak is Rx Signal input (1mV rms)

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141


December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

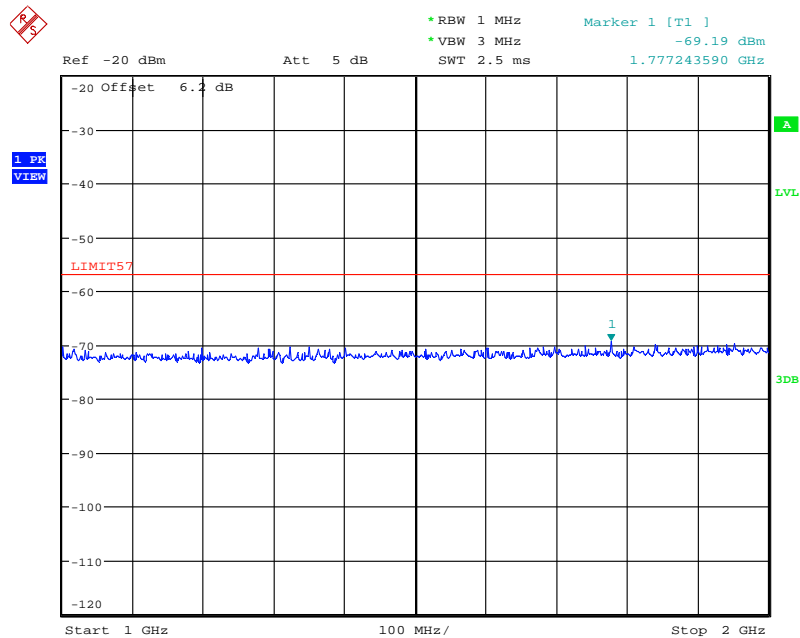

Date: 29.NOV.2024 19:29:22

### 5.2.3.5. Configuration: Rx Conducted Emission, 163.275 MHz (WX 10)

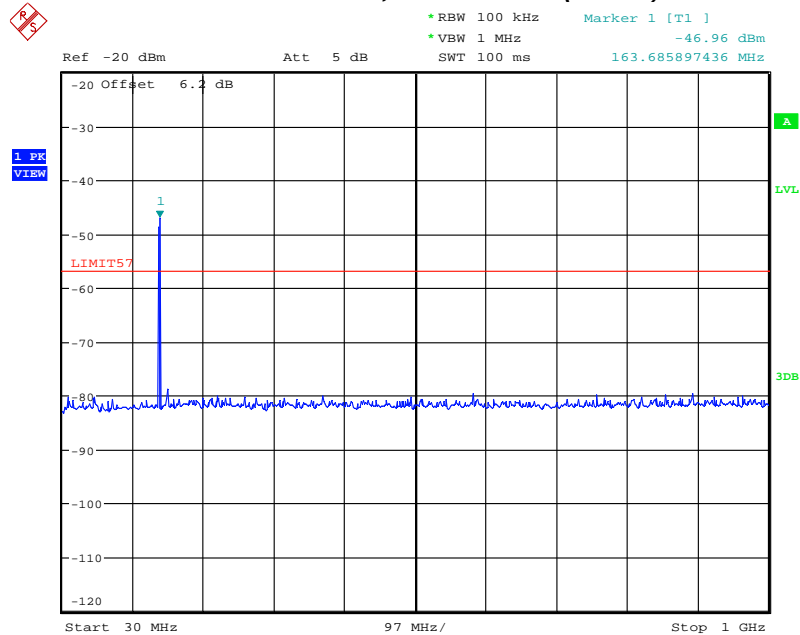

Date: 2.DEC.2024 14:25:44

Highest peak is Rx Signal input (1mV rms)

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



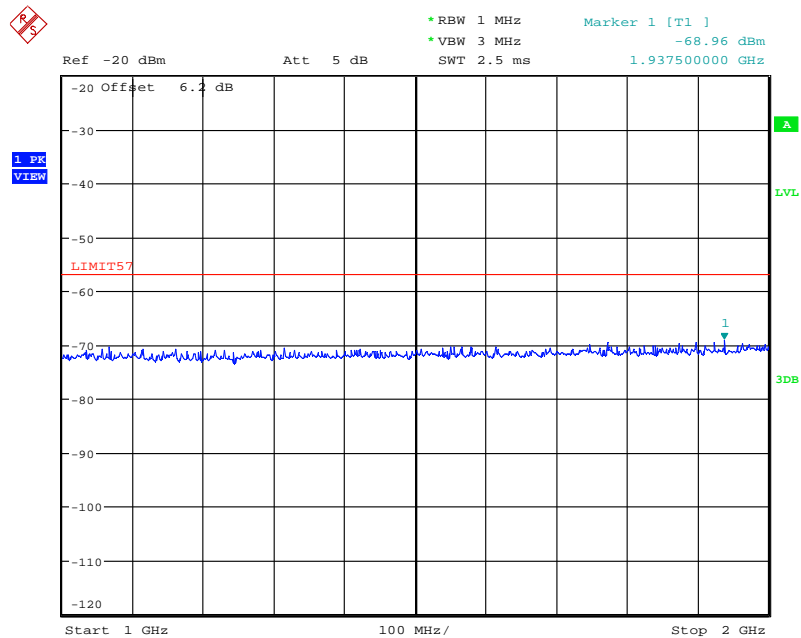

Date: 2.DEC.2024 14:28:01

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.3. POWERLINE CONDUCTED EMISSIONS FROM UNINTENTIONAL RADIATORS (DIGITAL DEVICES) [RSS-Gen § 8.8 & ICES-003, ISSUE 7]

#### 5.3.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	CLASS B LIMITS		Measuring Bandwidth
	Quasi-Peak (dB $\mu$ V)	Average* (dB $\mu$ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average

\* Decreasing linearly with logarithm of frequency


#### 5.3.2. Method of Measurements

Refer to Ultratech Test Procedures ULTR-P001-2004 & ANSI C63.4 for method of measurements.

### 5.3.3. Test Data

#### TX Mode


13.8 V Dc

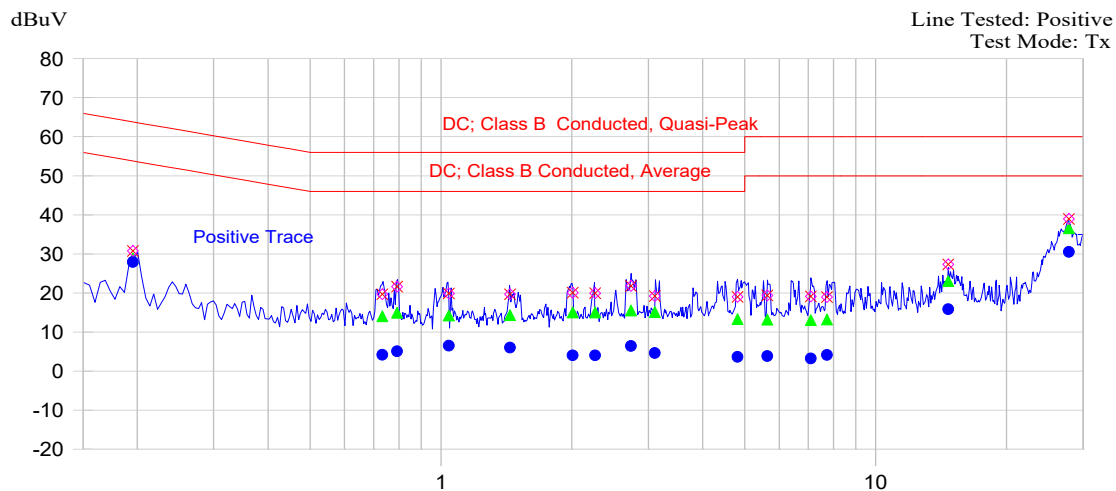

12/9/2024 2:30:09 PM

(Start = 0.15, Stop = 30.00) MHz

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
27.821	38.9	36.6	-23.4	30.5	-19.5	Positive Trace

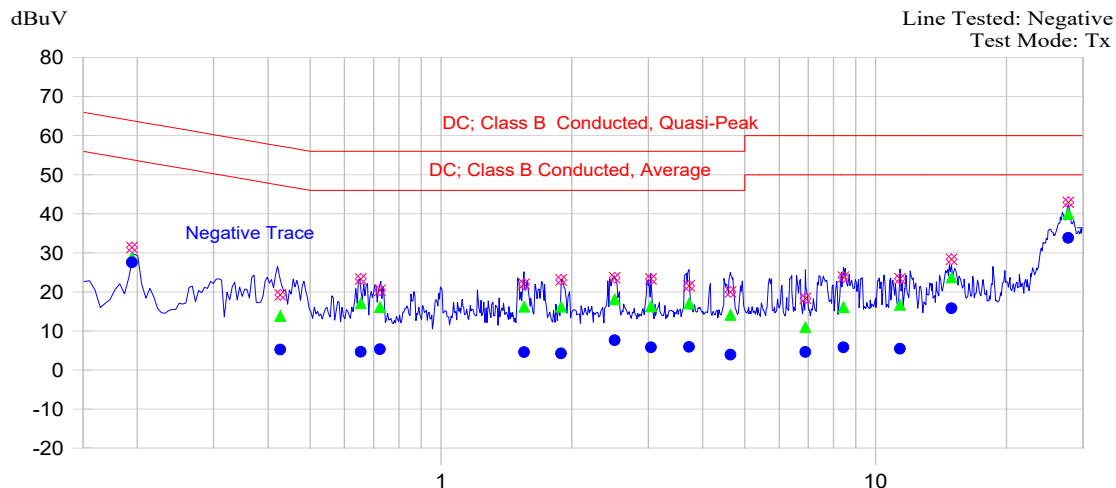

12/9/2024 2:18:59 PM

(Start = 0.15, Stop = 30.00) MHz

Frequency MHz	Peak dBuV	QP dBuV	QP-QP Limit dB	Avg dBuV	Avg-Avg Limit dB	Trace Name
27.722	42.9	40.0	-20.0	33.8	-16.2	Negative Trace

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

27.5 Vdc

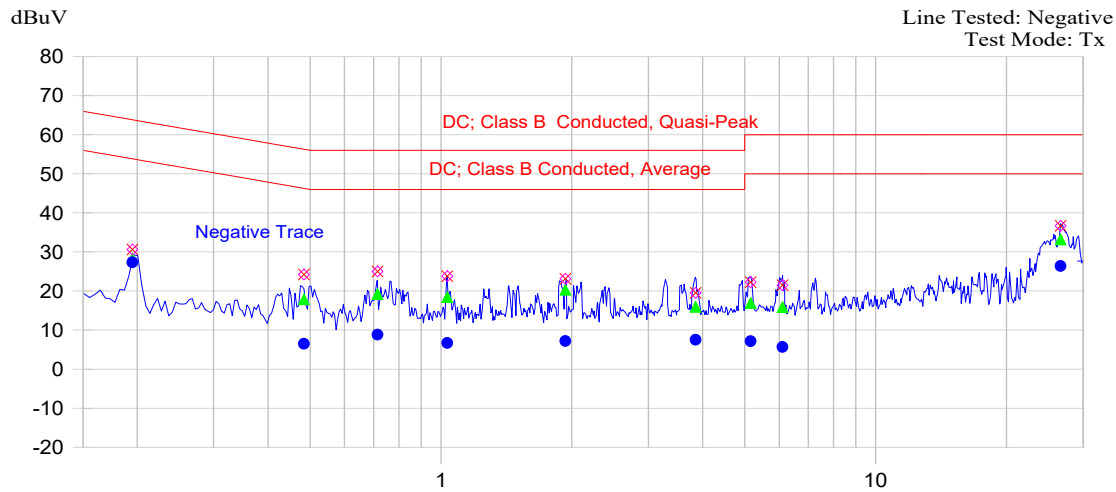

12/9/2024 1:19:59 PM

(Start = 0.15, Stop = 30.00) MHz

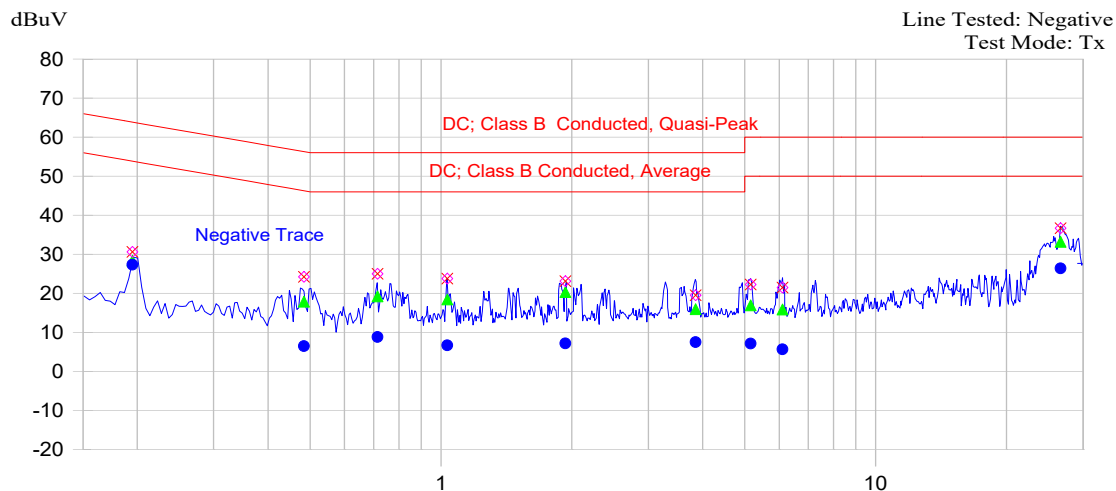

12/9/2024 1:19:59 PM

(Start = 0.15, Stop = 30.00) MHz

All signals lower than 20dB below the limit

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


## RX Mode

13.8 V Dc

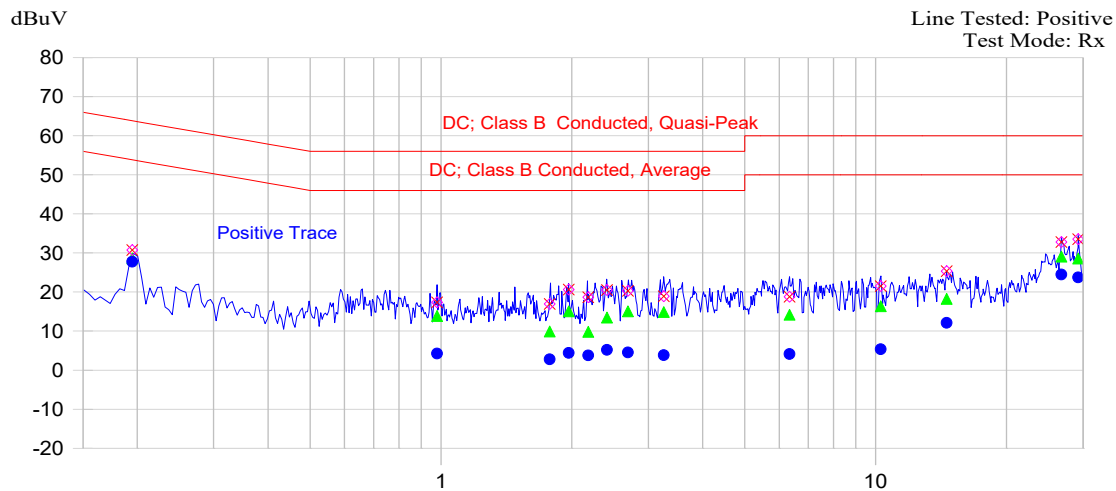

12/9/2024 1:55:50 PM

(Start = 0.15, Stop = 30.00) MHz

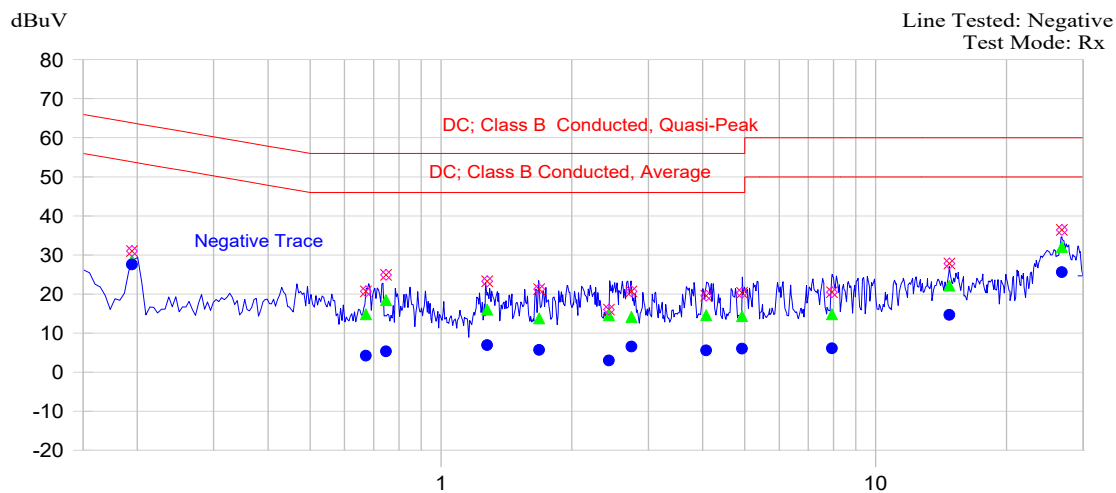

12/9/2024 2:08:06 PM

(Start = 0.15, Stop = 30.00) MHz

All signals lower than 20dB below the limit

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

27.5 Vdc

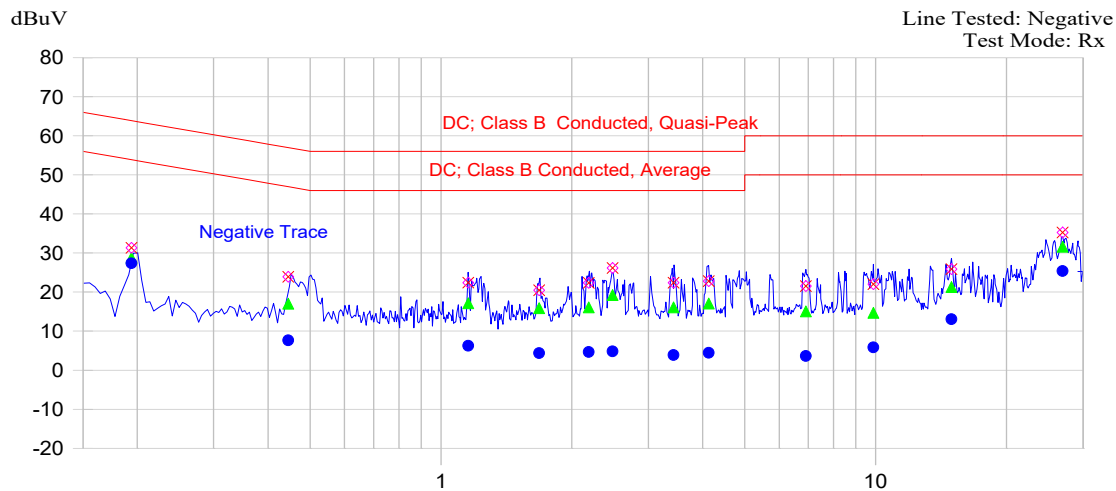

12/9/2024 1:30:31 PM

(Start = 0.15, Stop = 30.00) MHz

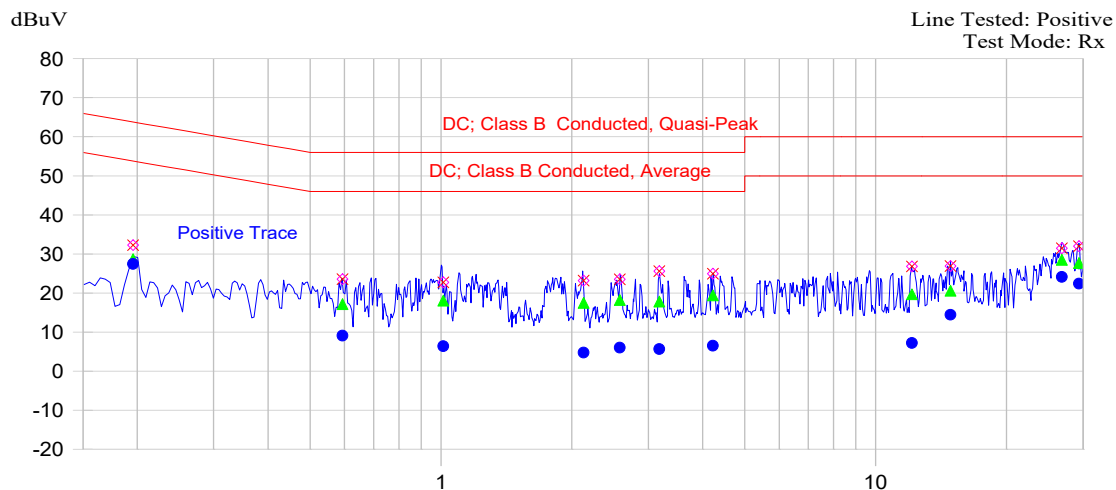

12/9/2024 1:41:45 PM

(Start = 0.15, Stop = 30.00) MHz

All signals lower than 20dB below the limit

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.4. RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS (DIGITAL APPARATUS) [ICES-003, ISSUE 7]

### 5.4.1. Limits

The equipment shall meet the limits of the following tables determined at a distance of 3 metres.

**Class B Radiated Limits below 1 GHz**

Frequency (MHz)	Class B Radiated Limit (dB $\mu$ V/m)
	Quasi-peak
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 1000	54.0

**Class B Radiated Limits above 1 GHz**

Frequency (MHz)	Class B Radiated Limit (dB $\mu$ V/m)	
	Linear Average Detector	Peak Detector
> 1000	54	74

### 5.4.2. Method of Measurements

ANSI C63.4.

### 5.4.3. Test Data


Remarks:

- The measuring receiver shall be tuned over the frequency range 30 MHz to 6 GHz.
- All emissions that are in excess of 20 dB below the specified limit shall be recorded.
- EUT was set in receive mode

Frequency (MHz)	RF Level (dB $\mu$ V/m)	Detector Used (Peak/QP/Avg)	Antenna Plane (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)
30	22.22	PEAK	V	40	-17.78
30	22.5	PEAK	H	40	-17.5
3149	39.75	PEAK	V	54	-14.25
3149	41.21	PEAK	H	54	-12.79
5467	44.81	PEAK	V	54	-9.19
5467	44.03	PEAK	H	54	-9.97

## EXHIBIT 6. TEST EQUIPMENT LIST AND SETUP

### 6.1. Conducted Power

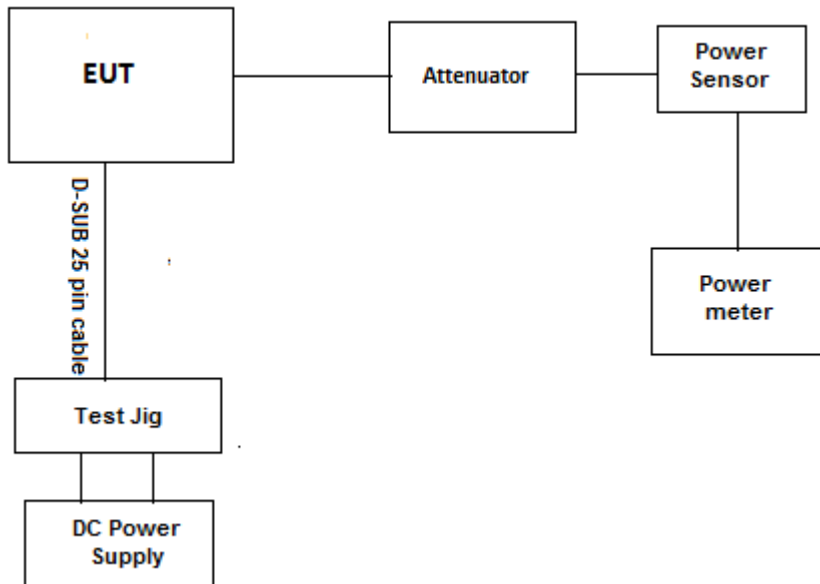

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Power Meter	HP	436A	2709A2751 5	100KHz-sensor dependant	17-Sep-2025
Power Sensor	HP	8482A	MY4117205 4	10MHz-4.2GHz	07-Nov-2025
Attenuator(30dB)	Aeroflex\Weins chel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 6.2. Modulation Limit

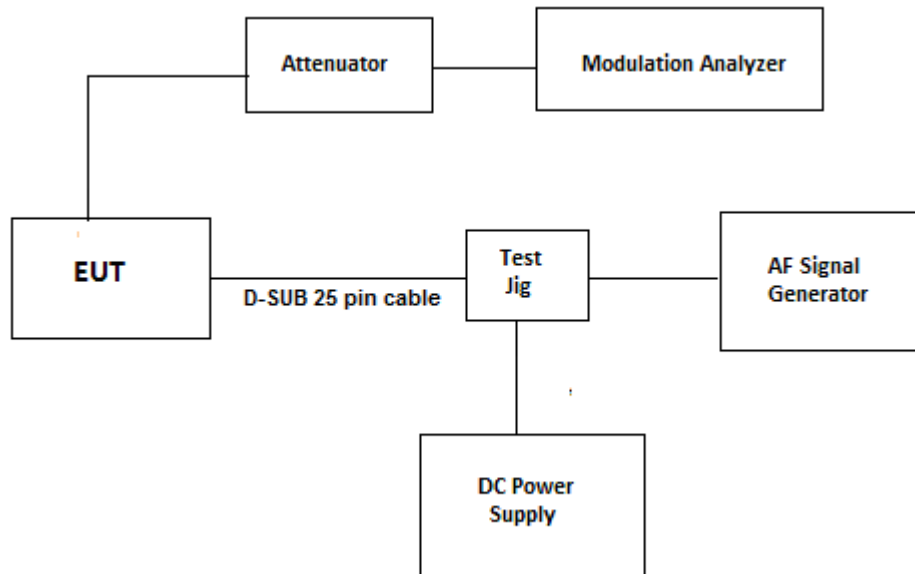

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Digital Voltmeter	HP	3456A	2015A04523	--	09-Feb-2026
Attenuator(30dB)	Aeroflex\Wein schel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 6.3. Audio Frequency Response

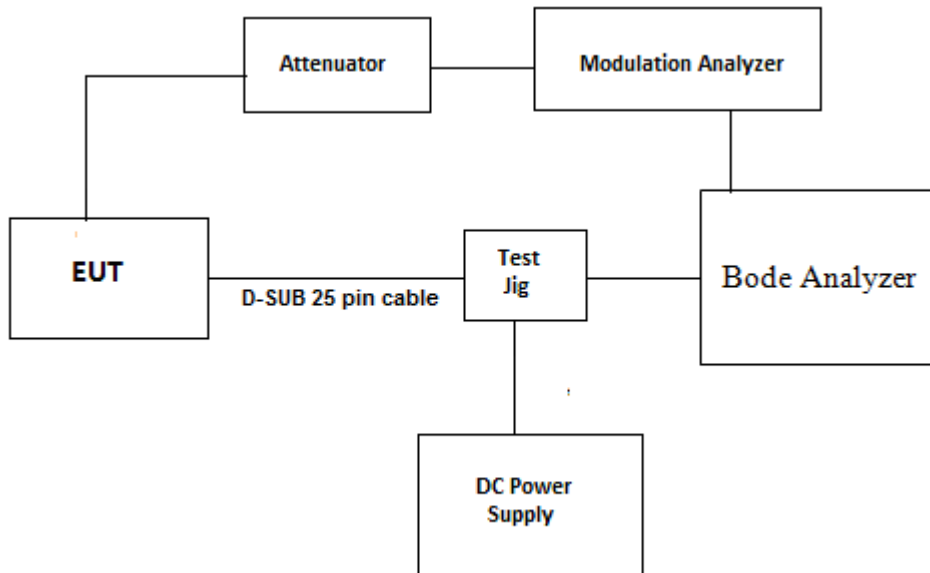

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
Spectrum Analyzer	Omicron Labs	Bode 100	PM453H	1Hz – 50MHz	28-Feb-2026
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Attenuator(3dB)	Aeroflex\Weinschel	23-3-34	AN2549	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 6.4. 99% OBW and Mask

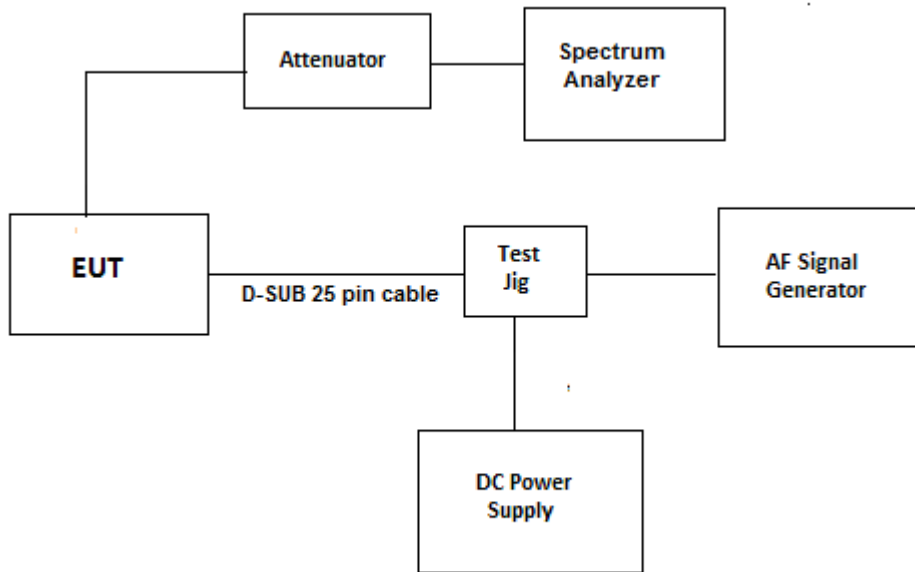

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Digital Voltmeter	HP	3456A	2015A04523		09-Feb-2026
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

#### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.5. Tx Conducted Emission

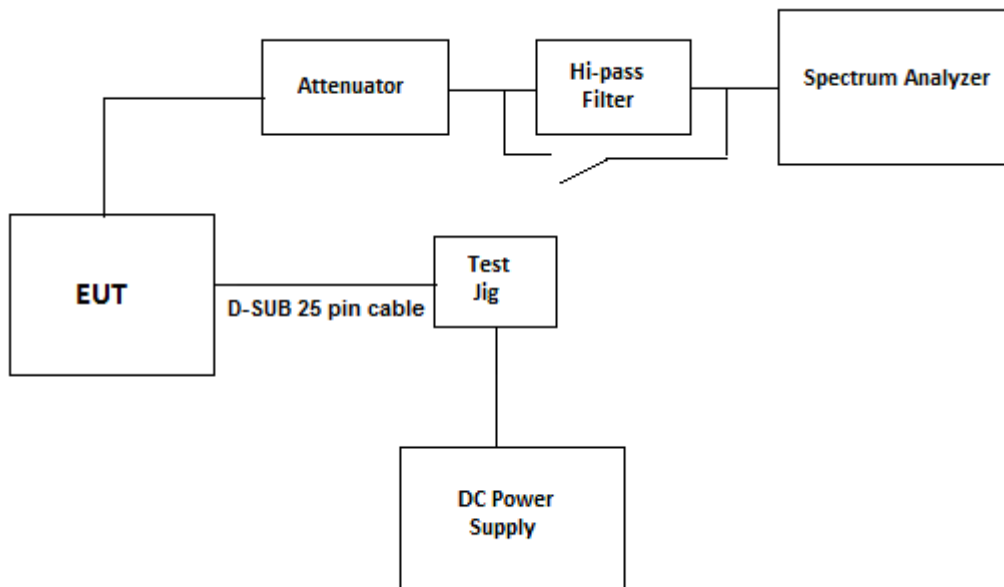

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	22-Apr-2026
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.6. Rx Conducted Emission

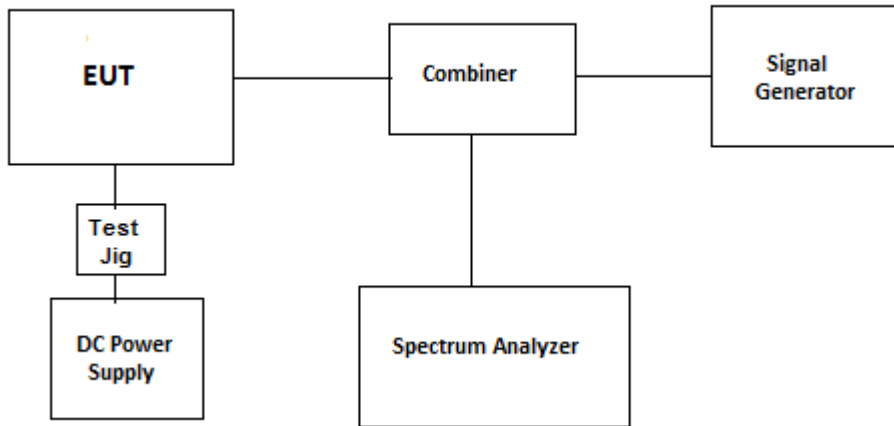

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Signal Generator	HP	8648C	3537A02098	100KHz-3.2GHz	08-Sep-2025
Combiner	Weinschel 93458	1515	PS119	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.7. TX Radiated

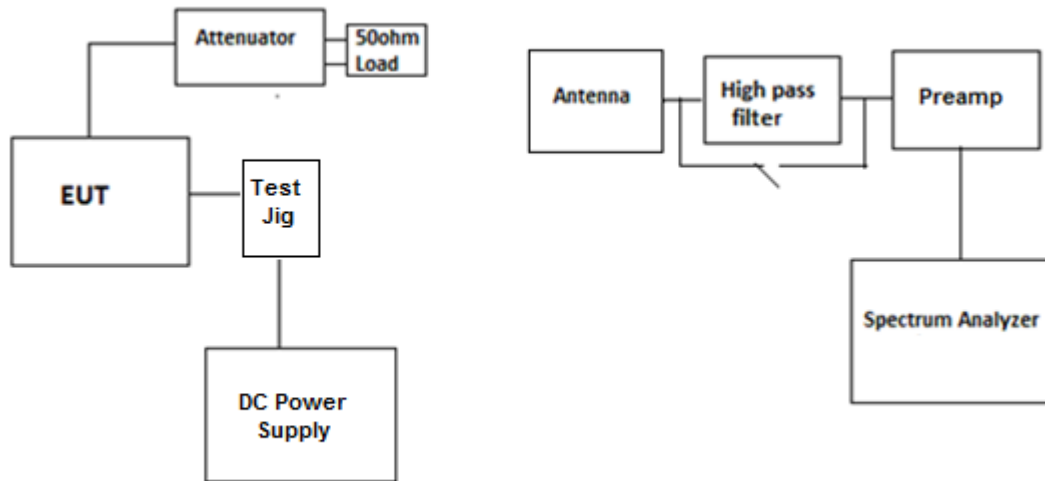

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Bicon Antenna	ETS	93110B	9906-3319	30-200MHz	28-Aug-2025
Log Periodic Antenna	ETS	93148	1101	200-2000MHz	29-Apr-2026
Horn Antenna	ETS	3117	00119425	1-18GHz	18-Jan-2026
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	20-Feb-2025
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	20-Feb-2025
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.8. Rx Radiated

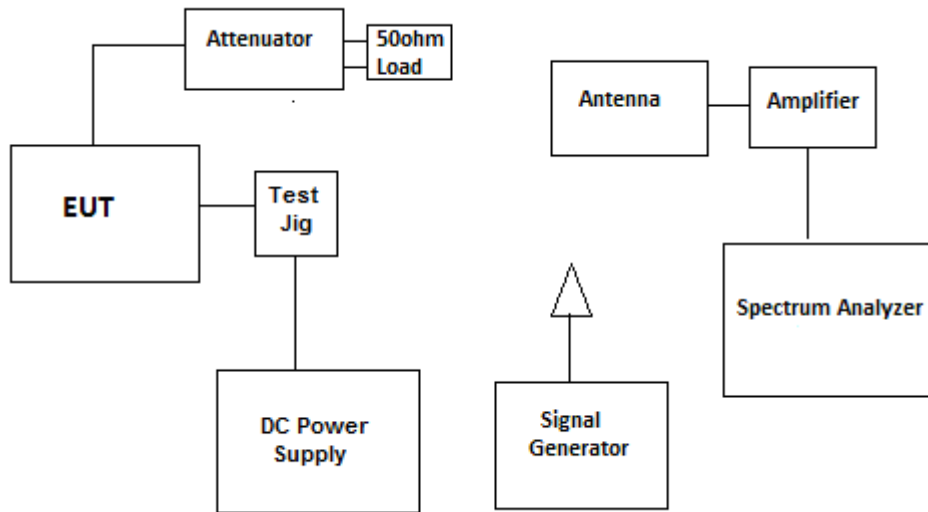

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	21-Sep-2025
Bicon Antenna	ETS	93110B	9906-3319	30-200MHz	28-Aug-2025
Log Periodic Antenna	ETS	93148	1101	200-2000MHz	29-Apr-2026
Horn Antenna	ETS	3117	00119425	1-18GHz	18-Jan-2026
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	20-Feb-2025
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	20-Feb-2025
Signal Generator	HP	8648C	3537A02098	100KHz-3.2GHz	08-Sep-2025
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use


### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141  
December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 6.9. Frequency Stability

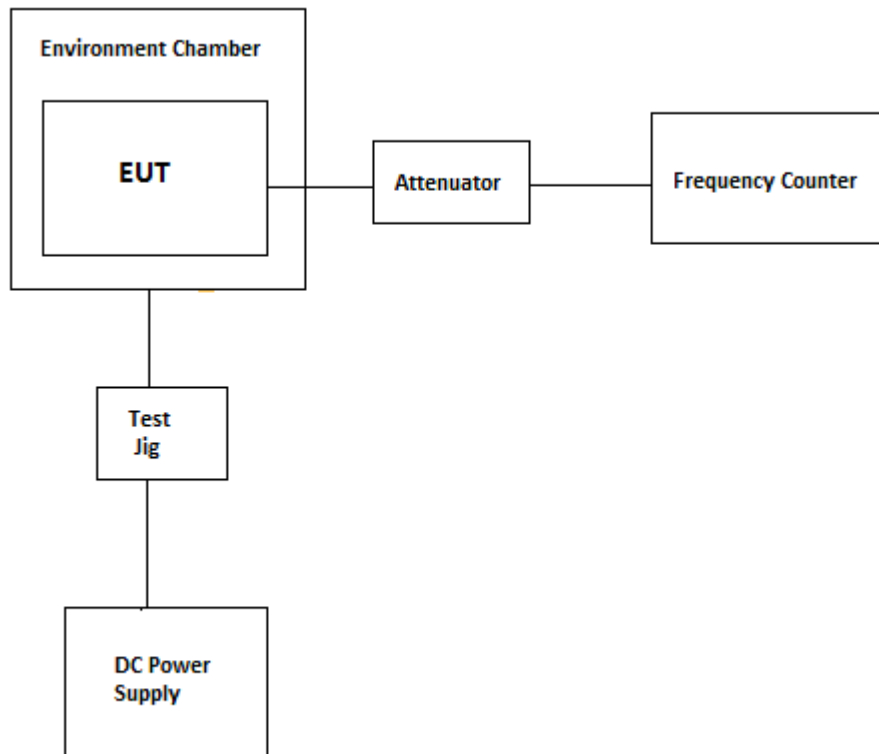

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177° C	29-Aug-2025
Frequency Counter	HP	HP-8901B	3226A04606	150KHz-1300MHz	22-Apr-2026
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 6.10. Power line Conducted emissions

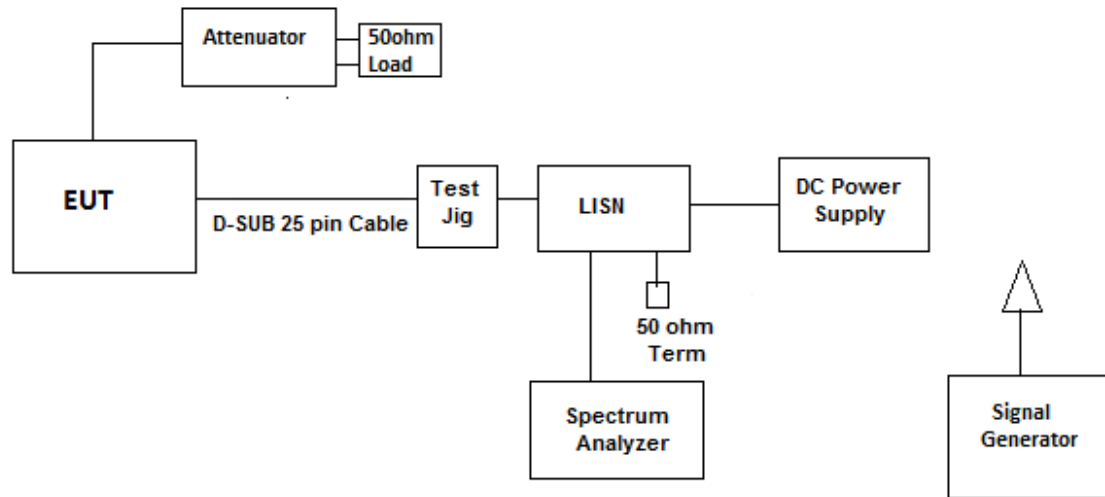

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Agilent	E7401A	US4024032	9kHz - 1.5GHz	19-Nov-2025
LISN	Schwarzbeck	NSLK 8127	8127276	9kHz - 30MHz	11-Dec-2024
Highpass Filter	Rohde & Schwarz	EZ-25	830164/007	150kHz – 30MHz	04-Sep-2025
Attenuator	Weinschel	24-20-34	BK2804	DC - 18GHz	Cal on use
Power Supply	Dr.Meter	HY5020E	013141252	0-50V,20A	----
Multimeter	Fluke	8842A	5021295	---	10-Mar-2025

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

Test description		Uncertainty
Conducted Output Power		+/- 0.62 dB
Occupied bandwidth		+/-0.2Hz
Emission Mask	Amplitude	+/- 0.63 dB
	Frequency	+/-0.2Hz
Conducted Out of Band/Spurious Emissions		+/- 0.72 dB
Radiated Out of Band/Spurious Emissions	<30 MHz	+/-2.69dB
	30-1000 MHz	+/-4.20dB
	>1 GHz	+/-2.70dB
Frequency Stability		+/-1.2 Hz
Power Line Conducted Emission		+ 2.62dB

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 24ICOM620\_FCC87RSS141

December 17, 2024

*All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*