

Radio Test Report

Report No.:STS2409015W02

Issued for

Gojo Industries, Inc.

One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311
United States

Product Name: Activity Counter

Brand Name: PURELL SMARTLINK(R)

Model Name: Activity Counter

Series Model(s): N/A

FCC ID: O76-X2HG2400A

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT****Applicant's Name**..... : Gojo Industries, Inc.

Address : One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311 United States

Manufacturer's Name : Gojo Industries, Inc.

Address : One Gojo Plaza Suite 500P.O. Box 991, Akron, OH 44311 United States

Product Description

Product Name : Activity Counter

Brand Name : PURELL SMARTLINK(R)

Model Name : Activity Counter

Series Model(s) : N/A

Test Standards..... : FCC Part15.247

Test Procedure : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test..... :

Date of receipt of test item : 03 Sept. 2024

Date (s) of performance of tests..... : 03 Sept. 2024 ~ 23 Sept. 2024

Date of Issue..... : 25 Sept. 2024

Test Result..... : **Pass**

Testing Engineer : _____

(Aaron Bu)

Technical Manager : _____

(Tony Liu)

Authorized Signatory : _____

(Bovey Yang)





Table of Contents

1. SUMMARY OF TEST RESULTS	7
1.1 TEST FACTORY	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF THE EUT	9
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 EQUIPMENTS LIST	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	14
3.4 EUT OPERATING CONDITIONS	14
3.5 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	15
4.1 RADIATED EMISSION LIMITS	15
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	18
4.4 EUT OPERATING CONDITIONS	18
4.5 FIELD STRENGTH CALCULATION	19
4.6 TEST RESULTS	19
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	40
5.1 LIMIT	40
5.2 TEST PROCEDURE	40
5.3 TEST SETUP	40
5.4 EUT OPERATION CONDITIONS	40
5.5 TEST RESULTS	40
6. POWER SPECTRAL DENSITY TEST	41
6.1 LIMIT	41
6.2 TEST PROCEDURE	41
6.3 TEST SETUP	41



Table of Contents

6.4 EUT OPERATION CONDITIONS	41
6.5 TEST RESULTS	41
7. BANDWIDTH TEST	42
7.1 LIMIT	42
7.2 TEST PROCEDURE	42
7.3 TEST SETUP	42
7.4 EUT OPERATION CONDITIONS	42
7.5 TEST RESULTS	42
8. PEAK OUTPUT POWER TEST	43
8.1 LIMIT	43
8.2 TEST PROCEDURE	43
8.3 TEST SETUP	44
8.4 EUT OPERATION CONDITIONS	44
8.5 TEST RESULTS	44
9. ANTENNA REQUIREMENT	45
9.1 STANDARD REQUIREMENT	45
9.2 EUT ANTENNA	45
APPENDIX 1-TEST DATA	46
125K	46
1. DUTY CYCLE	46
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	49
3. MAXIMUM PEAK CONDUCTED OUTPUT POWER	52
4. -6DB BANDWIDTH	55
5. MAXIMUM POWER SPECTRAL DENSITY LEVEL	58
6. BAND EDGE	61
7. CONDUCTED RF SPURIOUS EMISSION	64
500K	68
1. DUTY CYCLE	68
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	71
3. MAXIMUM PEAK CONDUCTED OUTPUT POWER	74



Table of Contents

4. -6DB BANDWIDTH	77
5. MAXIMUM POWER SPECTRAL DENSITY LEVEL	80
6. BAND EDGE	83
7. CONDUCTED RF SPURIOUS EMISSION	86
APPENDIX 2- EUT TEST PHOTO	90

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	25 Sept. 2024	STS2409015W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-20120.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Activity Counter	
Brand Name	PURELL SMARTLINK(R)	
Model Name	Activity Counter	
Series Model(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a Activity Counter	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Configuration:	LE(Support 125K,500K)
	Number Of Channel:	40
	Antenna Type:	PCB Antenna
	Antenna Gain (dBi)	1.443
Channel List	Please refer to the Note 3.	
Rating	Input: DC4.5V/1A	
Battery	DC 1.5V * 3 AA	
Hardware version number	1.0.0	
Software version number	1.0.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1 Mbps/GFSK
Mode 2	TX CH19(2440MHz)	1 Mbps/GFSK
Mode 3	TX CH39(2480MHz)	1 Mbps/GFSK

Note:

(1) We tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and DC 4.5V) for which the device is capable of operation, and the worst case of DC 4.5V is shown in the report.

(2) The battery is new during the radiated and RF conducted test.

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BLE	BLE_125K	GFSK	1.443	0	Si Connect
	BLE_500K				

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Power detector group	Keysight	NW2021031	N/A	2023.09.26	2024.09.25
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	MW	MTS 8310_2.0.0.0			

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

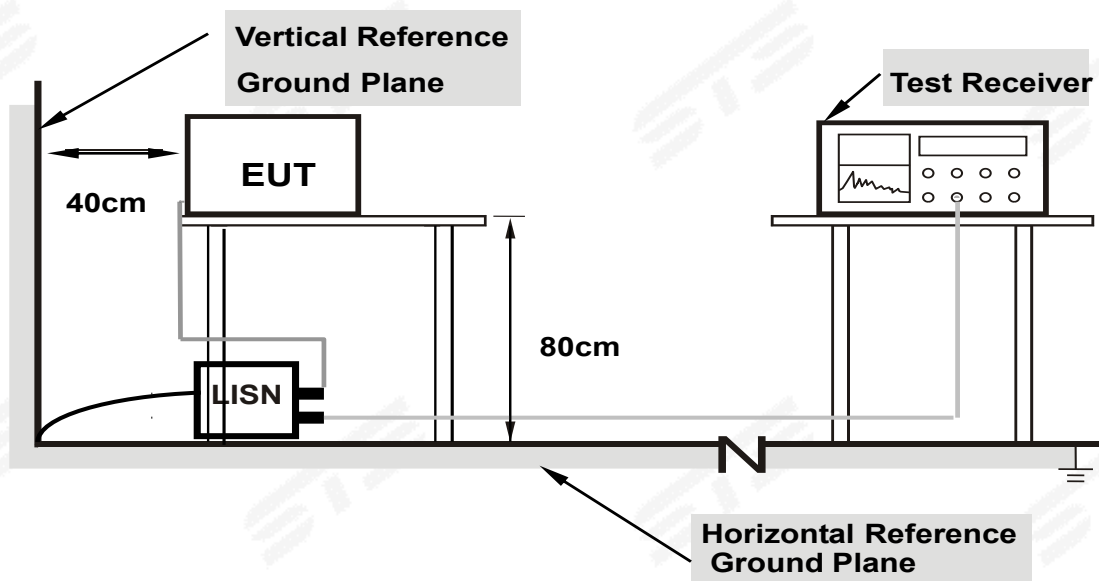

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.5 TEST RESULTS

Temperature:	--°C	Relative Humidity:	---%RH
Test Voltage:	N/A	Phase:	L/N
Test Mode:	N/A		

Note: product is battery operated and conducted emission test is not applicable.



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

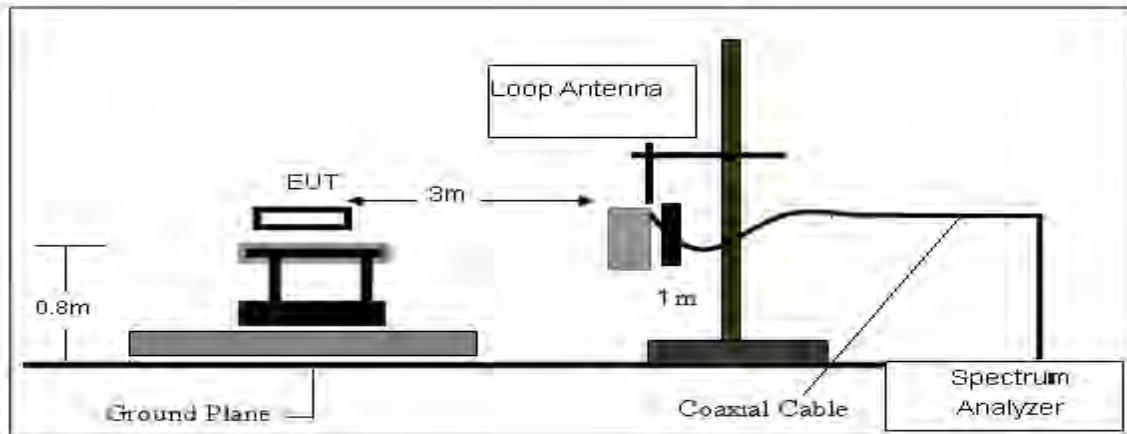

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

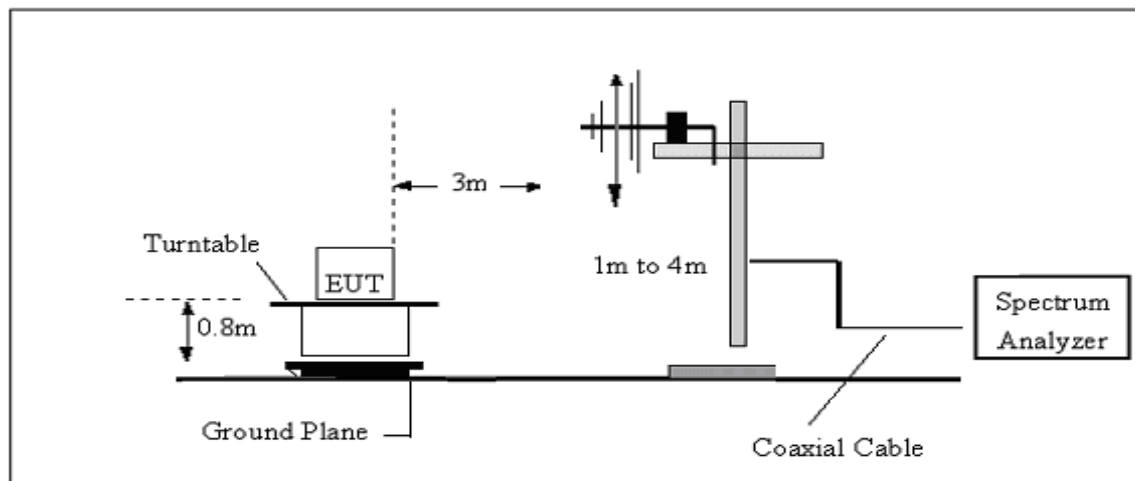

(C) Radiated Emission Test-Up Frequency Above 1GHz

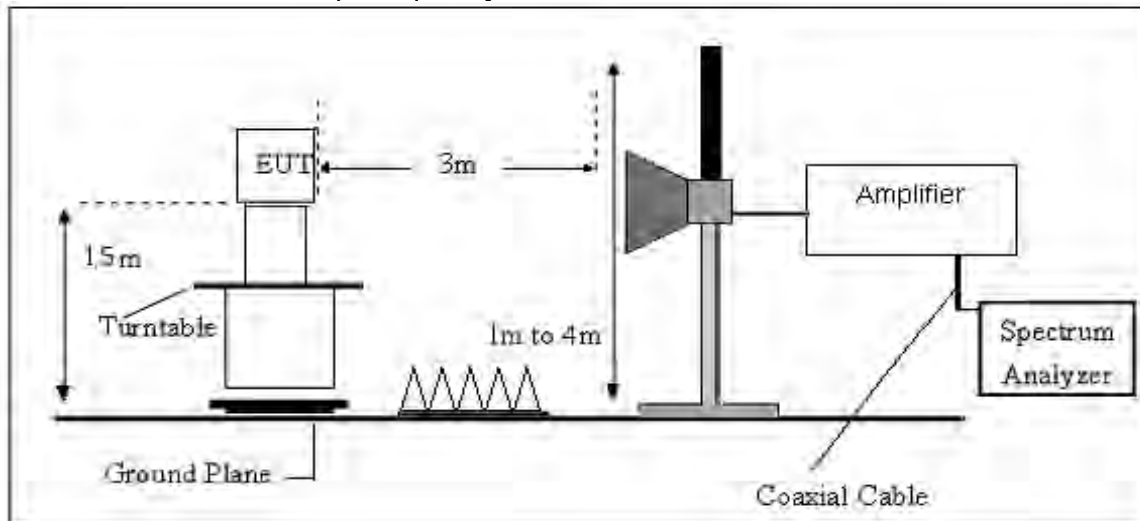

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dB μ V) + distance extrapolation factor.


(30MHz -1000MHz)

Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		
Describe:	125K		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.4900	41.23	-21.41	19.82	40.00	-20.18	peak
2	89.1700	38.09	-21.57	16.52	43.50	-26.98	peak
3	426.7300	33.95	-10.12	23.83	46.00	-22.17	peak
4	553.8000	29.10	-5.67	23.43	46.00	-22.57	peak
5	738.1000	29.11	-2.18	26.93	46.00	-19.07	peak
6	982.5400	28.05	2.52	30.57	54.00	-23.43	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

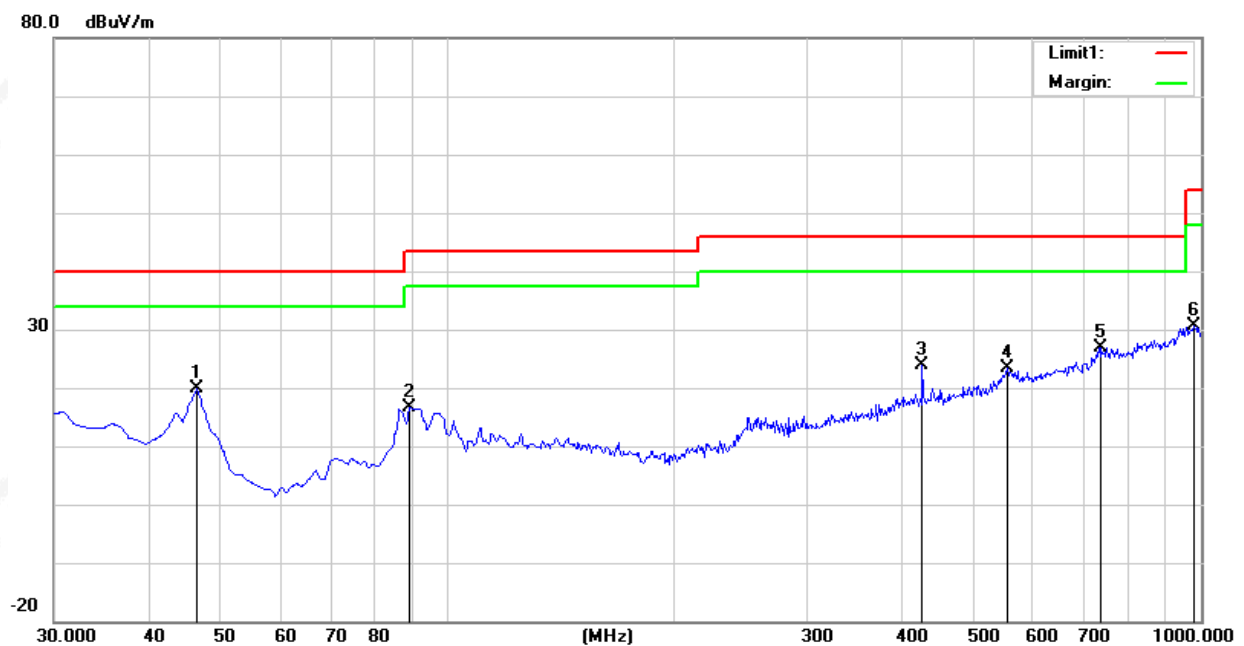




Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		
Describe:	125K		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	50.12	-15.91	34.21	40.00	-5.79	peak
2	70.7400	42.87	-24.73	18.14	40.00	-21.86	peak
3	125.0600	35.92	-18.22	17.70	43.50	-25.80	peak
4	450.0100	36.64	-9.67	26.97	46.00	-19.03	peak
5	676.9900	29.57	-4.37	25.20	46.00	-20.80	peak
6	937.9200	29.68	1.20	30.88	46.00	-15.12	peak

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

80.0 dBuV/m

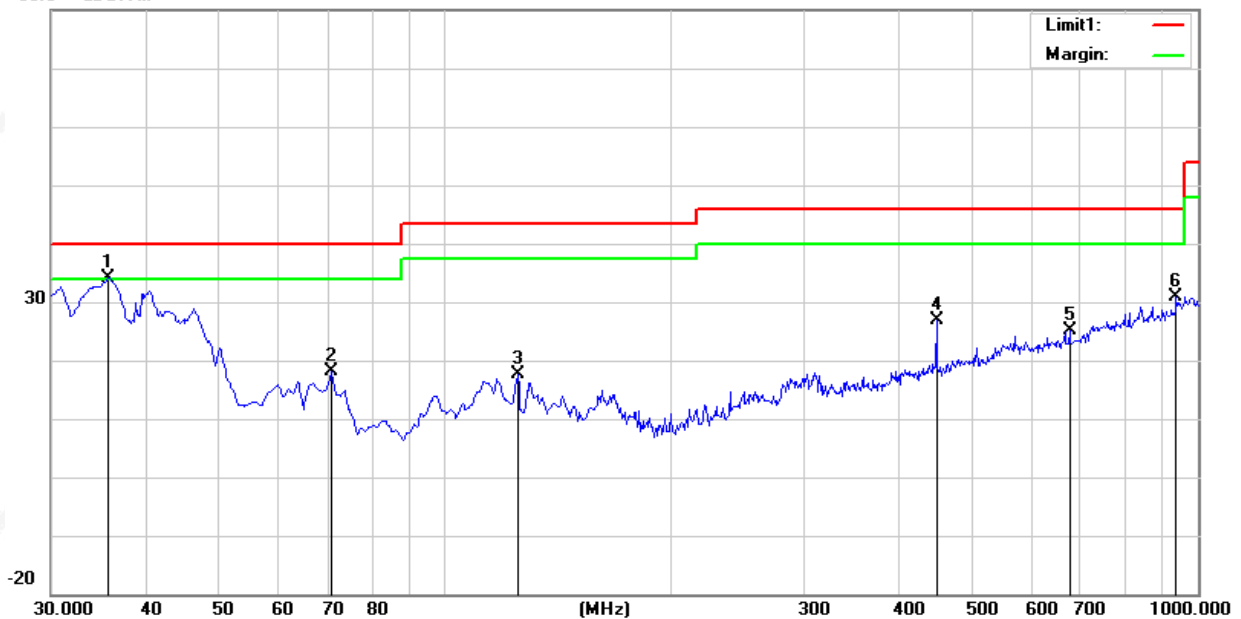


Temperature:	23.4°C	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		
Describe:	500K		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	37.84	-15.91	21.93	40.00	-18.07	peak
2	95.9600	46.92	-20.67	26.25	43.50	-17.25	peak
3	482.0200	29.59	-8.57	21.02	46.00	-24.98	peak
4	632.3700	29.80	-5.00	24.80	46.00	-21.20	peak
5	837.0400	28.08	-0.46	27.62	46.00	-18.38	peak
6	970.9000	29.35	2.06	31.41	54.00	-22.59	peak

Remark:

4. Margin = Result (Result =Reading + Factor)-Limit
5. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
6. All modes have been tested,only show the worst case.

80.0 dBuV/m

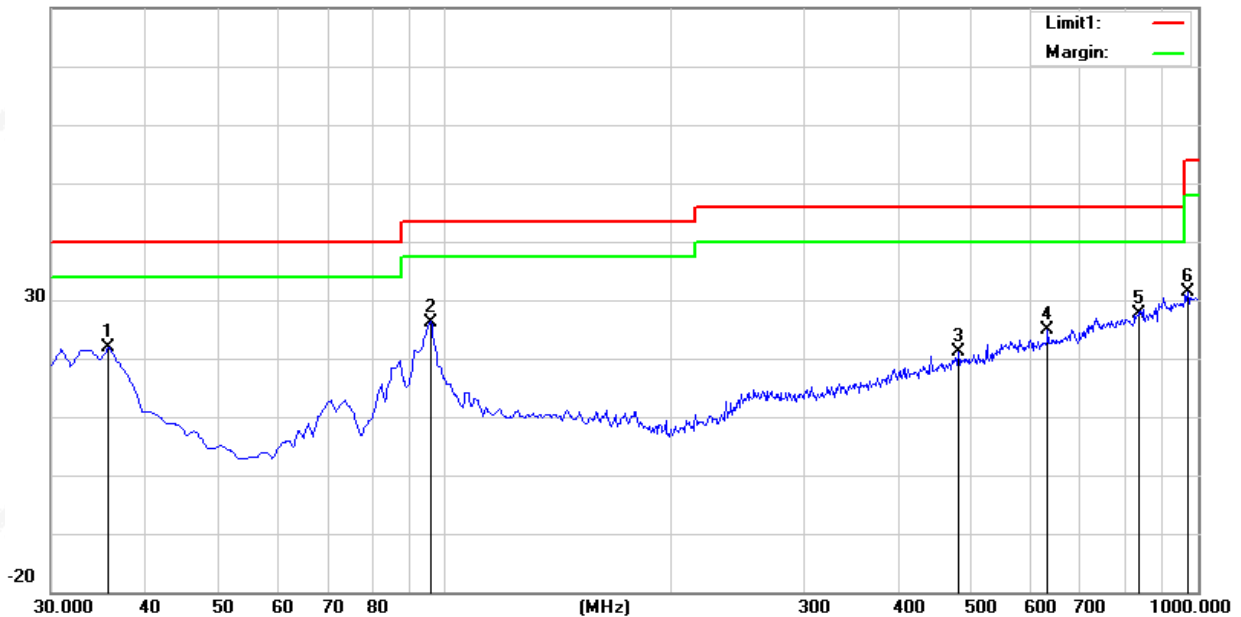




Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 4.5V By Battery	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 3 worst mode)		
Describe:	500K		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8200	48.99	-15.91	33.08	40.00	-6.92	peak
2	62.0100	43.15	-25.76	17.39	40.00	-22.61	peak
3	95.9600	37.53	-20.67	16.86	43.50	-26.64	peak
4	173.5600	36.69	-19.97	16.72	43.50	-26.78	peak
5	582.9000	28.78	-5.78	23.00	46.00	-23.00	peak
6	902.0300	33.08	-0.40	32.68	46.00	-13.32	peak

Remark:

- Margin = Result (Result =Reading + Factor)-Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
- All modes have been tested,only show the worst case.

80.0 dBuV/m

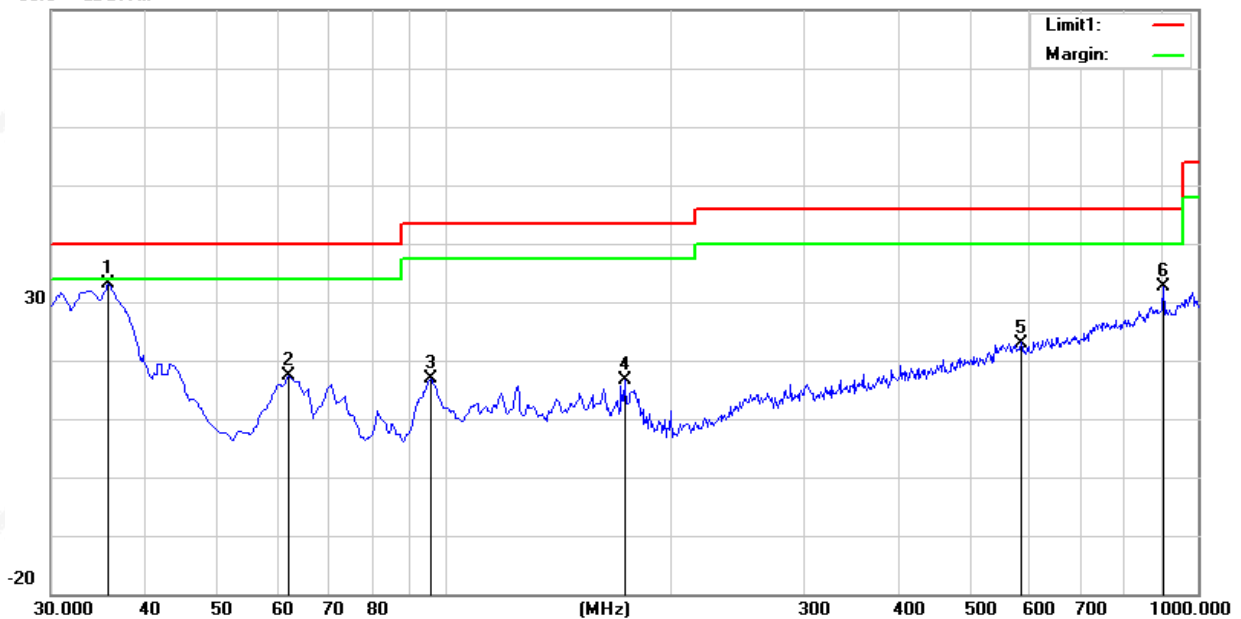




Above 1GHz Spurious emission Requirements

Remark: The emissions above 18GHz and below 26GHz are too small to be measured and are at least 10 dB below the limit. The frequency is mainly from the environment noise.

125K
Low
Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

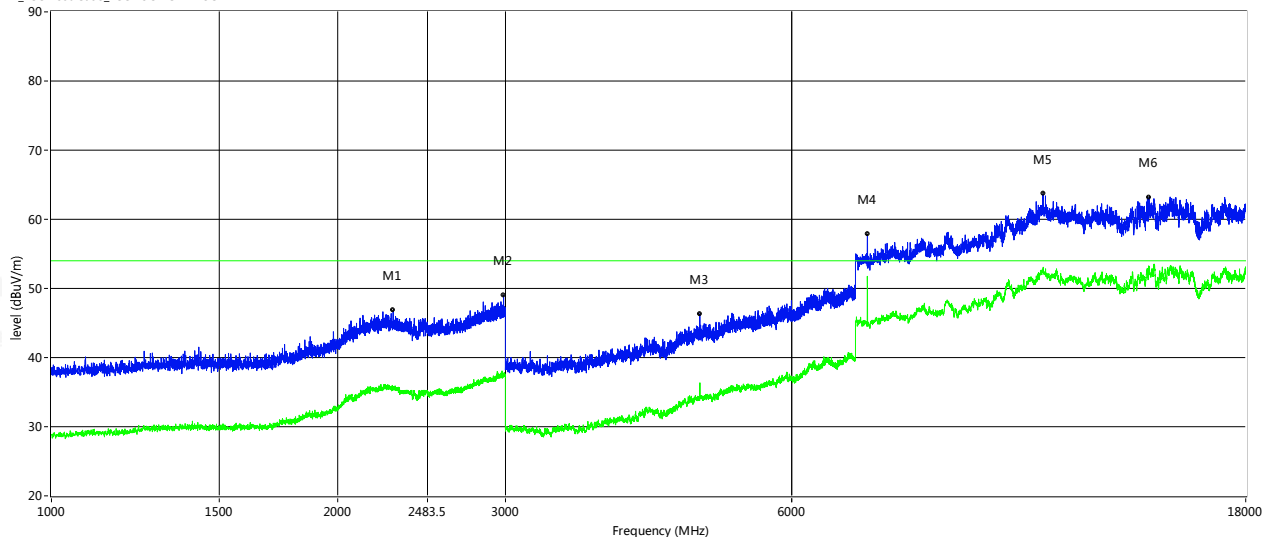


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2286.500	46.79	35.74	4.60	74.0	54.0	-18.26	80.20	100	Horizontal	Pass
2987.000	49.03	37.42	6.05	74.0	54.0	-16.58	358.00	100	Horizontal	Pass
4803.000	46.34	35.24	-6.96	74.0	54.0	-18.76	45.10	100	Horizontal	Pass
7203.500	70.82	51.76	2.69	74.0	54.0	-2.24	219.40	100	Horizontal	Pass
11020.500	63.66	51.68	10.11	74.0	54.0	-2.32	153.90	100	Horizontal	Pass
14229.750	63.11	51.60	11.37	74.0	54.0	-2.40	352.20	100	Horizontal	Pass



Vertical


RE_FCC Test Case_FCC 15C 1GHz-18GHz

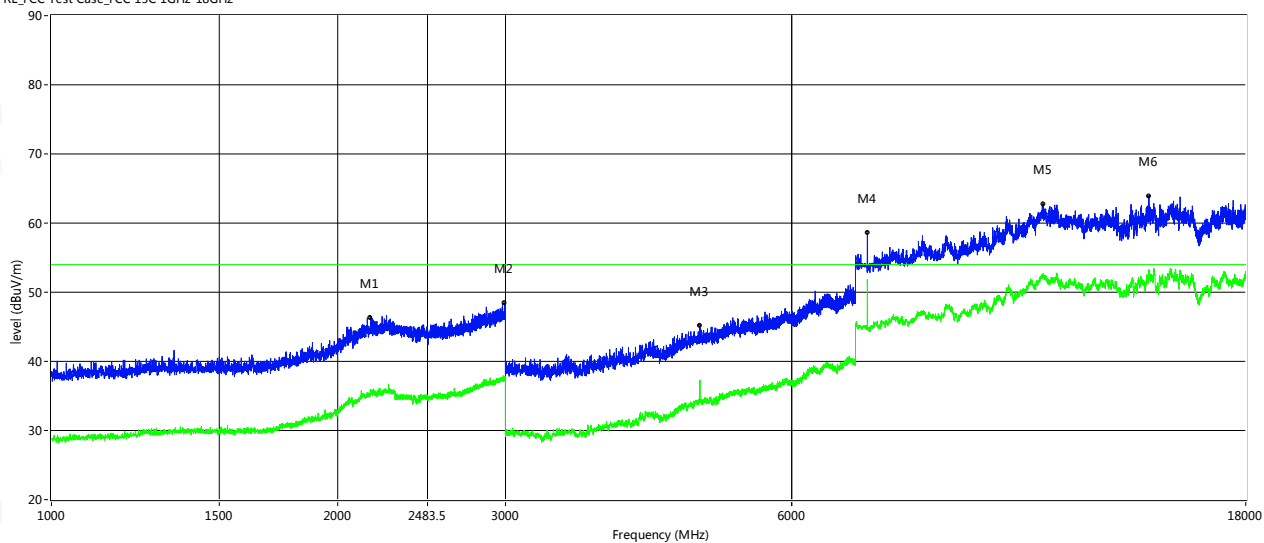

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2165.500	46.30	35.37	4.47	74.0	54.0	-18.63	347.00	100	Vertical	Pass
2997.000	48.40	37.26	6.10	74.0	54.0	-16.74	100.40	100	Vertical	Pass
4803.000	45.15	35.75	-6.96	74.0	54.0	-18.25	30.70	100	Vertical	Pass
7203.500	70.57	51.83	2.69	74.0	54.0	-2.17	206.30	100	Vertical	Pass
11028.750	62.69	51.44	10.06	74.0	54.0	-2.56	322.00	100	Vertical	Pass
14240.750	63.92	51.21	11.28	74.0	54.0	-2.79	357.80	100	Vertical	Pass

Middle
Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

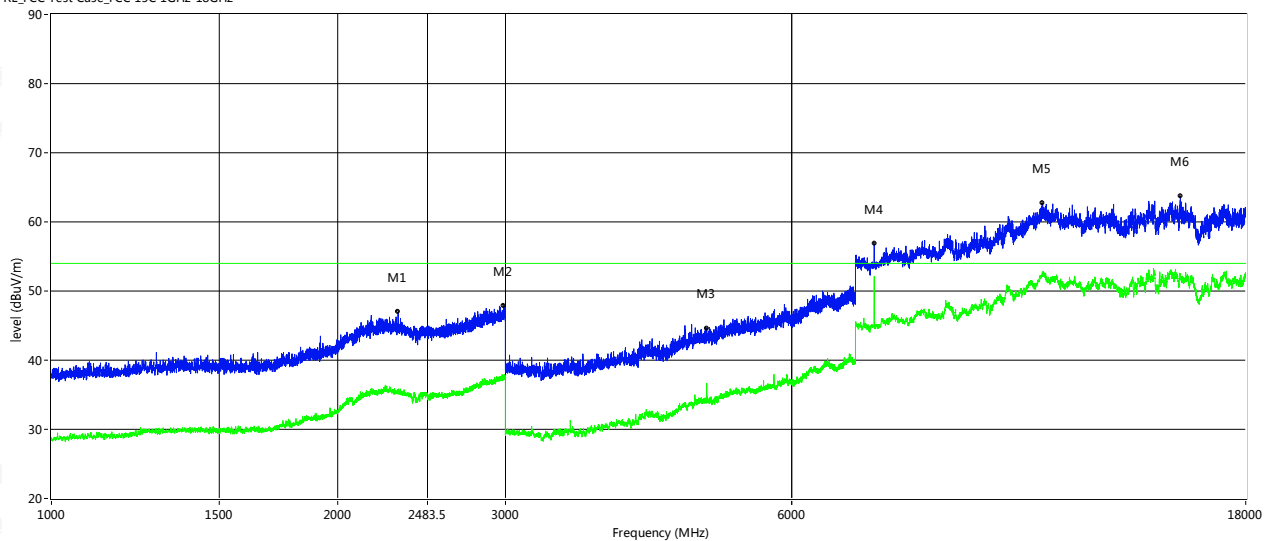


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2314.000	46.96	35.38	4.53	74.0	54.0	-18.62	198.10	100	Horizontal	Pass
2989.000	47.89	37.33	6.06	74.0	54.0	-16.67	251.80	100	Horizontal	Pass
4883.000	44.55	35.05	-6.49	74.0	54.0	-18.95	358.20	100	Horizontal	Pass
7324.500	70.83	51.11	3.30	74.0	54.0	-2.89	237.60	100	Horizontal	Pass
11009.500	62.67	51.41	10.17	74.0	54.0	-2.59	330.50	100	Horizontal	Pass
15368.250	63.65	51.33	10.65	74.0	54.0	-2.67	174.90	100	Horizontal	Pass



Vertical


RE_FCC Test Case_FCC 15C 1GHz-18GHz

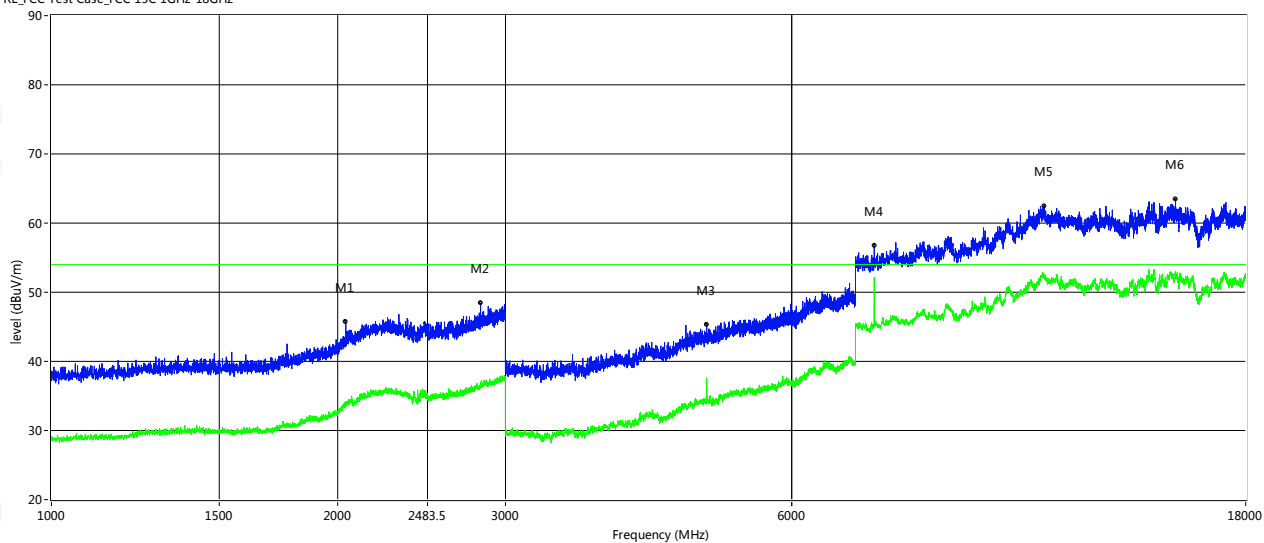

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2038.500	45.72	33.79	2.52	74.0	54.0	-20.21	221.90	100	Vertical	Pass
2825.000	48.44	36.41	5.44	74.0	54.0	-17.59	4.50	100	Vertical	Pass
4884.000	45.28	37.63	-6.48	74.0	54.0	-16.37	314.50	100	Vertical	Pass
7324.500	69.68	51.15	3.30	74.0	54.0	-2.85	211.10	100	Vertical	Pass
11045.250	62.48	51.22	9.98	74.0	54.0	-2.78	171.90	100	Vertical	Pass
15186.750	63.48	51.75	10.94	74.0	54.0	-2.25	76.30	100	Vertical	Pass

High
Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

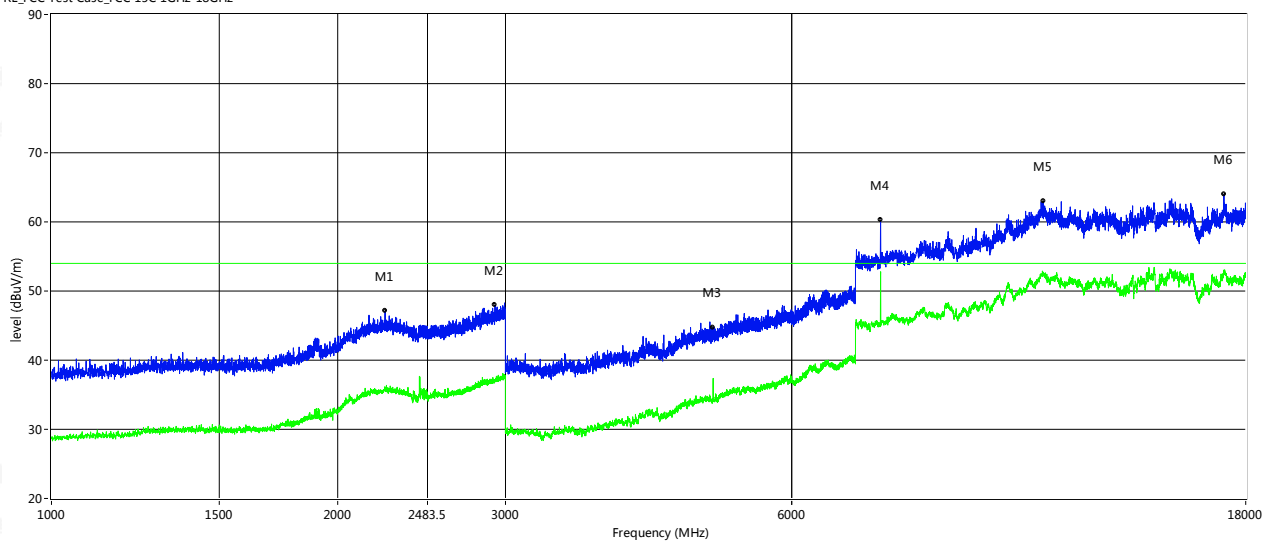


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2242.000	47.11	35.58	4.55	74.0	54.0	-18.42	291.10	100	Horizontal	Pass
2925.500	47.97	37.09	5.76	74.0	54.0	-16.91	214.60	100	Horizontal	Pass
4956.000	44.72	34.05	-6.38	74.0	54.0	-19.95	225.50	100	Horizontal	Pass
7437.250	70.25	51.28	2.97	74.0	54.0	-2.72	241.20	100	Horizontal	Pass
11028.750	62.95	51.75	10.06	74.0	54.0	-2.25	212.50	100	Horizontal	Pass
17073.250	63.98	51.97	10.29	74.0	54.0	-2.03	5.40	100	Horizontal	Pass



Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

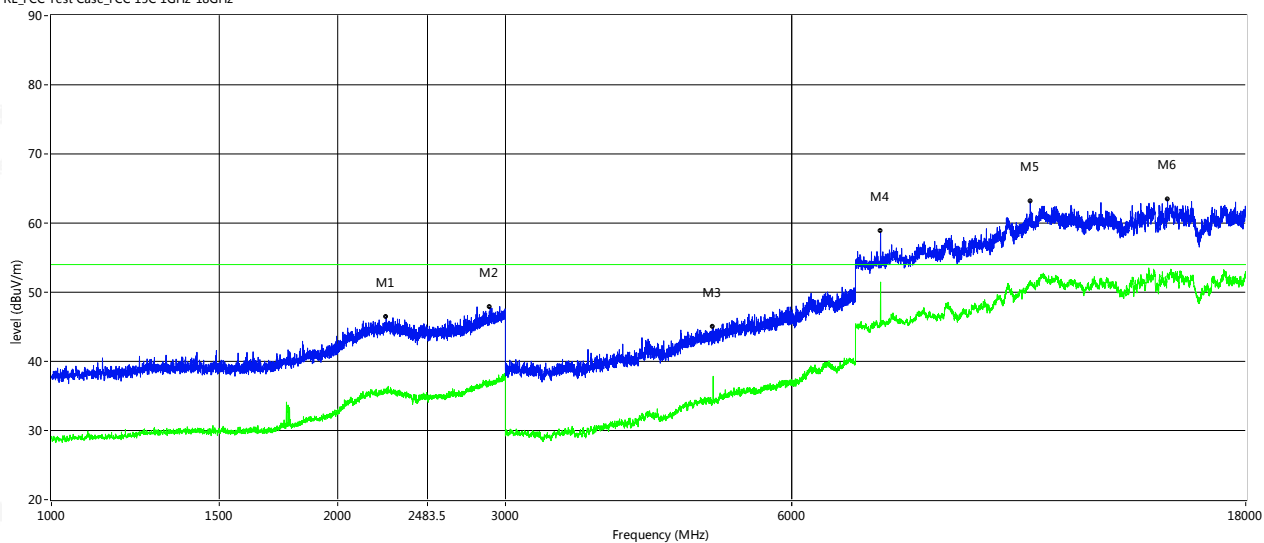


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2248.000	46.49	35.46	4.62	74.0	54.0	-18.54	188.00	100	Vertical	Pass
2891.500	47.83	36.94	5.61	74.0	54.0	-17.06	223.50	100	Vertical	Pass
4960.000	45.03	37.85	-6.38	74.0	54.0	-16.15	357.00	100	Vertical	Pass
7437.250	68.79	51.28	2.97	74.0	54.0	-2.72	194.80	100	Vertical	Pass
10685.000	63.15	51.22	8.31	74.0	54.0	-2.78	291.40	100	Vertical	Pass
14898.000	63.46	51.35	9.88	74.0	54.0	-2.65	40.80	100	Vertical	Pass



500K
Low
Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

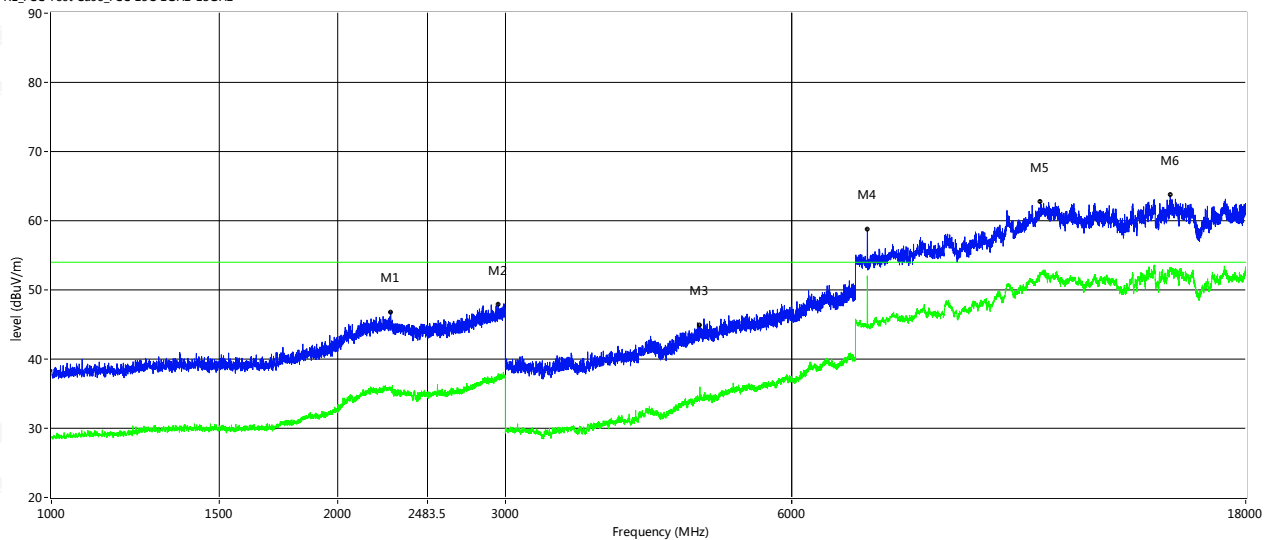


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2273.000	46.76	35.74	4.61	74.0	54.0	-18.26	234.20	100	Horizontal	Pass
2948.000	47.88	37.90	5.88	74.0	54.0	-16.10	204.90	100	Horizontal	Pass
4807.000	44.85	34.10	-6.94	74.0	54.0	-19.90	218.00	100	Horizontal	Pass
7203.500	70.67	51.03	2.69	74.0	54.0	--2.97	216.10	100	Horizontal	Pass
10954.500	62.69	51.05	9.87	74.0	54.0	-2.95	299.40	100	Horizontal	Pass
14994.250	63.68	51.81	10.37	74.0	54.0	-2.19	339.20	100	Horizontal	Pass



Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

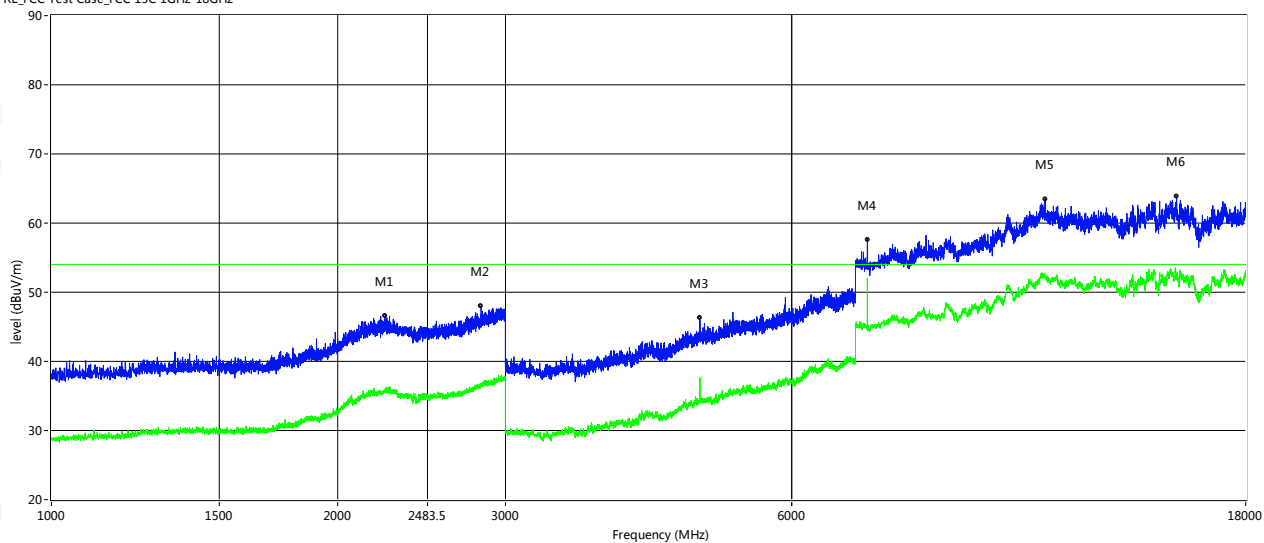


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2241.500	46.58	35.69	4.55	74.0	54.0	-18.31	245.40	100	Vertical	Pass
2829.000	48.01	36.72	5.47	74.0	54.0	-17.28	58.40	100	Vertical	Pass
4804.000	46.24	37.65	-6.96	74.0	54.0	-16.35	77.30	100	Vertical	Pass
7206.250	69.64	51.12	2.71	74.0	54.0	-2.88	211.00	100	Vertical	Pass
11075.500	63.42	51.27	9.81	74.0	54.0	-2.73	324.30	100	Vertical	Pass
15228.000	63.79	51.20	10.74	74.0	54.0	-2.80	13.30	100	Vertical	Pass



Middle

Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

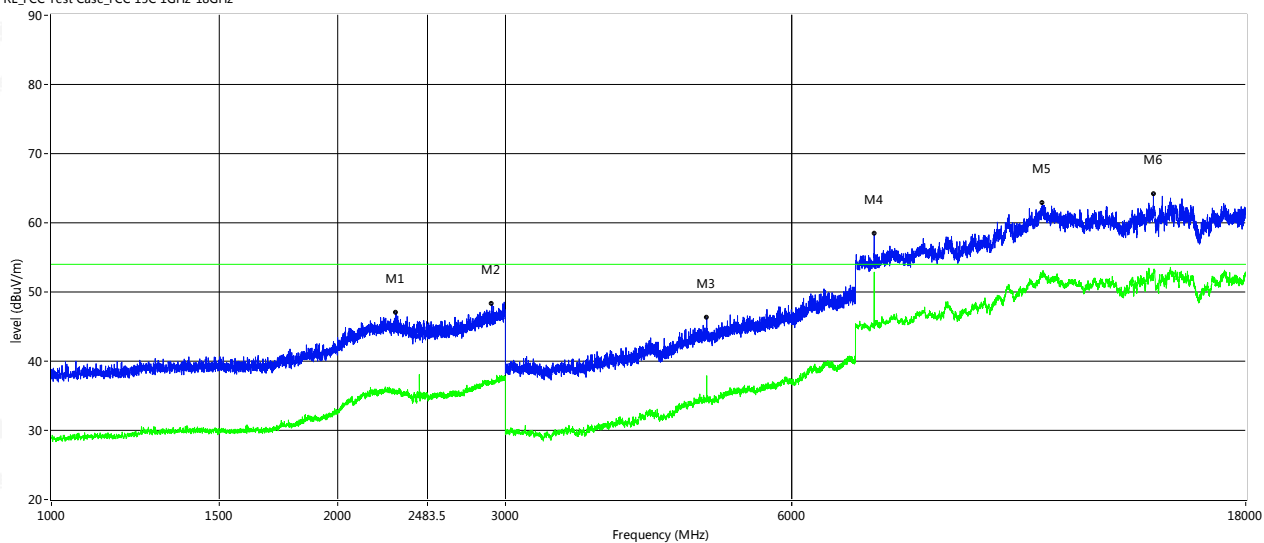


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2302.500	47.05	35.82	4.57	74.0	54.0	-18.18	166.30	100	Horizontal	Pass
2904.000	48.27	36.81	5.63	74.0	54.0	-17.19	223.40	100	Horizontal	Pass
4884.000	46.28	37.90	-6.48	74.0	54.0	-16.10	3.10	100	Horizontal	Pass
7324.500	70.40	51.87	3.30	74.0	54.0	-2.13	232.40	100	Horizontal	Pass
11004.000	62.86	51.68	10.20	74.0	54.0	-2.32	104.80	100	Horizontal	Pass
14397.500	64.18	51.77	11.41	74.0	54.0	-2.23	0.50	100	Horizontal	Pass



Vertical

RE_FCC Test Case_FCC 15C 1GHz-18GHz

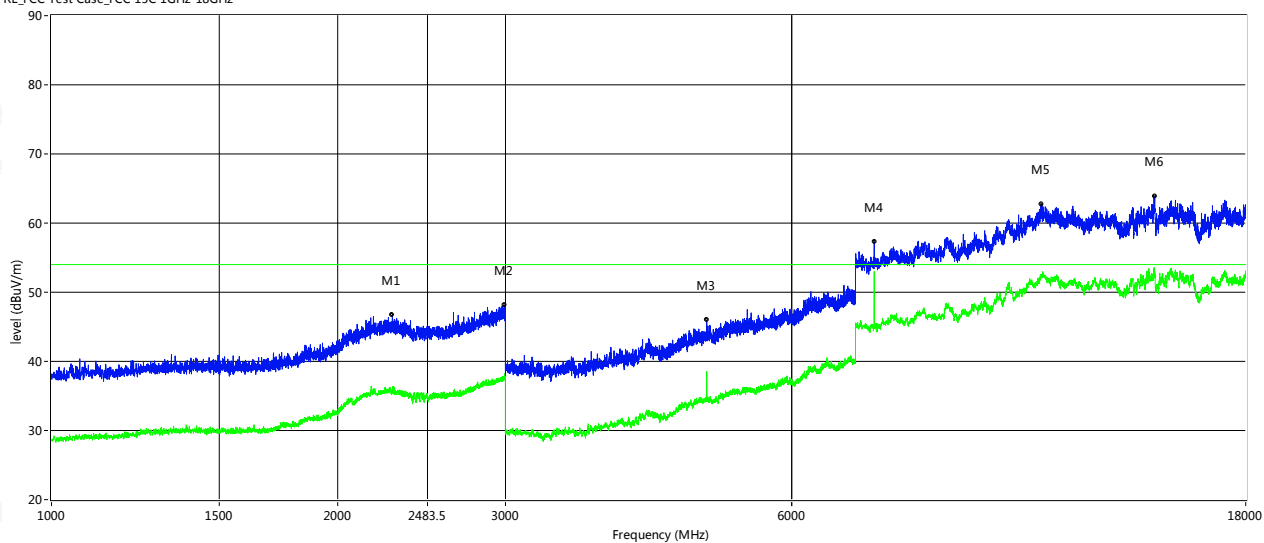


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2282.000	46.76	35.71	4.60	74.0	54.0	-18.29	0.00	100	Vertical	Pass
2996.500	48.09	37.42	6.09	74.0	54.0	-16.58	134.60	100	Vertical	Pass
4884.000	45.94	38.53	-6.48	74.0	54.0	-15.47	72.10	100	Vertical	Pass
7324.500	69.29	52.00	3.30	74.0	54.0	-2.00	177.80	100	Vertical	Pass
10990.250	62.73	51.45	10.14	74.0	54.0	-2.55	232.70	100	Vertical	Pass
14441.500	63.82	51.97	10.93	74.0	54.0	-2.03	304.00	100	Vertical	Pass



High Horizontal

RE_FCC Test Case_FCC 15C 1GHz-18GHz

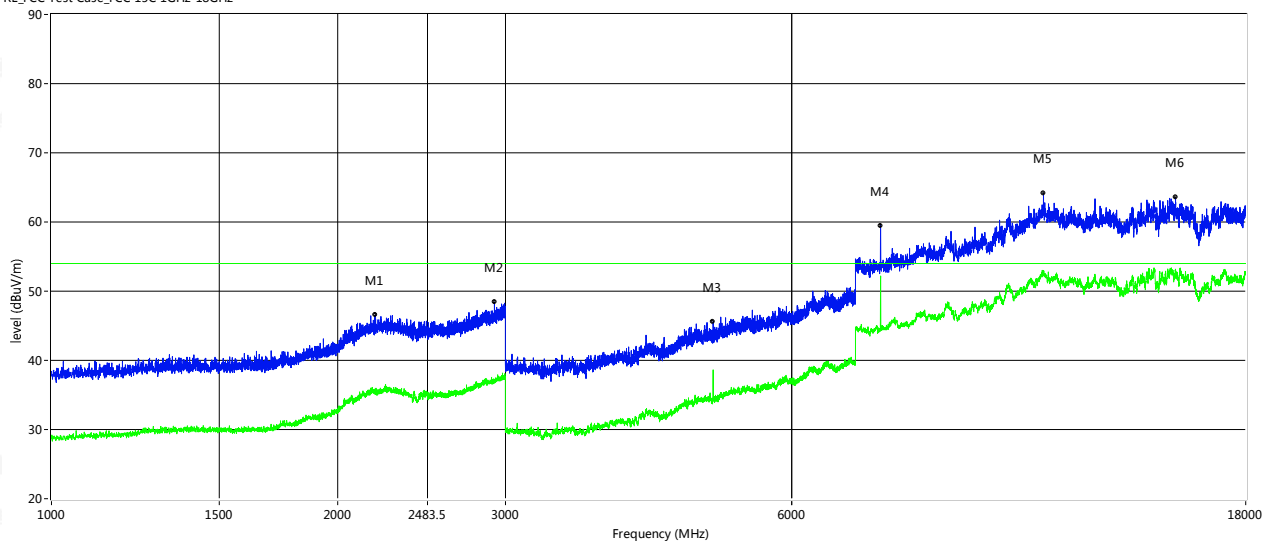


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2189.000	46.55	35.54	4.22	74.0	54.0	-18.46	93.10	100	Horizontal	Pass
2921.500	48.45	37.17	5.73	74.0	54.0	-16.83	7.20	100	Horizontal	Pass
4961.000	45.62	36.07	-6.38	74.0	54.0	-17.93	3.90	100	Horizontal	Pass
7437.250	69.48	51.68	2.97	74.0	54.0	-2.32	218.40	100	Horizontal	Pass
11034.250	64.18	51.98	10.04	74.0	54.0	-2.02	65.60	100	Horizontal	Pass
15186.750	63.58	51.92	10.94	74.0	54.0	-2.08	168.10	100	Horizontal	Pass



Vertical


RE_FCC Test Case_FCC 15C 1GHz-18GHz

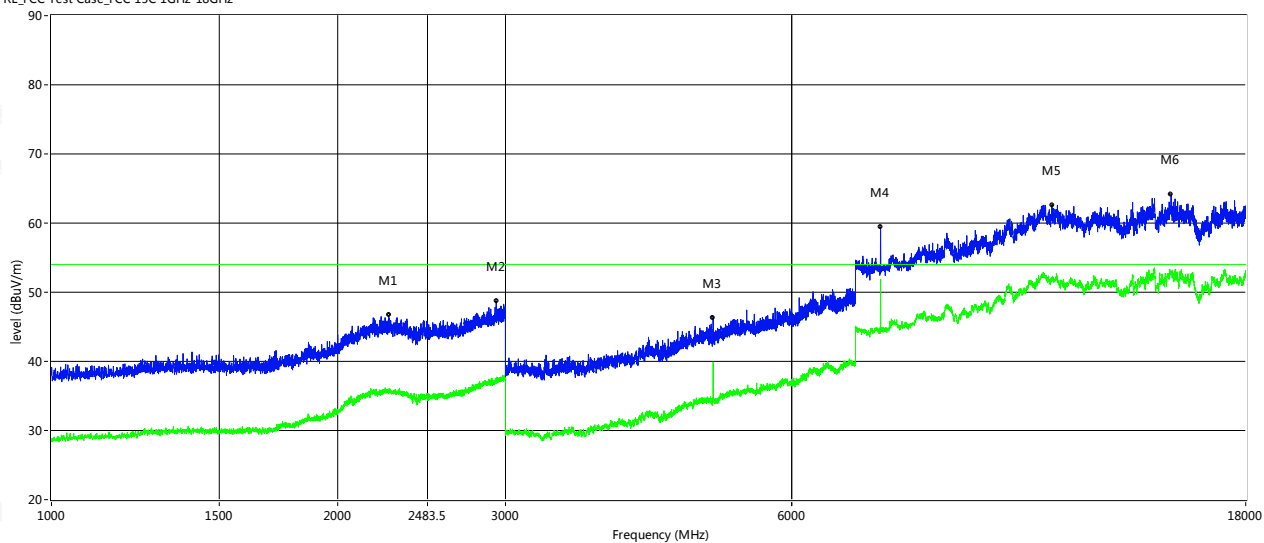

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	ANT	Verdict
2262.000	46.69	35.79	4.63	74.0	54.0	-18.21	289.20	100	Vertical	Pass
2934.000	48.72	37.04	5.80	74.0	54.0	-16.96	360.00	100	Vertical	Pass
4959.000	46.36	36.90	-6.38	74.0	54.0	-17.10	31.70	100	Vertical	Pass
7437.250	67.42	51.22	2.97	74.0	54.0	-2.78	180.20	100	Vertical	Pass
11257.000	62.62	51.16	9.56	74.0	54.0	-2.84	13.00	100	Vertical	Pass
15024.500	64.13	51.91	10.38	74.0	54.0	-2.09	320.20	100	Vertical	Pass


4.6 TEST RESULTS (Restricted Bands Requirements)

125K GFSK-Low Horizontal

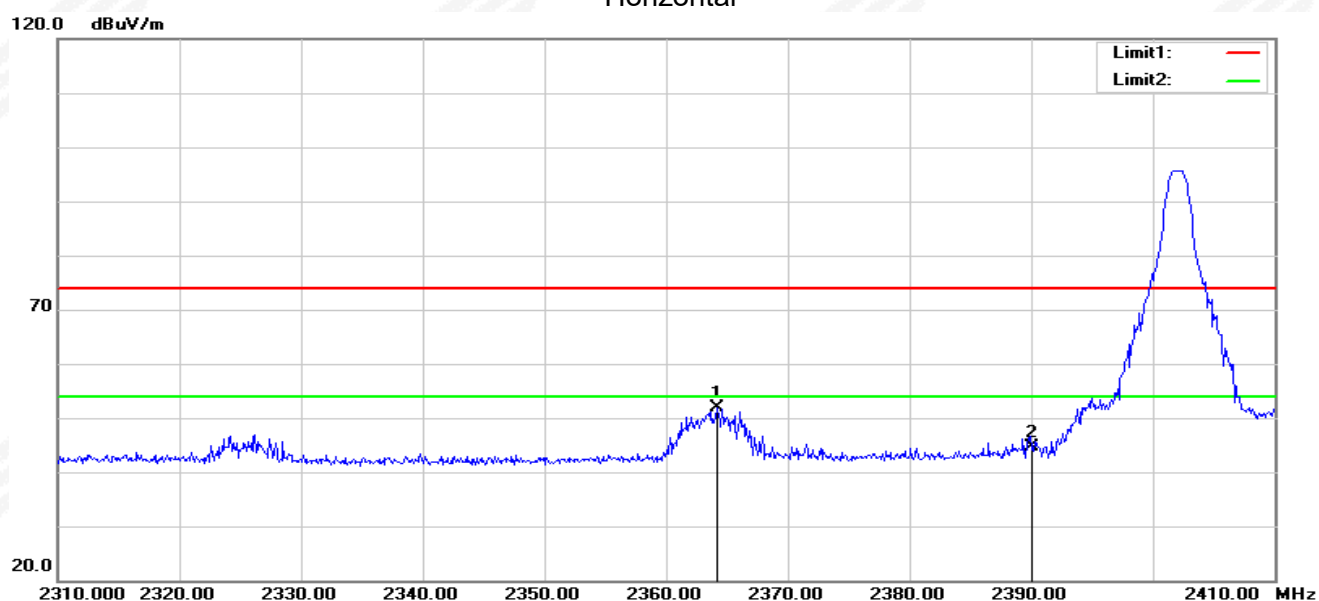


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.200	47.98	3.95	51.93	74.00	-22.07	peak
2	2390.000	40.36	4.34	44.70	74.00	-29.30	peak

Vertical

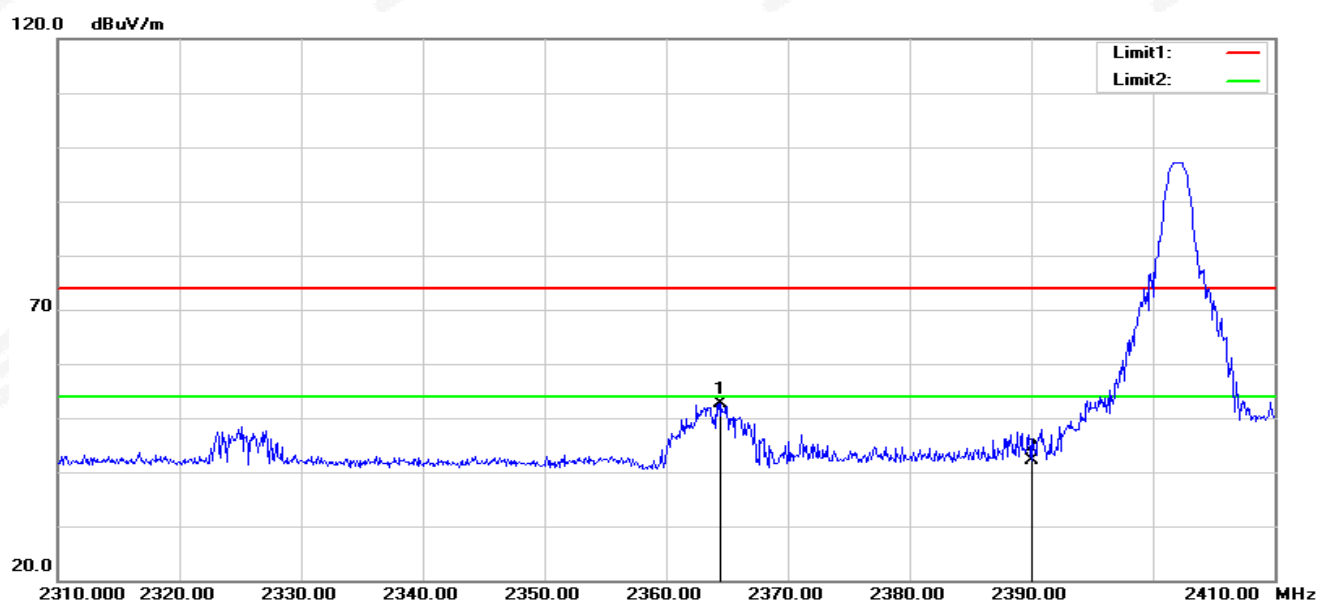


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.500	48.57	3.96	52.53	74.00	-21.47	peak
2	2390.000	37.76	4.34	42.10	74.00	-31.90	peak

GFSK-High Horizontal

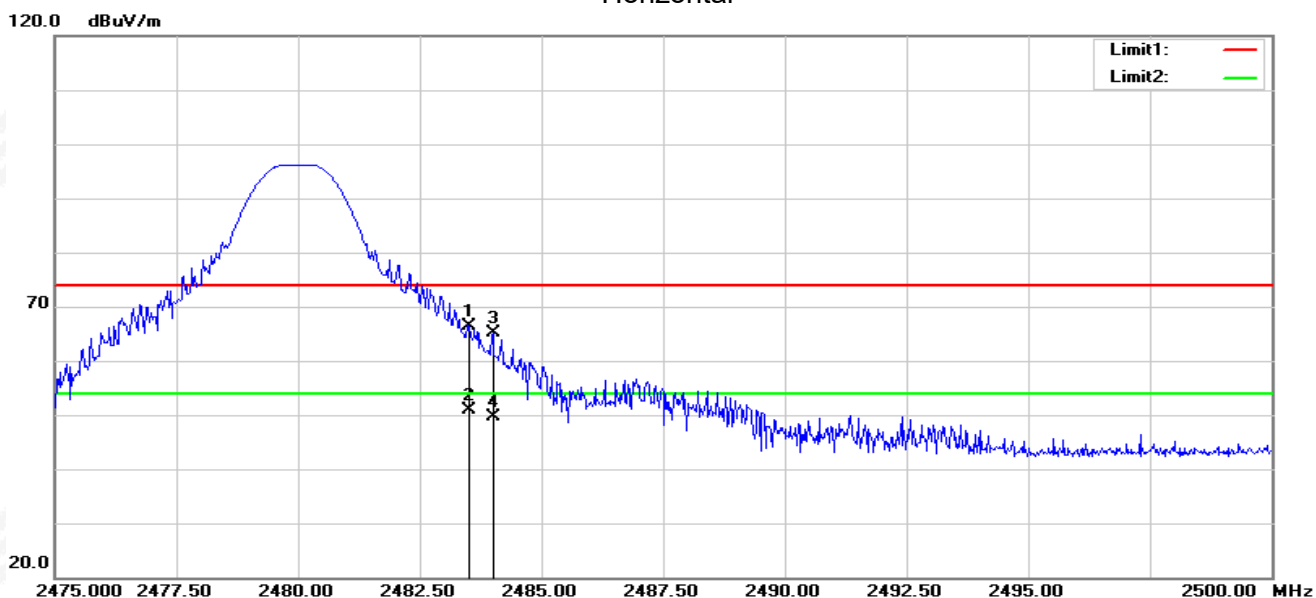

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.84	4.60	66.44	74.00	-7.56	peak
2	2483.500	46.25	4.60	50.85	54.00	-3.15	AVG
3	2484.000	60.56	4.61	65.17	74.00	-8.83	peak
4	2484.000	45.02	4.61	49.63	54.00	-4.37	AVG


Vertical

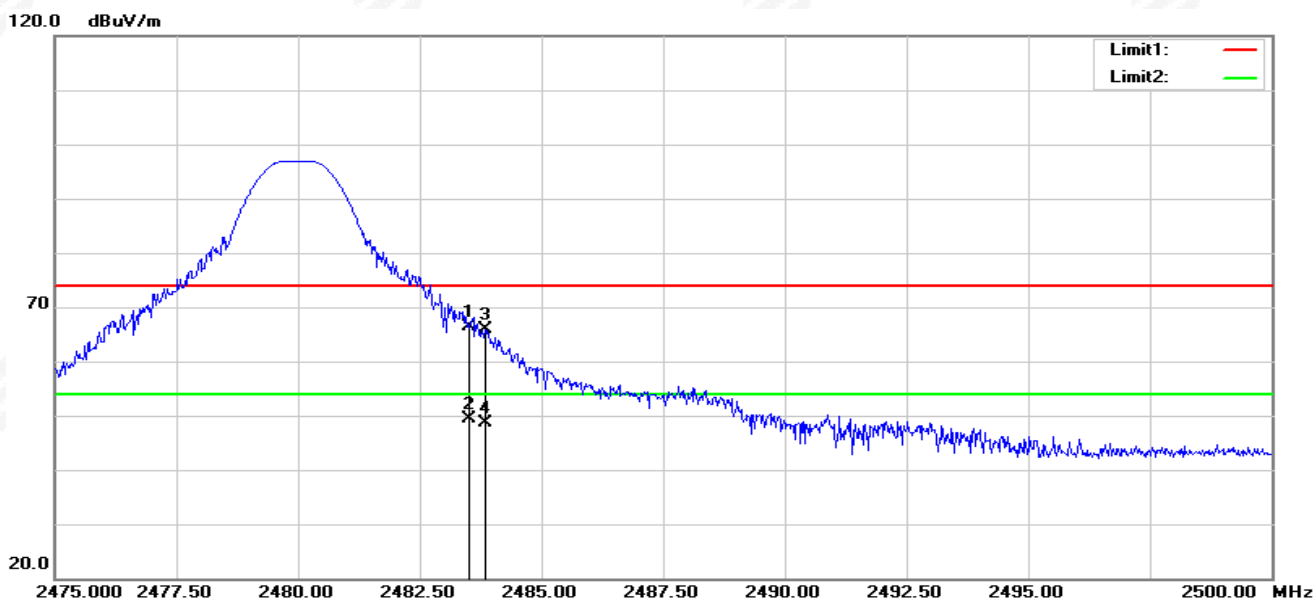

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.69	4.60	66.29	74.00	-7.71	peak
2	2483.500	44.83	4.60	49.43	54.00	-4.57	AVG
3	2483.850	61.18	4.61	65.79	74.00	-8.21	peak
4	2483.850	43.95	4.61	48.56	54.00	-5.44	AVG


Note: All modes have been measurement, only worst mode was reported.

500K
GFSK-Low
Horizontal

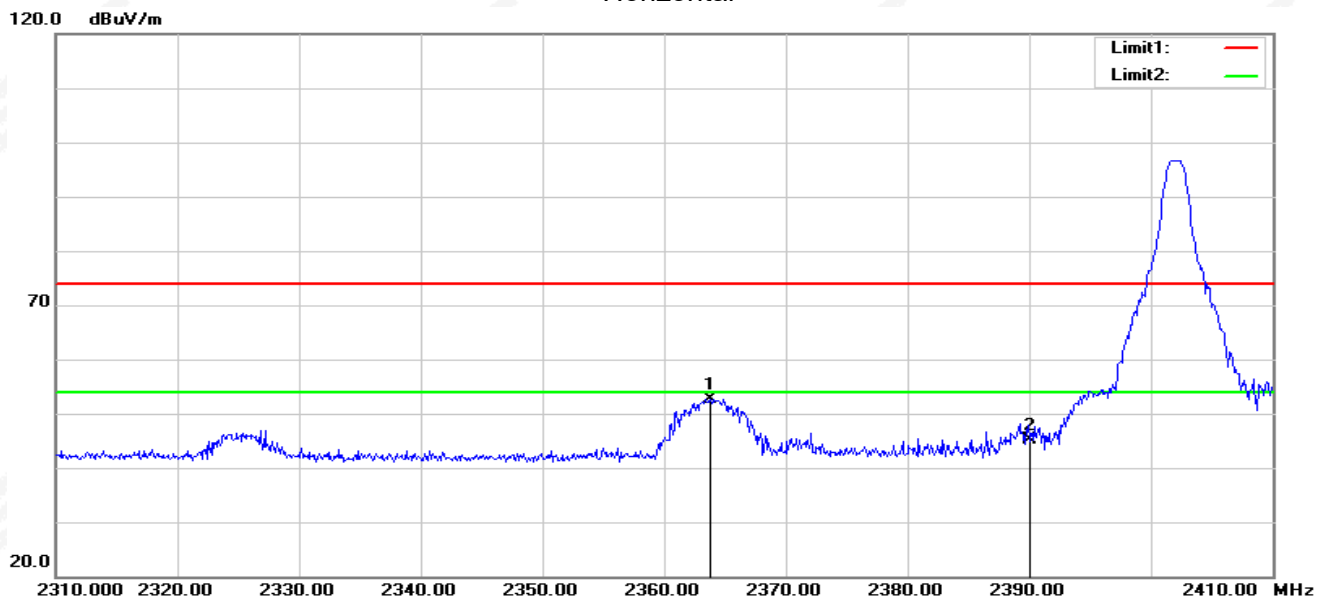


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.800	48.73	3.95	52.68	74.00	-21.32	peak
2	2390.000	40.71	4.34	45.05	74.00	-28.95	peak

Vertical

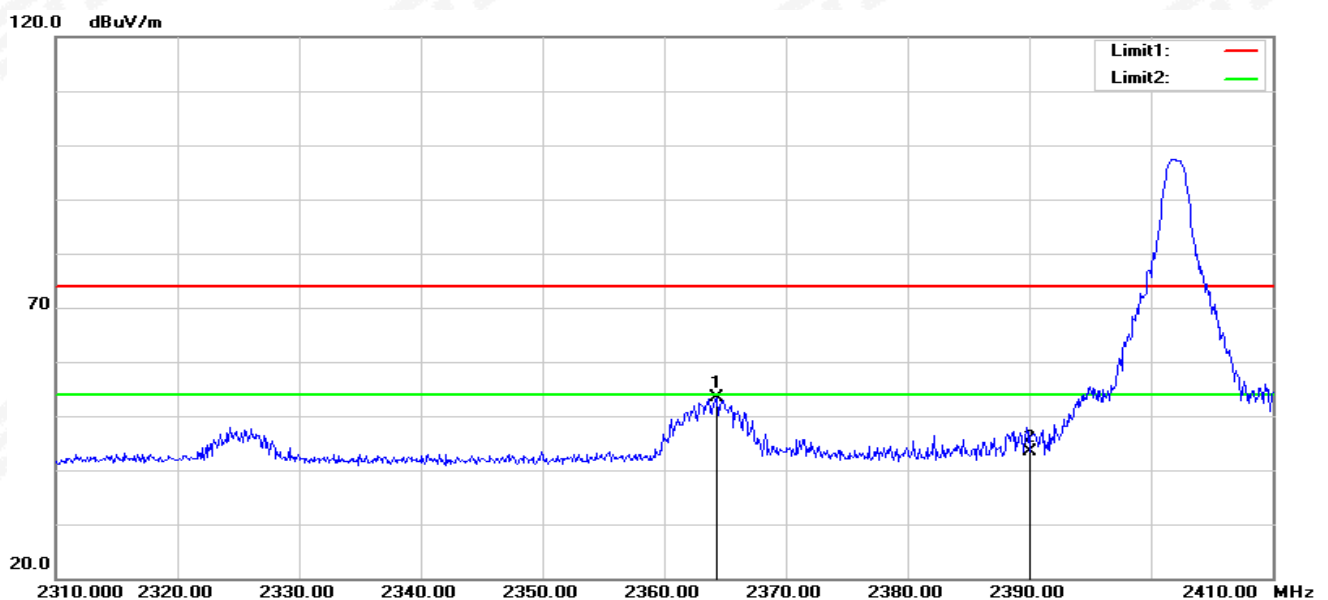


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.300	49.30	3.96	53.26	74.00	-20.74	peak
2	2390.000	38.95	4.34	43.29	74.00	-30.71	peak

GFSK-High Horizontal

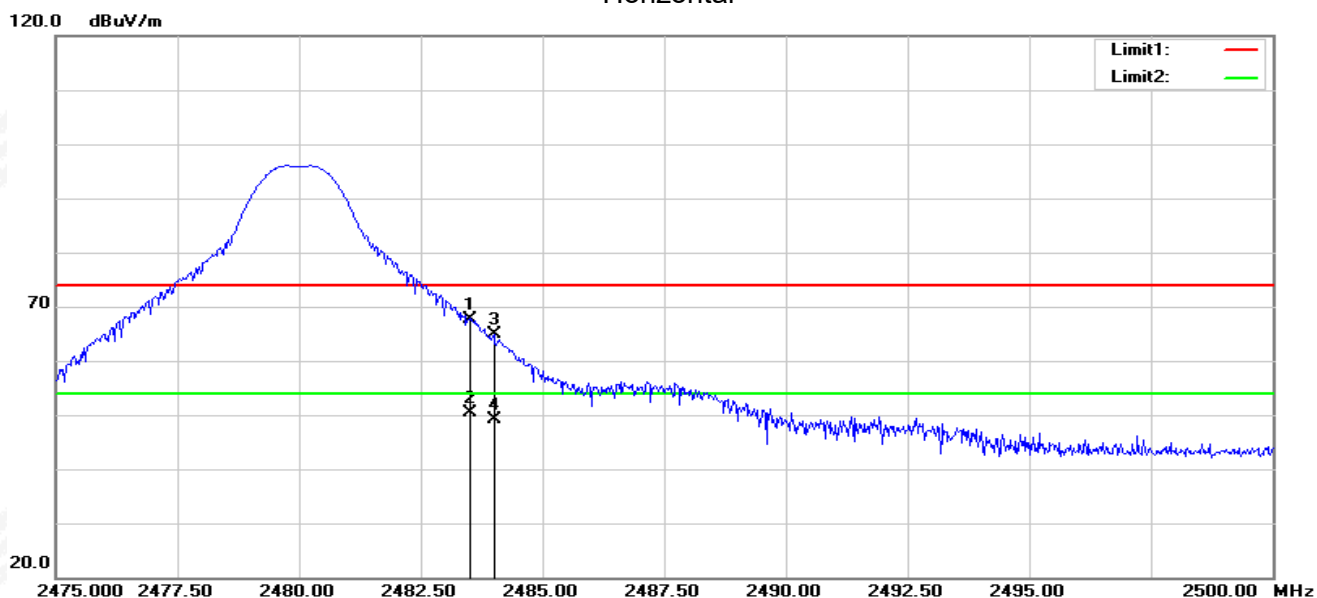

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.12	4.60	67.72	74.00	-6.28	peak
2	2483.500	45.76	4.60	50.36	54.00	-3.64	AVG
3	2484.000	60.20	4.61	64.81	74.00	-9.19	peak
4	2484.000	44.58	4.61	49.19	54.00	-4.81	AVG

Vertical

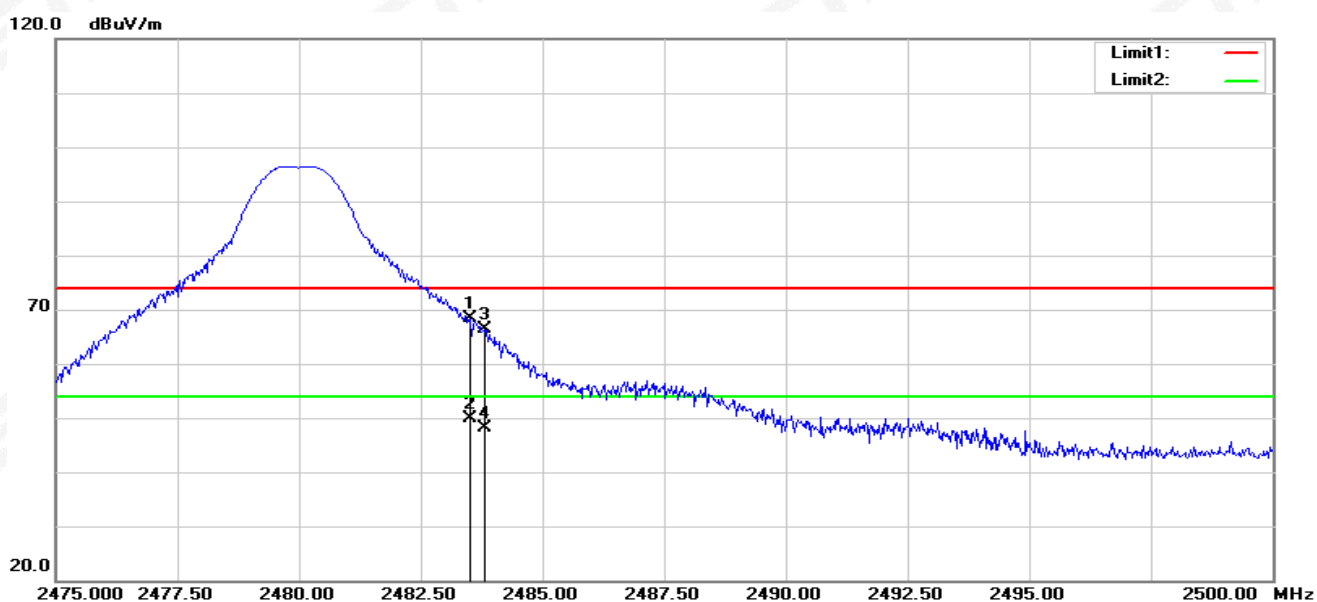

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.70	4.60	68.30	74.00	-5.70	peak
2	2483.500	45.29	4.60	49.89	54.00	-4.11	AVG
3	2483.800	61.80	4.60	66.40	74.00	-7.60	peak
4	2483.800	43.44	4.60	48.04	54.00	-5.96	AVG

Note: All modes have been measurement, only worst mode was reported.

5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminals is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

5.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

6. POWER SPECTRAL DENSITY TEST

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8 \text{ dBm}$ ($\text{RBW} \geq 3 \text{ KHz}$)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

7. BANDWIDTH TEST


7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq$ 6 dB.

7.3 TEST SETUP

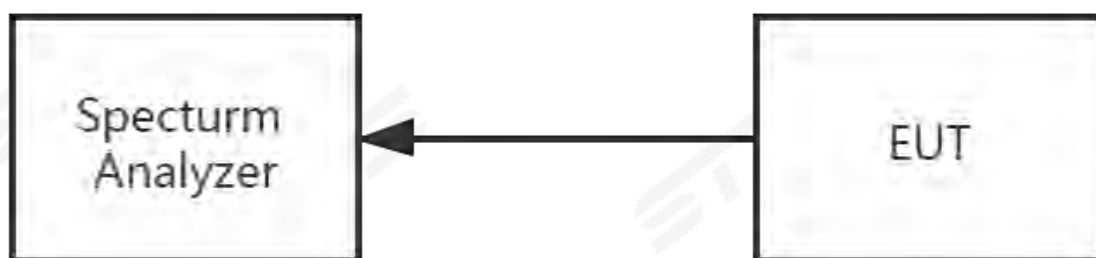

7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. PEAK OUTPUT POWER TEST

8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

One of the following procedures may be used to determine the averaging conducted output power of a DTS EUT.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Set span $\geq [3 \times \text{RBW}]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

8.3 TEST SETUP

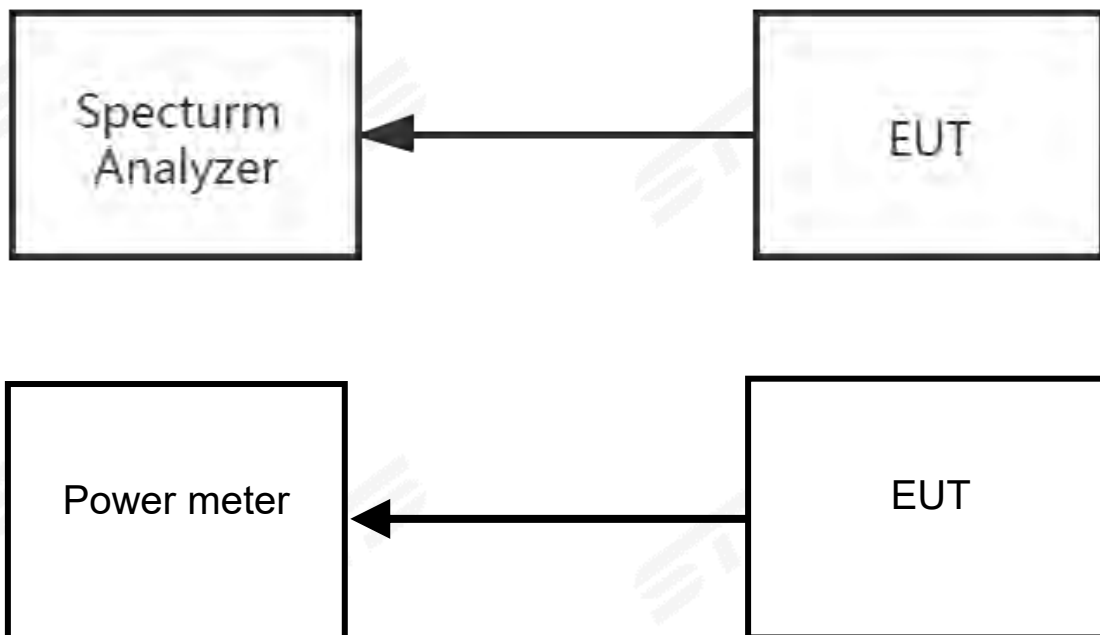

8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.




APPENDIX 1-TEST DATA


125K**1. Duty Cycle**


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 125K	2402	97.46	0.11	0.06
NVNT	BLE 125K	2440	97.49	0.11	0.06
NVNT	BLE 125K	2480	97.46	0.11	0.06

Test Graphs
Duty Cycle NVNT BLE 125K 2402MHz

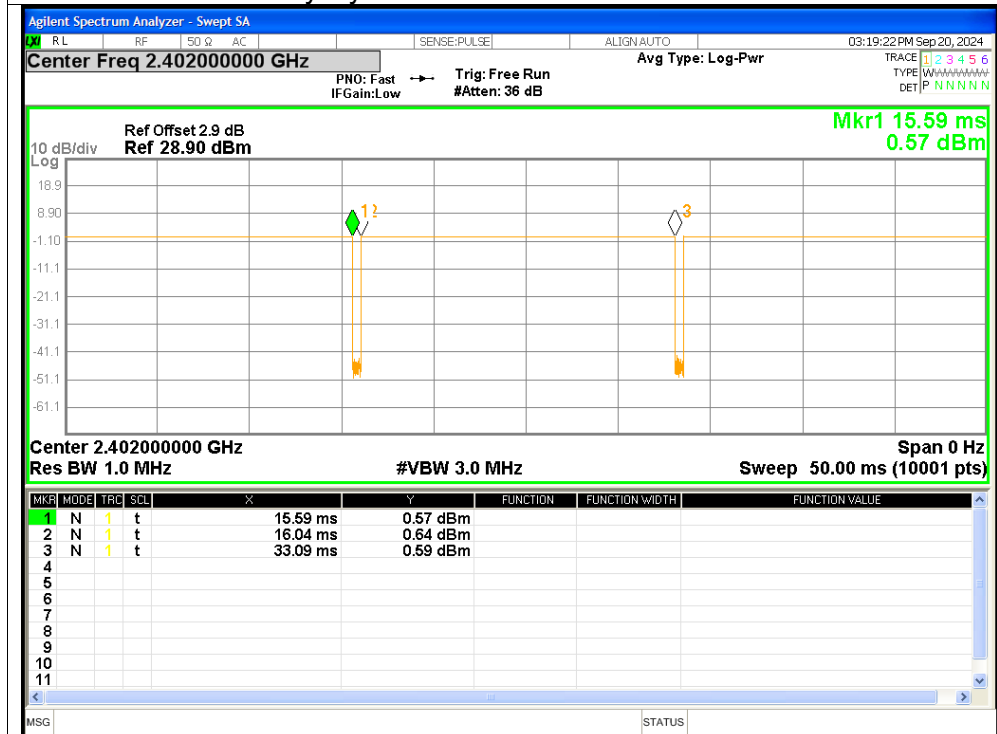


Duty Cycle NVNT BLE 125K 2440MHz

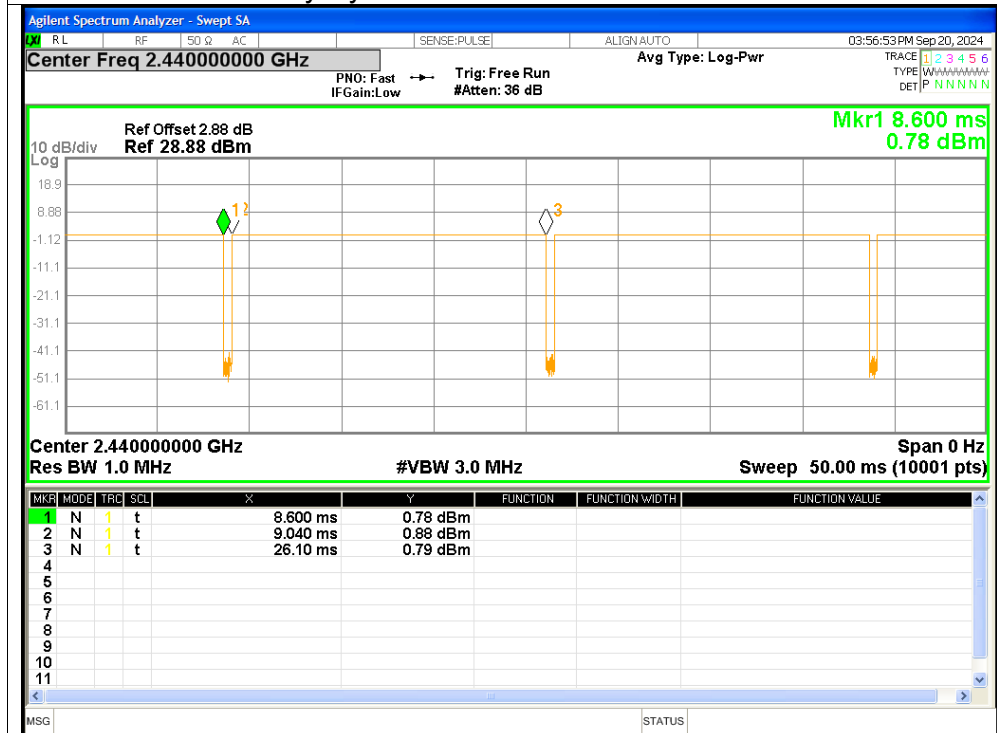


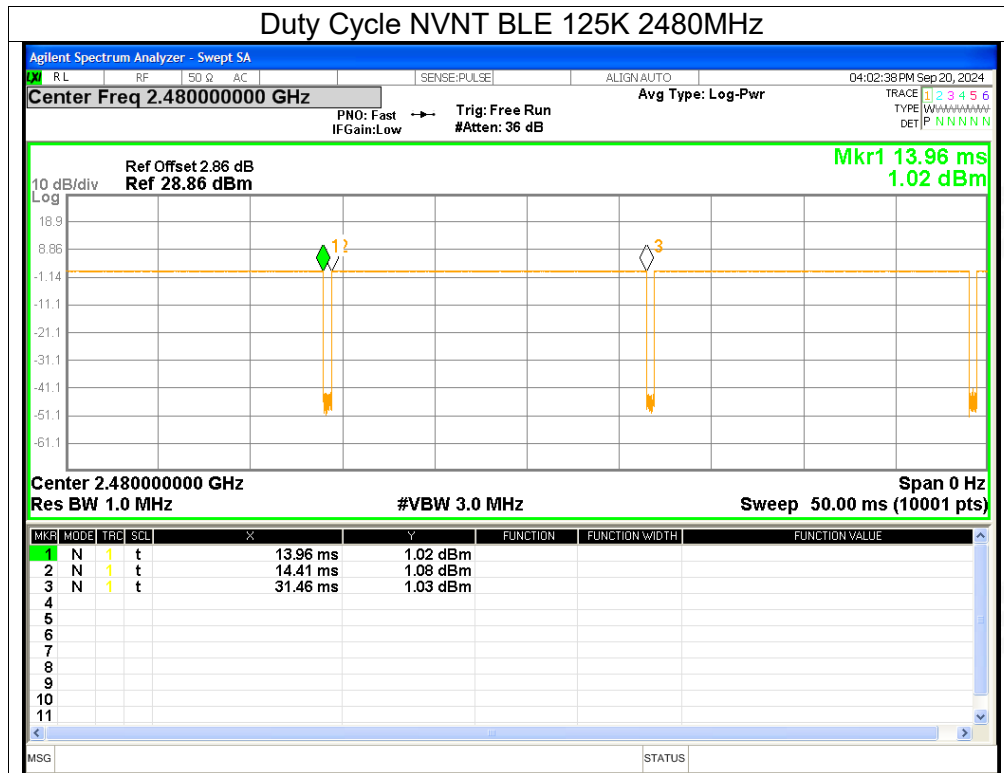

2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 125K	2402	0.52	0.11	0.63	<=30	Pass
NVNT	BLE 125K	2440	0.8	0.11	0.91	<=30	Pass
NVNT	BLE 125K	2480	0.91	0.11	1.02	<=30	Pass

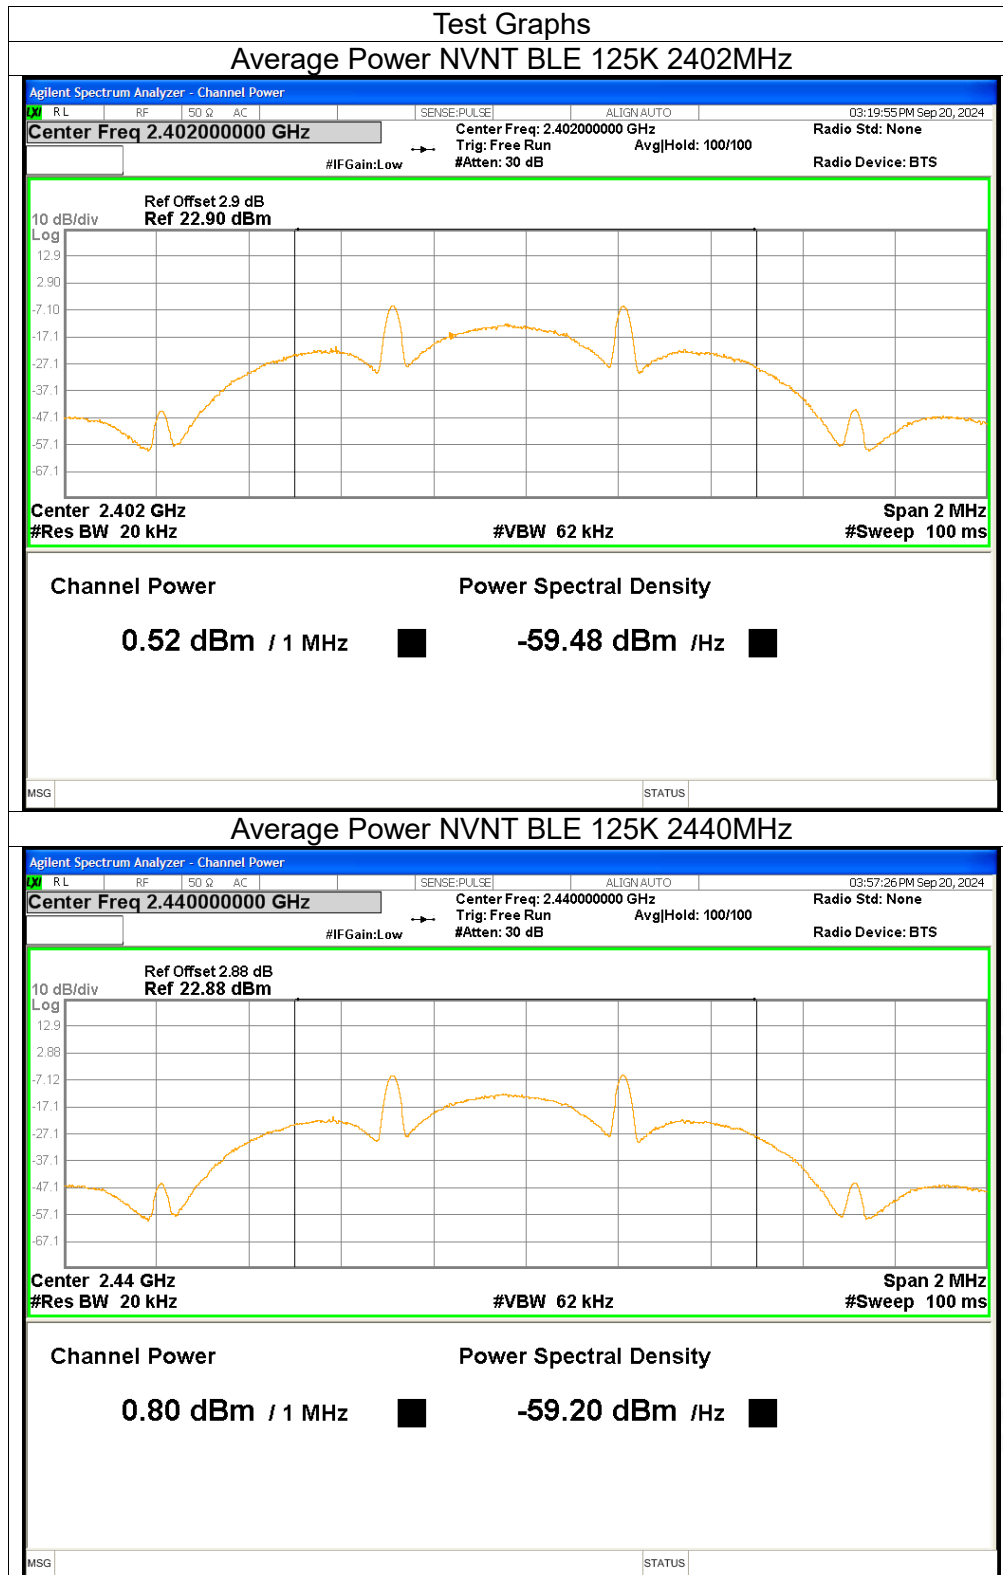

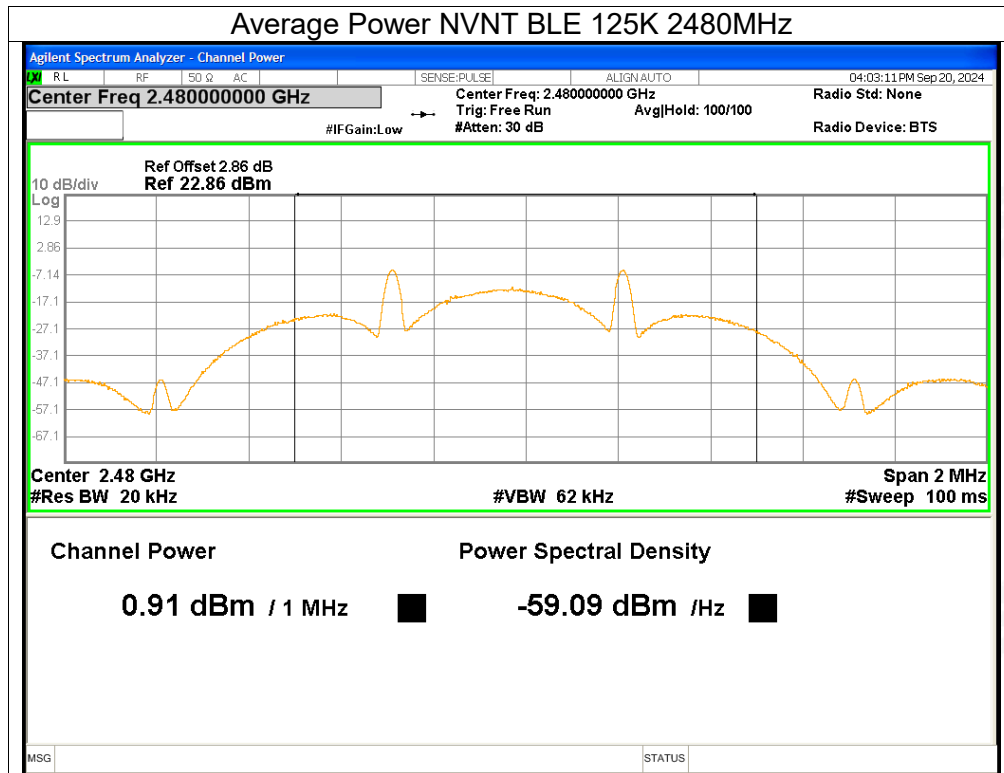


3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 125K	2402	0.76	<=30	Pass
NVNT	BLE 125K	2440	1	<=30	Pass
NVNT	BLE 125K	2480	1.18	<=30	Pass





Test Graphs

Peak Power NVNT BLE 125K 2402MHz

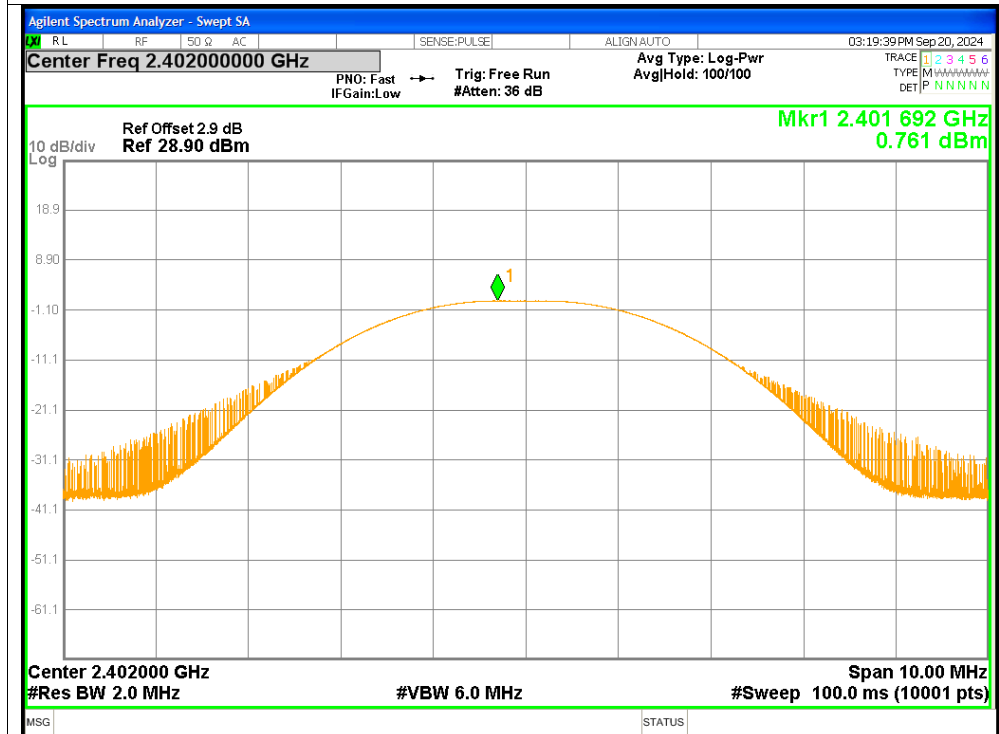

Peak Power NVNT BLE 125K 2440MHz

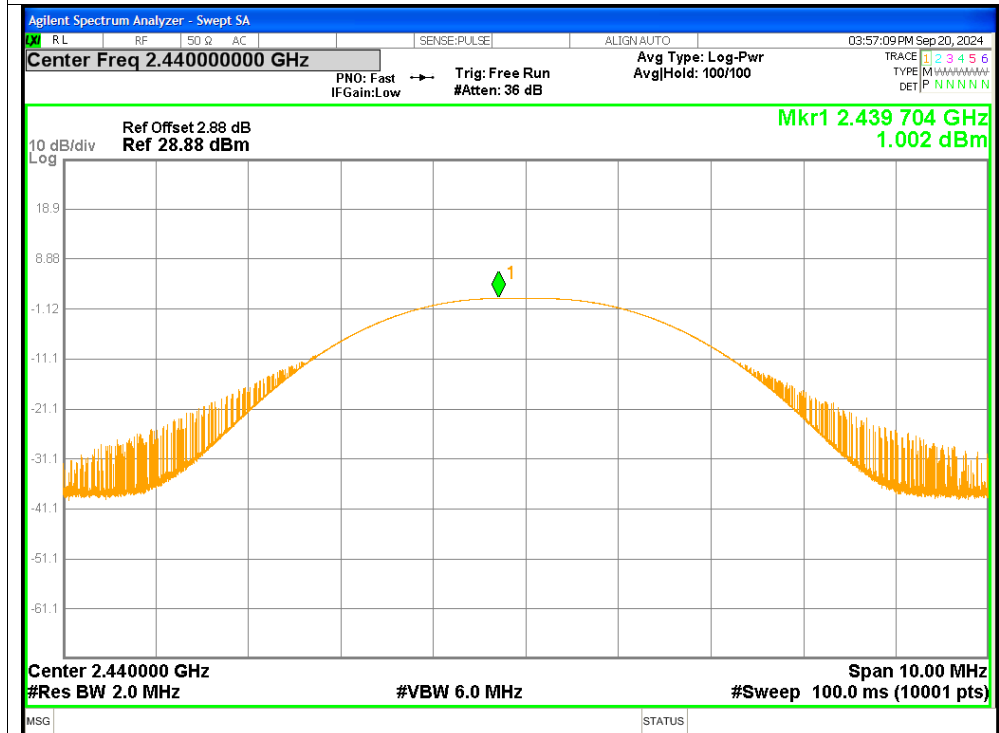

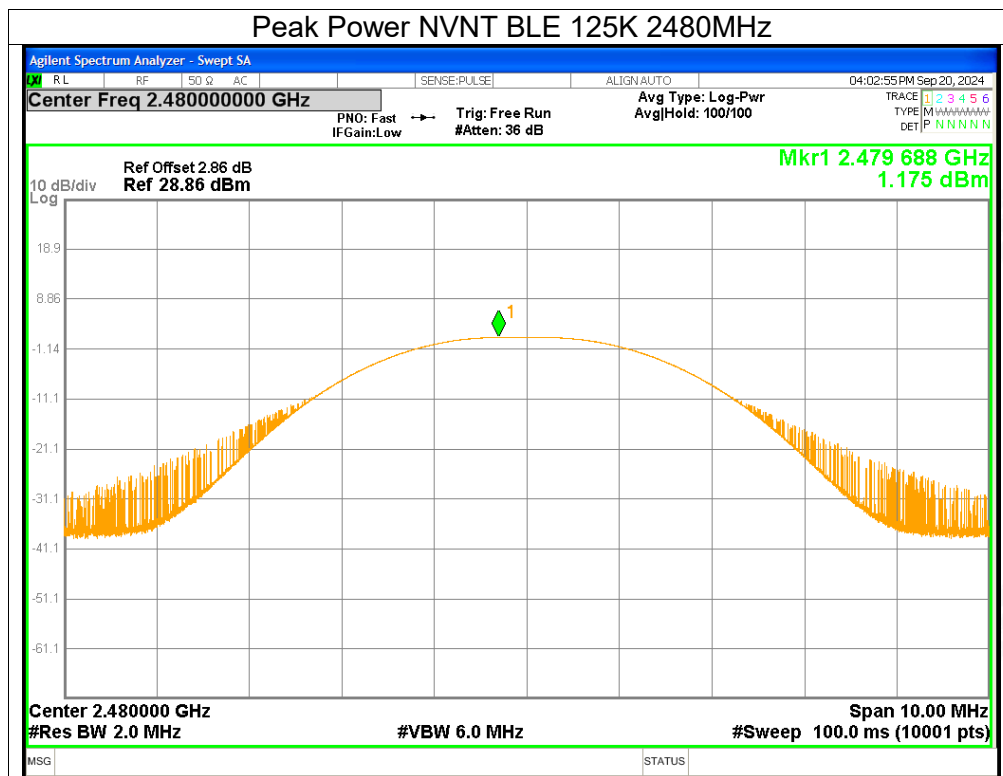


4. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 125K	2402	0.6028	≥ 0.5	Pass
NVNT	BLE 125K	2440	0.6027	≥ 0.5	Pass
NVNT	BLE 125K	2480	0.6023	≥ 0.5	Pass





Test Graphs

-6dB Bandwidth NVNT BLE 125K 2402MHz

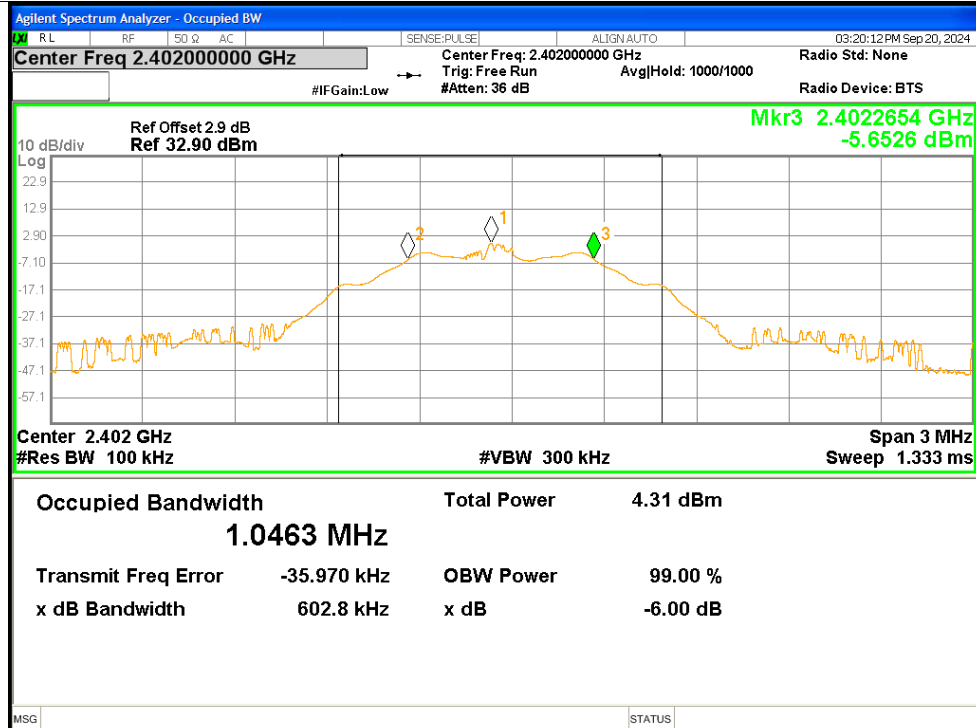

-6dB Bandwidth NVNT BLE 125K 2440MHz

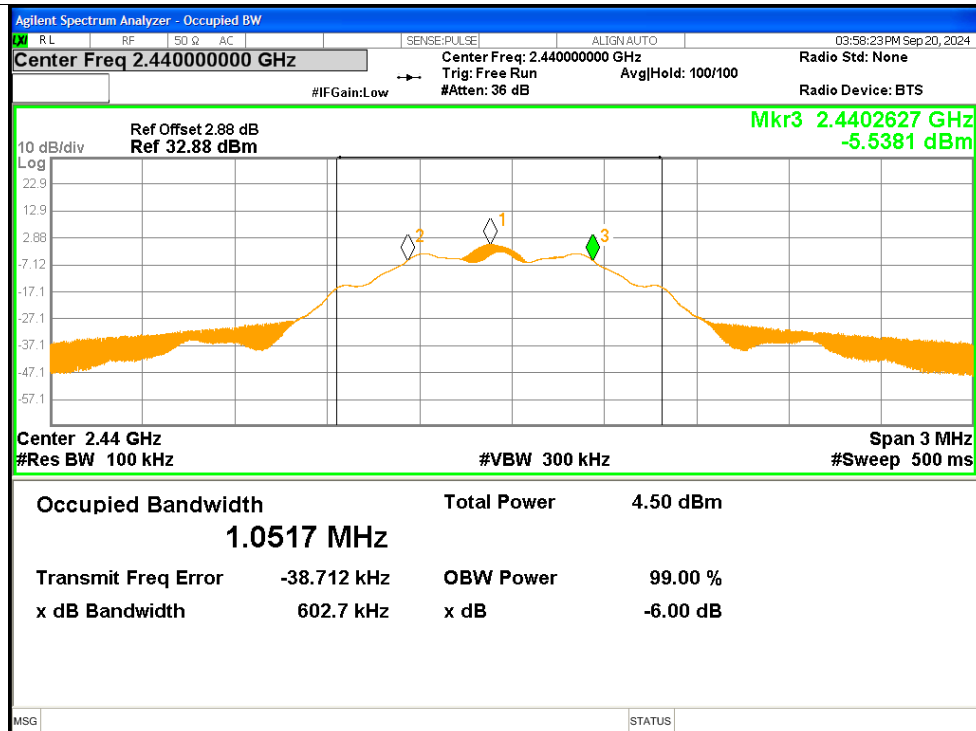

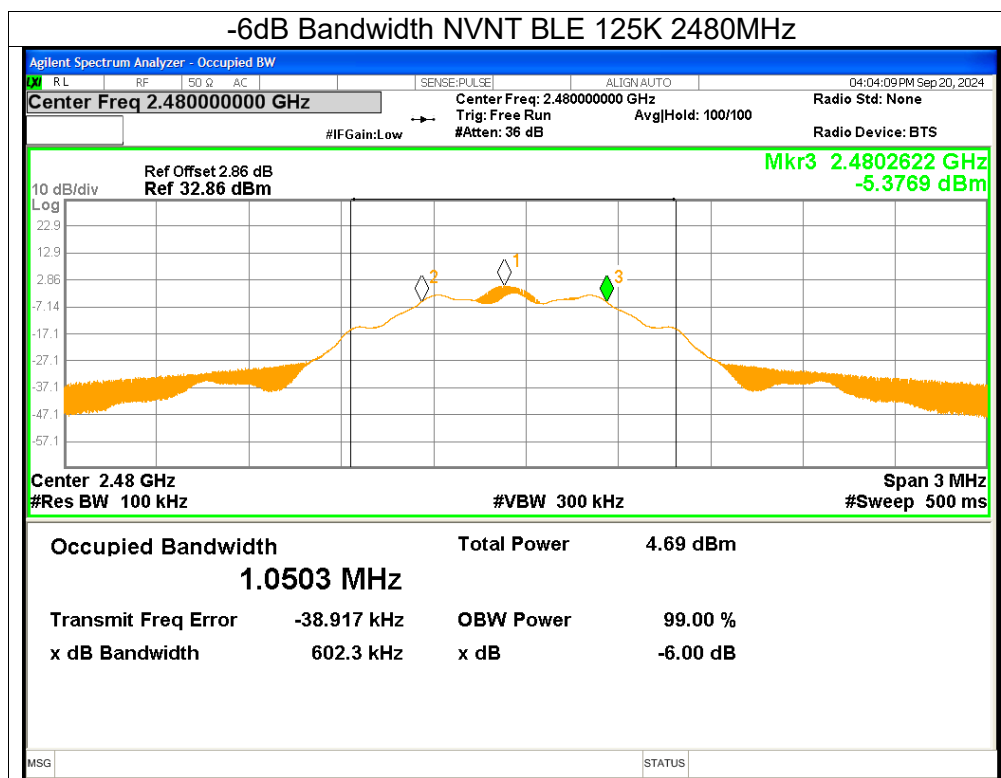


5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 125K	2402	-5.6	≤ 8	Pass
NVNT	BLE 125K	2440	-5.34	≤ 8	Pass
NVNT	BLE 125K	2480	-5.22	≤ 8	Pass





Test Graphs

PSD NVNT BLE 125K 2402MHz

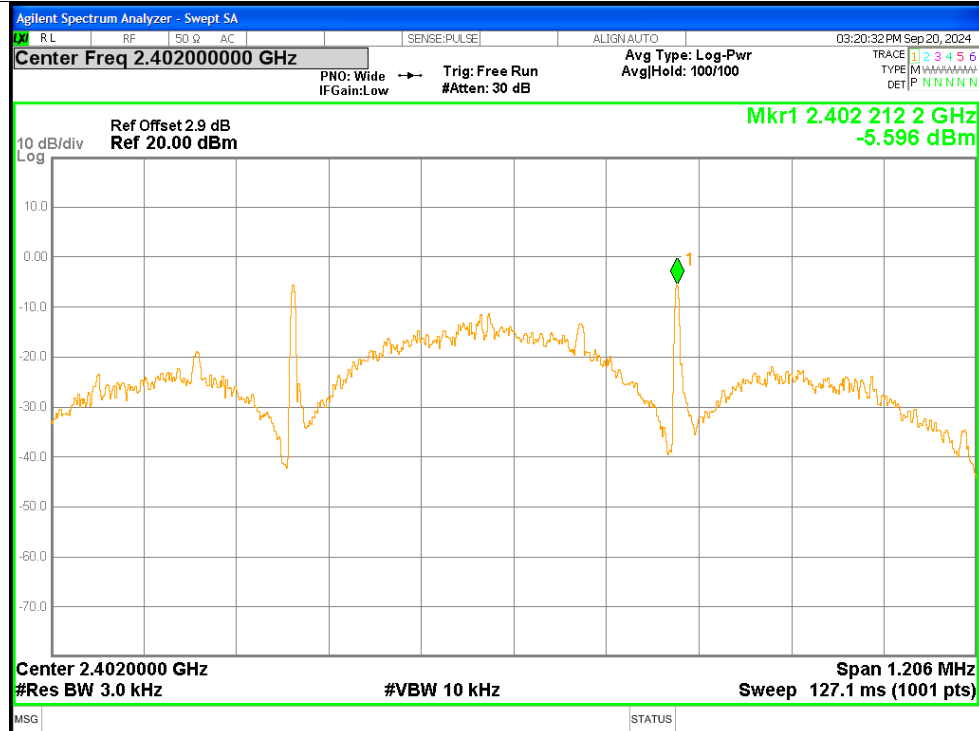

PSD NVNT BLE 125K 2440MHz

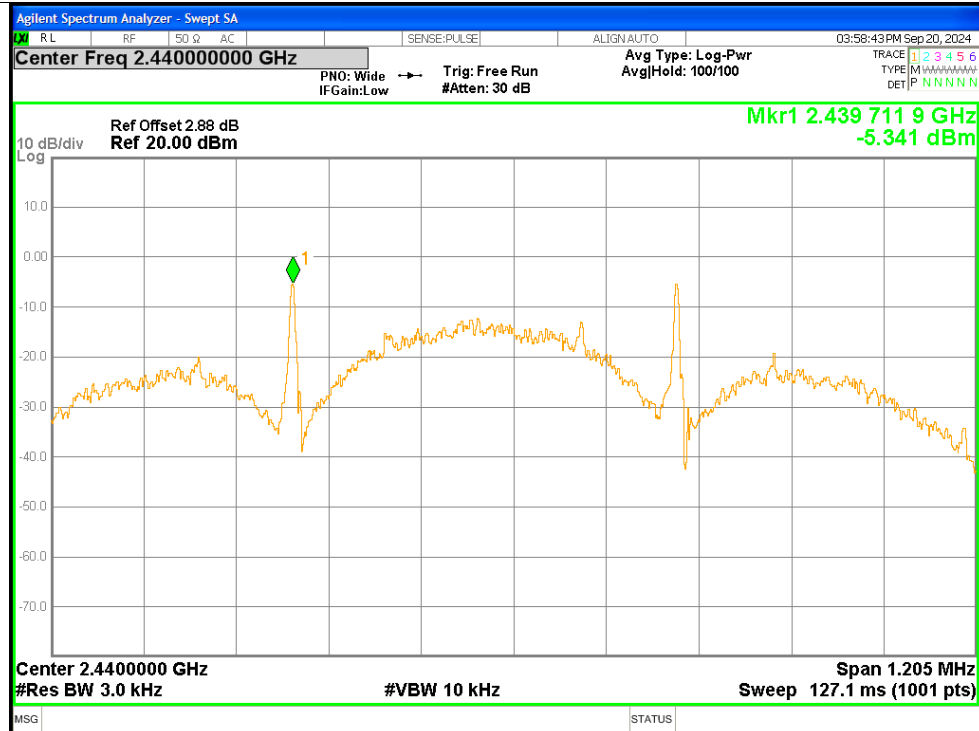


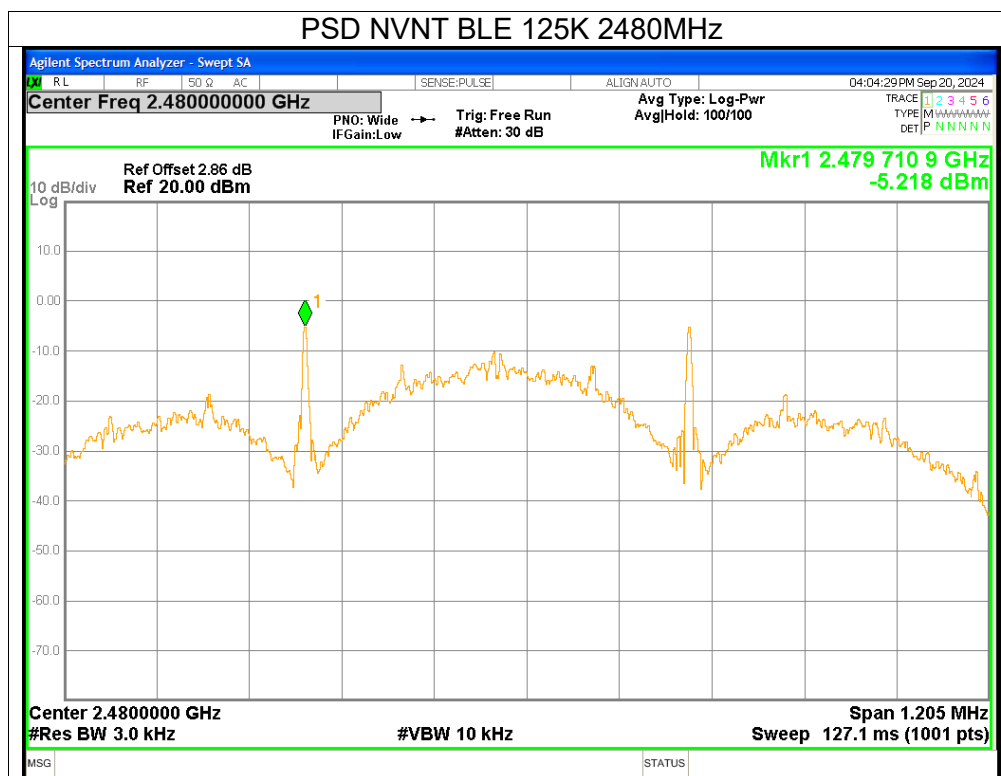





6. Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 125K	2402	-40.07	≤ -20	Pass
NVNT	BLE 125K	2480	-49.96	≤ -20	Pass

Band Edge NVNT BLE 125K 2402MHz Ref
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

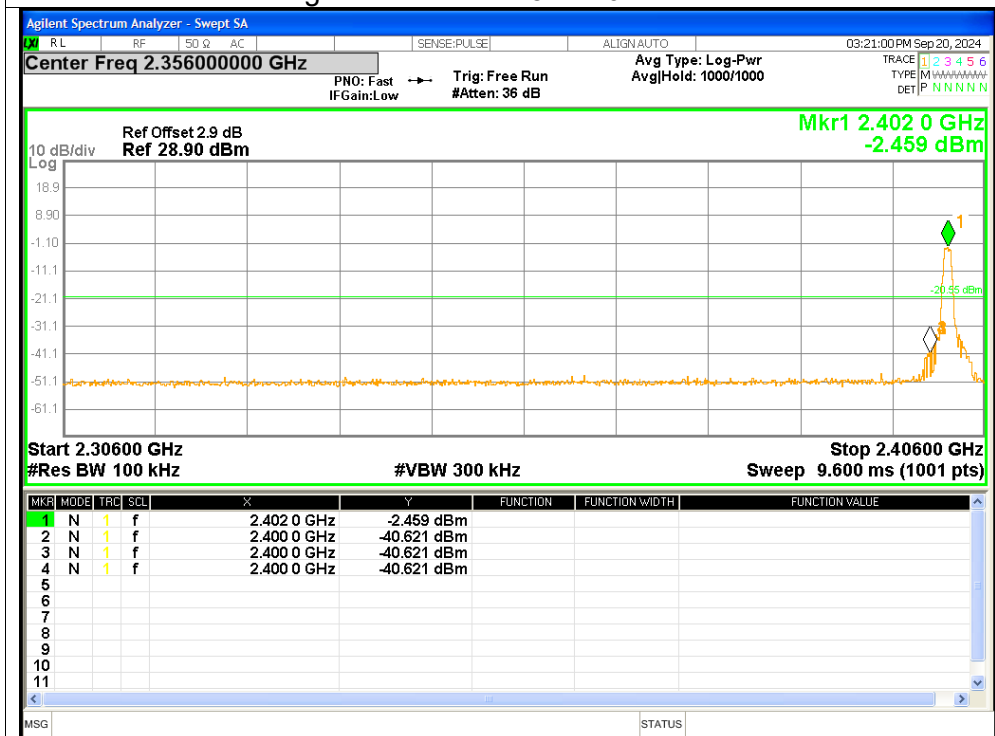



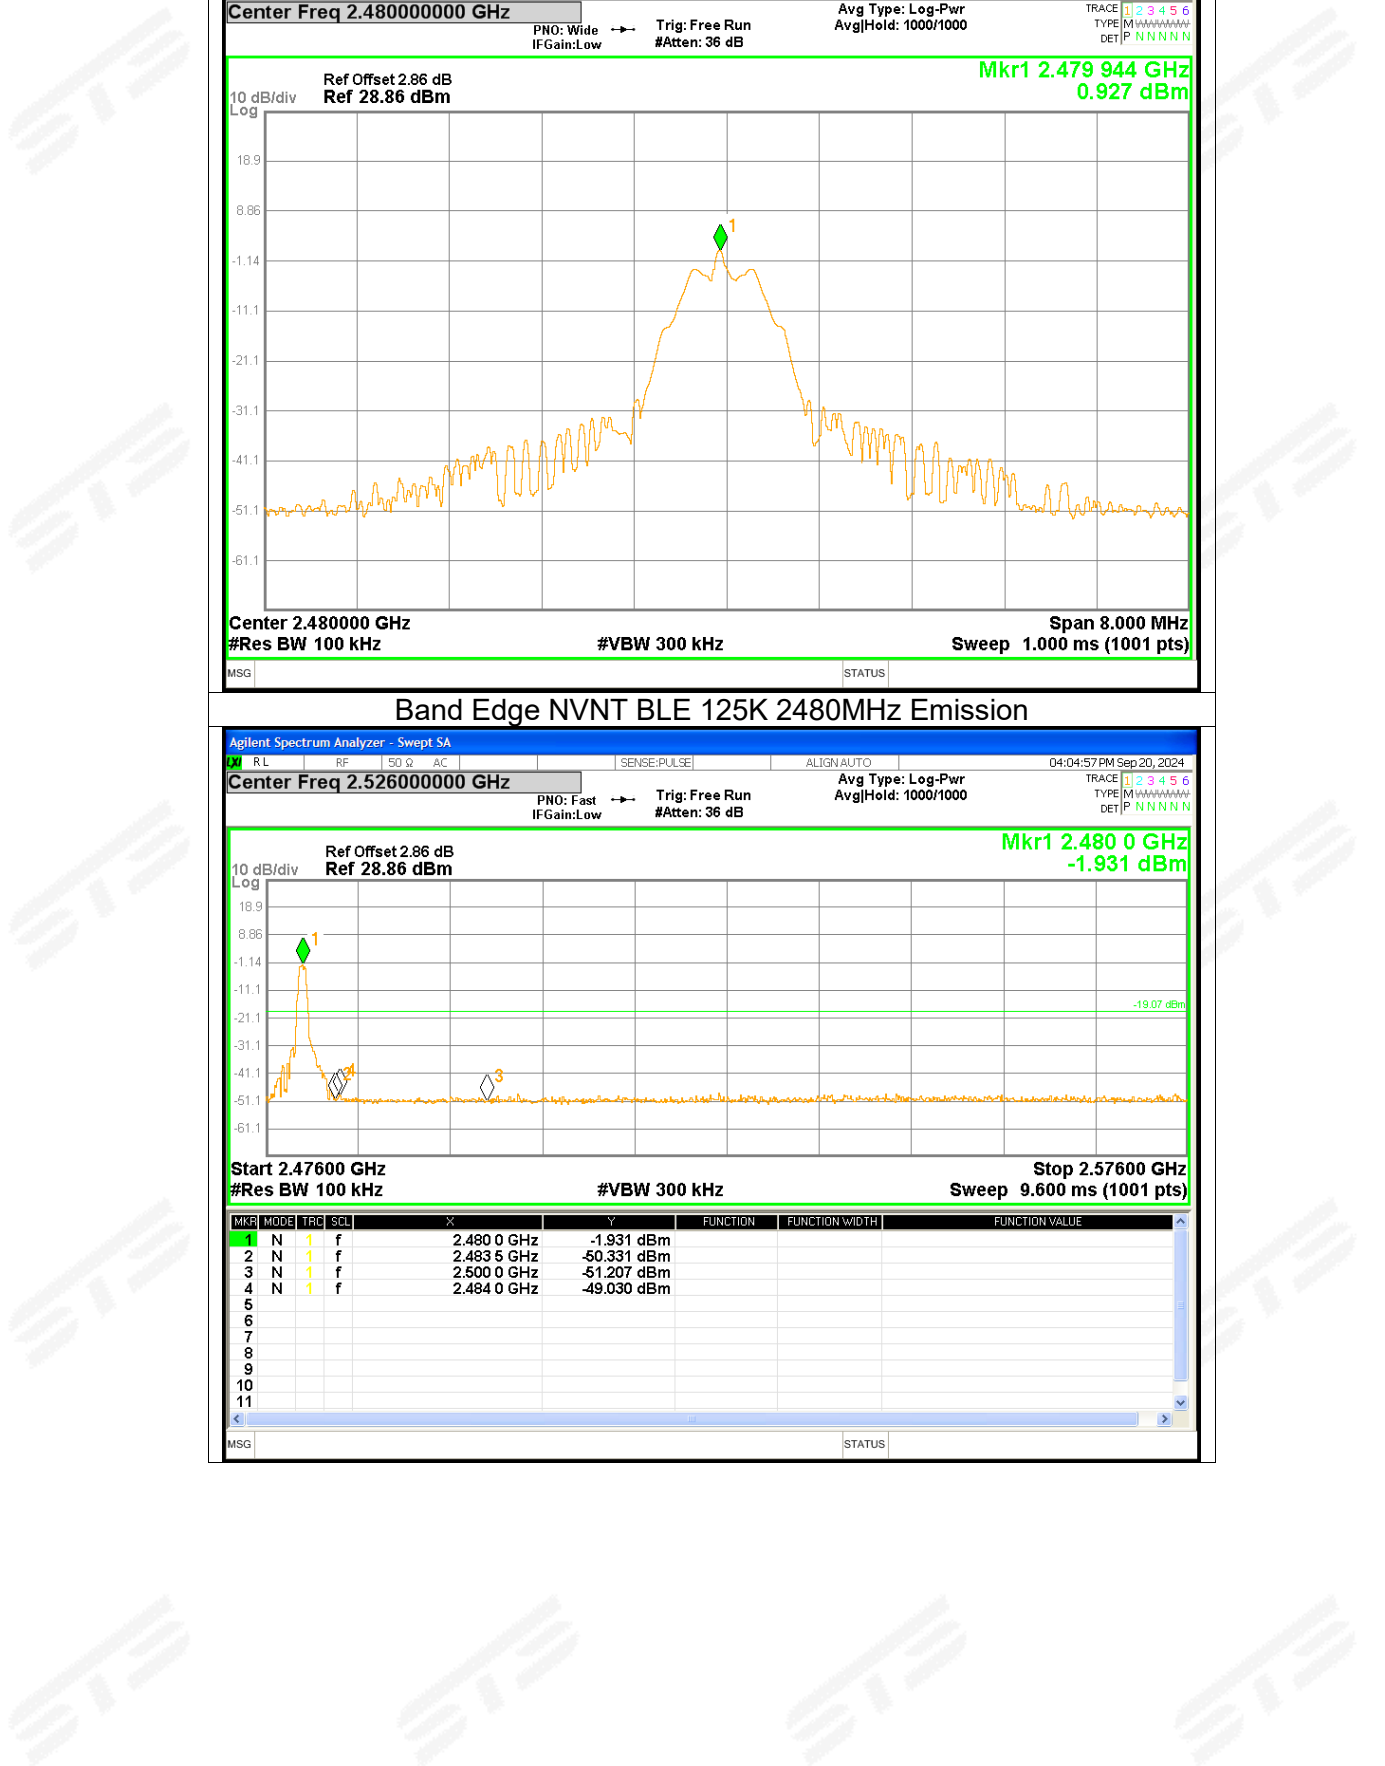

7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 125K	2402	-31.66	<=-20	Pass
NVNT	BLE 125K	2440	-30.55	<=-20	Pass
NVNT	BLE 125K	2480	-30.61	<=-20	Pass

Tx. Spurious NVNT BLE 125K 2402MHz Ref

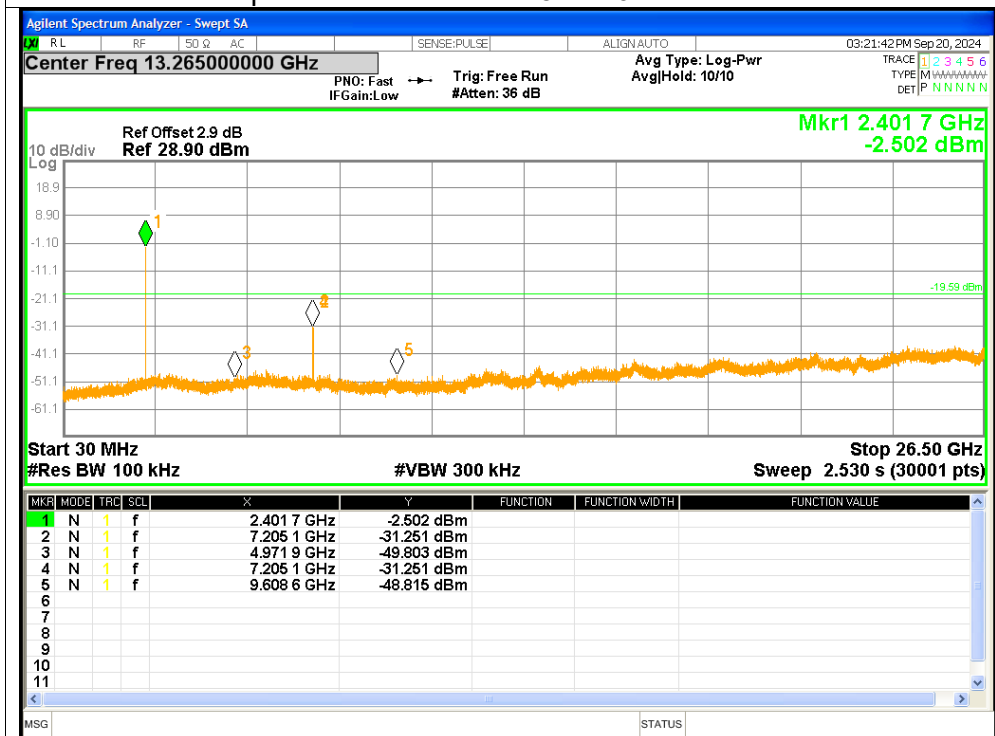





Tx. Spurious NVNT BLE 125K 2440MHz Ref

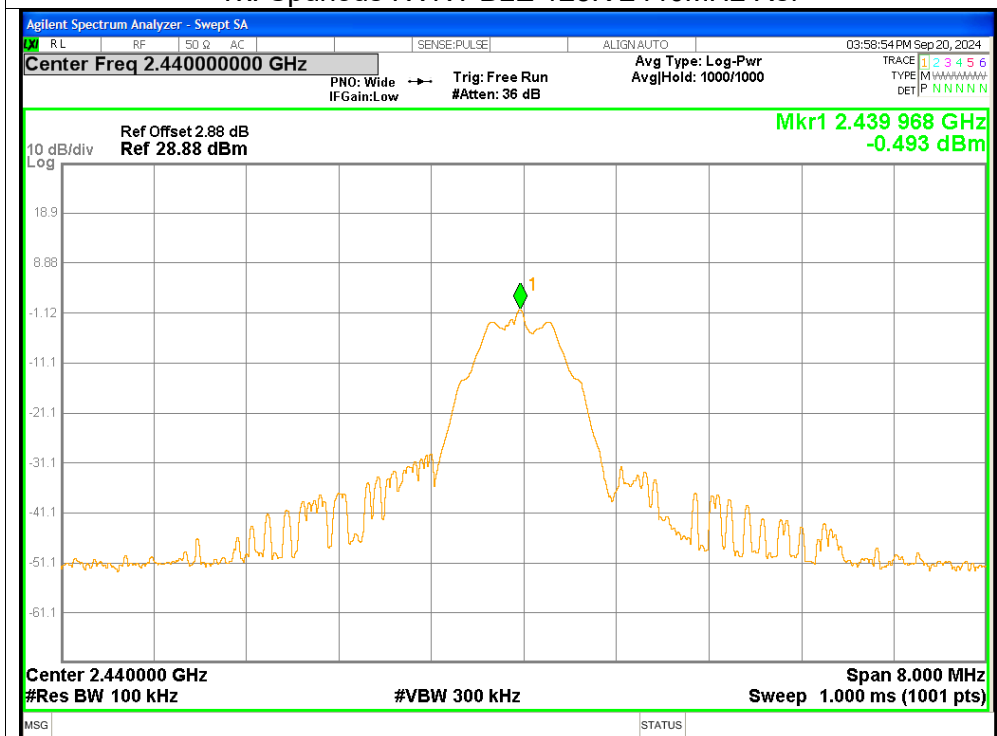


Tx. Spurious NVNT BLE 125K 2440MHz Emission

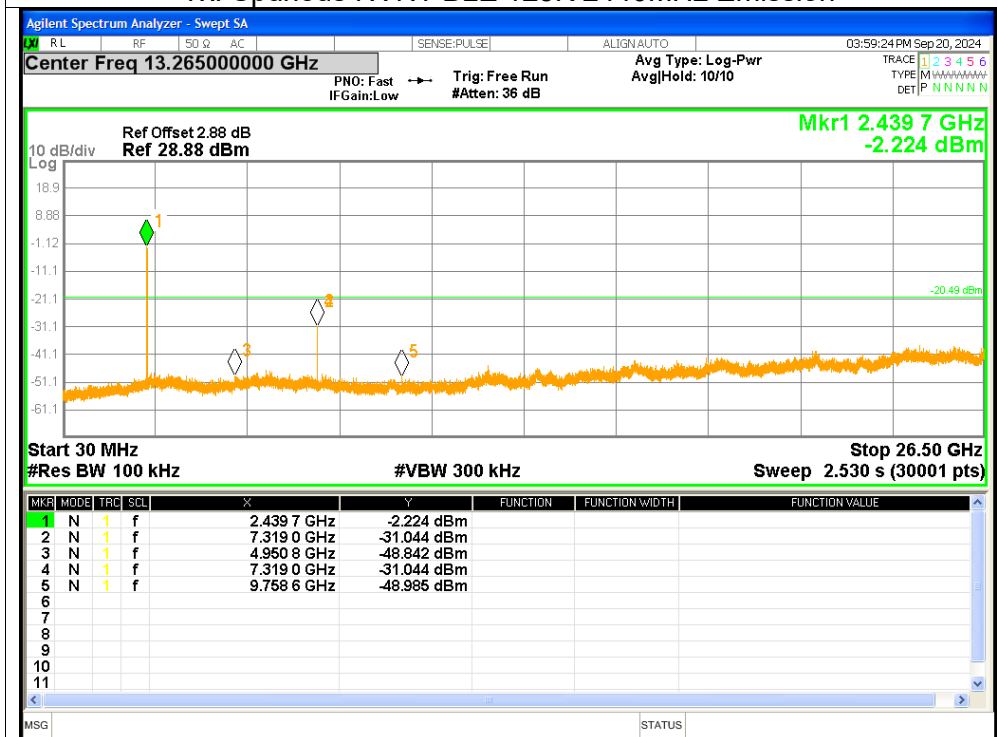

Tx. Spurious NVNT BLE 125K 2480MHz Ref

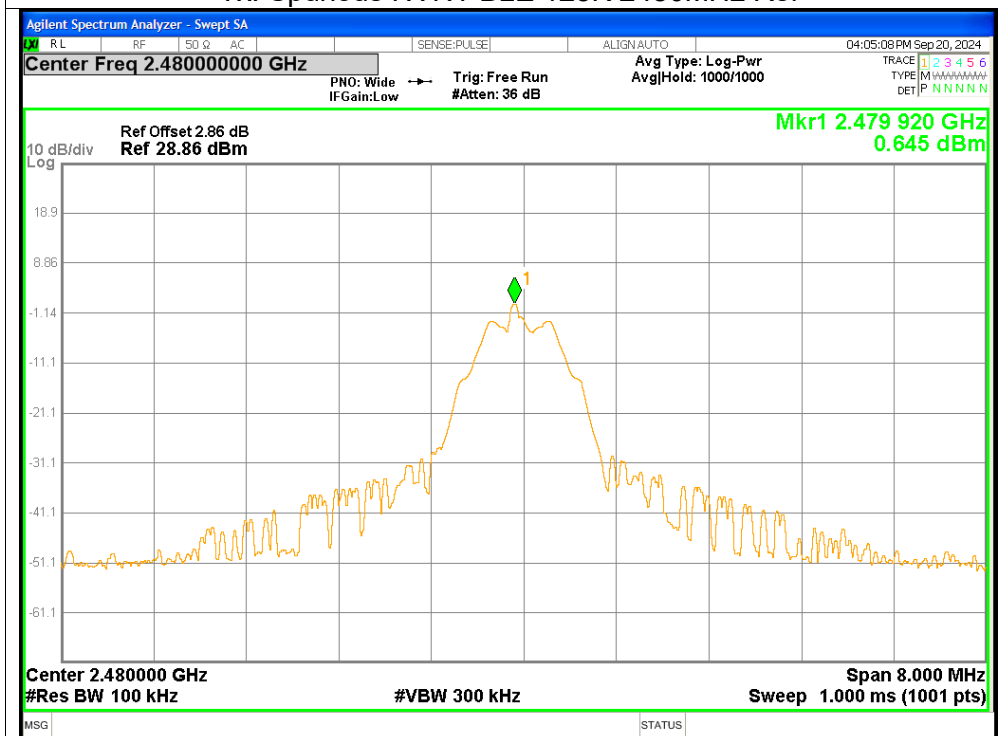


Tx. Spurious NVNT BLE 125K 2480MHz Emission

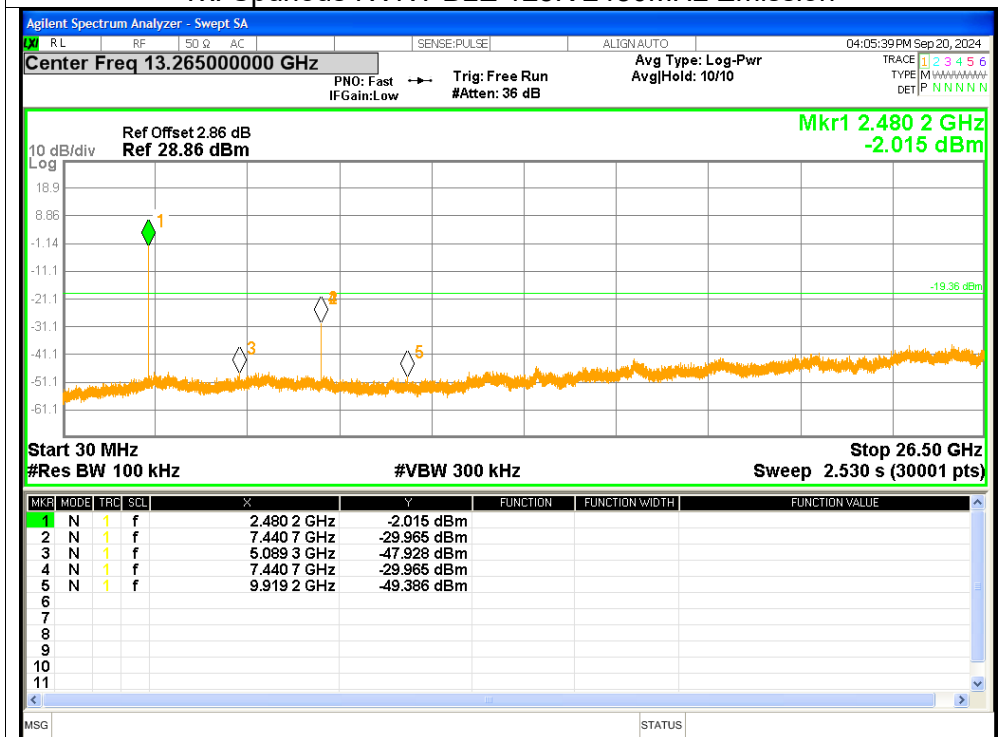

**500K****1. Duty Cycle**


Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 500K	2402	91.2	0.4	0.22
NVNT	BLE 500K	2440	91.2	0.4	0.22
NVNT	BLE 500K	2480	91.2	0.4	0.22

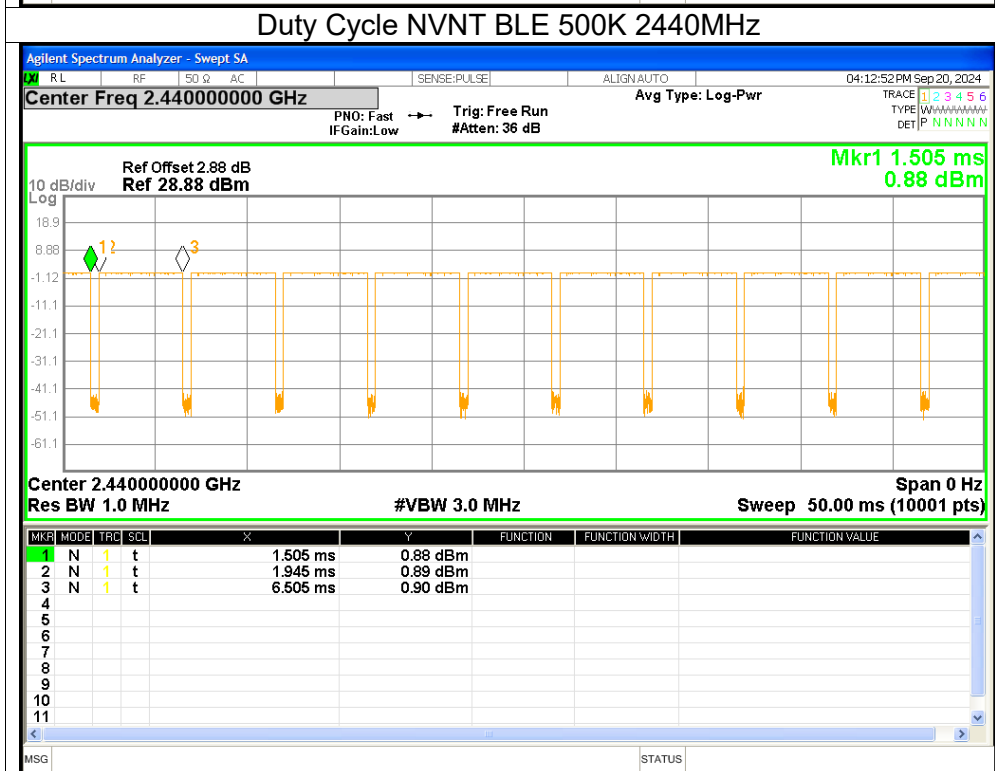




2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 500K	2402	0.26	0.4	0.66	≤ 30	Pass
NVNT	BLE 500K	2440	0.49	0.4	0.89	≤ 30	Pass
NVNT	BLE 500K	2480	0.66	0.4	1.06	≤ 30	Pass

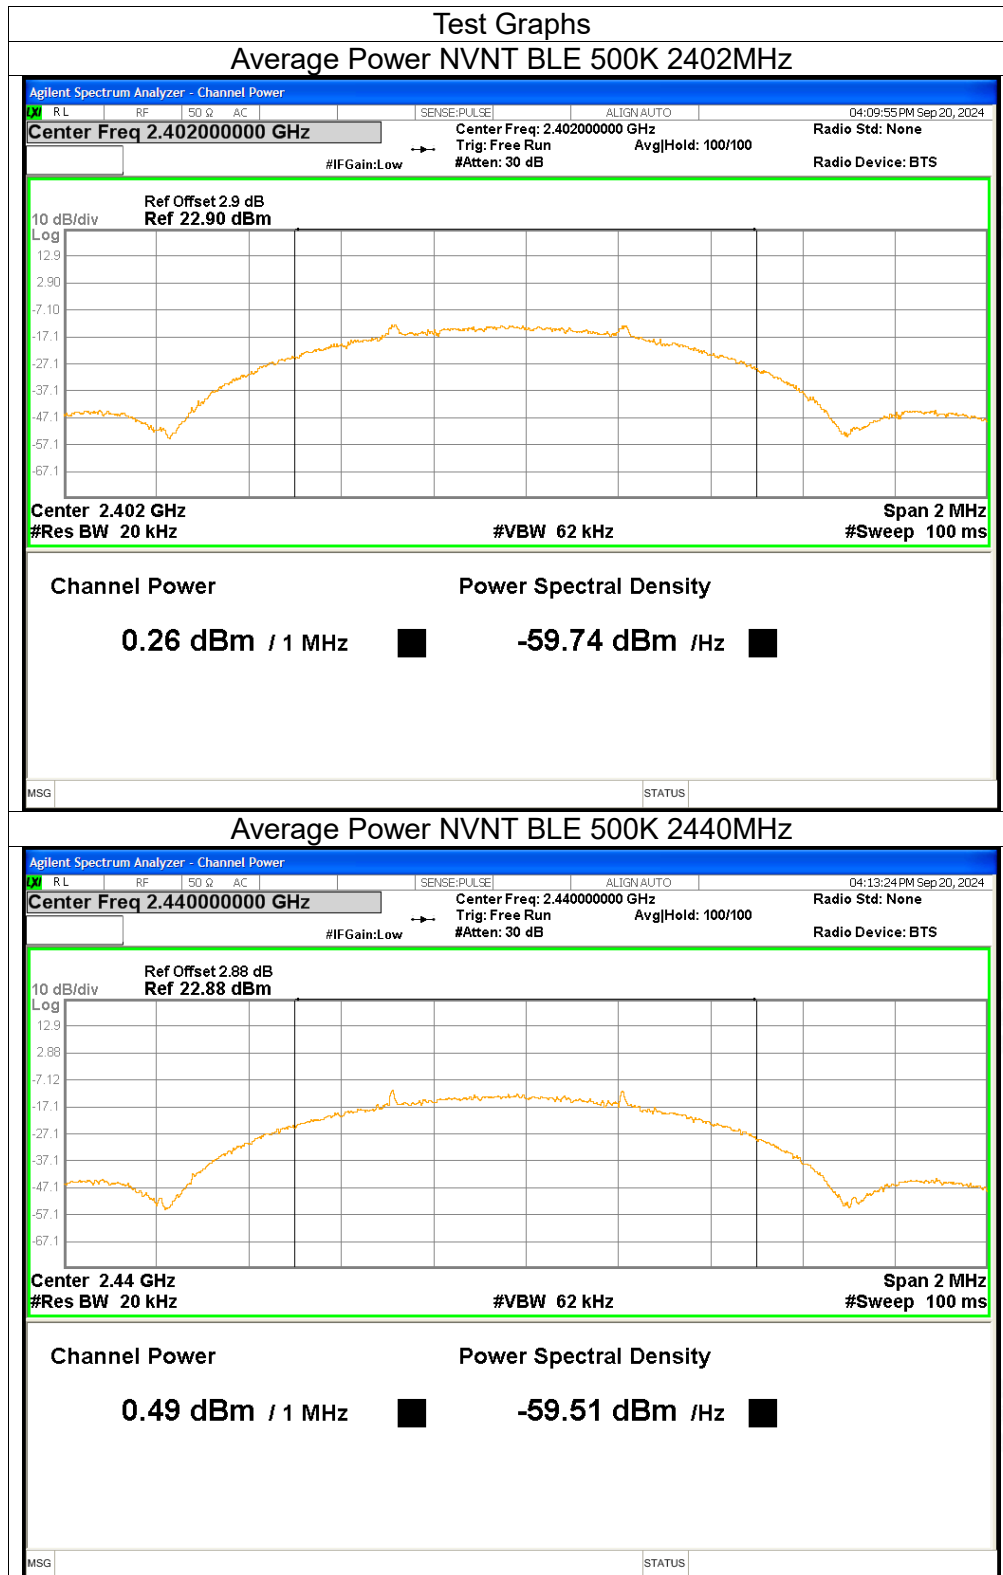

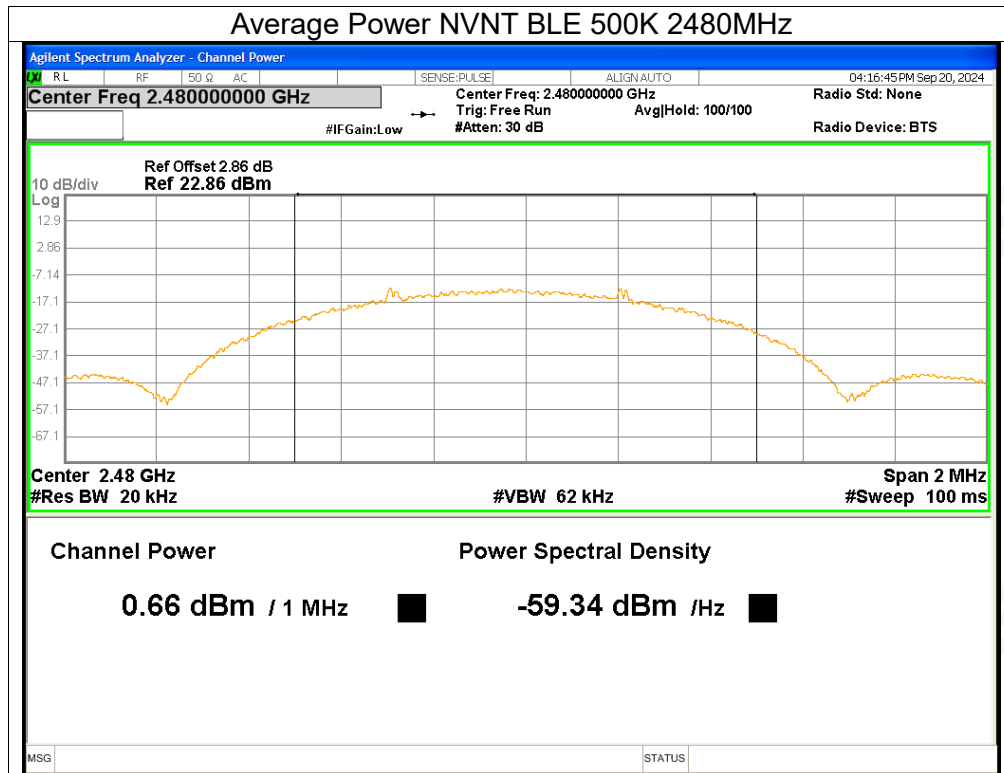




3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 500K	2402	0.76	<=30	Pass
NVNT	BLE 500K	2440	0.99	<=30	Pass
NVNT	BLE 500K	2480	1.17	<=30	Pass





Test Graphs

Peak Power NVNT BLE 500K 2402MHz

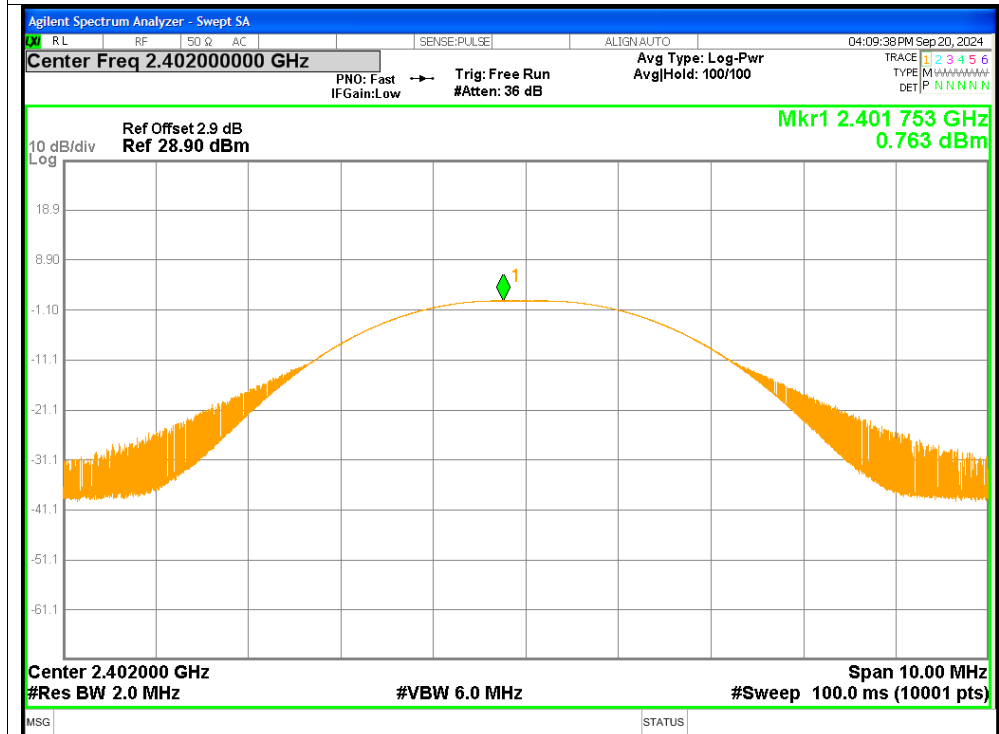

Peak Power NVNT BLE 500K 2440MHz

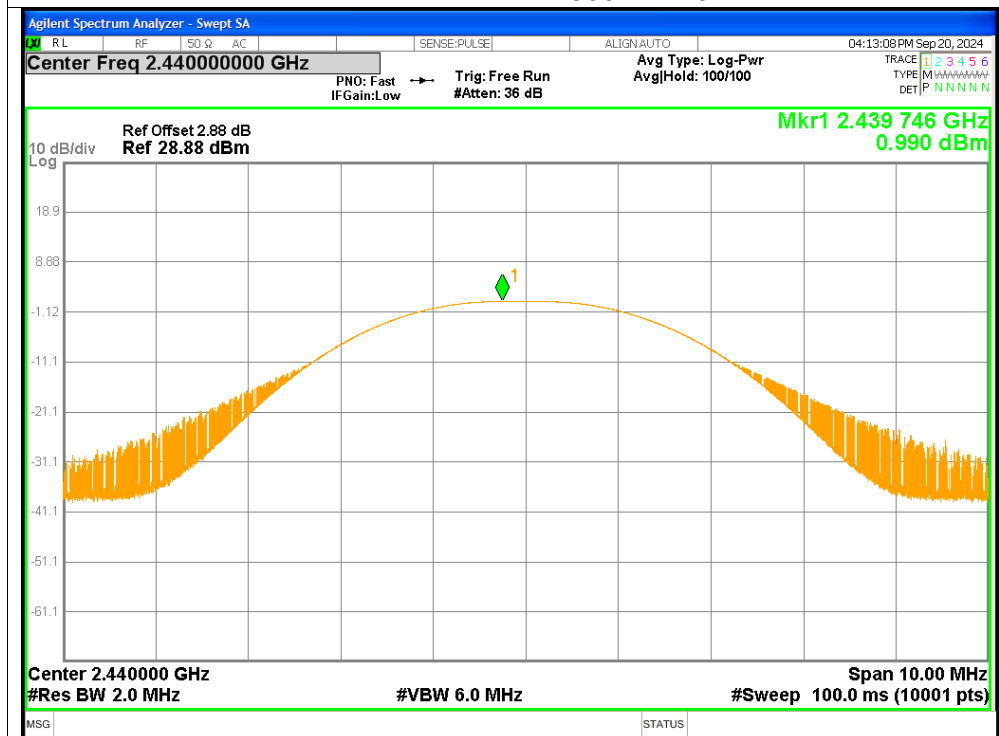

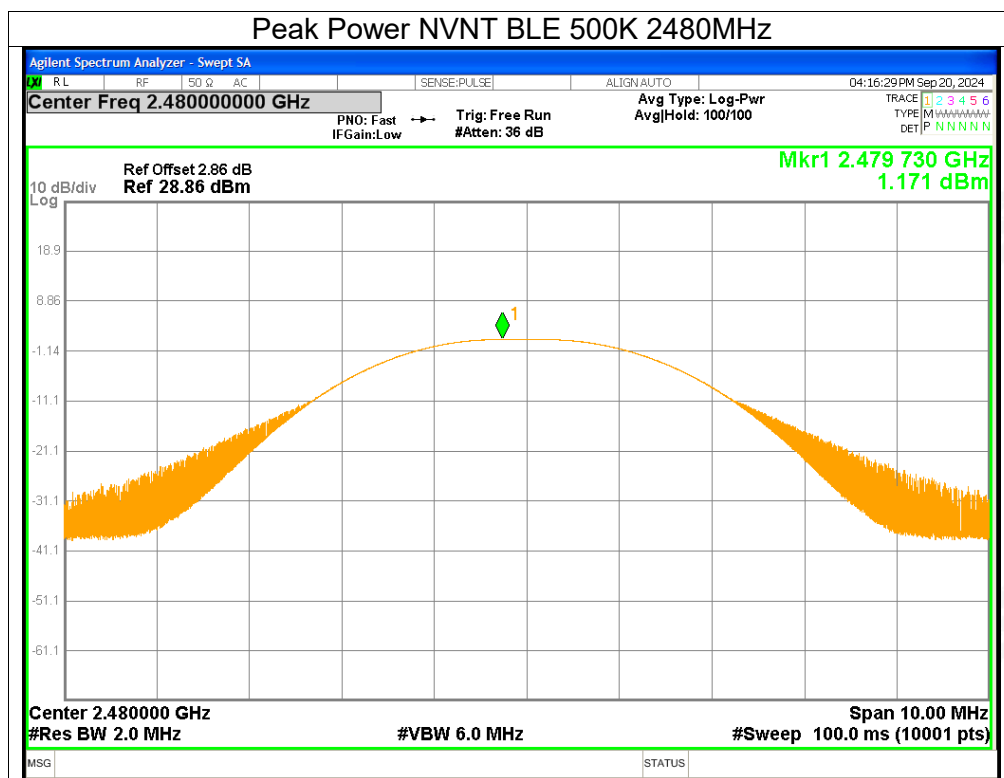




4. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 500K	2402	0.6713	≥ 0.5	Pass
NVNT	BLE 500K	2440	0.6563	≥ 0.5	Pass
NVNT	BLE 500K	2480	0.6557	≥ 0.5	Pass





Test Graphs

-6dB Bandwidth NVNT BLE 500K 2402MHz

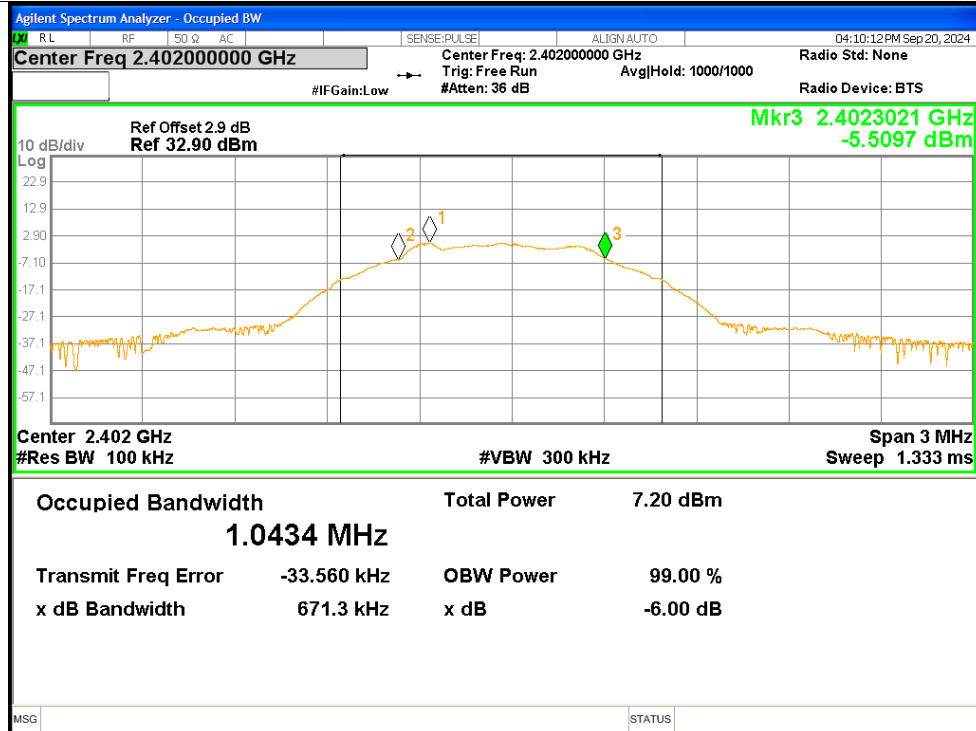

-6dB Bandwidth NVNT BLE 500K 2440MHz

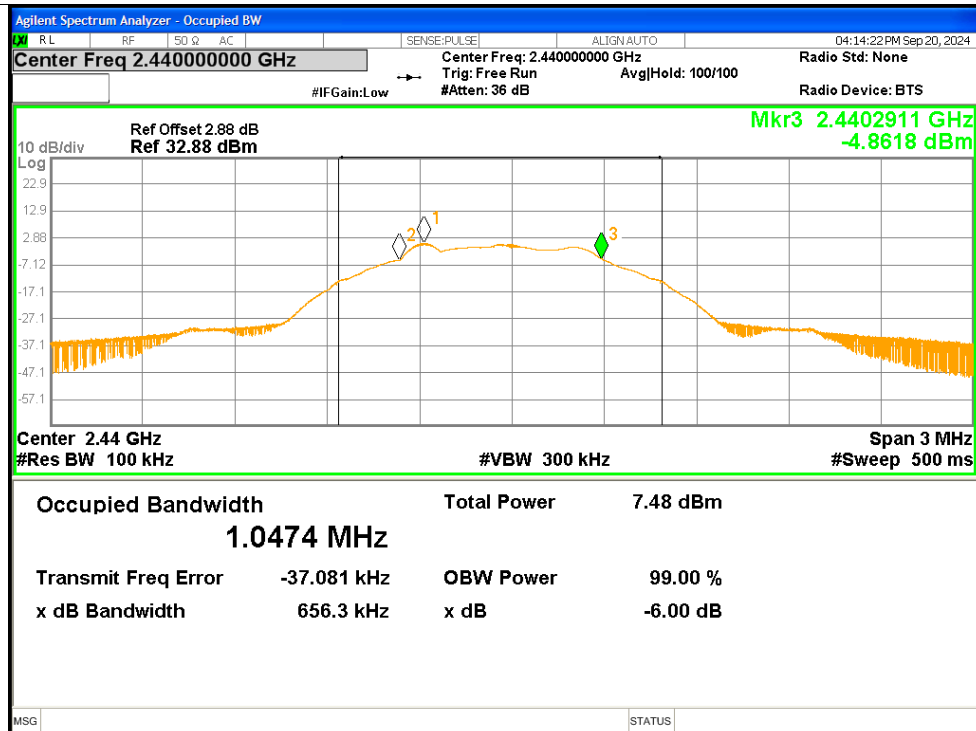

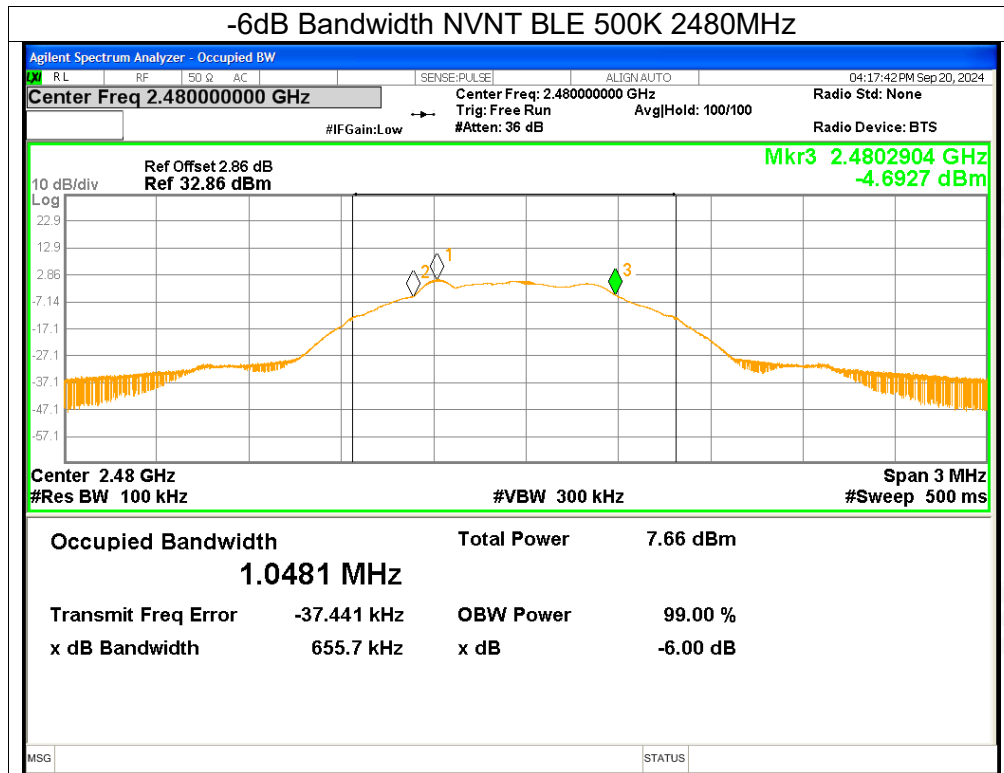




5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 500K	2402	-5.63	≤ 8	Pass
NVNT	BLE 500K	2440	-5.5	≤ 8	Pass
NVNT	BLE 500K	2480	-5.29	≤ 8	Pass





Test Graphs

PSD NVNT BLE 500K 2402MHz

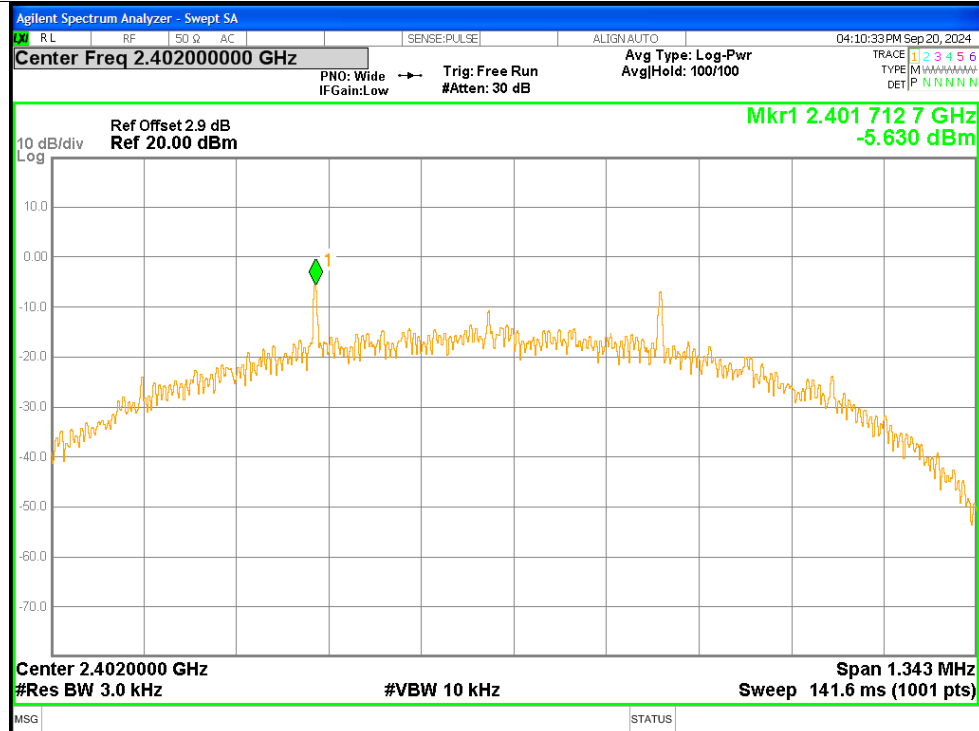

PSD NVNT BLE 500K 2440MHz

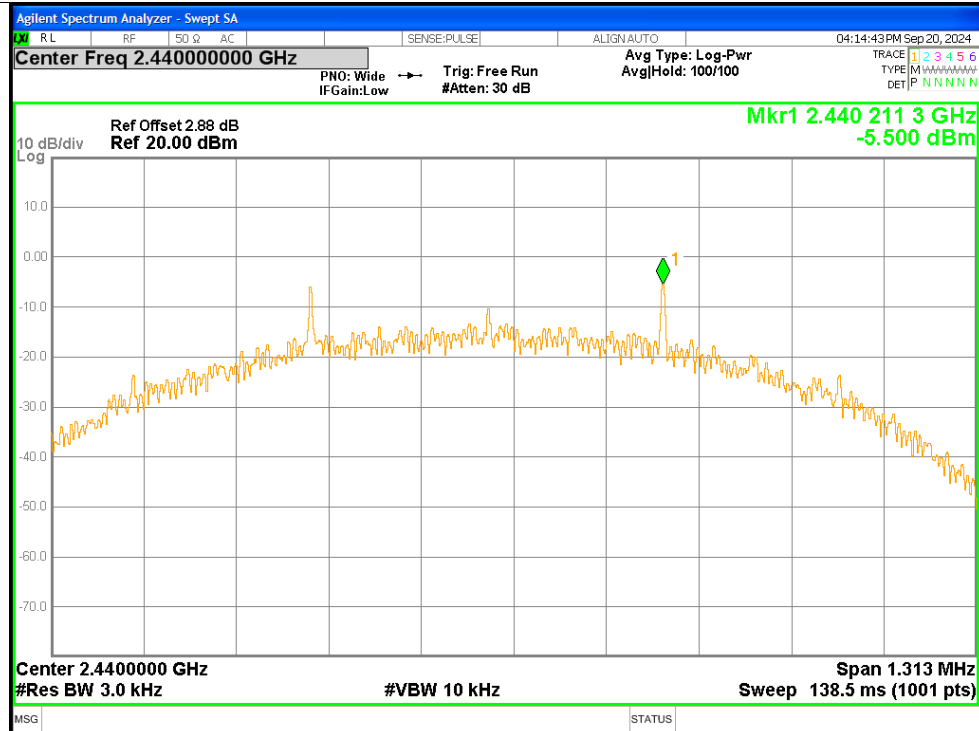

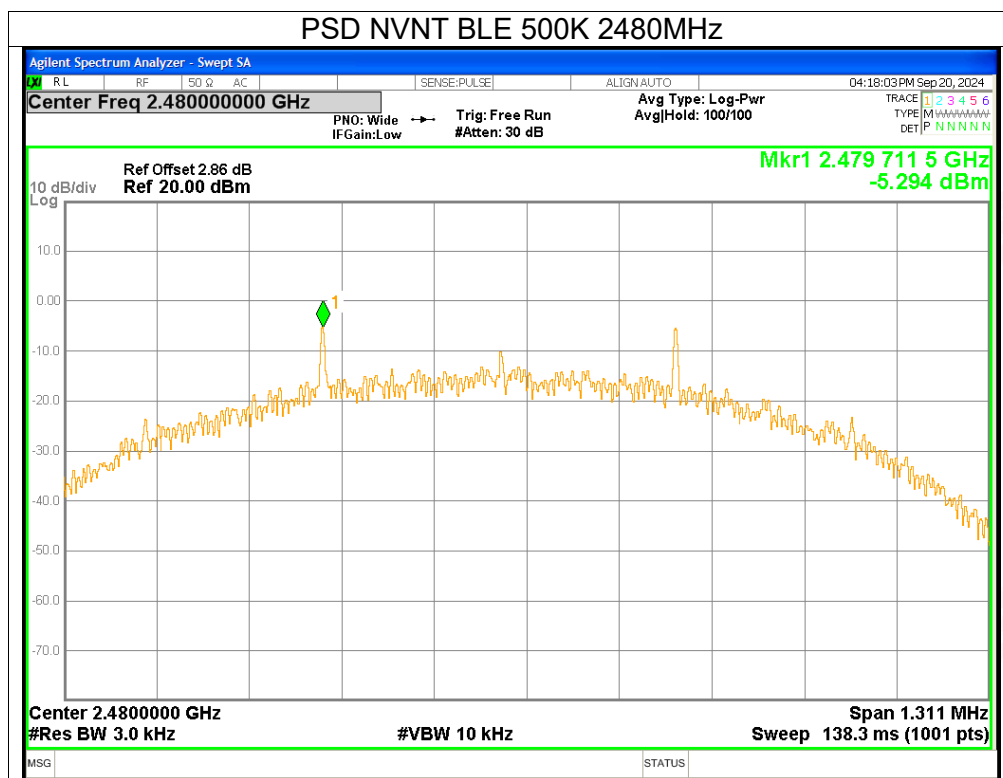




6. Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 500K	2402	-41.81	≤ -20	Pass
NVNT	BLE 500K	2480	-49.63	≤ -20	Pass

Test Graphs

Band Edge NVNT BLE 500K 2402MHz Ref

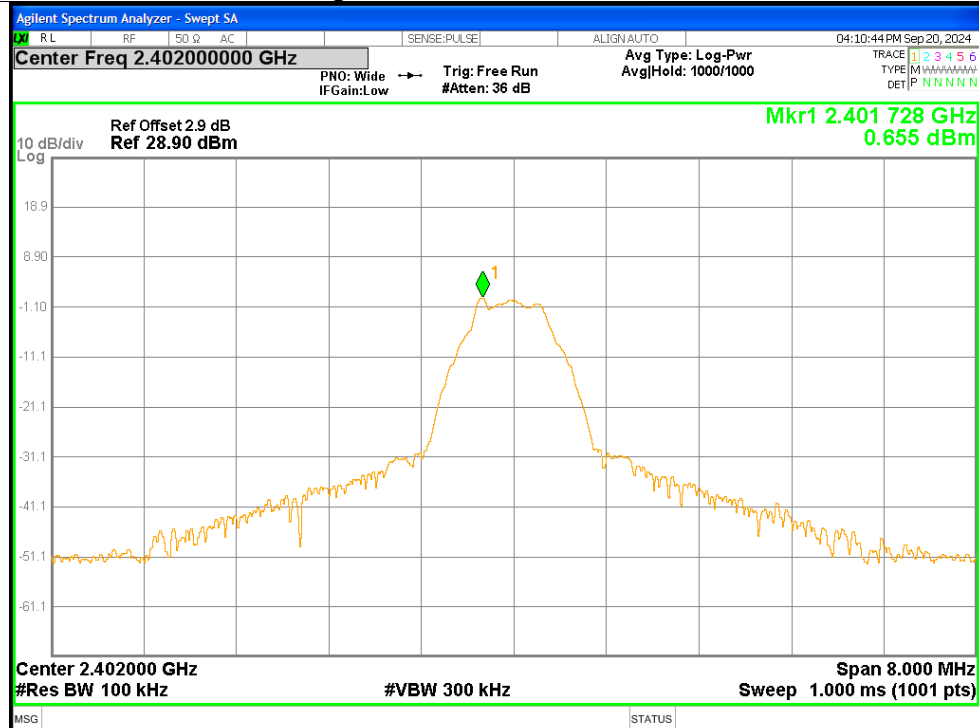


Band Edge NVNT BLE 500K 2402MHz Emission

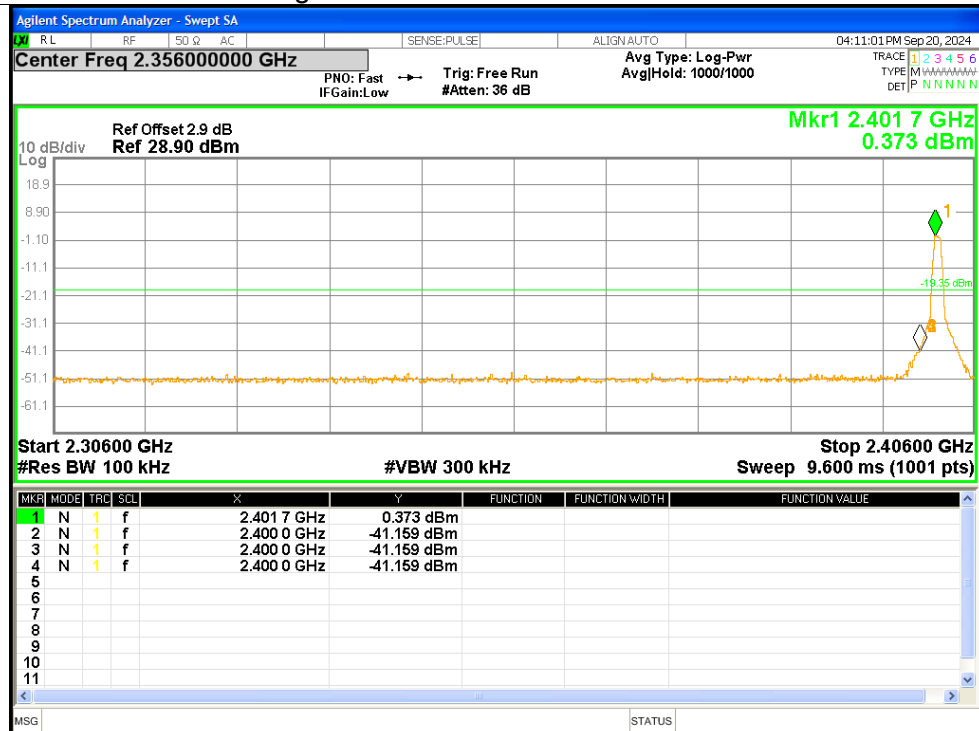




Band Edge NVNT BLE 500K 2480MHz Ref

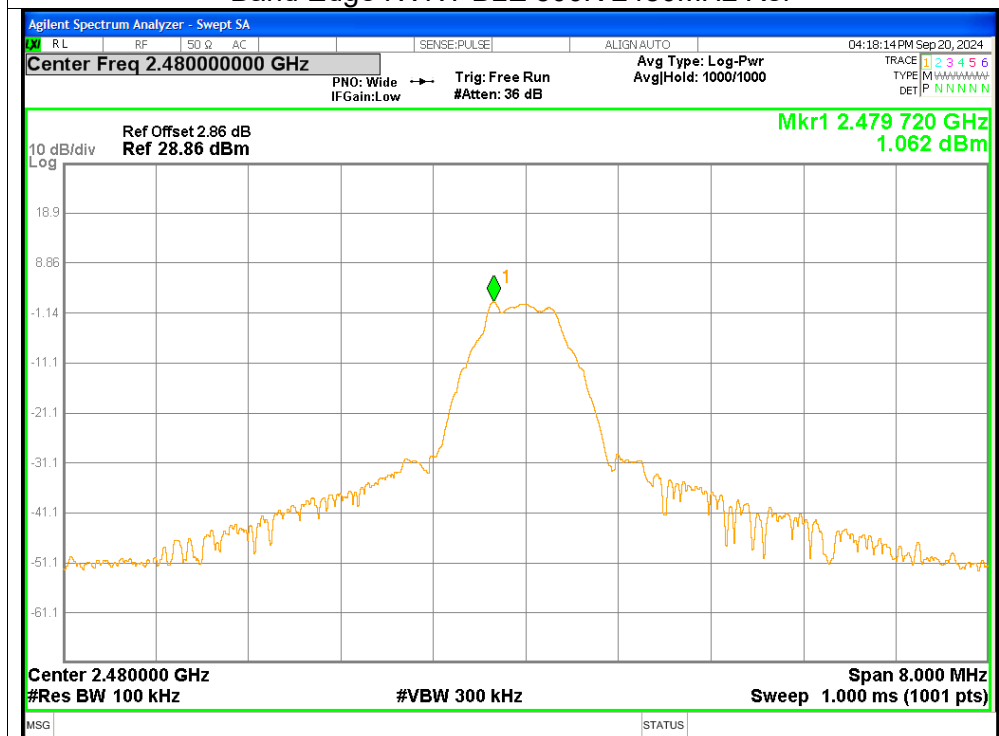

Band Edge NVNT BLE 500K 2480MHz Emission

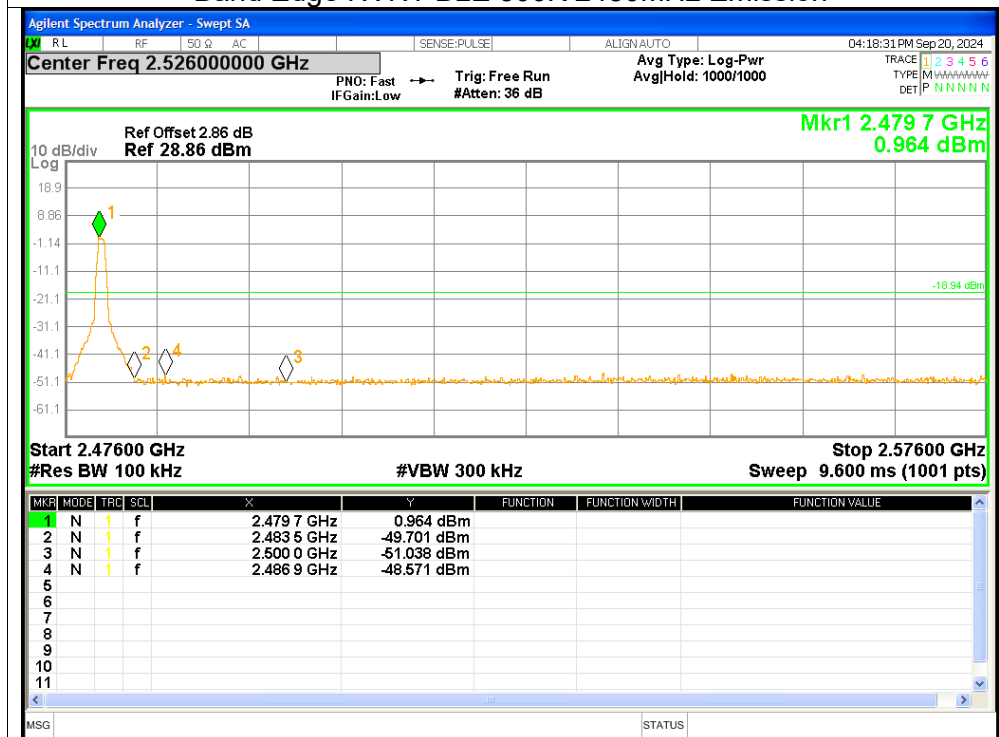




7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 500K	2402	-28.72	≤ -20	Pass
NVNT	BLE 500K	2440	-29.92	≤ -20	Pass
NVNT	BLE 500K	2480	-28.96	≤ -20	Pass

Test Graphs


Tx. Spurious NVNT BLE 500K 2402MHz Ref

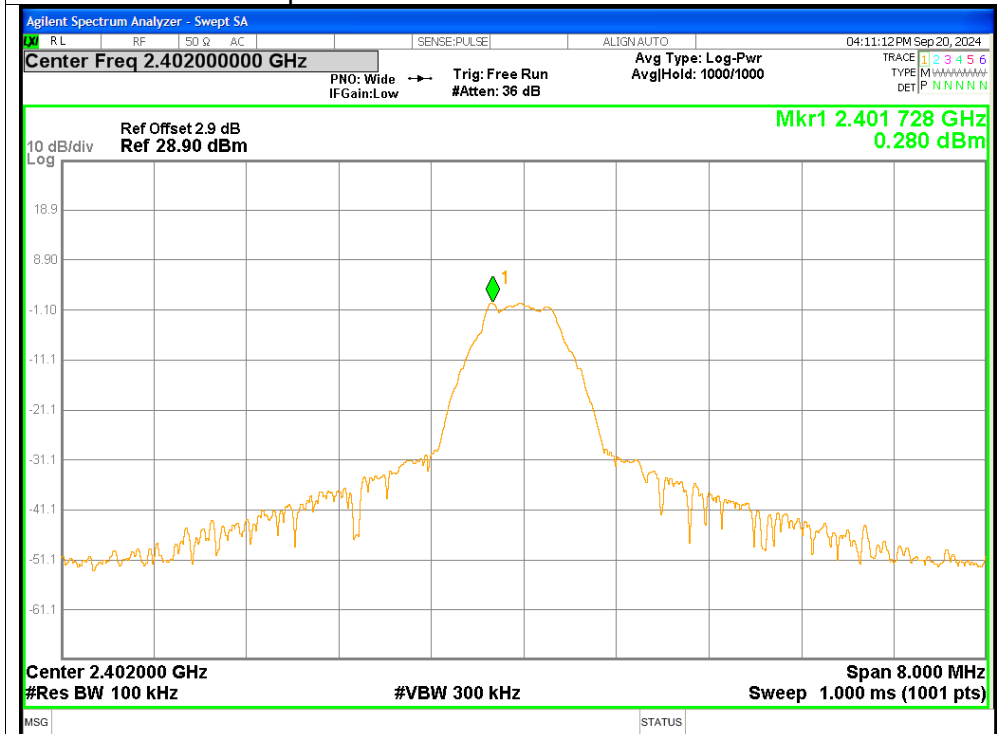


Tx. Spurious NVNT BLE 500K 2402MHz Emission

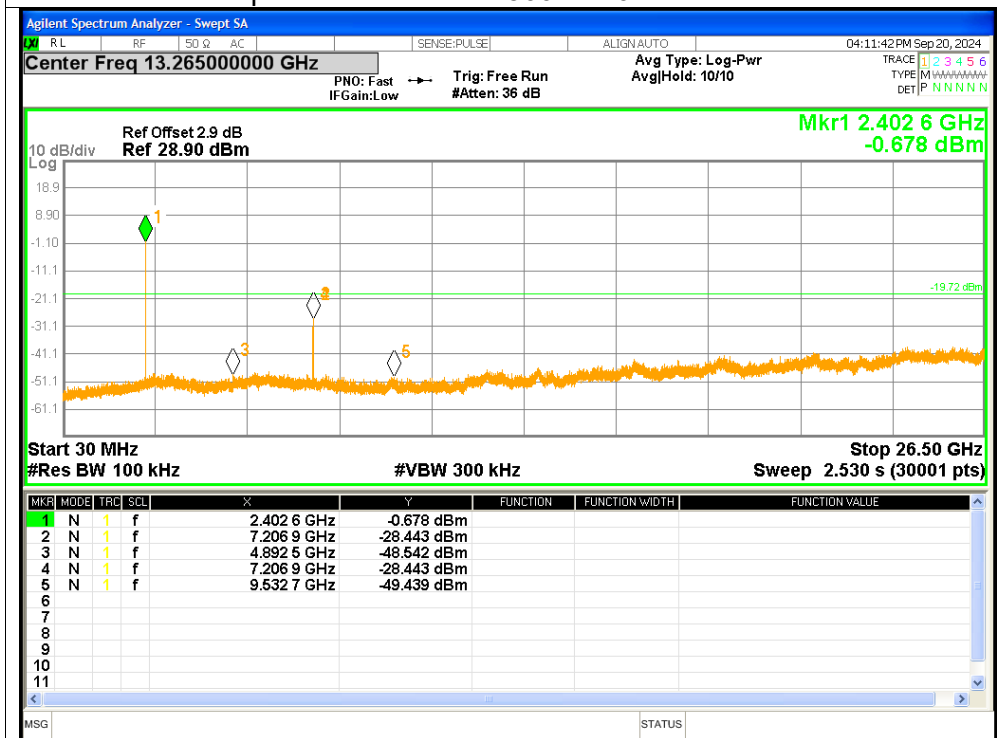


Tx. Spurious NVNT BLE 500K 2440MHz Ref

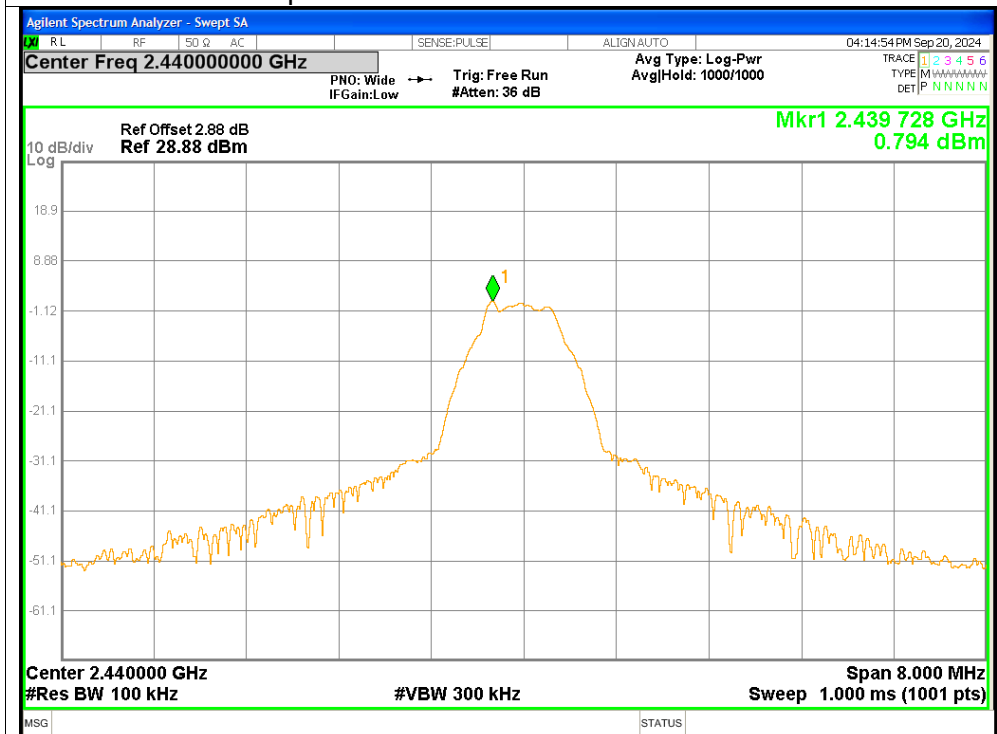


Tx. Spurious NVNT BLE 500K 2440MHz Emission

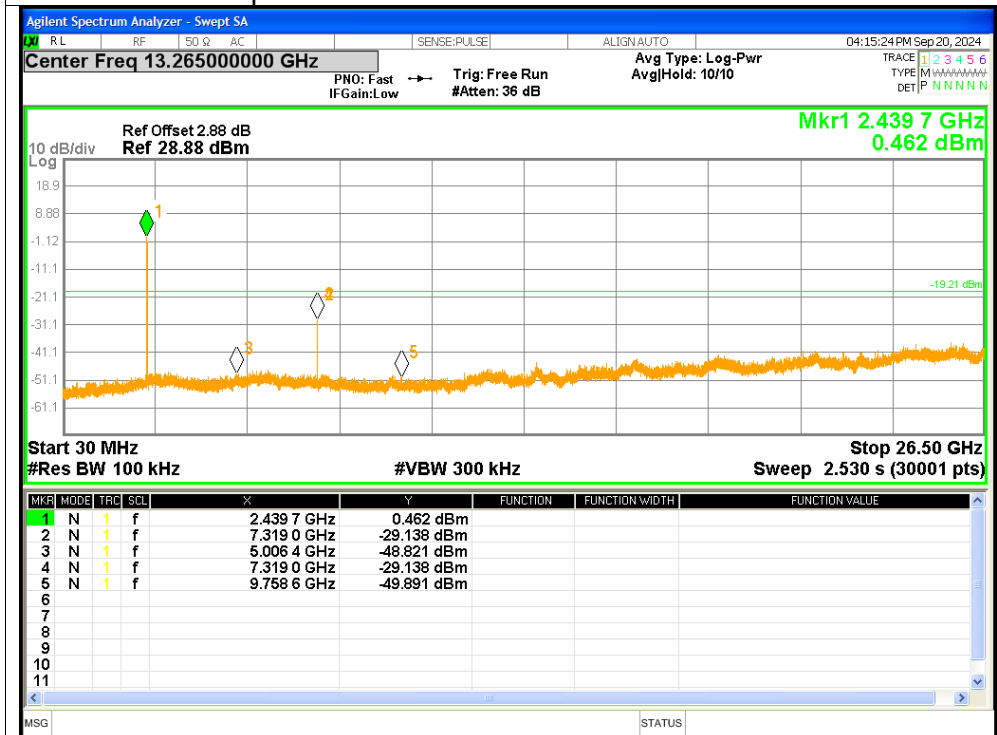

Tx. Spurious NVNT BLE 500K 2480MHz Ref

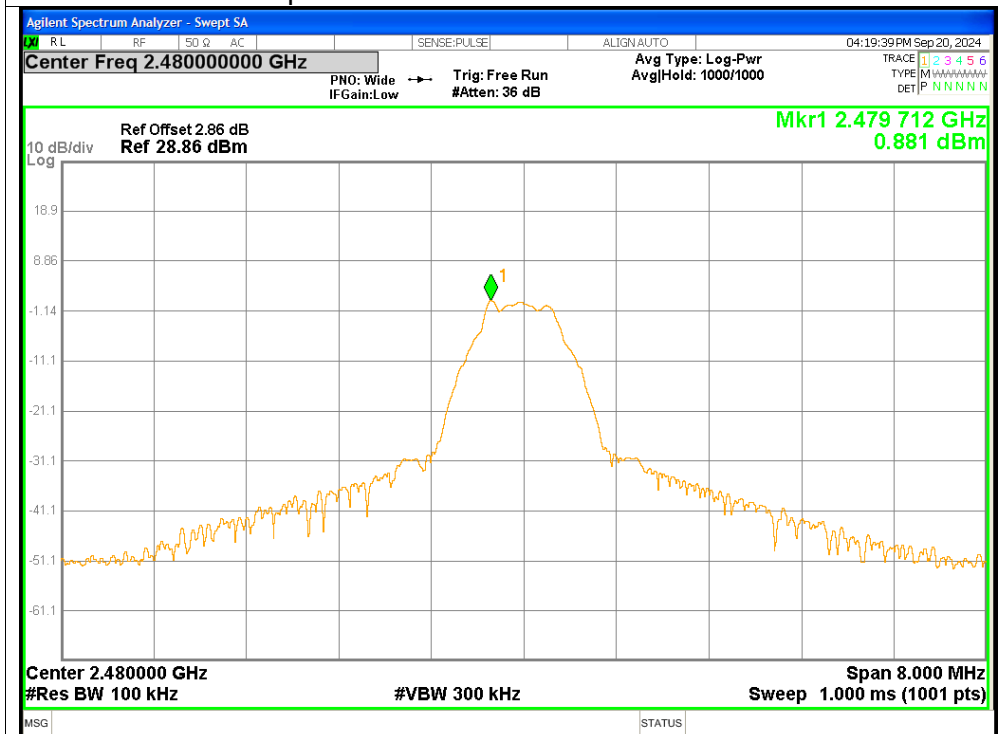

Tx. Spurious NVNT BLE 500K 2480MHz Emission

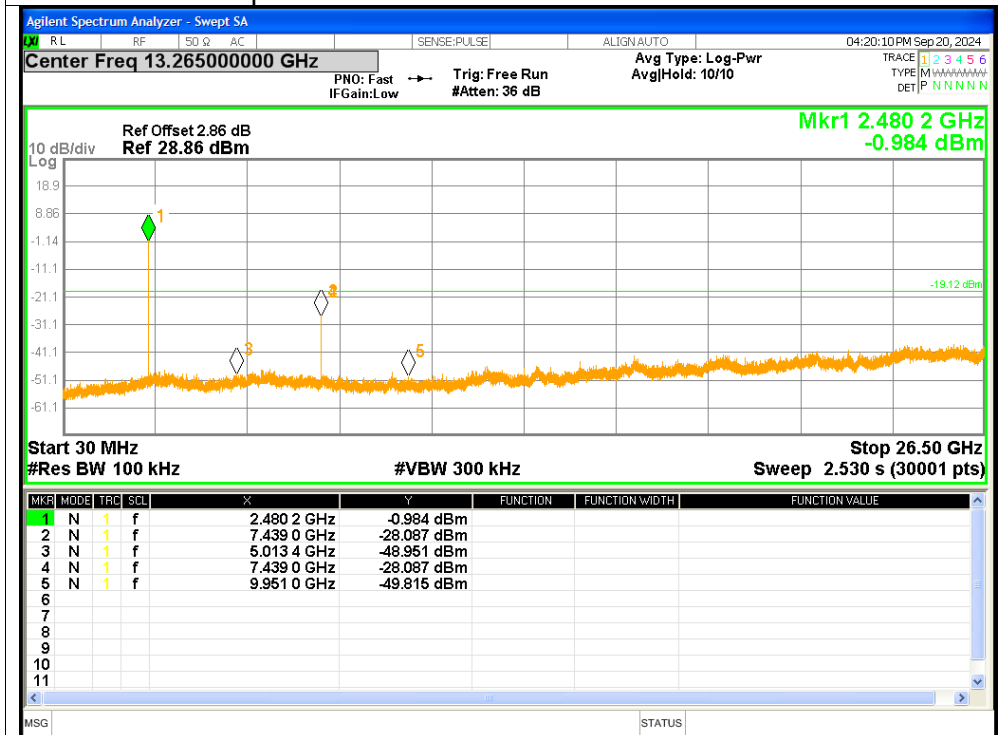



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****