



REPORT No.: SZ23080275W04

TEST REPORT

APPLICANT : BLU Products, Inc.

PRODUCT NAME : Smart Phone

MODEL NAME : G73L

BRAND NAME : BLU

FCC ID : YHLBLUG73L

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2023-10-18

TEST DATE : 2023-10-19 to 2023-12-01

ISSUE DATE : 2023-12-13



Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Hopping Mechanism	15
3.3. Number of Hopping Frequency	16
3.4. Duty Cycle of Test Signal	17
3.5. Maximum Peak Conducted Output Power	18
3.6. Maximum Average Conducted Output Power	19
3.7. 20 dB Bandwidth	20
3.8. Carried Frequency Separation	21
3.9. Time of Occupancy (Dwell time)	22
3.10. Conducted Spurious Emissions and Band Edge	23
3.11. Conducted Emission	24
3.12. Restricted Frequency Bands	25
3.13. Radiated Emission	26



Annex A Test Data and Result28

Change History		
Version	Date	Reason for change
1.0	2023-12-13	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Oct. 23, 2023	Zhong Yanshan	PASS	No deviation
11	15.207	Conducted Emission	Oct. 24, 2023	Wang Deyong	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Nov. 25, 2023	Su Zhan	PASS	No deviation
13	15.209,	Radiated	Dec. 01, 2023	Su Zhan	PASS	No deviation



	15.247(d)	Emission				
--	-----------	----------	--	--	--	--

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	BLU Products, Inc.
Applicant Address	8600 NW 36th Street, Suite #200 Doral, FL 33166, USA
Manufacturer	BLU Products, Inc.
Manufacturer Address	8600 NW 36th Street, Suite #200 Doral, FL 33166, USA

2.2. Information of EUT

Product Name:	Smart Phone	
Sample No.:	1#; 13#	
Hardware Version:	SC6303_MB_V1.1.0	
Software Version:	BLU_G0930_V13.0.G.01.00_GENERIC 24-09-2023	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	4.2	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	2.10dBi	
Accessory Information:	Battery	
	Brand Name:	BLU
	Model No.:	C806051500P
	Serial No.:	N/A
	Capacity:	5000mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Shenzhen Jiuliyuan Electronic Technology Co., Ltd.



Accessory Information:	AC Adapter	
	Brand Name:	BLU
	Model No.:	US-HY-2000
	Serial No.:	N/A
	Rated Output:	5V $\overline{\text{---}}$ 2000mA
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.3A
	Manufacturer:	Shenzhen Zhongfu core Technology Co., LTD

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

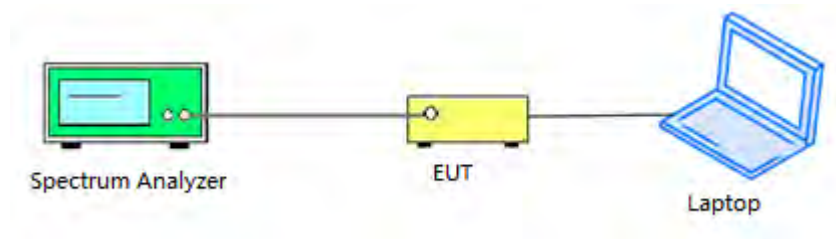

2.6.2. Conducted Emission Measurement




2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz



2) For radiated emissions from 30MHz to 1GHz

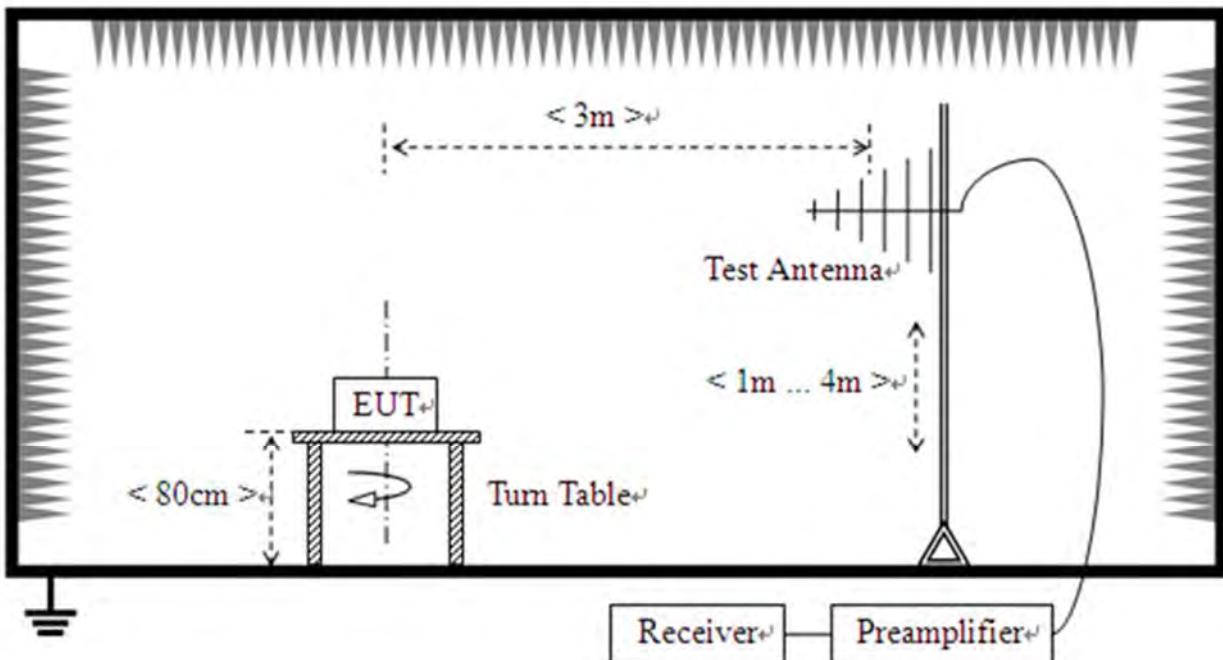

3) For radiated emissions above 1GHz

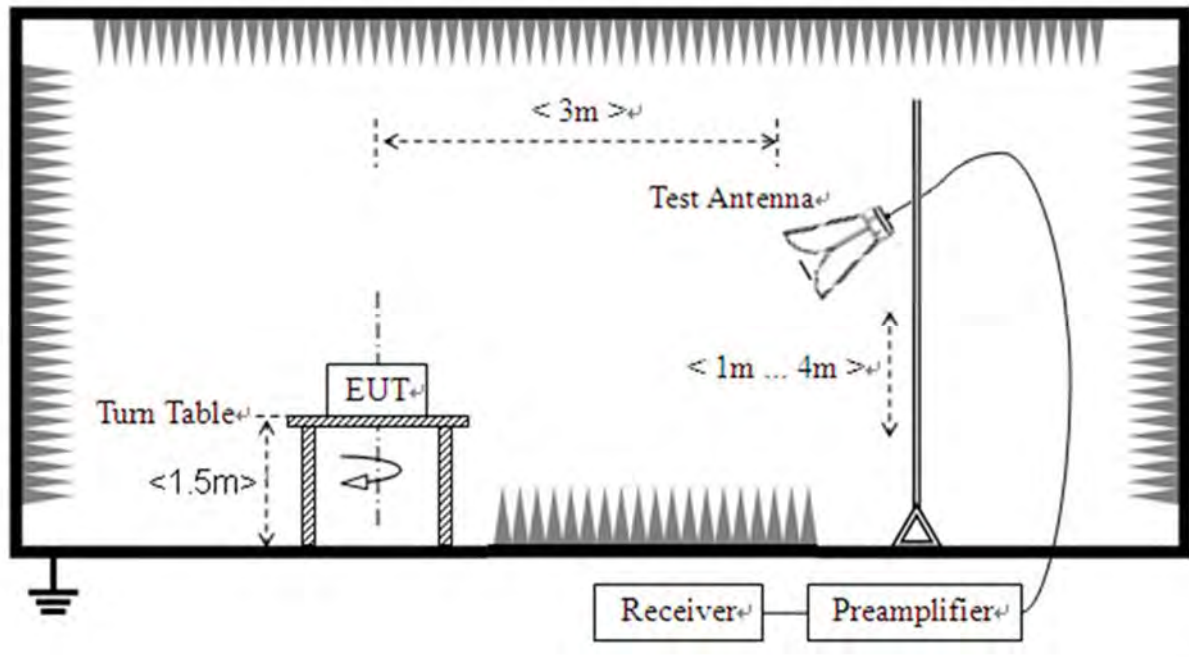



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

3.2. Hopping Mechanism

3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".



3.3. Number of Hopping Frequency

3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.1 in this report.



3.4. Duty Cycle of Test Signal

3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2. Test Result

Refer to Annex A.2 in this report.



3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.



3.6. Maximum Average Conducted Output Power

3.6.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.4 in this report.



3.7.20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20 \text{ dB}$) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



3.8. Carried Frequency Separation

3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.6 in this report.



3.9. Time of Occupancy (Dwell time)

3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (1600 / 2 / 79) \times 31.6$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (1600 / 4 / 79) \times 31.6$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (1600 / 6 / 79) \times 31.6$ Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (800 / 2 / 20) \times (0.4 \times 20)$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (800 / 4 / 20) \times (0.4 \times 20)$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (800 / 6 / 20) \times (0.4 \times 20)$ Millisecond.

3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4. Test Result

Refer to Annex A.7 in this report.

3.10. Conducted Spurious Emissions and Band Edge

3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.

3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

Refer to Annex A.10 in this report.

3.12. Restricted Frequency Bands

3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4.Test Result

Refer to Annex A.11 in this report.



3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4.Test Result

Refer to Annex A.12 in this report.



REPORT No.: SZ23080275W04

Annex A Test Data and Result


A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

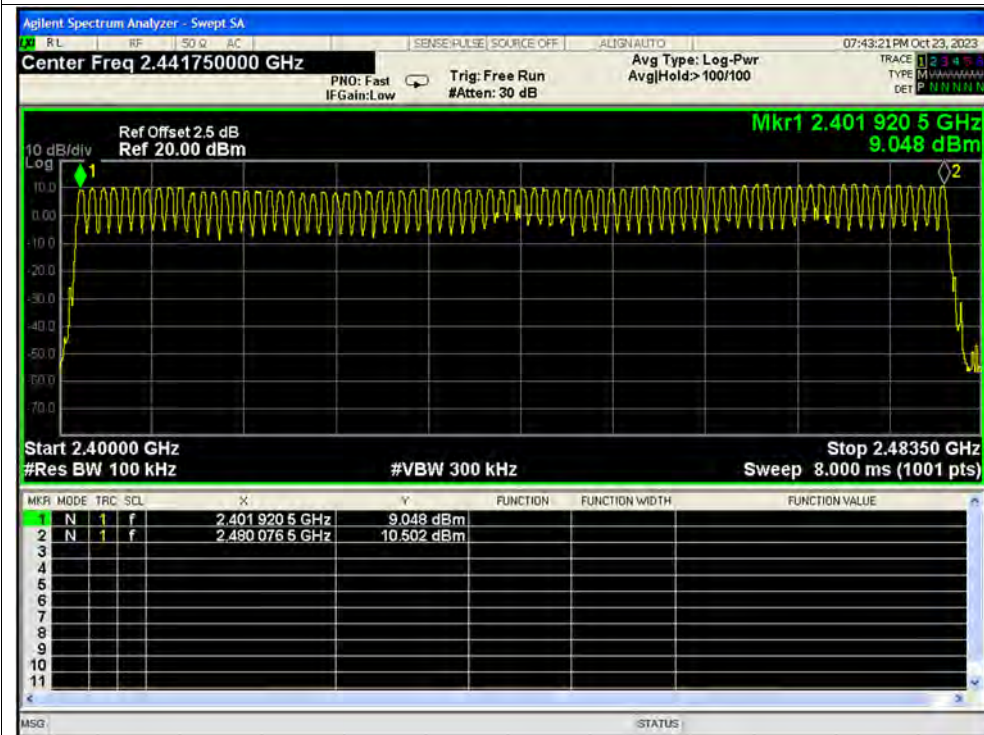


Hopping No. NVNT 2-DH5 2402MHz Ant1

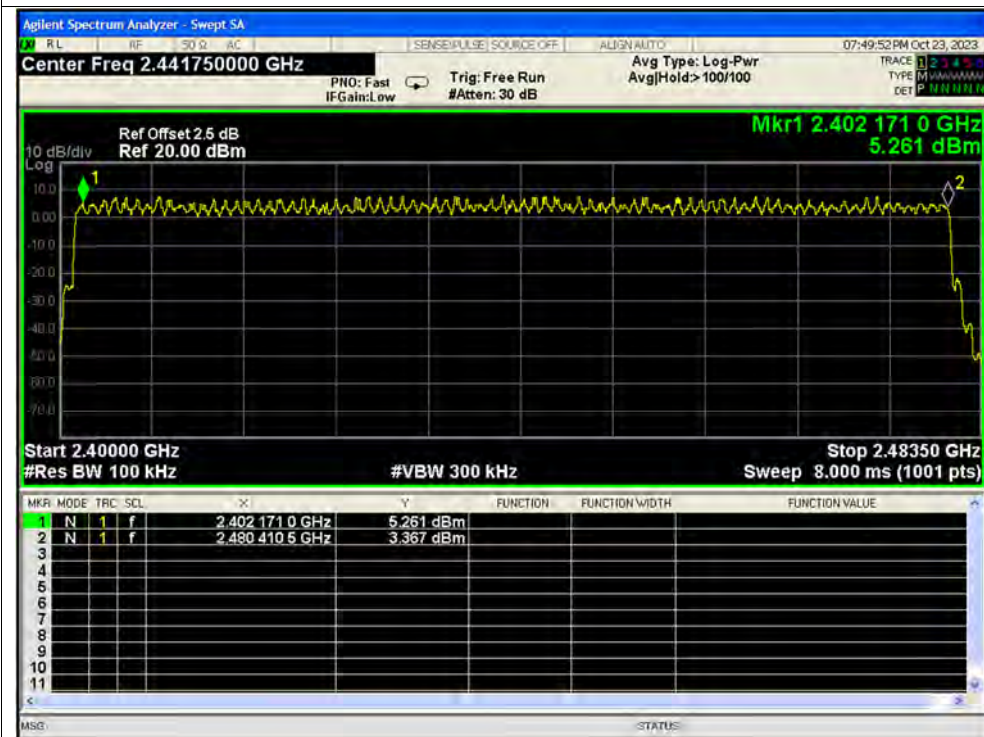



Hopping No. NVNT 3-DH5 2402MHz Ant1

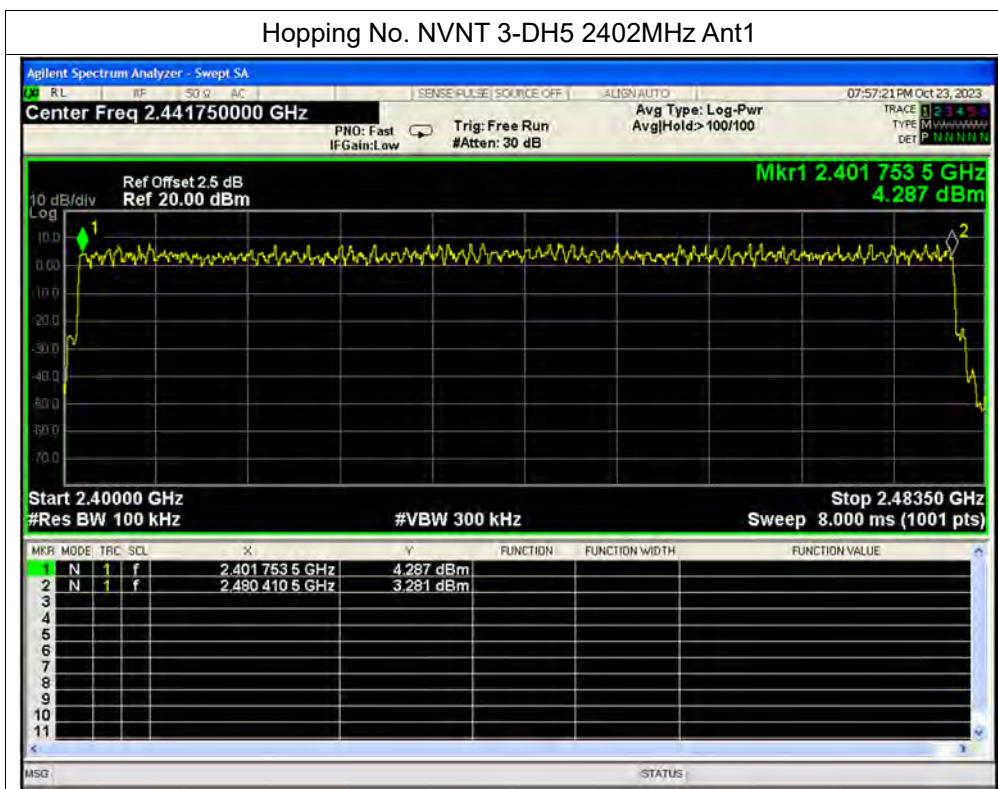


**A.2. Duty Cycle of Test Signal**

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.23	1.12	0.35
NVNT	1-DH5	2441	Ant1	77.55	1.1	0.34
NVNT	1-DH5	2480	Ant1	77.55	1.1	0.34
NVNT	2-DH5	2402	Ant1	77.27	1.12	0.34
NVNT	2-DH5	2441	Ant1	77.31	1.12	0.34
NVNT	2-DH5	2480	Ant1	77.31	1.12	0.34
NVNT	3-DH5	2402	Ant1	76.88	1.14	0.35
NVNT	3-DH5	2441	Ant1	77.25	1.12	0.35
NVNT	3-DH5	2480	Ant1	76.91	1.14	0.35




Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

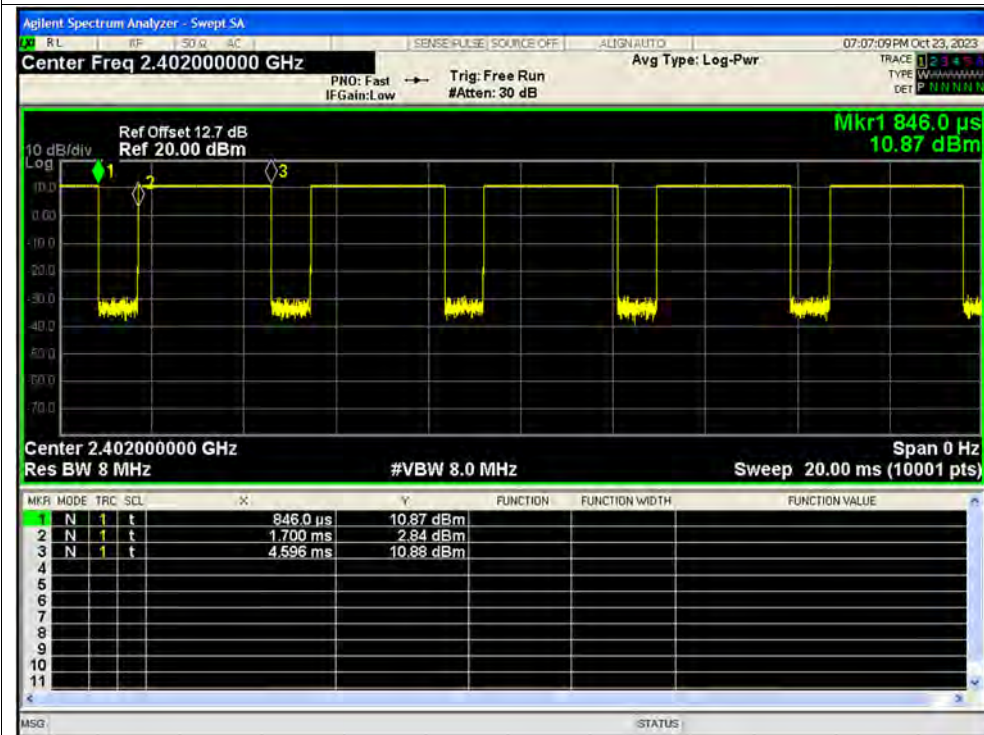


Duty Cycle NVNT 1-DH5 2441MHz Ant1

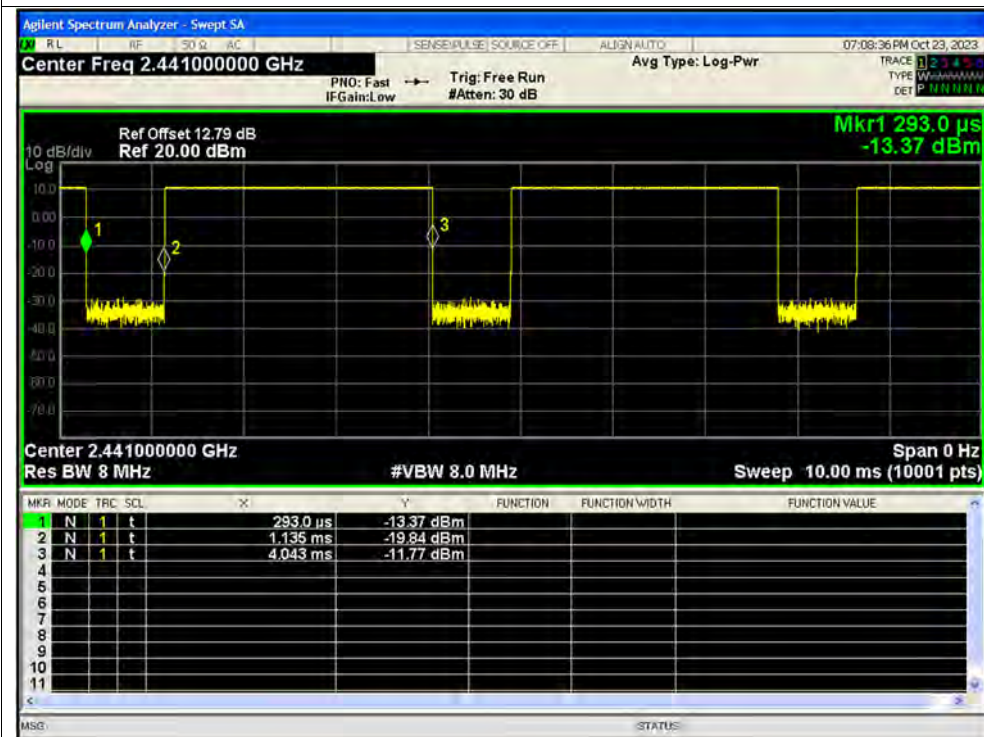




Duty Cycle NVNT 1-DH5 2480MHz Ant1

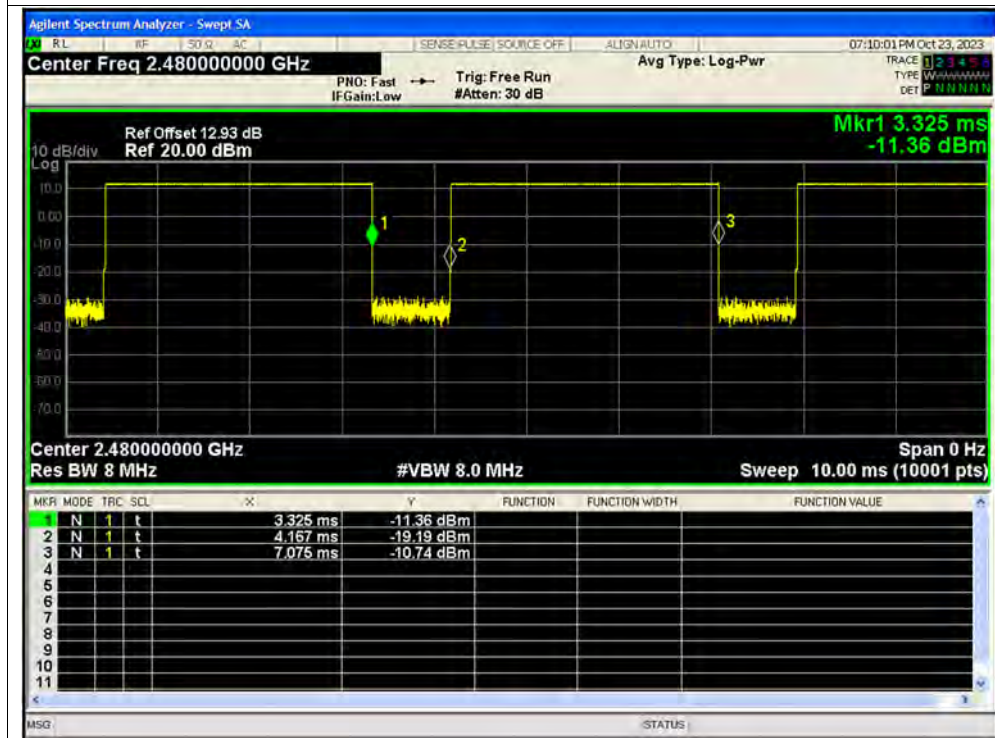


Duty Cycle NVNT 2-DH5 2402MHz Ant1

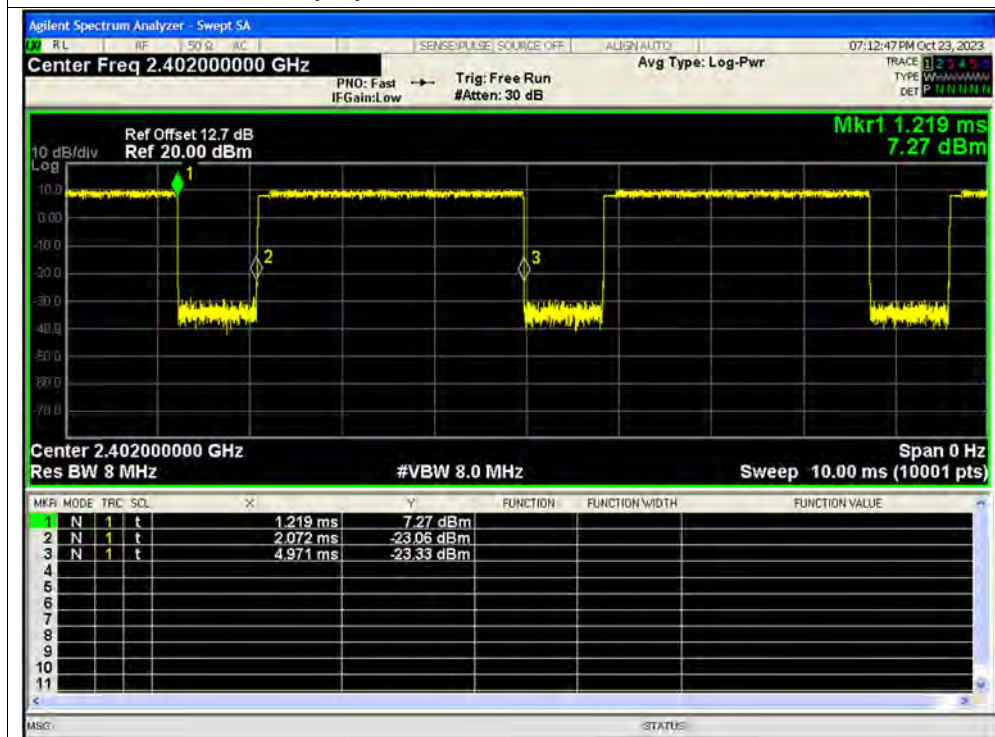



Duty Cycle NVNT 2-DH5 2441MHz Ant1

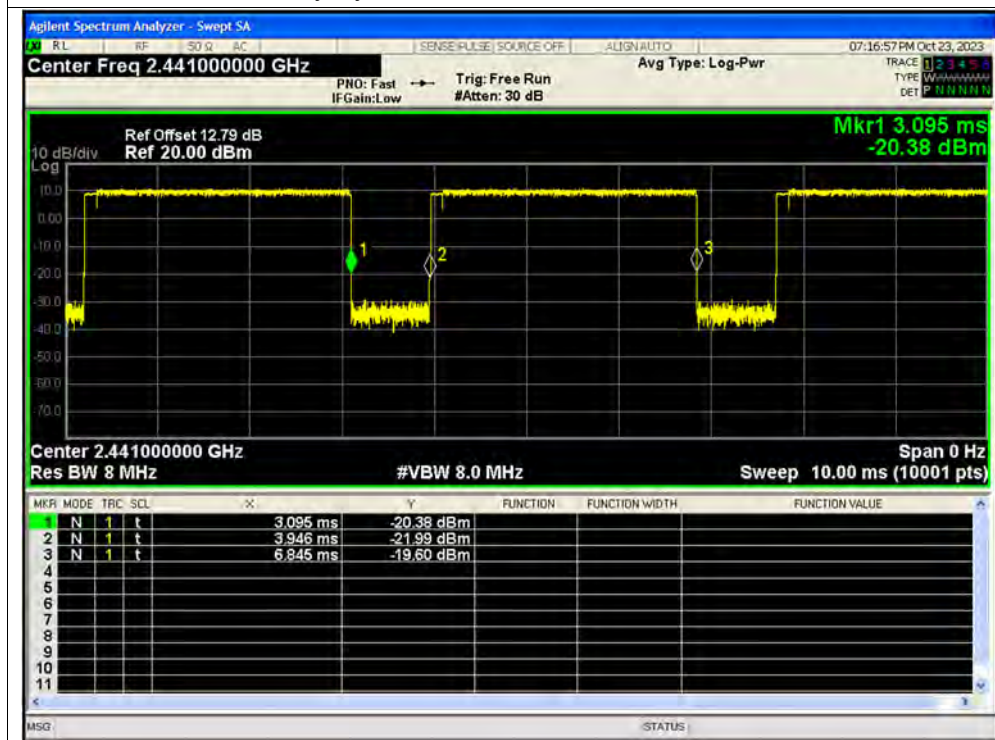


Duty Cycle NVNT 2-DH5 2480MHz Ant1






Duty Cycle NVNT 3-DH5 2402MHz Ant1

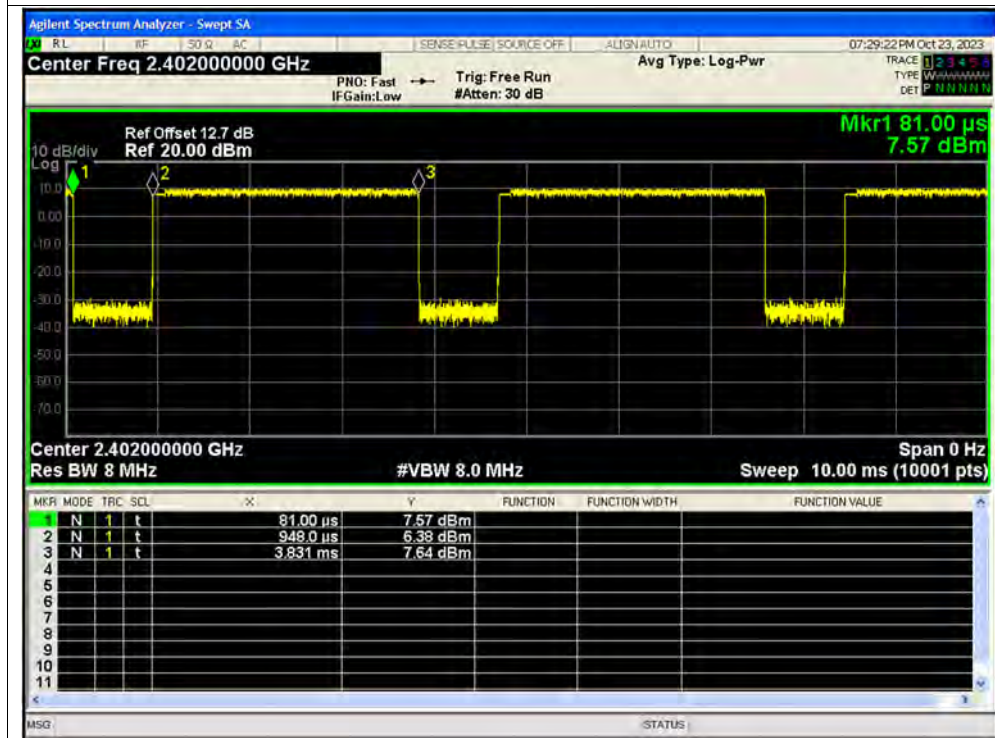


Duty Cycle NVNT 3-DH5 2441MHz Ant1

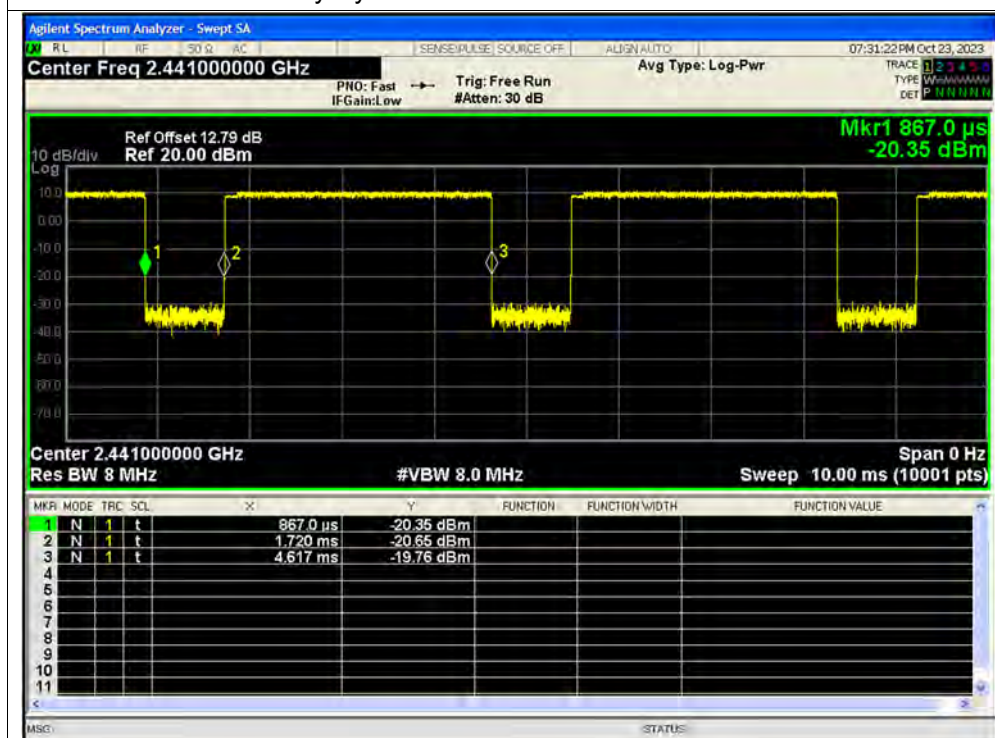



Duty Cycle NVNT 3-DH5 2480MHz Ant1

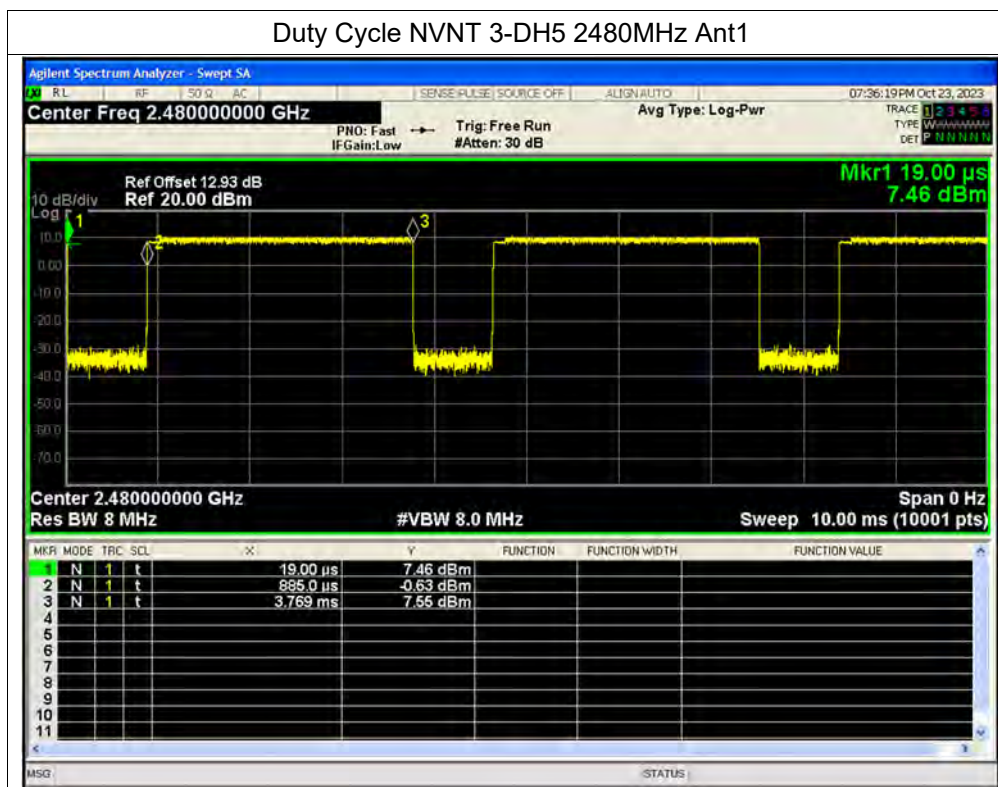

**A.3. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	10.81	0	10.81	0.01205	30	Pass
NVNT	1-DH5	2441	Ant1	10.79	0	10.79	0.01199	30	Pass
NVNT	1-DH5	2480	Ant1	11.8	0	11.8	0.01514	30	Pass
NVNT	2-DH5	2402	Ant1	9.6	0	9.6	0.00912	30	Pass
NVNT	2-DH5	2441	Ant1	10.45	0	10.45	0.01109	30	Pass
NVNT	2-DH5	2480	Ant1	10.01	0	10.01	0.01002	30	Pass
NVNT	3-DH5	2402	Ant1	9.88	0	9.88	0.00973	30	Pass
NVNT	3-DH5	2441	Ant1	10.51	0	10.51	0.01125	30	Pass
NVNT	3-DH5	2480	Ant1	10.25	0	10.25	0.01059	30	Pass

Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1



Peak Power NVNT 1-DH5 2441MHz Ant1



Peak Power NVNT 1-DH5 2480MHz Ant1



Peak Power NVNT 2-DH5 2402MHz Ant1



Peak Power NVNT 2-DH5 2441MHz Ant1



Peak Power NVNT 2-DH5 2480MHz Ant1



Peak Power NVNT 3-DH5 2402MHz Ant1




Peak Power NVNT 3-DH5 2441MHz Ant1





Peak Power NVNT 3-DH5 2480MHz Ant1

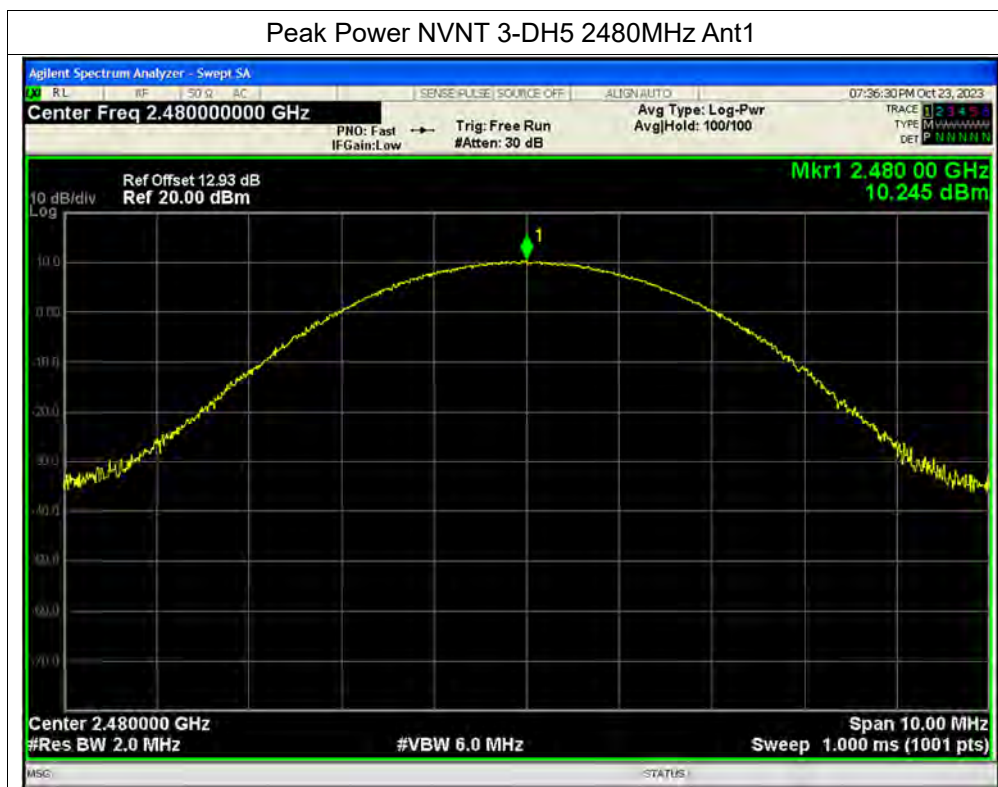

**A.4. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	9.33	1.12	10.45	0.01109	30	Pass
NVNT	1-DH5	2441	Ant1	9.07	1.1	10.17	0.0104	30	Pass
NVNT	1-DH5	2480	Ant1	10.33	1.1	11.43	0.0139	30	Pass
NVNT	2-DH5	2402	Ant1	5.92	1.12	7.04	0.00506	30	Pass
NVNT	2-DH5	2441	Ant1	6.63	1.12	7.75	0.00596	30	Pass
NVNT	2-DH5	2480	Ant1	6.27	1.12	7.39	0.00548	30	Pass
NVNT	3-DH5	2402	Ant1	5.85	1.14	6.99	0.005	30	Pass
NVNT	3-DH5	2441	Ant1	6.59	1.12	7.71	0.0059	30	Pass
NVNT	3-DH5	2480	Ant1	6.34	1.14	7.48	0.0056	30	Pass



Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1



Average Power NVNT 1-DH5 2480MHz Ant1




Average Power NVNT 2-DH5 2402MHz Ant1

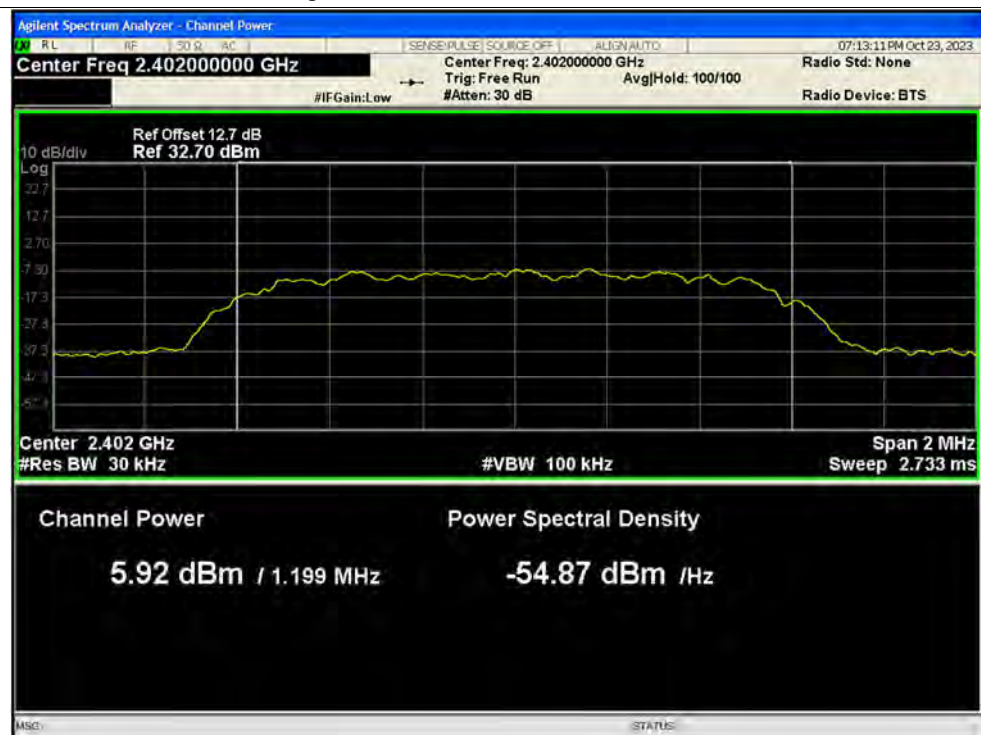




Average Power NVNT 2-DH5 2441MHz Ant1

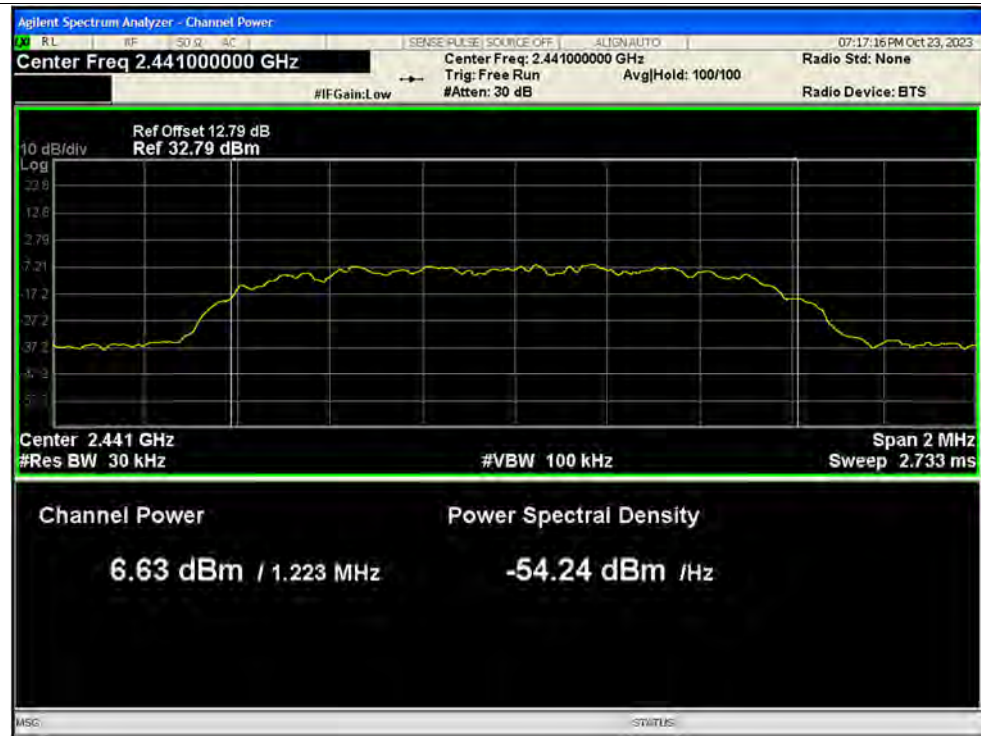


Average Power NVNT 2-DH5 2480MHz Ant1

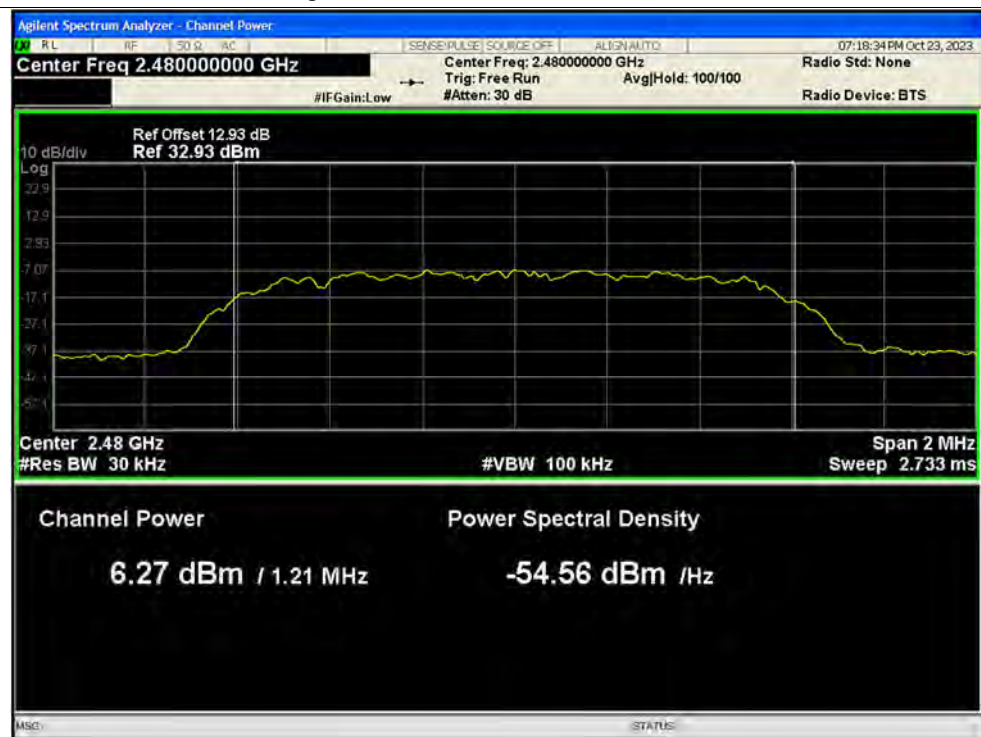




Average Power NVNT 3-DH5 2402MHz Ant1

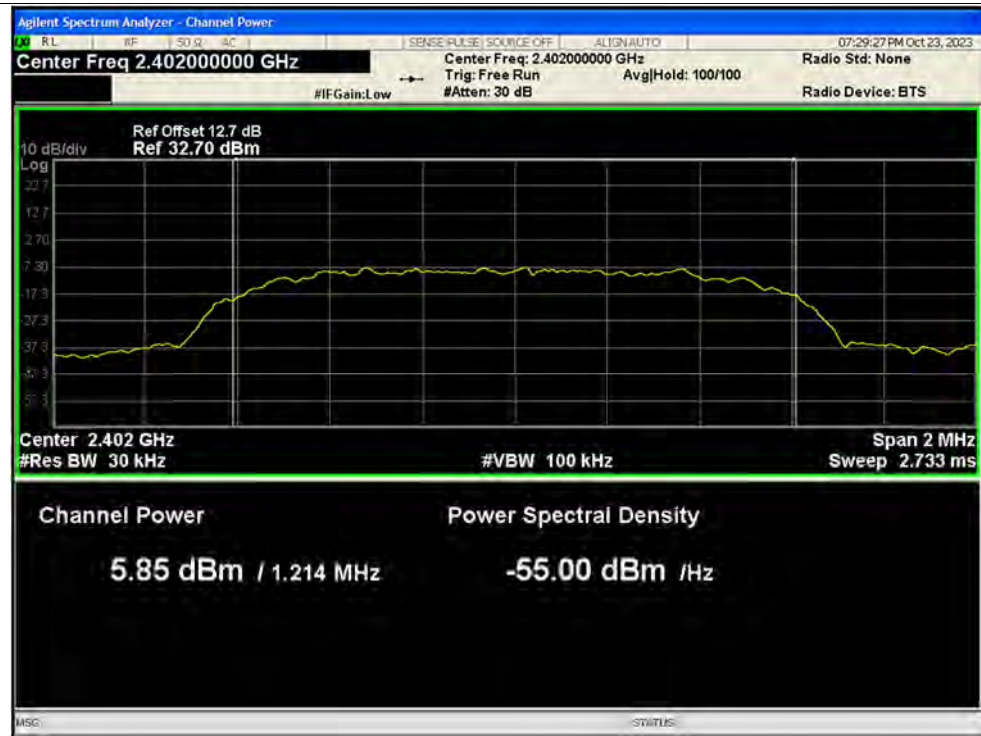


Average Power NVNT 3-DH5 2441MHz Ant1

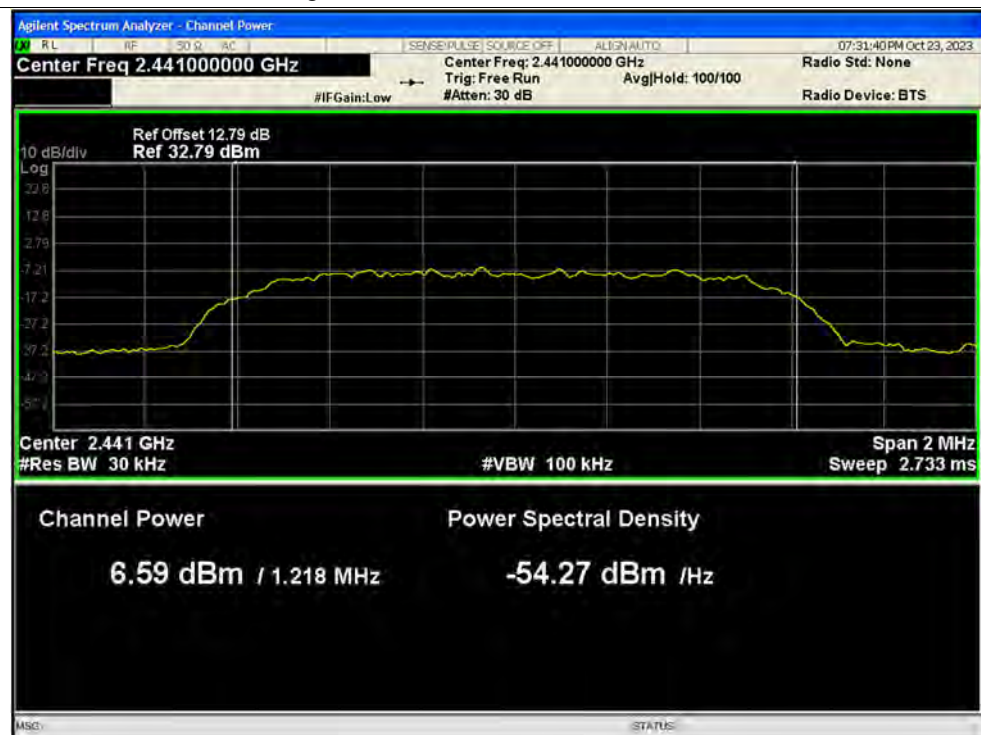



Average Power NVNT 3-DH5 2480MHz Ant1

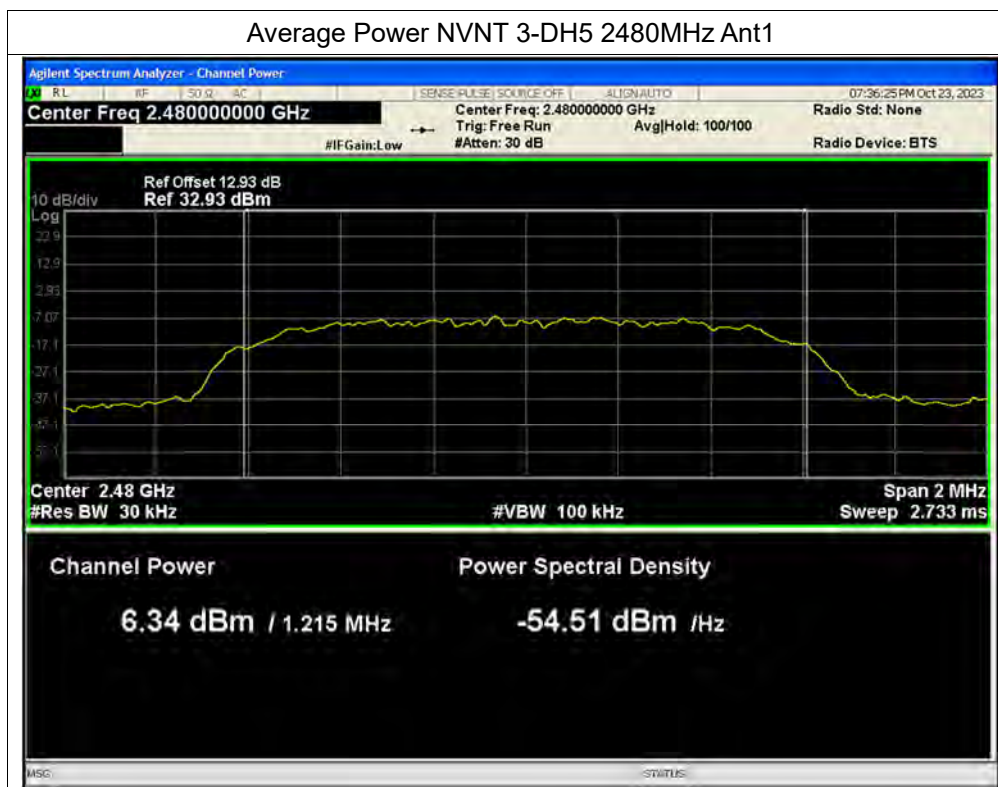

**A.5. 20 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.943
NVNT	1-DH5	2441	Ant1	0.94
NVNT	1-DH5	2480	Ant1	0.94
NVNT	2-DH5	2402	Ant1	1.282
NVNT	2-DH5	2441	Ant1	1.318
NVNT	2-DH5	2480	Ant1	1.285
NVNT	3-DH5	2402	Ant1	1.281
NVNT	3-DH5	2441	Ant1	1.29
NVNT	3-DH5	2480	Ant1	1.314



Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

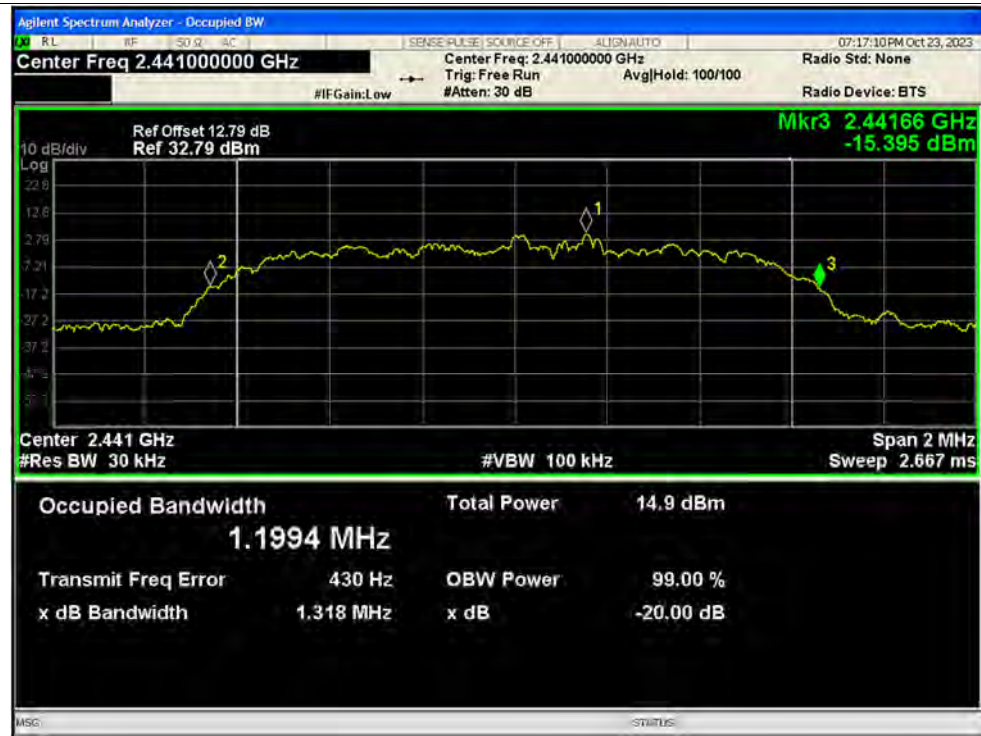

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

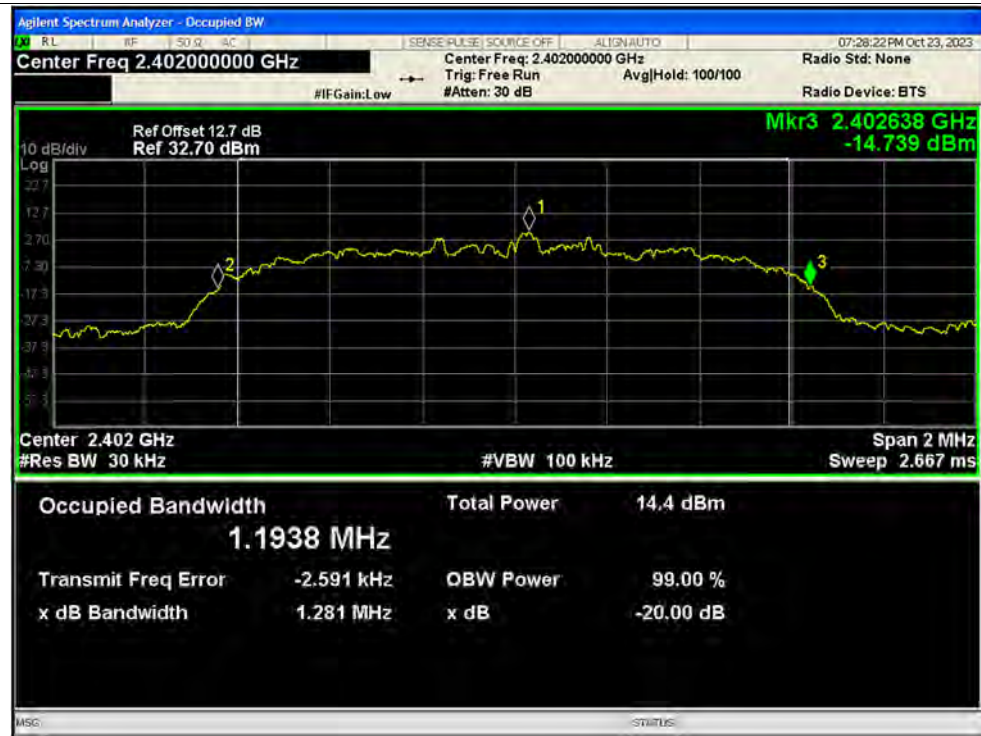


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1






-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

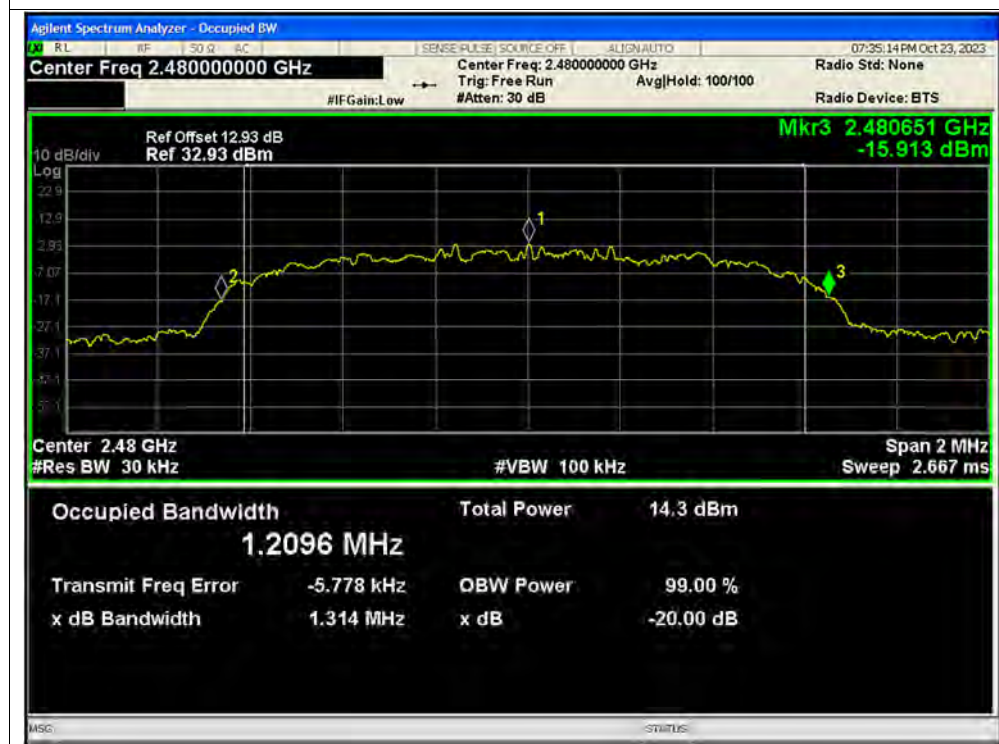


**A.6. Carried Frequency Separation**

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.028	2402.832	0.804	0.629	Pass
NVNT	2-DH5	Ant1	2402.016	2403.016	1	0.855	Pass
NVNT	3-DH5	Ant1	2402.16	2403.018	0.858	0.854	Pass

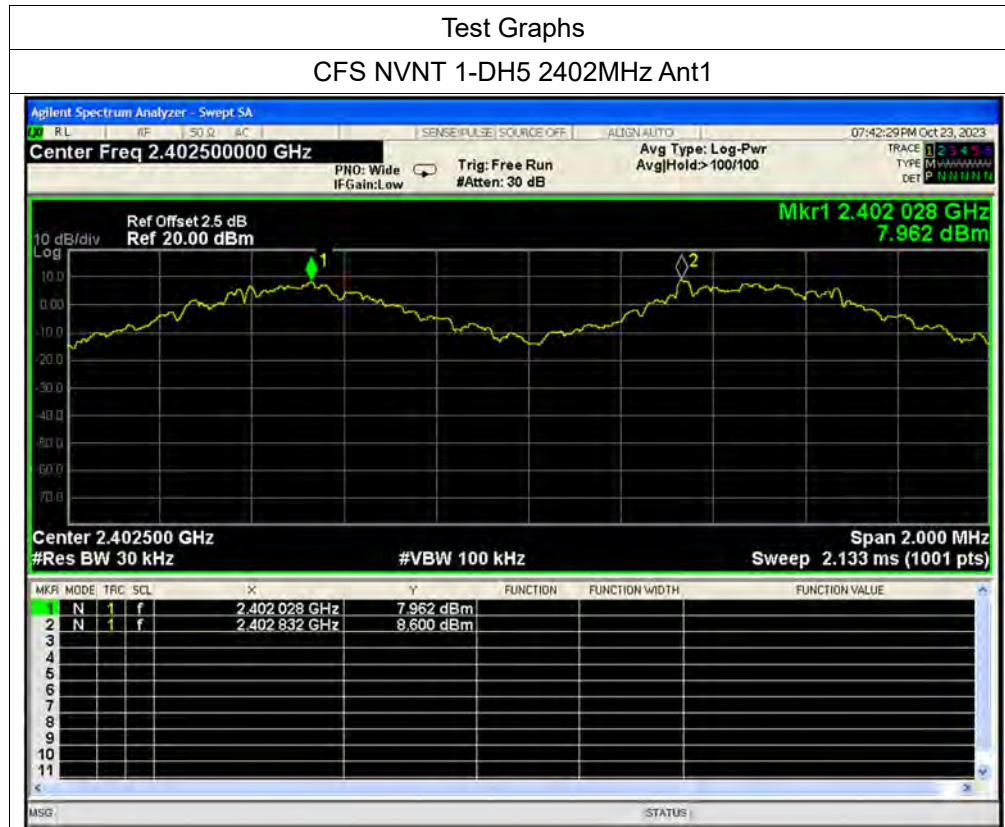




CFS NVNT 2-DH5 2402MHz Ant1

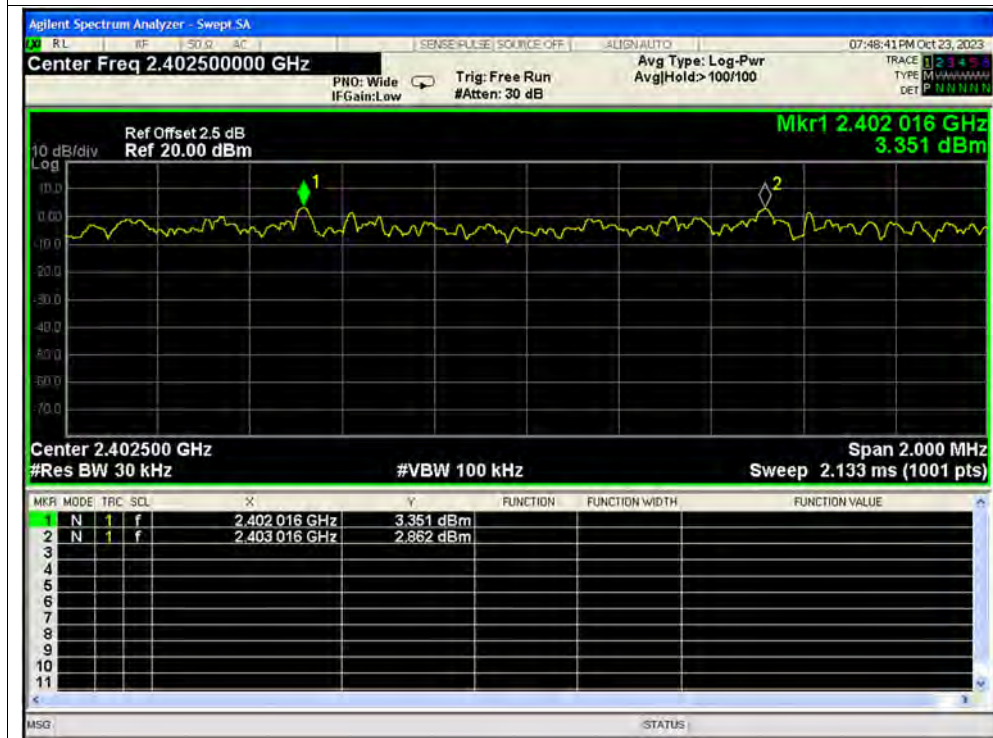

CFS NVNT 3-DH5 2402MHz Ant1

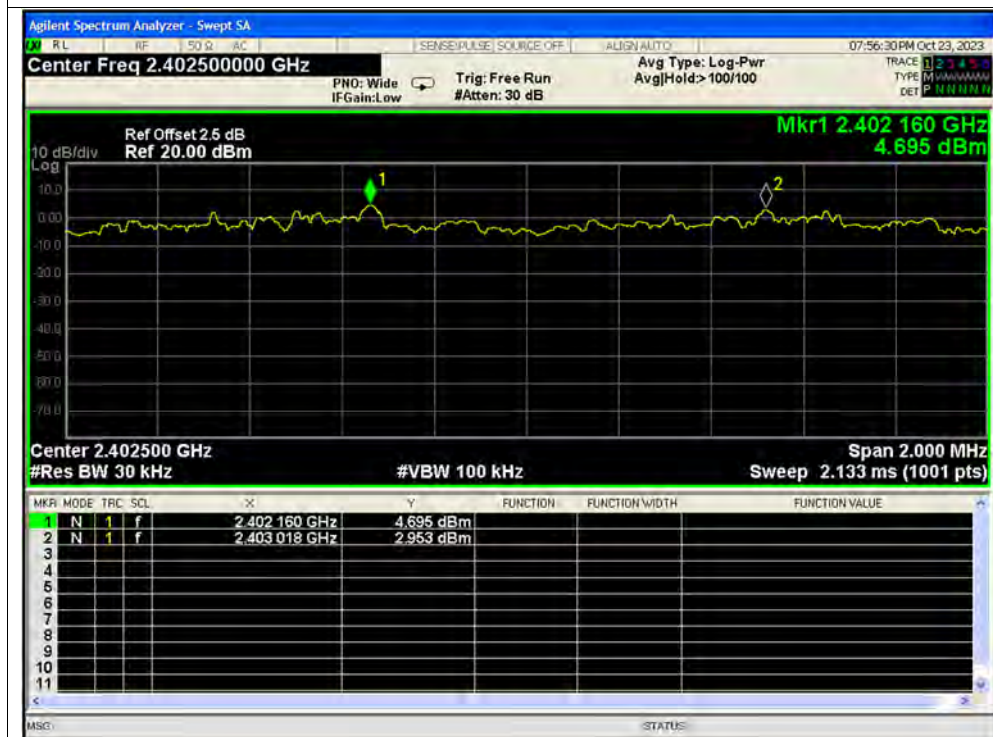


**A.7. Time of Occupancy (Dwell time)**


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.392	125.048	319	31600	400	Pass
NVNT	1-DH3	2402	Ant1	1.648	260.384	158	31600	400	Pass
NVNT	1-DH5	2402	Ant1	2.896	286.704	99	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.384	121.728	317	31600	400	Pass
NVNT	2-DH3	2402	Ant1	1.636	268.304	164	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.884	299.936	104	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.382	121.858	319	31600	400	Pass
NVNT	3-DH3	2402	Ant1	1.632	244.8	150	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.883	308.481	107	31600	400	Pass

Test Graphs

Dwell NVLT 1-DH1 2402MHz Ant1 One Burst

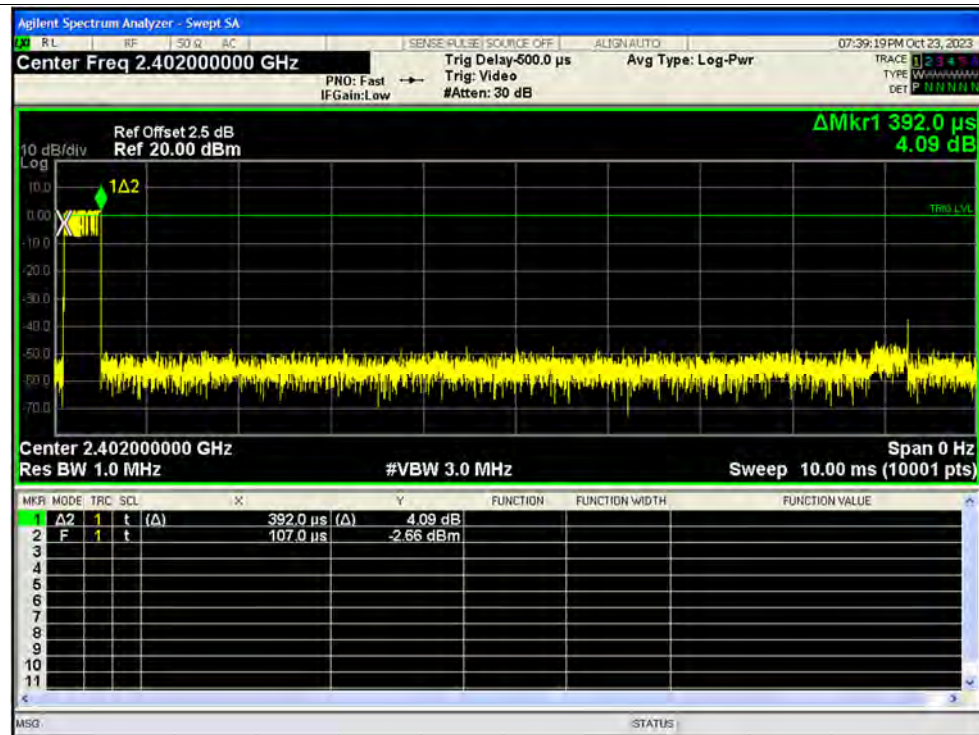


Dwell NVLT 1-DH1 2402MHz Ant1 Accumulated

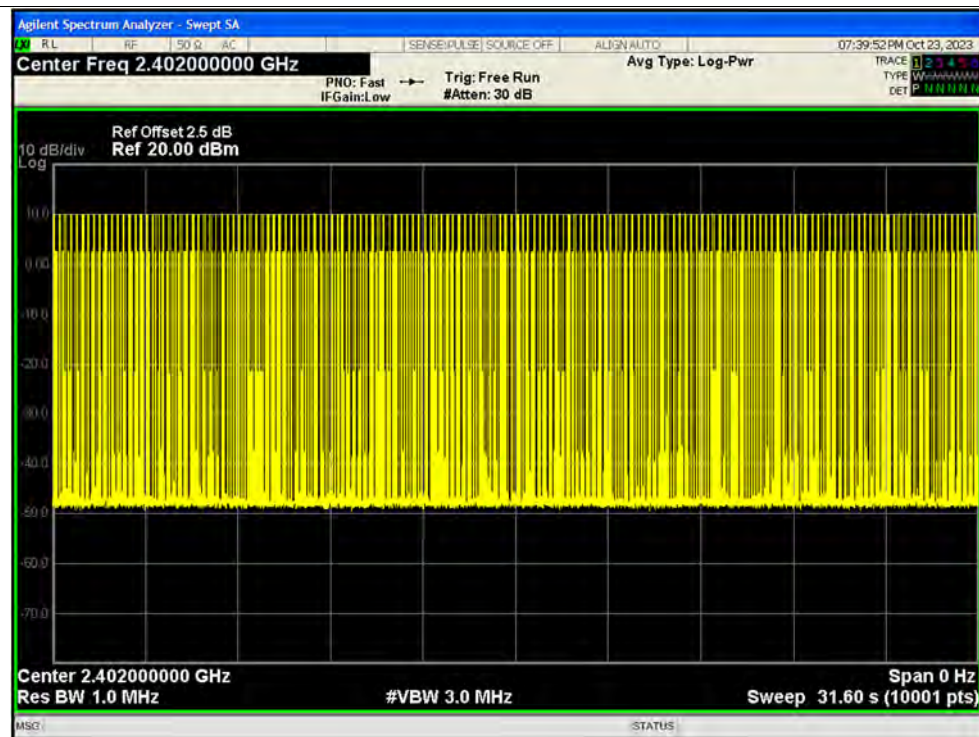



Dwell NVLT 1-DH3 2402MHz Ant1 One Burst

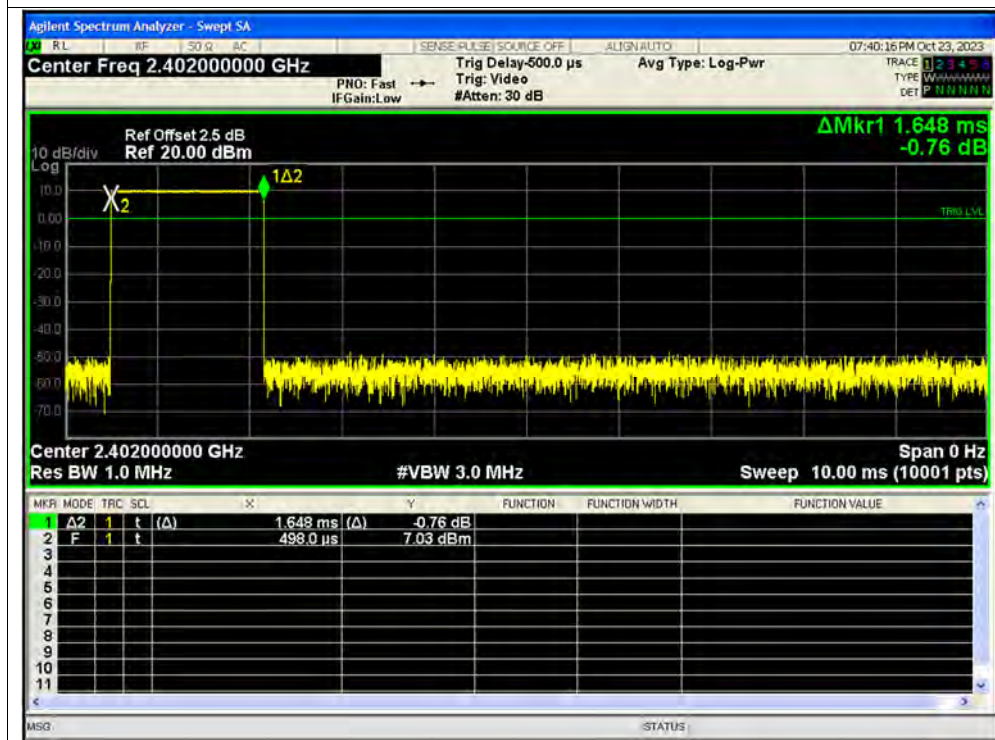


Dwell NVLT 1-DH3 2402MHz Ant1 Accumulated






Dwell NVLT 1-DH5 2402MHz Ant1 One Burst

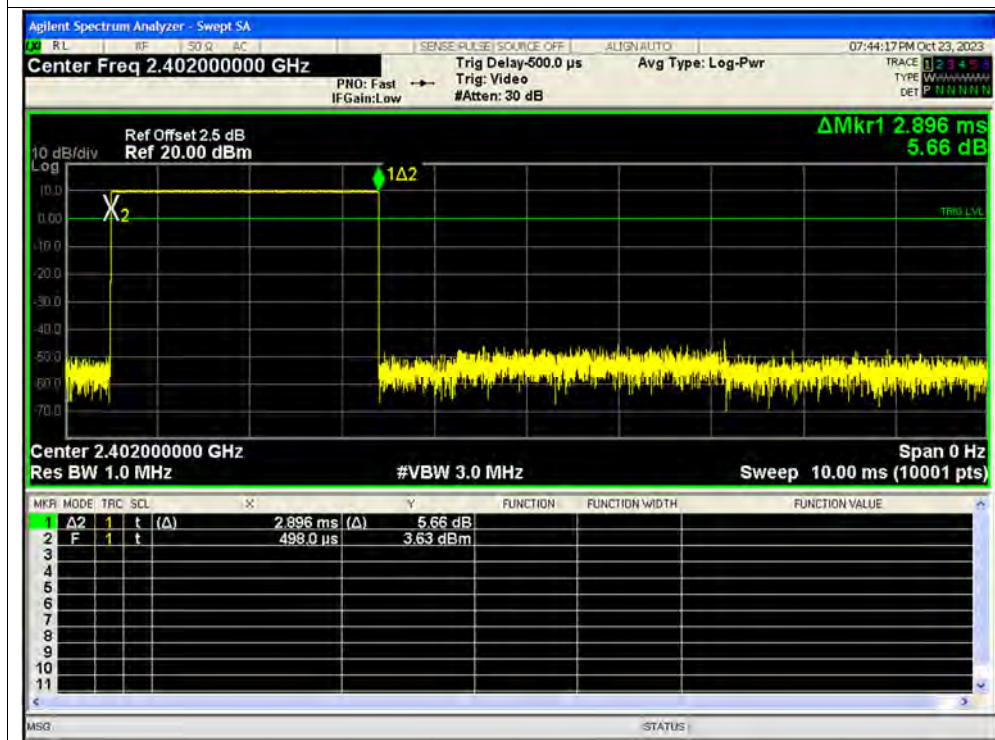


Dwell NVLT 1-DH5 2402MHz Ant1 Accumulated

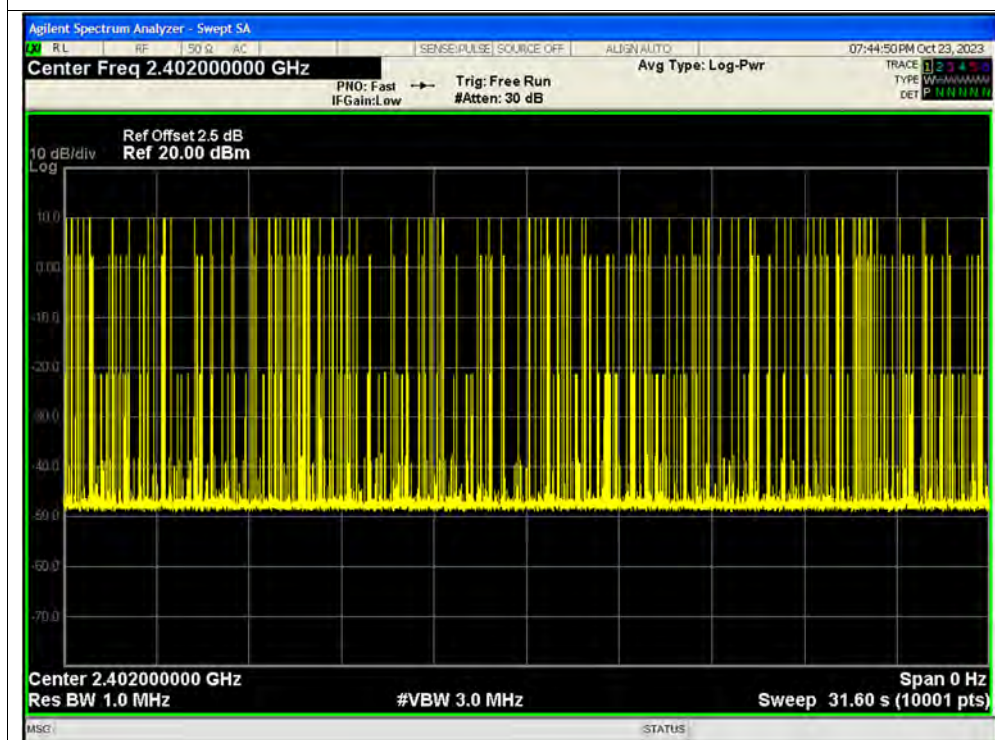




Dwell NVLT 2-DH1 2402MHz Ant1 One Burst

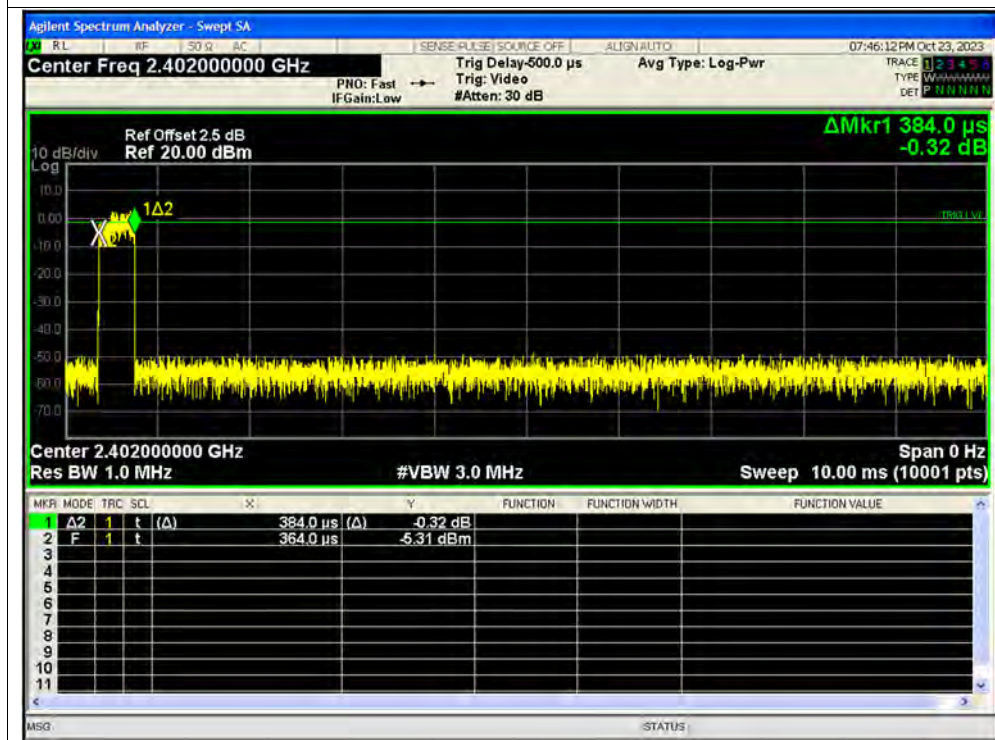


Dwell NVLT 2-DH1 2402MHz Ant1 Accumulated

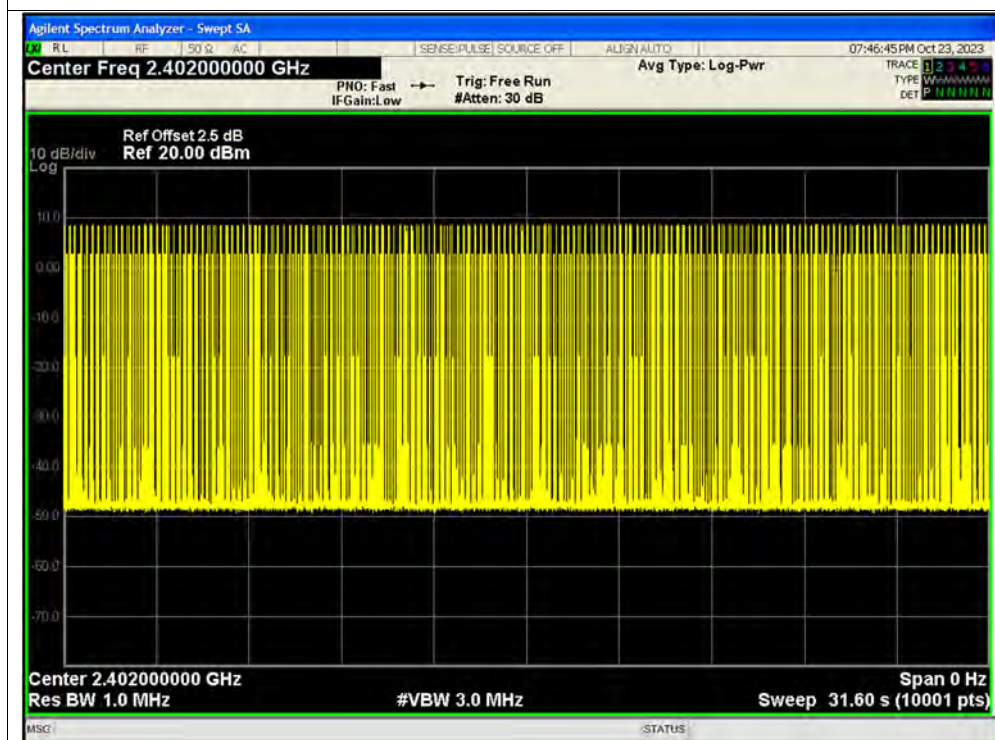




Dwell NVLT 2-DH3 2402MHz Ant1 One Burst

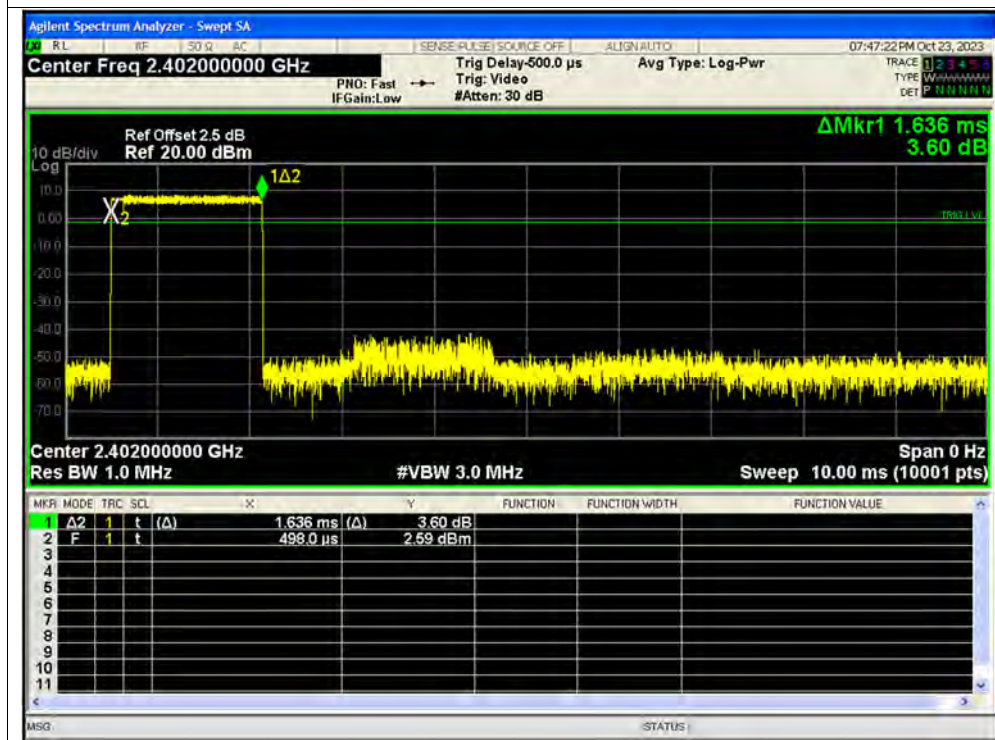


Dwell NVLT 2-DH3 2402MHz Ant1 Accumulated

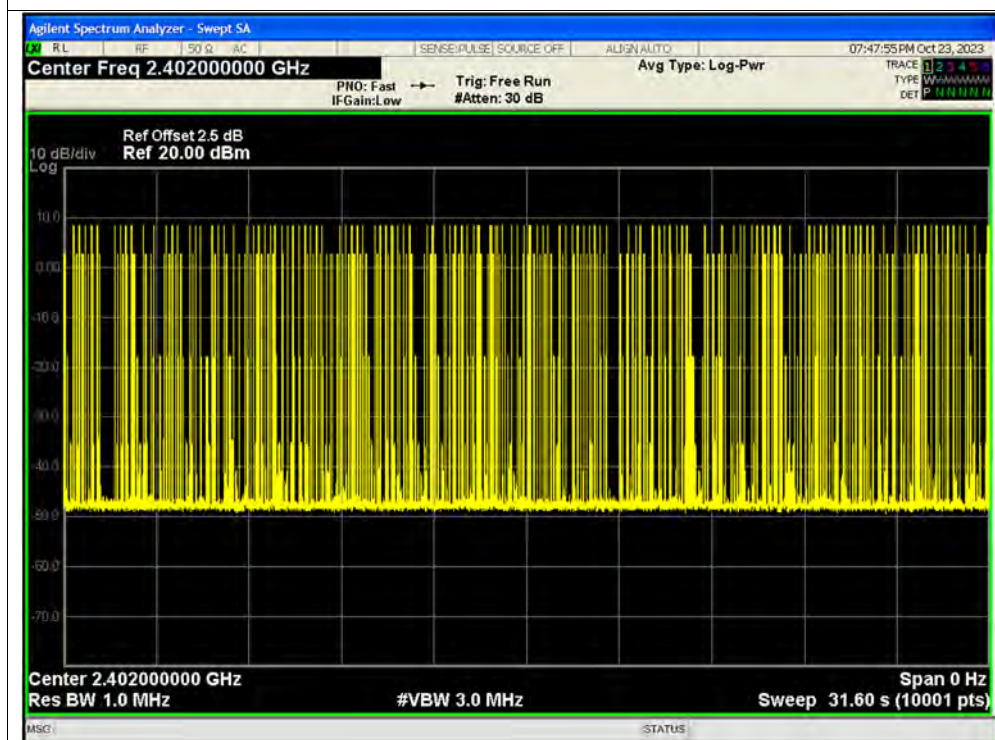




Dwell NVLT 2-DH5 2402MHz Ant1 One Burst

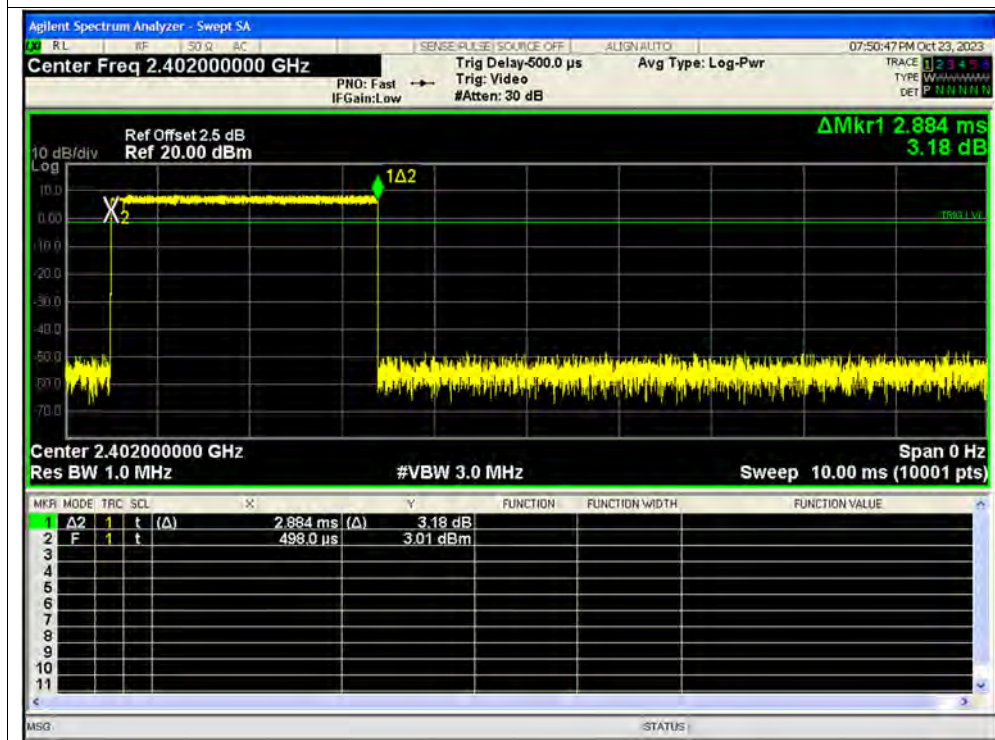

Dwell NVLT 2-DH5 2402MHz Ant1 Accumulated

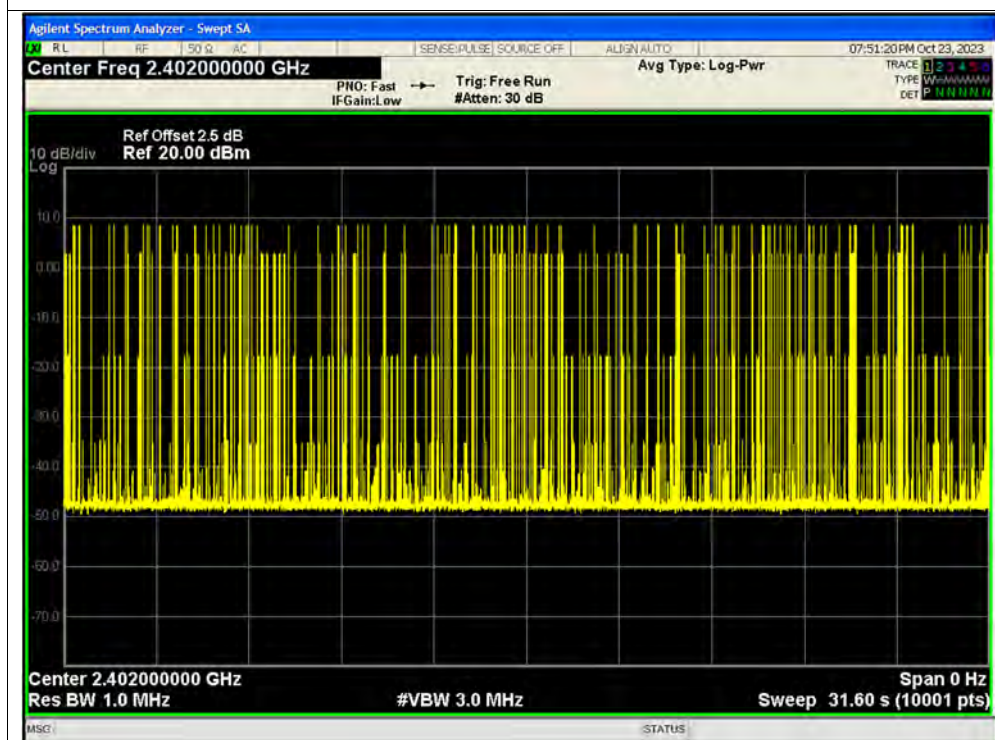





E-mail: service@morlab.cn



Dwell NVLT 3-DH3 2402MHz Ant1 One Burst

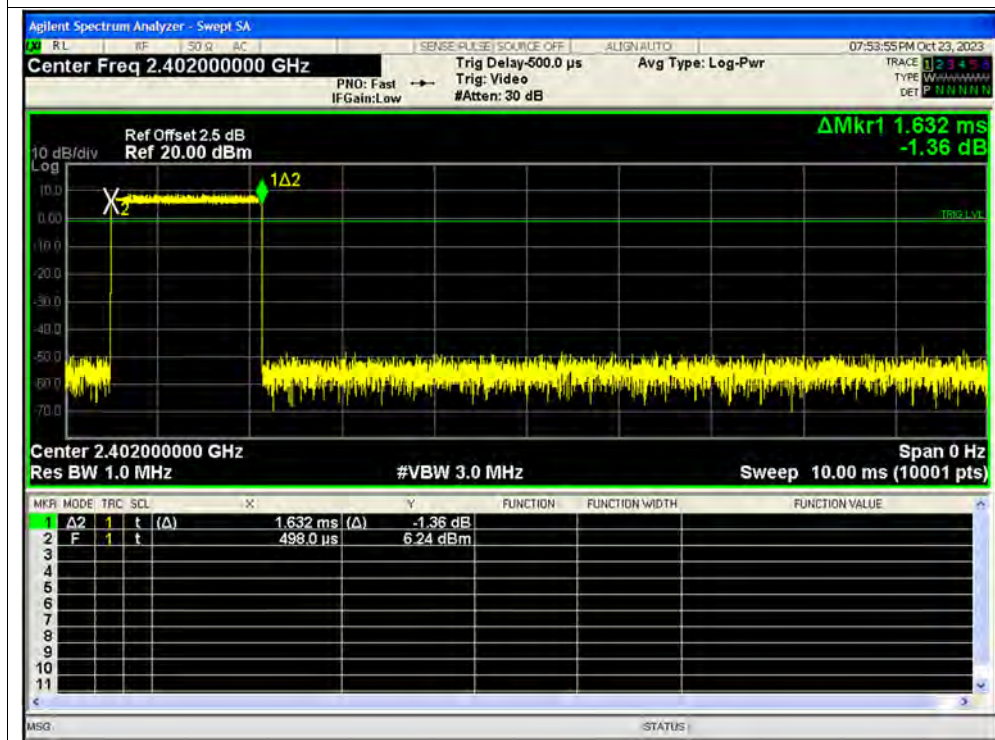


Dwell NVLT 3-DH3 2402MHz Ant1 Accumulated

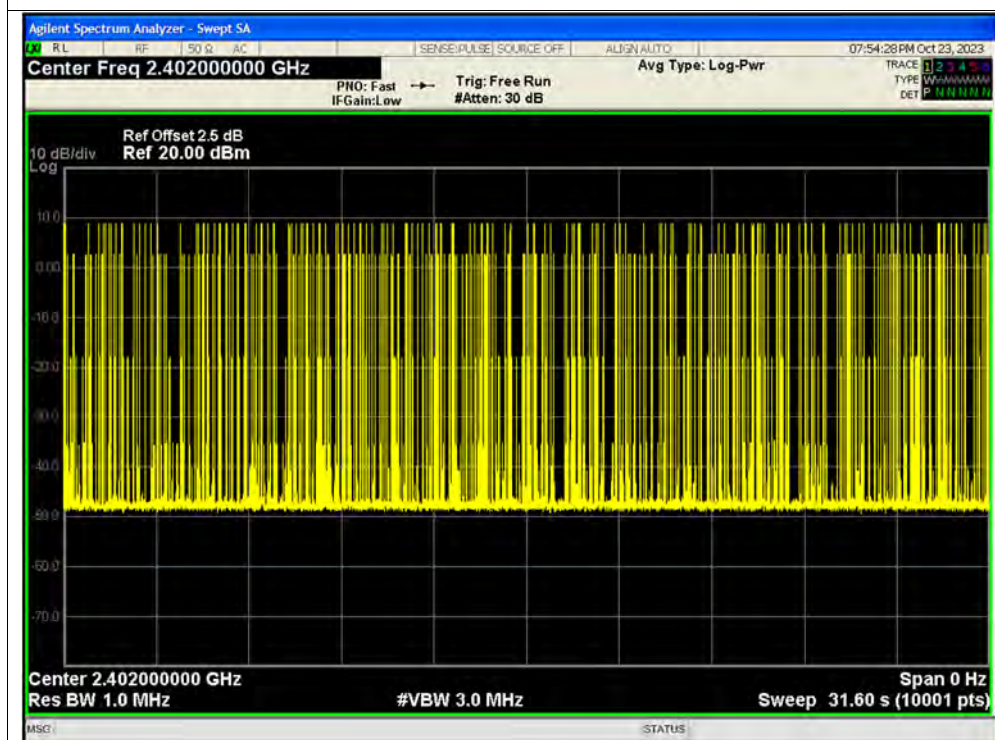




Dwell NVLT 3-DH5 2402MHz Ant1 One Burst

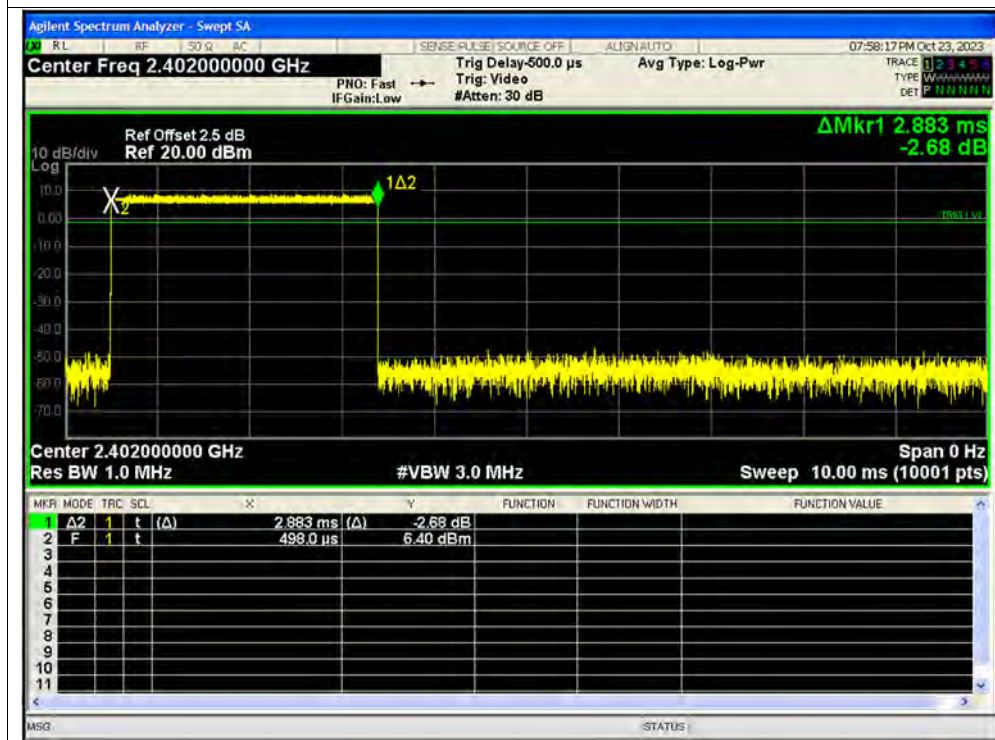

Dwell NVLT 3-DH5 2402MHz Ant1 Accumulated

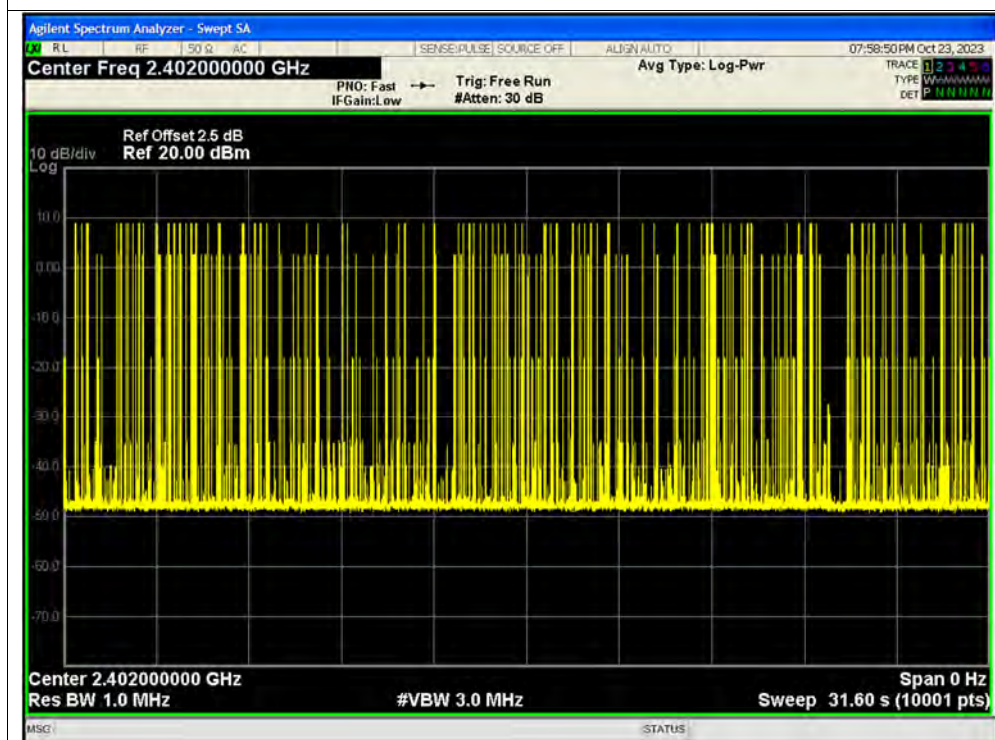



REPORT No.: SZ23080275W04

A.8. Conducted Spurious Emissions


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-49.37	-20	Pass
NVNT	1-DH5	2441	Ant1	-49.16	-20	Pass
NVNT	1-DH5	2480	Ant1	-50.56	-20	Pass
NVNT	2-DH5	2402	Ant1	-46.32	-20	Pass
NVNT	2-DH5	2441	Ant1	-46.17	-20	Pass
NVNT	2-DH5	2480	Ant1	-46.89	-20	Pass
NVNT	3-DH5	2402	Ant1	-46.19	-20	Pass
NVNT	3-DH5	2441	Ant1	-47.49	-20	Pass
NVNT	3-DH5	2480	Ant1	-47.1	-20	Pass

Test Graphs

Tx. Spurious NVLT 1-DH5 2402MHz Ant1 Ref




Tx. Spurious NVLT 1-DH5 2402MHz Ant1 Emission

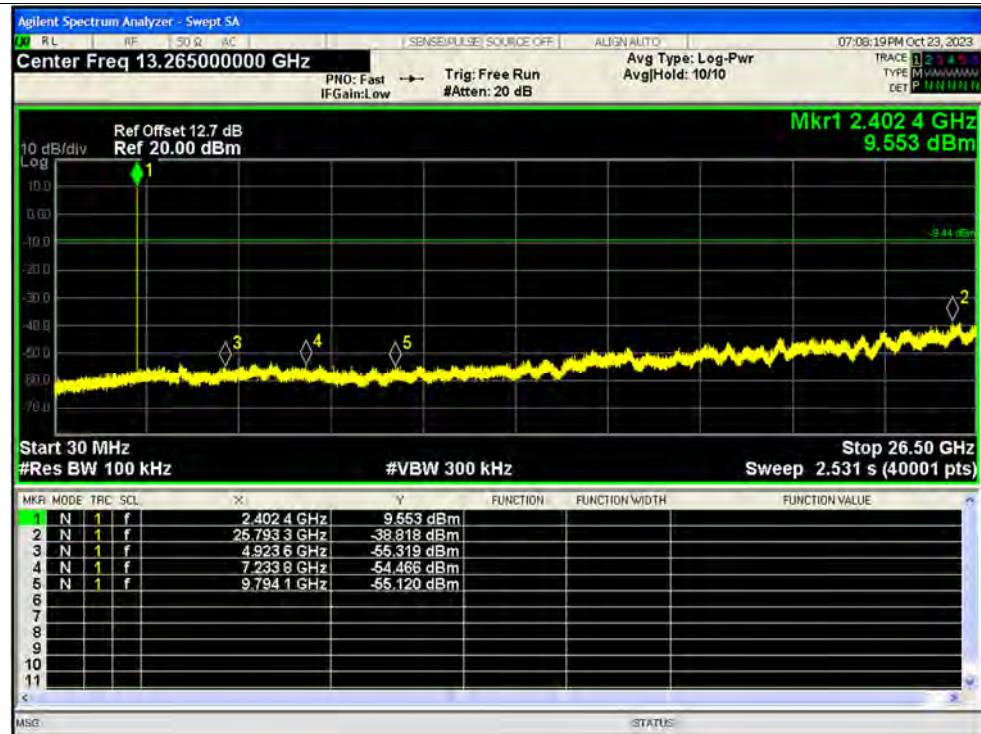

Tx. Spurious NVLT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVLT 1-DH5 2441MHz Ant1 Emission

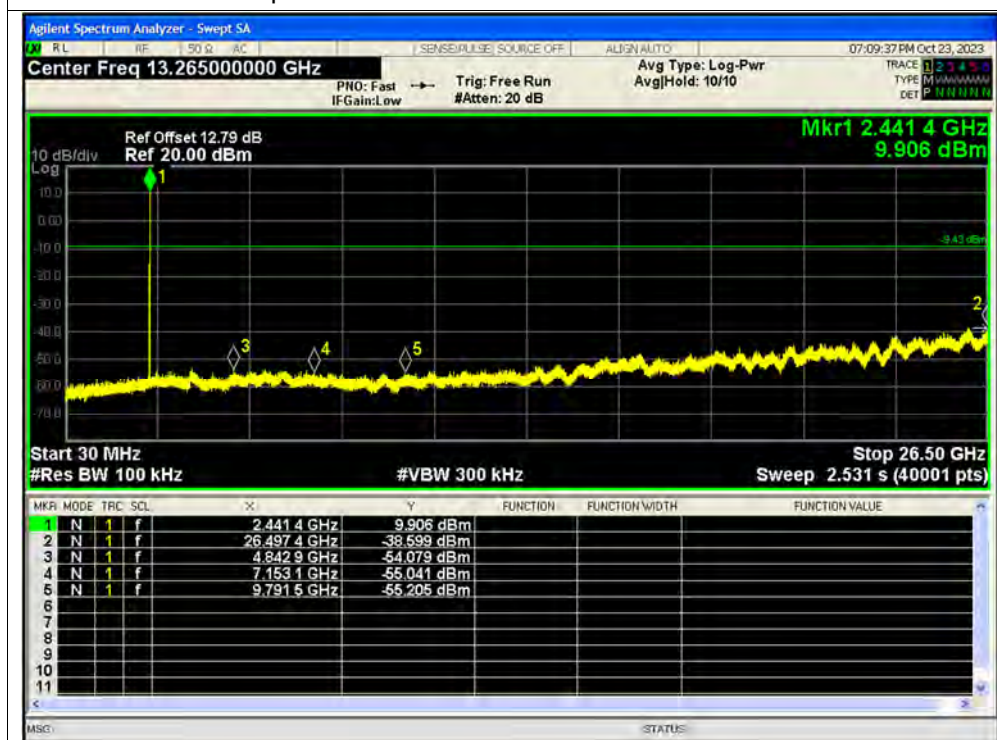

Tx. Spurious NVLT 1-DH5 2480MHz Ant1 Ref



Tx. Spurious NVLT 1-DH5 2480MHz Ant1 Emission

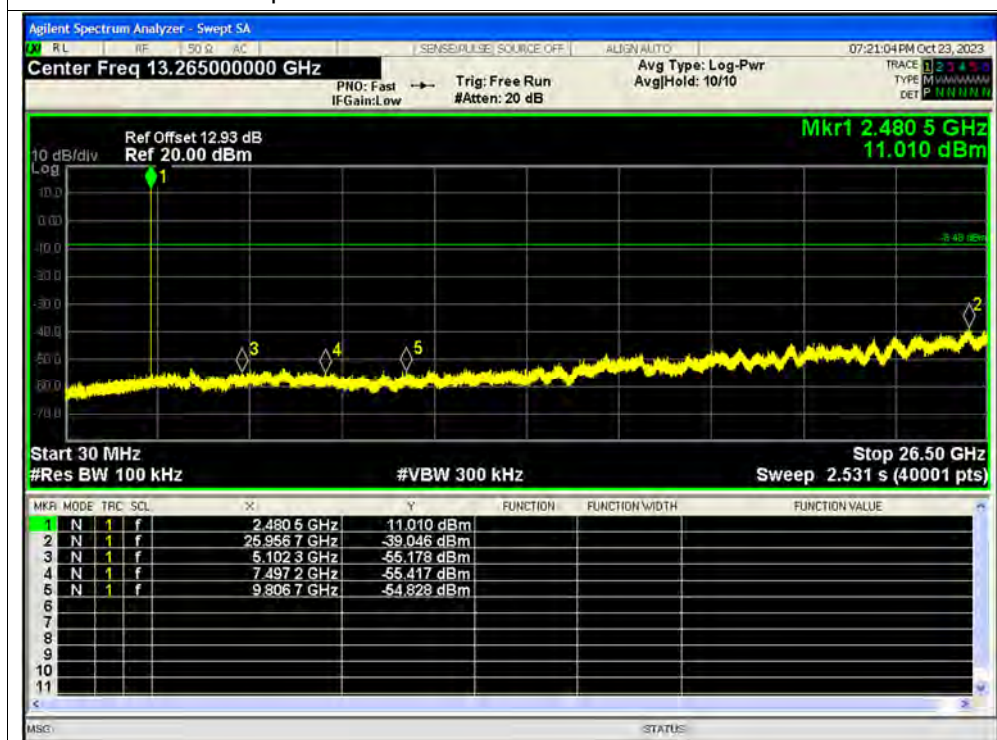




Tx. Spurious NVLT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVLT 2-DH5 2402MHz Ant1 Emission

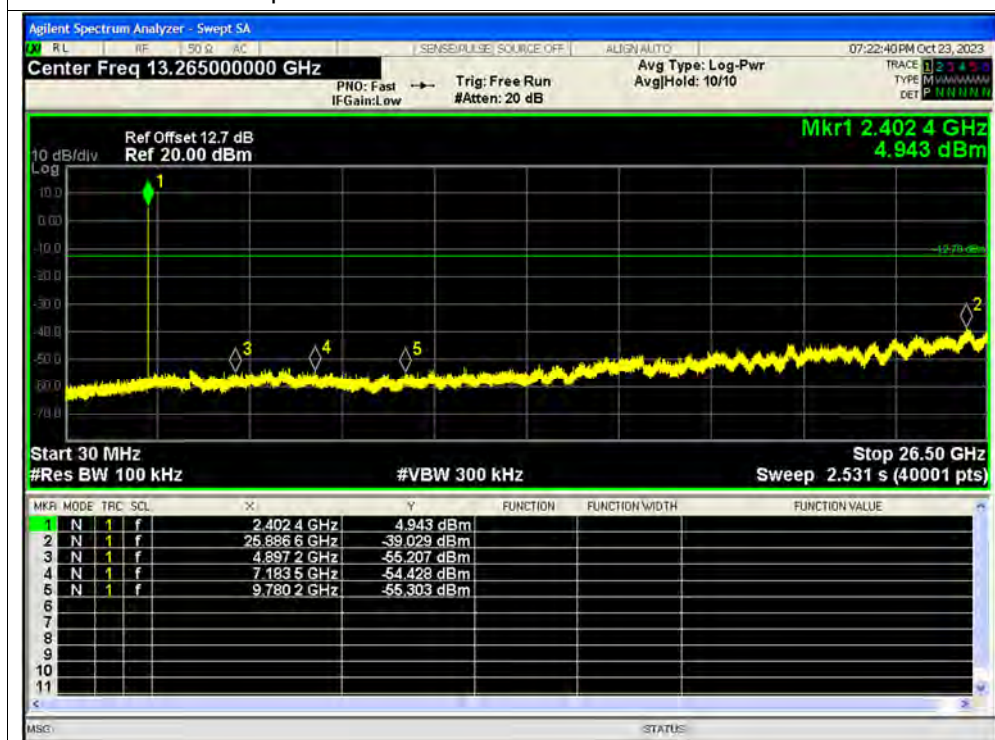

Tx. Spurious NVLT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVLT 2-DH5 2441MHz Ant1 Emission

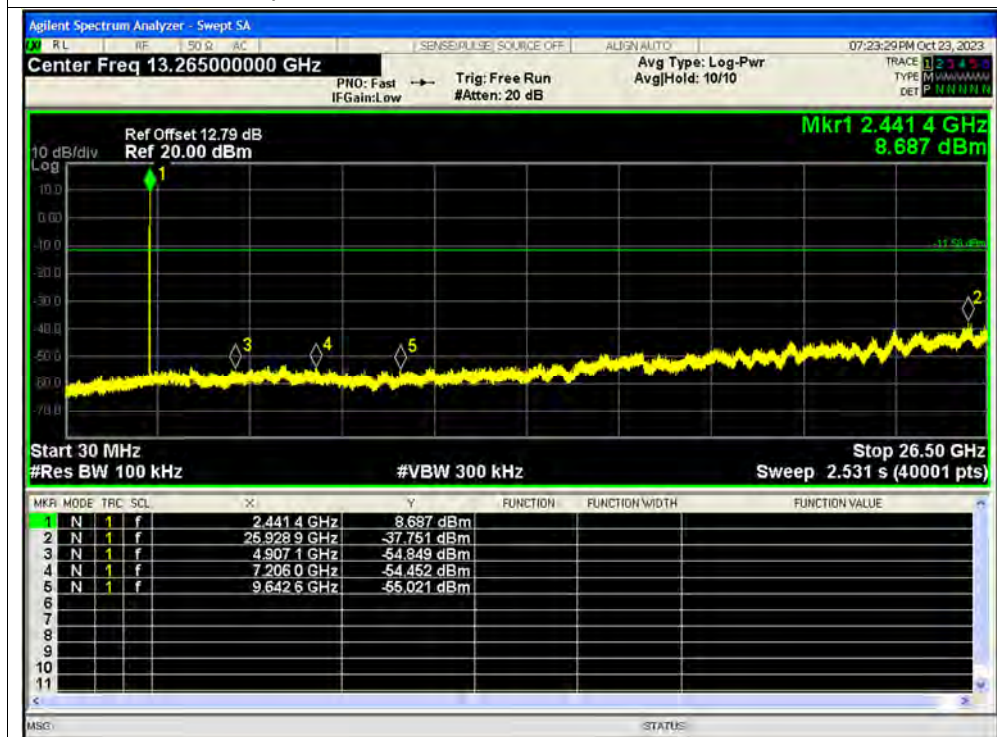

Tx. Spurious NVLT 2-DH5 2480MHz Ant1 Ref



Tx. Spurious NVLT 2-DH5 2480MHz Ant1 Emission

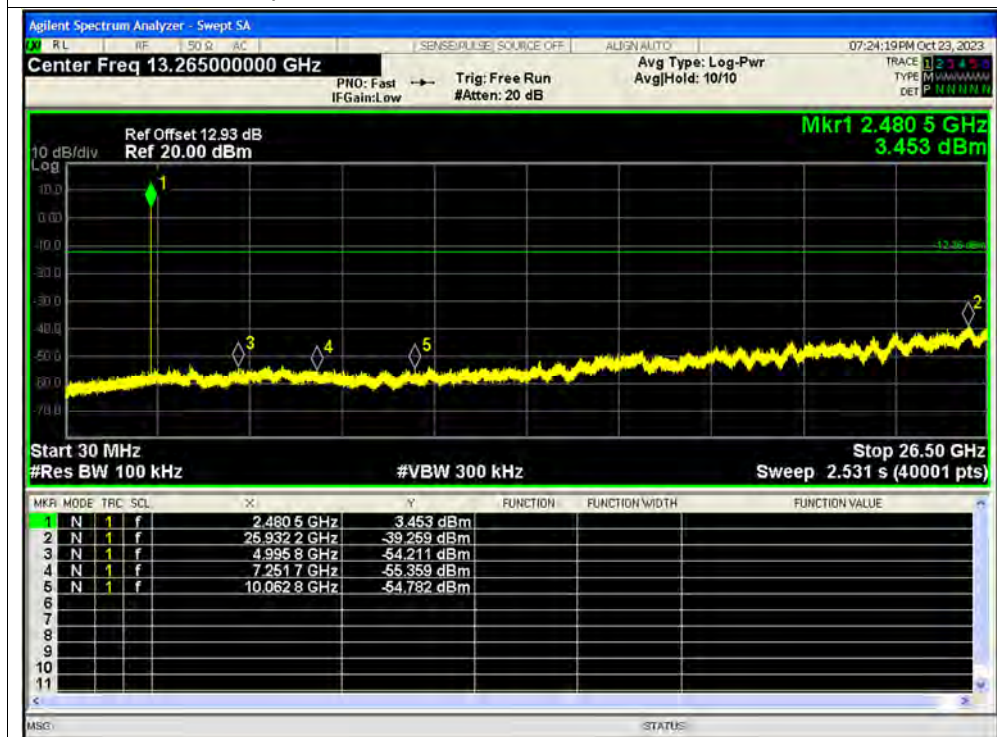




Tx. Spurious NVLT 3-DH5 2402MHz Ant1 Ref




Tx. Spurious NVLT 3-DH5 2402MHz Ant1 Emission

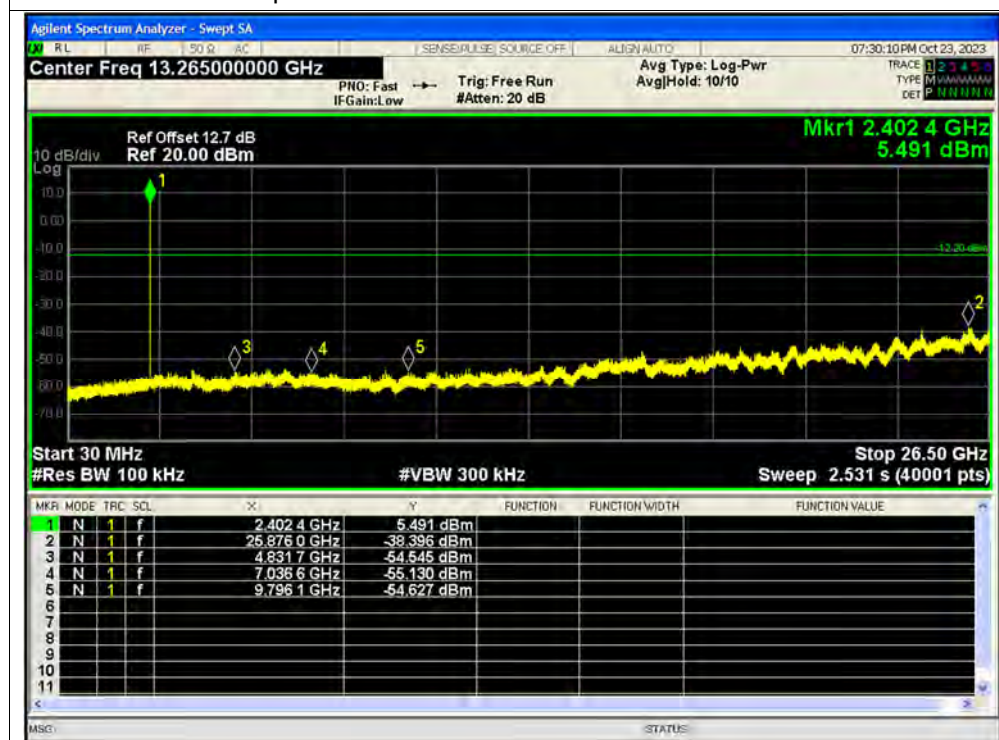

Tx. Spurious NVLT 3-DH5 2441MHz Ant1 Ref



Tx. Spurious NVLT 3-DH5 2441MHz Ant1 Emission

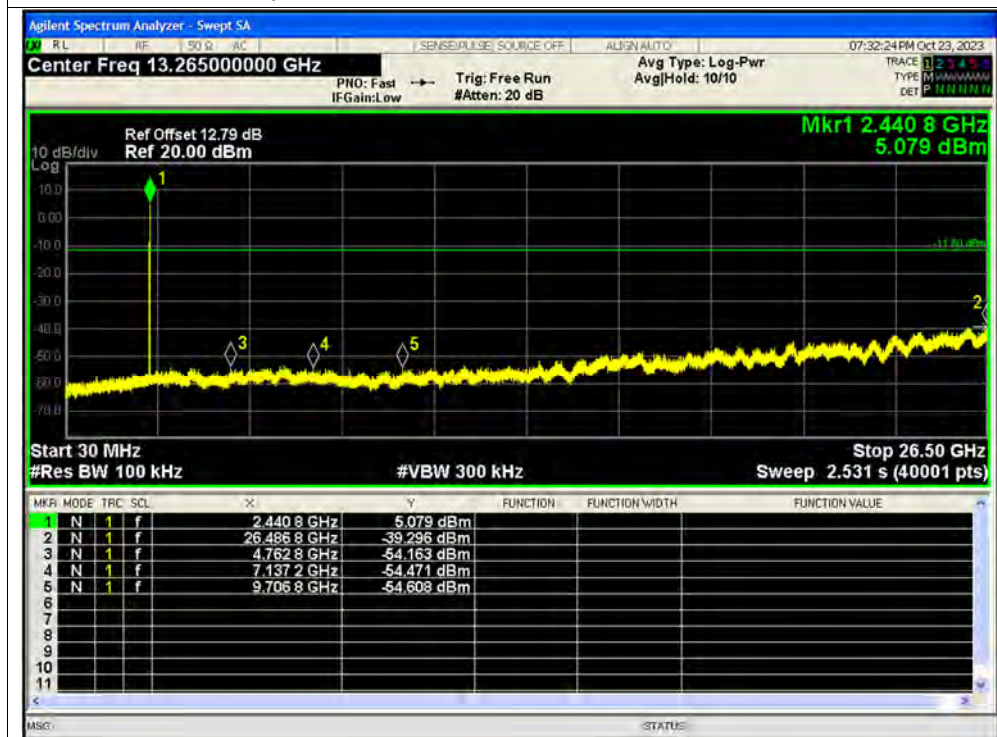




Tx. Spurious NVLT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVLT 3-DH5 2480MHz Ant1 Emission

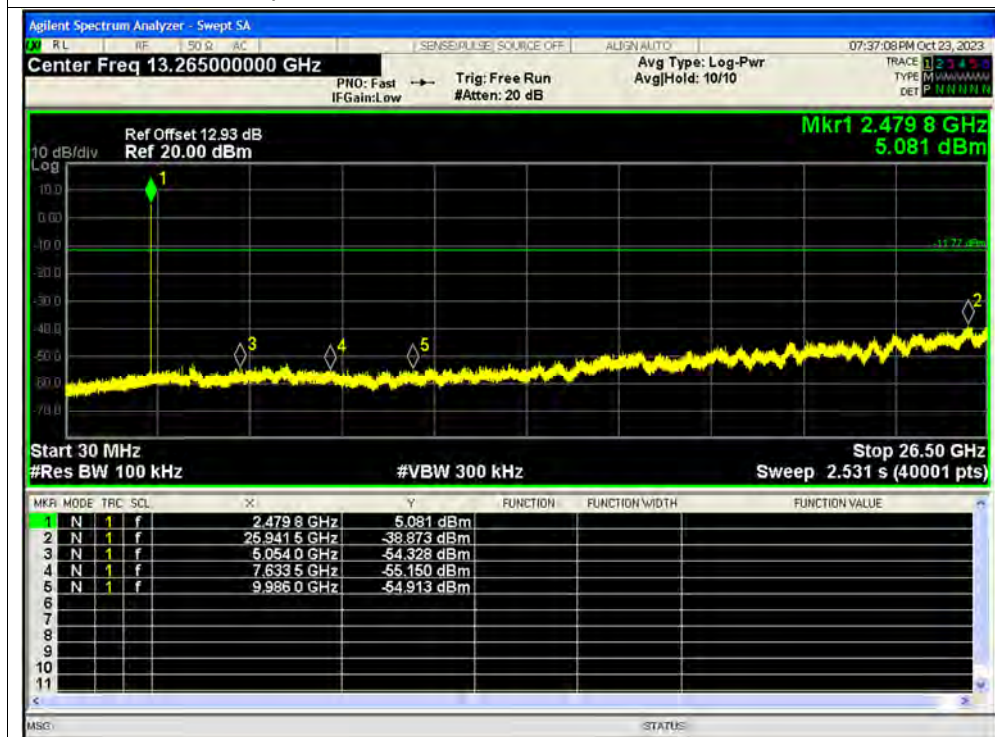

**A.9. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-55.97	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57.4	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-44.23	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-53.2	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-46.77	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-53.52	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-65.8	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-65.64	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-62.6	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-60.3	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-61.5	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-55.27	-20	Pass

Test Graphs

Band Edge NVLT 1-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVLT 1-DH5 2402MHz Ant1 No-Hopping Emission

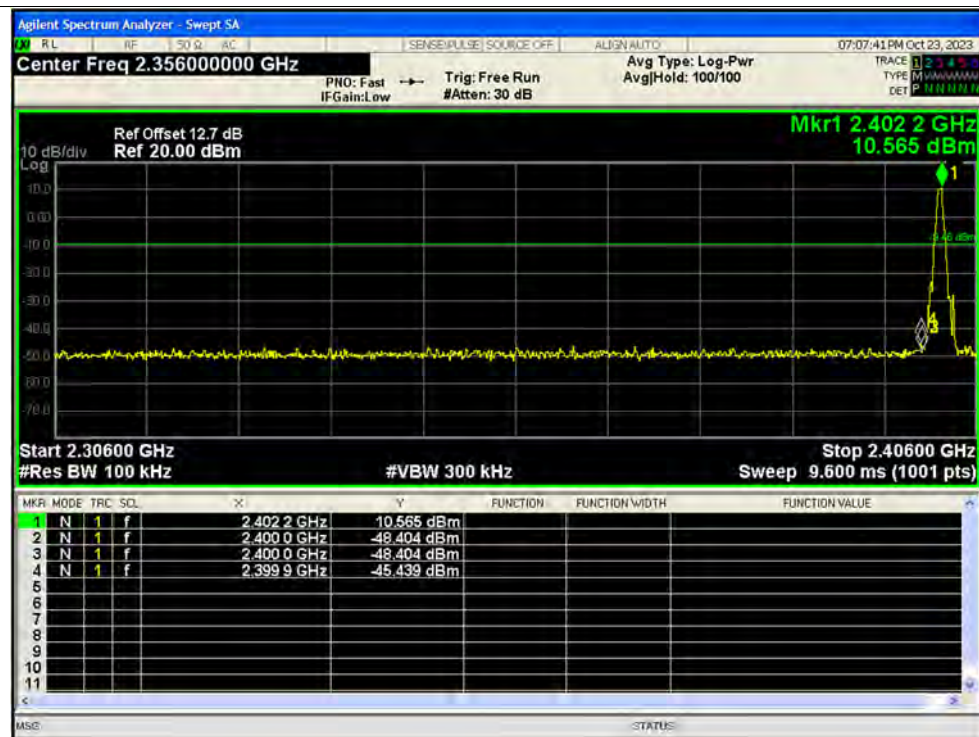

Band Edge NVLT 1-DH5 2480MHz Ant1 No-Hopping Ref




Band Edge NVLT 1-DH5 2480MHz Ant1 No-Hopping Emission

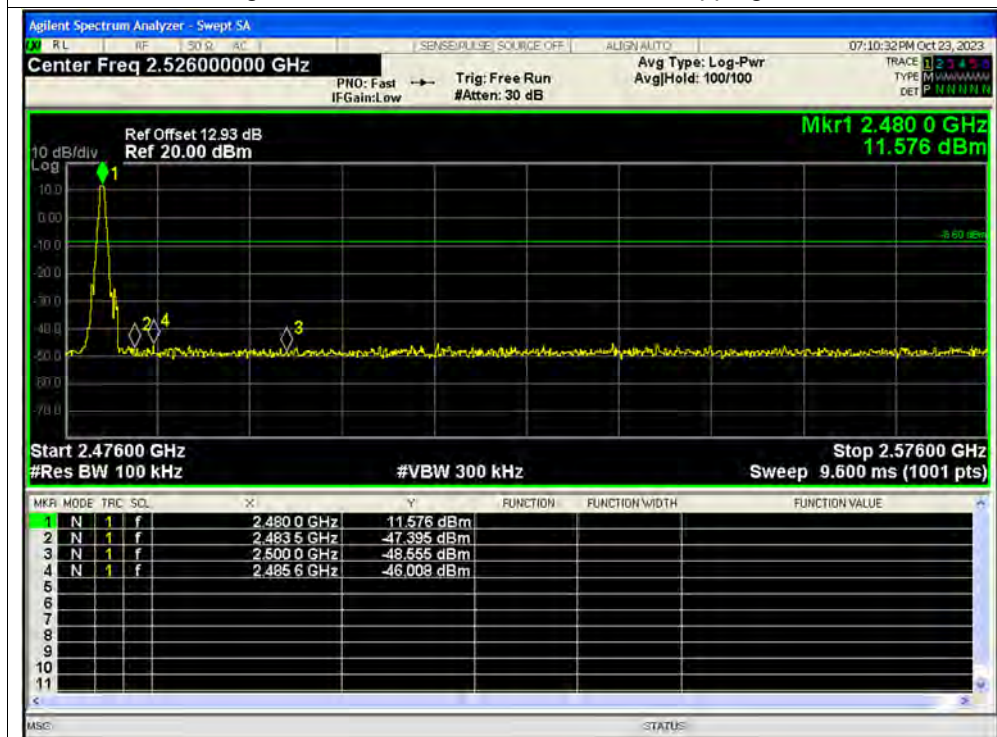

Band Edge NVLT 2-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVLT 2-DH5 2402MHz Ant1 No-Hopping Emission

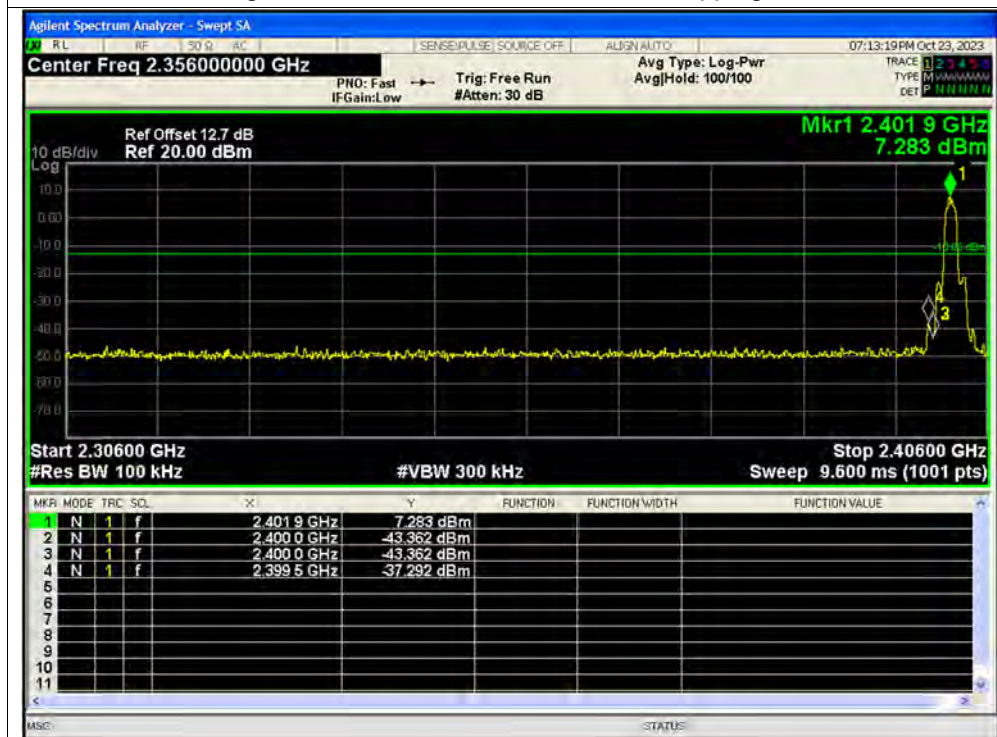

Band Edge NVLT 2-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVLT 2-DH5 2480MHz Ant1 No-Hopping Emission

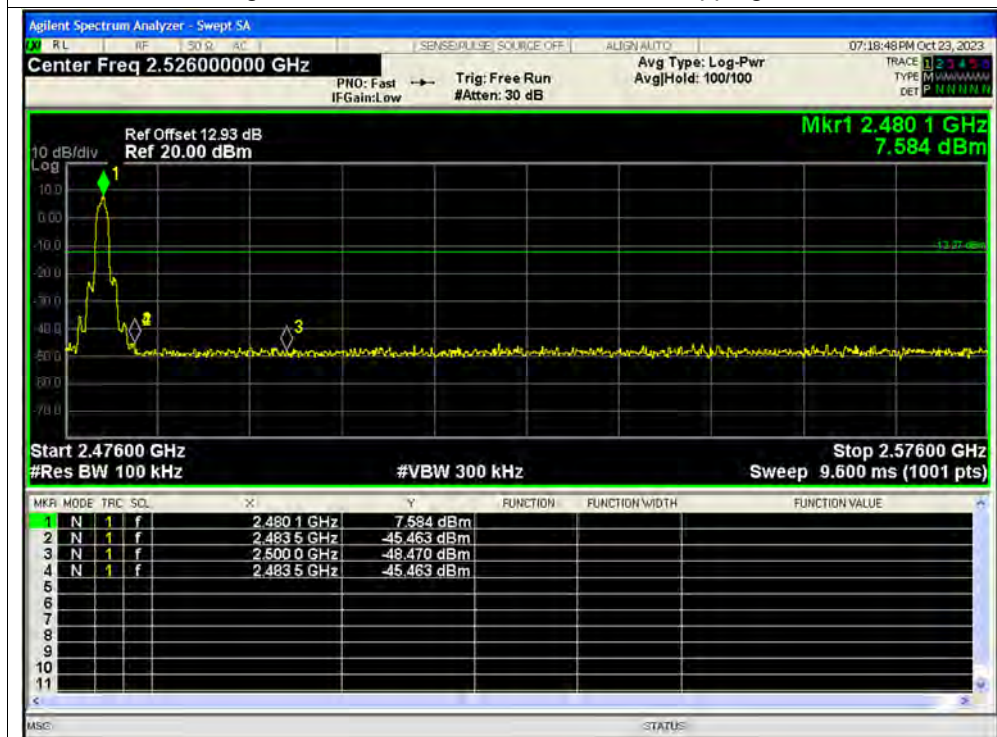




Band Edge NVLT 3-DH5 2402MHz Ant1 No-Hopping Ref




Band Edge NVLT 3-DH5 2402MHz Ant1 No-Hopping Emission

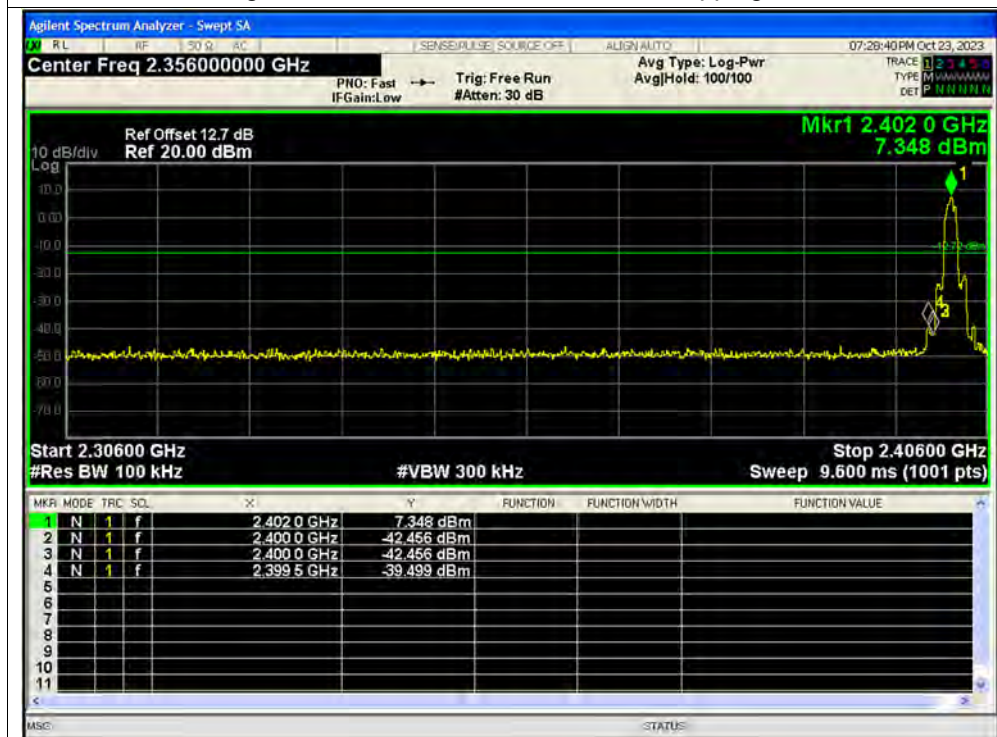

Band Edge NVLT 3-DH5 2480MHz Ant1 No-Hopping Ref



Band Edge NVLT 3-DH5 2480MHz Ant1 No-Hopping Emission

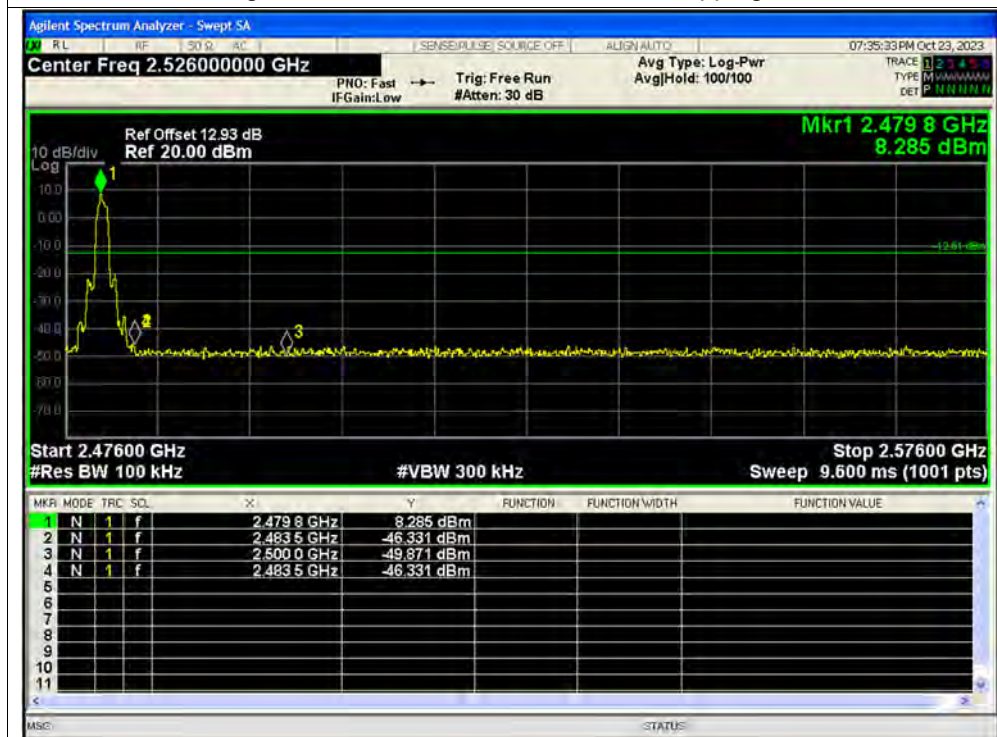




Test Graphs

Band Edge(Hopping) NVLT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 1-DH5 2402MHz Ant1 Hopping Emission

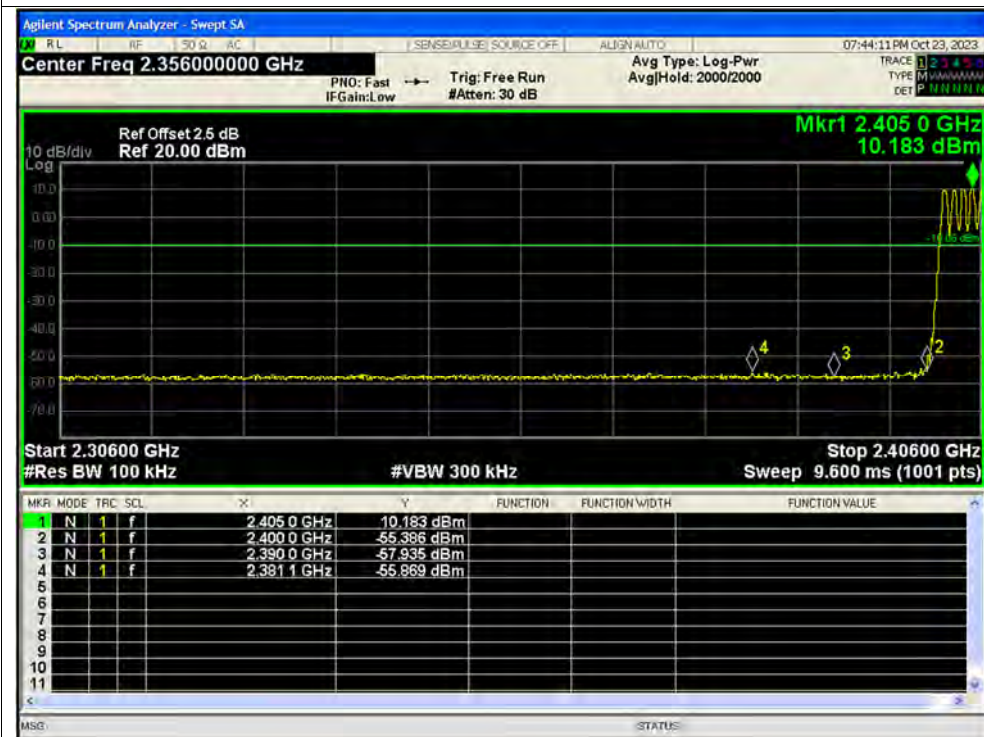




Band Edge(Hopping) NVLT 1-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVLT 1-DH5 2480MHz Ant1 Hopping Emission

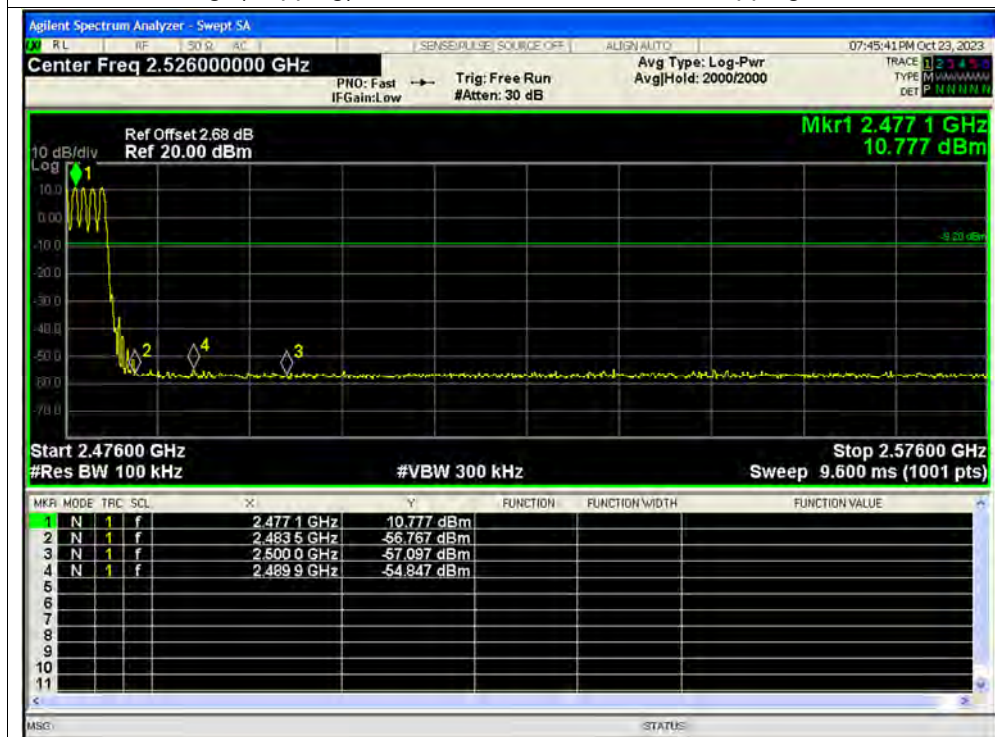

Band Edge(Hopping) NVLT 2-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVLT 2-DH5 2402MHz Ant1 Hopping Emission

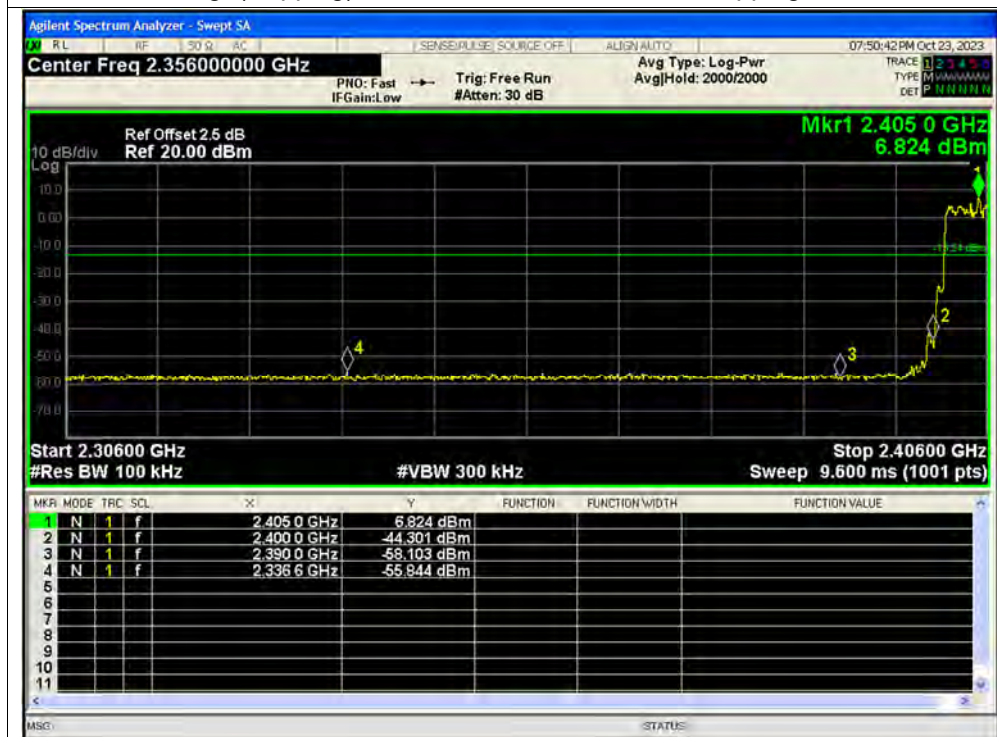

Band Edge(Hopping) NVLT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVLT 2-DH5 2480MHz Ant1 Hopping Emission

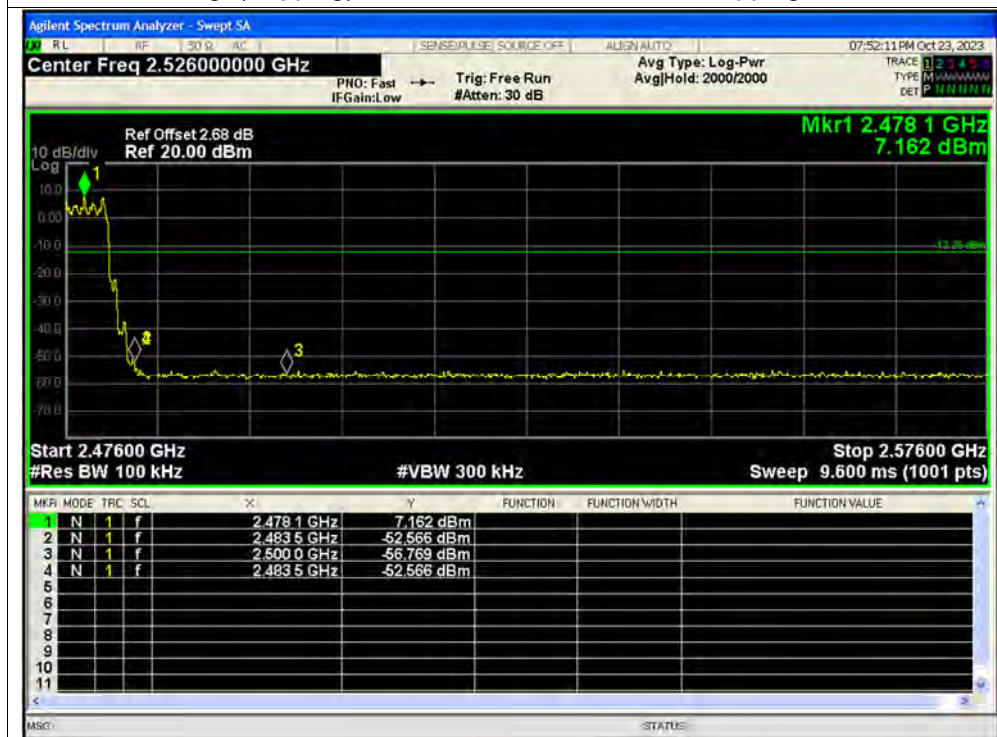

Band Edge(Hopping) NVLT 3-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVLT 3-DH5 2402MHz Ant1 Hopping Emission

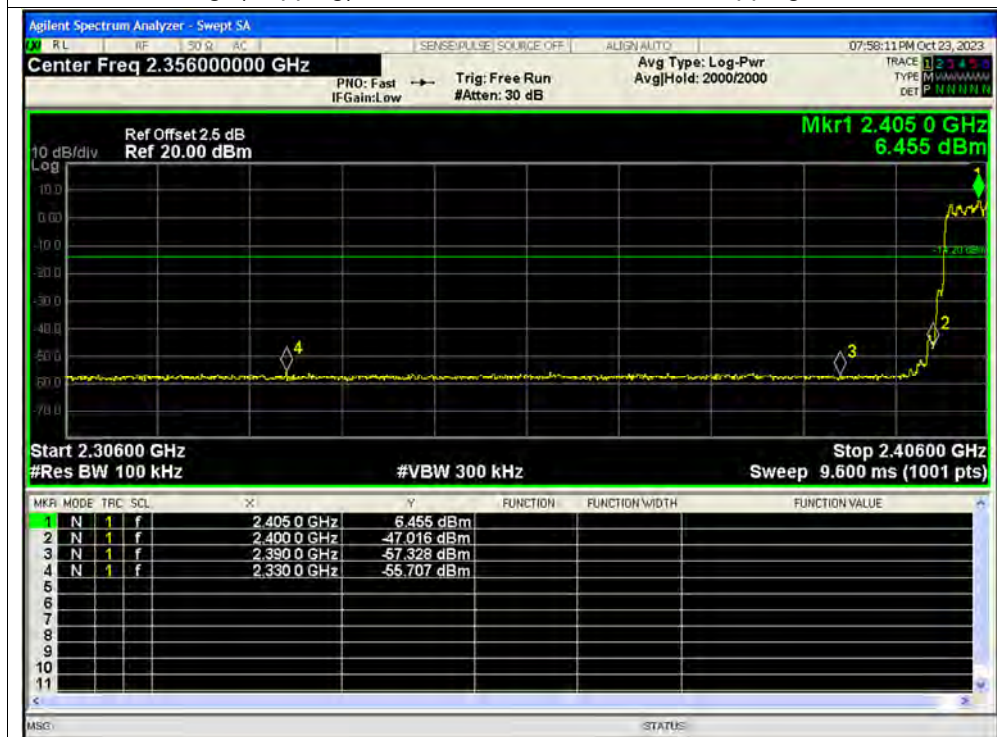

Band Edge(Hopping) NVLT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVLT 3-DH5 2480MHz Ant1 Hopping Emission

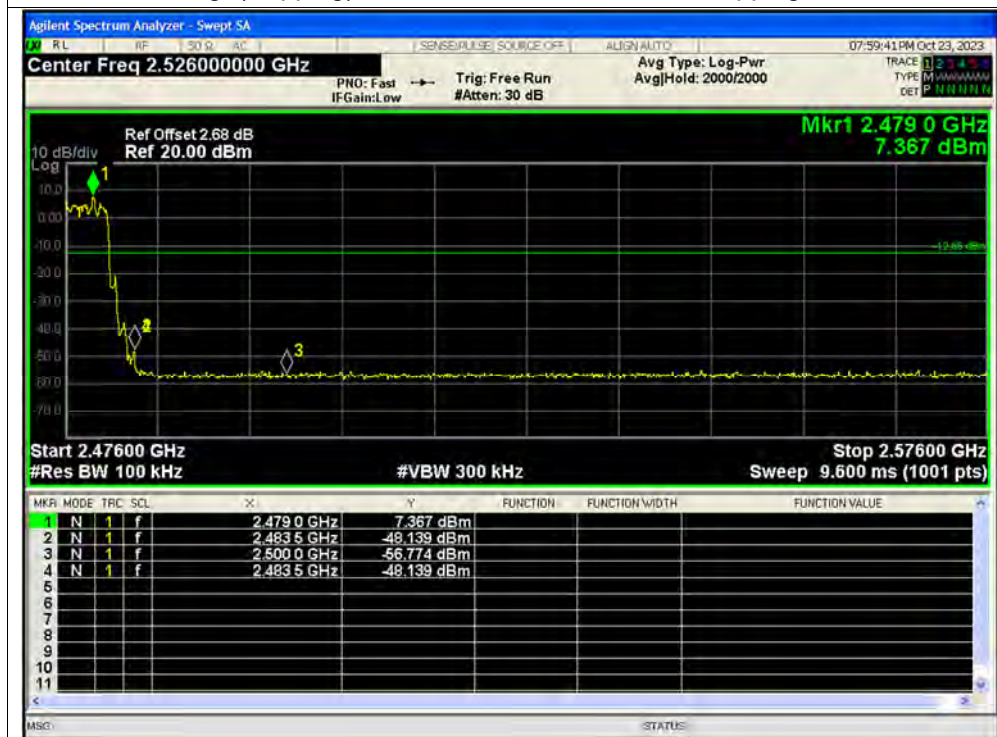



A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + USB Cable + Earphone + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

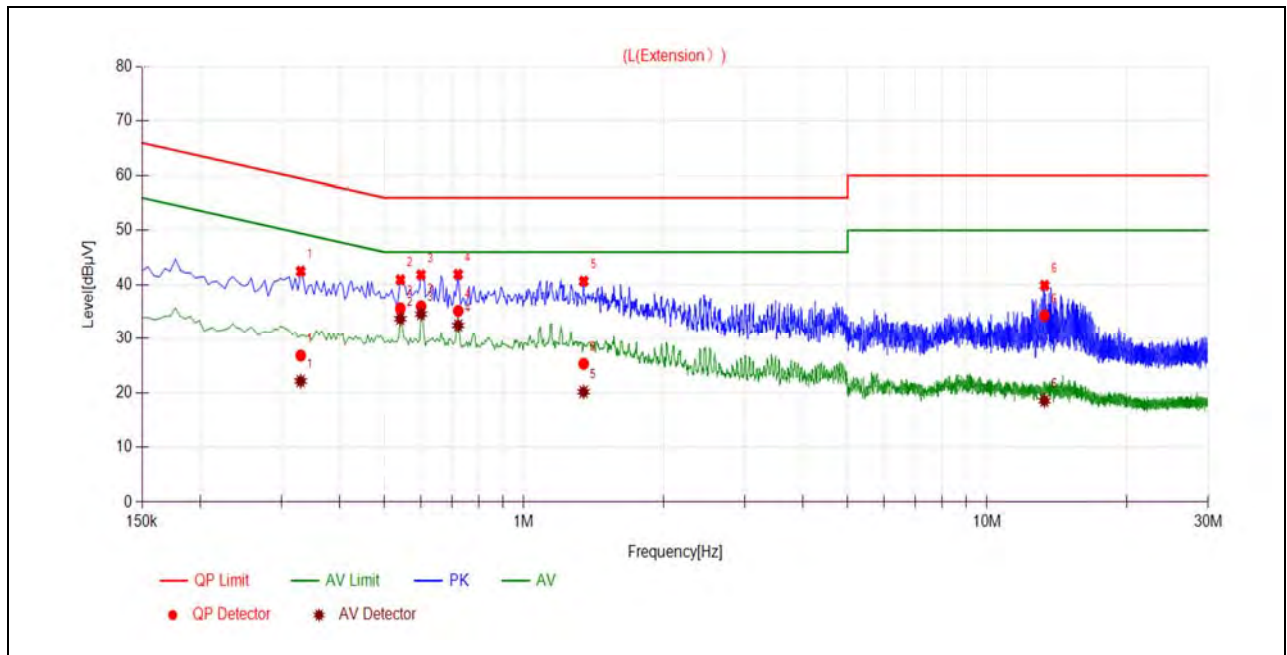

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.3299	26.82	22.11	59.45	49.45	Line	PASS
2	0.5413	35.66	33.71	56.00	46.00		PASS
3	0.6001	36.02	34.59	56.00	46.00		PASS
4	0.7219	35.17	32.49	56.00	46.00		PASS
5	1.3461	25.29	20.14	56.00	46.00		PASS
6	13.2992	34.30	18.50	60.00	50.00		PASS

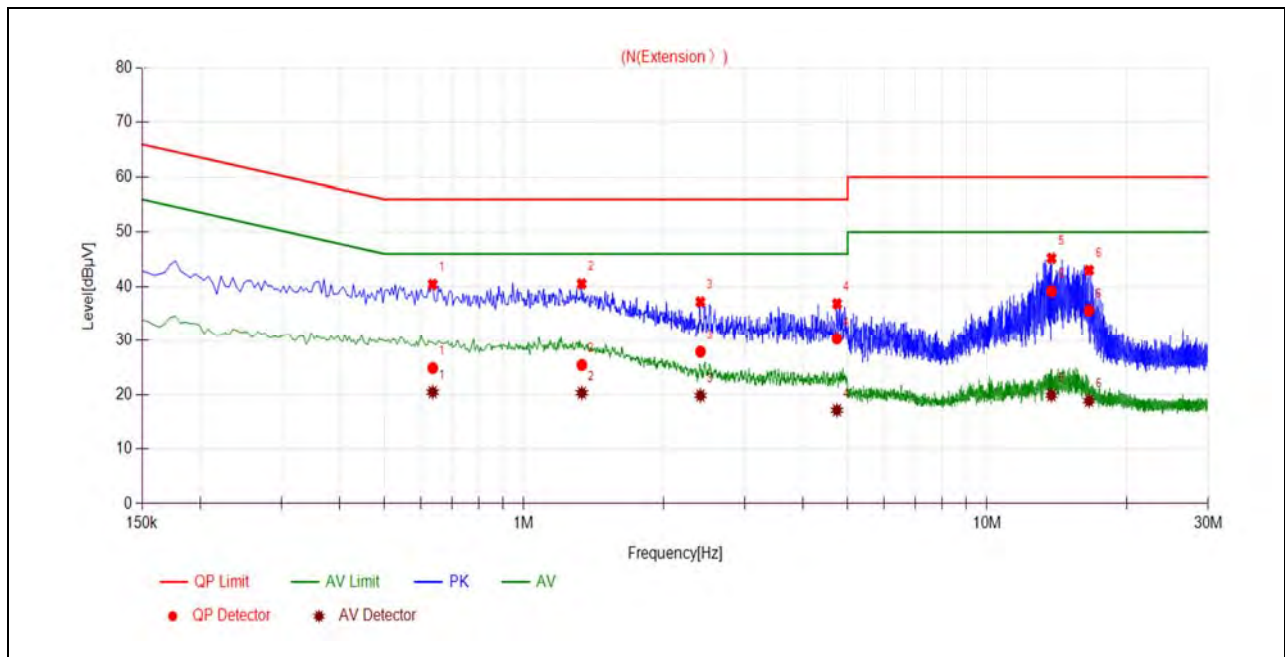

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.6359	24.87	20.43	56.00	46.00	Neutral	PASS
2	1.3343	25.43	20.29	56.00	46.00		PASS
3	2.4059	27.90	19.81	56.00	46.00		PASS
4	4.7410	30.33	17.11	56.00	46.00		PASS
5	13.7677	39.15	19.85	60.00	50.00		PASS
6	16.6007	35.60	18.83	60.00	50.00		PASS

**A.11. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2371.66	PK	22.58	6.74	27.20	56.52	74	PASS
0	2376.44	AV	10.95	6.74	27.20	44.89	54	PASS
78	2483.50	PK	24.80	6.74	27.20	58.74	74	PASS
78	2483.68	AV	12.15	6.74	27.20	46.09	54	PASS

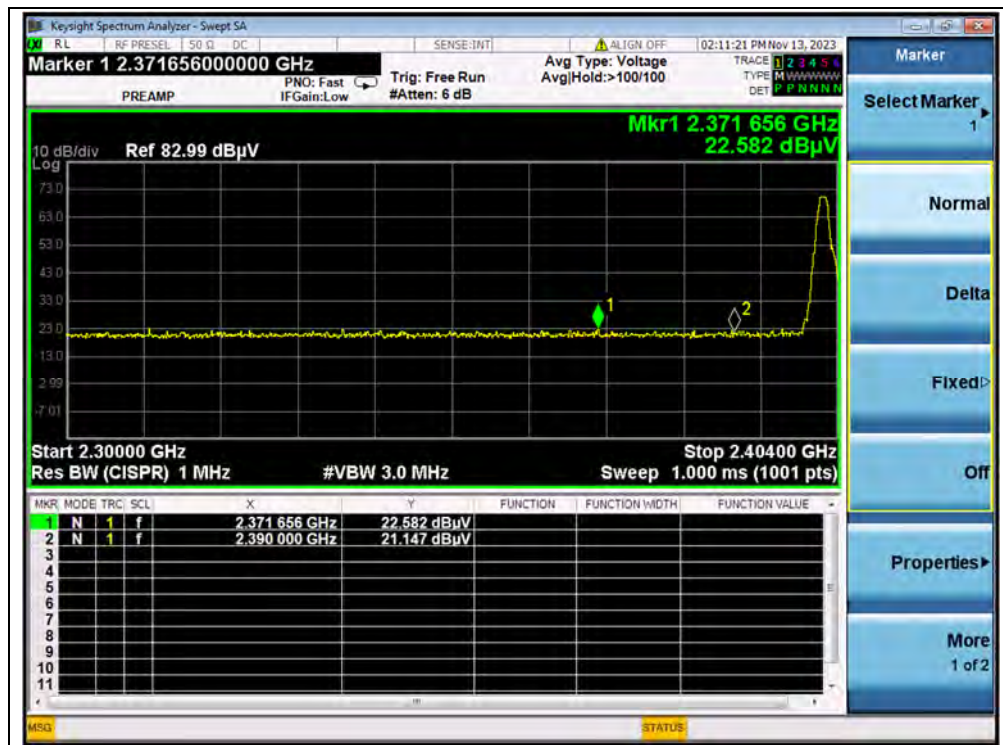


(PEAK, Channel 0, GFSK)

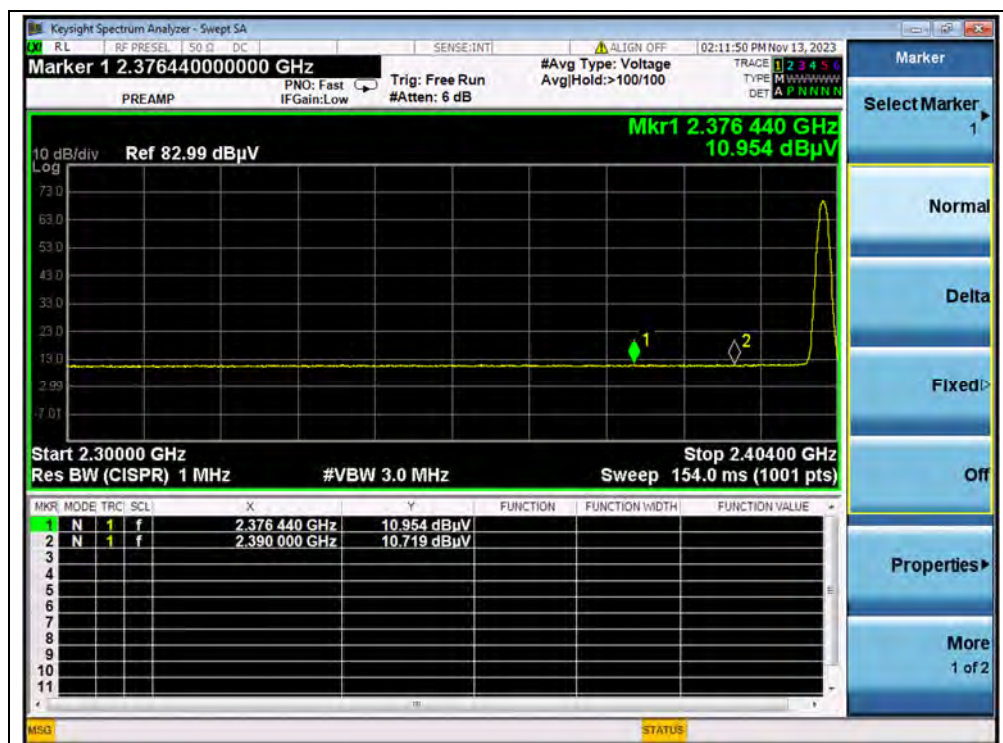

(AVERAGE, Channel 0, GFSK)

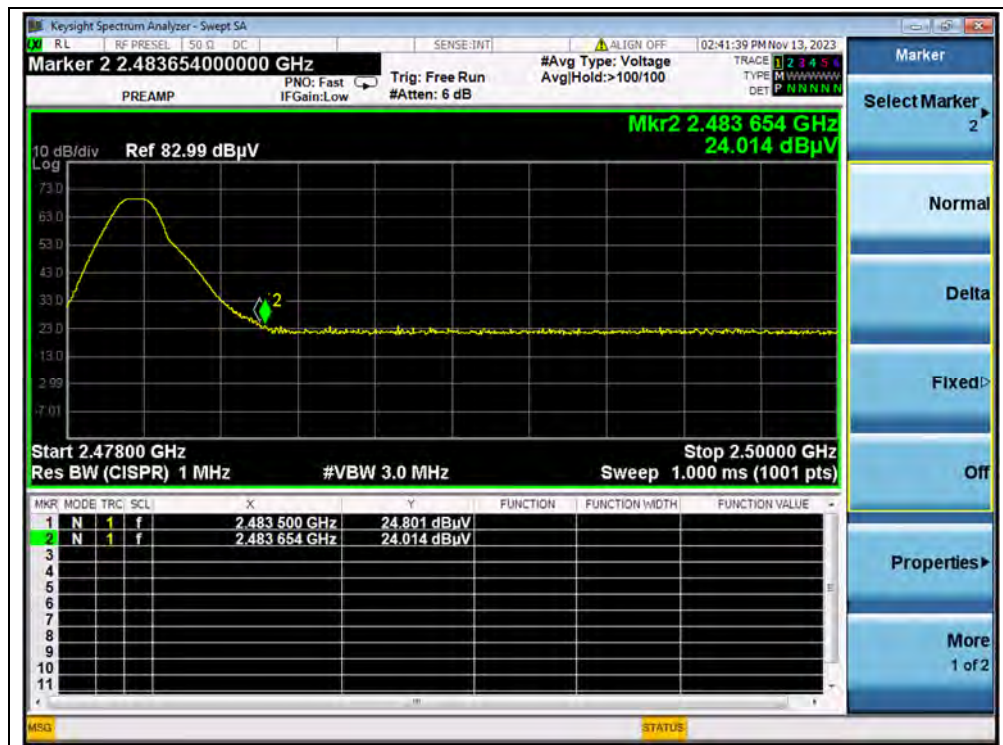

(PEAK, Channel 78, GFSK)

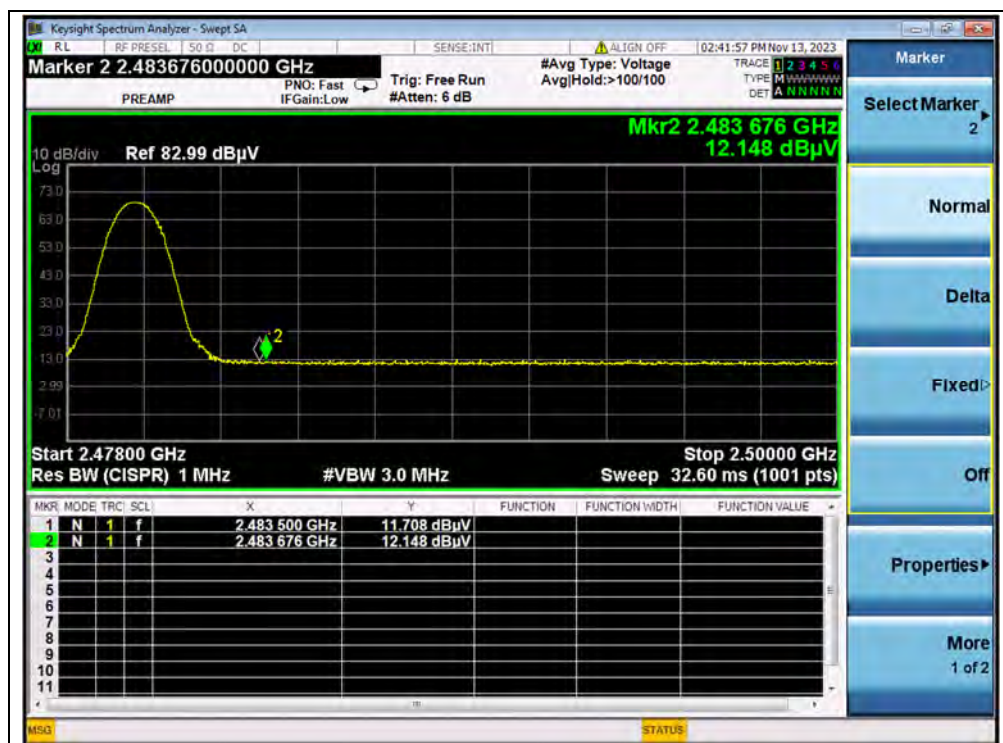


(AVERAGE, Channel 78, GFSK)






$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2369.47	PK	22.52	6.74	27.20	56.46	74	PASS
0	2385.59	AV	10.97	6.74	27.20	44.91	54	PASS
78	2483.80	PK	22.57	6.74	27.20	56.51	74	PASS
78	2483.57	AV	13.29	6.74	27.20	47.23	54	PASS

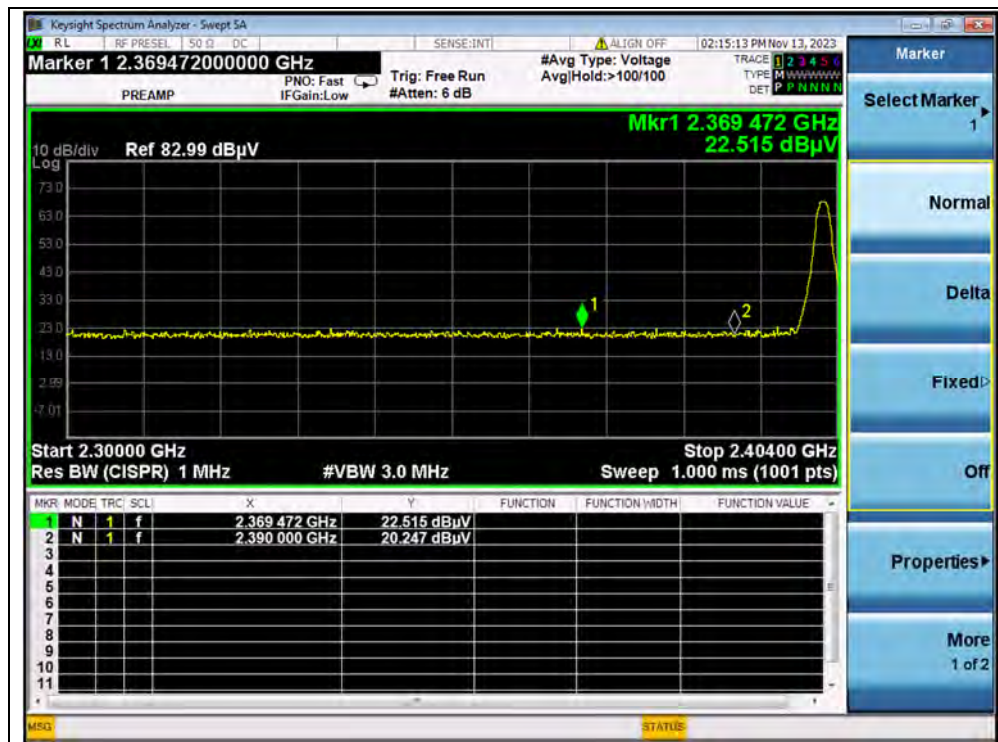

(PEAK, Channel 0, $\pi/4$ -DQPSK)

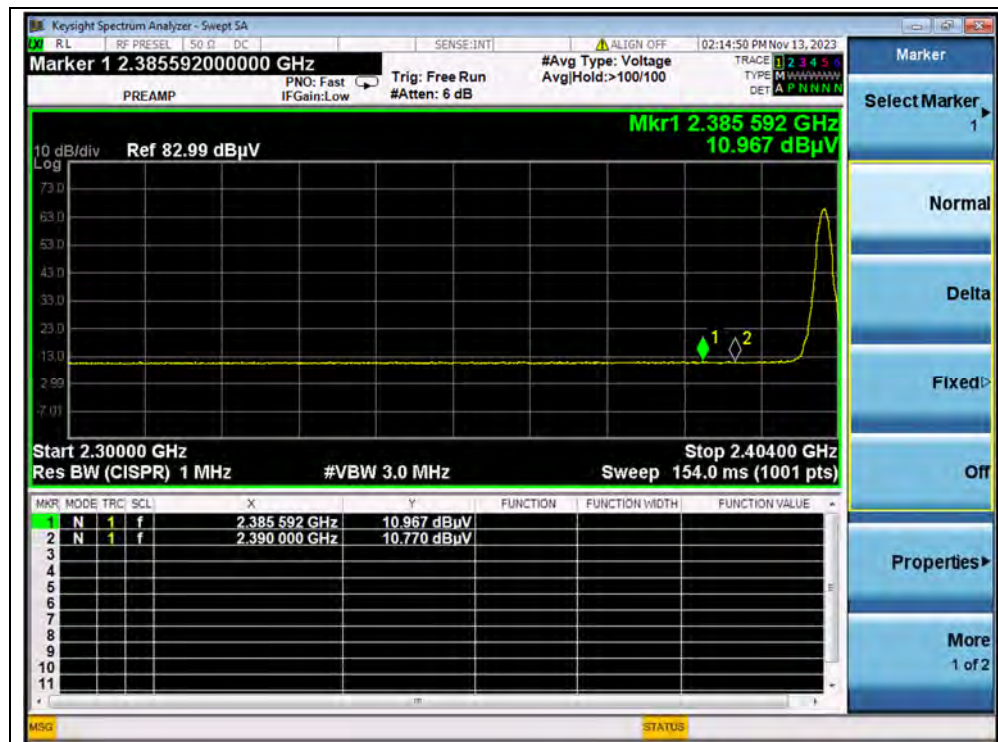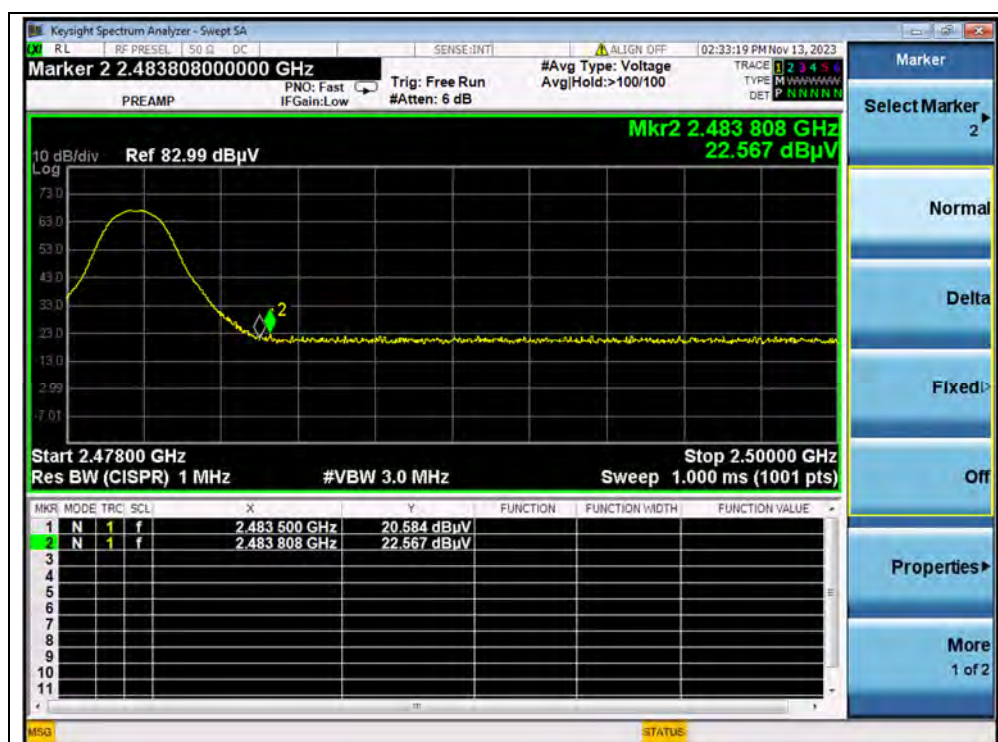

(AVERAGE, Channel 0, $\pi/4$ -DQPSK)

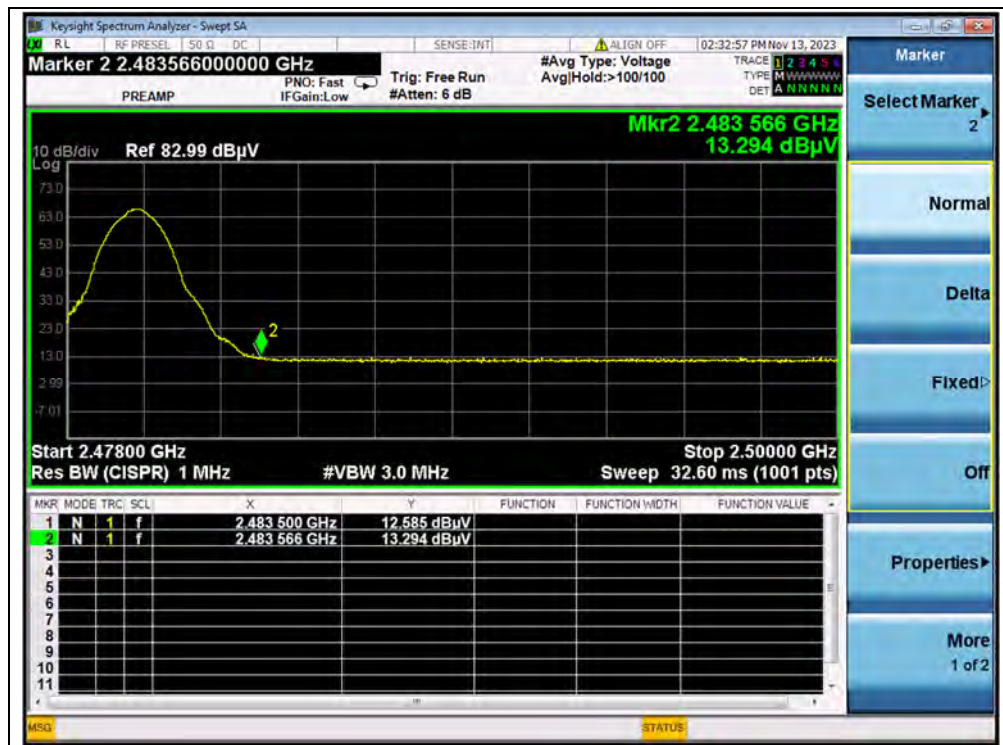(PEAK, Channel 78, $\pi/4$ -DQPSK)

(AVERAGE, Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode

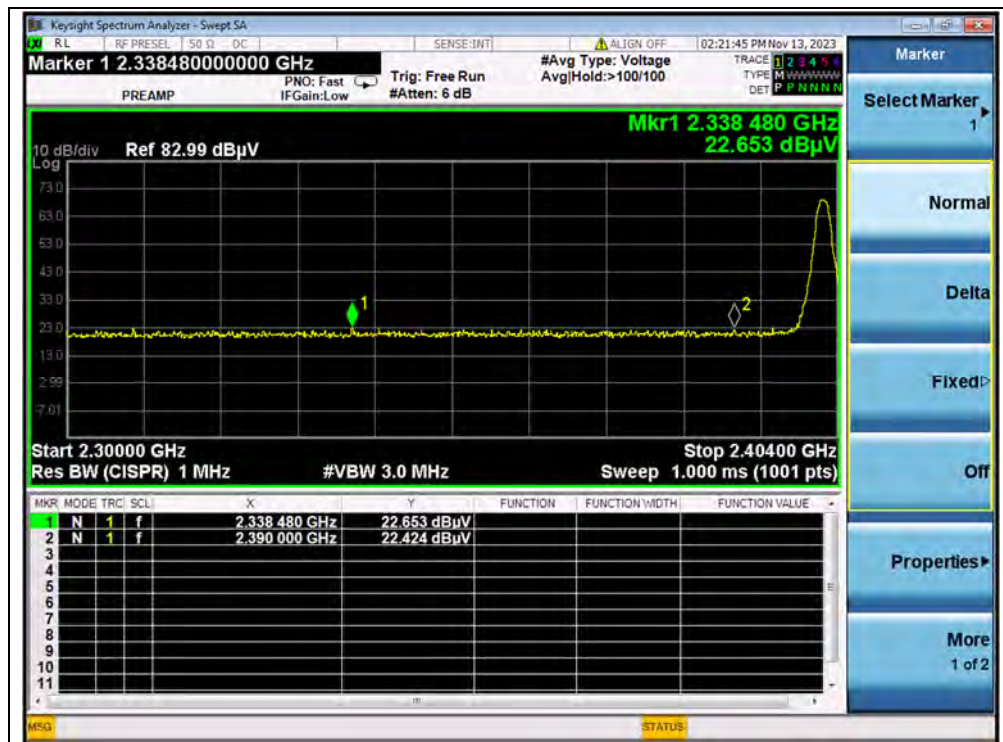
Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2338.48	PK	22.65	6.74	27.20	56.59	74	PASS
0	2368.33	AV	11.00	6.74	27.20	44.94	54	PASS
78	2483.61	PK	22.28	6.74	27.20	56.22	74	PASS
78	2483.59	AV	12.51	6.74	27.20	46.45	54	PASS




(PEAK, Channel 0, 8-DPSK)

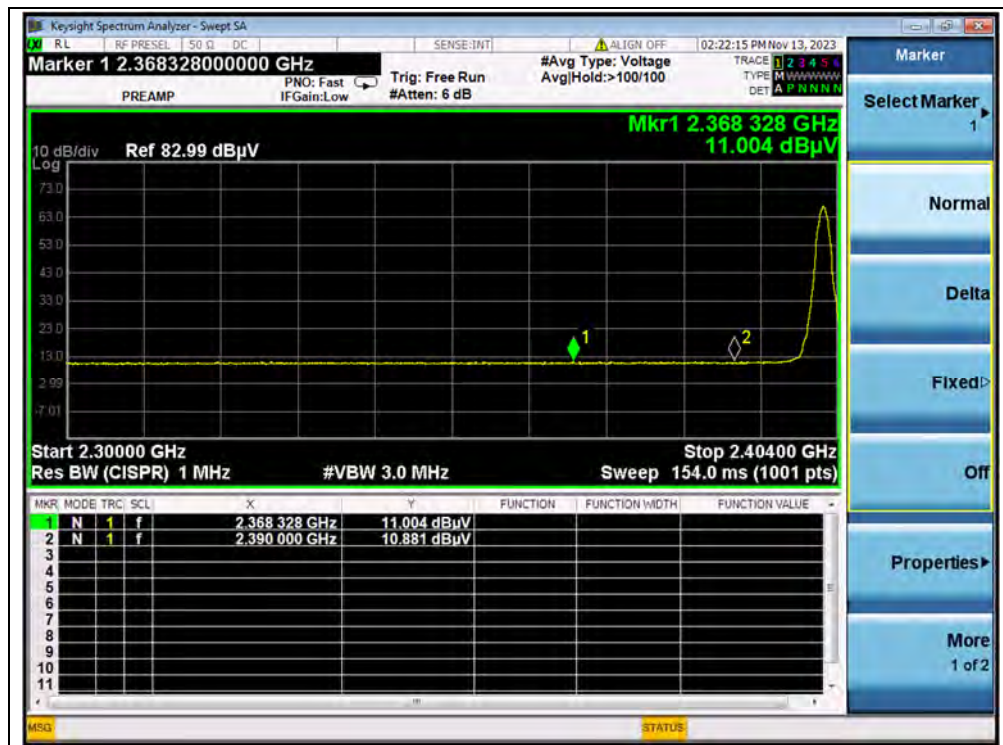

(AVERAGE, Channel 0, 8-DPSK)

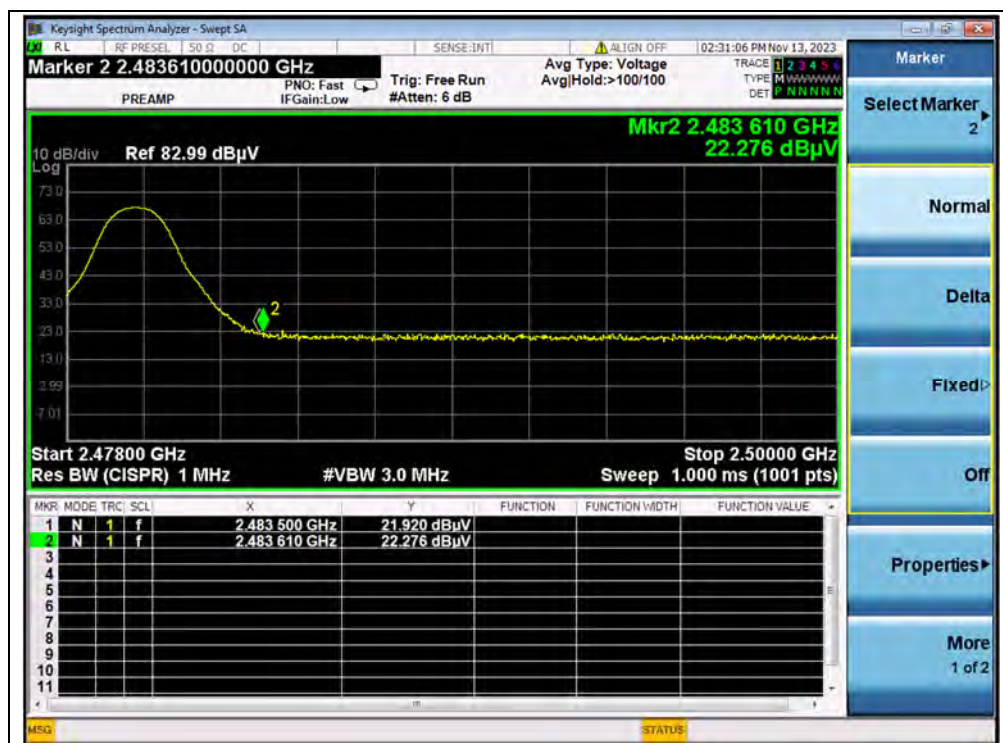

(PEAK, Channel 78, 8-DPSK)

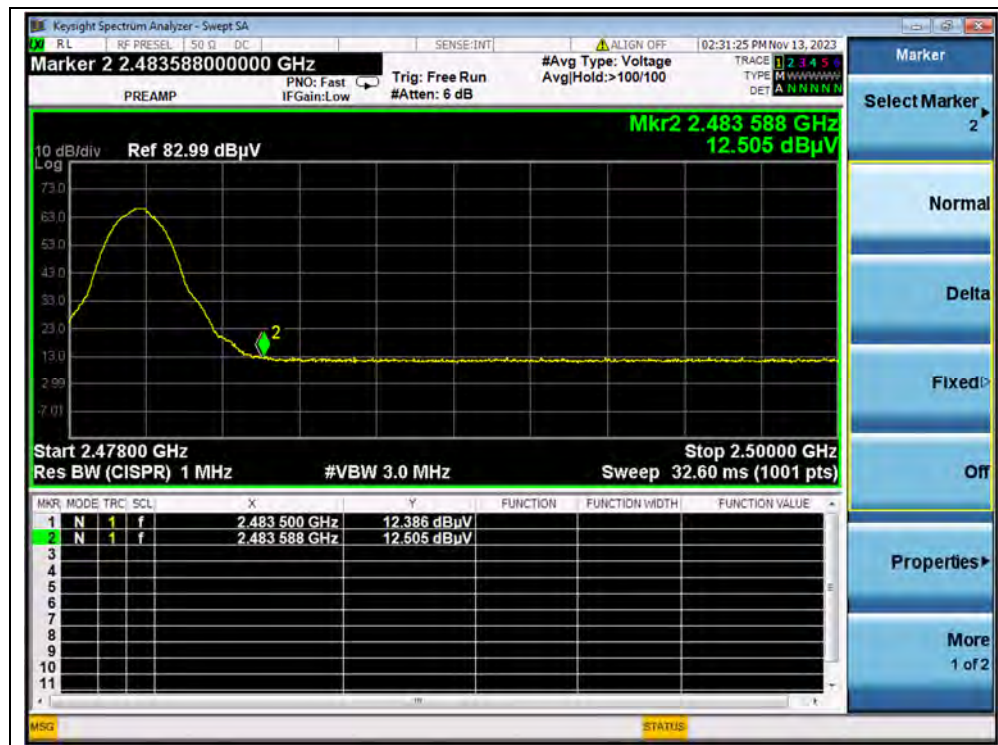

(AVERAGE, Channel 78, 8-DPSK)



A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

Plots for Channel 0

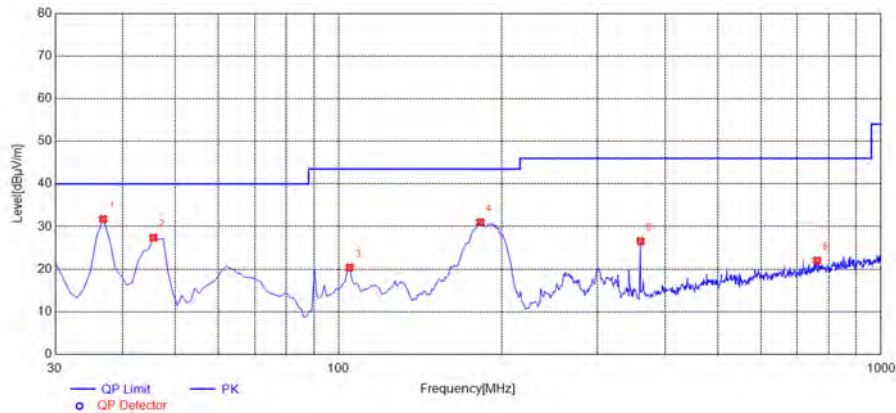


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
45.5355	27.39	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.7648	20.38	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
182.4424	31.00	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.54	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
762.1121	22.02	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

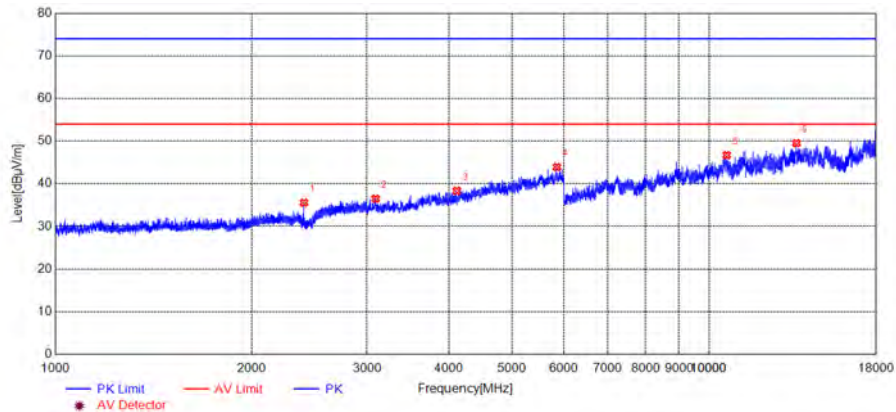


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2401.9003	35.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3090.0075	36.48	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4113.8428	38.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5852.7377	43.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10636.8864	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13602.1335	49.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

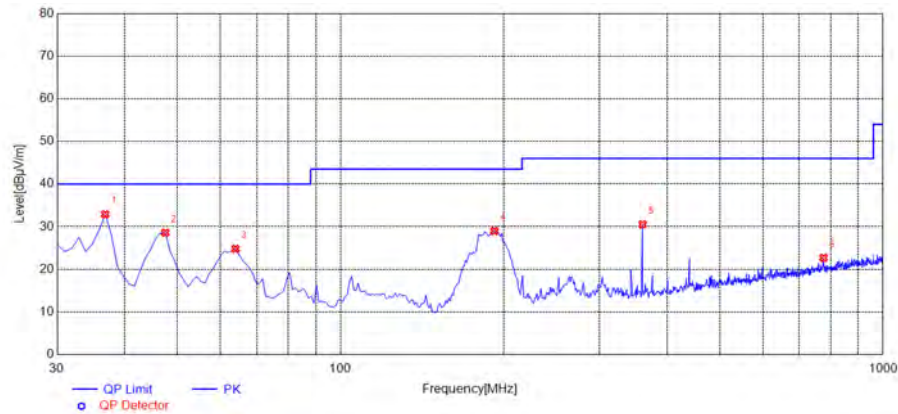

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.89	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.57	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.9840	24.82	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
192.1522	28.97	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.55	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
776.6767	22.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

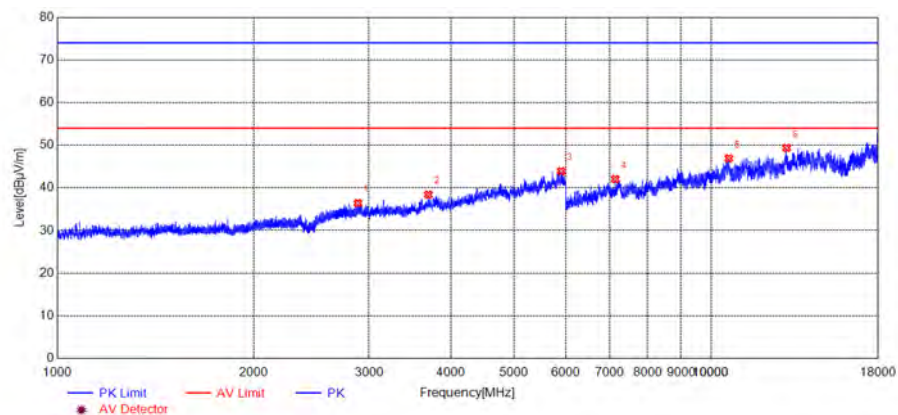

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2883.9807	36.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3695.0579	38.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5900.2417	43.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7137.8448	42.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10644.3870	46.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13052.0877	49.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 39

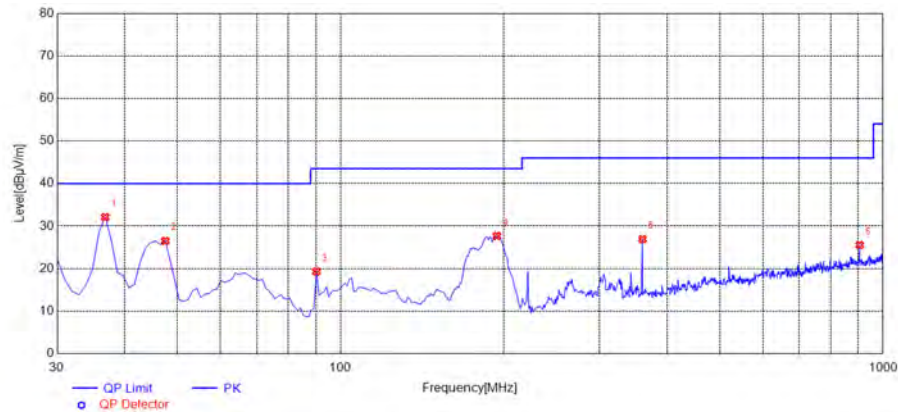


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.12	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
47.4775	26.51	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	19.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
194.0941	27.67	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.93	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
905.8158	25.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

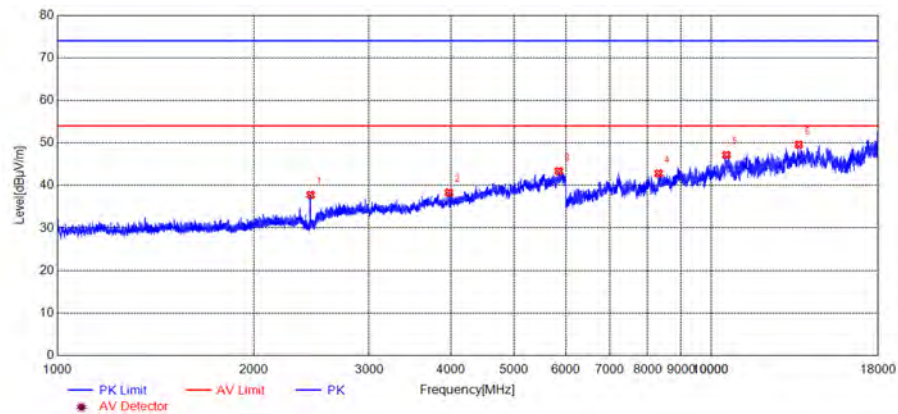


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2440.9068	37.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3972.5810	38.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5848.9874	43.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8312.9427	42.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10554.3795	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13617.1348	49.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

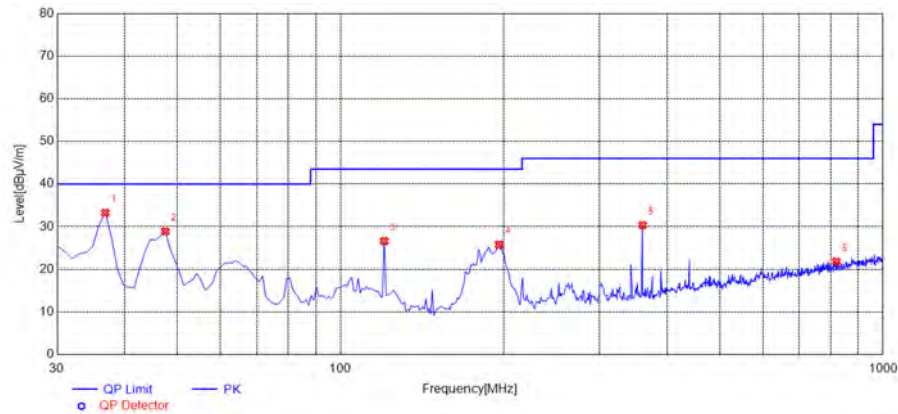

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	33.26	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.88	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
120.3003	26.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
196.0360	25.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
820.3704	21.82	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

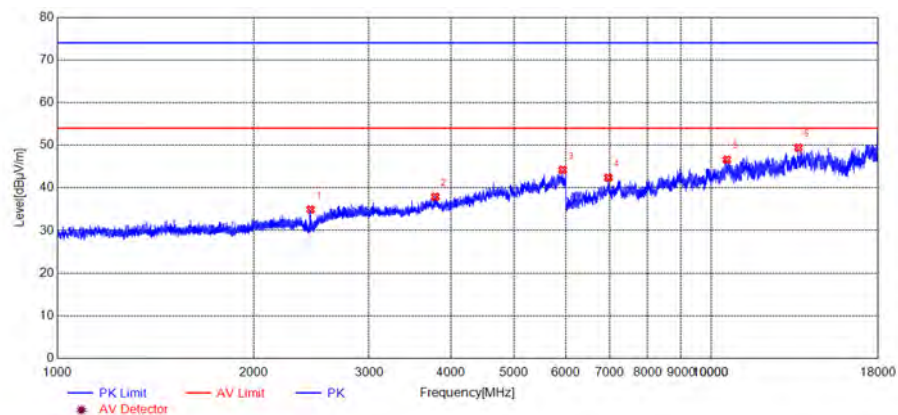


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2440.5734	34.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3787.5656	37.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5928.9941	44.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6964.0803	42.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10569.3808	46.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13599.6333	49.44	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 78

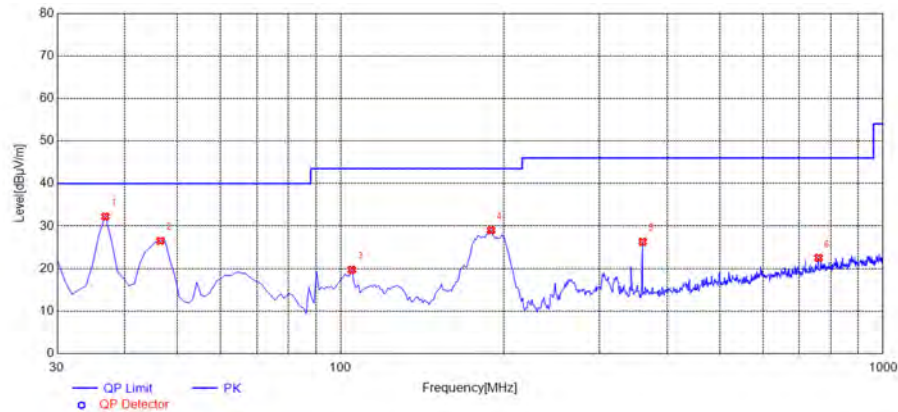


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.25	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
46.5065	26.51	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.7648	19.74	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
189.2392	29.03	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
760.1702	22.54	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

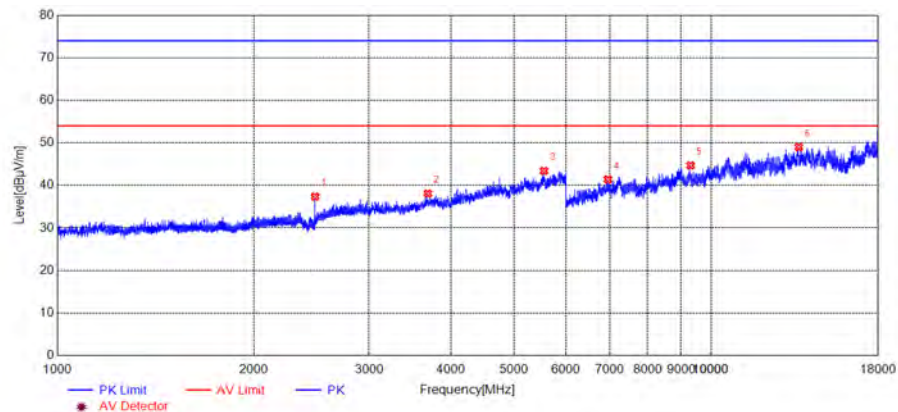


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2479.9133	37.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3688.8074	38.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5551.4626	43.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6952.8294	41.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9300.5250	44.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13614.6346	49.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

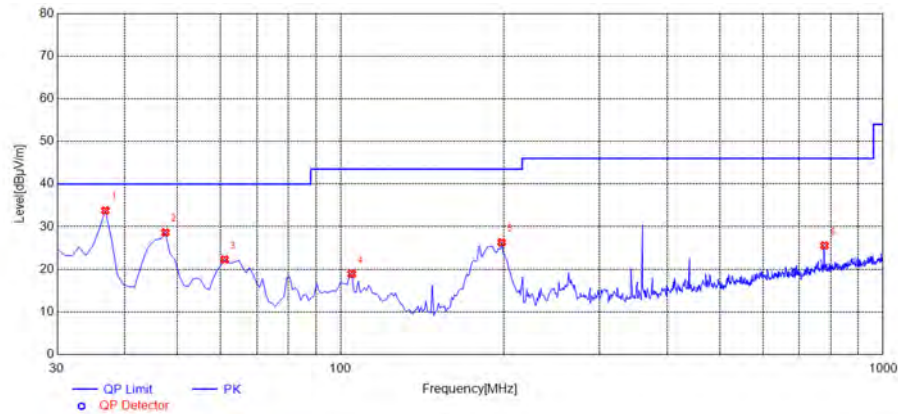

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	33.80	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.62	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
61.0711	22.30	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	18.91	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	26.30	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
779.5896	25.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

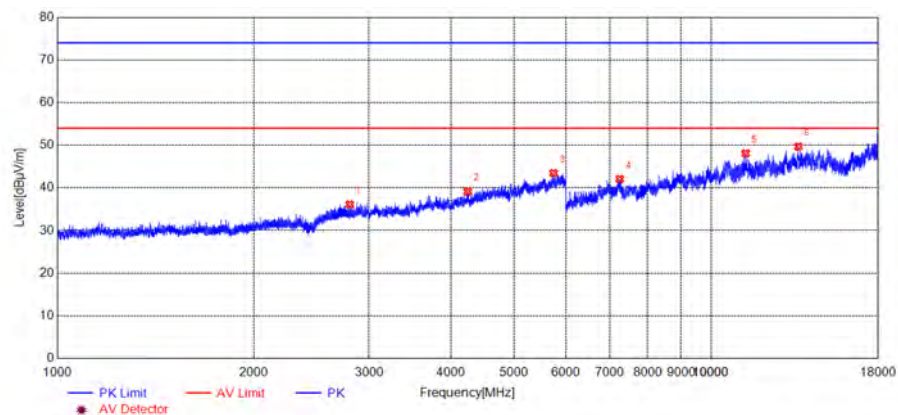


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2801.3002	36.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4243.8537	39.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5742.7286	43.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7250.3542	42.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11295.6913	48.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13598.3832	49.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


 **$\pi/4$ -DQPSK Mode**

Plots for Channel 0

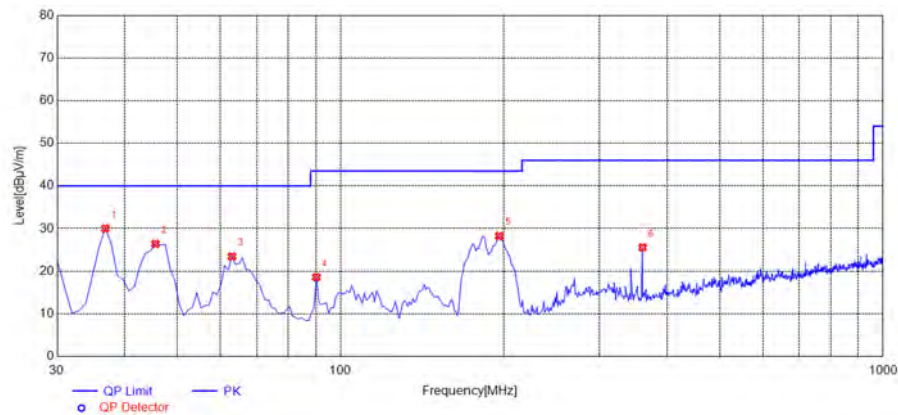


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	30.02	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
45.5355	26.42	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
63.0130	23.45	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	18.59	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
196.0360	28.25	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	25.56	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

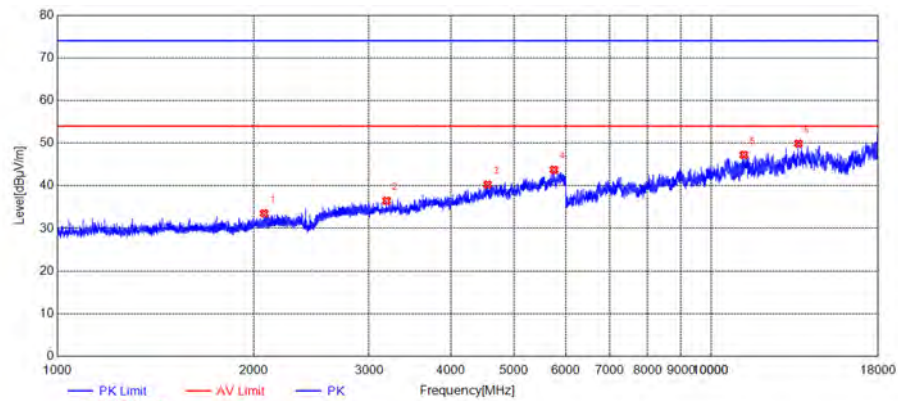


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2072.8455	33.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3190.0158	36.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4553.8795	40.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5751.4793	43.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11224.4354	47.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13600.8834	49.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

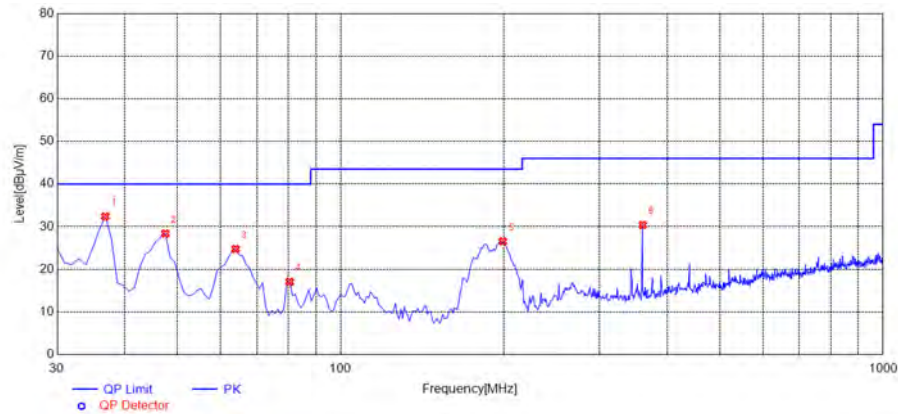

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.40	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.39	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.9840	24.75	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
80.4905	17.05	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
198.9489	26.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.39	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

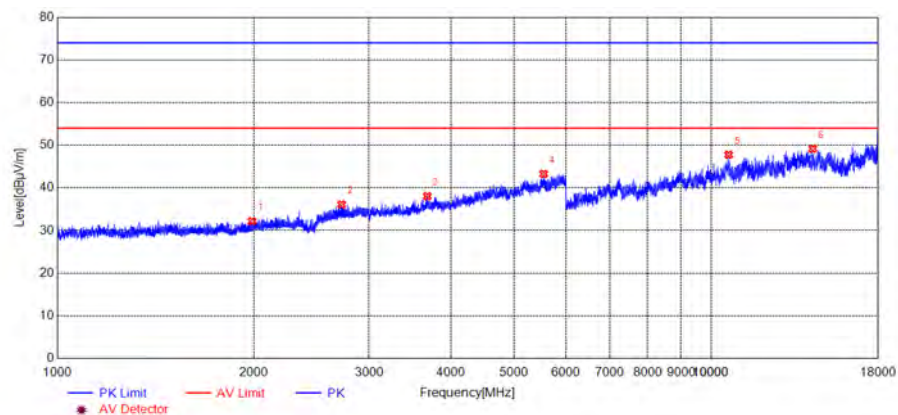


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1985.8310	32.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2720.9535	36.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3680.0567	38.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5545.2121	43.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10631.8860	47.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14300.9417	49.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 39

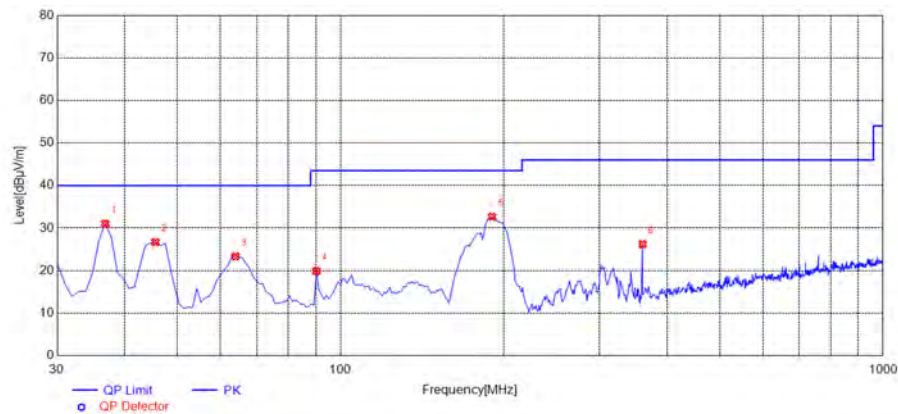


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.04	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
45.5355	26.68	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
63.9840	23.34	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	19.89	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
190.2102	32.67	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.20	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

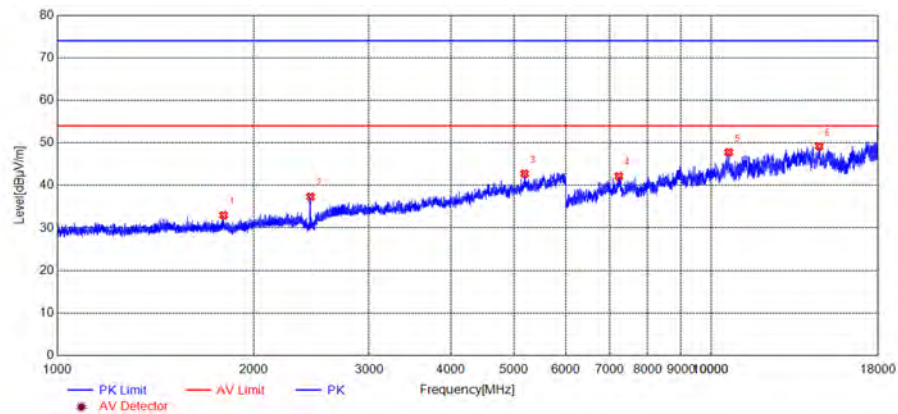


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1796.4661	32.98	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2440.9068	37.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5186.4322	42.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7226.6022	42.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10641.8868	47.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14630.9692	49.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

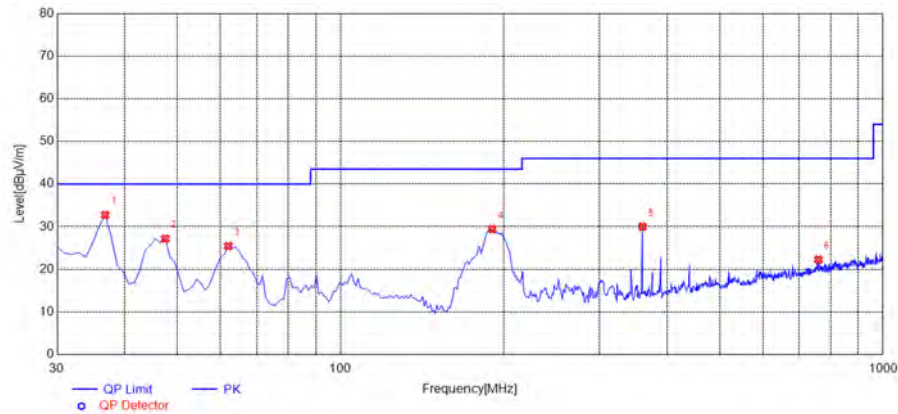

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.72	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	27.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
62.0420	25.43	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
190.2102	29.43	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.01	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
760.1702	22.27	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

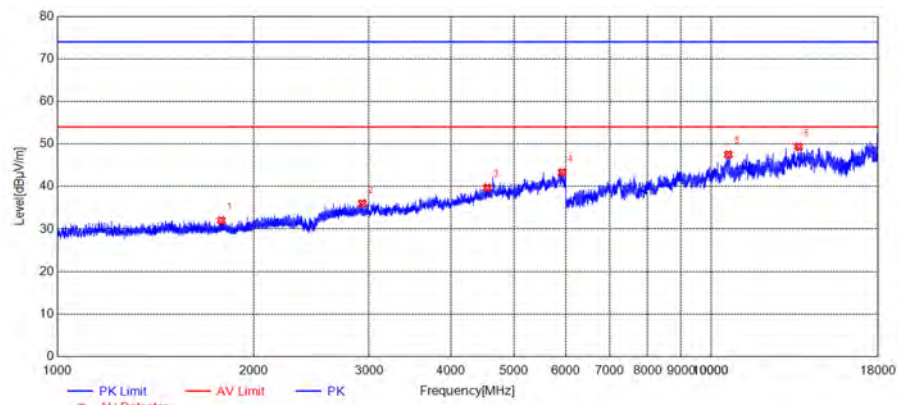


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1782.4637	31.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2929.3216	36.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4548.8791	39.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5920.2434	43.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10628.1357	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13603.3836	49.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 78

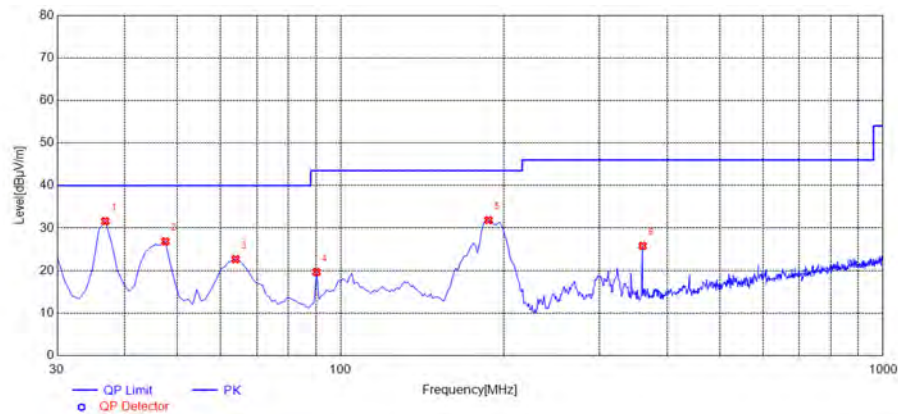


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.61	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
47.4775	26.85	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
63.9840	22.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	19.68	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
187.2973	31.86	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	25.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

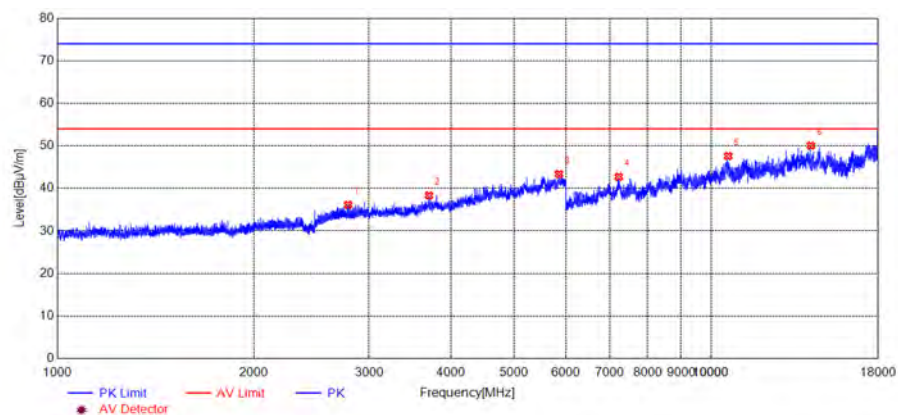


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2785.9643	36.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3703.8087	38.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5852.7377	43.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7222.8519	42.72	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10620.6351	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14204.6837	50.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

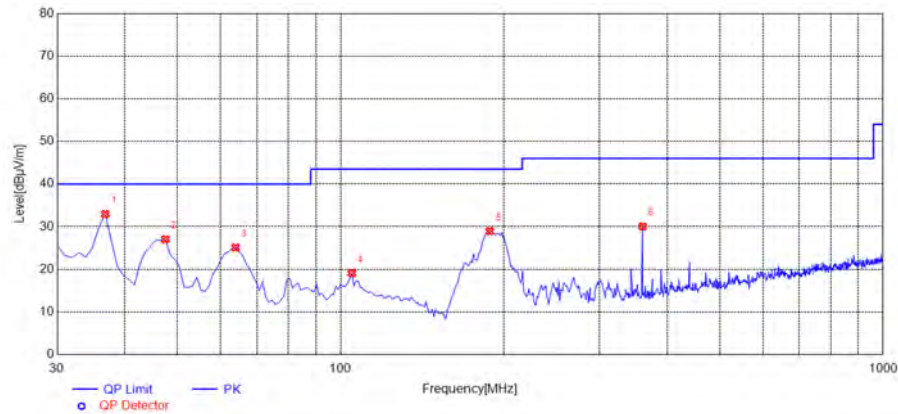


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.95	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	27.05	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.9840	25.10	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	19.13	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
188.2683	28.94	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

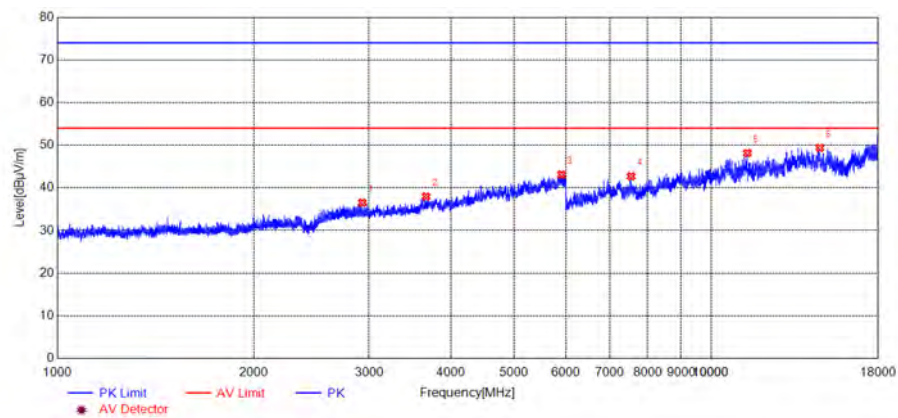


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2927.9880	36.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3665.0554	37.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5905.2421	43.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7542.8786	42.71	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11358.1965	48.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14664.7221	49.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)

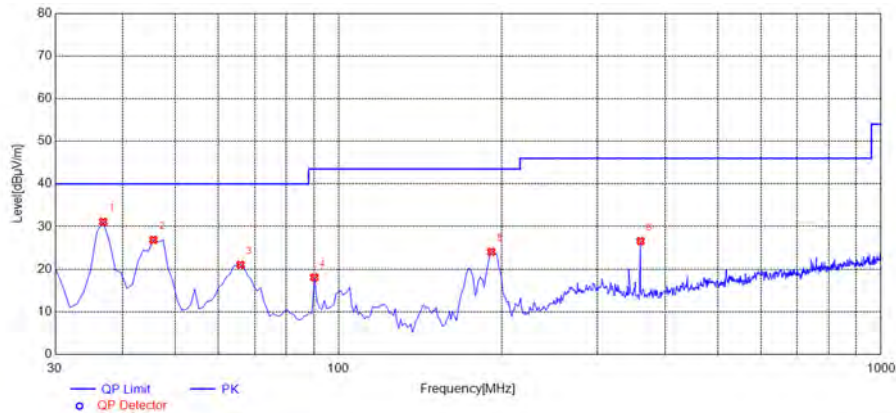**8-DPSK Mode****Plots for Channel 0**


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.11	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
45.5355	26.89	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
65.9259	21.04	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	18.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
191.1812	24.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

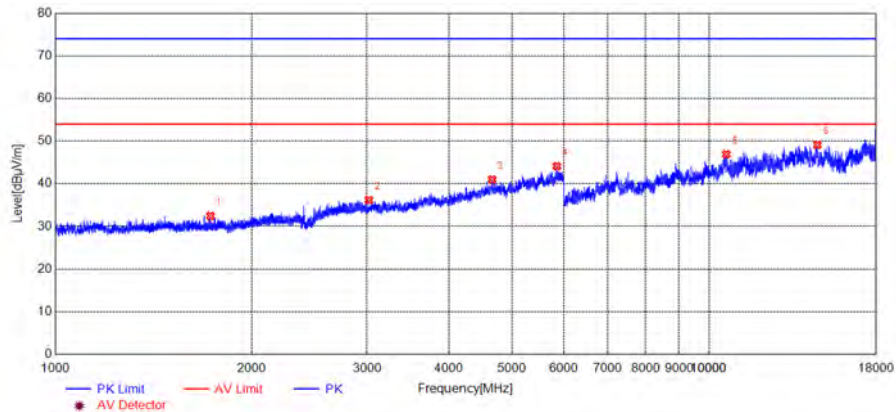


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1728.1214	32.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3017.5015	36.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4657.6381	41.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5851.4876	44.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10626.8856	46.91	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14640.9701	49.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

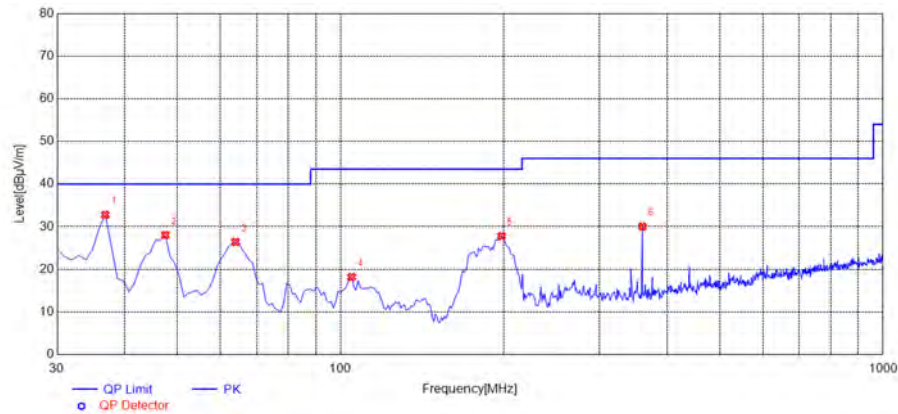

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.78	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.05	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.9840	26.41	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	18.19	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	27.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.03	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

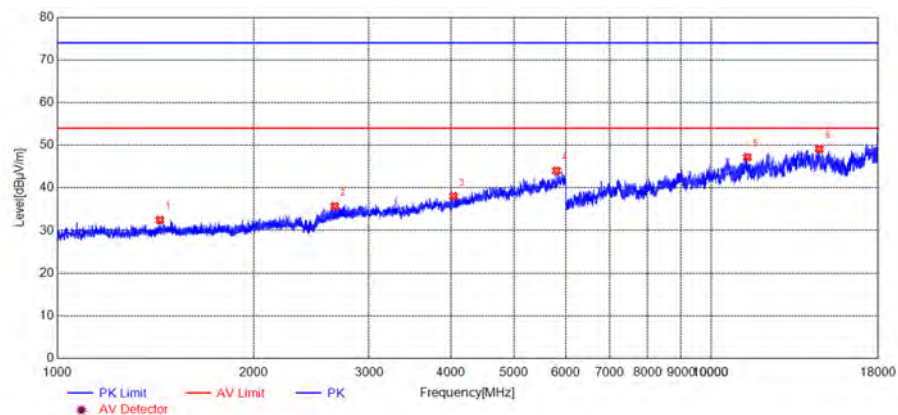


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1436.0727	32.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2657.9430	35.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4038.8366	38.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5801.4835	44.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11361.9468	47.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14639.7200	49.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 39

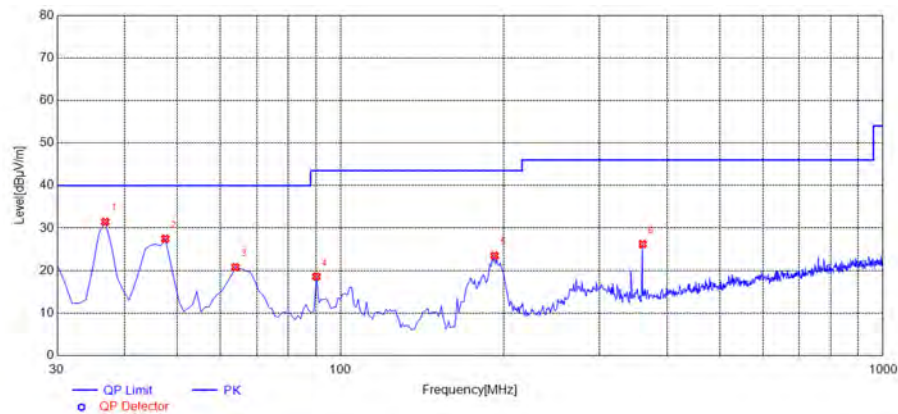


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.45	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
47.4775	27.50	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
63.9840	20.79	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	18.60	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
192.1522	23.51	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.23	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

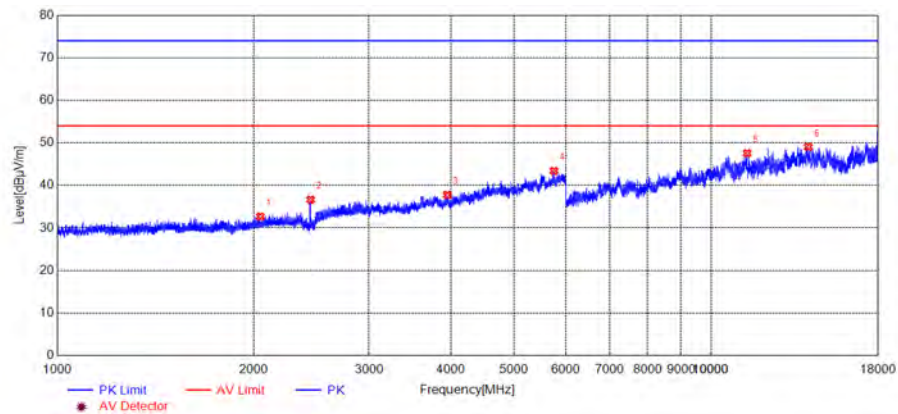


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2044.5074	32.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2441.2402	36.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3948.8291	37.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5751.4793	43.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11355.6963	47.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14078.4232	49.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

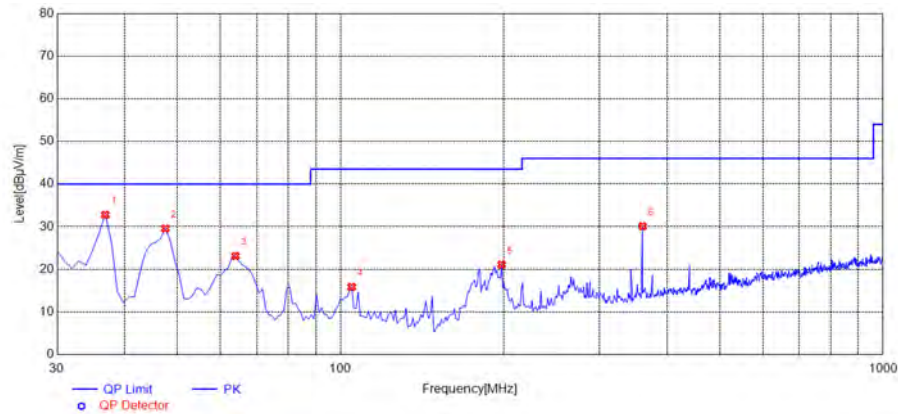

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.77	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	29.56	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.9840	23.12	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	15.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	21.10	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.11	N/A	N/A	N/A	46.00	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

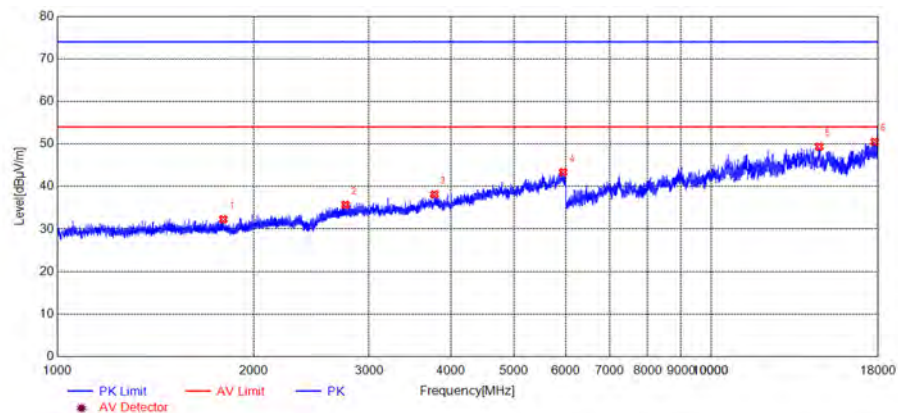

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1795.1325	32.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2761.2935	35.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3773.8145	38.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5938.9949	43.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14628.4690	49.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
17787.4823	50.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 78

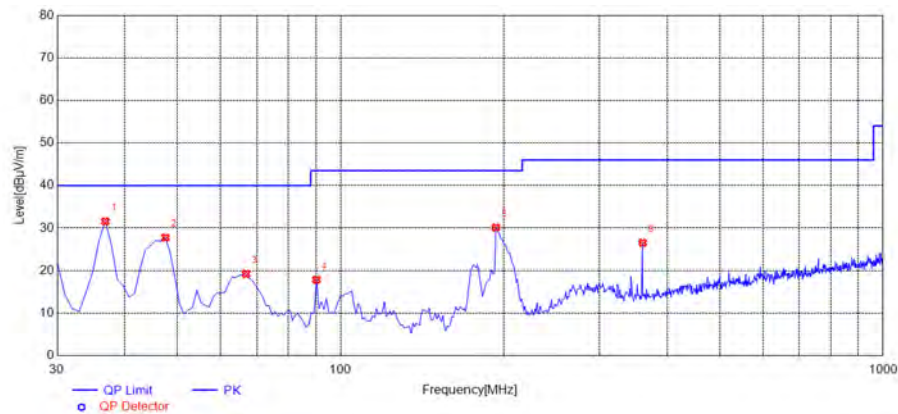


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	31.56	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
47.4775	27.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
66.8969	19.22	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
90.2002	17.85	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
193.1231	30.13	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
360.1301	26.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

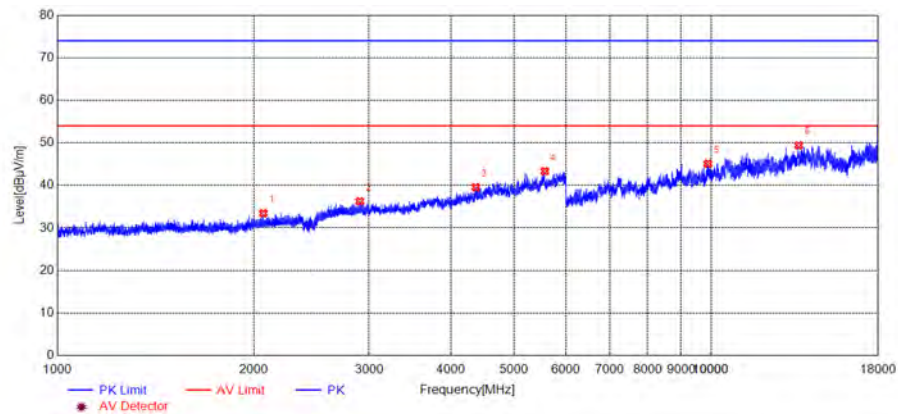


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
2066.5111	33.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2902.3171	36.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4365.1138	39.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5566.4639	43.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9885.5738	45.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13612.1343	49.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

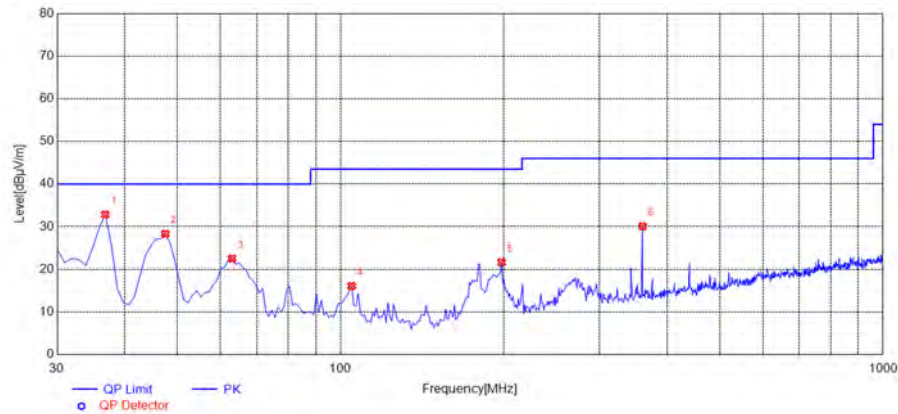

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
36.7968	32.84	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
47.4775	28.32	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
63.0130	22.49	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.7648	16.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
197.9780	21.61	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
360.1301	30.08	N/A	N/A	N/A	46.00	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

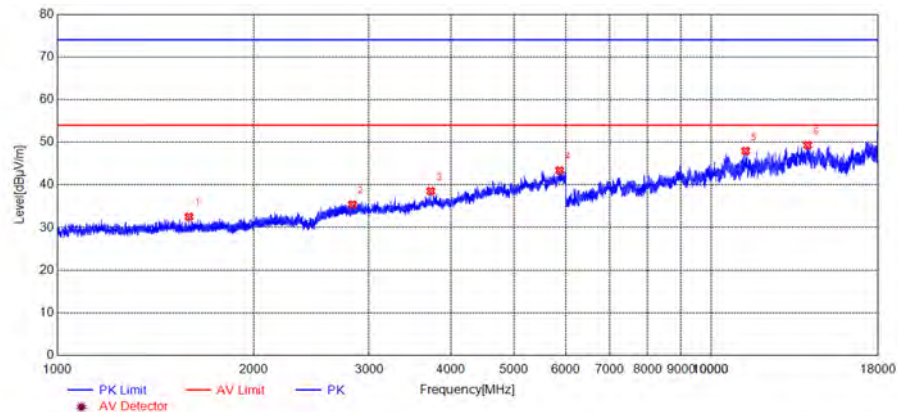

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
1591.0985	32.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2827.9713	35.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3727.5606	38.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5866.4889	43.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11298.1915	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14045.9205	49.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT