



FCC SAR TEST REPORT

Report No.: STS2206033H01


Issued for

BARTEC

Max-Eyth-Str. 16 97980 Bad Mergentheim Germany

Product Name:	Pixavi Thermal/Pixavi Phone
Brand Name:	BARTEC GmbH
Model Name:	Pixavi Thermal/Phone
Series Model:	17-S13*-12*1/***** (Where * can be A-Z,a-z,0-9,"-",Blank or Slash)
FCC ID:	TBU-X8KPTPP
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head: 0.626 W/kg
	Body: 1.202 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





Test Report Certification

Applicant's name : BARTEC

Address : Max-Eyth-Str. 16 97980 Bad Mergentheim Germany

Manufacturer's Name : BARTEC GmbH

Address : Max-Eyth-Str. 16 97980 Bad Mergentheim Germany

Product description

Product name : Pixavi Thermal/Pixavi Phone

Brand name : BARTEC GmbH

Model name : Pixavi Thermal/Phone

Series Model..... : 17-S13*-12*1/***** (Where * can be A-Z,a-z,0-9,"-",Blank or Slash)

Standards..... : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test..... :

Date (s) of performance of tests..... : 16 Mar. 2022 ~ 15 June 2022

Date of Issue..... : 16 June 2022

Test Result..... : **Pass**

Testing Engineer :

Shi fan-long

(Shifan. Long)

Technical Manager :

Sean She

(Sean she)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	15
5.1 Validation System	15
5.2 Validation Result	16
6. SAR Evaluation Procedures	17
7. EUT Antenna Location Sketch	18
7.1 SAR test exclusion consider table	19
8. EUT Test Position	26
8.1 Define Two Imaginary Lines on the Handset	26
8.2 Hotspot mode exposure position condition	27
9. Uncertainty	28
9.1 Measurement Uncertainty	28
10. Conducted Power Measurement	29
10.1 Test Result	29
11. EUT and Test Setup Photo	65
11.1 EUT Photo	65
11.2 Setup Photo	68
12. SAR Result Summary	74
12.1 Head SAR	74
12.2 Body-worn and Hotspot SAR	80
12.3 repeated SAR measurement	86
13. Equipment List	89
Appendix A. System Validation Plots	90
Appendix B. SAR Test Plots	110
Appendix C. Probe Calibration and Dipole Calibration Report	154

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	16 June 2022	STS2206033H01	ALL	Initial Issue





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Pixavi Thermal/Pixavi Phone
Brand Name	BARTEC GmbH
Model Name	Pixavi Thermal/Phone
Series Model	17-S13*-12*1/***** (Where * can be A-Z,a-z,0-9,"-",Blank or Slash)
Model Difference	Models are named differently for different regions.
Battery	Rated Voltage: 3.8 V (Nominal) Charge Limit Voltage: 4.35 V Capacity: 3200mAh
Device Category	Portable
Product stage	Production unit
RF Exposure Environment	General Population / Uncontrolled
IMEI	IMEI 1: 353608390000126 IMEI 2: 353608390000134
Hardware Version	X8K_Main_Board RevC
Software Version	PWG1.200910.756
Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz~2570 MHz LTE Band 12: 690 MHz ~ 720 MHz LTE Band 13: 770 MHz ~ 790 MHz LTE Band 14: 704 MHz ~ 716 MHz LTE Band 17: 700 MHz ~ 720 MHz LTE Band 25: 1850MHz~1930 MHz LTE Band 26: 810MHz~850 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663MHz ~ 689 MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz WLAN 802.11n40: 2422 MHz ~ 2452 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5150 ~ 5250 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5250 ~ 5350 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5470 ~ 5725 MHz WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5725 ~ 5875 MHz Bluetooth: 2402 MHz to 2480 MHz NFC: 13.56MHz GPS: 1575.42MHz



Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)
	PCE	WCDMA Band 2	0.345	1.001
	PCE	WCDMA Band 4	0.176	0.552
	PCE	WCDMA Band 5	0.121	0.186
	PCE	LTE Band 2	0.241	0.978
	PCE	LTE Band 4	0.178	0.566
	PCE	LTE Band 5	0.143	0.139
	PCE	LTE Band 7	0.138	0.439
	PCE	LTE Band 12	0.096	0.118
	PCE	LTE Band 13	0.083	0.119
	PCE	LTE Band 14	0.078	0.122
	PCE	LTE Band 17	0.094	0.196
	PCE	LTE Band 25	0.334	1.202
	PCE	LTE Band 26	0.116	0.248
	PCE	LTE Band 41	0.046	0.158
	PCE	LTE Band 66	0.159	0.486
	PCE	LTE Band 71	0.054	0.081
	DTS	2.4G WLAN	0.108	0.049
	DSS	BT	0.028	0.020
	NII	5.2G WLAN	0.626	0.161
	NII	5.3G WLAN	0.579	0.124
	NII	5.6G WLAN	0.277	0.075
NII	5.8G WLAN	0.224	0.088	
1-g Sum SAR			0.971	1.364
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX(NII)			
Operating Mode:	WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN : 802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 5G WLAN: 802.11a(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM):BPSK,QPSK,16-QAM,64-QAM,256-QAM Bluetooth: GFSK + π /4DQPSK+8DPSK BLE: GFSK GPS: BPSK NFC: FSK			
Antenna Specification:	WCDMA/LTE: PIFA Antenna Bluetooth: PIFA Antenna WLAN: PIFA Antenna NFC: Coil Antenna			
SIM Card	Only support single SIM Card.			
Hotspot Mode	Support			
DTM Mode	Not Support			
Note: 1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power				



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

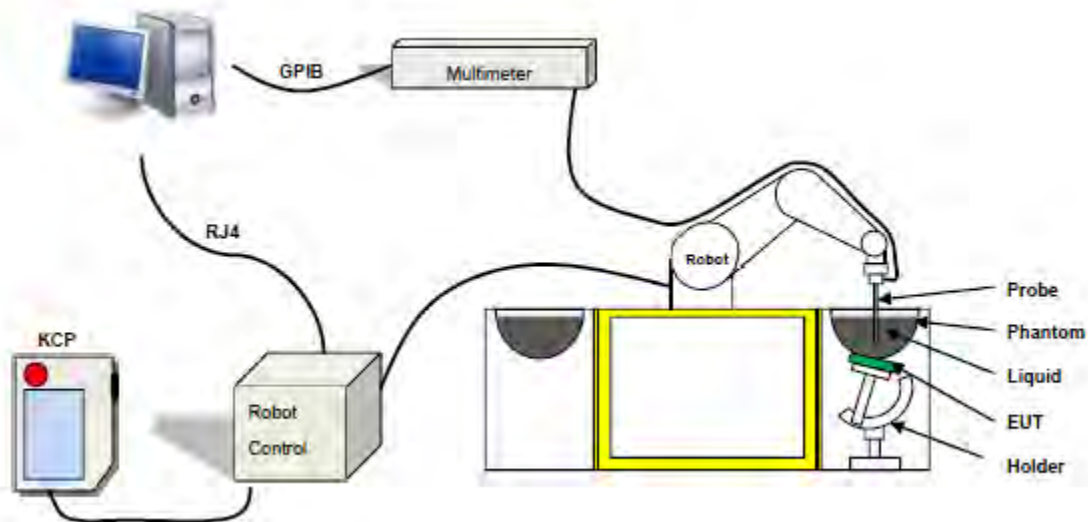

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 07/21 EPG0352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 150 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency	Temp. [°C]					
2022-03-16	23.0	51	688 MHz	22.7	Permittivity	42.23	43.10	2.06	±5
					Conductivity	0.89	0.88	-1.12	±5
2022-03-16	20.1	45	711 MHz	19.8	Permittivity	42.11	41.75	-0.85	±5
					Conductivity	0.89	0.90	1.12	±5
2022-03-16	21.3	56	750 MHz	21.0	Permittivity	41.90	41.02	-2.10	±5
					Conductivity	0.89	0.88	-1.12	±5
2022-03-16	21.7	60	782 MHz	21.4	Permittivity	41.75	42.07	0.77	±5
					Conductivity	0.89	0.90	1.12	±5
2022-03-16	21.2	48	793MHz	20.8	Permittivity	41.70	41.61	-0.22	±5
					Conductivity	0.90	0.87	-3.33	±5
2022-03-17	21.8	43	835 MHz	21.6	Permittivity	41.50	41.40	-0.24	±5
					Conductivity	0.90	0.91	1.11	±5
2022-03-17	20.1	59	841.5 MHz	19.7	Permittivity	41.50	41.67	0.41	±5
					Conductivity	0.91	0.90	-1.10	±5
2022-03-17	23.3	55	844 MHz	23.0	Permittivity	41.50	42.28	1.88	±5
					Conductivity	0.91	0.93	2.20	±5
2022-03-17	23.6	47	846.6MHz	23.3	Permittivity	41.50	40.24	-3.04	±5
					Conductivity	0.91	0.89	-2.20	±5
2022-03-21	23.2	40	1745 MHz	22.9	Permittivity	40.08	39.74	-0.85	±5
					Conductivity	1.37	1.35	-1.46	±5
2022-03-21	20.2	41	1752.4 MHz	19.8	Permittivity	40.07	41.74	4.17	±5
					Conductivity	1.37	1.41	2.92	±5
2022-03-21	23.6	50	1770 MHz	23.2	Permittivity	40.04	40.47	1.07	±5
					Conductivity	1.38	1.37	-0.72	±5
2022-03-21	20.5	58	1800 MHz	20.2	Permittivity	40.00	39.45	-1.37	±5
					Conductivity	1.40	1.39	-0.71	±5
2022-03-22	21.9	45	1860 MHz	21.6	Permittivity	40.00	38.27	-4.32	±5
					Conductivity	1.40	1.45	3.57	±5
2022-03-22	22.9	41	1880 MHz	22.6	Permittivity	40.00	38.76	-3.10	±5
					Conductivity	1.40	1.40	0.00	±5
2022-03-22	21.0	58	1882.5 MHz	20.7	Permittivity	40.00	40.28	0.70	±5
					Conductivity	1.40	1.35	-3.57	±5




2022-03-22	20.3	50	1900 MHz	20.0	Permittivity	40.00	39.58	-1.05	±5
					Conductivity	1.40	1.45	3.57	±5
2022-03-22	22.1	59	1905 MHz	21.8	Permittivity	40.00	40.18	0.45	±5
					Conductivity	1.40	1.37	-2.14	±5
2022-03-22	23.9	43	1907.6 MHz	23.7	Permittivity	40.00	39.06	-2.35	±5
					Conductivity	1.40	1.46	4.29	±5
2022-03-28	23.7	49	2402 MHz	23.4	Permittivity	39.27	40.31	2.65	±5
					Conductivity	1.77	1.78	0.56	±5
2022-03-28	21.3	46	2412 MHz	21.0	Permittivity	39.26	38.16	-2.80	±5
					Conductivity	1.77	1.82	2.82	±5
2022-03-28	22.2	52	2450 MHz	21.9	Permittivity	39.20	39.12	-0.20	±5
					Conductivity	1.80	1.81	0.56	±5
2022-03-29	22.5	44	2560 MHz	22.2	Permittivity	39.05	38.56	-1.25	±5
					Conductivity	1.92	1.96	2.08	±5
2022-03-29	22.0	56	2600 MHz	21.7	Permittivity	39.00	39.18	0.46	±5
					Conductivity	1.96	1.91	-2.55	±5
2022-03-29	21.2	41	2680 MHz	20.8	Permittivity	38.90	38.08	-2.11	±5
					Conductivity	2.05	2.04	-0.49	±5
2022-04-06	22.3	52	5180 MHz	22.0	Permittivity	36.02	37.69	4.64	±5
					Conductivity	4.64	4.59	-1.08	±5
2022-04-06	21.5	46	5200 MHz	21.2	Permittivity	36.00	36.12	0.33	±5
					Conductivity	4.66	4.64	-0.43	±5
2022-04-06	22.1	55	5240 MHz	21.8	Permittivity	35.96	35.46	-1.39	±5
					Conductivity	4.70	4.71	0.21	±5
2022-04-07	23.0	51	5260 MHz	22.7	Permittivity	35.90	35.66	-0.67	±5
					Conductivity	4.76	4.72	-0.84	±5
2022-04-07	23.5	59	5300 MHz	23.2	Permittivity	35.90	34.62	-3.57	±5
					Conductivity	4.76	4.71	-1.05	±5
2022-04-08	20.6	40	5600 MHz	20.3	Permittivity	35.55	36.25	1.97	±5
					Conductivity	5.07	5.06	-0.20	±5
2022-04-08	23.9	43	5700 MHz	23.6	Permittivity	35.43	36.31	2.48	±5
					Conductivity	5.17	5.18	0.19	±5
2022-06-15	22.4	55	5775 MHz	22.1	Permittivity	35.33	34.37	-2.72	±5
					Conductivity	5.24	5.22	-0.38	±5
2022-06-15	22.6	56	5800 MHz	22.3	Permittivity	35.3	35.90	1.70	±5
					Conductivity	5.27	5.26	-0.19	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

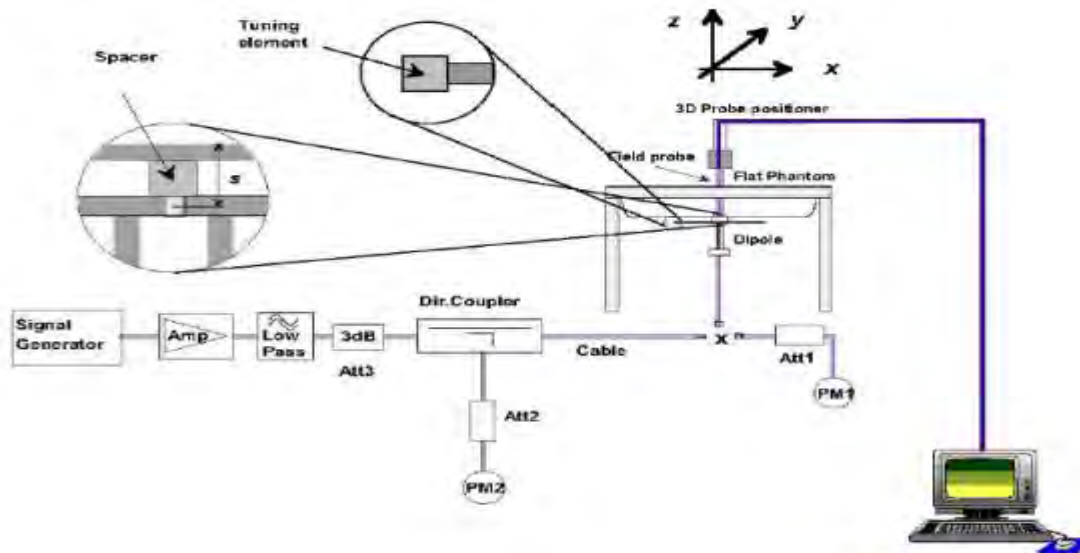



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2022-03-16	750	100	0.868	8.68	8.49	2.25	10
2022-03-17	835	100	0.987	9.87	9.63	2.45	10
2022-03-21	1800	100	3.831	38.31	38.31	-0.01	10
2022-03-22	1900	100	3.998	39.98	39.84	0.35	10
2022-03-28	2450	100	5.473	54.73	54.70	0.05	10
2022-03-29	2600	100	5.601	56.01	56.19	-0.32	10
2022-04-06	5200	100	15.854	158.54	158.49	0.03	10
2022-04-07	5300	100	16.697	166.97	167.20	-0.14	10
2022-04-08	5600	100	17.543	175.43	175.65	-0.13	10
2022-06-15	5800	100	18.308	183.08	183.06	0.01	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position


- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below. When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a Pixavi Thermal/Pixavi Phone, support WCDMA/LTE/WLAN/BT mode.

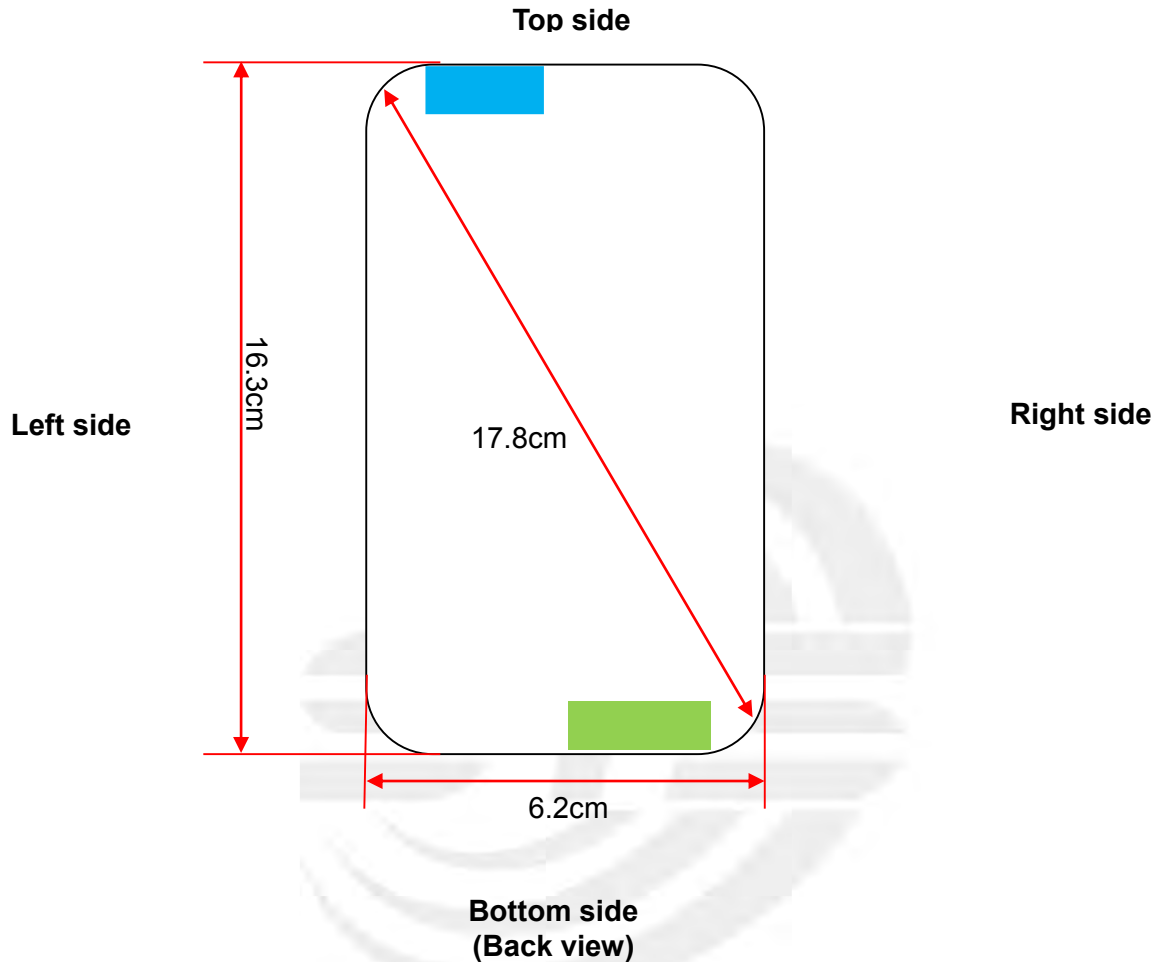

Antenna Separation Distance(cm)						
ANT	Back Side	Front Side	Left Edge	Right Side	Top Edge	Bottom Edge
WLAN/BT	≤0.5	≤0.5	2.3	5.2	≤0.5	14.6
WWAN	≤0.5	≤0.5	5.9	1.1	15.5	≤0.5



Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	WCDMA Band 2	WCDMA Band 4	WCDMA Band 5	LTE Band 2
	Calculated Frequency(GHz)	1.9076	1.7524	0.8466	1.9
	Maximum Turn-up power (dBm)	20.5	21	22	23
	Maximum rated power(mW)	112.20	125.89	158.49	199.53
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.35	3.59	9.07	3.36
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.35	3.59	9.07	3.36
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (cm)	5.9	5.9	5.9	5.9
	exclusion threshold(mW)	320.66	327.96	304.00	321.00
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (cm)	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	14.39	15.18	27.85	14.43
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.5	15.5	15.5	15.5
	exclusion threshold(mW)	1910.61	1919.60	1201.67	1911.03
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.35	3.59	9.07	3.36
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12
	Calculated Frequency(GHz)	1.745	0.844	2.56	0.711
	Maximum Turn-up power (dBm)	23	22.5	22.5	22.5
	Maximum rated power(mW)	199.53	177.83	177.83	177.83
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.60	9.11	2.65	11.59
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.60	9.11	2.65	11.59
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (cm)	5.9	5.9	5.9	5.9
	exclusion threshold(mW)	328.33	303.80	296.61	293.32
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (cm)	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	15.22	27.93	11.96	32.53
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.5	15.5	15.5	15.5
	exclusion threshold(mW)	1920.05	1198.59	1879.75	1038.88
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	3.60	9.11	2.65	11.59
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 13	LTE Band 14	LTE Band 17	LTE Band 25
	Calculated Frequency(GHz)	0.782	0.793	0.711	1.905
	Maximum Turn-up power (dBm)	22	22.5	22.5	23
	Maximum rated power(mW)	158.49	177.83	177.83	199.53
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	10.14	9.94	11.59	3.36
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	10.14	9.94	11.59	3.36
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (cm)	5.9	5.9	5.9	5.9
	exclusion threshold(mW)	299.10	299.95	293.32	320.78
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (cm)	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	29.89	29.52	32.53	14.41
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.5	15.5	15.5	15.5
	exclusion threshold(mW)	1124.70	1137.88	1038.88	1910.75
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	10.14	9.94	11.59	3.36
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 26	LTE Band 41	LTE Band 66	LTE Band 71
	Calculated Frequency(GHz)	0.8415	2.68	1.7725	0.688
	Maximum Turn-up power (dBm)	23	22.5	23	22.5
	Maximum rated power(mW)	199.53	177.83	199.53	177.83
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	9.15	2.55	3.56	12.13
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	9.15	2.55	3.56	12.13
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (cm)	5.9	5.9	5.9	5.9
	exclusion threshold(mW)	303.62	293.03	326.97	291.36
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (cm)	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	28.00	11.62	15.07	33.50
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.5	15.5	15.5	15.5
	exclusion threshold(mW)	1195.63	1874.99	1918.39	1010.78
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	9.15	2.55	3.56	12.13
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	BT	2.4G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN
	Calculated Frequency(GHz)	2.402	2.412	5.2	5.26	5.7	5.775
	Maximum Turn-up power (dBm)	9.5	13	14	14	14	5.5
	Maximum rated power(mW)	8.91	19.95	25.12	25.12	25.12	3.55
Back Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	2.79	2.78	1.50	1.49	1.40	1.38
	Testing required?	YES	YES	YES	YES	YES	YES
Front Side	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	2.79	2.78	1.50	1.49	1.40	1.38
	Testing required?	YES	YES	YES	YES	YES	YES
Left Edge	Separation distance (cm)	2.3	2.3	2.3	2.3	2.3	2.3
	exclusion threshold(mW)	50.47	50.37	35.12	34.93	33.64	33.43
	Testing required?	NO	NO	NO	NO	NO	NO
Right Edge	Separation distance (cm)	5.2	5.2	5.2	5.2	5.2	5.2
	exclusion threshold(mW)	237.37	237.08	189.37	188.73	184.35	183.65
	Testing required?	NO	NO	NO	NO	NO	NO
Top Edge	Separation distance (cm)	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5	≤0.5
	exclusion threshold(mW)	2.79	2.78	1.50	1.49	1.40	1.38
	Testing required?	YES	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (cm)	14.6	14.6	14.6	14.6	14.6	14.6
	exclusion threshold(mW)	1683.94	1683.47	1597.37	1596.12	1587.38	1585.96
	Testing required?	NO	NO	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.



3. Per KDB 447498 D04, if the maximum time-averaged power available does not exceed 1 mW. This stand-alone SAR exemption test.
4. Per KDB 447498 D04, the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

5. Per KDB 447498 D04, An alternative to the SAR-based exemption is using below table and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in below table to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

RF Source frequency (MHz)	Threshold ERP(watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .



6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.




8. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


8.1 Define Two Imaginary Lines on the Handset

(1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.
(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

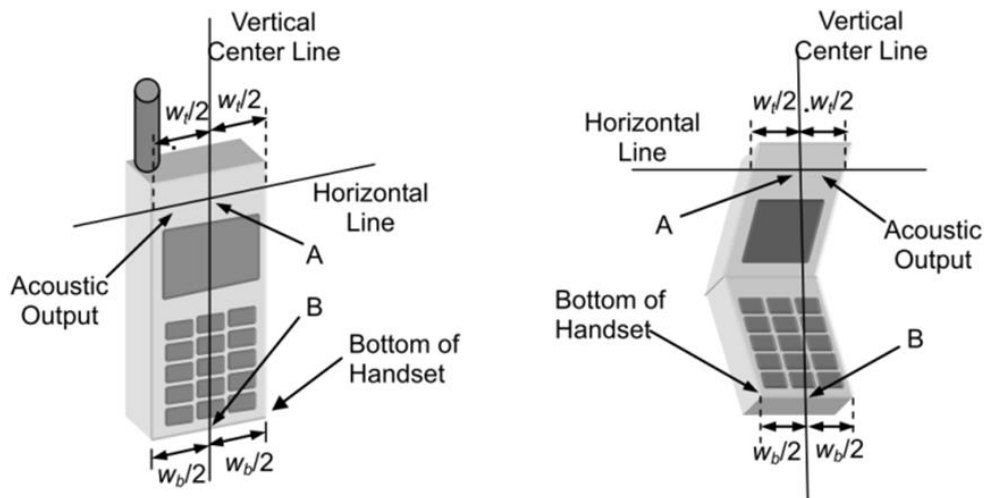


Cheek Position

1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

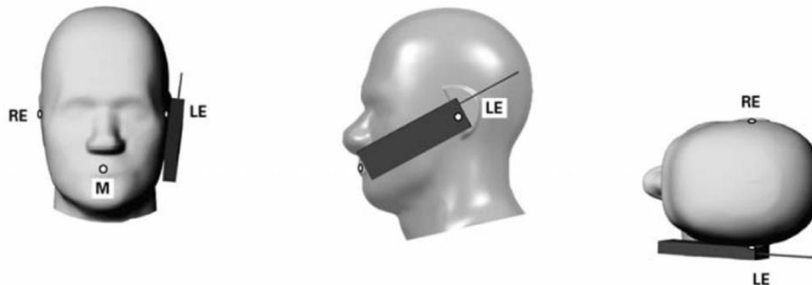


Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

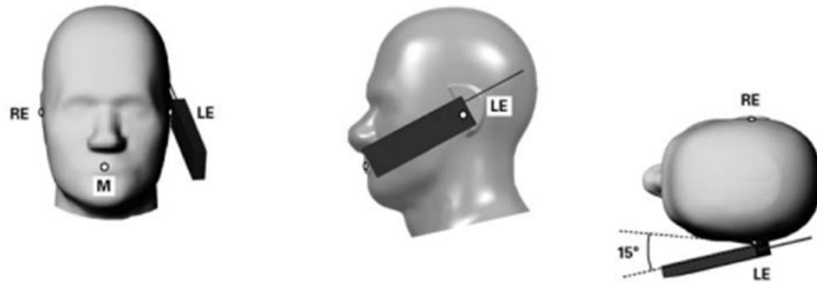


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

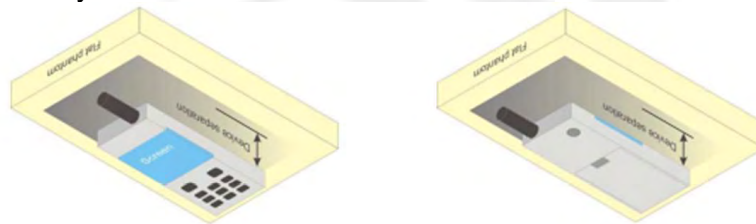

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

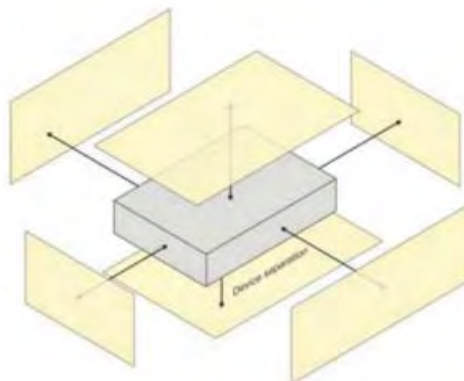



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+/- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+/-%)	10g Ui (+/-%)	vi
Measurement System								
Probe calibration	5.86	N	1	1	1	5.86	5.86	∞
Axial Isotropy	0.16	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.07	0.07	∞
Hemispherical Isotropy	1.06	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	1.27	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	1.23	R	$\sqrt{3}$	1	1	0.71	0.71	∞
Modulation response	3.6	R	$\sqrt{3}$	1	1	3.60	3.60	∞
Readout Electronics	0.28	N	1	1	1	0.28	0.28	∞
Response Time	0.19	R	$\sqrt{3}$	1	1	0.11	0.11	∞
Integration Time	1.47	R	$\sqrt{3}$	1	1	0.85	0.85	∞
RF ambient conditions- Noise	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	∞
RF ambient conditions- reflections	3.2	R	$\sqrt{3}$	1	1	1.85	1.85	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	3.1	N	1	1	1	3.10	3.10	∞
Device holder uncertainty	3.8	N	1	1	1	3.80	3.80	∞
SAR drift measurement	4.8	R	$\sqrt{3}$	1	1	2.77	2.77	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.95	1.78	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	0.92	1.04	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	1.95	1.78	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				10.60	10.51	
Expanded Uncertainty (95% Confidence interval)		K=2				21.21	21.03	



10. Conducted Power Measurement

10.1 Test Result

WCDMA

Band	WCDMA Band 2			WCDMA Band 4			WCDMA Band 5		
Channel	9262	9400	9538	1312	1413	1513	4132	4183	4233
Frequency (MHz)	1852.4	1880	1907.6	1712.6	1740	1752.4	826.4	836.6	846.6
RMC 12.2Kbps	19.84	19.75	20.14	20.79	20.78	20.92	21.4	21.32	21.64
HSDPA Subtest-1	19.96	19.8	19.86	20.46	20.81	20.54	21.47	21.35	21.56
HSDPA Subtest-2	19.54	19.39	19.98	20.42	20.33	20.08	21	20.9	21.16
HSDPA Subtest-3	19.16	18.97	19.6	19.96	19.87	19.65	20.51	20.5	20.83
HSDPA Subtest-4	18.69	18.63	19.24	19.64	19.4	19.24	20.02	20.12	20.39
HSUPA Subtest-1	19.96	20.08	19.58	20.84	20.59	20.52	21.61	21.44	21.63
HSUPA Subtest-2	18.98	19.11	18.60	19.88	19.60	19.54	20.62	20.46	20.67
HSUPA Subtest-3	18.85	18.63	18.19	19.72	19.19	19.18	20.43	19.98	20.34
HSUPA Subtest-4	18.45	18.23	17.77	19.37	18.87	18.83	20.08	19.51	19.84
HSUPA Subtest-5	17.00	16.79	16.28	17.88	17.43	17.37	18.62	18.10	18.37

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**2.4G WLAN**

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
802.11b	1	2412	12.88	19.41
	7	2437	12.84	19.23
	11	2462	12.66	18.45
802.11g	1	2412	12.23	16.70
	7	2437	12.09	16.17
	11	2462	11.71	14.82
802.11 n-HT20	1	2412	12.07	16.12
	7	2437	11.88	15.43
	11	2462	11.65	14.64
802.11 n-HT40	3	2422	11.97	15.74
	6	2437	12.15	16.41
	9	2452	11.77	15.04

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	9.18	8.28
	39	2441	8.68	7.38
	78	2480	7.88	6.14
$\pi/4$ -QPSK(2Mbps)	0	2402	6.53	4.50
	39	2441	5.63	3.66
	78	2480	5.82	3.82
8DPSK(3Mbps)	0	2402	6.57	4.54
	39	2441	5.62	3.65
	78	2480	5.82	3.82

**BLE**

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	-0.18	0.96
	19	2440	-1.18	0.76
	39	2480	-1.73	0.67
GFSK(2Mbps)	0	2402	-0.46	0.90
	19	2440	-1.47	0.71
	39	2480	-1.94	0.64

WLAN (5.2Gband)

5.2G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	36	5180	13.10	20.43
	40	5200	13.13	20.57
	48	5240	13.00	19.97
802.11 n-HT20	36	5180	12.97	19.81
	40	5200	12.99	19.90
	48	5240	12.94	19.67
802.11 n-HT40	38	5190	13.02	20.06
	46	5230	12.94	19.70
802.11ac-VHT20	36	5180	12.91	19.53
	40	5200	12.95	19.71
	48	5240	12.89	19.44
802.11ac-VHT40	38	5190	13.09	20.36
	46	5230	13.00	19.94
802.11ac-VHT80	42	5210	8.65	7.33

**WLAN (5.3Gband)**

5.3G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	52	5260	13.25	21.13
	60	5300	13.19	20.84
	64	5320	13.14	20.60
802.11 n-HT20	52	5260	13.15	20.64
	60	5300	13.05	20.17
	64	5320	12.95	19.71
802.11 n-HT40	54	5270	13.15	20.65
	62	5310	13.13	20.55
802.11ac-VHT20	52	5260	13.05	20.17
	60	5300	12.98	19.85
	64	5320	12.96	19.76
802.11ac-VHT40	54	5270	13.20	20.91
	62	5310	13.10	20.44
802.11ac-VHT80	58	5290	9.71	9.35

WLAN (5.6Gband)

5.6G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	100	5500	11.93	15.60
	116	5580	12.38	17.30
	140	5700	13.91	24.61
802.11 n-HT20	100	5500	11.74	14.92
	116	5580	12.23	16.70
	140	5700	13.73	23.59
802.11 n-HT40	102	5510	11.89	15.45
	110	5550	12.11	16.26
	134	5670	13.63	23.07
802.11ac-VHT20	100	5500	11.77	15.03
	116	5580	12.22	16.67
	140	5700	13.71	23.49
802.11ac-VHT40	102	5510	11.80	15.14
	110	5550	12.06	16.07
	134	5670	13.56	22.71
802.11ac-VHT80	106	5530	7.85	6.10
	122	5610	8.57	7.20

**WLAN (5.8Gband)**

5.8G WLAN				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11a20	149	5745	3.59	2.29
	157	5785	3.55	2.26
	165	5825	3.52	2.25
802.11 n-HT20	149	5745	3.56	2.27
	157	5785	3.59	2.29
	165	5825	3.45	2.21
802.11 n-HT40	151	5755	3.59	2.29
	159	5795	3.52	2.25
802.11ac-VHT20	149	5745	4.34	2.72
	157	5785	4.33	2.71
	165	5825	4.30	2.69
802.11ac-VHT40	151	5755	3.68	2.33
	159	5795	3.65	2.32
802.11ac-VHT80	155	5775	5.26	3.36



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.12	21.24	21.37
1.4	1	2		21.01	21.20	21.28
1.4	1	5		20.81	21.04	21.10
1.4	3	0		20.62	20.98	21.07
1.4	3	1		20.48	20.82	20.89
1.4	3	3		20.39	20.66	20.77
1.4	6	0		20.25	20.55	20.69
1.4	1	0	16-QAM	21.11	21.19	21.34
1.4	1	2		20.95	21.19	21.26
1.4	1	5		20.74	20.93	21.08
1.4	3	0		20.56	20.89	21.00
1.4	3	1		20.39	20.65	20.88
1.4	3	3		20.36	20.49	20.70
1.4	6	0		20.14	20.47	20.66
3	1	0	QPSK	21.47	21.56	21.62
3	1	7		21.31	21.42	21.50
3	1	14		21.21	21.31	21.41
3	8	0		21.09	21.14	21.29
3	8	3		21.04	21.07	21.10
3	8	7		20.87	20.97	20.92
3	15	0		20.76	20.83	20.80
3	1	0	16-QAM	21.31	21.55	21.53
3	1	7		21.13	21.27	21.45
3	1	14		21.15	21.18	21.24
3	8	0		20.95	21.07	21.11
3	8	3		21.00	21.07	20.95
3	8	7		20.72	20.93	20.85
3	15	0		20.75	20.78	20.61



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.71	21.84	21.95
5	1	12		21.56	21.79	21.83
5	1	24		21.47	21.75	21.83
5	12	0		21.30	21.67	21.67
5	12	6		21.18	21.52	21.57
5	12	13		21.12	21.38	21.47
5	25	0		21.02	21.23	21.36
5	1	0	16-QAM	21.70	21.77	21.90
5	1	12		21.52	21.73	21.80
5	1	24		21.35	21.67	21.64
5	12	0		21.20	21.49	21.51
5	12	6		21.17	21.47	21.44
5	12	13		21.00	21.36	21.42
5	25	0		21.02	21.07	21.28
10	1	0	QPSK	22.01	22.13	22.24
10	1	24		21.93	21.95	22.23
10	1	49		21.88	21.79	22.13
10	25	0		21.71	21.67	21.94
10	25	12		21.61	21.56	21.75
10	25	25		21.57	21.50	21.56
10	50	0		21.50	21.42	21.45
10	1	0	16-QAM	21.99	22.04	22.12
10	1	24		21.84	21.92	22.05
10	1	49		21.85	21.70	22.10
10	25	0		21.59	21.62	21.83
10	25	12		21.49	21.44	21.65
10	25	25		21.38	21.33	21.43
10	50	0		21.42	21.29	21.30



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.37	22.48	22.57
15	1	37		22.22	22.40	22.52
15	1	74		22.11	22.20	22.42
15	36	0		21.91	22.05	22.41
15	36	18		21.76	21.91	22.22
15	36	39		21.71	21.77	22.14
15	75	0		21.62	21.62	22.10
15	1	0	16-QAM	22.23	22.36	22.49
15	1	38		22.13	22.20	22.48
15	1	74		21.94	22.14	22.39
15	36	0		21.86	21.90	22.39
15	36	18		21.57	21.75	22.20
15	36	39		21.61	21.63	22.09
15	75	0		21.46	21.53	22.03
20	1	0	QPSK	22.63	22.77	22.81
20	1	50		22.61	22.62	22.73
20	1	99		22.53	22.51	22.61
20	50	0		22.49	22.33	22.53
20	50	25		22.46	22.16	22.44
20	50	50		22.32	22.05	22.41
20	100	0		22.23	21.89	22.30
20	1	0	16-QAM	22.44	22.67	22.64
20	1	50		22.59	22.53	22.71
20	1	99		22.38	22.36	22.53
20	50	0		22.43	22.32	22.46
20	50	25		22.43	22.04	22.43
20	50	50		22.15	21.94	22.34
20	100	0		22.21	21.76	22.19



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.17	21.24	21.38
1.4	1	2		21.12	21.20	21.22
1.4	1	5		21.03	21.03	21.20
1.4	3	0		20.95	20.91	21.09
1.4	3	1		20.78	20.80	21.07
1.4	3	3		20.73	20.75	20.97
1.4	6	0		20.58	20.64	20.80
1.4	1	0	16-QAM	21.15	21.14	21.34
1.4	1	2		21.09	21.04	21.11
1.4	1	5		20.93	20.89	21.19
1.4	3	0		20.76	20.74	21.05
1.4	3	1		20.58	20.76	20.89
1.4	3	3		20.58	20.75	20.85
1.4	6	0		20.50	20.47	20.63
3	1	0	QPSK	21.41	21.57	21.63
3	1	7		21.35	21.42	21.53
3	1	14		21.33	21.27	21.42
3	8	0		21.31	21.09	21.34
3	8	3		21.15	21.01	21.19
3	8	7		20.98	20.94	21.17
3	15	0		20.91	20.74	21.08
3	1	0	16-QAM	21.40	21.43	21.57
3	1	7		21.28	21.36	21.38
3	1	14		21.19	21.18	21.24
3	8	0		21.24	21.08	21.27
3	8	4		21.09	20.82	20.99
3	8	7		20.94	20.82	21.10
3	15	0		20.76	20.59	20.91



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.71	21.82	21.99
5	1	12		21.54	21.80	21.96
5	1	24		21.46	21.71	21.87
5	12	0		21.30	21.64	21.81
5	12	6		21.29	21.52	21.72
5	12	13		21.20	21.32	21.66
5	25	0		21.05	21.31	21.52
5	1	0	16-QAM	21.57	21.74	21.81
5	1	12		21.46	21.75	21.87
5	1	24		21.46	21.59	21.70
5	12	0		21.28	21.56	21.77
5	12	6		21.27	21.48	21.61
5	12	13		21.02	21.31	21.53
5	25	0		20.99	21.11	21.47
10	1	0	QPSK	22.05	22.17	22.23
10	1	24		21.97	22.11	22.09
10	1	49		21.88	21.98	22.03
10	25	0		21.86	21.96	21.99
10	25	12		21.75	21.93	21.91
10	25	25		21.71	21.86	21.79
10	50	0		21.57	21.77	21.73
10	1	0	16-QAM	22.03	22.02	22.09
10	1	24		21.91	21.92	22.03
10	1	49		21.82	21.91	21.84
10	25	0		21.75	21.82	21.85
10	25	12		21.66	21.91	21.84
10	25	25		21.62	21.66	21.72
10	50	0		21.54	21.59	21.56



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.34	22.47	22.58
15	1	37		22.30	22.32	22.58
15	1	74		22.12	22.17	22.44
15	36	0		22.03	22.00	22.38
15	36	19		21.91	21.84	22.27
15	36	39		21.88	21.65	22.10
15	75	0		21.81	21.58	22.07
15	1	0	16-QAM	22.22	22.41	22.52
15	1	38		22.29	22.22	22.56
15	1	75		22.01	22.13	22.27
15	36	0		22.01	21.86	22.31
15	36	19		21.76	21.73	22.26
15	36	39		21.76	21.54	21.93
15	75	0		21.75	21.50	21.87
20	1	0	QPSK	22.61	22.73	22.89
20	1	50		22.51	22.63	22.85
20	1	99		22.45	22.59	22.70
20	50	0		22.32	22.57	22.66
20	50	25		22.16	22.48	22.64
20	50	50		22.07	22.30	22.55
20	100	0		22.05	22.30	22.38
20	1	0	16-QAM	22.51	22.56	22.86
20	1	50		22.45	22.53	22.78
20	1	99		22.43	22.46	22.63
20	50	0		22.24	22.50	22.56
20	50	25		22.08	22.43	22.55
20	50	50		21.95	22.17	22.52
20	100	0		21.91	22.11	22.30



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.24	21.38	21.47
1.4	1	2		21.12	21.38	21.37
1.4	1	5		20.96	21.35	21.22
1.4	3	0		20.88	21.29	21.09
1.4	3	1		20.81	21.24	20.98
1.4	3	2		20.76	21.14	20.97
1.4	6	0		20.61	20.96	20.78
1.4	1	0	16-QAM	21.10	21.29	21.47
1.4	1	2		21.07	21.25	21.30
1.4	1	5		20.78	21.24	21.03
1.4	3	0		20.79	21.14	20.89
1.4	3	1		20.66	21.14	20.80
1.4	3	2		20.64	21.03	20.83
1.4	6	0		20.45	20.79	20.69
3	1	0	QPSK	21.54	21.63	21.77
3	1	7		21.39	21.48	21.67
3	1	14		21.34	21.29	21.62
3	8	0		21.26	21.26	21.56
3	8	4		21.08	21.07	21.41
3	8	7		21.03	21.06	21.24
3	15	0		20.98	21.00	21.23
3	1	0	16-QAM	21.52	21.51	21.61
3	1	7		21.26	21.42	21.65
3	1	14		21.19	21.27	21.55
3	8	0		21.16	21.16	21.36
3	8	4		20.91	21.02	21.37
3	8	7		20.86	20.89	21.20
3	15	0		20.91	20.94	21.20



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.84	21.95	22.03
5	1	12		21.78	21.81	21.95
5	1	24		21.65	21.63	21.83
5	12	0		21.56	21.62	21.79
5	12	6		21.40	21.59	21.76
5	12	11		21.33	21.42	21.63
5	25	0		21.23	21.30	21.44
5	1	0	16-QAM	21.71	21.80	21.83
5	1	12		21.74	21.81	21.92
5	1	24		21.56	21.50	21.72
5	12	0		21.44	21.52	21.79
5	12	6		21.29	21.55	21.74
5	12	11		21.32	21.24	21.48
5	25	0		21.20	21.29	21.30
10	1	0	QPSK	22.17	22.27	22.34
10	1	24		22.03	22.11	22.29
10	1	49		21.87	21.92	22.20
10	25	0		21.80	21.81	22.14
10	25	12		21.74	21.69	22.08
10	25	24		21.58	21.52	21.93
10	50	0		21.43	21.39	21.92
10	1	0	16-QAM	22.05	22.20	22.26
10	1	24		21.94	21.92	22.17
10	1	49		21.75	21.89	22.15
10	25	0		21.73	21.78	22.07
10	25	12		21.69	21.53	21.94
10	25	24		21.51	21.37	21.91
10	50	0		21.34	21.30	21.73



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.22	21.37	21.41
5	1	12		21.16	21.30	21.36
5	1	24		21.12	21.16	21.25
5	12	0		20.96	21.08	21.12
5	12	6		20.94	20.93	21.05
5	12	11		20.93	20.92	21.00
5	25	0		20.87	20.81	20.89
5	1	0	16-QAM	21.09	21.20	21.27
5	1	12		20.97	21.11	21.33
5	1	24		20.95	20.97	21.18
5	12	0		20.83	21.06	20.99
5	12	6		20.78	20.86	20.89
5	12	11		20.87	20.87	20.86
5	25	0		20.78	20.68	20.73
10	1	0	QPSK	21.58	21.63	21.77
10	1	24		21.47	21.52	21.68
10	1	49		21.43	21.51	21.56
10	25	0		21.35	21.34	21.42
10	25	12		21.17	21.33	21.35
10	25	24		21.10	21.29	21.27
10	50	0		20.95	21.25	21.11
10	1	0	16-QAM	21.42	21.49	21.60
10	1	24		21.34	21.32	21.51
10	1	49		21.38	21.33	21.43
10	25	0		21.22	21.19	21.29
10	25	12		20.98	21.18	21.27
10	25	24		21.05	21.26	21.17
10	50	0		20.88	21.10	20.99



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.84	21.96	22.01
15	1	37		21.68	21.77	21.90
15	1	74		21.56	21.73	21.72
15	36	0		21.38	21.68	21.62
15	36	18		21.35	21.60	21.59
15	36	39		21.20	21.51	21.45
15	75	0		21.12	21.48	21.38
15	1	0	16-QAM	21.77	21.94	22.00
15	1	38		21.66	21.76	21.89
15	1	75		21.39	21.60	21.68
15	36	0		21.27	21.48	21.51
15	36	18		21.23	21.41	21.51
15	36	39		21.07	21.33	21.29
15	75	0		21.07	21.46	21.21
20	1	0	QPSK	22.13	22.27	22.39
20	1	49		21.96	22.22	22.38
20	1	99		21.80	22.18	22.29
20	50	0		21.63	22.14	22.15
20	50	24		21.62	22.08	22.06
20	50	49		21.62	21.95	21.98
20	100	0		21.46	21.83	21.82
20	1	0	16-QAM	21.97	22.22	22.33
20	1	49		21.94	22.10	22.28
20	1	99		21.63	22.01	22.27
20	50	0		21.46	21.95	22.13
20	50	24		21.45	21.90	21.95
20	50	49		21.60	21.84	21.91
20	100	0		21.31	21.68	21.72



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.14	21.27	21.33
1.4	1	2		21.08	21.17	21.32
1.4	1	5		20.90	21.14	21.20
1.4	3	0		20.85	21.12	21.00
1.4	3	1		20.67	21.06	20.86
1.4	3	2		20.67	20.97	20.84
1.4	6	0		20.61	20.96	20.77
1.4	1	0	16-QAM	21.07	21.19	21.16
1.4	1	2		20.90	21.07	21.16
1.4	1	5		20.71	20.97	21.06
1.4	3	0		20.76	21.04	20.82
1.4	3	1		20.48	20.98	20.77
1.4	3	2		20.50	20.84	20.70
1.4	6	0		20.57	20.95	20.62
3	1	0	QPSK	21.47	21.52	21.66
3	1	7		21.28	21.39	21.65
3	1	14		21.19	21.27	21.48
3	8	0		21.14	21.10	21.42
3	8	4		21.06	21.08	21.25
3	8	7		21.00	20.89	21.18
3	15	0		21.00	20.73	21.08
3	1	0	16-QAM	21.35	21.46	21.46
3	1	7		21.21	21.20	21.55
3	1	14		21.10	21.17	21.41
3	8	0		20.96	20.99	21.30
3	8	4		21.05	20.96	21.05
3	8	7		20.92	20.86	21.10
3	15	0		20.82	20.61	20.93



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.73	21.84	21.97
5	1	12		21.56	21.72	21.85
5	1	24		21.45	21.56	21.76
5	12	0		21.33	21.45	21.56
5	12	6		21.33	21.31	21.40
5	12	11		21.13	21.18	21.22
5	25	0		21.11	21.12	21.12
5	1	0	16-QAM	21.70	21.66	21.96
5	1	12		21.49	21.68	21.67
5	1	24		21.25	21.55	21.72
5	12	0		21.19	21.44	21.45
5	12	6		21.16	21.17	21.37
5	12	11		20.95	21.00	21.05
5	25	0		21.08	21.03	21.02
10	1	0	QPSK	22.03	22.14	22.25
10	1	24		22.01	22.01	22.13
10	1	49		21.91	21.91	22.12
10	25	0		21.78	21.89	21.94
10	25	12		21.77	21.87	21.89
10	25	24		21.70	21.79	21.86
10	50	0		21.51	21.64	21.68
10	1	0	16-QAM	21.94	22.12	22.19
10	1	24		21.96	21.97	22.06
10	1	49		21.75	21.73	21.97
10	25	0		21.75	21.82	21.77
10	25	12		21.69	21.74	21.76
10	25	24		21.51	21.71	21.72
10	50	0		21.51	21.60	21.68



LTE BAND 13

LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.23	21.42	21.55
5	1	12		21.08	21.33	21.37
5	1	24		21.05	21.29	21.21
5	12	0		21.01	21.14	21.11
5	12	6		20.86	21.08	20.99
5	12	11		20.75	20.97	20.87
5	25	0		20.73	20.93	20.86
5	1	0	16-QAM	21.03	21.27	21.42
5	1	12		21.05	21.20	21.22
5	1	24		20.85	21.20	21.15
5	12	0		20.96	20.99	20.91
5	12	6		20.81	20.93	20.95
5	12	11		20.57	20.90	20.76
5	25	0		20.62	20.90	20.85
10	1	0	QPSK	/	21.63	/
10	1	24		/	21.58	/
10	1	49		/	21.49	/
10	25	0		/	21.29	/
10	25	12		/	21.25	/
10	25	24		/	21.11	/
10	50	0		/	21.05	/
10	1	0	16-QAM	/	21.51	/
10	1	24		/	21.46	/
10	1	49		/	21.40	/
10	25	0		/	21.27	/
10	25	12		/	21.07	/
10	25	24		/	21.02	/
10	50	0		/	20.96	/



LTE BAND 14

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.32	21.51	21.67
5	1	12		21.26	21.40	21.59
5	1	24		21.15	21.34	21.58
5	12	0		20.99	21.19	21.56
5	12	6		20.82	21.13	21.54
5	12	11		20.71	21.10	21.43
5	25	0		20.66	21.06	21.29
5	1	0	16-QAM	21.21	21.36	21.53
5	1	12		21.19	21.30	21.52
5	1	24		21.07	21.21	21.39
5	12	0		20.98	21.14	21.41
5	12	6		20.67	21.04	21.53
5	12	11		20.63	21.02	21.25
5	25	0		20.59	20.98	21.16
10	1	0	QPSK	/	22.04	/
10	1	24		/	21.98	/
10	1	49		/	21.85	/
10	25	0		/	21.73	/
10	25	12		/	21.68	/
10	25	24		/	21.64	/
10	50	0		/	21.44	/
10	1	0	16-QAM	/	21.88	/
10	1	24		/	21.96	/
10	1	49		/	21.68	/
10	25	0		/	21.70	/
10	25	12		/	21.55	/
10	25	24		/	21.63	/
10	50	0		/	21.44	/



LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.24	21.53	21.74
5	1	12		21.19	21.43	21.65
5	1	24		21.05	21.34	21.56
5	12	0		20.93	21.24	21.42
5	12	6		20.83	21.14	21.30
5	12	11		20.77	21.03	21.27
5	25	0		20.66	20.90	21.22
5	1	0	16-QAM	21.17	21.42	21.69
5	1	12		21.14	21.31	21.63
5	1	24		20.87	21.25	21.37
5	12	0		20.74	21.10	21.30
5	12	6		20.81	21.06	21.10
5	12	11		20.65	21.02	21.24
5	25	0		20.51	20.88	21.11
10	1	0	QPSK	22.01	22.13	22.28
10	1	24		21.81	21.98	22.10
10	1	49		21.78	21.81	21.92
10	25	0		21.61	21.61	21.79
10	25	12		21.48	21.53	21.74
10	25	24		21.40	21.40	21.57
10	50	0		21.38	21.22	21.38
10	1	0	16-QAM	21.85	22.10	22.22
10	1	24		21.64	21.86	21.92
10	1	49		21.69	21.80	21.75
10	25	0		21.55	21.52	21.61
10	25	12		21.41	21.36	21.66
10	25	24		21.27	21.38	21.44
10	50	0		21.25	21.18	21.34



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.14	21.28	21.33
1.4	1	2		21.05	21.26	21.20
1.4	1	5		21.00	21.13	21.18
1.4	3	0		20.97	21.03	21.13
1.4	3	1		20.97	20.87	20.96
1.4	3	2		20.85	20.71	20.77
1.4	6	0		20.81	20.58	20.64
1.4	1	0	16-QAM	20.95	21.24	21.24
1.4	1	2		21.03	21.21	21.04
1.4	1	5		20.82	21.12	21.13
1.4	3	0		20.93	20.93	21.02
1.4	3	1		20.77	20.76	20.94
1.4	3	2		20.78	20.64	20.74
1.4	6	0		20.80	20.51	20.49
3	1	0	QPSK	21.45	21.52	21.61
3	1	7		21.38	21.37	21.42
3	1	14		21.36	21.31	21.39
3	8	0		21.17	21.12	21.30
3	8	4		21.13	21.07	21.20
3	8	7		20.99	20.93	21.18
3	15	0		20.92	20.74	21.06
3	1	0	16-QAM	21.40	21.35	21.50
3	1	7		21.34	21.28	21.35
3	1	14		21.17	21.22	21.23
3	8	0		21.01	20.98	21.24
3	8	4		21.11	20.88	21.19
3	8	7		20.90	20.80	21.05
3	15	0		20.73	20.72	20.93



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.73	21.89	21.94
5	1	12		21.58	21.86	21.80
5	1	24		21.47	21.70	21.80
5	12	0		21.41	21.50	21.72
5	12	6		21.21	21.49	21.64
5	12	11		21.12	21.39	21.59
5	25	0		21.07	21.33	21.40
5	1	0	16-QAM	21.58	21.88	21.88
5	1	12		21.39	21.76	21.74
5	1	24		21.32	21.62	21.66
5	12	0		21.23	21.47	21.58
5	12	6		21.18	21.42	21.56
5	12	11		21.03	21.31	21.49
5	25	0		20.91	21.24	21.40
10	1	0	QPSK	22.03	22.11	22.29
10	1	24		21.99	22.04	22.23
10	1	49		21.86	21.92	22.23
10	25	0		21.75	21.79	22.22
10	25	12		21.71	21.70	22.18
10	25	24		21.63	21.69	22.10
10	50	0		21.45	21.61	22.04
10	1	0	16-QAM	21.99	22.06	22.16
10	1	24		21.98	21.98	22.22
10	1	49		21.71	21.88	22.13
10	25	0		21.71	21.74	22.11
10	25	12		21.54	21.51	22.01
10	25	24		21.59	21.56	22.07
10	50	0		21.40	21.59	22.04



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.34	22.47	22.58
15	1	37		22.16	22.36	22.48
15	1	74		21.99	22.34	22.38
15	36	0		21.88	22.23	22.31
15	36	18		21.77	22.04	22.20
15	36	39		21.73	21.97	22.12
15	75	0		21.70	21.82	22.08
15	1	0	16-QAM	22.27	22.29	22.45
15	1	38		22.16	22.33	22.39
15	1	75		21.88	22.31	22.26
15	36	0		21.85	22.15	22.22
15	36	18		21.60	21.89	22.12
15	36	39		21.55	21.92	22.04
15	75	0		21.66	21.74	21.96
20	1	0	QPSK	22.61	22.73	22.84
20	1	49		22.55	22.72	22.76
20	1	99		22.54	22.67	22.76
20	50	0		22.36	22.54	22.63
20	50	24		22.19	22.38	22.48
20	50	49		22.12	22.22	22.38
20	100	0		22.11	22.07	22.20
20	1	0	16-QAM	22.59	22.66	22.68
20	1	49		22.46	22.58	22.73
20	1	99		22.54	22.59	22.65
20	50	0		22.35	22.42	22.59
20	50	24		22.12	22.18	22.30
20	50	49		22.06	22.02	22.21
20	100	0		22.06	22.00	22.16



LTE BAND 26 (Part 22)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.17	21.25	21.34
1.4	1	2		21.09	21.24	21.23
1.4	1	5		20.95	21.19	21.15
1.4	3	0		20.86	21.12	21.03
1.4	3	1		20.69	21.02	20.86
1.4	3	2		20.64	20.83	20.84
1.4	6	0		20.60	20.77	20.80
1.4	1	0	16-QAM	21.04	21.11	21.29
1.4	1	2		21.06	21.05	21.16
1.4	1	5		20.79	21.01	21.09
1.4	3	0		20.74	21.05	21.03
1.4	3	1		20.65	20.95	20.75
1.4	3	2		20.53	20.79	20.70
1.4	6	0		20.51	20.64	20.75
3	1	0	QPSK	21.49	21.53	21.61
3	1	7		21.42	21.37	21.43
3	1	14		21.36	21.36	21.30
3	8	0		21.17	21.20	21.11
3	8	4		21.00	21.03	20.96
3	8	7		20.99	20.92	20.81
3	15	0		20.98	20.73	20.63
3	1	0	16-QAM	21.36	21.50	21.45
3	1	7		21.40	21.37	21.29
3	1	14		21.22	21.22	21.18
3	8	0		21.10	21.01	20.99
3	8	4		20.88	20.88	20.76
3	8	7		20.79	20.75	20.79
3	15	0		20.86	20.63	20.47



LTE BAND 26 (Part 22)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.77	21.84	21.95
5	1	12		21.63	21.70	21.86
5	1	24		21.45	21.70	21.77
5	12	0		21.38	21.68	21.74
5	12	6		21.37	21.53	21.63
5	12	11		21.33	21.34	21.58
5	25	0		21.19	21.15	21.56
5	1	0	16-QAM	21.63	21.74	21.94
5	1	12		21.47	21.59	21.79
5	1	24		21.28	21.56	21.70
5	12	0		21.22	21.59	21.58
5	12	6		21.18	21.34	21.52
5	12	11		21.28	21.29	21.53
5	25	0		21.12	21.02	21.52
10	1	0	QPSK	22.04	22.10	22.23
10	1	24		22.03	21.90	22.20
10	1	49		21.87	21.78	22.08
10	25	0		21.73	21.78	21.96
10	25	12		21.58	21.75	21.87
10	25	24		21.38	21.66	21.70
10	50	0		21.26	21.54	21.68
10	1	0	16-QAM	22.03	22.08	22.04
10	1	24		21.93	21.73	22.10
10	1	49		21.75	21.62	22.05
10	25	0		21.63	21.63	21.94
10	25	12		21.41	21.63	21.67
10	25	24		21.23	21.53	21.64
10	50	0		21.18	21.49	21.54



LTE BAND 26 (Part 22)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.37	22.41	22.59
15	1	37		22.18	22.26	22.44
15	1	74		22.05	22.25	22.40
15	36	0		21.95	22.05	22.37
15	36	18		21.79	21.86	22.22
15	36	39		21.68	21.67	22.07
15	75	0		21.67	21.55	21.91
15	1	0	16-QAM	22.36	22.24	22.56
15	1	38		22.13	22.23	22.29
15	1	75		22.01	22.05	22.39
15	36	0		21.83	21.95	22.37
15	36	18		21.66	21.76	22.04
15	36	39		21.63	21.64	22.00
15	75	0		21.62	21.50	21.88



LTE BAND 26 (Part 90)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.17	21.25	21.36
1.4	1	2		21.04	21.21	21.26
1.4	1	5		20.87	21.11	21.19
1.4	3	0		20.71	20.91	21.06
1.4	3	1		20.55	20.75	20.87
1.4	3	2		20.48	20.68	20.80
1.4	6	0		20.34	20.67	20.66
1.4	1	0	16-QAM	21.02	21.20	21.21
1.4	1	2		21.02	21.10	21.17
1.4	1	5		20.78	21.02	21.16
1.4	3	0		20.58	20.74	21.01
1.4	3	1		20.44	20.63	20.79
1.4	3	2		20.30	20.53	20.72
1.4	6	0		20.16	20.61	20.62
3	1	0	QPSK	21.47	21.52	21.66
3	1	7		21.39	21.44	21.61
3	1	14		21.36	21.39	21.42
3	8	0		21.18	21.36	21.31
3	8	4		21.05	21.19	21.29
3	8	7		20.88	21.14	21.21
3	15	0		20.86	21.00	21.18
3	1	0	16-QAM	21.32	21.35	21.59
3	1	7		21.30	21.31	21.48
3	1	14		21.31	21.39	21.31
3	8	0		21.09	21.32	21.16
3	8	4		20.87	21.13	21.15
3	8	7		20.83	20.96	21.12
3	15	0		20.70	20.98	21.09



LTE BAND 26 (Part 90)

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.71	21.84	21.93
5	1	12		21.58	21.81	21.75
5	1	24		21.52	21.80	21.57
5	12	0		21.49	21.68	21.45
5	12	6		21.49	21.51	21.30
5	12	11		21.40	21.36	21.30
5	25	0		21.35	21.30	21.29
5	1	0	16-QAM	21.66	21.77	21.78
5	1	12		21.41	21.67	21.55
5	1	24		21.42	21.78	21.54
5	12	0		21.33	21.49	21.26
5	12	6		21.33	21.48	21.12
5	12	11		21.33	21.22	21.27
5	25	0		21.20	21.22	21.09
10	1	0	QPSK	N/A	22.01	N/A
10	1	24		N/A	21.89	N/A
10	1	49		N/A	21.88	N/A
10	25	0		N/A	21.84	N/A
10	25	12		N/A	21.66	N/A
10	25	24		N/A	21.53	N/A
10	50	0		N/A	21.38	N/A
10	1	0	16-QAM	N/A	21.94	N/A
10	1	24		N/A	21.76	N/A
10	1	49		N/A	21.85	N/A
10	25	0		N/A	21.65	N/A
10	25	12		N/A	21.62	N/A
10	25	24		N/A	21.42	N/A
10	50	0		N/A	21.24	N/A



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.17	21.24	21.33
5	1	12		21.00	21.18	21.25
5	1	24		20.90	21.09	21.10
5	12	0		20.84	21.09	21.04
5	12	6		20.74	21.04	20.88
5	12	11		20.54	20.88	20.74
5	25	0		20.43	20.84	20.55
5	1	0	16-QAM	21.11	21.12	21.17
5	1	12		20.82	21.00	21.11
5	1	24		20.81	21.04	21.01
5	12	0		20.79	21.04	21.03
5	12	6		20.72	20.92	20.83
5	12	11		20.52	20.78	20.69
5	25	0		20.39	20.74	20.40
10	1	0	QPSK	21.48	21.53	21.66
10	1	24		21.38	21.53	21.61
10	1	49		21.34	21.39	21.52
10	25	0		21.32	21.20	21.45
10	25	12		21.29	21.08	21.26
10	25	24		21.28	21.06	21.25
10	50	0		21.08	20.99	21.14
10	1	0	16-QAM	21.39	21.49	21.58
10	1	24		21.19	21.49	21.57
10	1	49		21.15	21.26	21.38
10	25	0		21.14	21.12	21.40
10	25	12		21.17	21.02	21.08
10	25	24		21.19	20.95	21.21
10	50	0		21.08	20.96	21.09



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.79	21.91	22.02
15	1	37		21.70	21.87	21.86
15	1	74		21.57	21.76	21.82
15	36	0		21.43	21.72	21.69
15	36	18		21.42	21.61	21.67
15	36	39		21.28	21.52	21.64
15	75	0		21.10	21.42	21.62
15	1	0	16-QAM	21.61	21.79	22.01
15	1	38		21.58	21.77	21.70
15	1	75		21.38	21.58	21.67
15	36	0		21.24	21.66	21.64
15	36	18		21.37	21.60	21.64
15	36	39		21.22	21.47	21.63
15	75	0		21.07	21.26	21.49
20	1	0	QPSK	22.15	22.24	22.38
20	1	49		22.14	22.14	22.23
20	1	99		22.07	21.94	22.18
20	50	0		22.04	21.81	22.06
20	50	24		21.97	21.67	21.87
20	50	49		21.92	21.48	21.75
20	100	0		21.82	21.32	21.71
20	1	0	16-QAM	22.11	22.12	22.32
20	1	49		21.95	22.03	22.13
20	1	99		22.01	21.80	22.15
20	50	0		21.99	21.61	21.92
20	50	24		21.91	21.49	21.80
20	50	49		21.76	21.34	21.61
20	100	0		21.75	21.14	21.58



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.22	21.37	21.42
1.4	1	2		21.06	21.24	21.31
1.4	1	5		20.88	21.07	21.16
1.4	3	0		20.79	21.02	21.14
1.4	3	1		20.67	20.89	21.07
1.4	3	2		20.53	20.79	20.94
1.4	6	0		20.44	20.75	20.88
1.4	1	0	16-QAM	21.06	21.19	21.32
1.4	1	2		20.88	21.16	21.30
1.4	1	5		20.71	20.88	21.16
1.4	3	0		20.79	20.82	21.05
1.4	3	1		20.49	20.73	20.94
1.4	3	2		20.46	20.64	20.92
1.4	6	0		20.43	20.67	20.73
3	1	0	QPSK	21.53	21.68	21.71
3	1	7		21.36	21.55	21.62
3	1	14		21.23	21.47	21.51
3	8	0		21.16	21.31	21.45
3	8	4		21.08	21.17	21.31
3	8	7		20.90	20.98	21.23
3	15	0		20.89	20.93	21.06
3	1	0	16-QAM	21.43	21.63	21.53
3	1	7		21.31	21.54	21.47
3	1	14		21.03	21.32	21.37
3	8	0		21.07	21.14	21.38
3	8	4		21.00	21.00	21.30
3	8	7		20.76	20.85	21.12
3	15	0		20.85	20.80	21.03



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.84	21.96	22.03
5	1	12		21.73	21.79	22.00
5	1	24		21.56	21.65	21.94
5	12	0		21.55	21.57	21.83
5	12	6		21.45	21.48	21.69
5	12	11		21.33	21.40	21.56
5	25	0		21.32	21.27	21.42
5	1	0	16-QAM	21.68	21.79	22.00
5	1	12		21.73	21.70	21.89
5	1	24		21.42	21.65	21.93
5	12	0		21.37	21.40	21.79
5	12	6		21.38	21.37	21.50
5	12	11		21.29	21.33	21.48
5	25	0		21.18	21.17	21.36
10	1	0	QPSK	22.13	22.28	22.35
10	1	24		22.04	22.25	22.34
10	1	49		21.93	22.05	22.24
10	25	0		21.92	21.99	22.12
10	25	12		21.83	21.91	21.95
10	25	24		21.67	21.90	21.86
10	50	0		21.63	21.83	21.71
10	1	0	16-QAM	22.08	22.28	22.35
10	1	24		22.03	22.09	22.21
10	1	49		21.90	21.94	22.04
10	25	0		21.89	21.89	22.07
10	25	12		21.76	21.77	21.81
10	25	24		21.52	21.89	21.70
10	50	0		21.52	21.81	21.67



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.42	22.51	22.39
15	1	37		22.24	22.38	22.20
15	1	74		22.18	22.36	22.04
15	36	0		22.02	22.21	21.85
15	36	18		21.83	22.08	21.76
15	36	39		21.82	22.07	21.68
15	75	0		21.65	22.01	21.60
15	1	0	16-QAM	22.29	22.40	22.34
15	1	38		22.04	22.36	22.12
15	1	75		22.00	22.17	22.00
15	36	0		22.00	22.12	21.80
15	36	18		21.66	22.08	21.72
15	36	39		21.80	21.91	21.63
15	75	0		21.59	22.00	21.53
20	1	0	QPSK	22.50	22.67	22.71
20	1	49		22.34	22.57	22.53
20	1	99		22.33	22.42	22.43
20	50	0		22.26	22.39	22.23
20	50	24		22.13	22.31	22.21
20	50	49		22.00	22.25	22.04
20	100	0		21.91	22.19	22.01
20	1	0	16-QAM	22.41	22.59	22.61
20	1	49		22.21	22.43	22.44
20	1	99		22.19	22.32	22.37
20	50	0		22.22	22.26	22.10
20	50	24		22.12	22.13	22.08
20	50	49		21.84	22.11	21.98
20	100	0		21.91	22.12	21.99



LTE BAND 71

LTE Band 71 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.17	21.24	21.35
5	1	12		21.00	21.21	21.18
5	1	24		20.87	21.07	20.99
5	12	0		20.87	20.95	20.80
5	12	6		20.73	20.85	20.62
5	12	11		20.54	20.80	20.62
5	25	0		20.53	20.71	20.58
5	1	0	16-QAM	20.97	21.24	21.29
5	1	12		20.98	21.02	21.06
5	1	24		20.74	20.90	20.93
5	12	0		20.86	20.93	20.62
5	12	6		20.65	20.78	20.49
5	12	11		20.42	20.78	20.50
5	25	0		20.47	20.66	20.57
10	1	0	QPSK	21.49	21.53	21.68
10	1	24		21.38	21.37	21.51
10	1	49		21.26	21.20	21.46
10	25	0		21.21	21.03	21.29
10	25	12		21.14	20.87	21.19
10	25	24		21.09	20.75	21.00
10	50	0		21.00	20.56	20.96
10	1	0	16-QAM	21.48	21.38	21.53
10	1	24		21.35	21.17	21.46
10	1	49		21.18	21.12	21.42
10	25	0		21.18	20.85	21.13
10	25	12		21.07	20.68	21.12
10	25	24		21.08	20.56	20.84
10	50	0		20.91	20.41	20.95



LTE BAND 71

LTE Band 71 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.71	21.89	22.01
15	1	37		21.64	21.83	21.82
15	1	74		21.52	21.65	21.75
15	36	0		21.35	21.55	21.63
15	36	18		21.31	21.41	21.59
15	36	39		21.27	21.25	21.41
15	75	0		21.15	21.15	21.32
15	1	0	16-QAM	21.51	21.81	21.93
15	1	38		21.45	21.75	21.75
15	1	75		21.37	21.60	21.71
15	36	0		21.18	21.51	21.60
15	36	18		21.21	21.28	21.50
15	36	39		21.10	21.24	21.40
15	75	0		21.08	21.06	21.15
20	1	0	QPSK	22.14	22.22	22.37
20	1	49		22.07	22.18	22.37
20	1	99		22.02	21.99	22.27
20	50	0		21.84	21.93	22.10
20	50	24		21.84	21.89	22.00
20	50	49		21.80	21.77	21.87
20	100	0		21.62	21.72	21.78
20	1	0	16-QAM	22.00	22.09	22.26
20	1	49		22.03	22.09	22.18
20	1	99		21.91	21.93	22.19
20	50	0		21.67	21.90	21.90
20	50	24		21.81	21.78	21.87
20	50	49		21.62	21.66	21.82
20	100	0		21.46	21.55	21.69

11. EUT and Test Setup Photo

11.1 EUT Photo


Front side



Back side




Top side

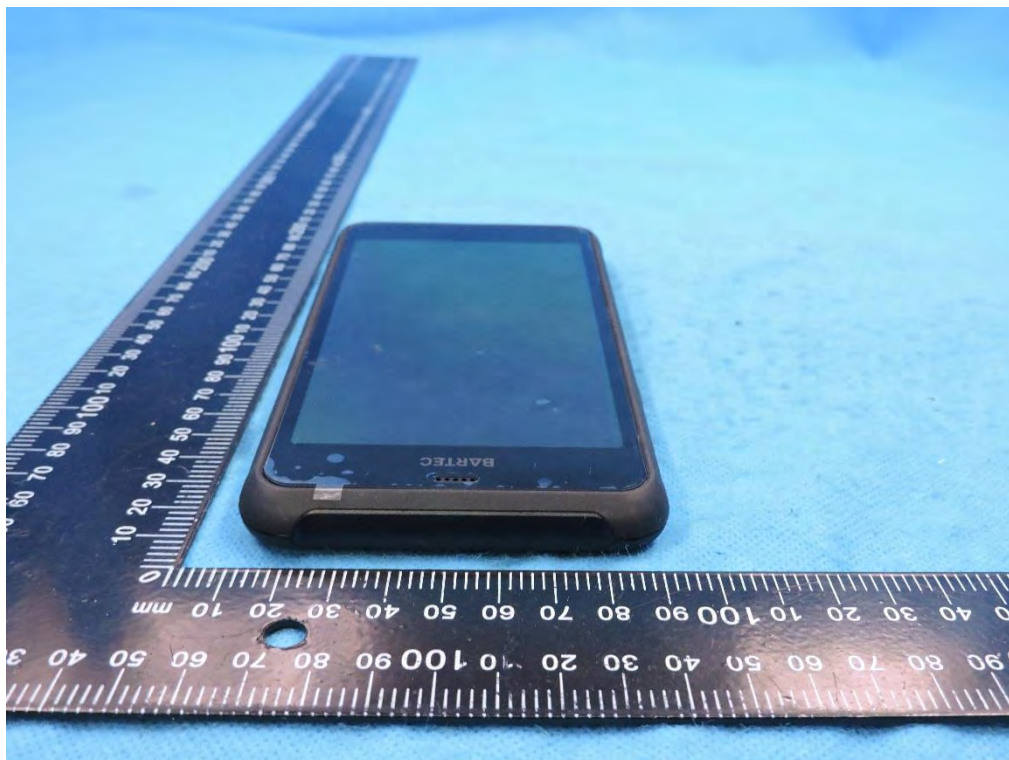


Bottom side



Left side

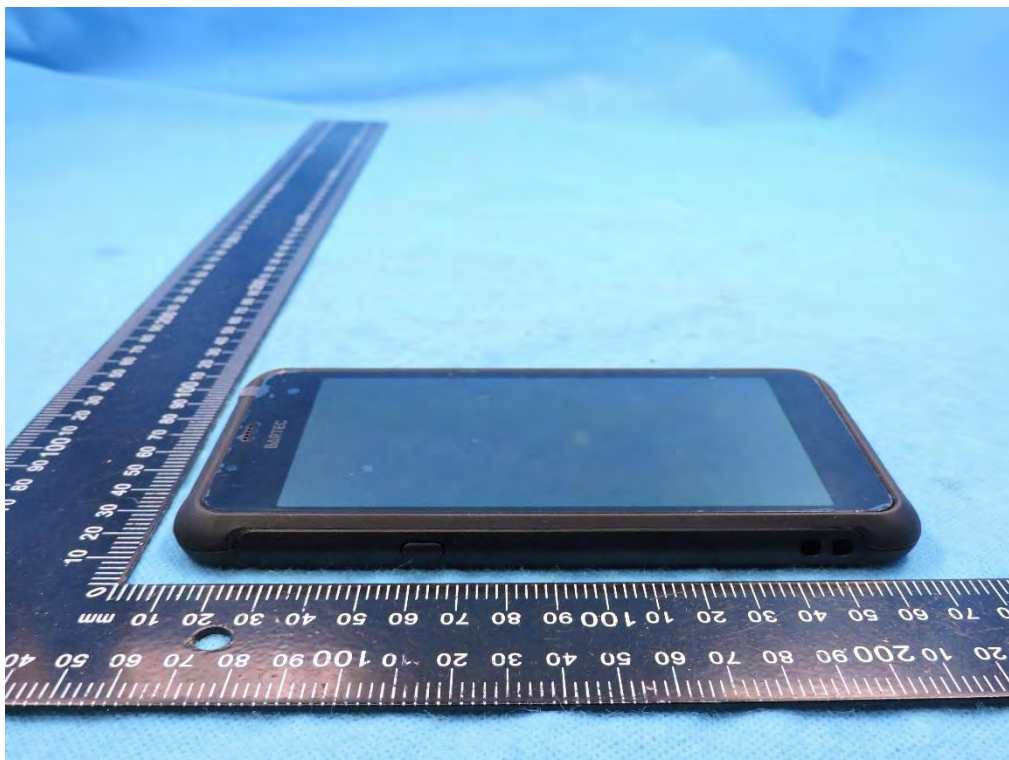


Right side

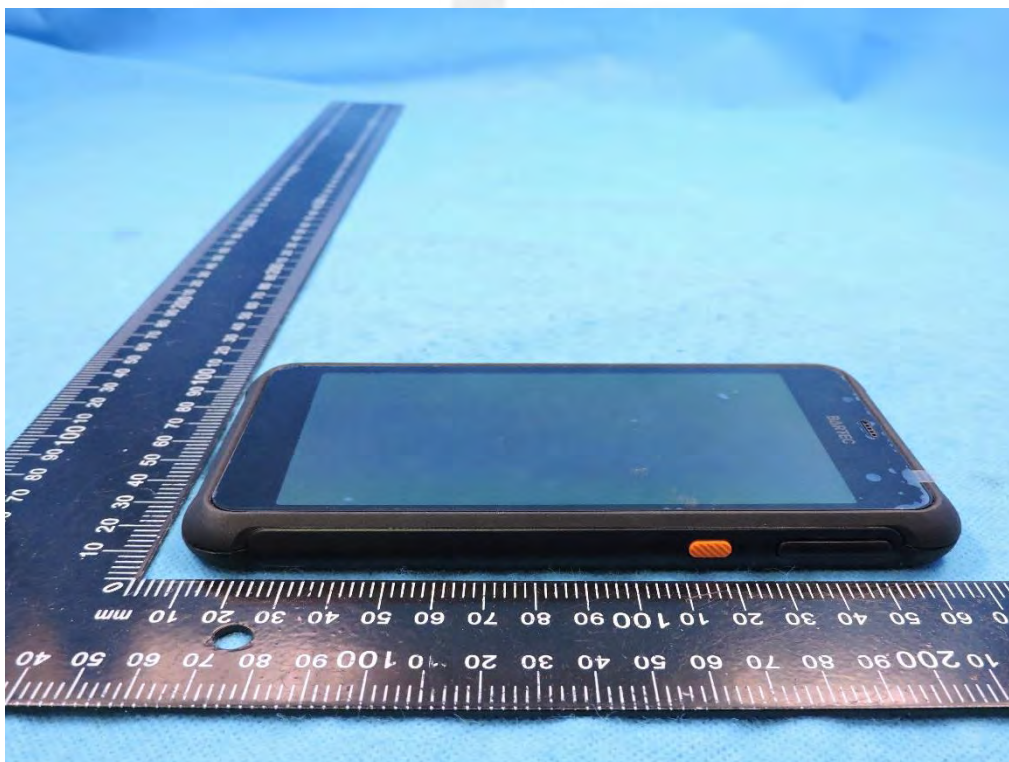


11.2 Setup Photo


Right Touch

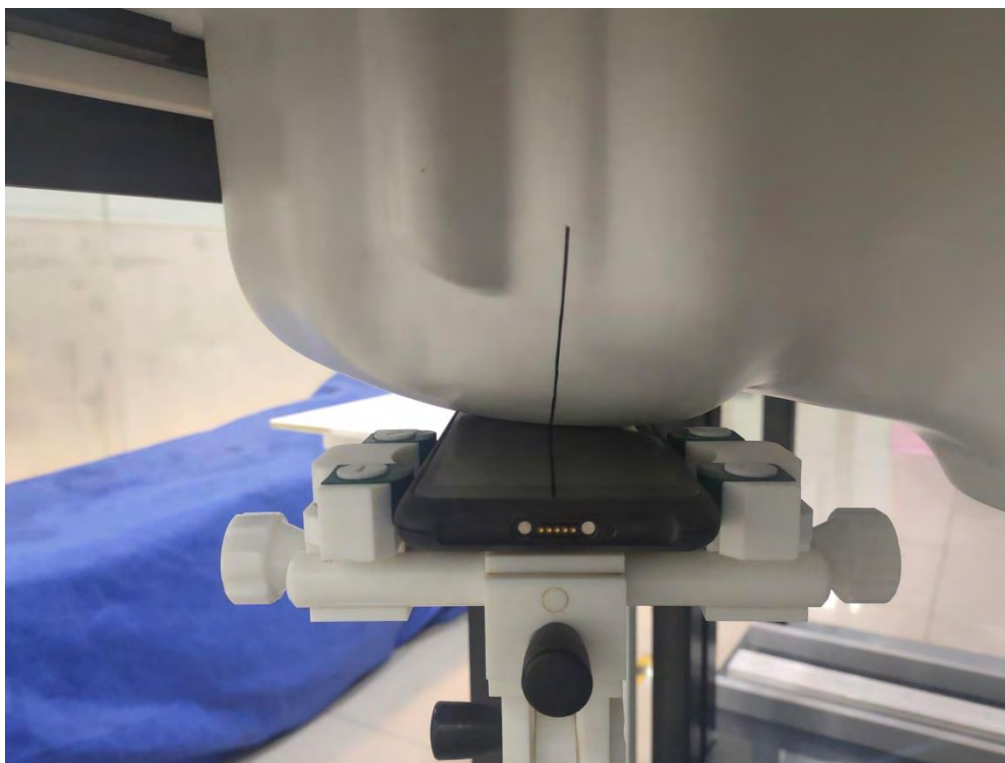


Right Tilt

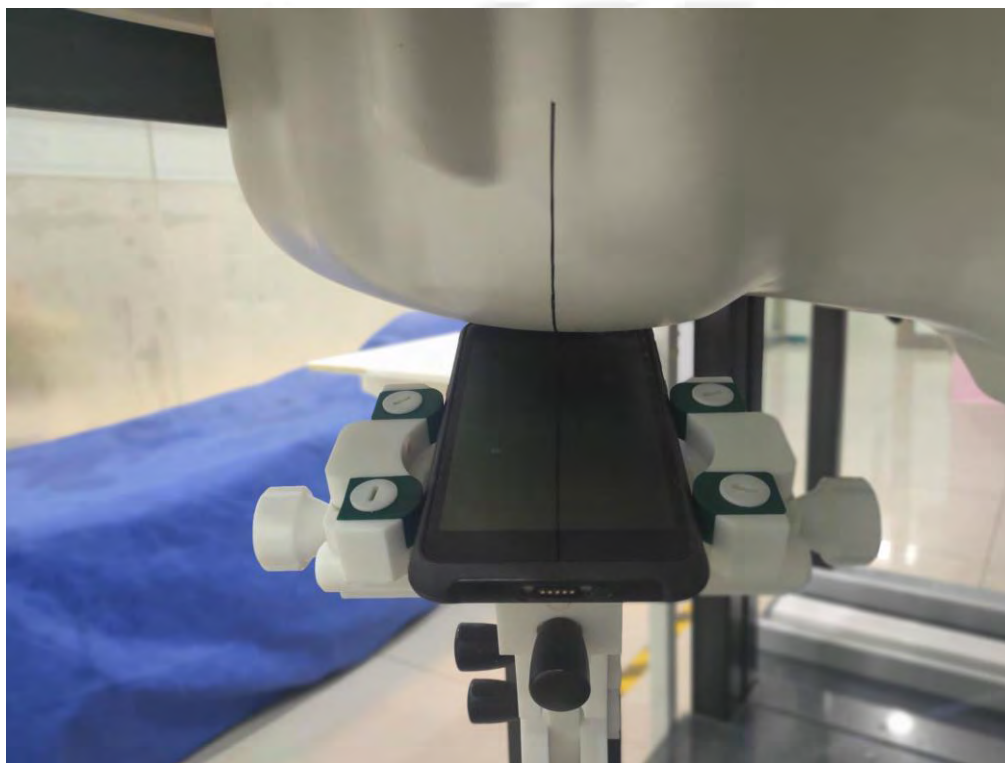


Left Touch

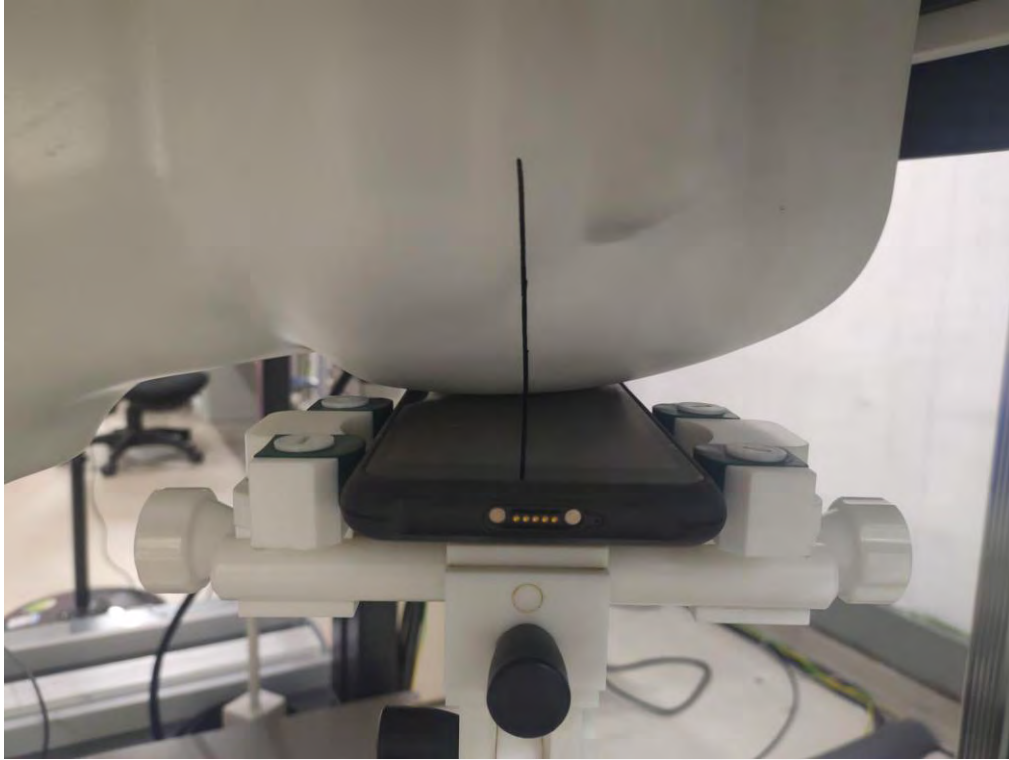


Left Tilt

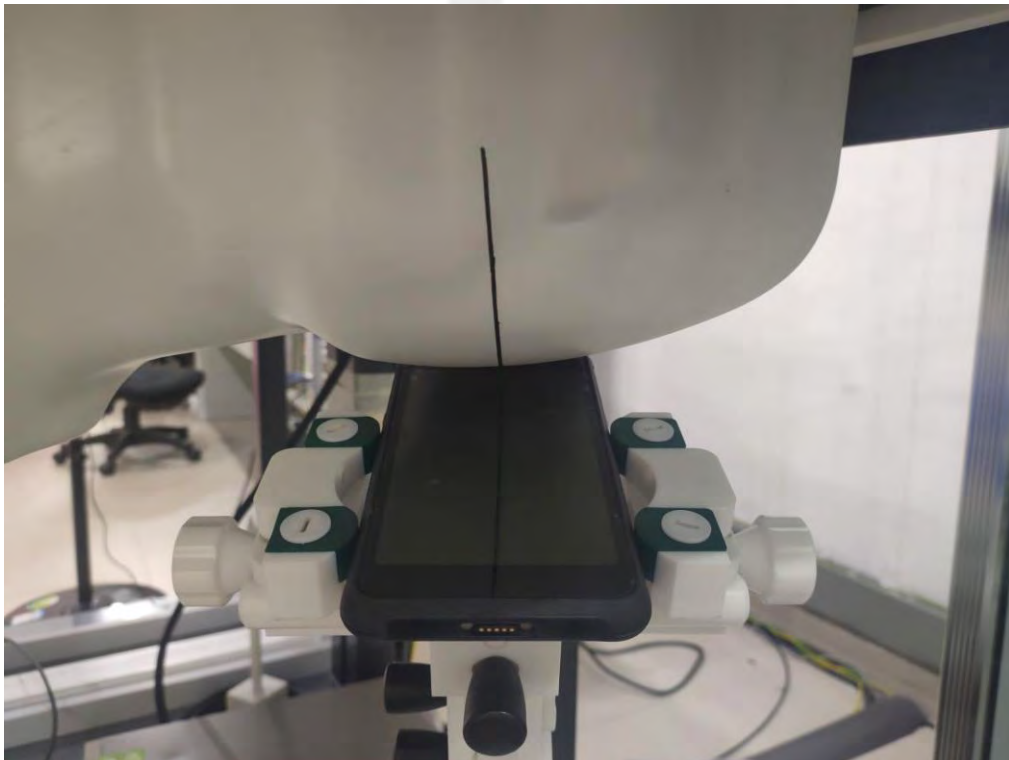

Body Front side(separation distance is 10mm)

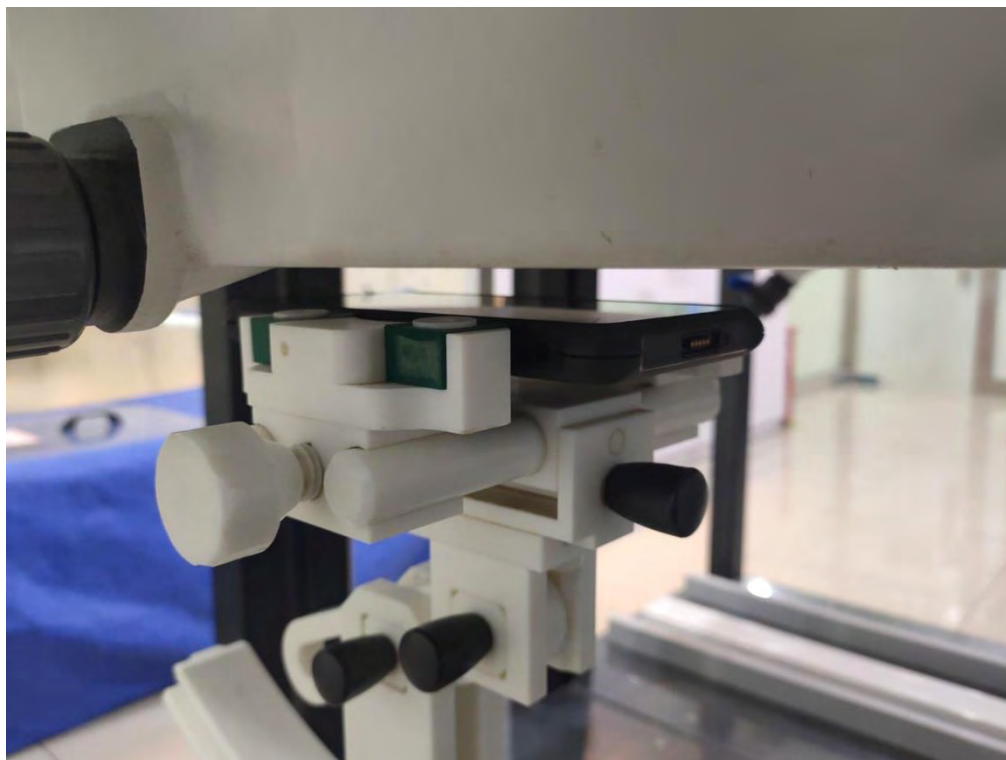

Body Back side(separation distance is 10mm)

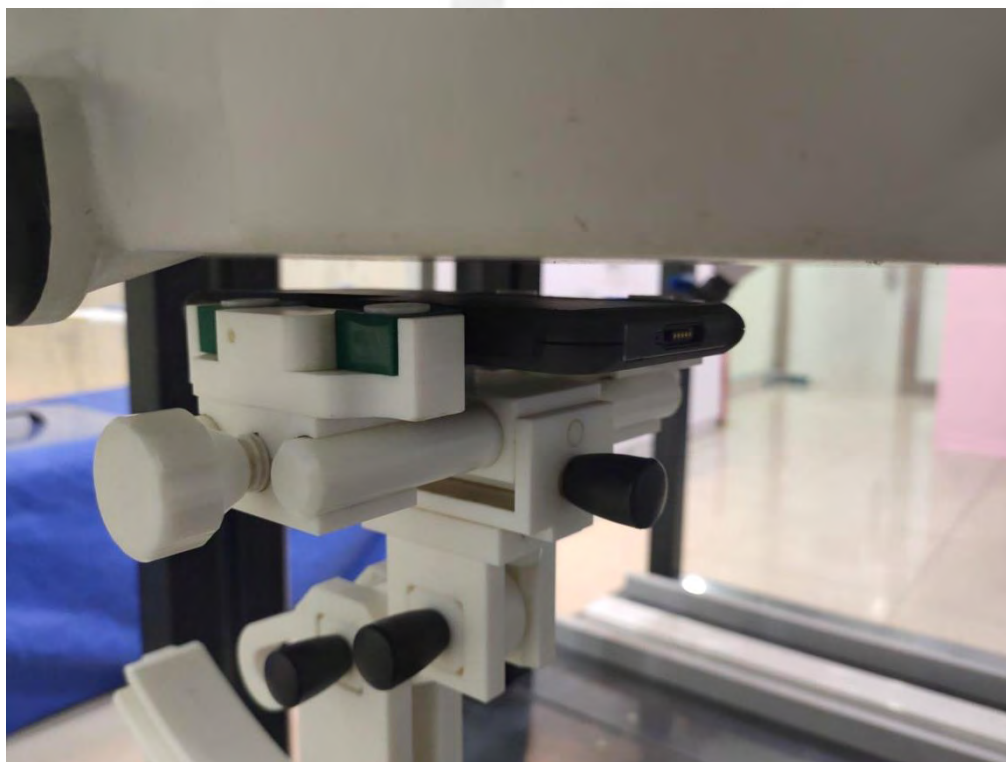

Body Left side(separation distance is 10mm)



Body Right side(separation distance is 10mm)




Body Bottom side(separation distance is 10mm)



Body Top side(separation distance is 10mm)



Liquid depth (15 cm)

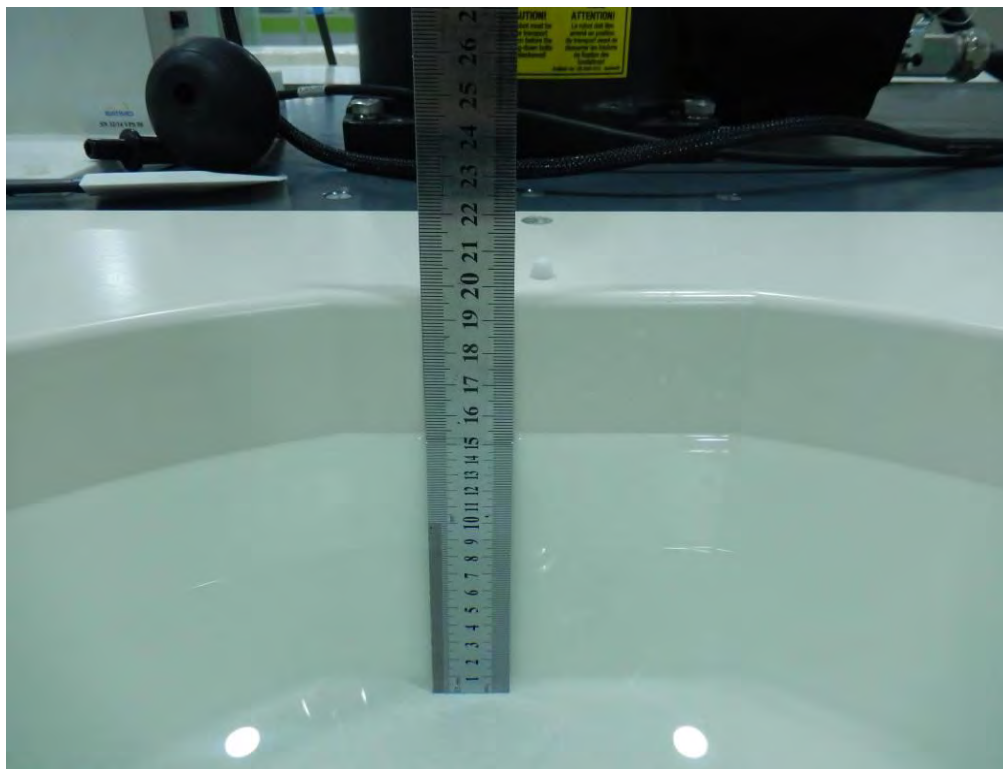



12. SAR Result Summary

12.1 Head SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
WCDMA Band 2	RMC	Right Cheek	1907.6	0.318	-2.33	20.50	20.14	0.345	1
		Right Tilt	1907.6	0.154	0.90	20.50	20.14	0.167	/
		Left Cheek	1907.6	0.295	-3.51	20.50	20.14	0.320	/
		Left Tilt	1907.6	0.133	-0.75	20.50	20.14	0.144	/
WCDMA Band 4	RMC	Right Cheek	1752.4	0.173	3.68	21.00	20.92	0.176	3
		Right Tilt	1752.4	0.095	-2.22	21.00	20.92	0.097	/
		Left Cheek	1752.4	0.165	-2.12	21.00	20.92	0.168	/
		Left Tilt	1752.4	0.085	0.21	21.00	20.92	0.087	/
WCDMA Band 5	RMC	Right Cheek	846.6	0.107	-3.35	22.00	21.64	0.116	/
		Right Tilt	846.6	0.052	-3.96	22.00	21.64	0.056	/
		Left Cheek	846.6	0.111	-1.86	22.00	21.64	0.121	5
		Left Tilt	846.6	0.066	2.63	22.00	21.64	0.072	/



	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	1900	0.231	-3.89	23	22.81	0.241	7
			50	0	Right Cheek	1900	0.211	2.94	23	22.53	0.235	/
			1	0	Right Tilt	1900	0.121	-3.25	23	22.81	0.126	/
			50	0	Right Tilt	1900	0.136	2.51	23	22.53	0.152	/
			1	0	Left Cheek	1900	0.141	-2.78	23	22.81	0.147	/
			50	0	Left Cheek	1900	0.133	-3.79	23	22.53	0.148	/
			1	0	Left Tilt	1900	0.085	-2.60	23	22.81	0.089	/
			50	0	Left Tilt	1900	0.082	2.25	23	22.53	0.091	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	1745	0.174	-3.09	23	22.89	0.178	9
			50	0	Right Cheek	1745	0.162	-3.54	23	22.66	0.175	/
			1	0	Right Tilt	1745	0.082	2.24	23	22.89	0.084	/
			50	0	Right Tilt	1745	0.075	1.00	23	22.66	0.081	/
			1	0	Left Cheek	1745	0.166	-3.65	23	22.89	0.170	/
			50	0	Left Cheek	1745	0.152	1.95	23	22.66	0.164	/
			1	0	Left Tilt	1745	0.052	1.27	23	22.89	0.053	/
			50	0	Left Tilt	1745	0.041	2.09	23	22.66	0.044	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	844	0.138	3.64	22.5	22.34	0.143	11
			25	0	Right Cheek	844	0.122	0.60	22.5	22.14	0.133	/
			1	0	Right Tilt	844	0.074	0.93	22.5	22.34	0.077	/
			25	0	Right Tilt	844	0.063	-2.84	22.5	22.14	0.068	/
			1	0	Left Cheek	844	0.119	-1.00	22.5	22.34	0.123	/
			25	0	Left Cheek	844	0.120	0.86	22.5	22.14	0.130	/
			1	0	Left Tilt	844	0.063	1.30	22.5	22.34	0.065	/
			25	0	Left Tilt	844	0.052	0.12	22.5	22.14	0.056	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	2560	0.135	-3.40	22.5	22.39	0.138	13
			50	0	Right Cheek	2560	0.116	-1.34	22.5	22.15	0.126	/
			1	0	Right Tilt	2560	0.052	-3.77	22.5	22.39	0.053	/
			50	0	Right Tilt	2560	0.041	-3.74	22.5	22.15	0.044	/
			1	0	Left Cheek	2560	0.08	1.27	22.5	22.39	0.082	/
			50	0	Left Cheek	2560	0.074	-2.92	22.5	22.15	0.080	/
			1	0	Left Tilt	2560	0.036	-1.79	22.5	22.39	0.037	/
			50	0	Left Tilt	2560	0.032	-2.90	22.5	22.15	0.035	/



LTE Band 12	10M	QPSK	1	0	Right Cheek	711	0.091	-3.48	22.5	22.25	0.096	15
			25	0	Right Cheek	711	0.083	1.91	22.5	21.94	0.094	/
			1	0	Right Tilt	711	0.042	-1.87	22.5	22.25	0.044	/
			25	0	Right Tilt	711	0.036	-0.82	22.5	21.94	0.041	/
			1	0	Left Cheek	711	0.077	1.00	22.5	22.25	0.082	/
			25	0	Left Cheek	711	0.075	0.67	22.5	21.94	0.085	/
			1	0	Left Tilt	711	0.032	1.83	22.5	22.25	0.034	/
			25	0	Left Tilt	711	0.031	-3.79	22.5	21.94	0.035	/
LTE Band 13	10M	QPSK	1	0	Right Cheek	782	0.076	-2.36	22	21.63	0.083	17
			25	0	Right Cheek	782	0.069	-0.99	22	21.29	0.081	/
			1	0	Right Tilt	782	0.036	2.48	22	21.63	0.039	/
			25	0	Right Tilt	782	0.037	1.88	22	21.29	0.044	/
			1	0	Left Cheek	782	0.059	-2.29	22	21.63	0.064	/
			25	0	Left Cheek	782	0.052	-1.30	22	21.29	0.061	/
			1	0	Left Tilt	782	0.021	-2.56	22	21.63	0.023	/
			25	0	Left Tilt	782	0.023	-2.89	22	21.29	0.027	/
LTE Band 14	10M	QPSK	1	0	Right Cheek	793	0.07	-1.67	22.5	22.04	0.078	19
			25	0	Right Cheek	793	0.062	0.12	22.5	21.72	0.074	/
			1	0	Right Tilt	793	0.035	2.37	22.5	22.04	0.039	/
			25	0	Right Tilt	793	0.031	-2.56	22.5	21.72	0.037	/
			1	0	Left Cheek	793	0.052	-2.77	22.5	22.04	0.058	/
			25	0	Left Cheek	793	0.054	0.03	22.5	21.72	0.065	/
			1	0	Left Tilt	793	0.032	-1.09	22.5	22.04	0.036	/
			25	0	Left Tilt	793	0.025	3.55	22.5	21.72	0.030	/
LTE Band 17	10M	QPSK	1	0	Right Cheek	711	0.089	-1.38	22.5	22.28	0.094	21
			25	0	Right Cheek	711	0.074	2.20	22.5	21.79	0.087	/
			1	0	Right Tilt	711	0.045	-2.07	22.5	22.28	0.047	/
			25	0	Right Tilt	711	0.043	0.66	22.5	21.79	0.051	/
			1	0	Left Cheek	711	0.059	-1.40	22.5	22.28	0.062	/
			25	0	Left Cheek	711	0.056	-3.98	22.5	21.79	0.066	/
			1	0	Left Tilt	711	0.023	1.27	22.5	22.28	0.024	/
			25	0	Left Tilt	711	0.019	1.24	22.5	21.79	0.022	/



LTE Band 25	20M	QPSK	1	0	Right Cheek	1905	0.322	1.66	23	22.84	0.334	23
			50	0	Right Cheek	1905	0.298	-0.83	23	22.63	0.325	/
			1	0	Right Tilt	1905	0.135	-3.72	23	22.84	0.140	/
			50	0	Right Tilt	1905	0.147	0.19	23	22.63	0.160	/
			1	0	Left Cheek	1905	0.288	1.16	23	22.84	0.299	/
			50	0	Left Cheek	1905	0.281	-2.43	23	22.63	0.306	/
			1	0	Left Tilt	1905	0.132	-0.56	23	22.84	0.137	/
			50	0	Left Tilt	1905	0.156	0.73	23	22.63	0.170	/
LTE Band 26	15M	QPSK	1	0	Right Cheek	841.5	0.106	-1.14	23	22.59	0.116	25
			36	0	Right Cheek	841.5	0.098	2.13	23	22.37	0.113	/
			1	0	Right Tilt	841.5	0.052	-0.38	23	22.59	0.057	/
			36	0	Right Tilt	841.5	0.048	-2.24	23	22.37	0.055	/
			1	0	Left Cheek	841.5	0.085	-2.83	23	22.59	0.093	/
			36	0	Left Cheek	841.5	0.088	1.39	23	22.37	0.102	/
			1	0	Left Tilt	841.5	0.036	-0.02	23	22.59	0.040	/
			36	0	Left Tilt	841.5	0.031	1.39	23	22.37	0.036	/
LTE Band 41	20M	QPSK	1	0	Right Cheek	2680	0.045	-2.70	22.5	22.38	0.046	27
			50	0	Right Cheek	2680	0.041	-0.54	22.5	22.06	0.045	/
			1	0	Right Tilt	2680	0.026	-0.04	22.5	22.38	0.027	/
			50	0	Right Tilt	2680	0.023	-3.08	22.5	22.06	0.025	/
			1	0	Left Cheek	2680	0.032	-1.60	22.5	22.38	0.033	/
			50	0	Left Cheek	2680	0.031	1.95	22.5	22.06	0.034	/
			1	0	Left Tilt	2680	0.012	-3.60	22.5	22.38	0.012	/
			50	0	Left Tilt	2680	0.014	0.91	22.5	22.06	0.015	/
LTE Band 66	20M	QPSK	1	0	Right Cheek	1770	0.149	-3.01	23	22.71	0.159	29
			50	0	Right Cheek	1745	0.135	-3.36	23	22.39	0.155	/
			1	0	Right Tilt	1770	0.077	-3.50	23	22.71	0.082	/
			50	0	Right Tilt	1745	0.079	0.67	23	22.39	0.091	/
			1	0	Left Cheek	1770	0.121	3.62	23	22.71	0.129	/
			50	0	Left Cheek	1745	0.106	1.85	23	22.39	0.122	/
			1	0	Left Tilt	1770	0.065	0.01	23	22.71	0.069	/
			50	0	Left Tilt	1745	0.058	3.89	23	22.39	0.067	/



LTE Band 71	20M	QPSK	1	0	Right Cheek	688	0.052	2.76	22.5	22.37	0.054	31
			50	0	Right Cheek	688	0.048	-3.70	22.5	22.10	0.053	/
			1	0	Right Tilt	688	0.026	-3.78	22.5	22.37	0.027	/
			50	0	Right Tilt	688	0.021	1.14	22.5	22.10	0.023	/
			1	0	Left Cheek	688	0.043	2.11	22.5	22.37	0.044	/
			50	0	Left Cheek	688	0.039	-3.42	22.5	22.10	0.043	/
			1	0	Left Tilt	688	0.012	1.60	22.5	22.37	0.012	/
			50	0	Left Tilt	688	0.019	-3.07	22.5	22.10	0.021	/

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4G WLAN	802.11b	Right Cheek	2412	0.099	-1.85	13.00	12.88	0.102	/
		Right Tilt	2412	0.105	-3.27	13.00	12.88	0.108	33
		Left Cheek	2412	0.098	0.44	13.00	12.88	0.101	/
		Left Tilt	2412	0.102	0.84	13.00	12.88	0.105	/
BT	GFSK	Right Cheek	2402	0.021	-0.03	9.50	9.18	0.023	/
		Right Tilt	2402	0.026	1.99	9.50	9.18	0.028	35
		Left Cheek	2402	0.019	-1.71	9.50	9.18	0.020	/
		Left Tilt	2402	0.023	3.68	9.50	9.18	0.025	/
5.2G WLAN	802.11a	Right Cheek	5200	0.455	3.51	14.00	13.13	0.556	/
		Right Tilt	5180	0.456	-1.26	14.00	13.10	0.561	/
		Right Tilt	5200	0.512	-0.85	14.00	13.13	0.626	37
		Right Tilt	5240	0.489	-2.73	14.00	13.00	0.616	/
		Left Cheek	5200	0.336	-0.36	14.00	13.13	0.411	/
		Left Tilt	5200	0.421	-3.66	14.00	13.13	0.514	/
5.3G WLAN	802.11a	Right Cheek	5260	0.455	0.36	14.00	13.25	0.541	/
		Right Tilt	5260	0.487	1.54	14.00	13.25	0.579	39
		Left Cheek	5260	0.432	-3.05	14.00	13.25	0.513	/
		Left Tilt	5260	0.422	-2.99	14.00	13.25	0.502	/
5.6G WLAN	802.11a	Right Cheek	5700	0.265	2.30	14.00	13.91	0.271	/
		Right Tilt	5700	0.271	-2.31	14.00	13.91	0.277	41
		Left Cheek	5700	0.231	3.33	14.00	13.91	0.236	/
		Left Tilt	5700	0.256	-3.68	14.00	13.91	0.261	/



5.8G WLAN	802.11ac(VHT80)	Right Cheek	5775	0.159	2.06	5.50	5.26	0.168	/
		Right Tilt	5775	0.212	2.87	5.50	5.26	0.224	43
		Left Cheek	5775	0.199	0.71	5.50	5.26	0.210	/
		Left Tilt	5775	0.201	-3.18	5.50	5.26	0.212	/

Note:

- Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.539** W/Kg for Head)
- Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



12.2 Body-worn and Hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn- up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
WCDMA Band 2	RMC	Front Side	1907.6	0.665	-2.49	20.50	20.14	0.722	/
		Back Side	1852.4	0.845	0.48	20.50	19.84	0.984	/
		Back Side	1880	0.836	-3.16	20.50	19.75	0.994	/
		Back Side	1907.6	0.921	2.24	20.50	20.14	1.001	2
		Right Edge	1907.6	0.442	2.92	20.50	20.14	0.480	/
		Bottom Edge	1907.6	0.455	3.34	20.50	20.14	0.494	/
WCDMA Band 4	RMC	Front Side	1752.4	0.495	3.95	21.00	20.92	0.504	/
		Back Side	1752.4	0.542	2.14	21.00	20.92	0.552	4
		Right Edge	1752.4	0.366	1.26	21.00	20.92	0.373	/
		Bottom Edge	1752.4	0.341	-2.05	21.00	20.92	0.347	/
WCDMA Band 5	RMC	Front Side	846.6	0.143	-3.79	22.00	21.64	0.155	/
		Back Side	846.6	0.171	-1.07	22.00	21.64	0.186	6
		Right Edge	846.6	0.098	-0.98	22.00	21.64	0.106	/
		Bottom Edge	846.6	0.133	1.22	22.00	21.64	0.144	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	1900	0.685	-1.55	23	22.81	0.716	/
			50	0	Front side	1900	0.669	1.55	23	22.53	0.745	/
			1	0	Back Side	1860	0.885	-3.82	23	22.63	0.964	/
			1	0	Back Side	1880	0.854	-0.35	23	22.77	0.900	/
			1	0	Back Side	1900	0.936	-1.84	23	22.81	0.978	8
			50	0	Back Side	1900	0.695	2.07	23	22.53	0.774	/
			100	0	Back Side	1900	0.647	3.02	23	22.3	0.760	/
			1	0	Right Side	1900	0.336	2.11	23	22.81	0.351	/
			50	0	Right Side	1900	0.341	0.40	23	22.53	0.380	/
			1	0	Bottom Side	1900	0.458	-3.90	23	22.81	0.478	/
			50	0	Bottom Side	1900	0.422	-0.34	23	22.53	0.470	/



LTE Band 4	20M	QPSK	1	0	Front side	1745	0.465	0.59	23	22.89	0.477	/
			50	0	Front side	1745	0.424	-0.26	23	22.66	0.459	/
			1	0	Back Side	1745	0.552	-0.55	23	22.89	0.566	10
			50	0	Back Side	1745	0.514	-1.04	23	22.66	0.556	/
			1	0	Right Side	1745	0.336	3.93	23	22.89	0.345	/
			50	0	Right Side	1745	0.314	1.50	23	22.66	0.340	/
			1	0	Bottom Side	1745	0.412	-1.55	23	22.89	0.423	/
			50	0	Bottom Side	1745	0.447	-2.02	23	22.66	0.483	/
LTE Band 5	10M	QPSK	1	0	Front side	844	0.114	-1.17	22.5	22.34	0.118	/
			25	0	Front side	844	0.103	1.84	22.5	22.14	0.112	/
			1	0	Back Side	844	0.134	3.07	22.5	22.34	0.139	12
			25	0	Back Side	844	0.124	3.75	22.5	22.14	0.135	/
			1	0	Right Side	844	0.095	2.88	22.5	22.34	0.099	/
			25	0	Right Side	844	0.093	-0.06	22.5	22.14	0.101	/
			1	0	Bottom Side	844	0.085	-3.35	22.5	22.34	0.088	/
			25	0	Bottom Side	844	0.075	-3.52	22.5	22.14	0.081	/
LTE Band 7	10M	QPSK	1	0	Front side	2560	0.355	2.12	22.5	22.39	0.364	/
			50	0	Front side	2560	0.314	2.77	22.5	22.15	0.340	/
			1	0	Back Side	2560	0.428	0.49	22.5	22.39	0.439	14
			50	0	Back Side	2560	0.398	-3.64	22.5	22.15	0.431	/
			1	0	Right Side	2560	0.258	2.02	22.5	22.39	0.265	/
			50	0	Right Side	2560	0.265	-1.05	22.5	22.15	0.287	/
			1	0	Bottom Side	2560	0.314	-3.65	22.5	22.39	0.322	/
			50	0	Bottom Side	2560	0.335	0.74	22.5	22.15	0.363	/
LTE Band 12	10M	QPSK	1	0	Front side	711	0.102	-0.14	22.5	22.25	0.108	/
			25	0	Front side	711	0.103	0.80	22.5	21.94	0.117	/
			1	0	Back Side	711	0.111	2.37	22.5	22.25	0.118	16
			25	0	Back Side	711	0.095	-3.50	22.5	21.94	0.108	/
			1	0	Right Side	711	0.075	-0.27	22.5	22.25	0.079	/
			25	0	Right Side	711	0.076	-2.43	22.5	21.94	0.086	/
			1	0	Bottom Side	711	0.088	2.03	22.5	22.25	0.093	/
			25	0	Bottom Side	711	0.087	-0.96	22.5	21.94	0.099	/



LTE Band 13	10M	QPSK	1	0	Front side	782	0.095	1.39	22	21.63	0.103	/
			25	0	Front side	782	0.094	0.57	22	21.29	0.111	/
			1	0	Back Side	782	0.109	0.94	22	21.63	0.119	18
			25	0	Back Side	782	0.089	-2.76	22	21.29	0.105	/
			1	0	Right Side	782	0.065	-0.51	22	21.63	0.071	/
			25	0	Right Side	782	0.066	-2.16	22	21.29	0.078	/
			1	0	Bottom Side	782	0.074	0.82	22	21.63	0.081	/
			25	0	Bottom Side	782	0.073	-3.61	22	21.29	0.086	/
LTE Band 14	10M	QPSK	1	0	Front side	793	0.089	-3.04	22.5	22.04	0.099	/
			25	0	Front side	793	0.097	2.17	22.5	21.72	0.116	/
			1	0	Back Side	793	0.11	0.26	22.5	22.04	0.122	20
			25	0	Back Side	793	0.101	3.34	22.5	21.72	0.121	/
			1	0	Right Side	793	0.056	-1.46	22.5	22.04	0.062	/
			25	0	Right Side	793	0.062	2.66	22.5	21.72	0.074	/
			1	0	Bottom Side	793	0.074	2.30	22.5	22.04	0.082	/
			25	0	Bottom Side	793	0.076	2.28	22.5	21.72	0.091	/
LTE Band 17	10M	QPSK	1	0	Front side	711	0.177	-1.35	22.5	22.28	0.186	/
			25	0	Front side	711	0.176	3.28	22.5	21.79	0.207	/
			1	0	Back Side	711	0.186	-1.67	22.5	22.28	0.196	22
			25	0	Back Side	711	0.164	-3.38	22.5	21.79	0.193	/
			1	0	Right Side	711	0.085	3.46	22.5	22.28	0.089	/
			25	0	Right Side	711	0.084	1.60	22.5	21.79	0.099	/
			1	0	Bottom Side	711	0.046	-3.33	22.5	22.28	0.048	/
			25	0	Bottom Side	711	0.047	0.59	22.5	21.79	0.055	/
LTE Band 25	20M	QPSK	1	0	Front side	1905	0.754	-0.23	23	22.84	0.782	/
			50	0	Front side	1905	0.712	2.84	23	22.63	0.775	/
			1	0	Back Side	1860	1.021	2.74	23	22.61	1.117	/
			1	0	Back Side	1882.5	1.006	-2.52	23	22.73	1.071	/
			1	0	Back Side	1905	1.159	-2.04	23	22.84	1.202	24
			50	0	Back Side	1860	1.002	-1.13	23	22.36	1.161	/
			50	0	Back Side	1882.5	0.958	3.64	23	22.54	1.065	/
			50	0	Back Side	1905	0.993	-2.24	23	22.63	1.081	/
			100	0	Back Side	1860	0.925	2.36	23	22.11	1.135	/
			100	0	Back Side	1882.5	0.925	1.87	23	22.07	1.146	/
			100	0	Back Side	1905	0.985	-2.93	23	22.2	1.184	/
			1	0	Right Side	1905	0.565	-1.70	23	22.84	0.586	/
			50	0	Right Side	1905	0.478	-3.93	23	22.63	0.521	/
			1	0	Bottom Side	1905	0.562	-1.51	23	22.84	0.583	/
			50	0	Bottom Side	1905	0.521	1.67	23	22.63	0.567	/



LTE Band 26	15M	QPSK	1	0	Front side	841.5	0.165	1.21	23	22.59	0.181	/
			36	0	Front side	841.5	0.133	-1.22	23	22.37	0.154	/
			1	0	Back Side	841.5	0.226	-1.37	23	22.59	0.248	26
			36	0	Back Side	841.5	0.212	1.10	23	22.37	0.245	/
			1	0	Right Side	841.5	0.125	-3.12	23	22.59	0.137	/
			36	0	Right Side	841.5	0.134	-0.14	23	22.37	0.155	/
			1	0	Bottom Side	841.5	0.122	0.94	23	22.59	0.134	/
			36	0	Bottom Side	841.5	0.124	1.74	23	22.37	0.143	/
LTE Band 41	20M	QPSK	1	0	Front side	2680	0.121	-0.54	22.5	22.38	0.124	/
			50	0	Front side	2680	0.106	3.43	22.5	22.06	0.117	/
			1	0	Back Side	2680	0.154	-2.13	22.5	22.38	0.158	28
			50	0	Back Side	2680	0.121	-3.03	22.5	22.06	0.134	/
			1	0	Right Side	2680	0.133	-0.76	22.5	22.38	0.137	/
			50	0	Right Side	2680	0.124	-2.10	22.5	22.06	0.137	/
			1	0	Bottom Side	2680	0.098	1.41	22.5	22.38	0.101	/
			50	0	Bottom Side	2680	0.095	0.80	22.5	22.06	0.105	/
LTE Band 66	20M	QPSK	1	0	Front side	1770	0.321	0.46	23	22.71	0.343	/
			50	0	Front side	1745	0.332	-0.10	23	22.39	0.382	/
			1	0	Back Side	1770	0.455	-2.29	23	22.71	0.486	30
			50	0	Back Side	1745	0.421	-1.57	23	22.39	0.484	/
			1	0	Right Side	1770	0.265	2.70	23	22.71	0.283	/
			50	0	Right Side	1745	0.247	0.56	23	22.39	0.284	/
			1	0	Bottom Side	1770	0.266	-0.52	23	22.71	0.284	/
			50	0	Bottom Side	1745	0.274	-0.80	23	22.39	0.315	/
LTE Band 71	20M	QPSK	1	0	Front side	688	0.057	-1.93	22.5	22.37	0.059	/
			50	0	Front side	688	0.054	3.42	22.5	22.10	0.059	/
			1	0	Back Side	688	0.079	-1.48	22.5	22.37	0.081	32
			50	0	Back Side	688	0.073	1.61	22.5	22.10	0.080	/
			1	0	Right Side	688	0.045	3.51	22.5	22.37	0.046	/
			50	0	Right Side	688	0.047	2.86	22.5	22.10	0.052	/
			1	0	Bottom Side	688	0.036	-1.66	22.5	22.37	0.037	/
			50	0	Bottom Side	688	0.031	0.58	22.5	22.10	0.034	/



Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
2.4GHz WLAN	802.11b	Front Side	2412	0.025	-3.14	13.00	12.88	0.026	/
		Back Side	2412	0.048	2.40	13.00	12.88	0.049	34
		Top Edge	2412	0.030	-0.09	13.00	12.88	0.031	/
BT	GFSK	Front Side	2402	0.011	1.99	9.50	9.18	0.012	/
		Back Side	2402	0.019	-1.64	9.50	9.18	0.020	36
		Top Edge	2402	0.012	-2.00	9.50	9.18	0.013	/
5.2GHz WLAN	802.11a	Front Side	5200	0.098	-0.45	14.00	13.13	0.120	/
		Back Side	5200	0.132	0.73	14.00	13.13	0.161	38
		Top Edge	5200	0.122	0.76	14.00	13.13	0.149	/
5.3GHz WLAN	802.11a	Front Side	5260	0.085	-3.01	14.00	13.25	0.101	/
		Back Side	5260	0.104	-0.34	14.00	13.25	0.124	40
		Top Edge	5260	0.095	-0.51	14.00	13.25	0.113	/
5.6GHz WLAN	802.11a	Front Side	5700	0.059	-1.24	14.00	13.91	0.060	/
		Back Side	5700	0.073	0.85	14.00	13.91	0.075	42
		Top Edge	5700	0.062	-3.35	14.00	13.91	0.063	/
5.8GHz WLAN	802.11ac(VHT80)	Front Side	5775	0.066	2.44	5.50	5.26	0.070	/
		Back Side	5775	0.083	3.01	5.50	5.26	0.088	44
		Top Edge	5775	0.045	-2.23	5.50	5.26	0.048	/

Note:

- The test separation of all above table is 10mm.
- Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **1.035W/Kg** for Body)
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

**Repeated SAR**

Band	Mode	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
WCDMA Band 2	RMC	Back Side	1852.4	0.840	-1.93	20.50	19.84	0.978	-
		Back Side	1880	0.828	1.77	20.50	19.75	0.984	-
		Back Side	1907.6	0.886	-1.65	20.50	20.14	0.963	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Back Side	1860	0.854	-0.30	23	22.63	0.930	-
			1	0	Back Side	1880	0.840	2.24	23	22.77	0.886	-
			1	0	Back Side	1900	0.933	-1.85	23	22.81	0.975	-
LTE Band 25	20M	QPSK	1	0	Bottom Side	1860	0.976	1.89	23	22.61	1.068	-
			1	0	Bottom Side	1882.5	1.000	1.48	23	22.73	1.064	-
			1	0	Bottom Side	1905	1.158	-3.01	23	22.84	1.201	-
			50	0	Bottom Side	1860	0.959	3.58	23	22.36	1.111	-
			50	0	Bottom Side	1882.5	0.950	-1.73	23	22.54	1.056	-
			50	0	Bottom Side	1905	0.993	0.73	23	22.63	1.081	-
			100	0	Bottom Side	1860	0.915	1.67	23	22.11	1.123	-
			100	0	Bottom Side	1882.5	0.908	-0.51	23	22.07	1.125	-
			100	0	Bottom Side	1905	0.954	-0.42	23	22.2	1.147	-

**12.3 repeated SAR measurement**

Band	Mode	Test Position	Freq.	Original Mea. SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Mea. SAR 1g(W/kg)	2nd Repeated SAR 1g	Ratio
WCDMA Band 2	RMC	Back Side	1852.4	0.845	0.840	1.006	-	-	-
		Back Side	1880	0.836	0.828	1.010	-	-	-
		Back Side	1907.6	0.921	0.886	1.040	-	-	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Mea. SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio	Original Mea.	2nd Repeated SAR 1g	Ratio
LTE Band 2	20M	QPSK	1	0	Back Side	1860	0.885	0.854	1.036	-	-	-
			1	0	Back Side	1880	0.854	0.840	1.017	-	-	-
			1	0	Back Side	1900	0.936	0.933	1.003	-	-	-
LTE Band 25	20M	QPSK	1	0	Back Side	1860	1.021	0.976	1.046	-	-	-
			1	0	Back Side	1882.5	1.006	1.000	1.006	-	-	-
			1	0	Back Side	1905	1.159	1.158	1.001	-	-	-
			50	0	Back Side	1860	1.002	0.959	1.045	-	-	-
			50	0	Back Side	1882.5	0.958	0.950	1.008	-	-	-
			50	0	Back Side	1905	0.993	0.993	1.000	-	-	-
			100	0	Back Side	1860	0.925	0.915	1.011	-	-	-
			100	0	Back Side	1882.5	0.925	0.908	1.019	-	-	-
			100	0	Back Side	1905	0.985	0.954	1.032	-	-	-

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$.
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. WCDMA + 2.4GHz WLAN/5G WLAN
	2. WCDMA + Bluetooth
	3. LTE + 2.4GHz WLAN/5G WLAN
	4. LTE + Bluetooth
Body	1. WCDMA + 2.4GHz WLAN/5G WLAN
	2. WCDMA + Bluetooth
	3. LTE + 2.4GHz WLAN/5G WLAN
	4. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 Appendix E, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$SAR_{est} = 1.6 \cdot P_{ant} / P_{th} [W/kg].$$

P_{ant} is maximum time-averaged power or effective radiated power (ERP), whichever is greater, and P_{th} is defined in Formula KDB 447498 (B.2).



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
WCDMA + 2.4G WLAN	Head	WCDMA	0.345	0.453
		2.4G WLAN	0.108	
	Body	WCDMA	1.001	1.050
		2.4G WLAN	0.049	
WCDMA + Bluetooth	Head	WCDMA	0.345	0.373
		Bluetooth	0.028	
	Body	WCDMA	1.001	1.021
		Bluetooth	0.020	
WCDMA + 5G WLAN	Head	WCDMA	0.345	0.971
		5G WLAN	0.626	
	Body	WCDMA	1.001	1.162
		5G WLAN	0.161	
LTE + 2.4G WLAN	Head	LTE	0.334	0.442
		2.4G WLAN	0.108	
	Body	LTE	1.202	1.252
		2.4G WLAN	0.049	
LTE + Bluetooth	Head	LTE	0.334	0.362
		Bluetooth	0.028	
	Body	LTE	1.202	1.223
		Bluetooth	0.020	
LTE + 5G WLAN	Head	LTE	0.334	0.960
		5G WLAN	0.626	
	Body	LTE	1.202	1.364
		5G WLAN	0.161	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2020.07.14	2023.07.13
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2020.07.14	2023.07.13
900MHz Dipole	MVG	SID900	SN 30/14 DIP0G900-328	2020.07.14	2023.07.13
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2020.07.14	2023.07.13
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2020.07.14	2023.07.13
2450MHz Dipole	MVG	SID2450	SN 30/14 DIP2G450-335	2020.07.14	2023.07.13
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2020.07.14	2023.07.13
Waveguide	MVG	SWG5500	SN 13/14 WGA32	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 07/21 EPMO352	2022.02.28	2023.02.27
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2021.11.23	2022.11.22
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2021.09.29	2022.09.28
Multi Meter	Keithley	Multi Meter 2000	4050073	2021.10.08	2022.10.07
Signal Generator	Agilent	N5182A	MY50140530	2021.09.30	2022.09.29
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2021.09.30	2022.09.29
Wireless Communication Test Set	R&S	CMW500	117239	2021.09.30	2022.09.29
Power Amplifier	DESAY	ZHL-42W	9638	2021.10.09	2022.10.08
Power Meter	R&S	NRP	100510	2021.09.29	2022.09.28
Power Sensor	R&S	NRP-Z11	101919	2021.09.29	2022.09.28
Temperature hygrometer	SuWei	SW-108	N/A	2021.10.09	2022.10.08
Thermograph	Elitech	RC-4	S/N EF7176501537	2021.10.09	2022.10.08

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value Return-loss in within 20% of calibrated measurement



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-16

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	41.02
Conductivity (S/m)	0.88
Probe	SN 07/21 EPGO352
ConvF	1.58
Crest factor	1:1

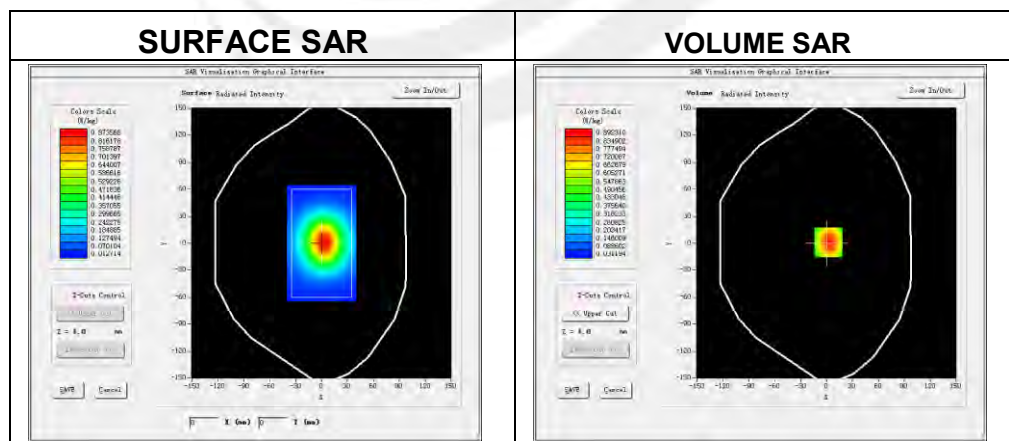

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.555404
SAR 1g (W/Kg)	0.868114

Z Axis Scan

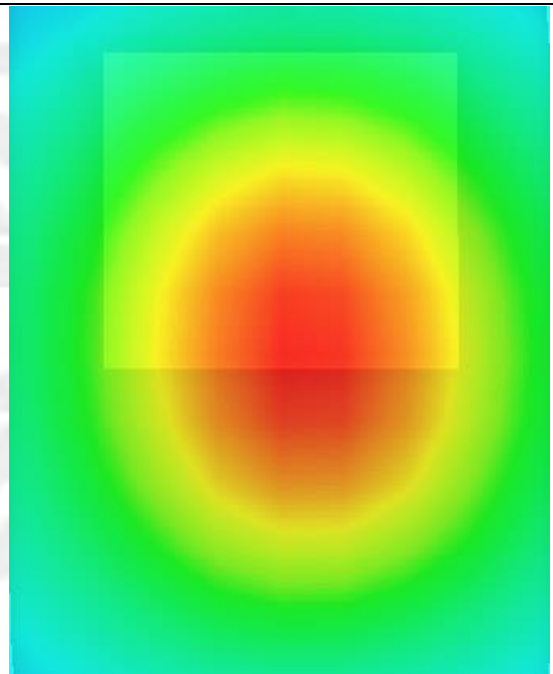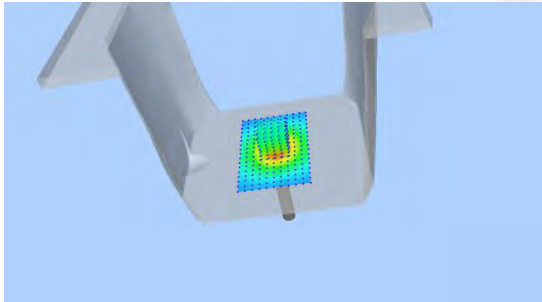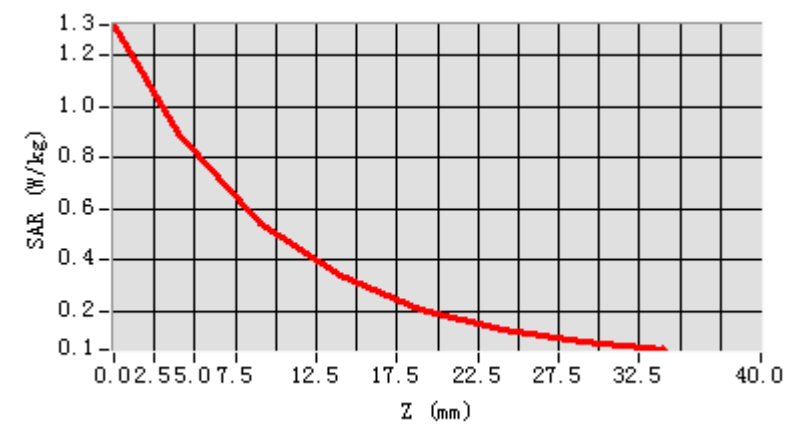



System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-17

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.40
Conductivity (S/m)	0.91
Probe	SN 07/21 EPG0352
ConvF:	1.57
Crest factor:	1:1

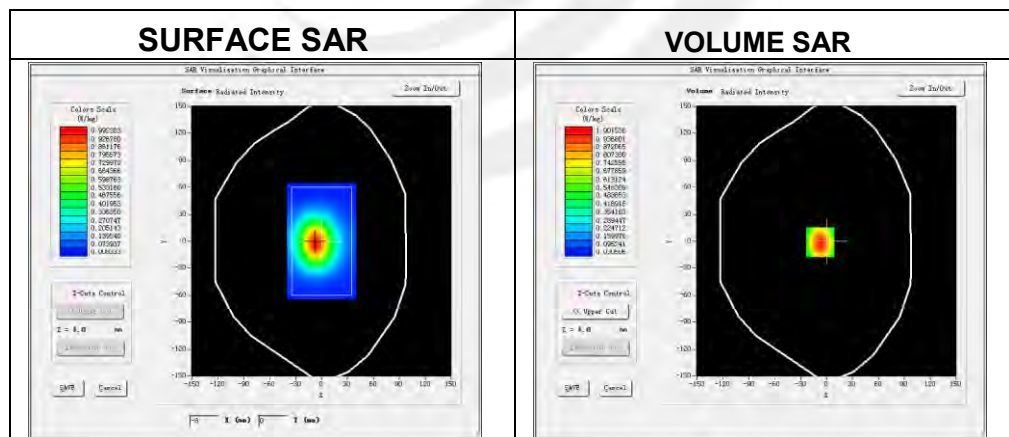

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.625881
SAR 1g (W/Kg)	0.986603

Z Axis Scan

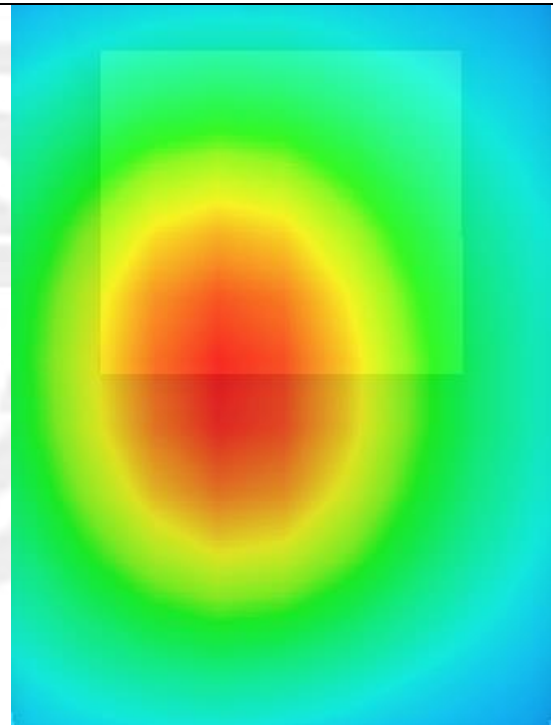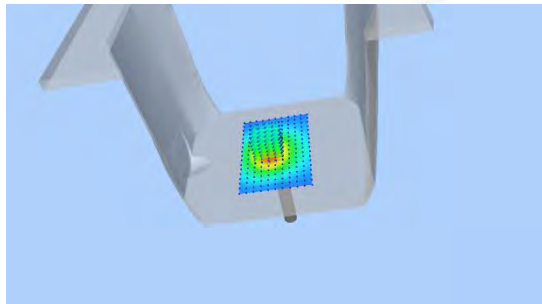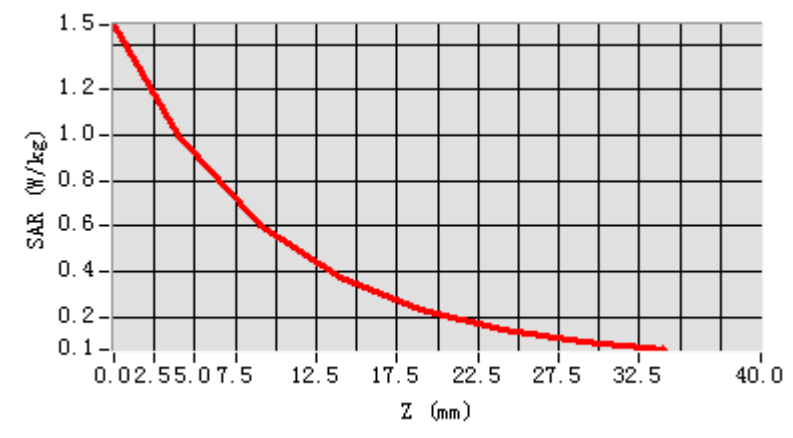

**System Performance Check Data(1800MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-21




Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	39.45
Conductivity (S/m)	1.39
Probe	SN 07/21 EPGO352
ConvF	1.60
Crest factor:	1:1

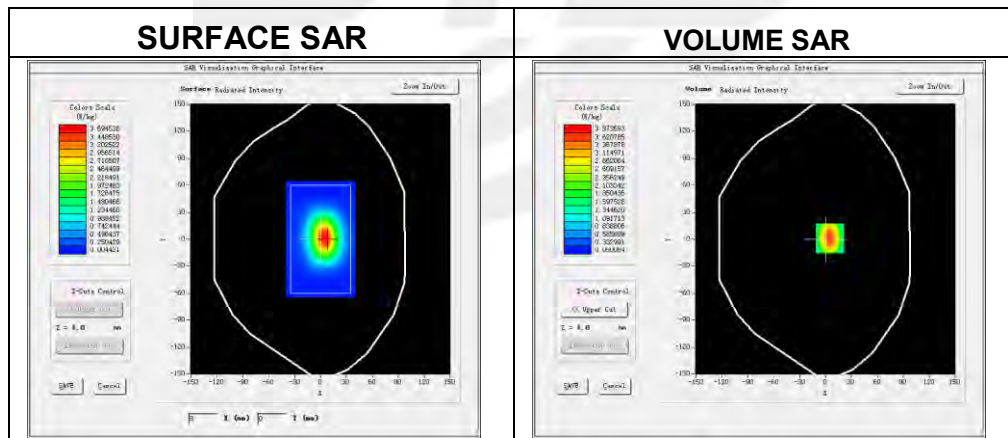**Maximum location: X=5.00, Y=1.00**

SAR 10g (W/Kg)	1.975582
SAR 1g (W/Kg)	3.830731

Z Axis Scan

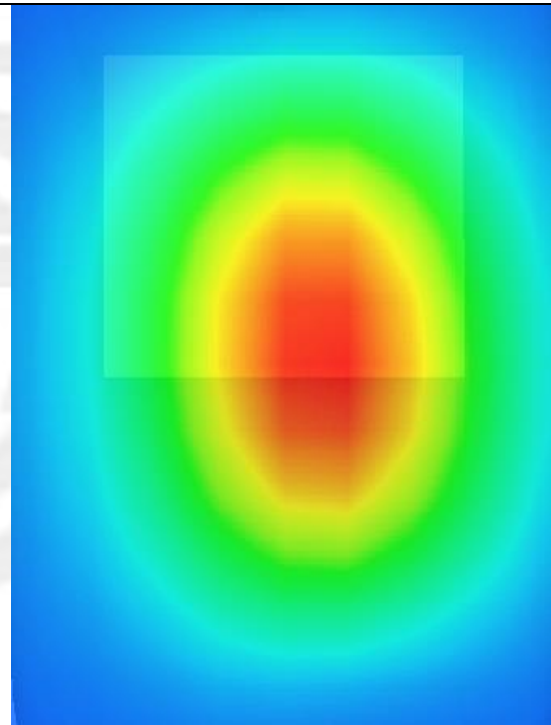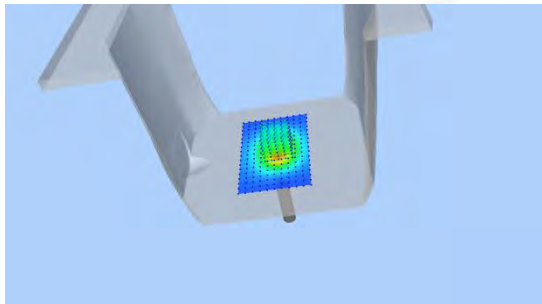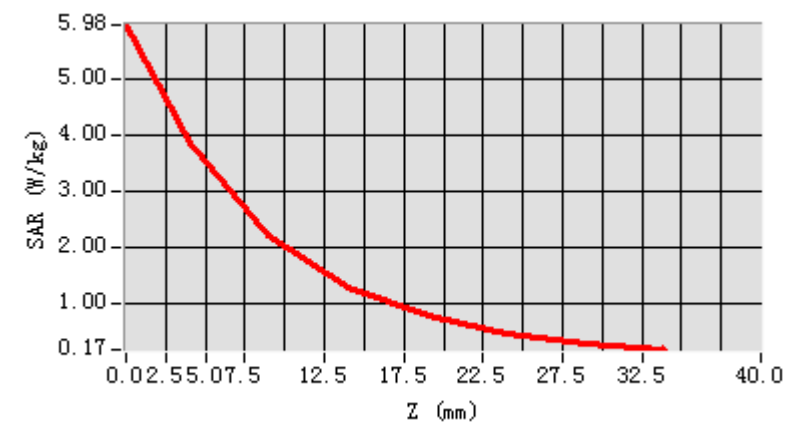



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-22

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	39.58
Conductivity (S/m)	1.45
Probe	SN 07/21 EPGO352
ConvF:	1.78
Crest factor:	1:1

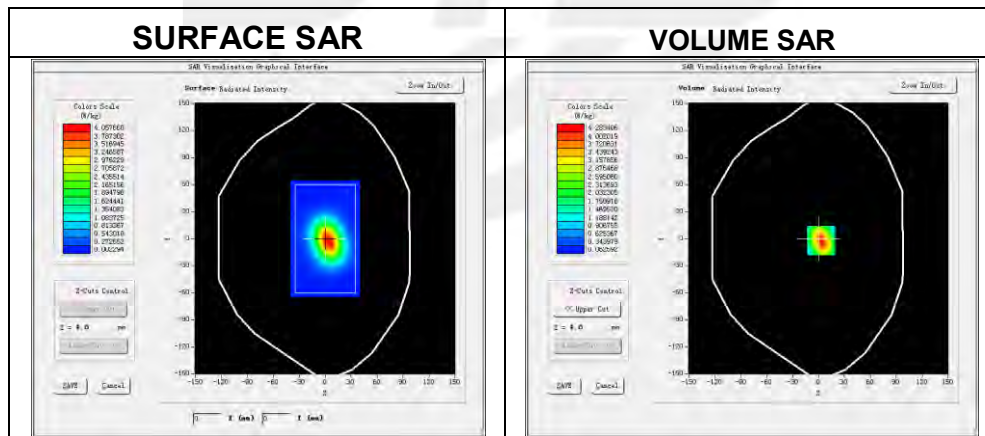

Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	2.042260
SAR 1g (W/Kg)	3.998108

Z Axis Scan

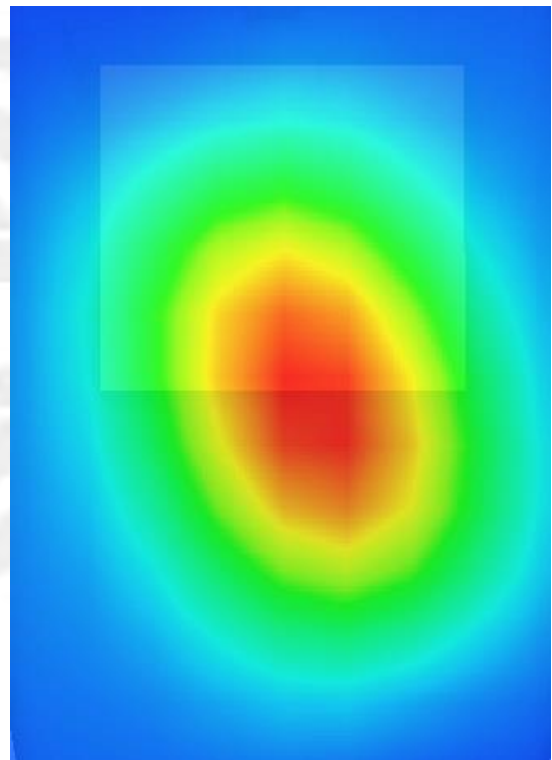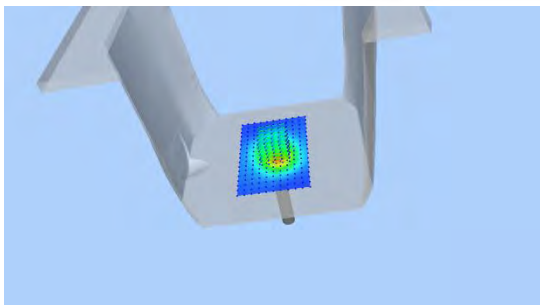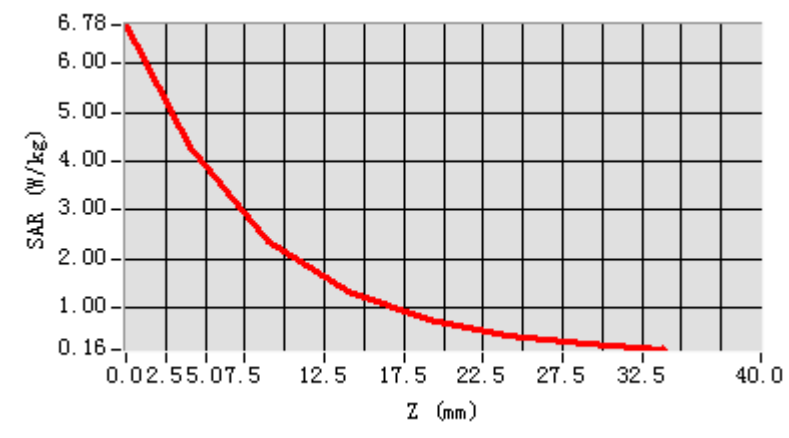

**System Performance Check Data (2450MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-28

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	39.12
Conductivity (S/m)	1.81
Probe	SN 07/21 EPG0352
ConvF	1.75
Crest factor:	1:1

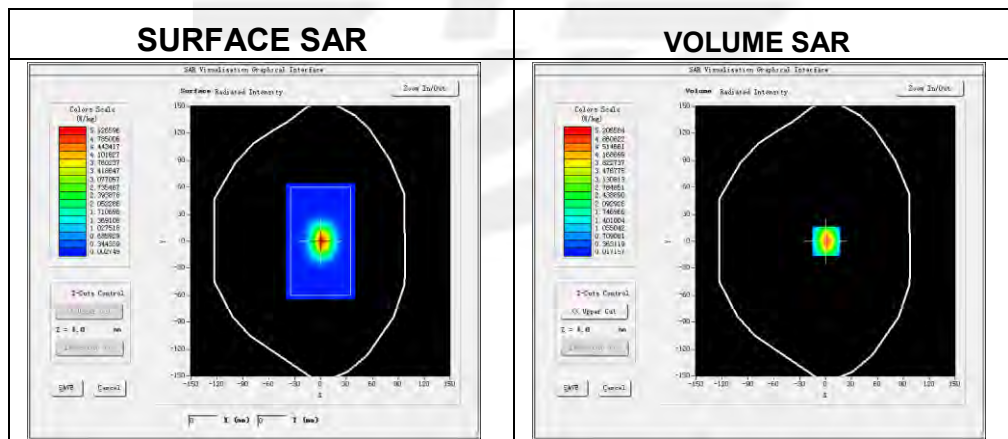**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	2.376862
SAR 1g (W/Kg)	5.472726



Z Axis Scan

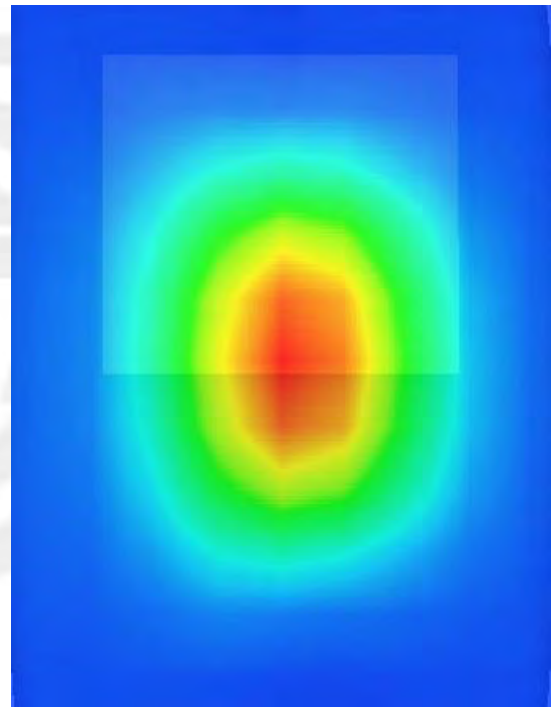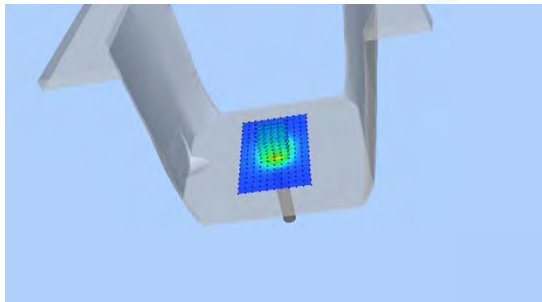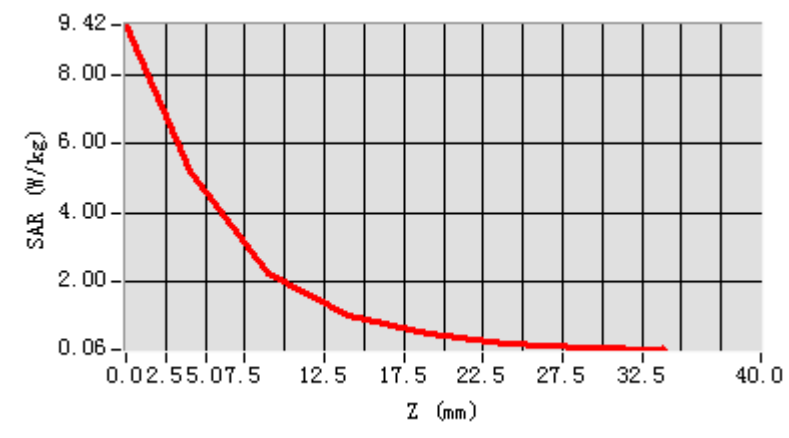



System Performance Check Data(2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-03-28

Experimental conditions.




Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	39.18
Conductivity (S/m)	1.91
Probe	SN 07/21 EPGO352
ConvF	1.63
Crest factor:	1:1

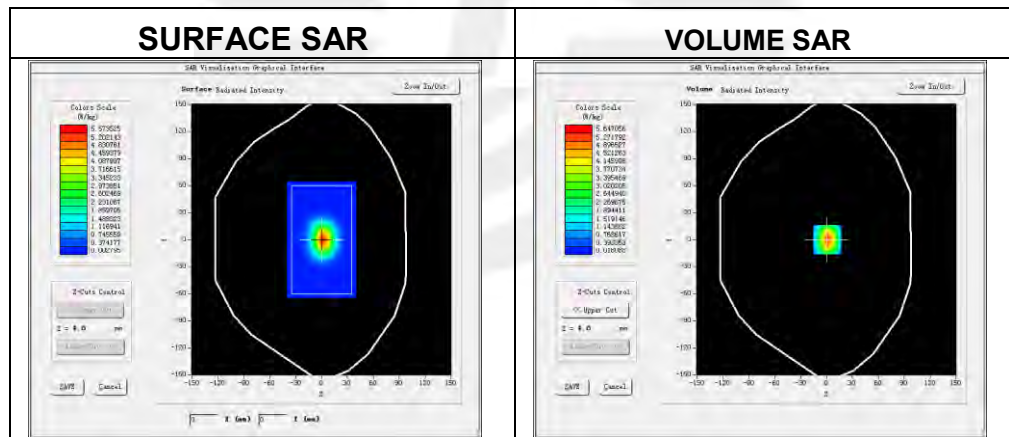

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.497713
SAR 1g (W/Kg)	5.600977

Z Axis Scan

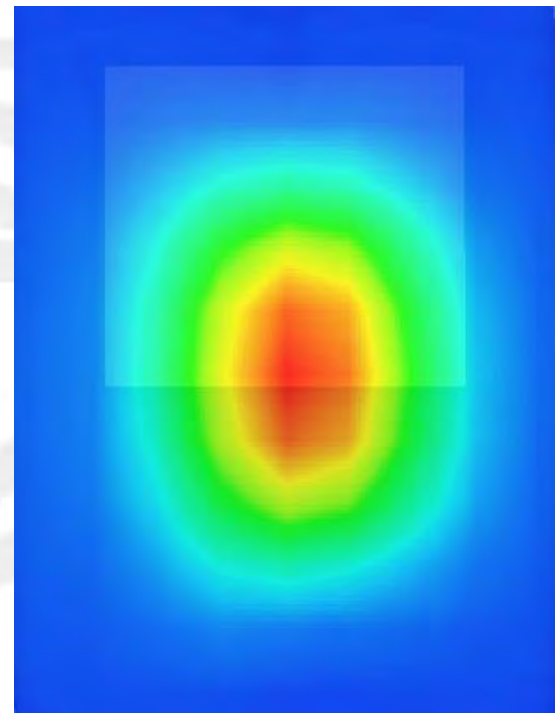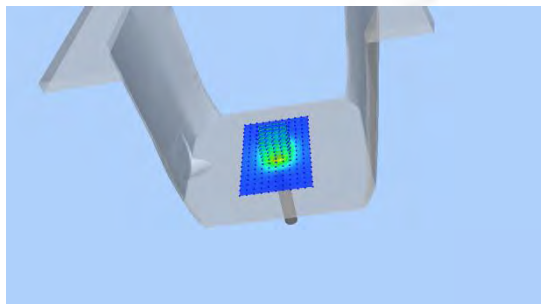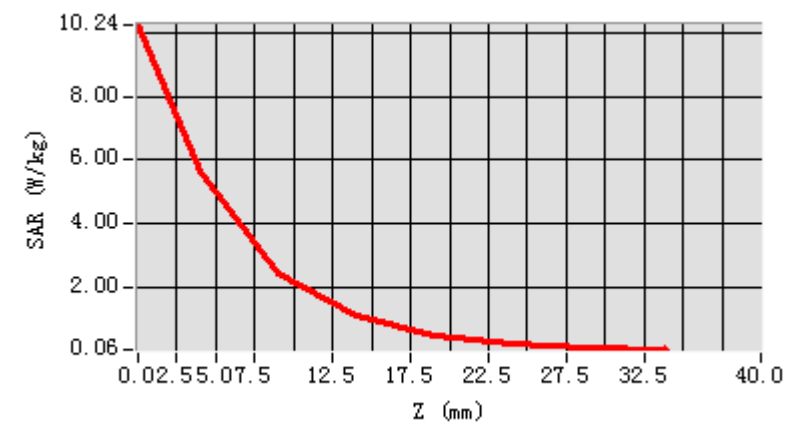

**System Performance Check Data (5200MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2022-04-06


Experimental conditions.

Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	36.12
Conductivity (S/m)	4.64
Probe	SN 07/21 EPGO352
ConvF	1.65
Crest factor:	1:1

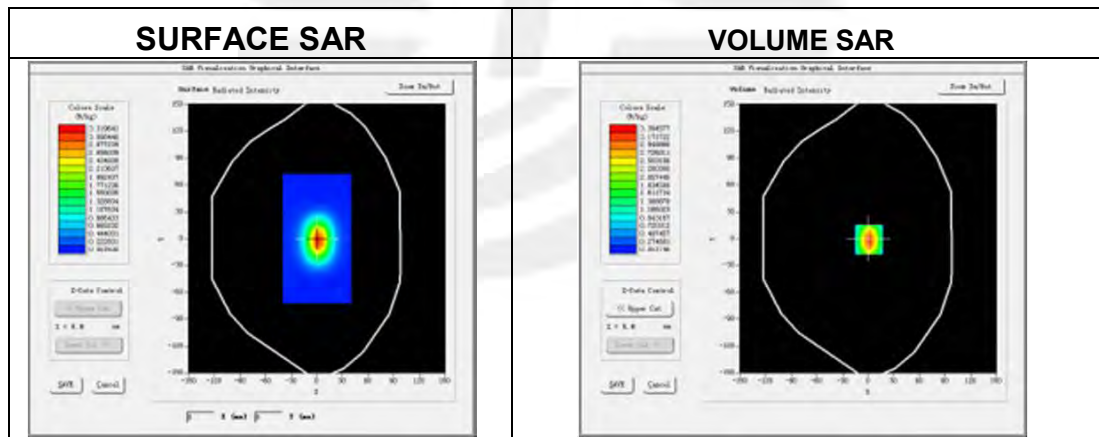**Maximum location: X=7.00, Y=2.00**

SAR 10g (W/Kg)	5.695132
SAR 1g (W/Kg)	15.854175

Z Axis Scan

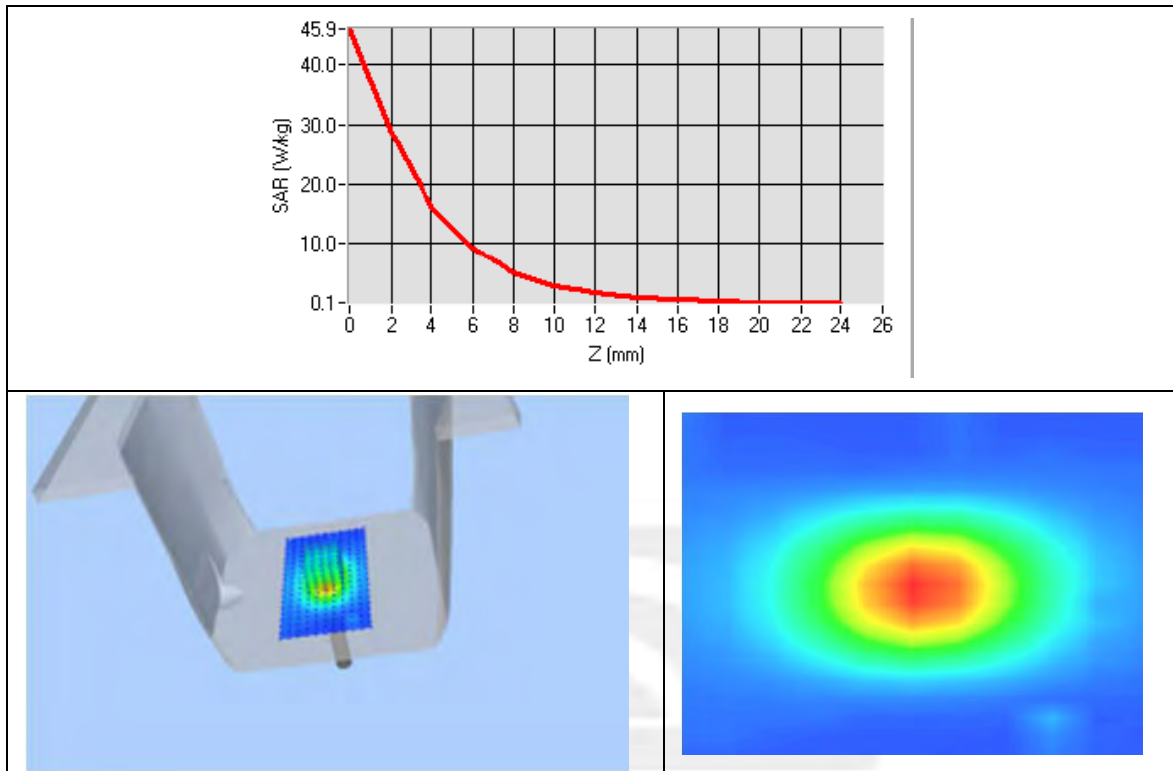



System Performance Check Data (5300MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-04-07

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5300
Relative permittivity	34.62
Conductivity (S/m)	4.71
Probe	SN 07/21 EPGO352
ConvF	1.64
Crest factor:	1:1

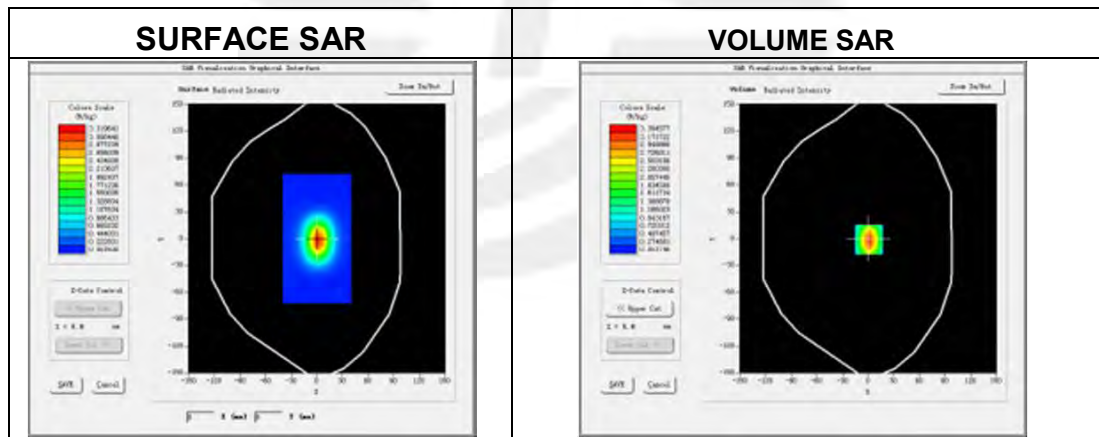

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.166735
SAR 1g (W/Kg)	16.696597

Z Axis Scan

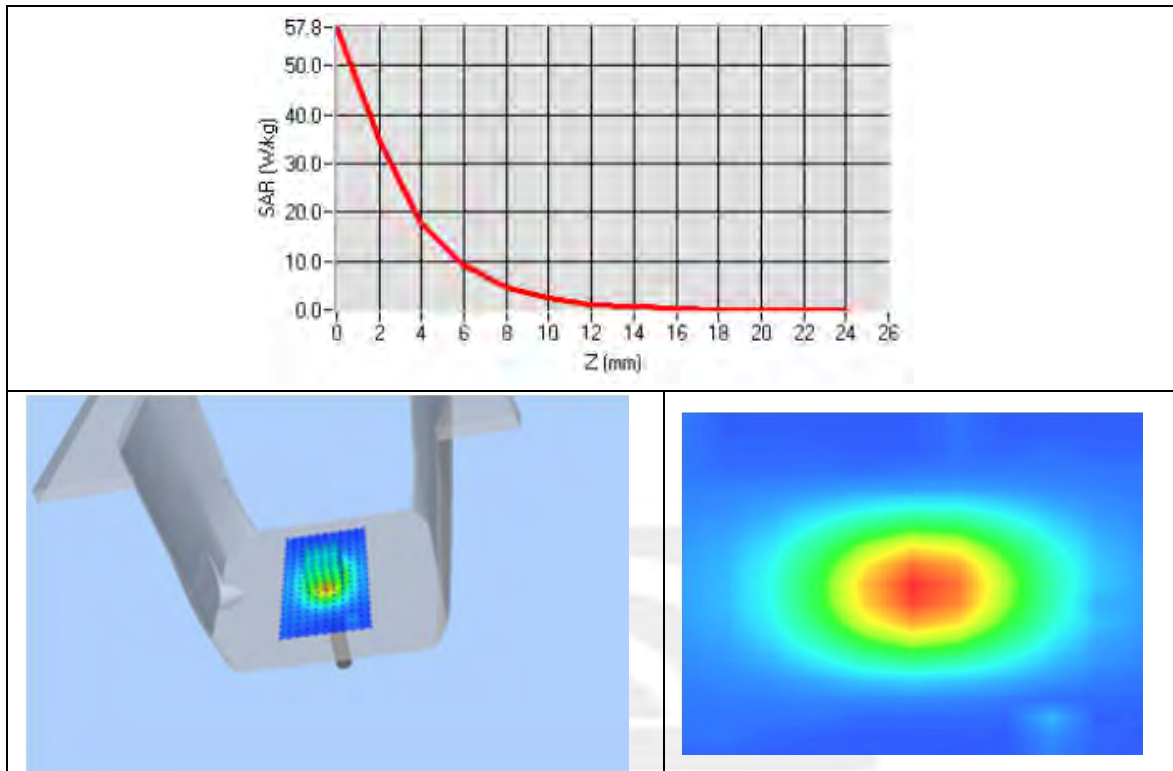

**System Performance Check Data (5600MHz)**

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-04-08


Experimental conditions.

Device Position	Validation plane
Band	5600 MHz
Channels	-
Signal	CW
Frequency (MHz)	5600
Relative permittivity	36.25
Conductivity (S/m)	5.06
Probe	SN 07/21 EPGO352
ConvF	1.64
Crest factor:	1:1

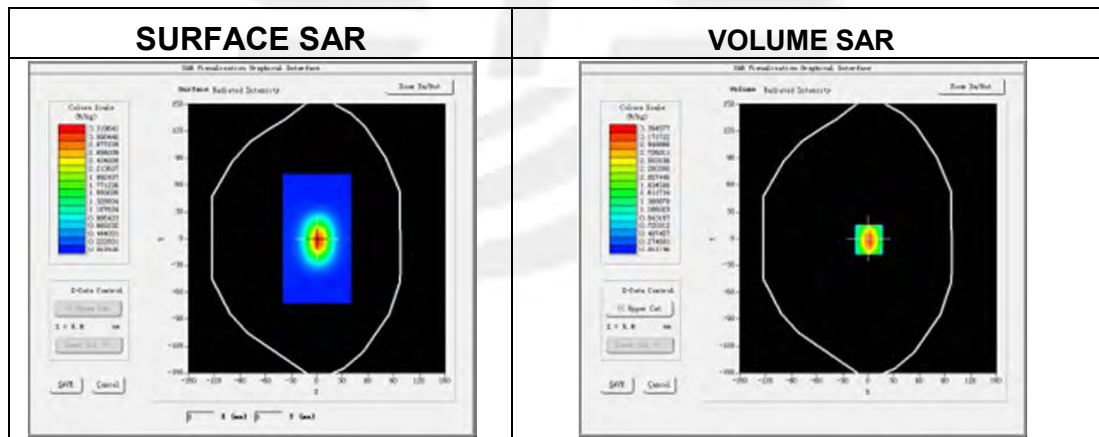**Maximum location: X=7.00, Y=2.00**

SAR 10g (W/Kg)	5.727796
SAR 1g (W/Kg)	17.542632

Z Axis Scan

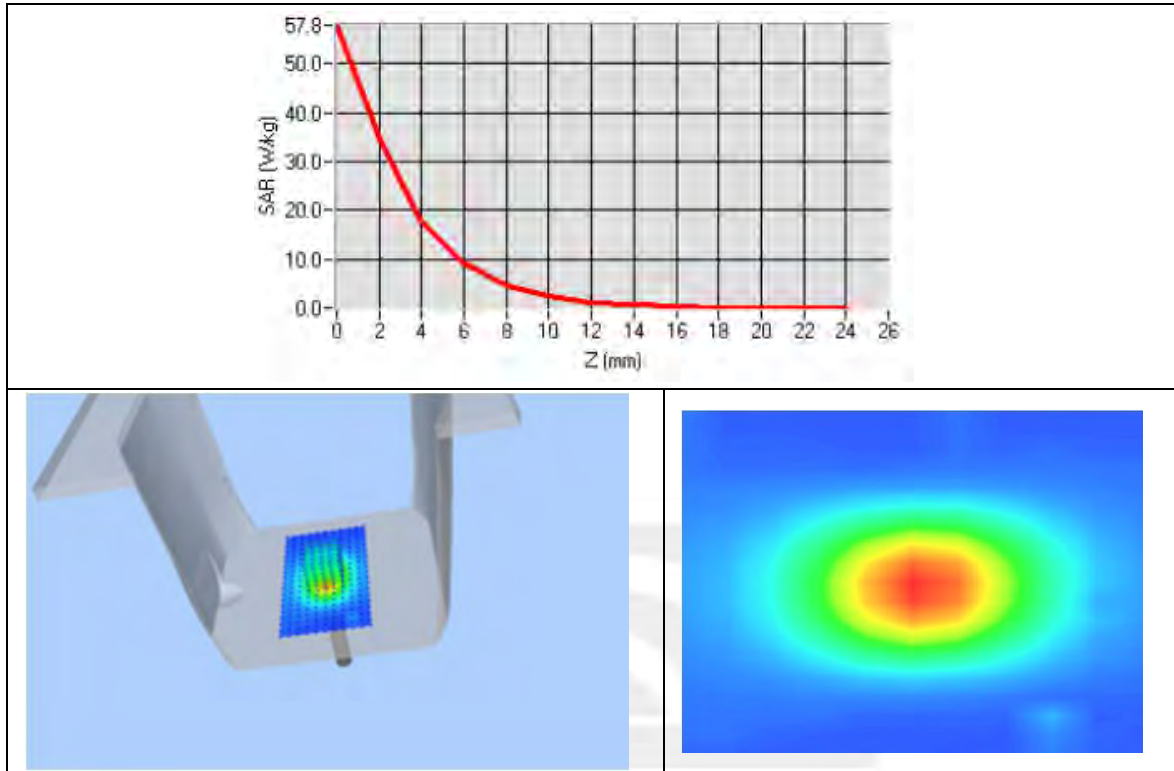



System Performance Check Data (5800MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2022-06-15

Experimental conditions.


Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	34.90
Conductivity (S/m)	5.26
Probe	SN 07/21 EPGO352
ConvF	1.64
Crest factor:	1:1

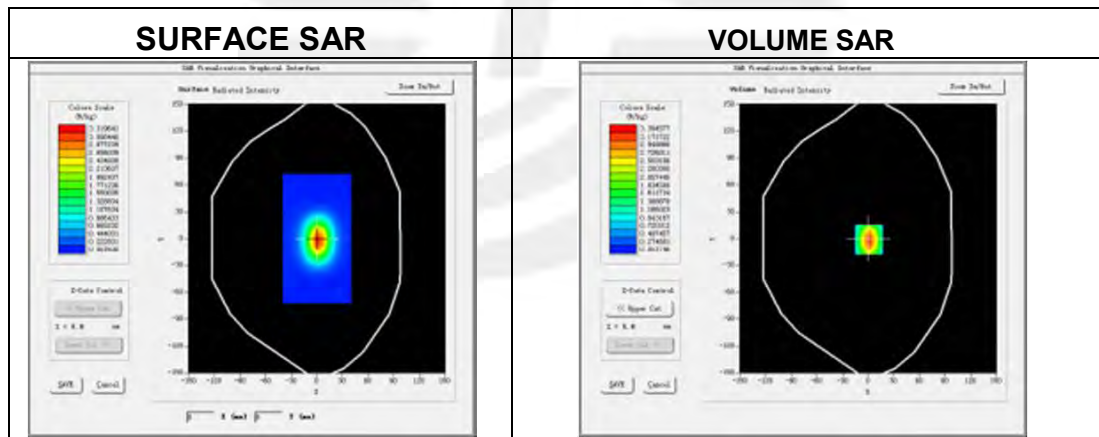

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.135488
SAR 1g (W/Kg)	18.307726

Z Axis Scan

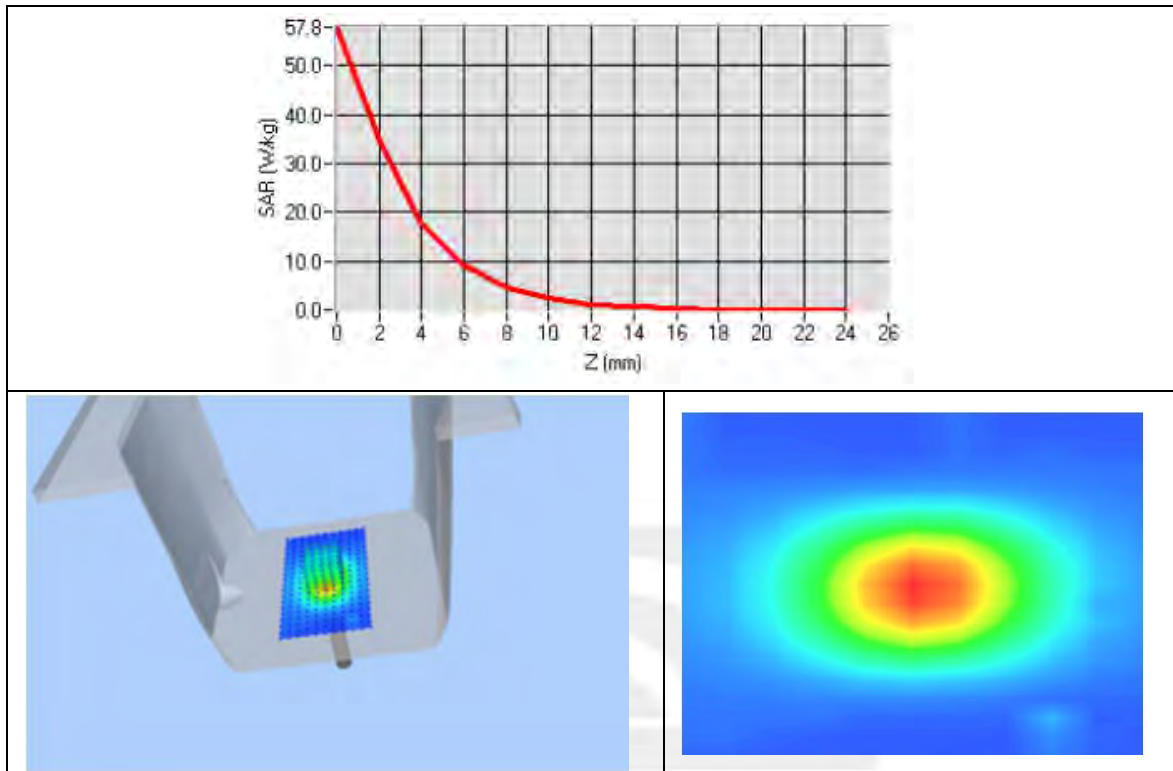

Appendix B. SAR Test Plots


Plot 1: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA 2
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	39.06
Conductivity (S/m)	1.46

Maximum location: X=-43.00, Y=-56.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.186818
SAR 1g (W/Kg)	0.317989

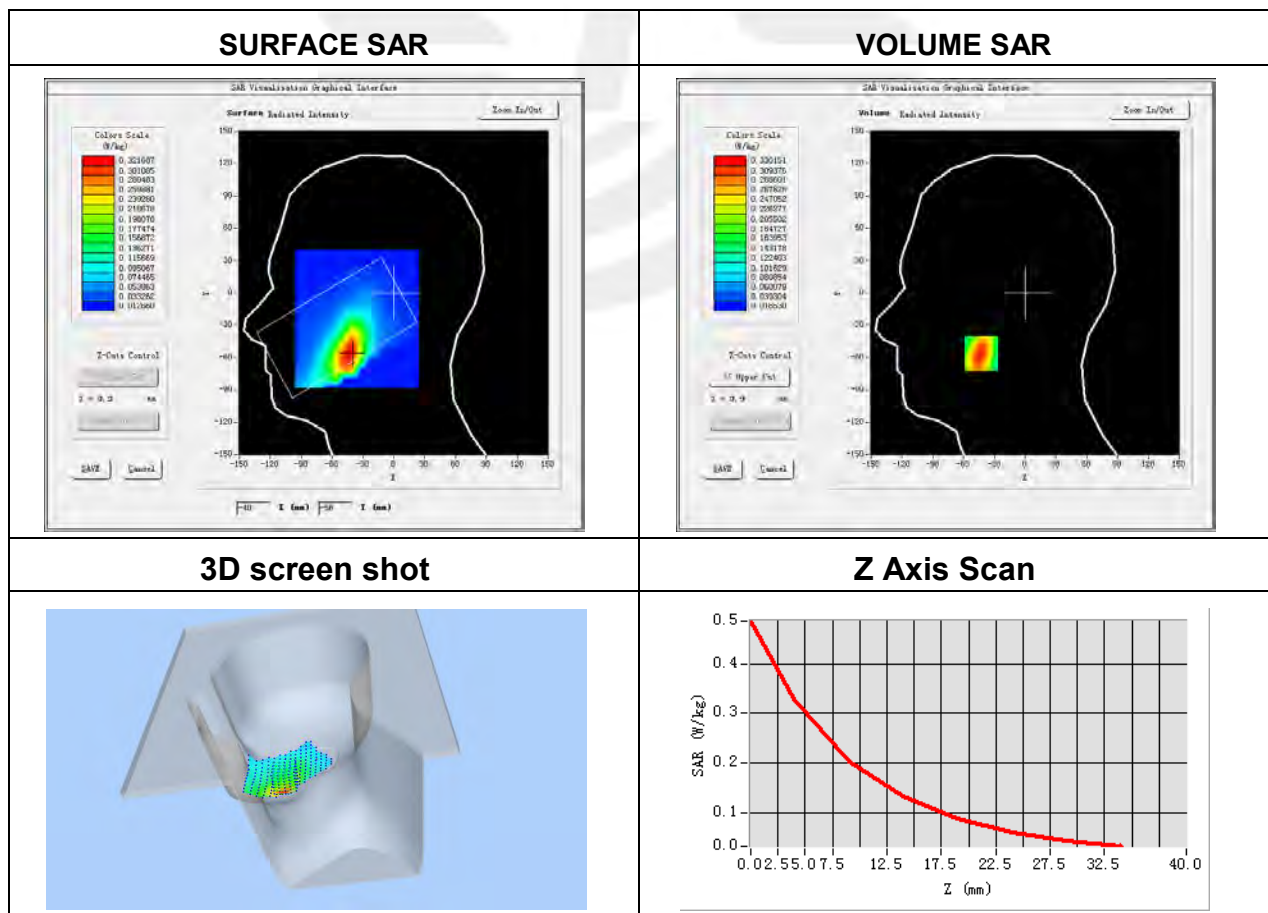



Plot 2: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
ConvF	1.84
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 2
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	39.06
Conductivity (S/m)	1.46

Maximum location: X=-24.00, Y=-31.00

SAR Peak: 1.42 W/kg

SAR 10g (W/Kg)	0.516661
SAR 1g (W/Kg)	0.921099

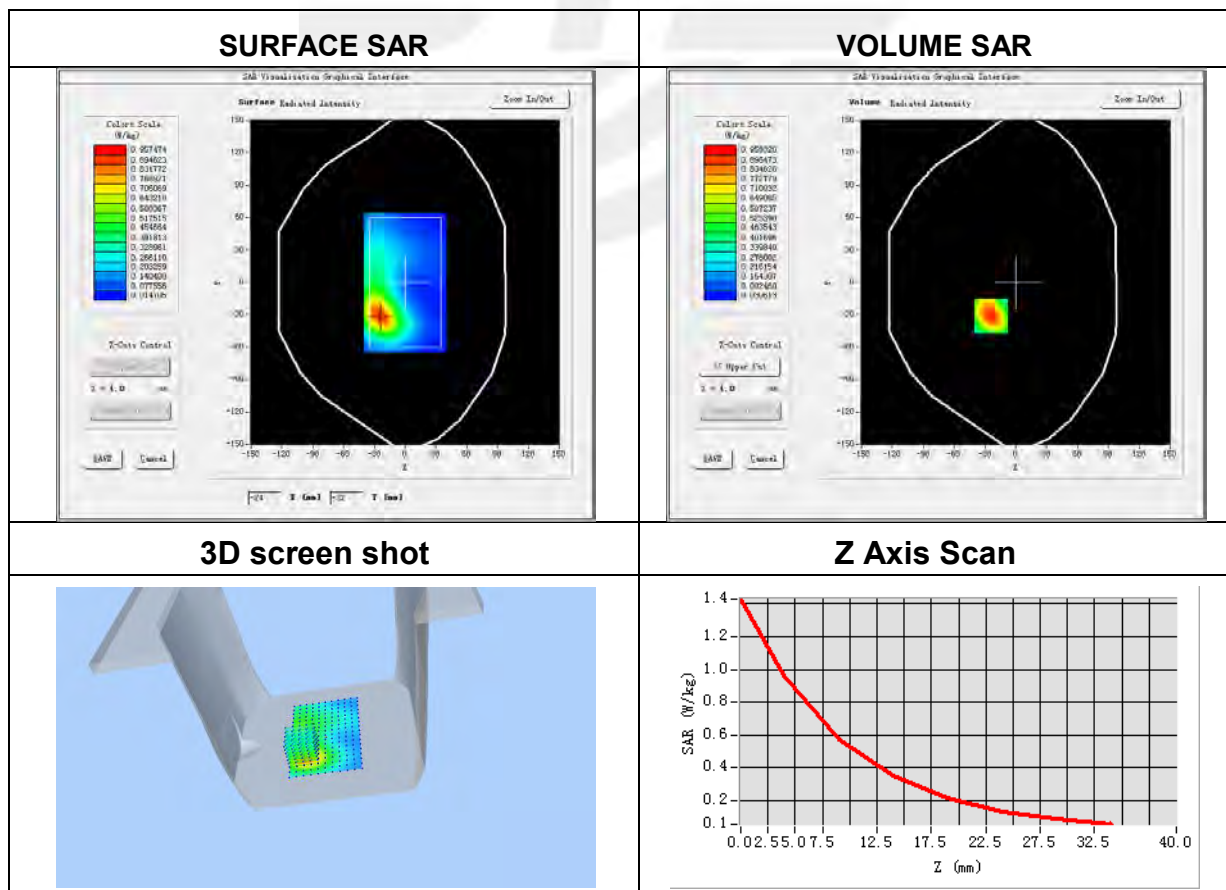


Plot 3: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-21
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA 4
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	41.74
Conductivity (S/m)	1.41

Maximum location: X=-42.00, Y=-45.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.105456
SAR 1g (W/Kg)	0.173738

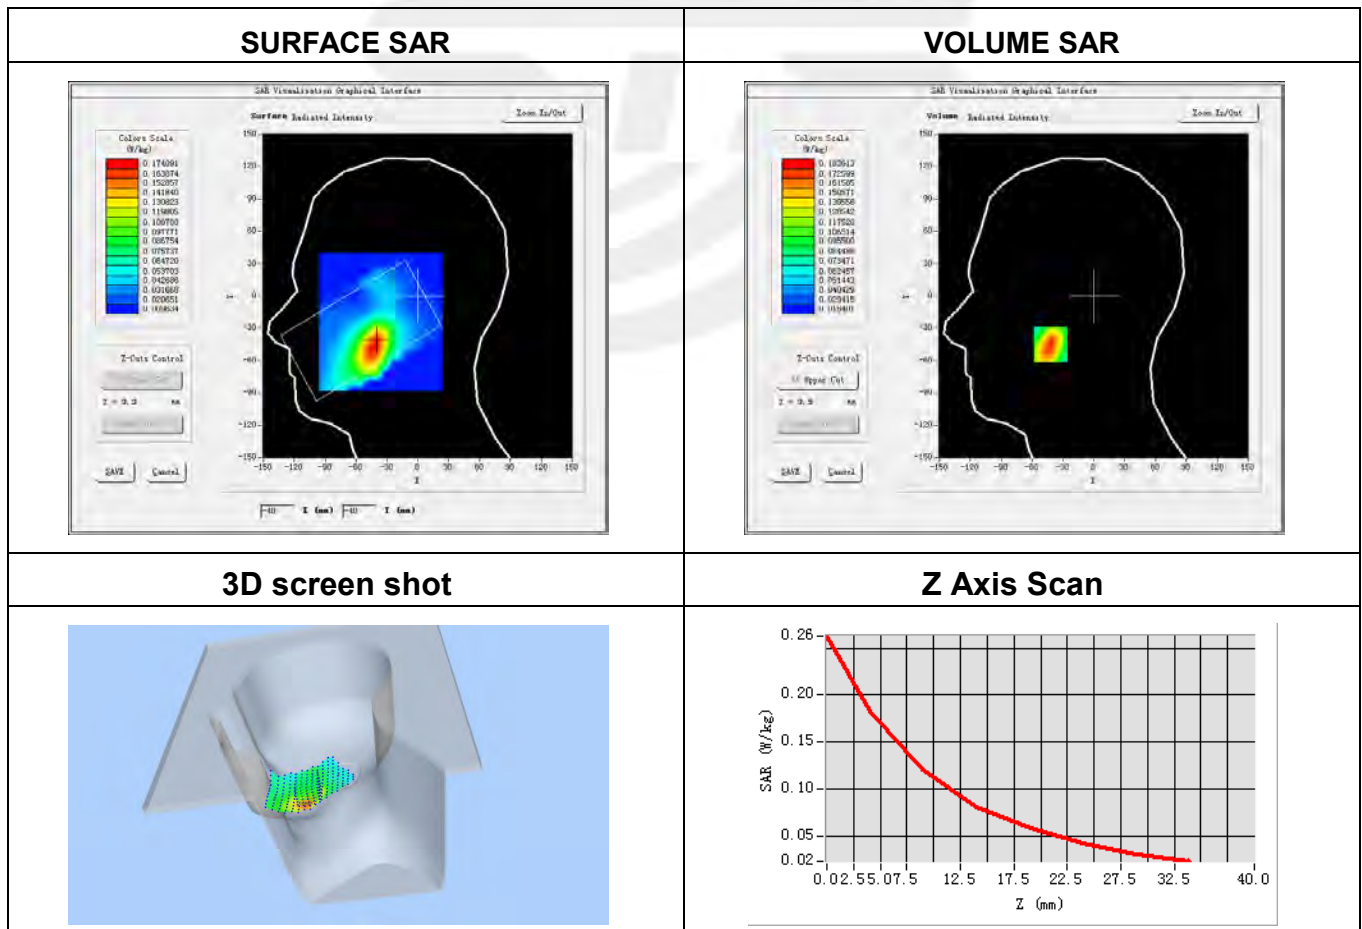



Plot 4: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-21
Probe	SN 07/21 EPGO352
ConvF	1.60
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 4
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	41.74
Conductivity (S/m)	1.41

Maximum location: X=-26.00, Y=-31.00

SAR Peak: 0.83 W/kg

SAR 10g (W/Kg)	0.305258
SAR 1g (W/Kg)	0.541646

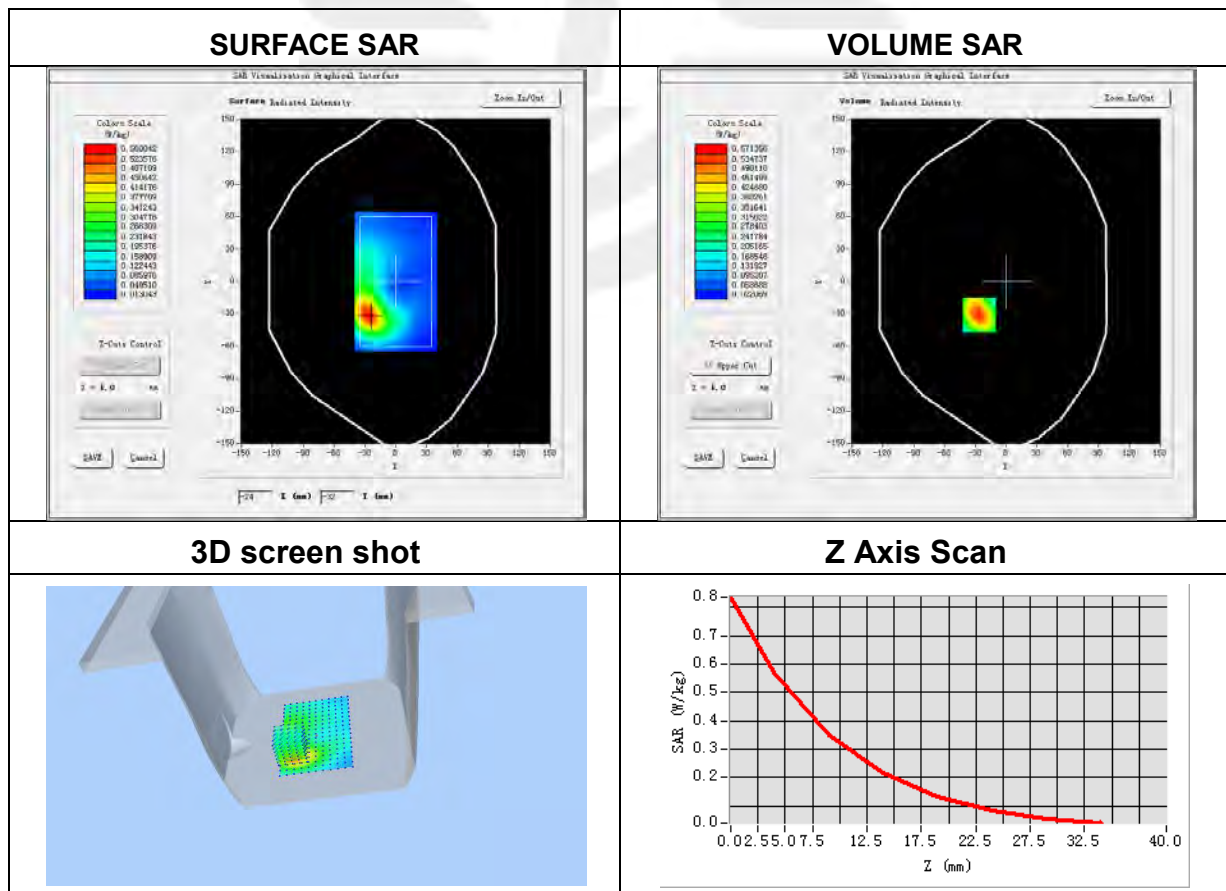

Plot 5: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone


Test Date	2022-03-17
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Left Cheek
Device Position	Cheek
Band	WCDMA 5
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	40.24
Conductivity (S/m)	0.89

Maximum location: X=-51.00, Y=-23.00


SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.085296
SAR 1g (W/Kg)	0.110612


SURFACE SAR

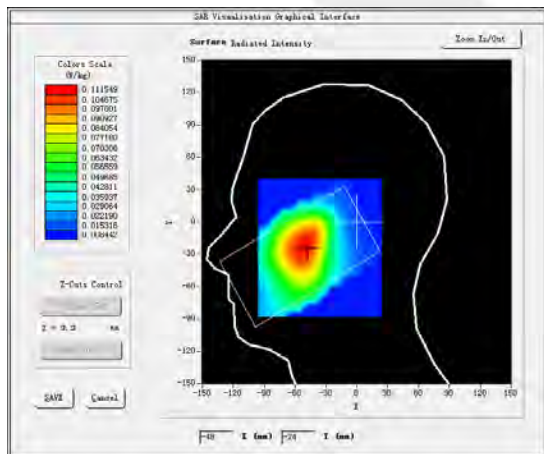


VOLUME SAR

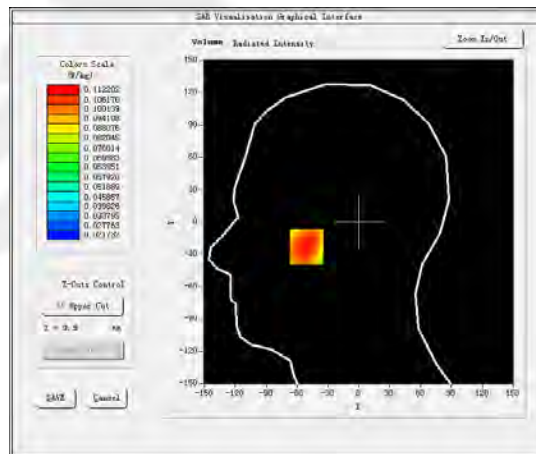

3D screen shot

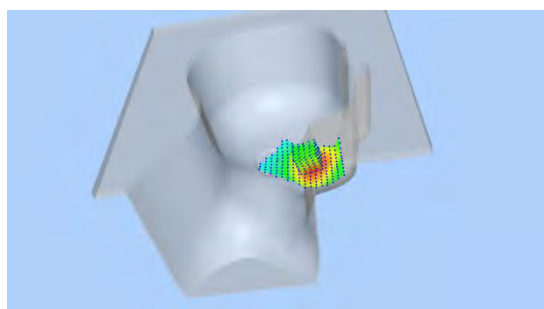

Z Axis Scan

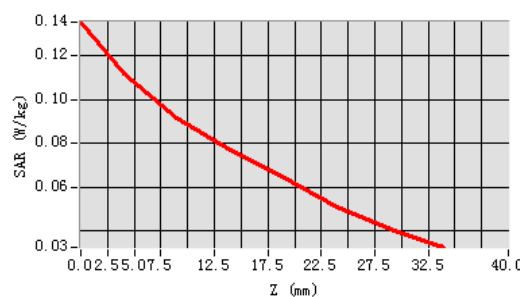


Plot 6: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-17
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 5
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	40.24
Conductivity (S/m)	0.89

Maximum location: X=25.00, Y=-42.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.099522
SAR 1g (W/Kg)	0.171369

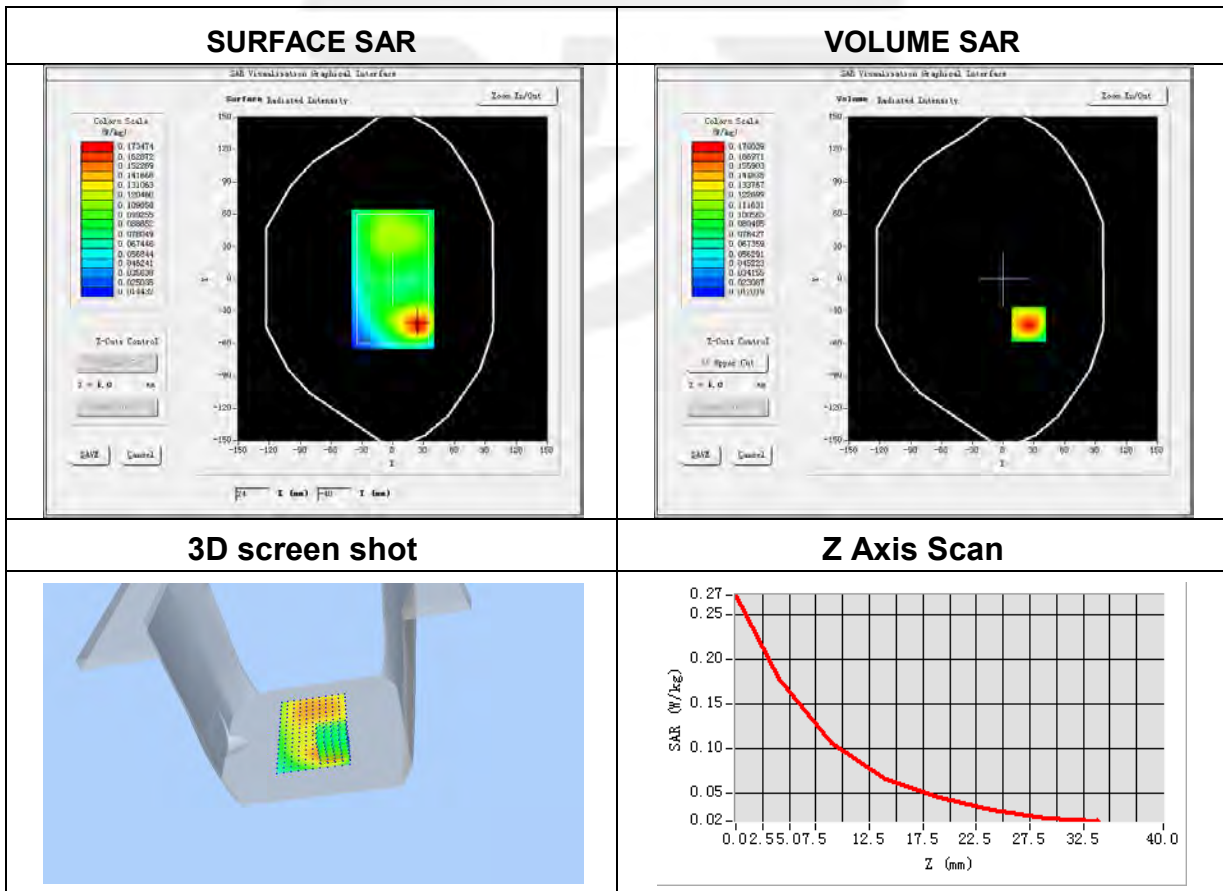


Plot 7: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	39.58
Conductivity (S/m)	1.45

Maximum location: X=-42.00, Y=-50.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.134619
SAR 1g (W/Kg)	0.230979

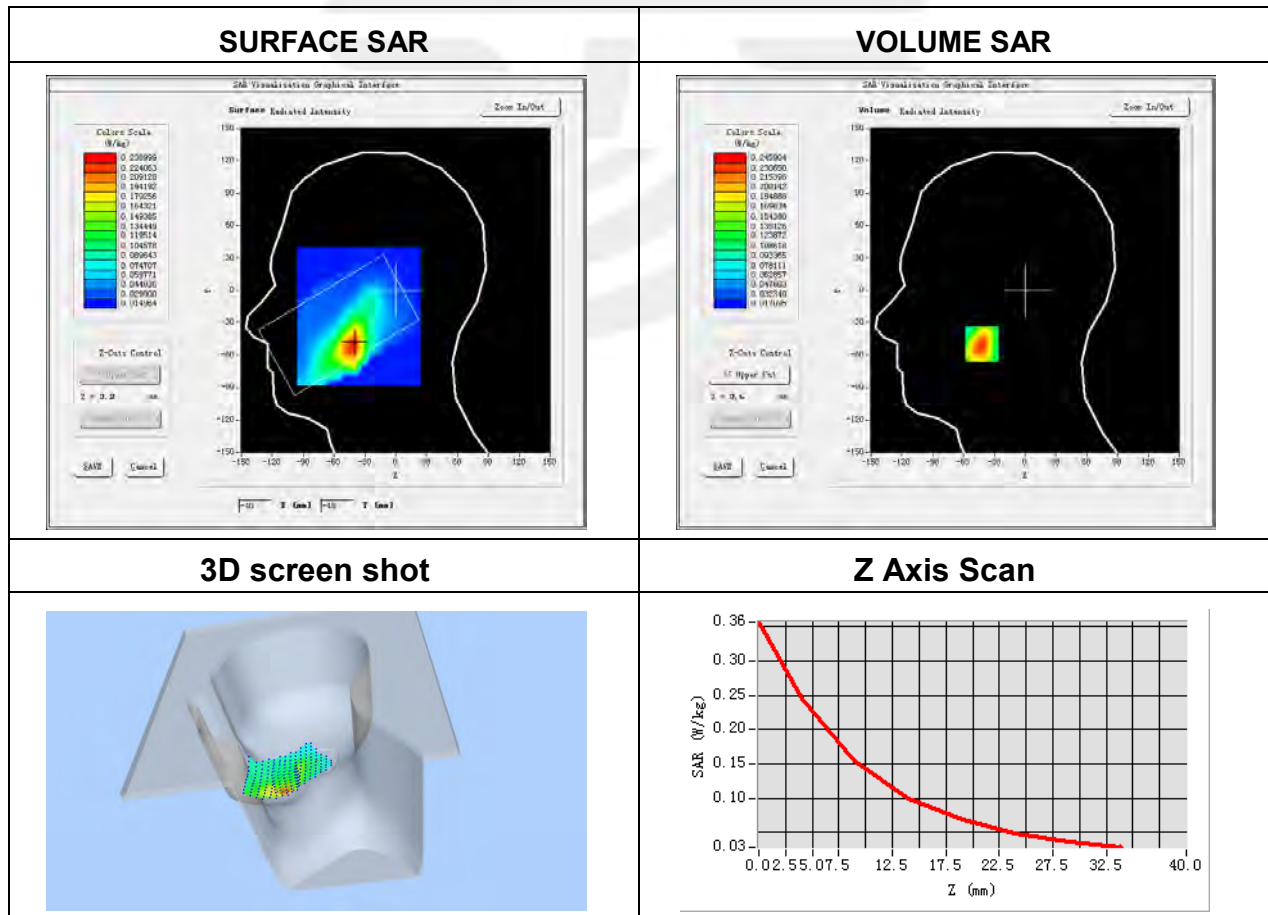


Plot 8: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 2(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	39.58
Conductivity (S/m)	1.45

Maximum location: X=-25.00, Y=-22.00

SAR Peak: 1.46 W/kg

SAR 10g (W/Kg)	0.531079
SAR 1g (W/Kg)	0.936385

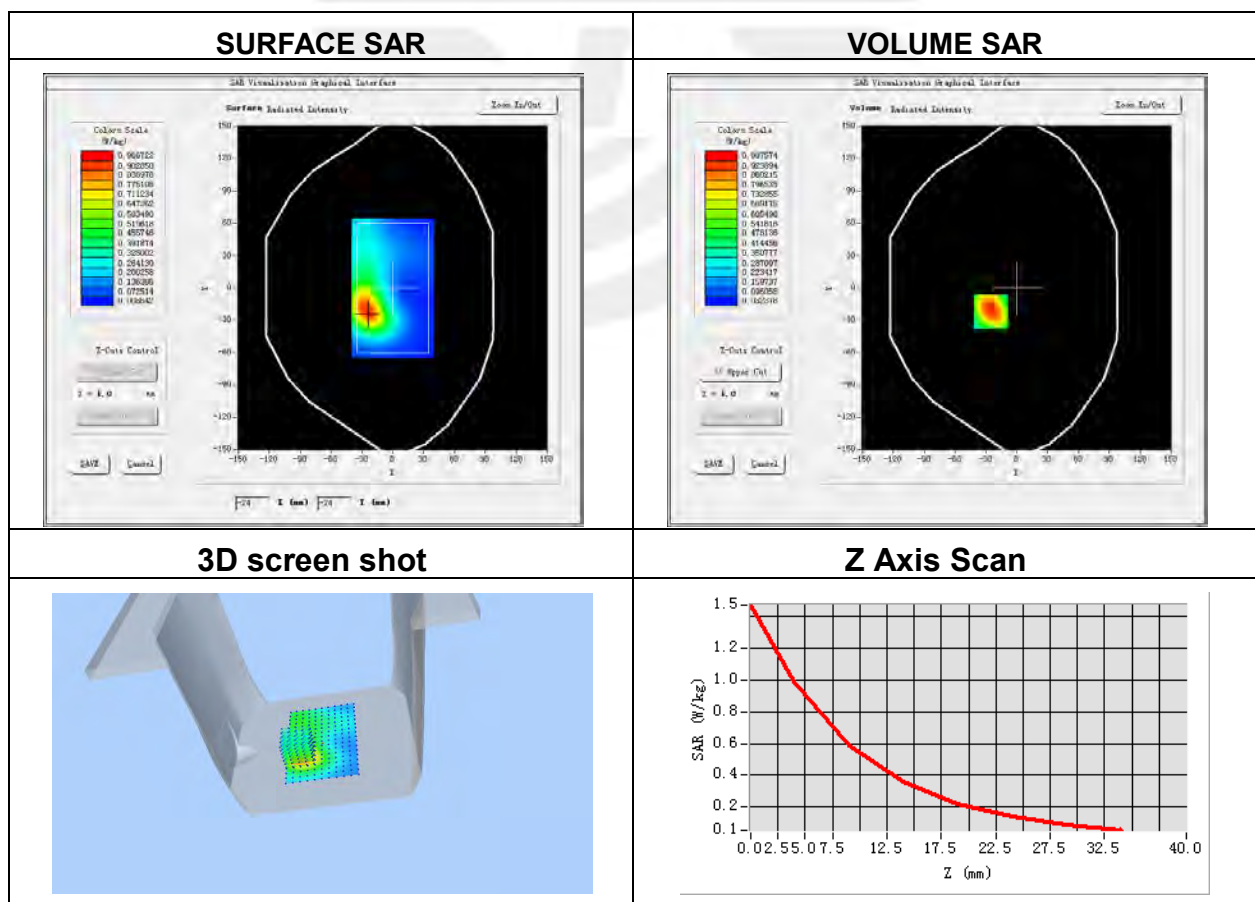


**Plot 9: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-21
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Left head
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	39.74
Conductivity (S/m)	1.35

Maximum location: X=-42.00, Y=-45.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.105456
SAR 1g (W/Kg)	0.173738

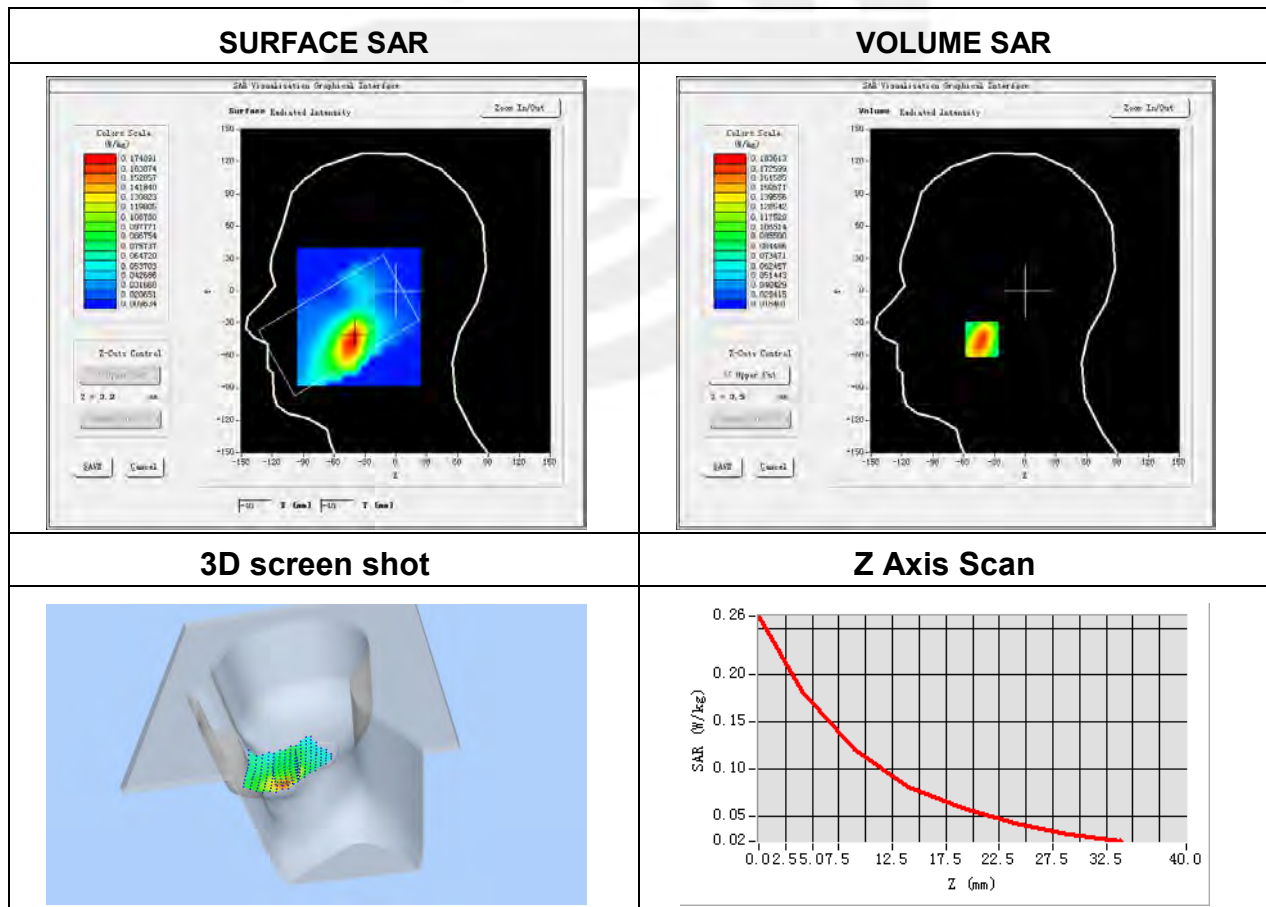


**Plot 10 DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-21
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1745
Relative permittivity (real part)	39.74
Conductivity (S/m)	1.35

Maximum location: X=-23.00, Y=-23.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.313118
SAR 1g (W/Kg)	0.551890

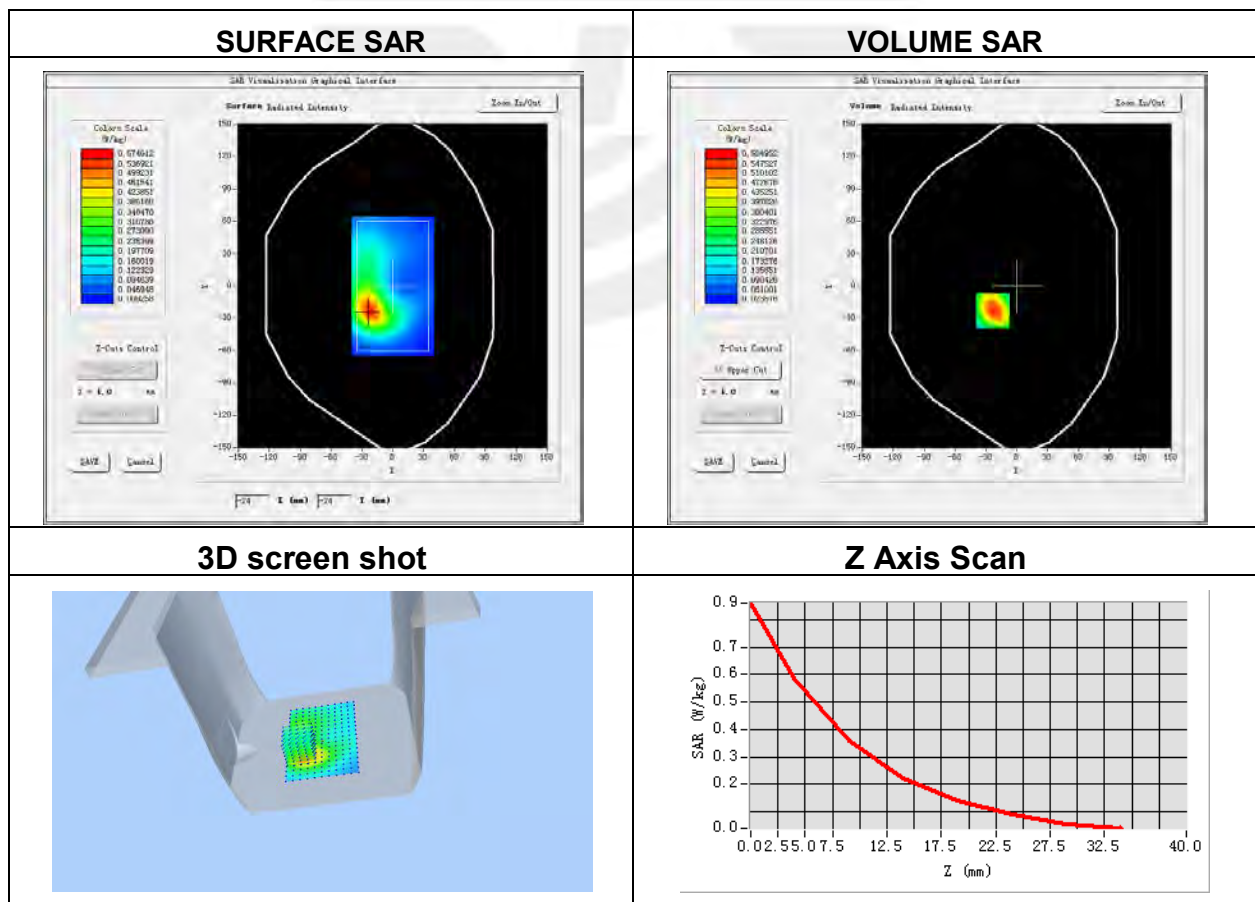


Plot 11 DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-17
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	42.28
Conductivity (S/m)	0.93

Maximum location: X=-49.00, Y=-46.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.099075
SAR 1g (W/Kg)	0.137852

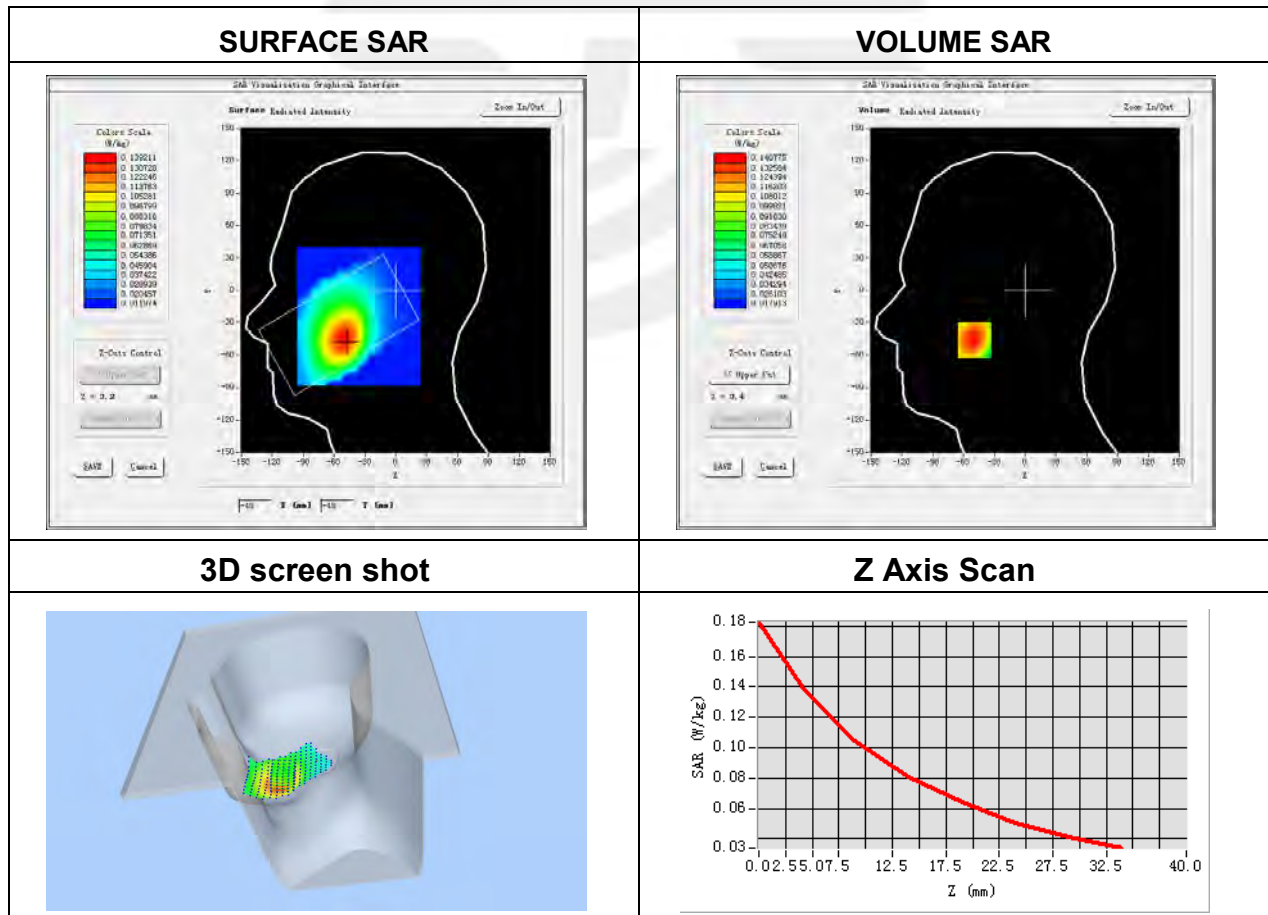





Plot 12 DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-17
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	42.28
Conductivity (S/m)	0.93

Maximum location: X=18.00, Y=-39.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.080854
SAR 1g (W/Kg)	0.134176

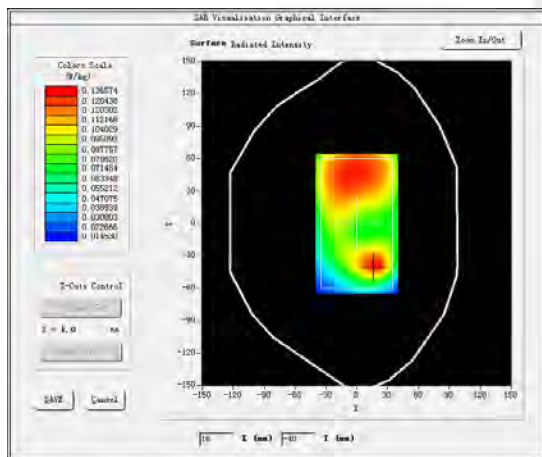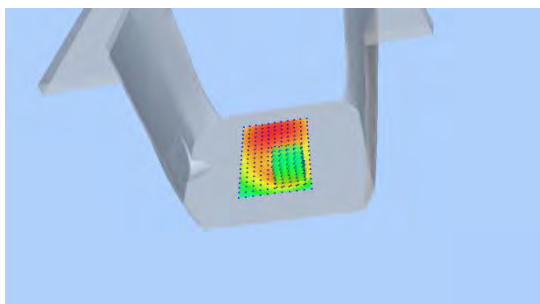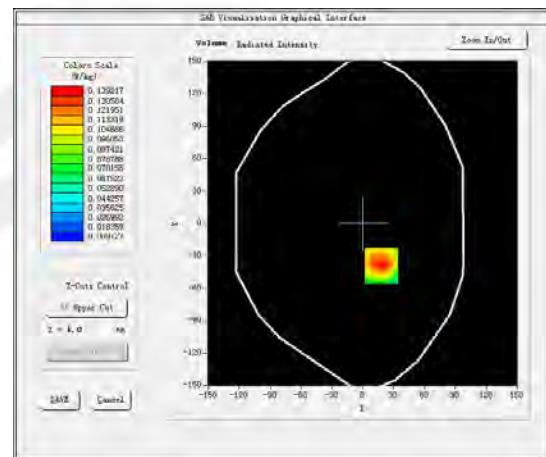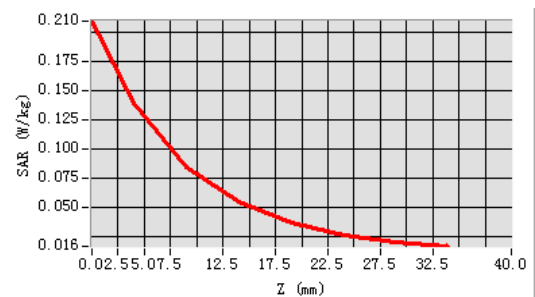SURFACE SAR

3D screen shot

VOLUME SAR

Z Axis Scan


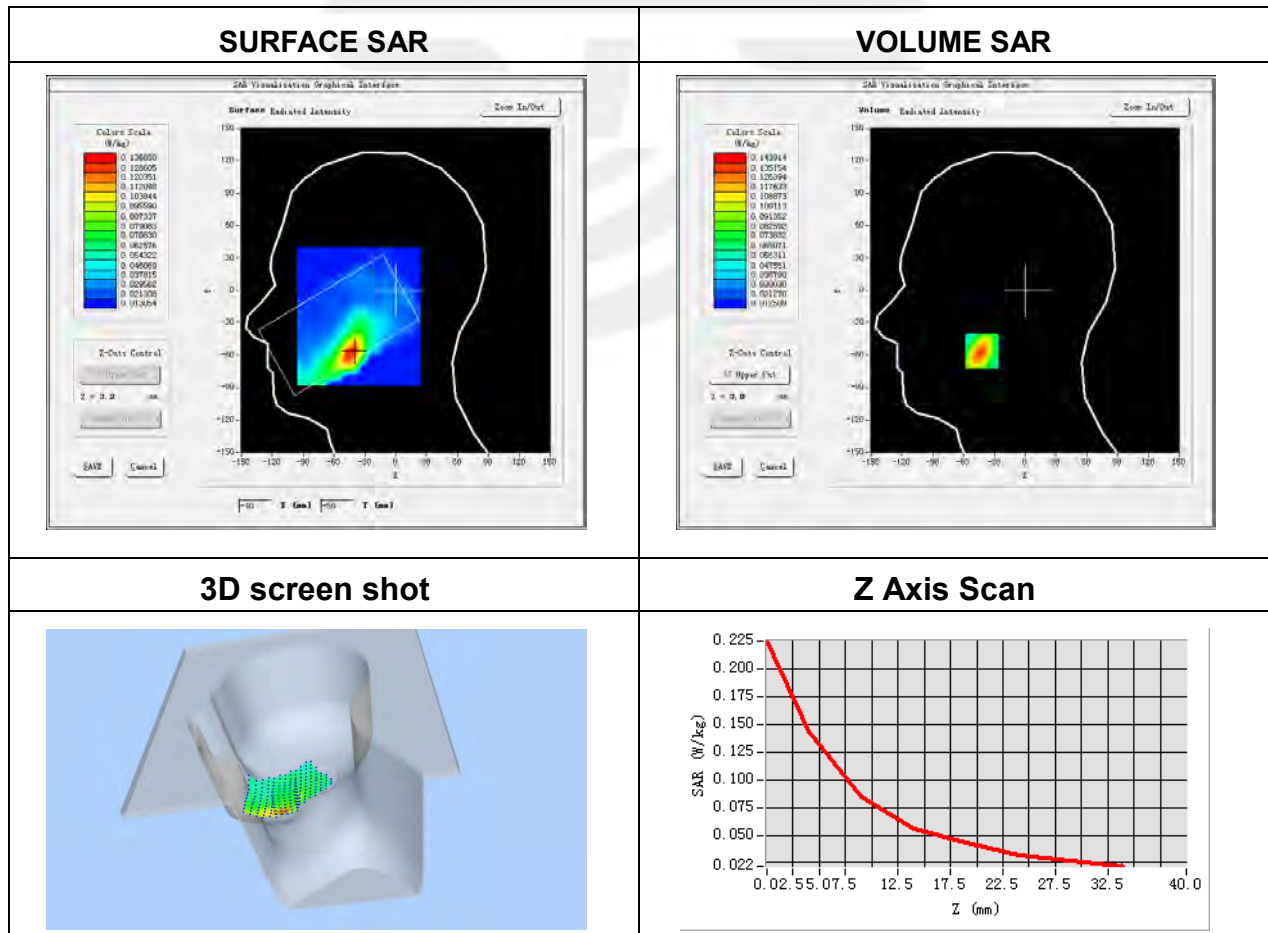

Plot 13: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-28
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	38.56
Conductivity (S/m)	1.96

Maximum location: X=-42.00, Y=-56.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.075702
SAR 1g (W/Kg)	0.135450




Plot 14: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-28
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	38.56
Conductivity (S/m)	1.96

Maximum location: X=-25.00, Y=-30.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.229281
SAR 1g (W/Kg)	0.427761

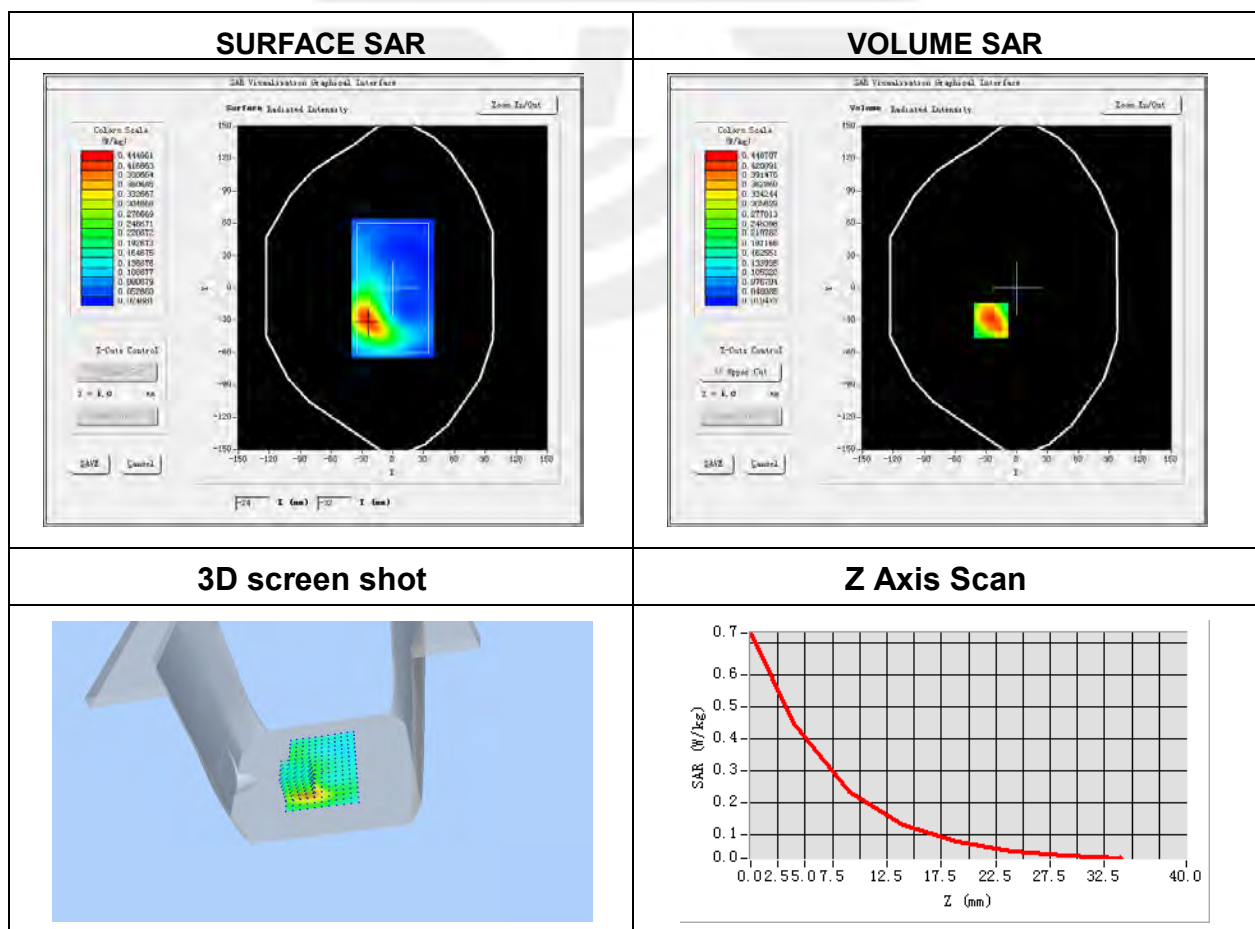


Plot 15: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	41.75
Conductivity (S/m)	0.90

Maximum location: X=-50.00, Y=-43.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.067920
SAR 1g (W/Kg)	0.091383

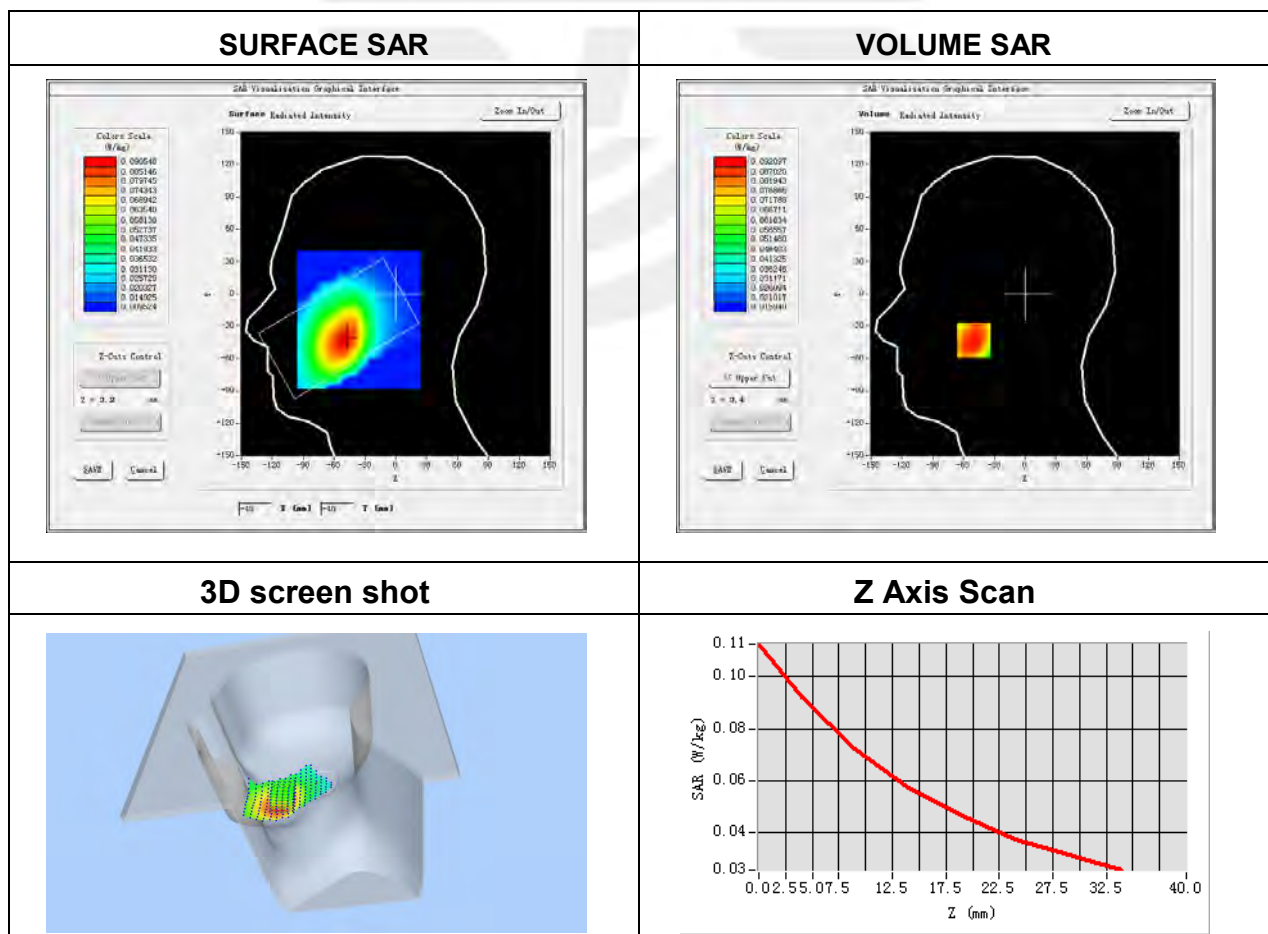





**Plot 16: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	41.75
Conductivity (S/m)	0.90

Maximum location: X=22.00, Y=-37.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.068814
SAR 1g (W/Kg)	0.111436

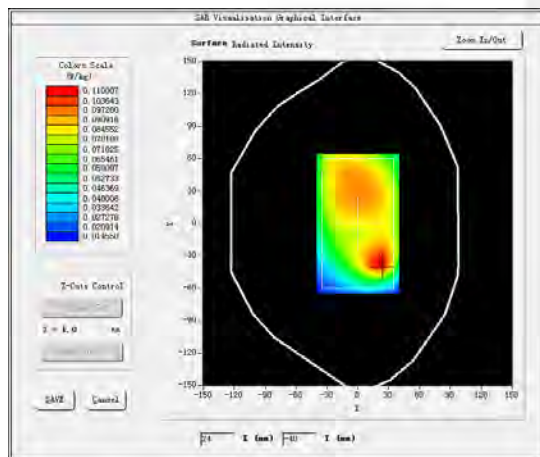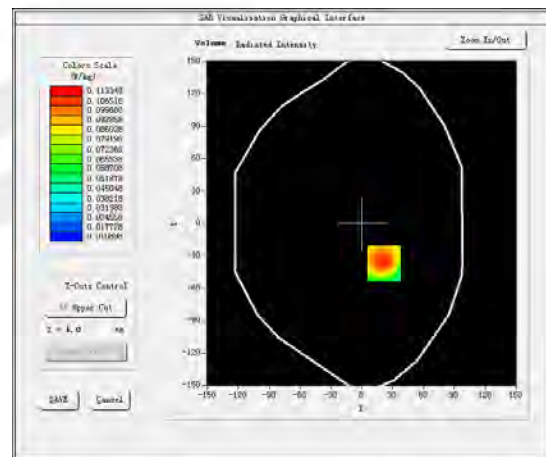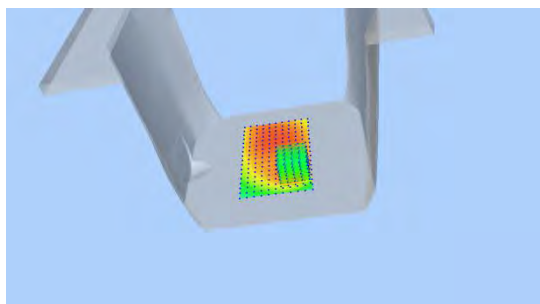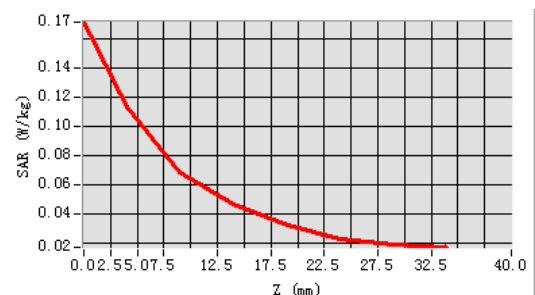SURFACE SAR**VOLUME SAR****3D screen shot****Z Axis Scan**


**Plot 17: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 13(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782
Relative permittivity (real part)	42.07
Conductivity (S/m)	0.90

Maximum location: X=-51.00, Y=-47.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.056047
SAR 1g (W/Kg)	0.076212

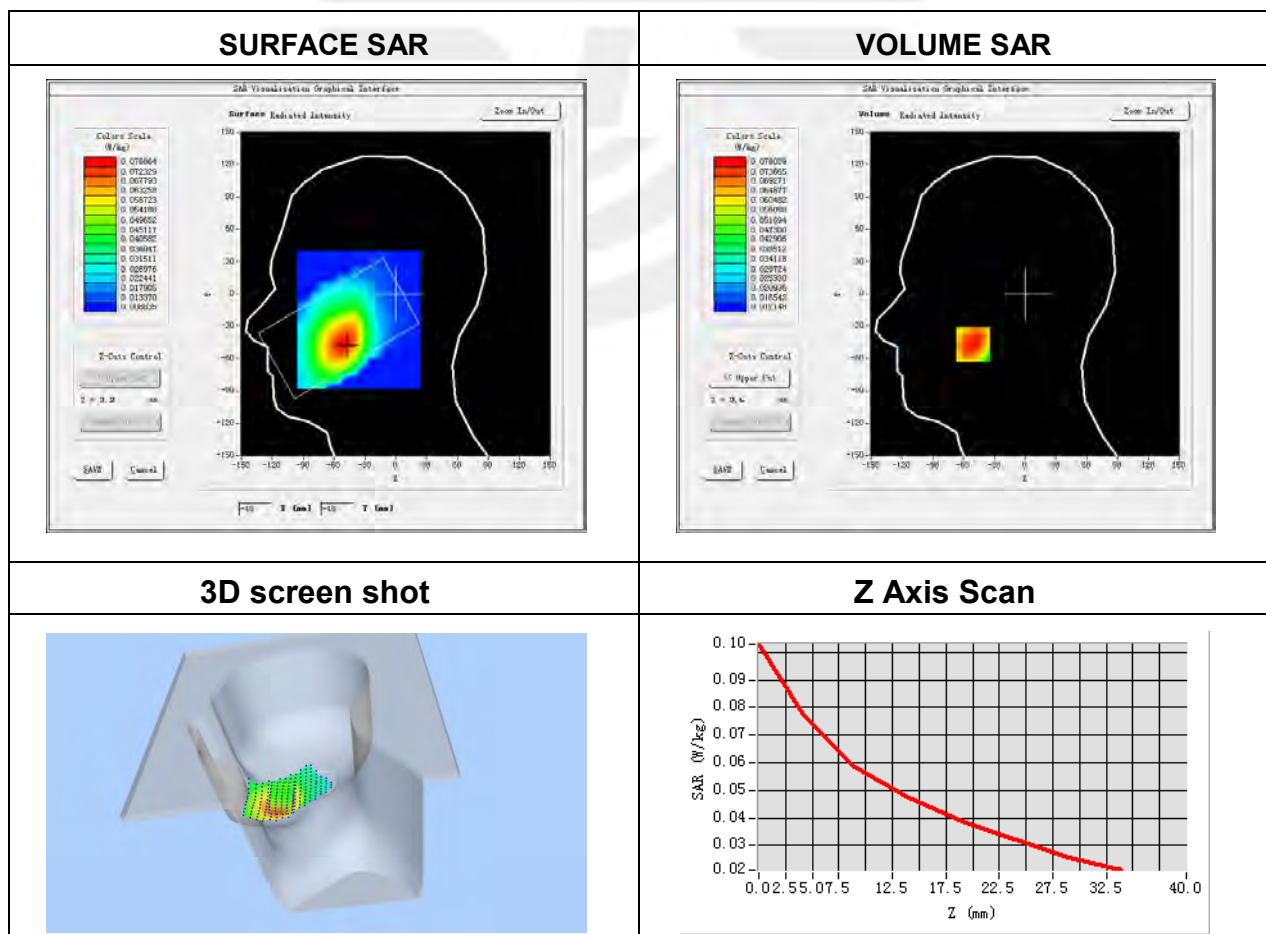


Plot 18: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 13(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782
Relative permittivity (real part)	42.07
Conductivity (S/m)	0.90

Maximum location: X=8.00, Y=40.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.084657
SAR 1g (W/Kg)	0.109246

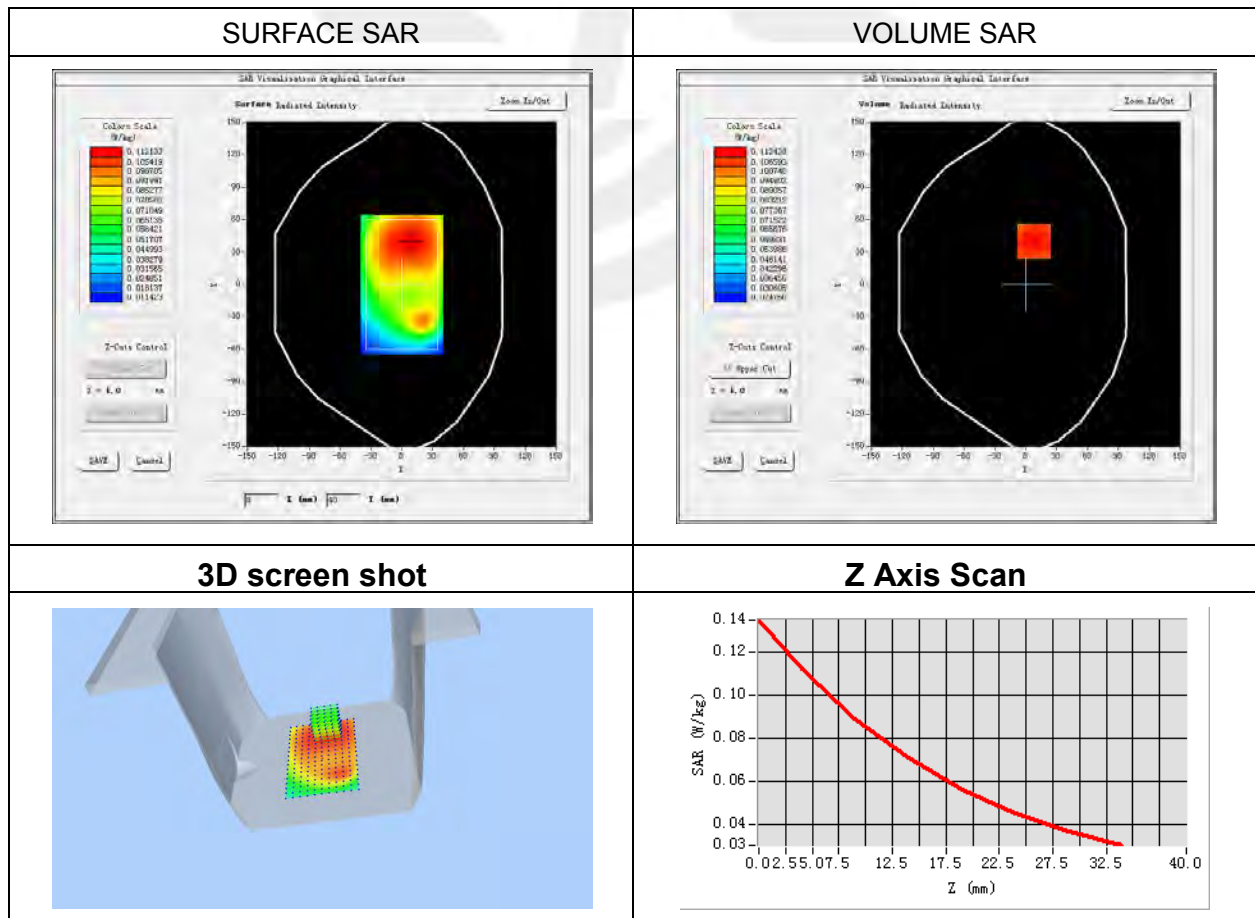


Plot 19: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 14(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	793
Relative permittivity (real part)	41.61
Conductivity (S/m)	0.87

Maximum location: X=-50.00, Y=-51.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.051930
SAR 1g (W/Kg)	0.069507

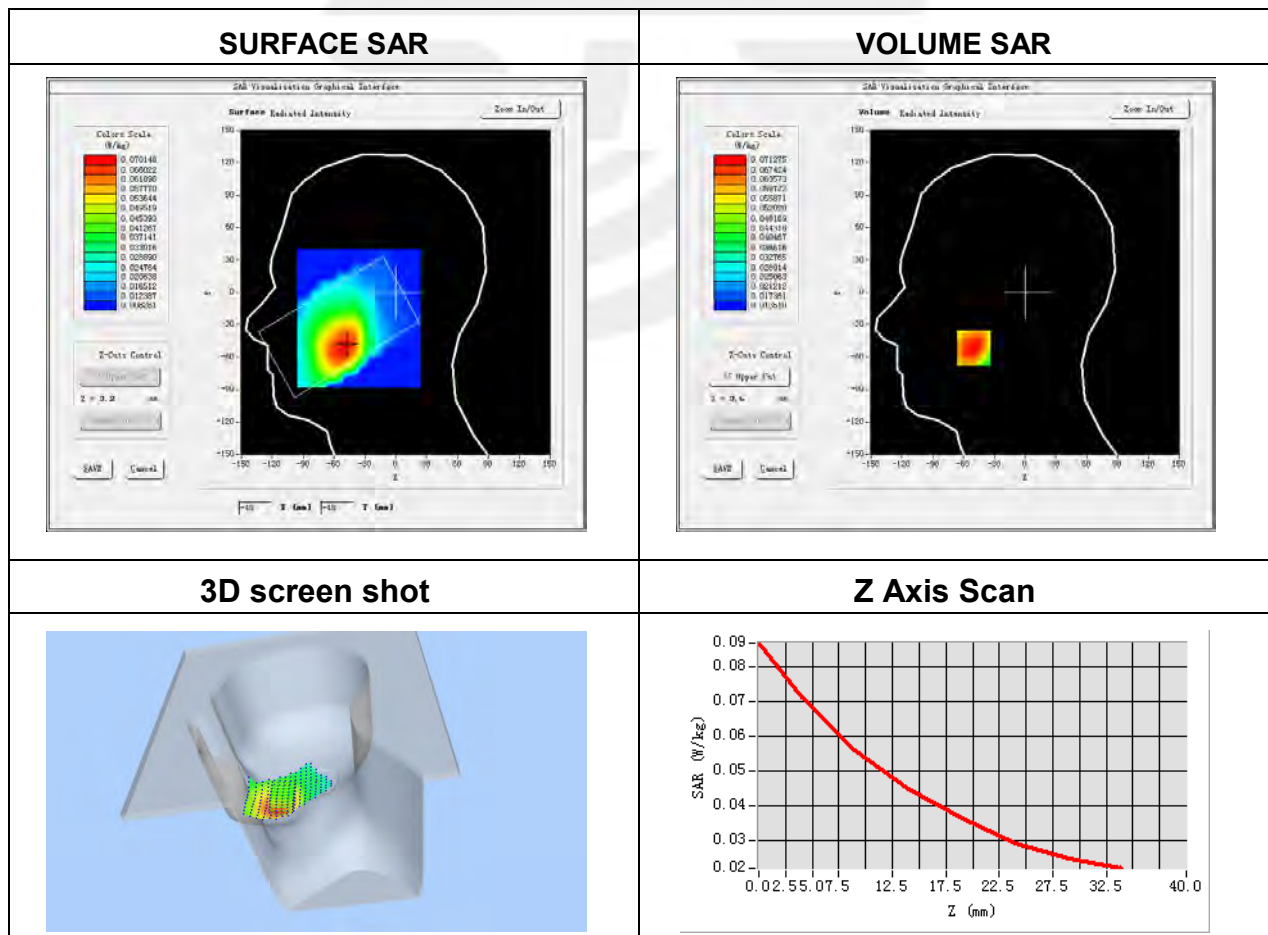


Plot 20: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 14(RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	793
Relative permittivity (real part)	41.61
Conductivity (S/m)	0.87

Maximum location: X=9.00, Y=48.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.085114
SAR 1g (W/Kg)	0.109915

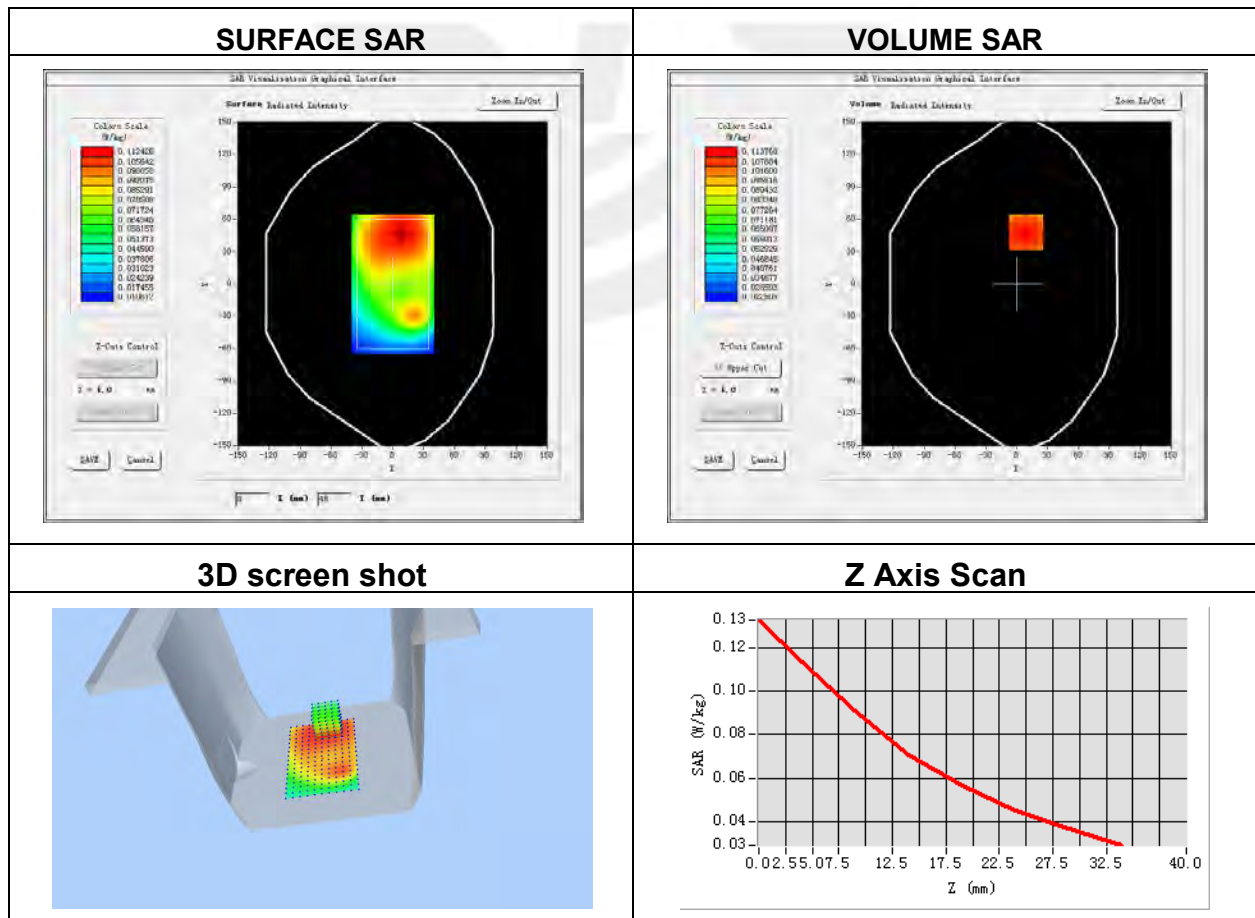


Plot 21: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	41.75
Conductivity (S/m)	0.90

Maximum location: X=-49.00, Y=-40.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.064840
SAR 1g (W/Kg)	0.089417

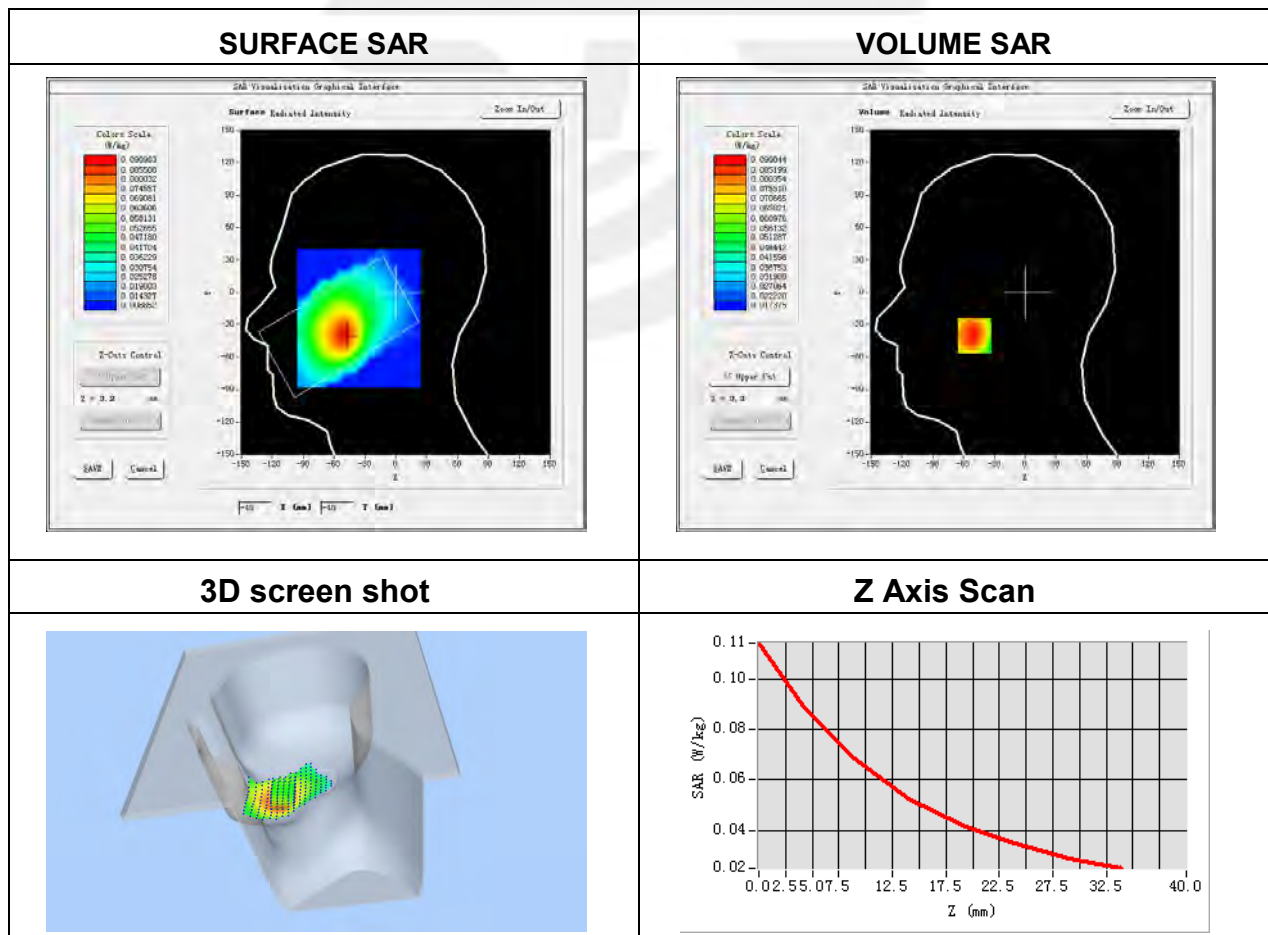





**Plot 22: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	41.75
Conductivity (S/m)	0.90

Maximum location: X=25.00, Y=-30.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.105248
SAR 1g (W/Kg)	0.186336

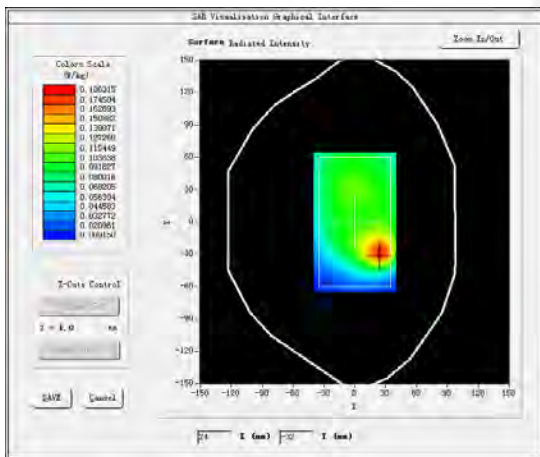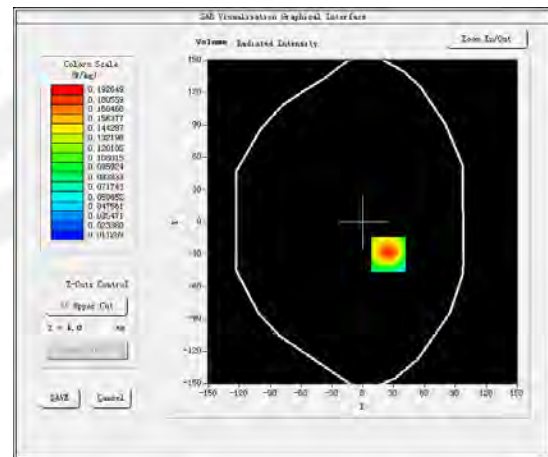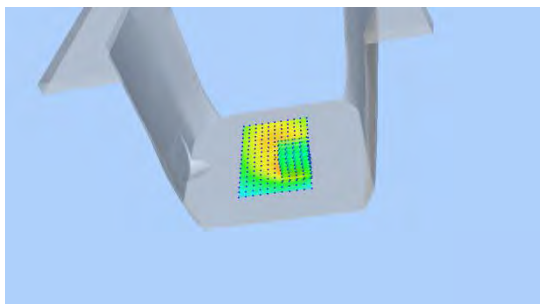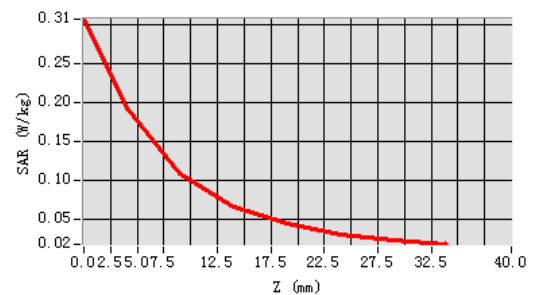SURFACE SAR**VOLUME SAR****3D screen shot****Z Axis Scan**


Plot 23: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 25RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1905
Relative permittivity (real part)	40.18
Conductivity (S/m)	1.37

Maximum location: X=-45.00, Y=-55.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.186746
SAR 1g (W/Kg)	0.322186

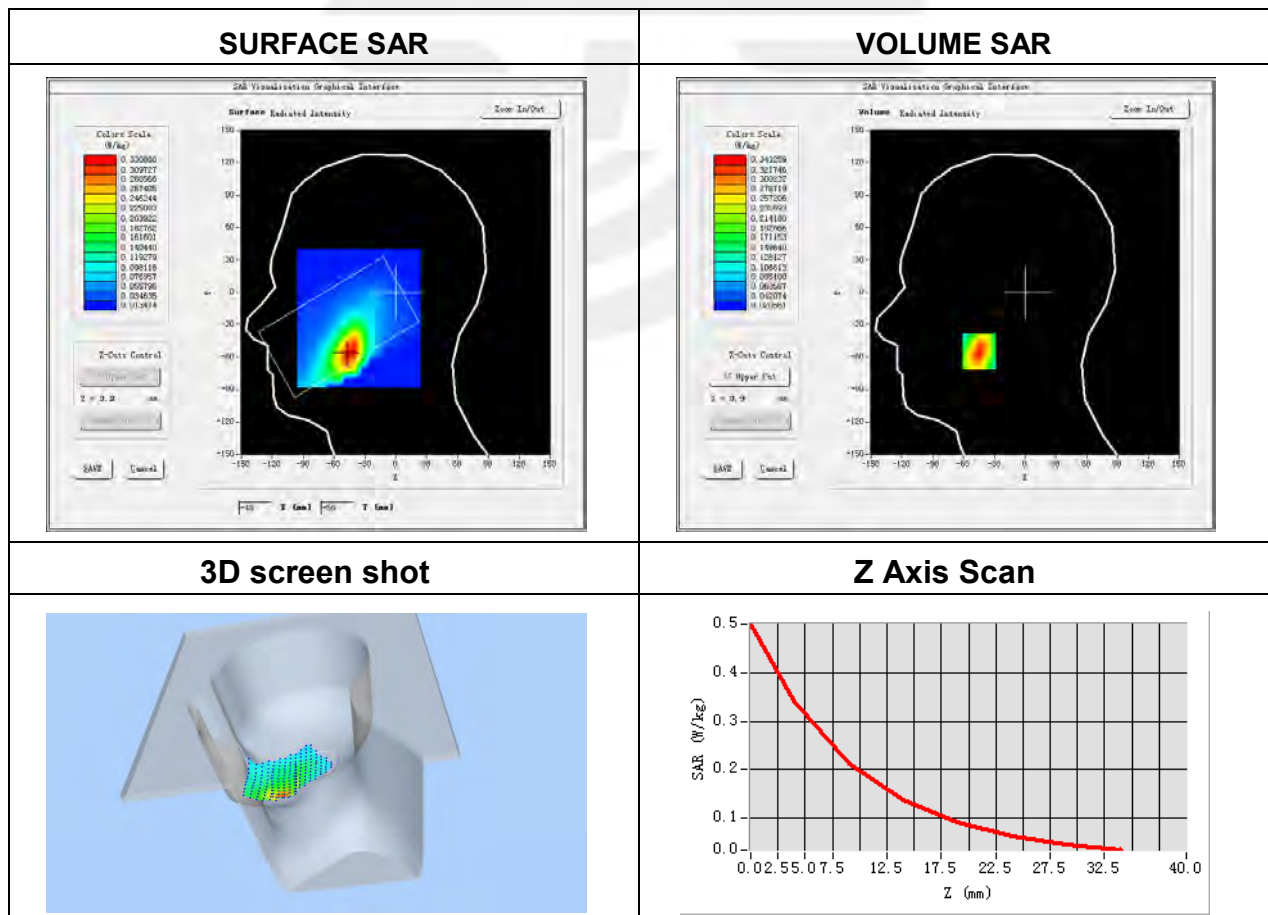





**Plot 24: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-22
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 25RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1905
Relative permittivity (real part)	40.18
Conductivity (S/m)	1.37

Maximum location: X=-22.00, Y=-31.00

SAR Peak: 1.84 W/kg

SAR 10g (W/Kg)	0.651305
SAR 1g (W/Kg)	1.159297

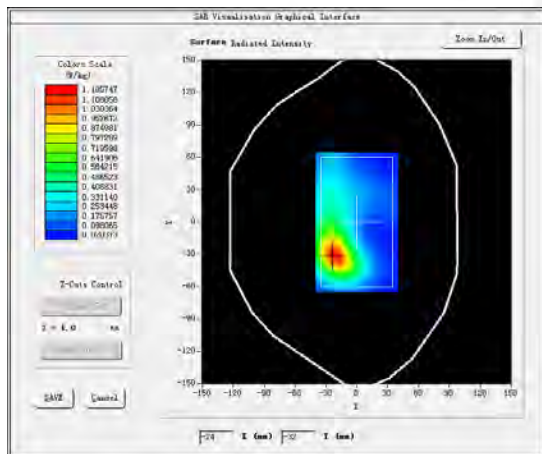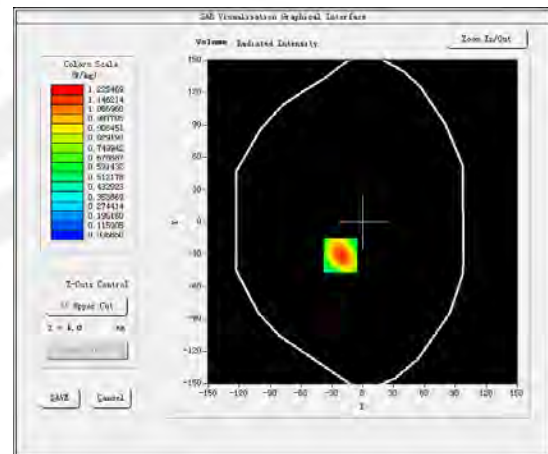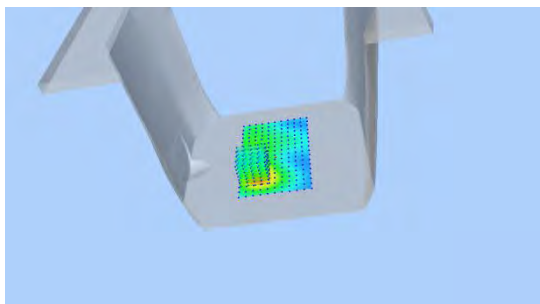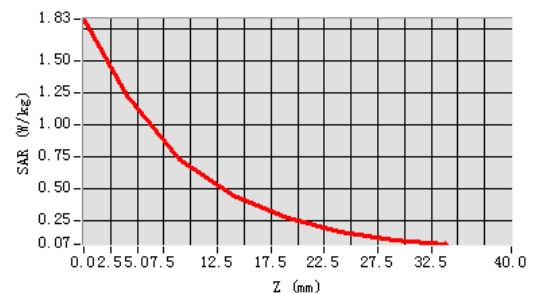SURFACE SAR**VOLUME SAR****3D screen shot****Z Axis Scan**



Plot 25: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-17
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	41.67
Conductivity (S/m)	0.90

Maximum location: X=-49.00, Y=-32.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.077561
SAR 1g (W/Kg)	0.106257

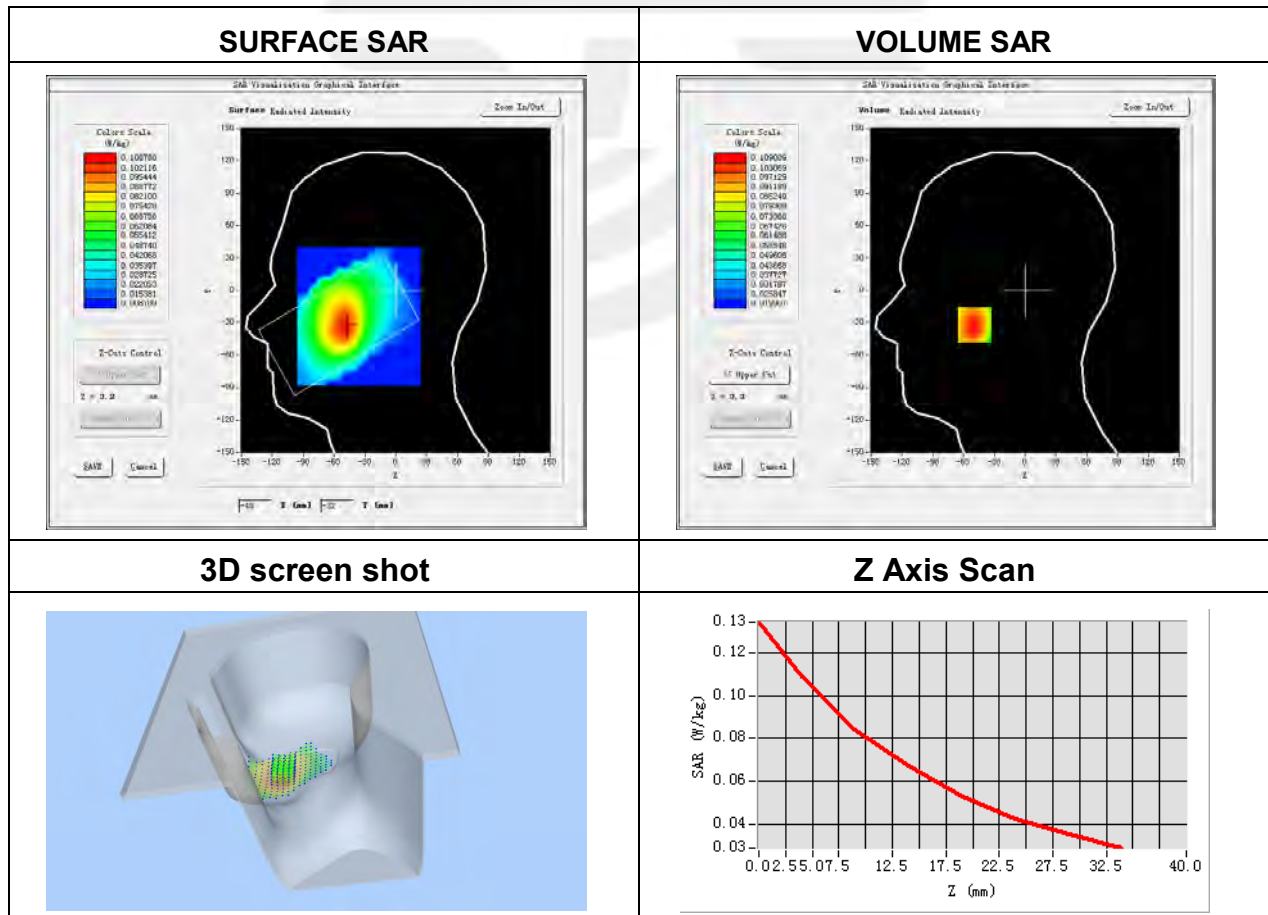



Plot 26: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-17
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	41.67
Conductivity (S/m)	0.90

Maximum location: X=23.00, Y=-31.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.127025
SAR 1g (W/Kg)	0.226475

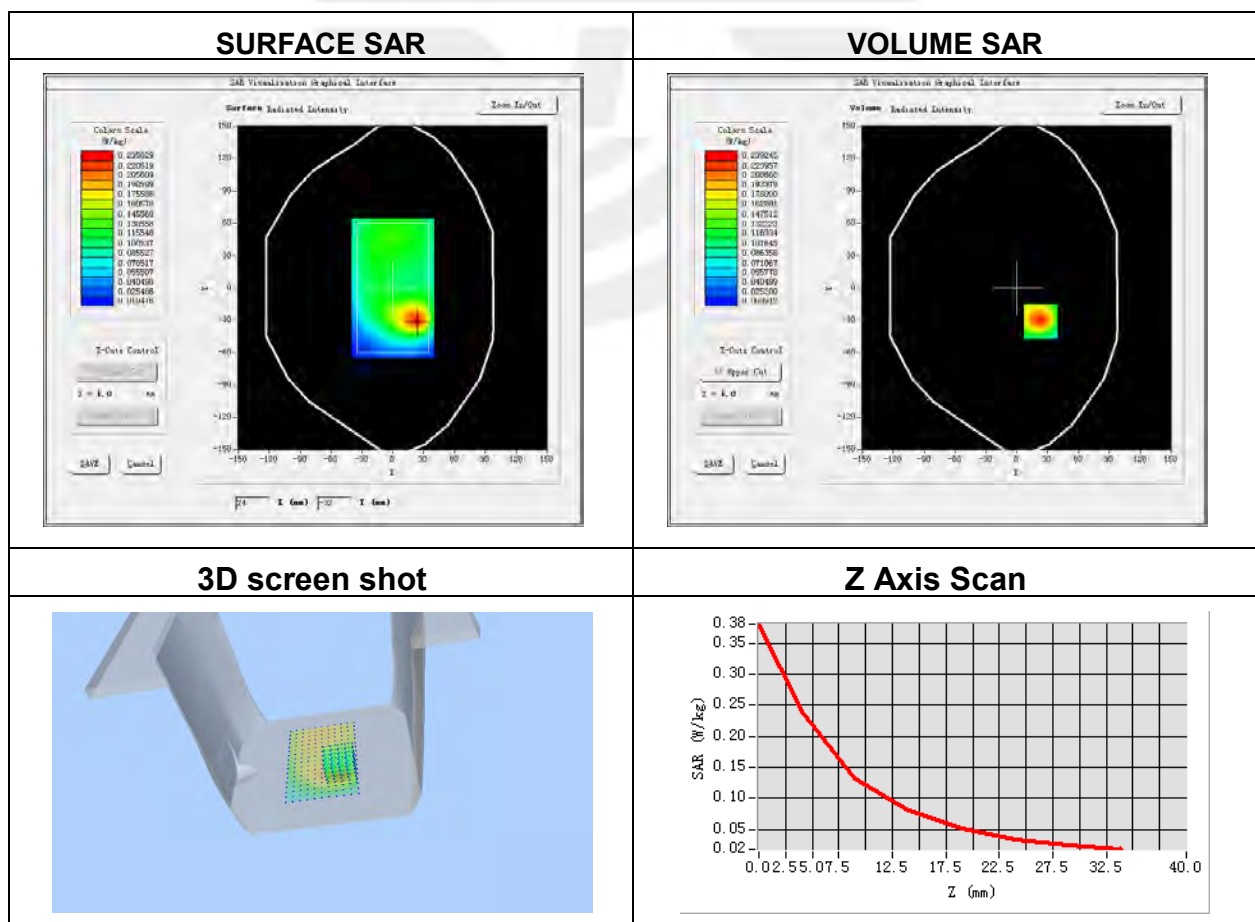


Plot 27: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-29
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2680
Relative permittivity (real part)	38.08
Conductivity (S/m)	2.04

Maximum location: X=-41.00, Y=-51.00

SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.028734
SAR 1g (W/Kg)	0.044732

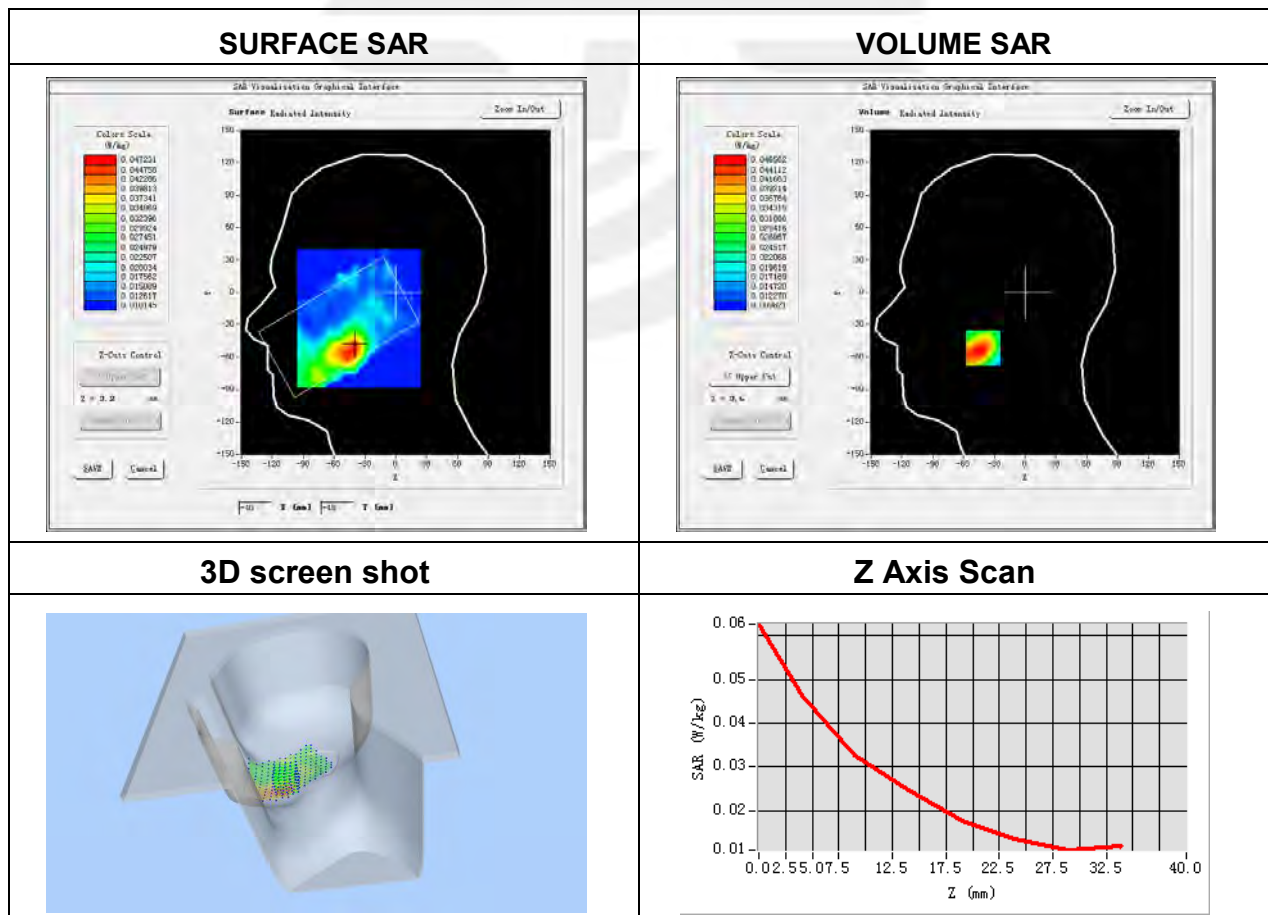





**Plot 28: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-29
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2680
Relative permittivity (real part)	38.08
Conductivity (S/m)	2.04

Maximum location: X=-17.00, Y=-32.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.084552
SAR 1g (W/Kg)	0.154383

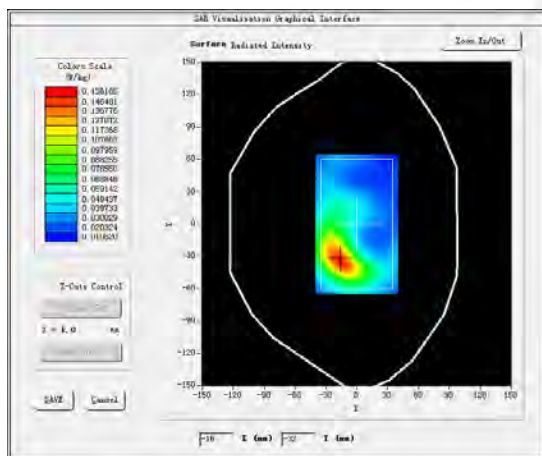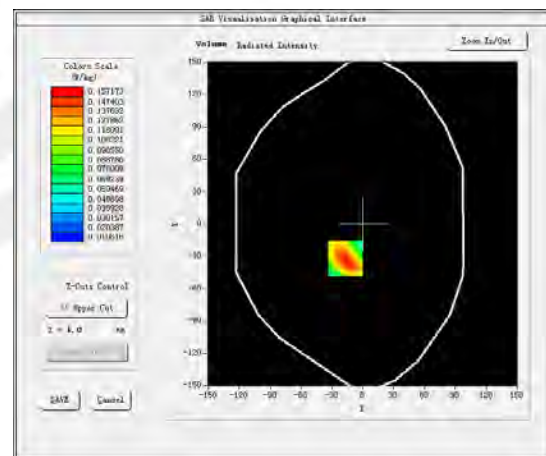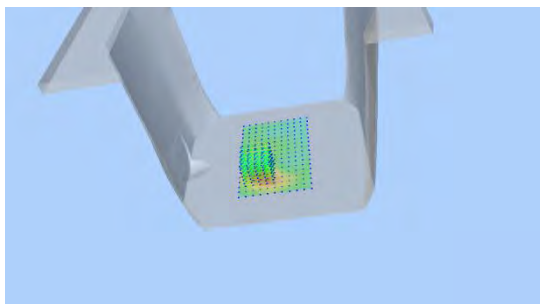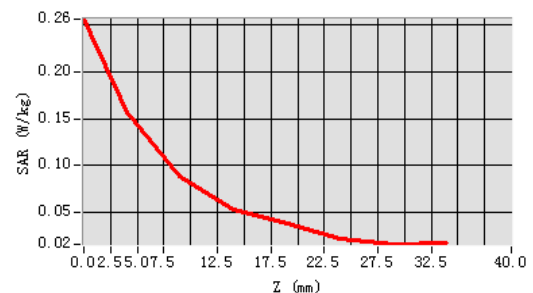SURFACE SAR**VOLUME SAR****3D screen shot****Z Axis Scan**



Plot 29: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-21
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.47
Conductivity (S/m)	1.37

Maximum location: X=-57.00, Y=-72.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.088853
SAR 1g (W/Kg)	0.148963

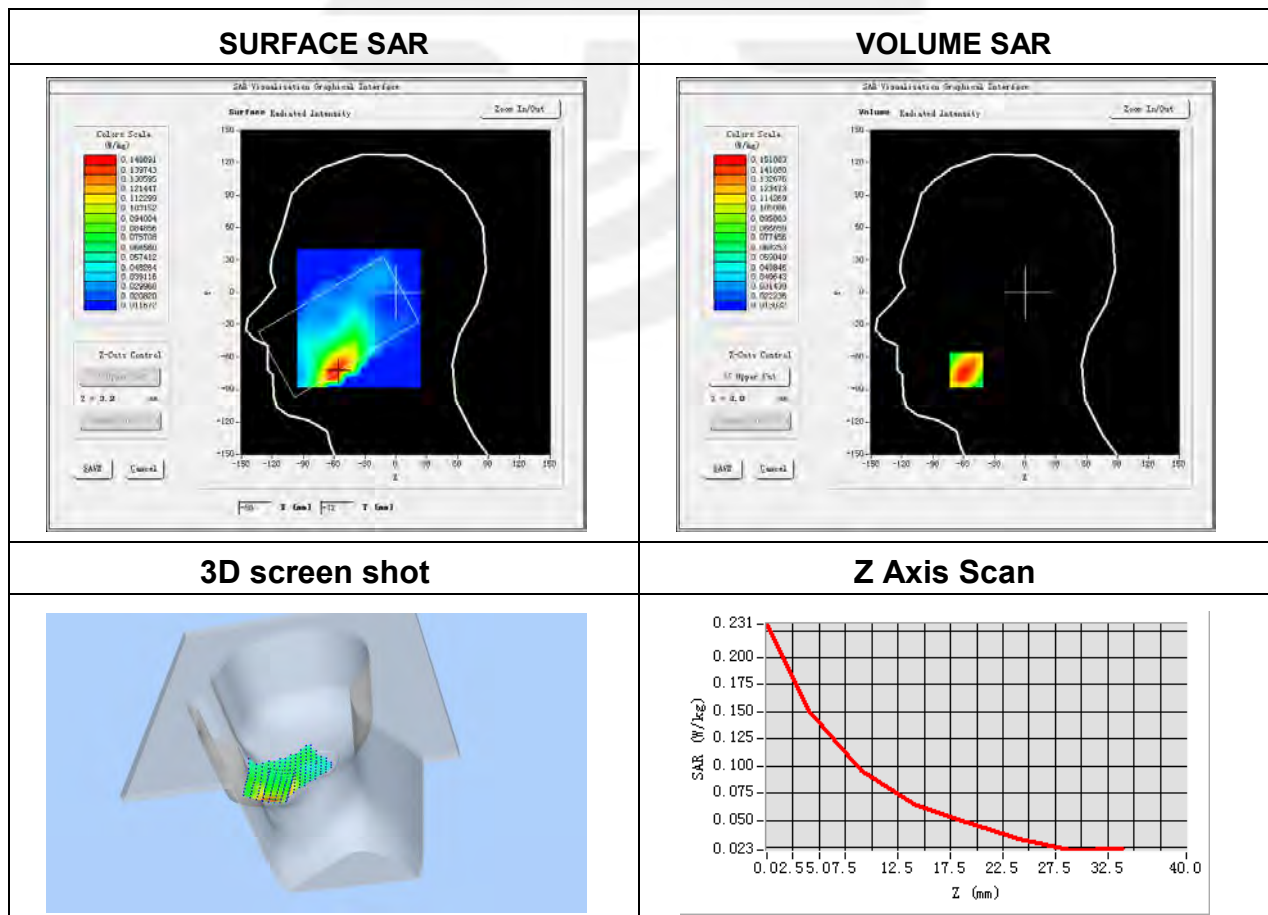



Plot 30: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-21
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1770
Relative permittivity (real part)	40.47
Conductivity (S/m)	1.37

Maximum location: X=-25.00, Y=-32.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.257120
SAR 1g (W/Kg)	0.455310

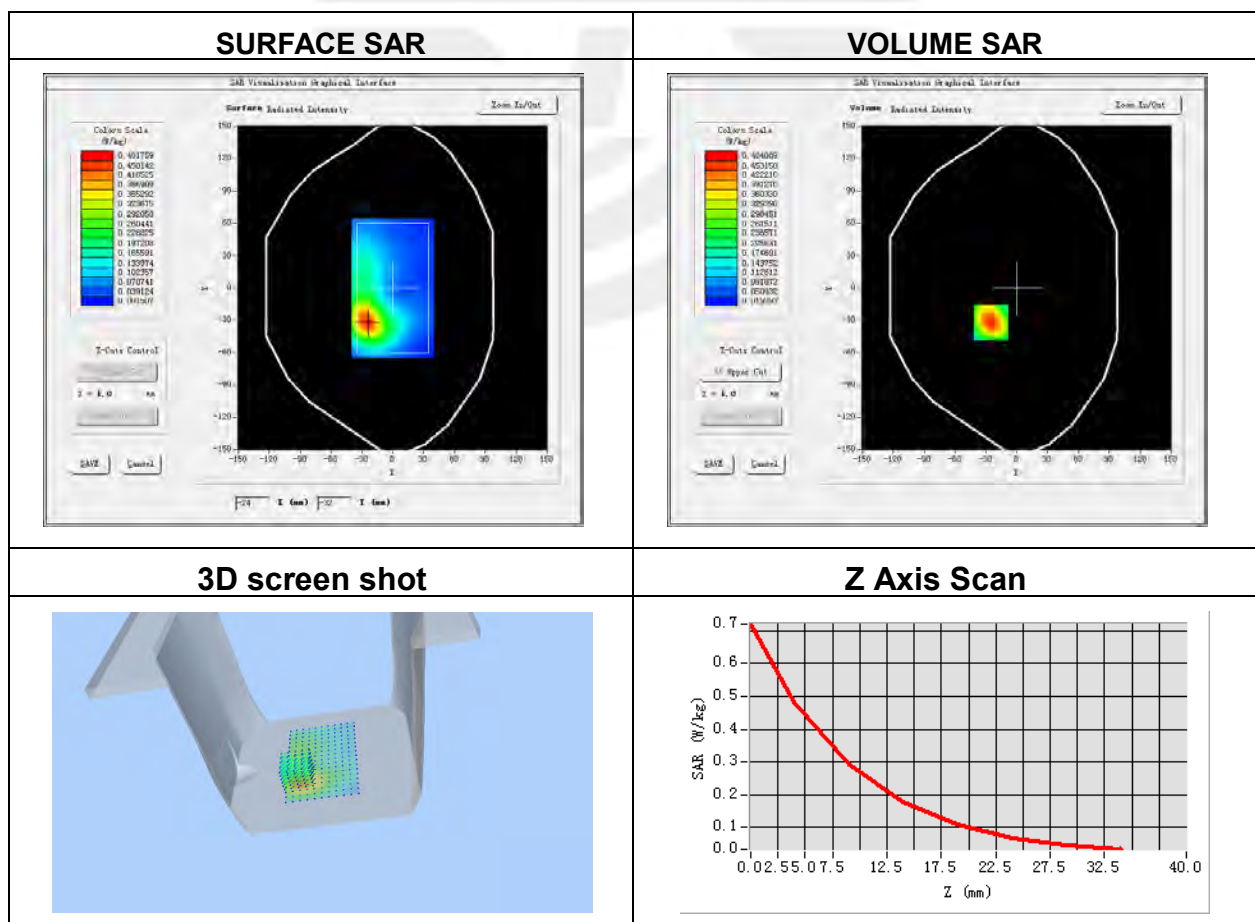


Plot 31: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 71 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	688
Relative permittivity (real part)	43.10
Conductivity (S/m)	0.88

Maximum location: X=-49.00, Y=-47.00

SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.041396
SAR 1g (W/Kg)	0.052349

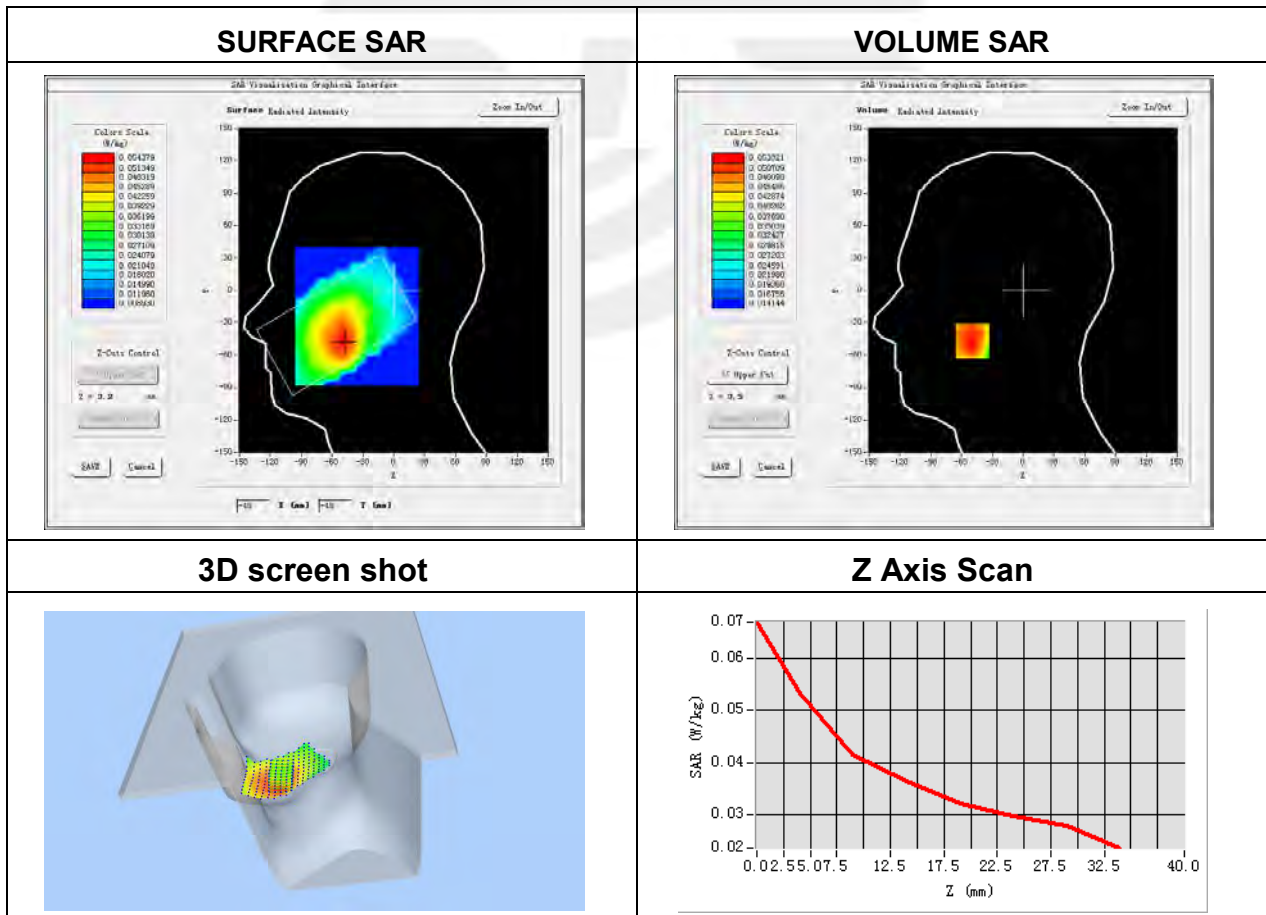





**Plot 32: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 71 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	688
Relative permittivity (real part)	43.10
Conductivity (S/m)	0.88

Maximum location: X=16.00, Y=23.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.061604
SAR 1g (W/Kg)	0.078688

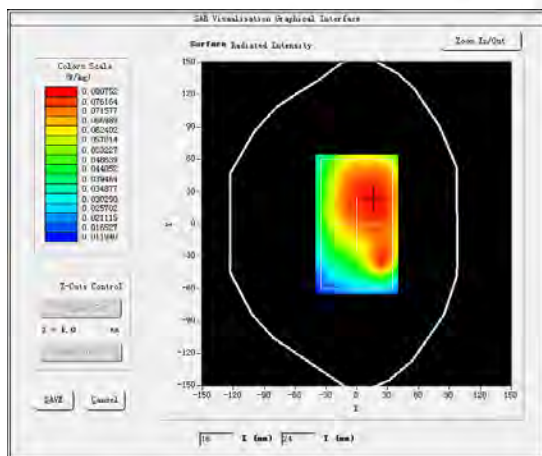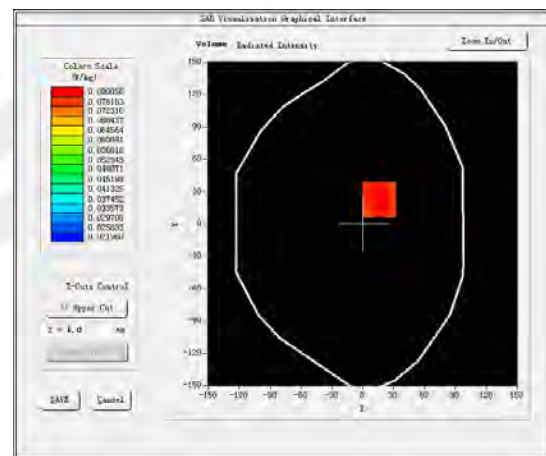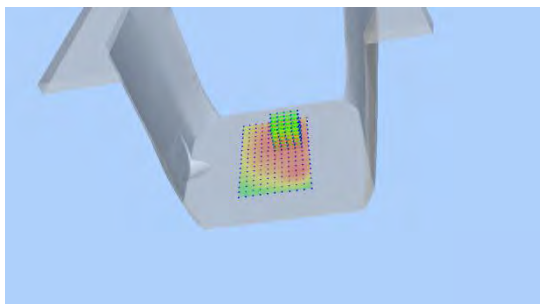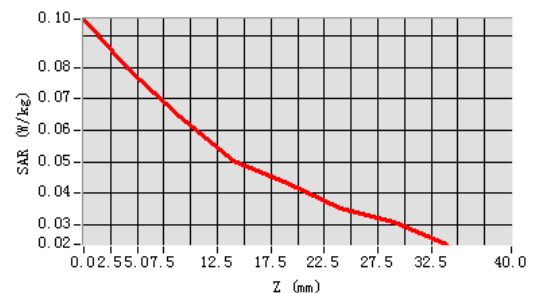SURFACE SAR**VOLUME SAR****3D screen shot****Z Axis Scan**






Plot 33: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Tilt
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	38.16
Conductivity (S/m)	1.82

Maximum location: X=-17.00, Y=-3.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.052353
SAR 1g (W/Kg)	0.104581

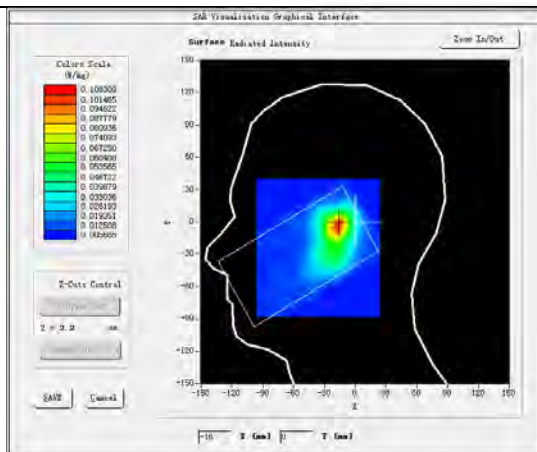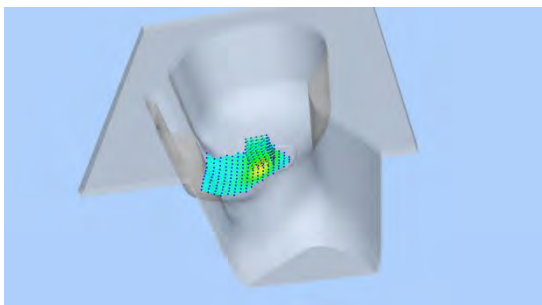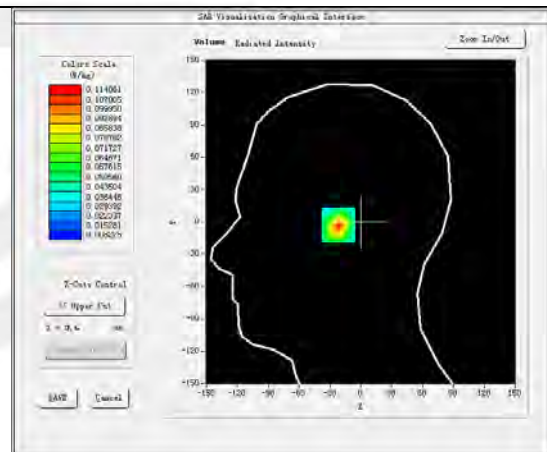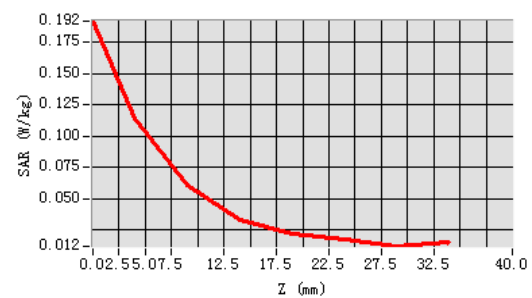SURFACE SAR

3D

VOLUME SAR

Z Axis Scan


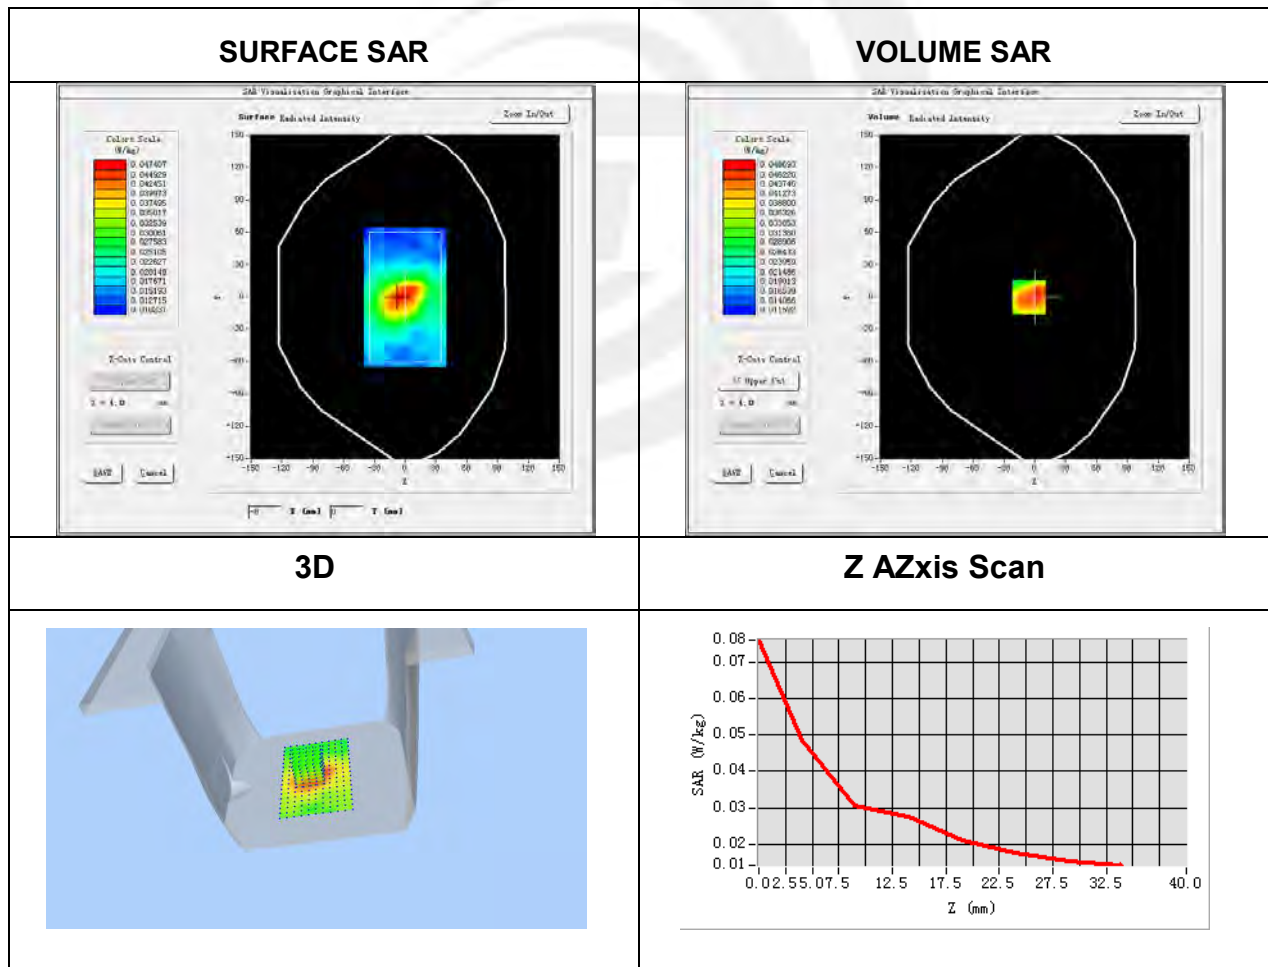
Plot 34: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-28
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	38.16
Conductivity (S/m)	1.82

Maximum location: X=-6.00, Y=0.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.032206
SAR 1g (W/Kg)	0.048157







**Plot 35: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-03-28
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Cheek
Band	Tilt
Signal	GFSK (Crest factor: 1.0)
Frequency (MHz)	2402
Relative permittivity (real part)	40.31
Conductivity (S/m)	1.78

Maximum location: X=-14.00, Y=15.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.017051
SAR 1g (W/Kg)	0.026494

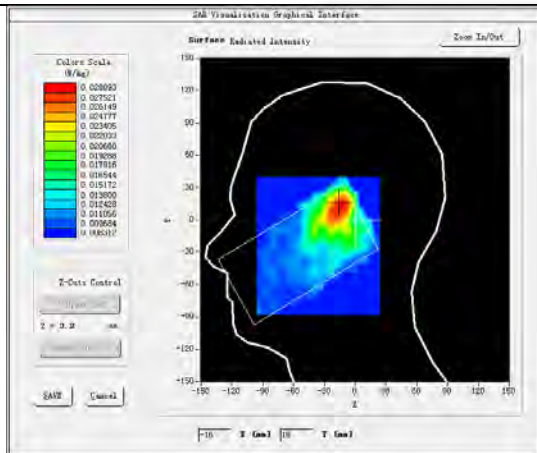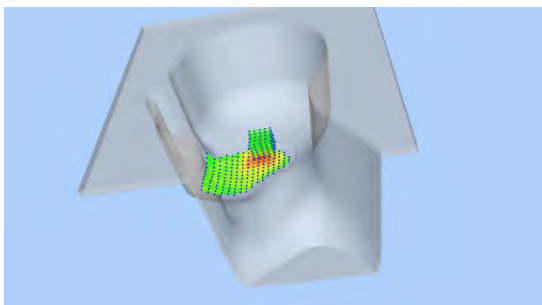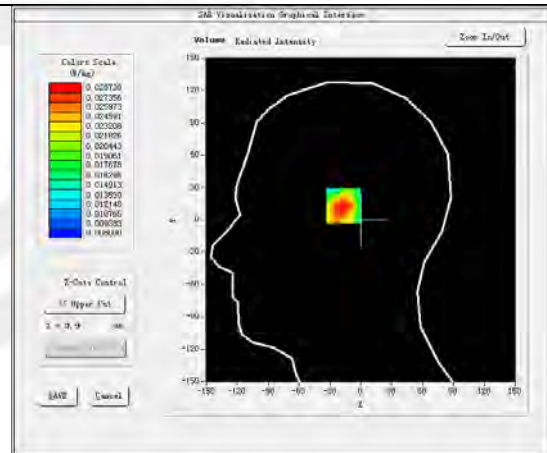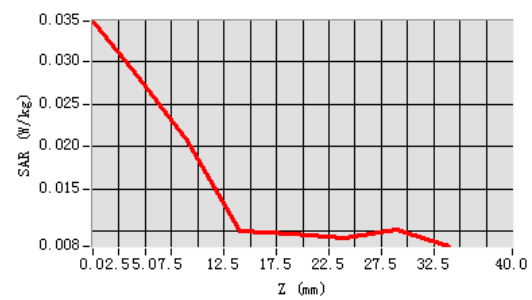SURFACE SAR**3D****VOLUME SAR****Z Axis Scan**


Plot 36: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-03-28
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	BT
Signal	GFSK (Crest factor: 1.0)
Frequency (MHz)	2402
Relative permittivity (real part)	40.31
Conductivity (S/m)	1.78

Maximum location: X=16.00, Y=6.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.013012
SAR 1g (W/Kg)	0.018707

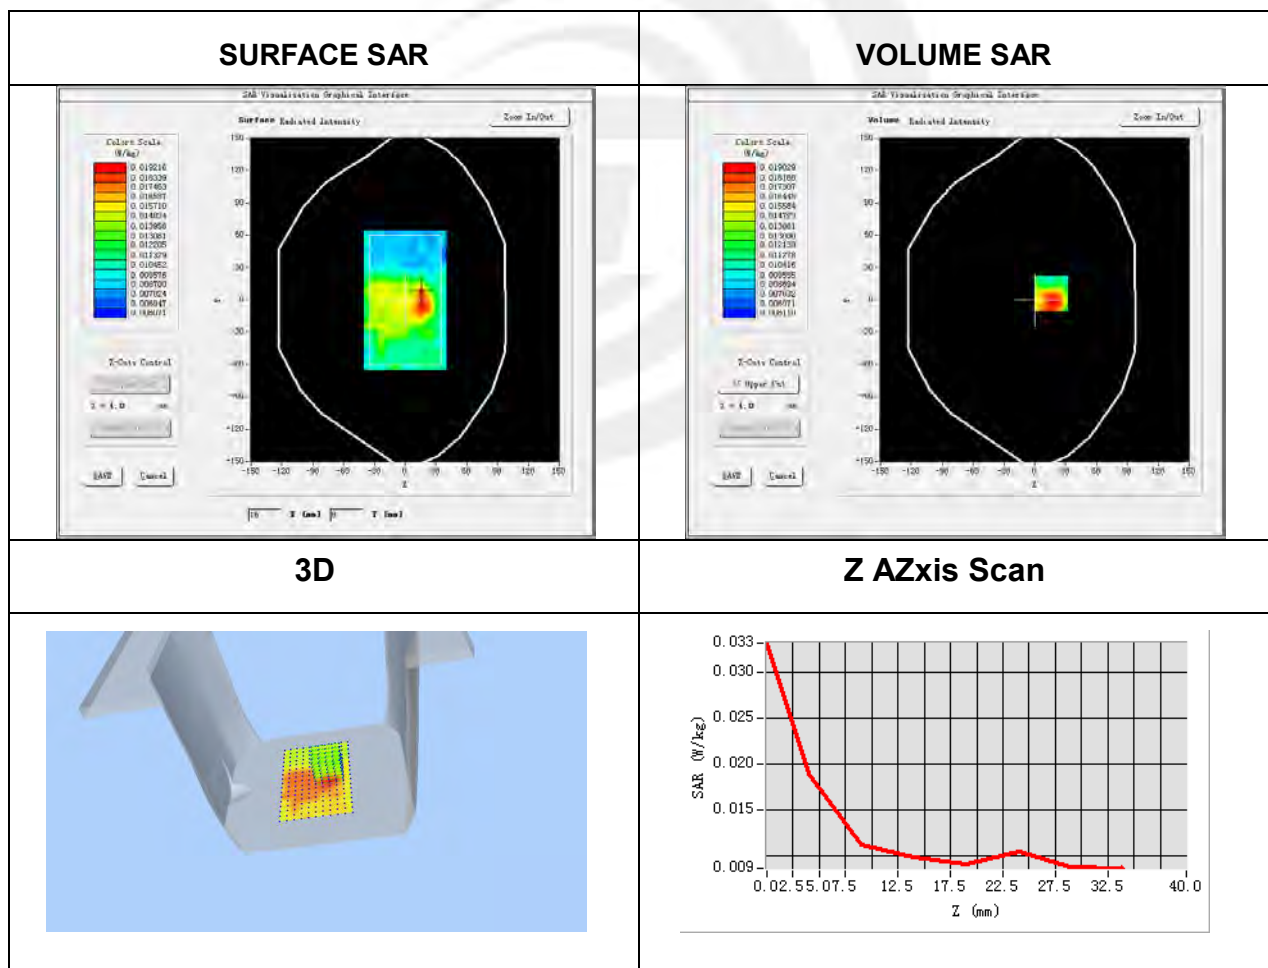






Plot 37: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-04-06
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Tilt
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.12
Conductivity (S/m)	4.64

Maximum location: X=-15.00, Y=2.00

SAR Peak: 1.42 W/kg

SAR 10g (W/Kg)	0.165872
SAR 1g (W/Kg)	0.512194

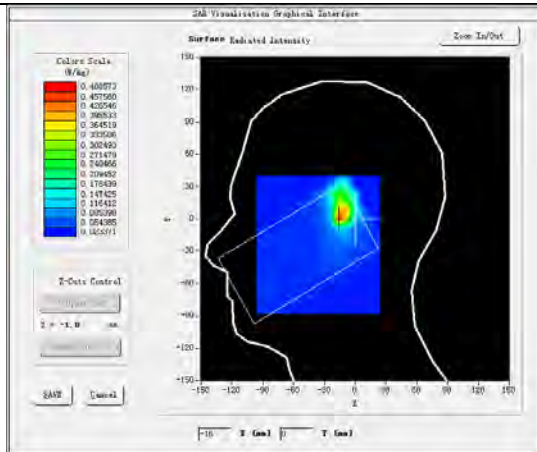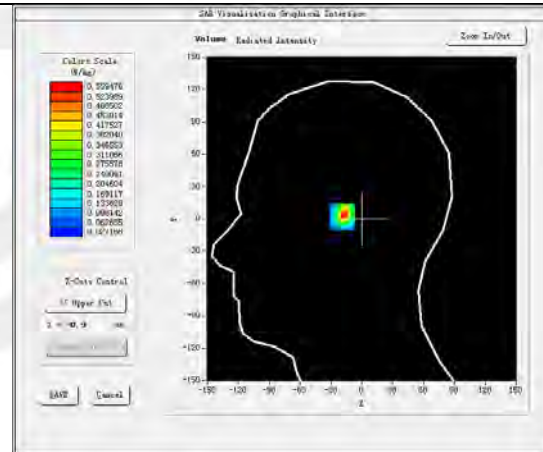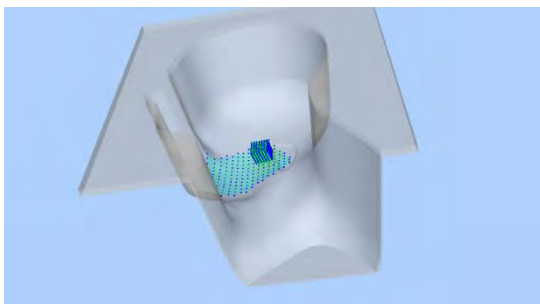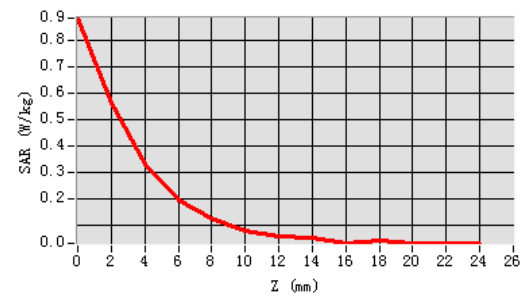SURFACE SAR

VOLUME SAR

3D

Z Axis Scan


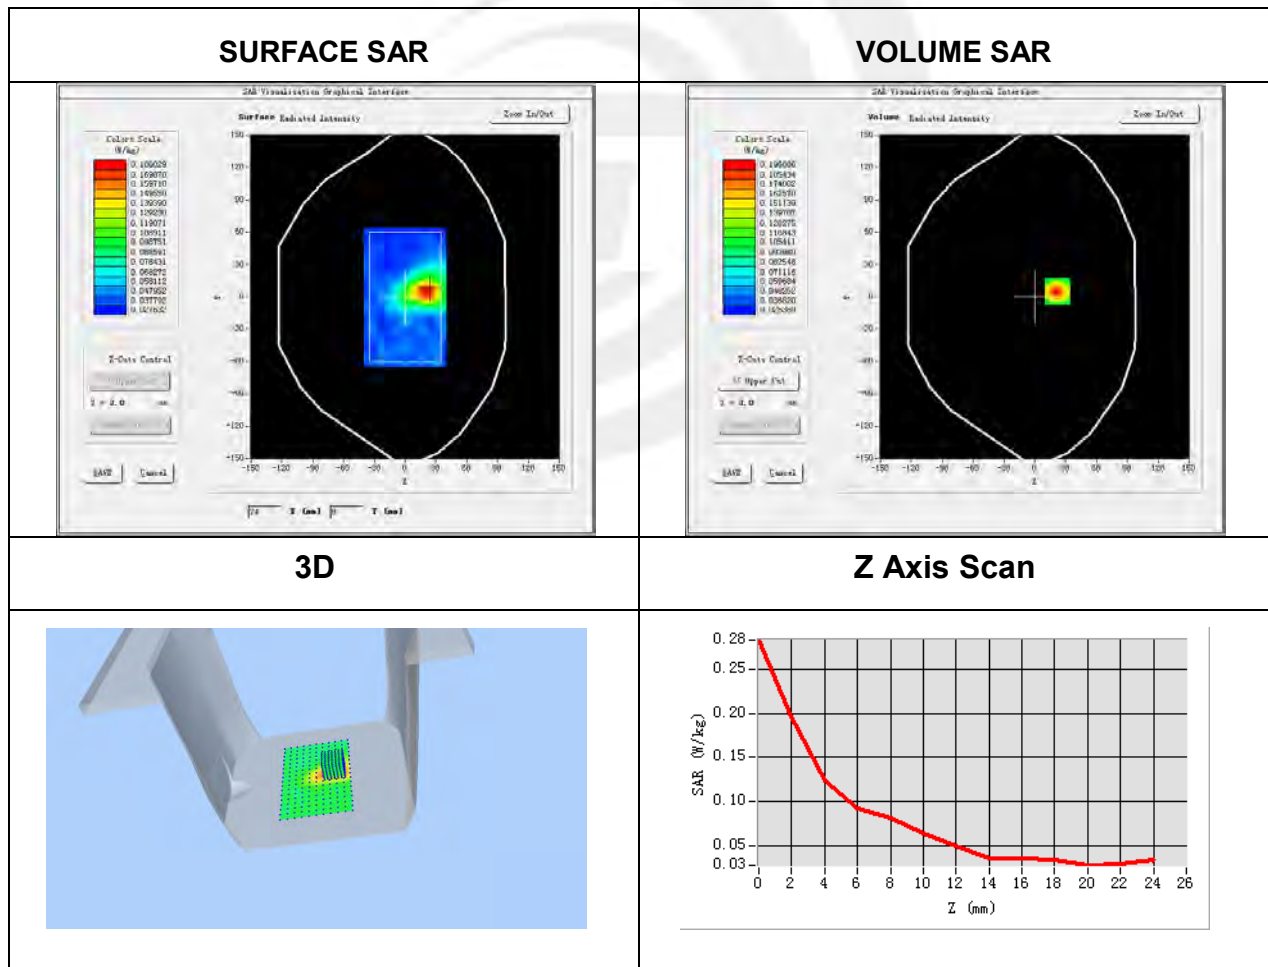
Plot 38: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-04-06
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.12
Conductivity (S/m)	4.64

Maximum location: X=22.00, Y=5.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.070776
SAR 1g (W/Kg)	0.131951







**Plot 39: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone**

Test Date	2022-04-07
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Tilt
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	35.66
Conductivity (S/m)	4.72

Maximum location: X=-14.00, Y=6.00

SAR Peak: 1.33 W/kg

SAR 10g (W/Kg)	0.159256
SAR 1g (W/Kg)	0.487364

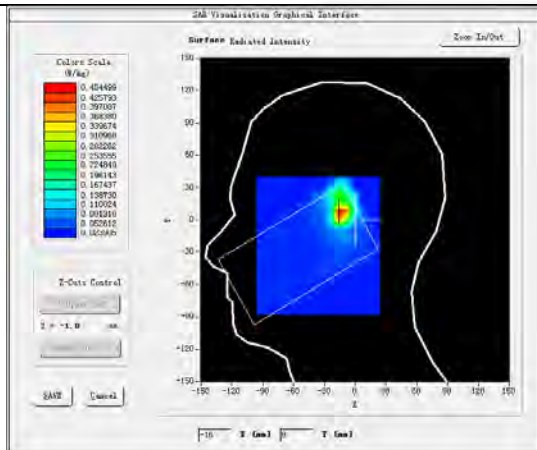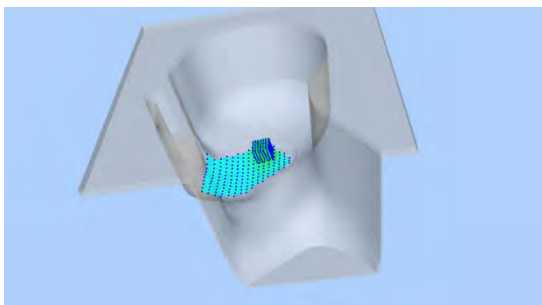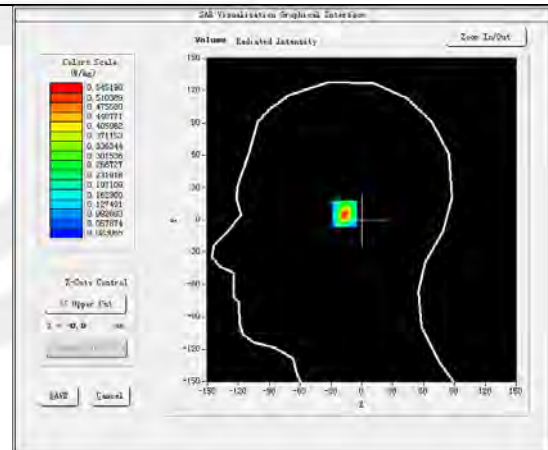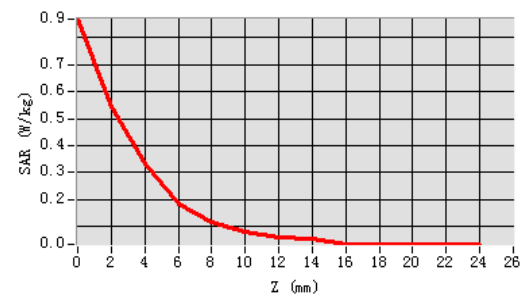SURFACE SAR**3D****VOLUME SAR****Z Axis Scan**


Plot 40: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-04-07
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	35.66
Conductivity (S/m)	4.72

Maximum location: X=17.00, Y=24.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.060692
SAR 1g (W/Kg)	0.103529

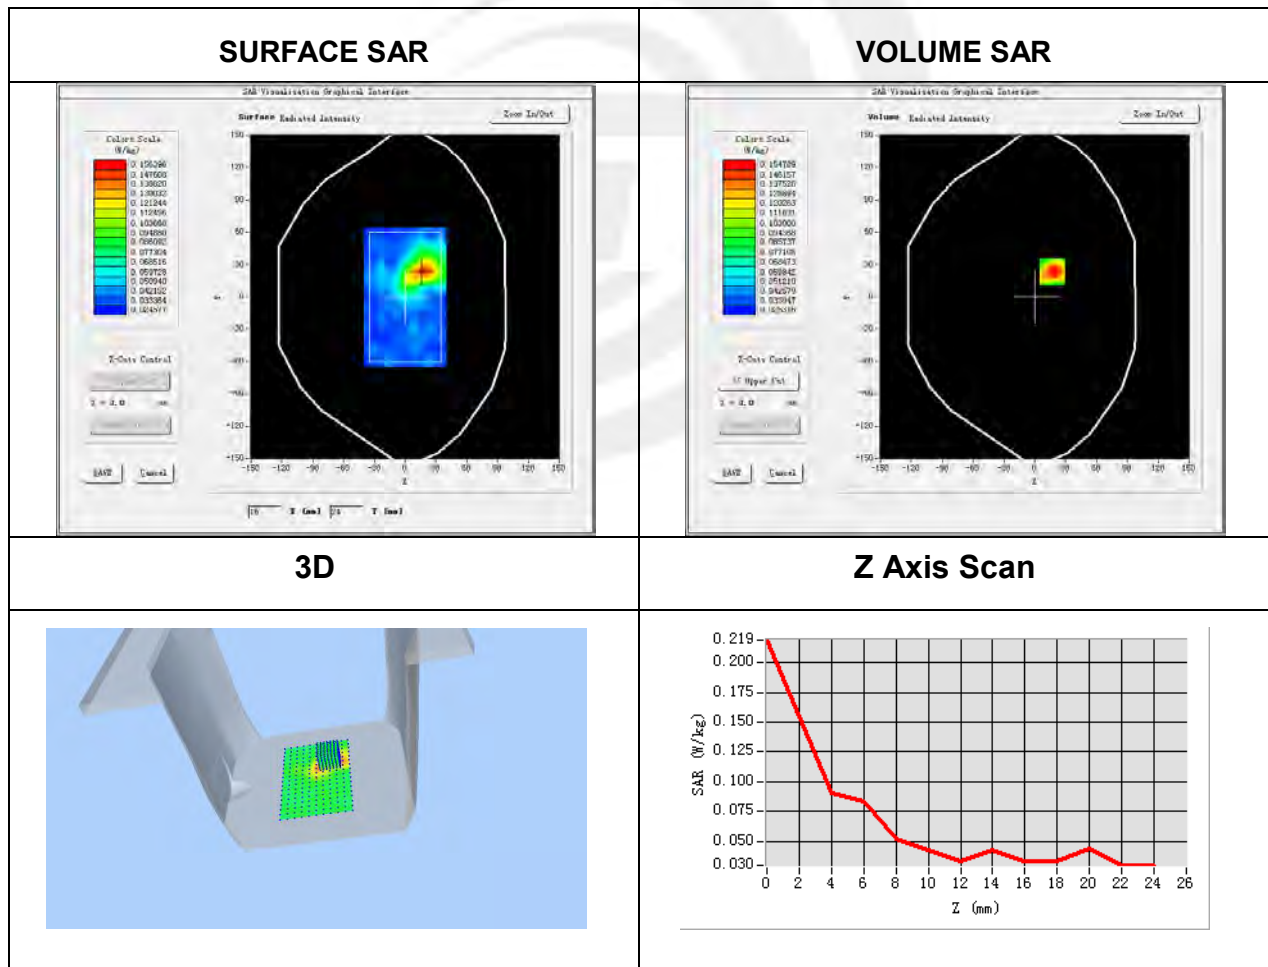






Plot 41: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-04-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Tilt
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	36.31
Conductivity (S/m)	5.18

Maximum location: X=-16.00, Y=7.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.107402
SAR 1g (W/Kg)	0.271166

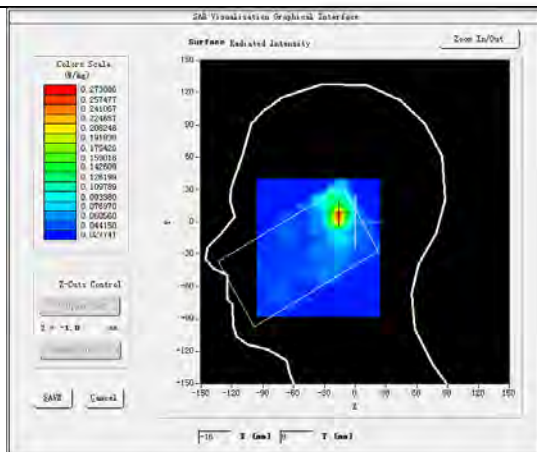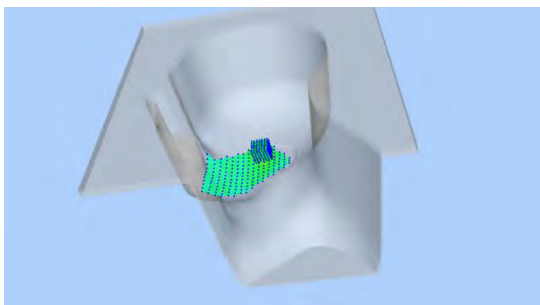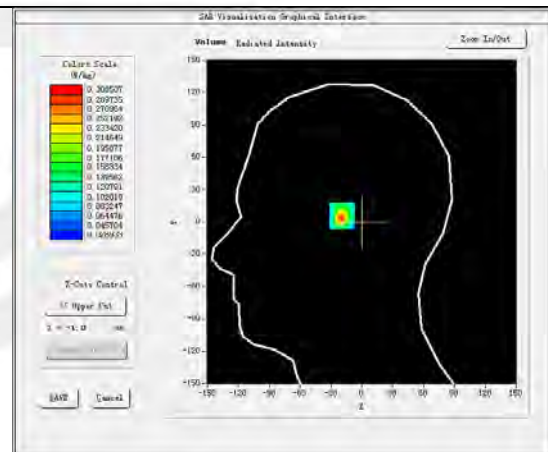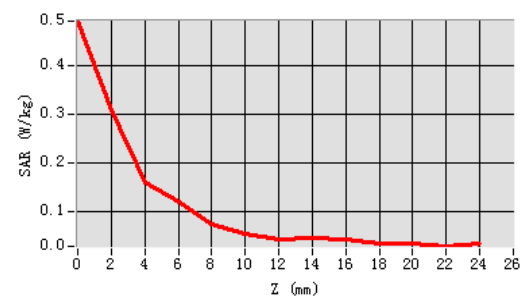SURFACE SAR

3D

VOLUME SAR

Z Axis Scan


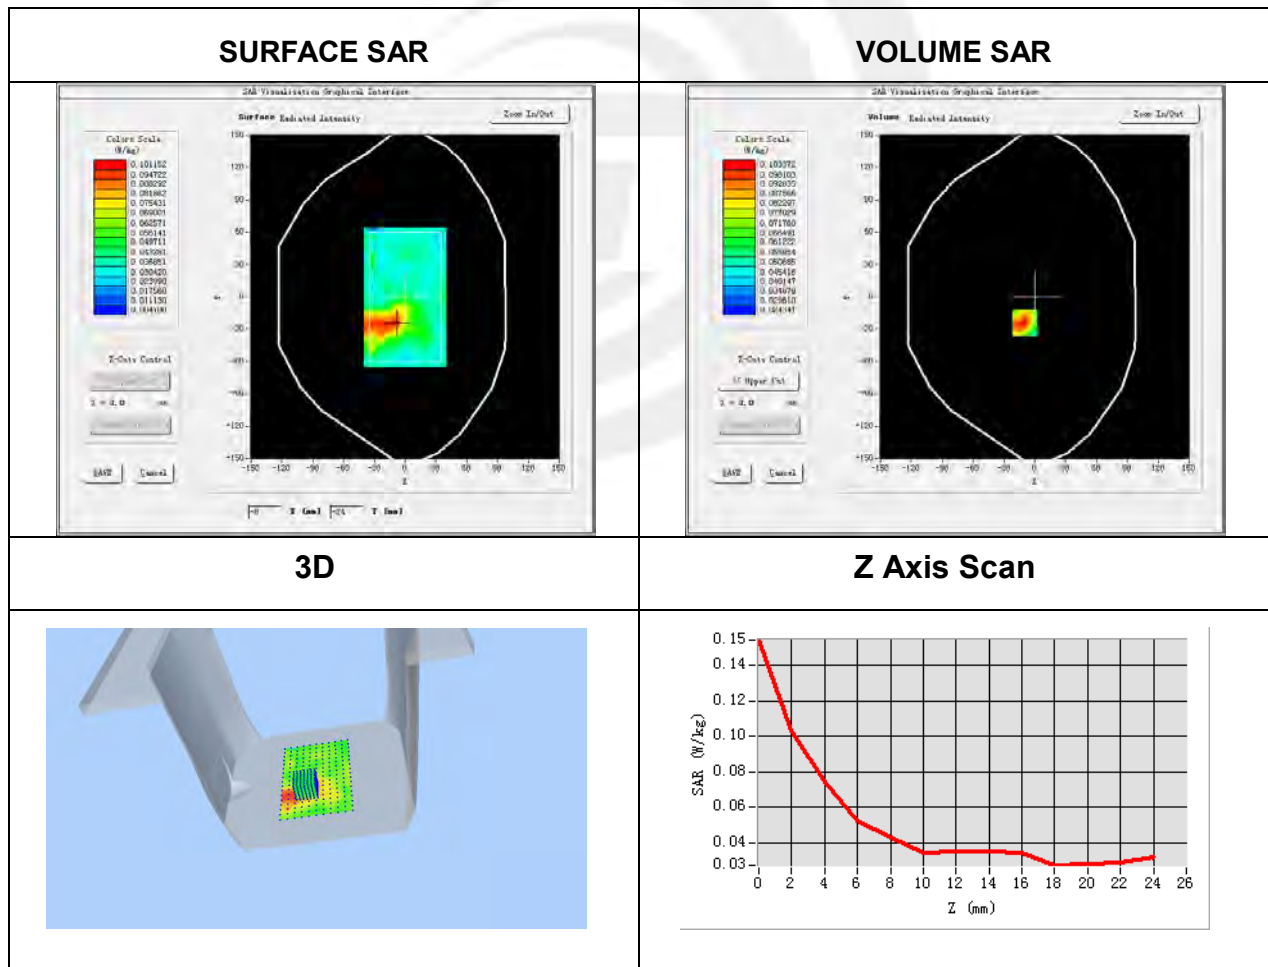

Plot 42: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-04-08
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	36.31
Conductivity (S/m)	5.18

Maximum location: X=-10.00, Y=-24.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.047821
SAR 1g (W/Kg)	0.073069





Plot 43: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-06-15
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Right Tilt
Device Position	Tilt
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5775
Relative permittivity (real part)	34.37
Conductivity (S/m)	5.22

Maximum location: X=-14.00, Y=15.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.092992
SAR 1g (W/Kg)	0.212382

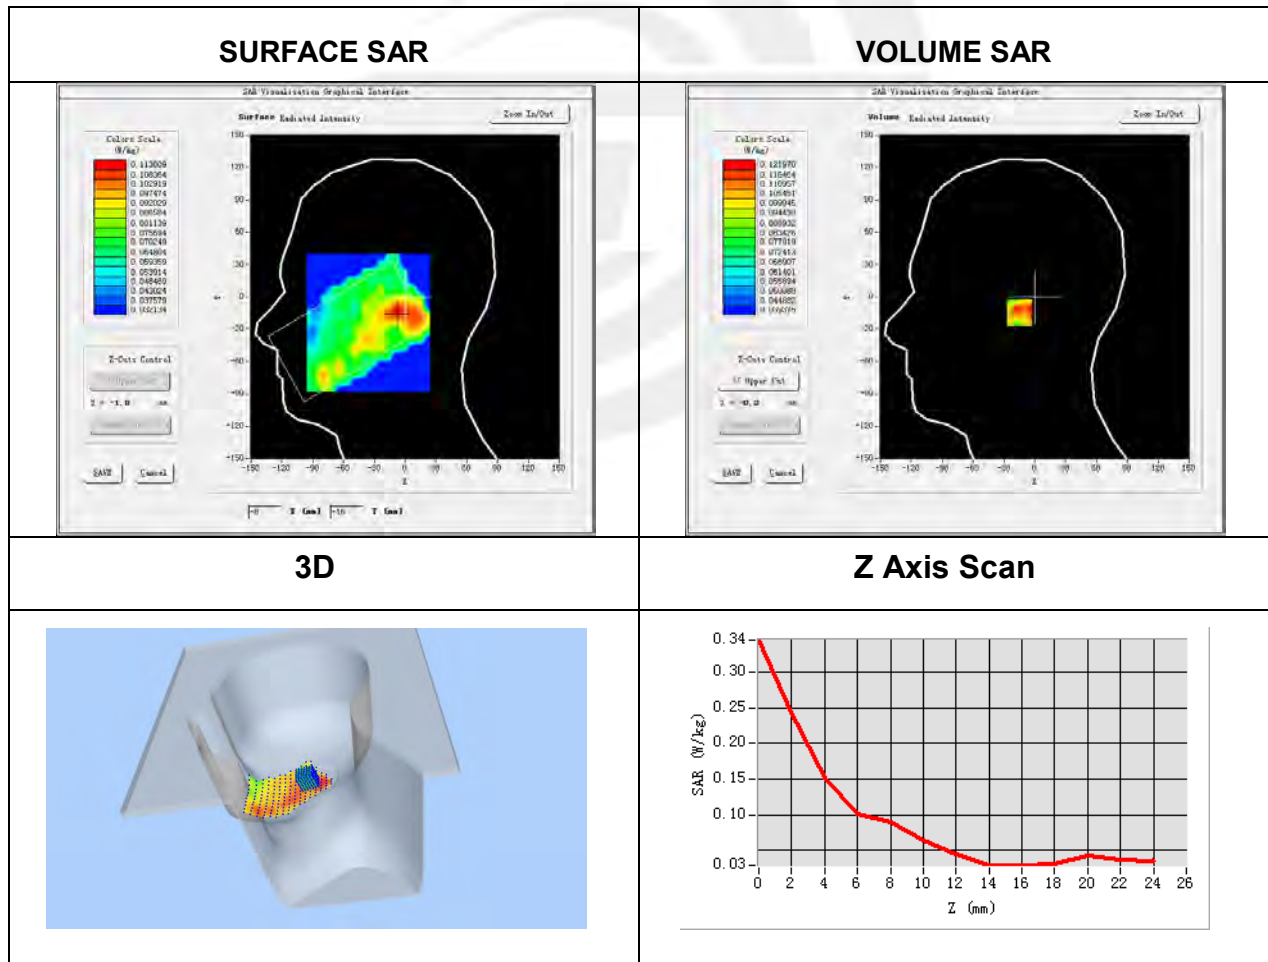


Plot 44: DUT: Pixavi Thermal/Pixavi Phone; EUT Model: Pixavi Thermal/Phone

Test Date	2022-06-15
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5775
Relative permittivity (real part)	34.37
Conductivity (S/m)	5.22

Maximum location: X=32.00, Y=15.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.052047
SAR 1g (W/Kg)	0.082707

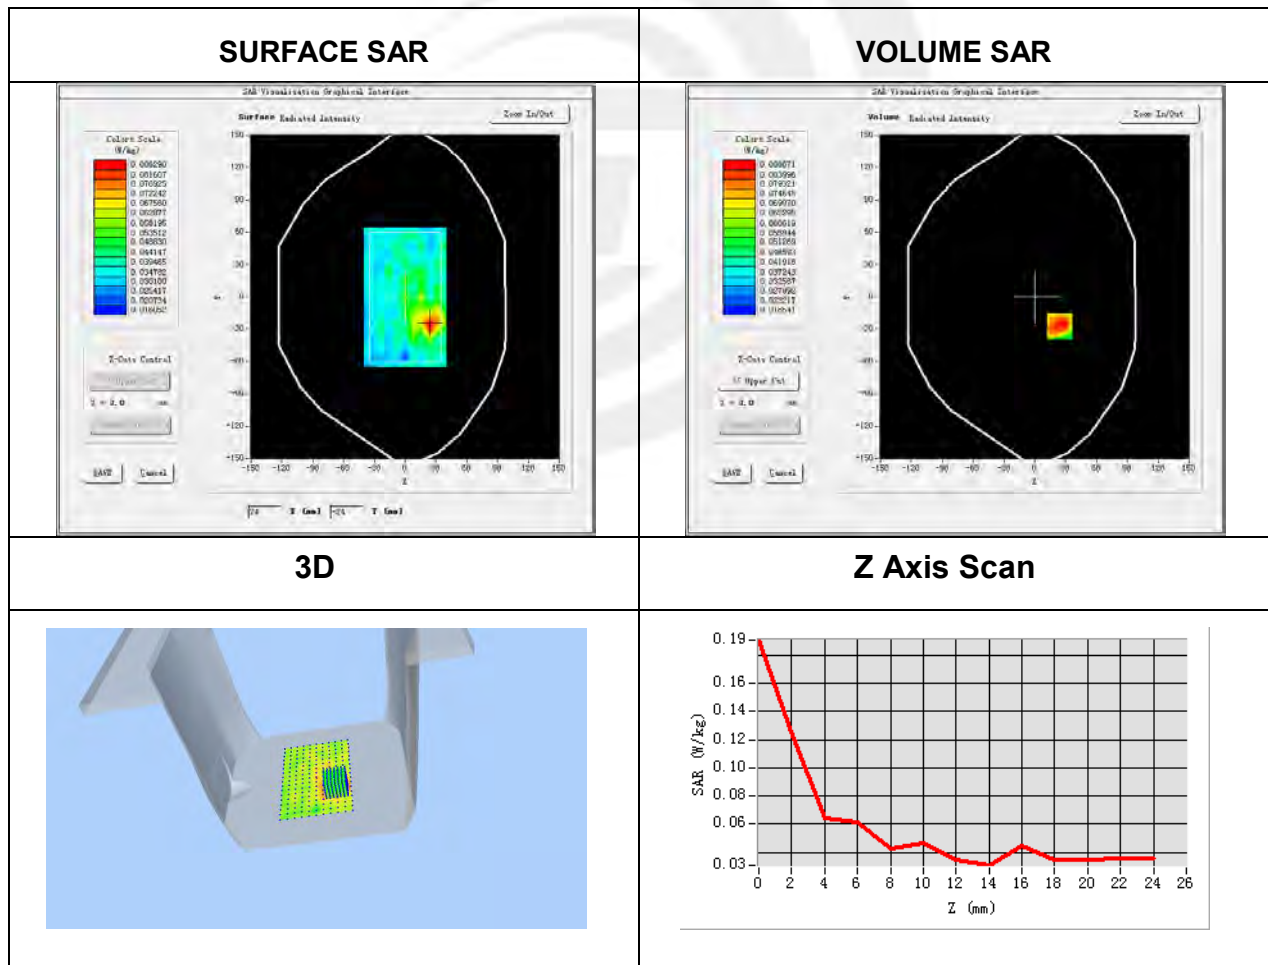



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※

