



FCC TEST REPORT

For

GCteq Wireless (Shenzhen) Co., Ltd.

Multifunctional POP-UP charger with magnetic wireless charging

Test Model: GF-18PRO-38V

Prepared for : GCteq Wireless (Shenzhen) Co., Ltd.
Address : No. A402, Floor 4, Suojia Science parkComplex Sanwei
Community, HangchengStreet, Bao'an, District, Shenzhen City,
Guangdong Province, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 11, 2024
Number of tested samples : 2
Sample No. : A240130035-1(Engineer sample), A240130035-2(Normal sample)
Serial number : Prototype
Date of Test : April 11, 2024 ~ May 7, 2024
Date of Report : May 8, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT
FCC CFR 47 PART 15C****Report Reference No.** : **LCSA04104101EA****Date Of Issue** : April 22, 2024**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.****Address** : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,
Baoan District, Shenzhen, China**Testing Location/ Procedure** : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : **GCteq Wireless (Shenzhen) Co., Ltd.****Address** : No. A402, Floor 4, Suojia Science parkComplex Sanwei
Community, HangchengStreet, Bao'an, District, Shenzhen City,
Guangdong Province, China**Test Specification****Standard** : FCC CFR 47 PART 15C**Test Report Form No.**..... : LCSEMC-1.0**TRF Originator**..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**Master TRF**..... : Dated 2011-03**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Multifunctional POP-UP charger with magnetic wireless charging****Trade Mark** : GCteq**Test Model**..... : GF-18PRO-38V**Power Supply** : Input: DC 24-36V 3-2A
Wireless output: 15W Max
Type-C output: 20W Max
USB -A output: 18W Max**Result** : **Positive****Compiled by:**

Jerry Chu/Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**FCC TEST REPORT**

Test Report No. : LCSA04104101EA	<u>April 22, 2024</u> Date of issue
--	--

Test Model.....	: GF-18PRO-38V
EUT.....	: Multifunctional POP-UP charger with magnetic wireless charging
Applicant.....	: GCteq Wireless (Shenzhen) Co., Ltd.
Address.....	: No. A402, Floor 4, Suojia Science parkComplex Sanwei Community, HangchengStreet, Bao'an, District, Shenzhen City, Guangdong Province, China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: GCteq Wireless (Shenzhen) Co., Ltd.
Address.....	: No. A402, Floor 4, Suojia Science parkComplex Sanwei Community, HangchengStreet, Bao'an, District, Shenzhen City, Guangdong Province, China
Telephone.....	: /
Fax.....	: /
Factory.....	: TEN PAO ELECTRONICS(HUIZHC)Co., LTD.
Address.....	: dongjiang indus trial Estate, shuikou Street, Huizhou City, Guangdong Province, P.R.C
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	April 22, 2024	Initial Issue	--





TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1 Description of Device (EUT)	6
1.2 Support equipment List	6
1.3 External I/O Cable	6
1.4 Description of Test Facility	6
1.5 Statement of the Measurement Uncertainty	7
1.6 Measurement Uncertainty	7
1.7 Description of Test Modes	7
2. TEST METHODOLOGY	8
2.1 EUT Configuration	8
2.2 EUT Exercise	8
2.3 General Test Procedures	8
2.3.1 Conducted Emissions	8
2.3.2 Radiated Emissions	8
2.4. Test Sample	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	9
3.2 EUT Exercise Software	9
3.3 Special Accessories	9
3.4 Block Diagram/Schematics	9
3.5 Equipment Modifications	9
3.6 Test Setup	9
4. SUMMARY OF TEST EQUIPMENT	10
5. SUMMARY OF TEST RESULT	11
6. POWER LINE CONDUCTED MEASUREMENT	12
7. RADIATED EMISSION MEASUREMENT	17
7.1. Block Diagram of Test Setup	17
7.2. Radiated Emission Limit	18
7.3. EUT Configuration on Measurement	18
7.4. Operating Condition of EUT	18
7.5. Measuring Setting	19
7.6. Test Procedure	19
7.7. Test Results	20
8. 20 DB BANDWIDTH MEASUREMENT	27
8.1. Block Diagram of Test Setup	27
8.2. Test Procedure	27
8.3. Test Results	28
9. PHOTOGRAPHS OF TEST SETUP	30
10. EXTERNAL PHOTOGRAPHS OF THE EUT	30
11. INTERNAL PHOTOGRAPHS OF THE EUT	30



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Multifunctional POP-UP charger with magnetic wireless charging

Test Model : GF-18PRO-38V

Power Supply : Input: DC 24-36V --- 3-2A
Wireless output: 15W Max
Type-C output: 20W Max
USB -A output: 18W Max

Hardware Version : /

Software Version : /

Wireless Charging :

Operating Frequency : 110.3~205.0KHz, 360.0KHz

Modulation Type : FSK

Antenna Type : Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Apple	Mobile Phone	iPhone X	--	FCC
--	Power Adapter	S05BAAC2900200	--	FCC

Note: Mobile phone is provided by the laboratory and only use tested, not shipped.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Power Port	1	N/A

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Modulation Type: FSK

Test Modes		
Mode 1	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: <1%) + WPT (110.3-205KHz)	Record
Mode 2	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: <50%) + WPT (110.3-205KHz)	Pre-test
Mode 3	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: 100%) + WPT (110.3-205KHz)	Pre-test
Mode 4	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: <1%) + WPT (360KHz)	Record
Mode 5	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: <50%) + WPT (360KHz)	Pre-test
Mode 6	AC/DC Adapter(29V/2A) + EUT + mobile phone (Battery Status: 100%) + WPT (360KHz)	Pre-test

Note: All test modes were pre-tested, but we only recorded the worst case in this report.





2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The EUT was operated in the normal operating mode and a continuous transmits mode for other tests. According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A240130035-1)	Engineer sample – continuous transmit
Sample 2(A240130035-2)	Normal sample – Intermittent transmit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2023-06-09	2024-06-08
2	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2023-07-17	2024-07-16
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-09	2024-06-08
4	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2023-08-15	2024-08-14
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	EMI Test Receiver	R&S	ESPI	101940	2023-08-15	2024-08-14
10	Artificial Mains	R&S	ENV216	101288	2023-06-09	2024-06-08
11	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2023-06-09	2024-06-08
12	EMI Test Software	Farad	EZ	/	N/A	N/A
13	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A





5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant

Remark: The measurement uncertainty is not included in the test result.

N/A – Not Applicable!!!



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

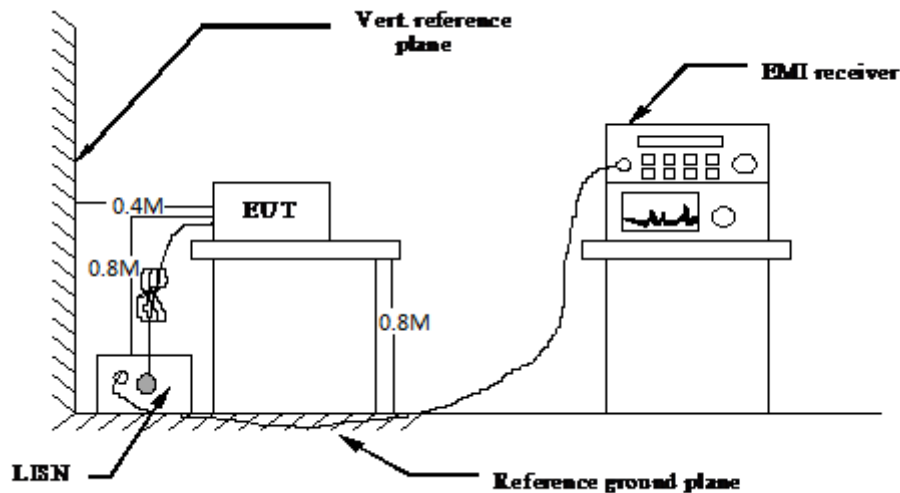

6.2. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBμV/m)} = RA \text{ (dBμV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

6.4 Test Results

PASS

The test data please refer to following page.

Temperature	24.4℃	Humidity	53.0%
Test Engineer	Jay Luo	Configurations	Transmit



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))_Mode 1**

Line

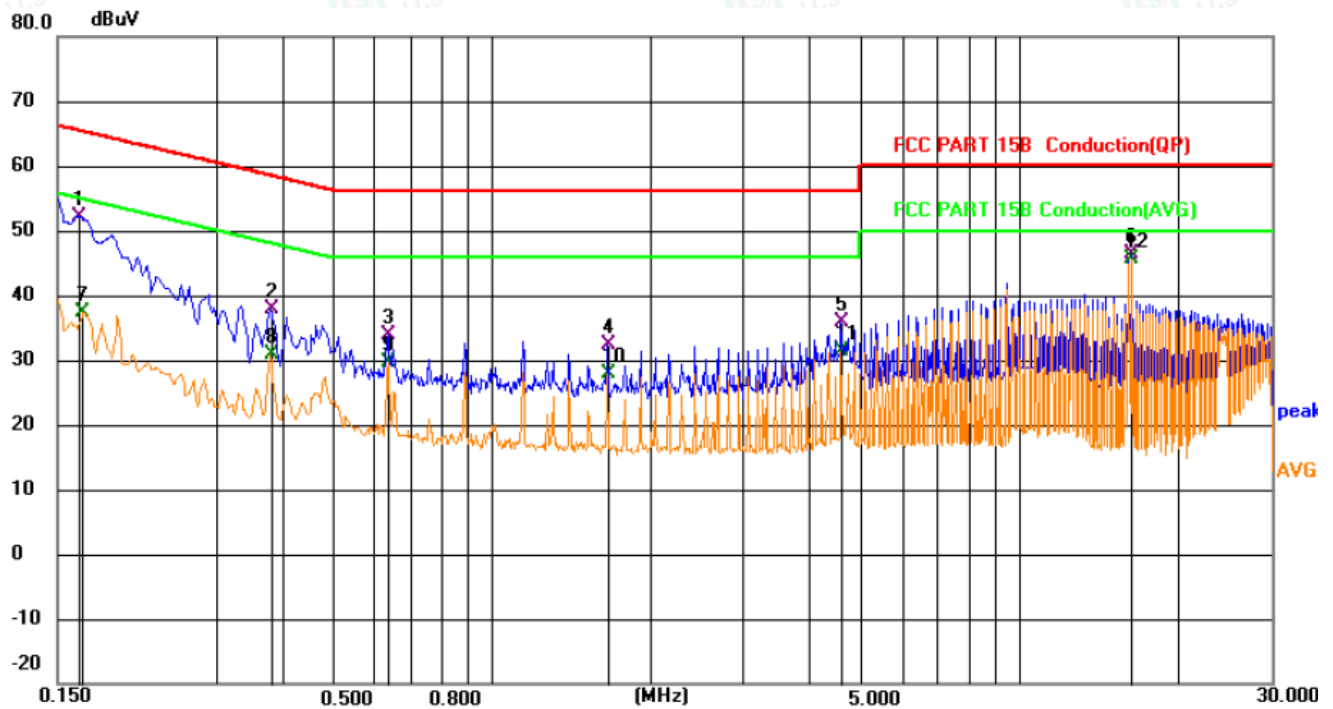

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		0.1650	32.54	19.63	52.17	65.21	-13.04	QP	
2		0.3796	18.29	19.63	37.92	58.29	-20.37	QP	
3		0.6360	14.28	19.66	33.94	56.00	-22.06	QP	
4		1.6575	12.76	19.67	32.43	56.00	-23.57	QP	
5		4.5961	16.30	19.70	36.00	56.00	-20.00	QP	
6		16.3501	26.33	19.96	46.29	60.00	-13.71	QP	
7		0.1680	17.86	19.63	37.49	55.06	-17.57	AVG	
8		0.3796	11.17	19.63	30.80	48.29	-17.49	AVG	
9		0.6360	9.99	19.66	29.65	46.00	-16.35	AVG	
10		1.6575	8.14	19.67	27.81	46.00	-18.19	AVG	
11		4.5961	11.73	19.70	31.43	46.00	-14.57	AVG	
12	*	16.3501	25.73	19.96	45.69	50.00	-4.31	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

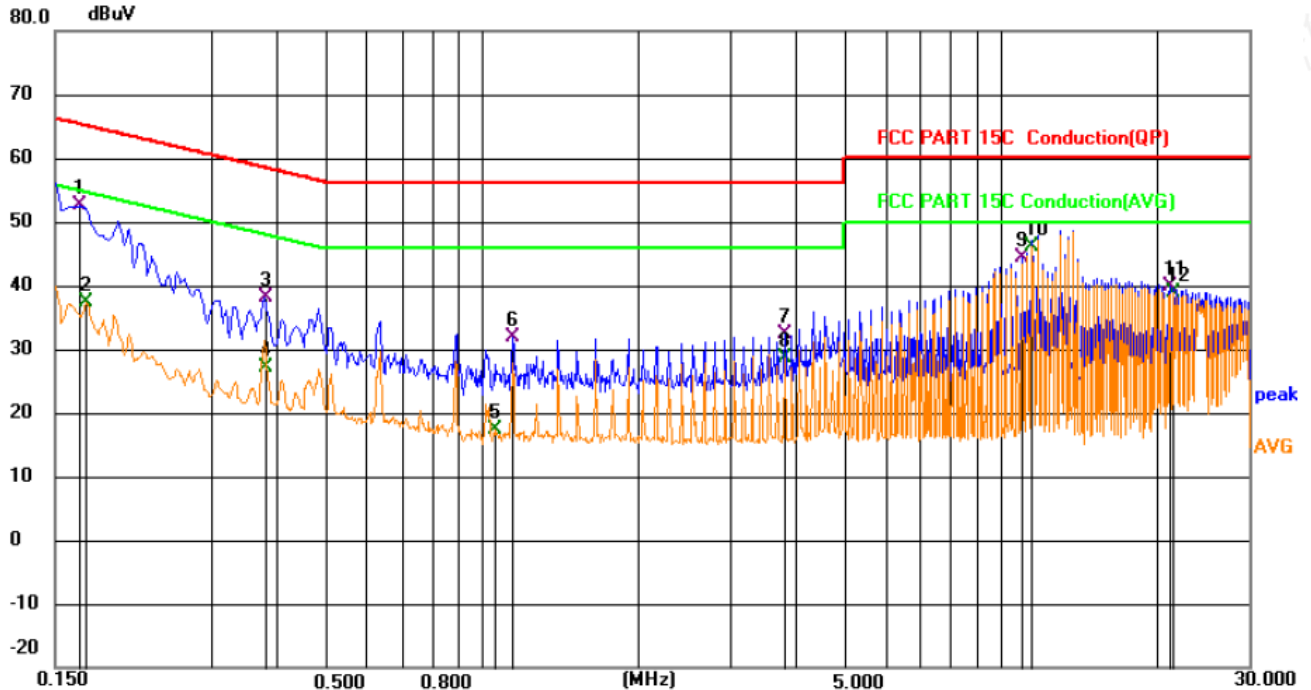

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1680	32.89	19.63	52.52	65.06	-12.54	QP	
2		0.1726	17.74	19.63	37.37	54.83	-17.46	AVG	
3		0.3796	18.51	19.63	38.14	58.29	-20.15	QP	
4		0.3840	7.48	19.63	27.11	48.19	-21.08	AVG	
5		1.0545	-2.39	19.65	17.26	46.00	-28.74	AVG	
6		1.1445	12.21	19.65	31.86	56.00	-24.14	QP	
7		3.8311	12.64	19.79	32.43	56.00	-23.57	QP	
8		3.8311	8.89	19.79	28.68	46.00	-17.32	AVG	
9		10.9861	24.48	19.85	44.33	60.00	-15.67	QP	
10	*	11.4946	26.26	19.85	46.11	50.00	-3.89	AVG	
11		21.2056	19.65	20.14	39.79	60.00	-20.21	QP	
12		21.4621	18.65	20.12	38.77	50.00	-11.23	AVG	

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit; Correct Factor= Liss Factor + Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))_Mode 4**

Neutral

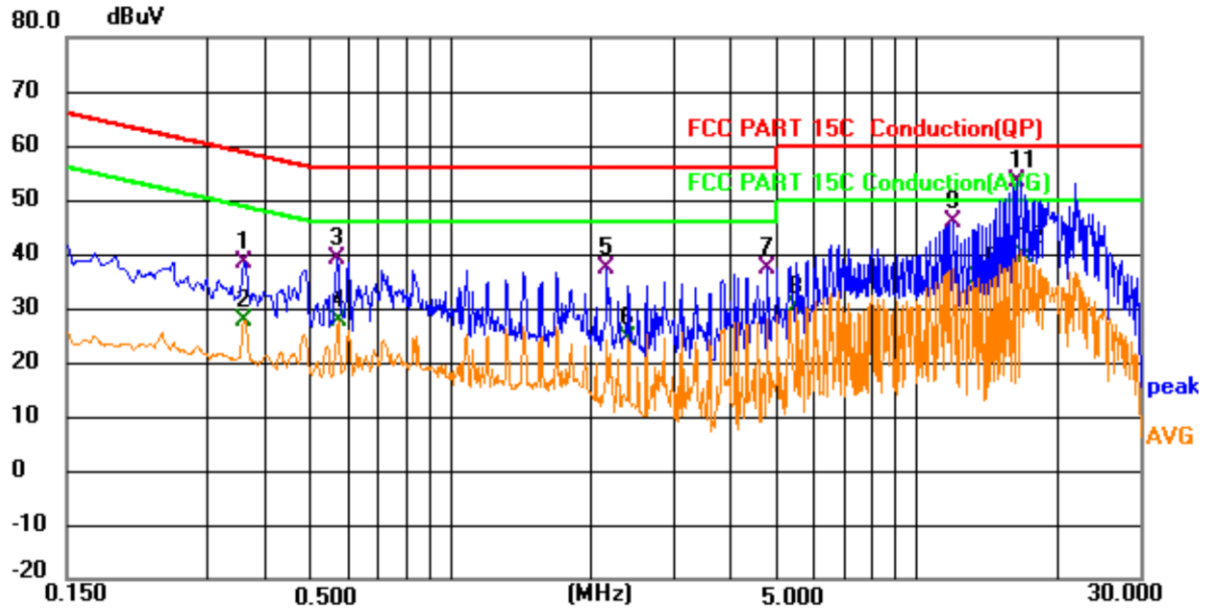

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.361	18.59	19.82	38.41	58.71	-20.30	QP	
2		0.361	7.77	19.82	27.59	48.71	-21.12	AVG	
3		0.569	19.77	19.43	39.20	56.00	-16.80	QP	
4		0.573	8.11	19.43	27.54	46.00	-18.46	AVG	
5		2.166	18.10	19.12	37.22	56.00	-18.78	QP	
6		2.405	5.49	19.08	24.57	46.00	-21.43	AVG	
7		4.776	18.59	18.86	37.45	56.00	-18.55	QP	
8		5.532	11.30	18.90	30.20	50.00	-19.80	AVG	
9		11.935	26.19	19.61	45.80	60.00	-14.20	QP	
10		13.591	15.82	19.68	35.50	50.00	-14.50	AVG	
11	*	16.476	34.02	19.53	53.55	60.00	-6.45	QP	
12		16.962	19.88	19.47	39.35	50.00	-10.65	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Line

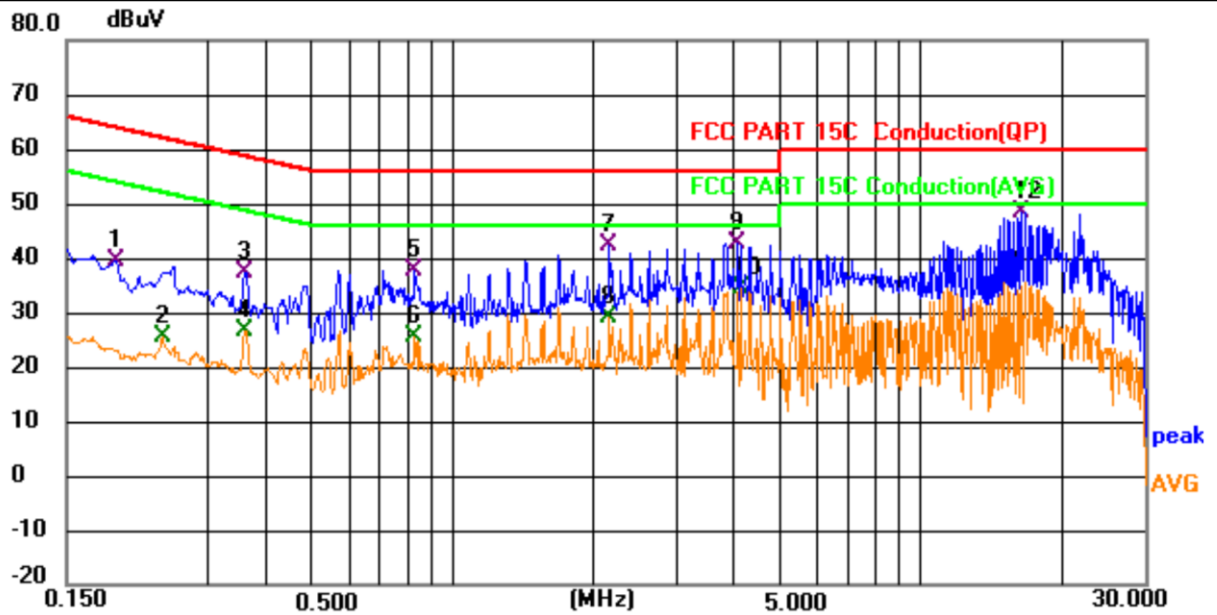

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.191	19.77	19.74	39.51	63.99	-24.48	QP	
2	0.240	5.61	19.78	25.39	52.10	-26.71	AVG	
3	0.361	17.59	19.82	37.41	58.71	-21.30	QP	
4	0.361	6.77	19.82	26.59	48.71	-22.12	AVG	
5	0.834	18.74	19.06	37.80	56.00	-18.20	QP	
6	0.834	6.49	19.06	25.55	46.00	-20.45	AVG	
7	2.166	23.10	19.12	42.22	56.00	-13.78	QP	
8	2.166	10.07	19.12	29.19	46.00	-16.81	AVG	
9	4.061	23.73	18.97	42.70	56.00	-13.30	QP	
10	4.119	15.46	18.97	34.43	46.00	-11.57	AVG	
11	15.040	15.92	19.73	35.65	50.00	-14.35	AVG	
12 *	16.476	29.02	19.53	48.55	60.00	-11.45	QP	

***Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit; Correct Factor= Liscn Factor + Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

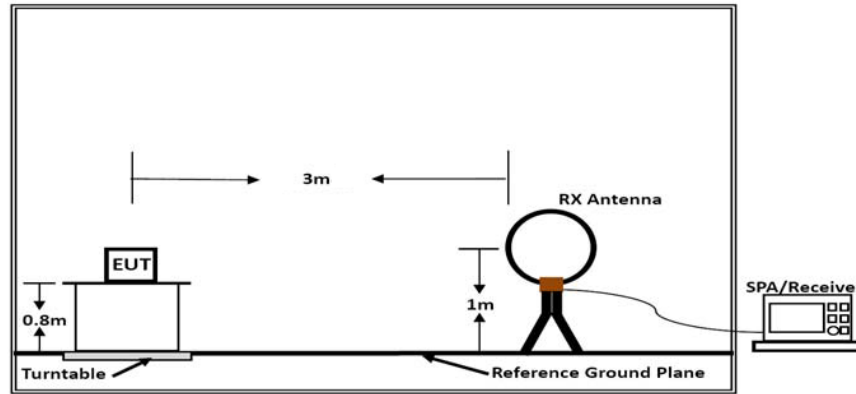

Below 30MHz

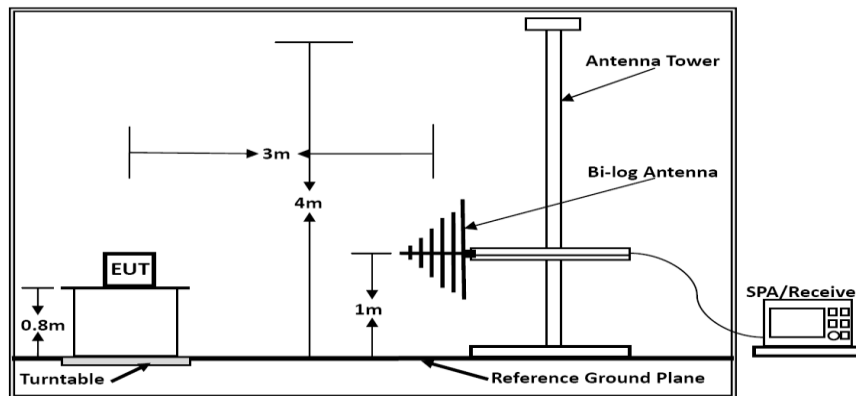

Below 1GHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

7.5. Operating Condition of EUT

(1) Setup the EUT as shown in Section 7.1.

7.6. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.7. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.8. Test Results

PASS.

Only report the worst test data (Mode 1) in test report;

The test data please refer to following page:

Temperature	23.6°C	Humidity	52.2%
Test Engineer	Jay Luo	Configurations	Transmit



**Mode 1**

0.009 MHz – 30 MHz

0 degree

130.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.2512	45.87	-17.79	28.08	40.00	-11.92	QP
2	91.4949	48.46	-18.78	29.68	43.50	-13.82	QP
3	131.7577	51.41	-20.63	30.78	43.50	-12.72	QP
4	203.5228	50.81	-17.31	33.50	43.50	-10.00	QP
5	317.7011	44.40	-14.61	29.79	46.00	-16.21	QP
6	482.2156	42.98	-14.10	28.88	46.00	-17.12	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree, recorded worst case at 0 degree.

2). $\text{Margin} = \text{Reading level} + \text{Factor} - \text{Limit}$



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Temperature	23.8℃	Humidity	52.1%
Test Engineer	Jay Luo	Configurations	Transmit

Below 1GHz

Horizontal

70.0 dBuV/m

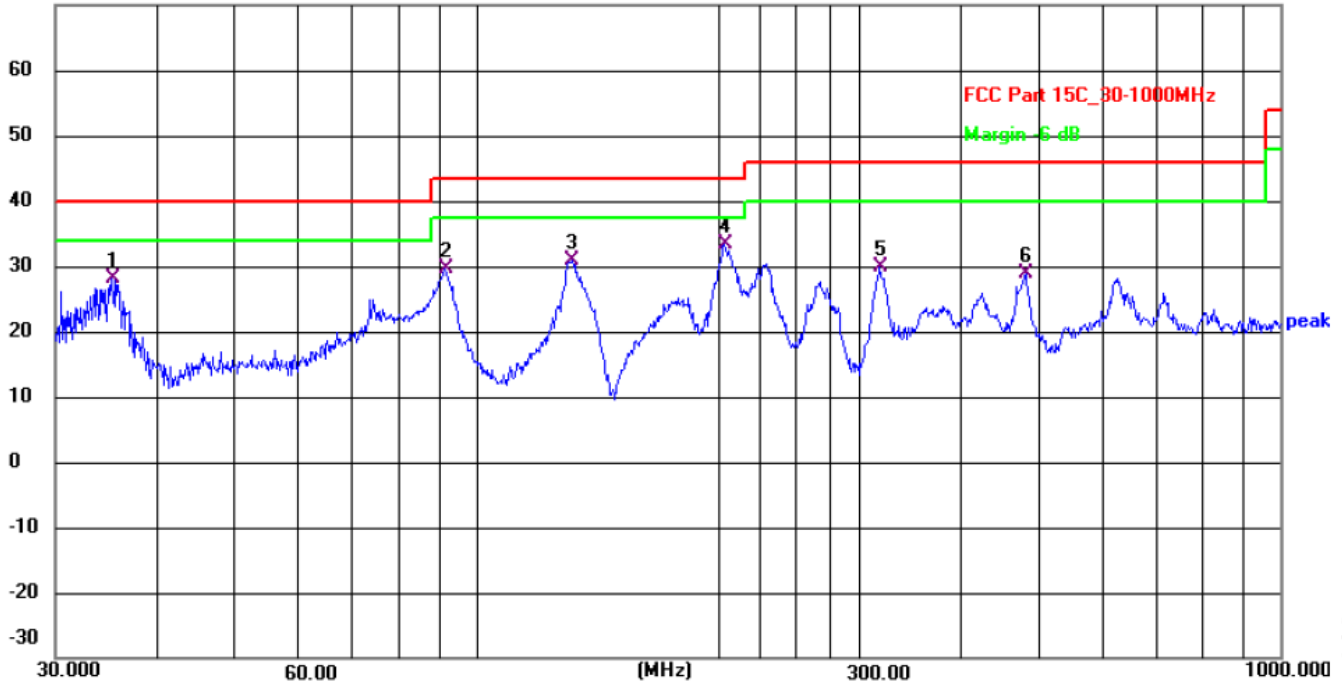

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.2512	45.87	-17.79	28.08	40.00	-11.92	QP
2	91.4949	48.46	-18.78	29.68	43.50	-13.82	QP
3	131.7577	51.41	-20.63	30.78	43.50	-12.72	QP
4	203.5228	50.81	-17.31	33.50	43.50	-10.00	QP
5	317.7011	44.40	-14.61	29.79	46.00	-16.21	QP
6	482.2156	42.98	-14.10	28.88	46.00	-17.12	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

70.0 dBuV/m

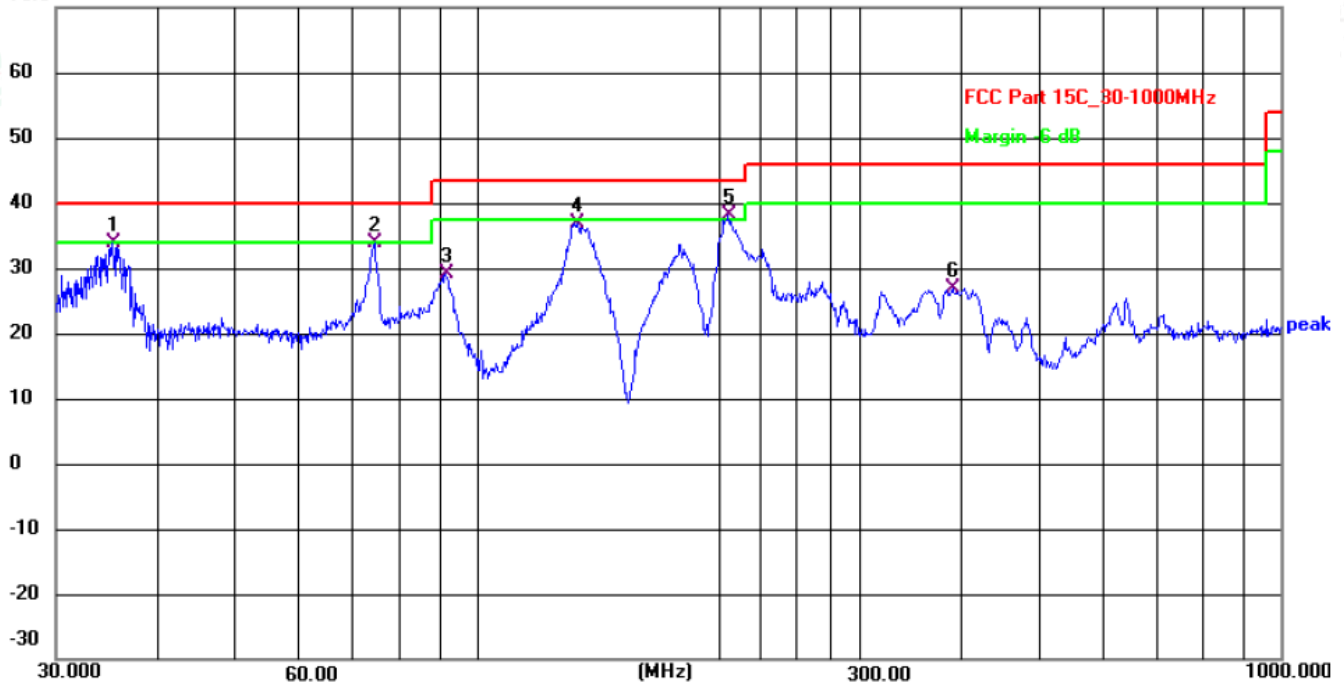

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.2512	51.57	-17.79	33.78	40.00	-6.22	QP
2	74.6569	53.43	-19.66	33.77	40.00	-6.23	QP
3	91.4949	47.89	-18.78	29.11	43.50	-14.39	QP
4	133.6188	57.69	-20.69	37.00	43.50	-6.50	QP
5	205.6751	55.25	-17.24	38.01	43.50	-5.49	QP
6	390.7226	41.42	-14.53	26.89	46.00	-19.11	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit.

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**Mode 4**

0.009 MHz – 30 MHz

0 degree

130.0 dBuV/m



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.1440	75.37	-9.78	65.59	104.38	-38.79	QP	P	
2	0.2897	61.54	-9.75	51.79	98.34	-46.55	QP	P	
3	0.3607	66.32	-9.73	56.59	96.45	-39.86	QP	P	
4	0.9860	55.62	-9.27	46.35	67.73	-21.38	QP	P	
5	4.8357	49.55	-9.40	40.15	69.54	-29.39	QP	P	
6	27.4390	39.23	-10.26	28.97	69.54	-40.57	QP	P	

Remark: 1). Measured at antenna position 0 degree and 90 degree, recorded worst case at 0 degree.

2). Margin=Reading level + Factor- Limit



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Temperature	23.8℃	Humidity	52.1%
Test Engineer	Jay Luo	Configurations	Transmit

Below 1GHz

Horizontal

70.0 dBuV/m

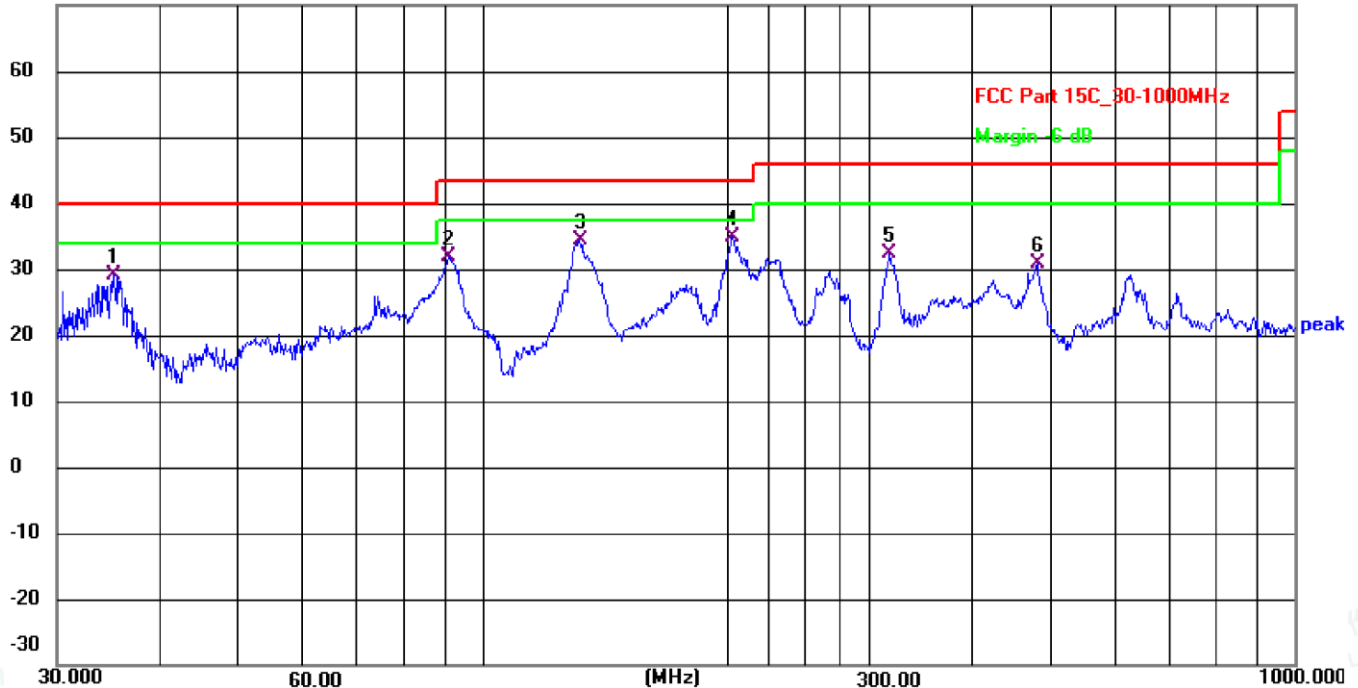

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	35.2511	46.87	-17.79	29.08	40.00	-10.92	QP	P	
2	91.1744	50.71	-18.80	31.91	43.50	-11.59	QP	P	
3	131.7576	54.91	-20.63	34.28	43.50	-9.22	QP	P	
4	203.5226	52.31	-17.31	35.00	43.50	-8.50	QP	P	
5	317.7010	46.90	-14.61	32.29	46.00	-13.71	QP	P	
6	482.2155	44.98	-14.10	30.88	46.00	-15.12	QP	P	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

70.0 dBuV/m

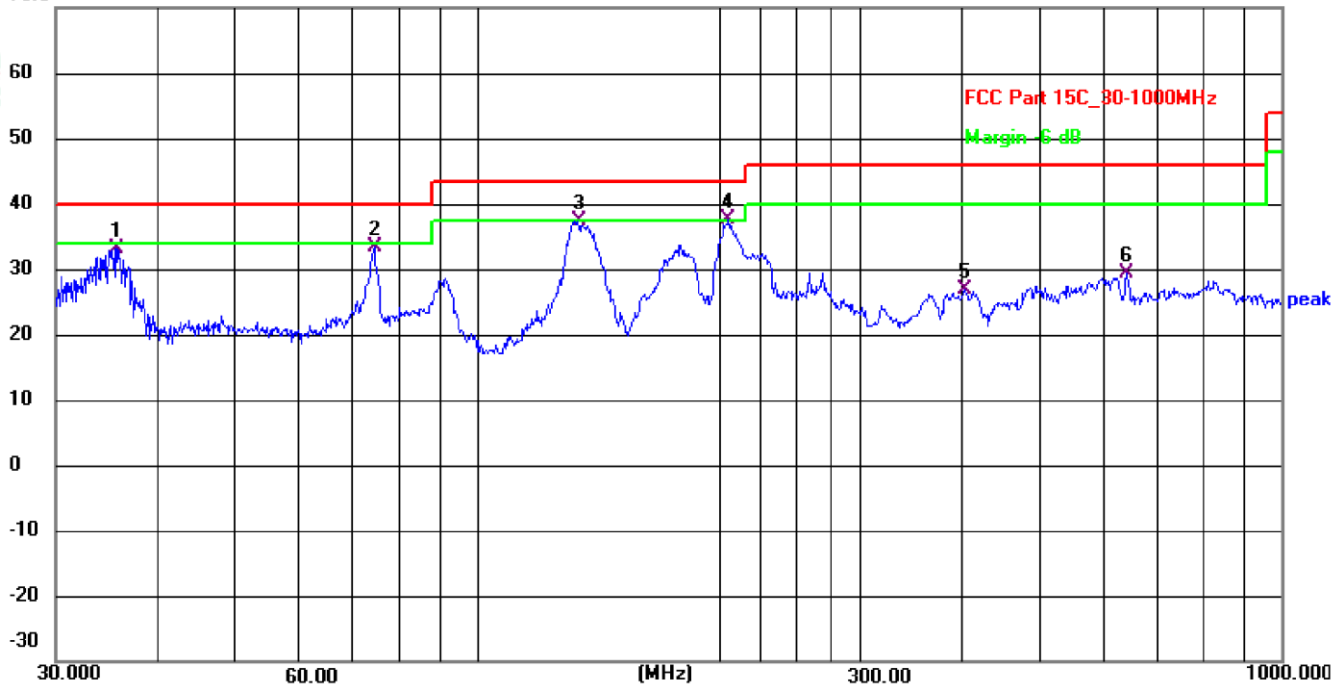

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	35.7490	50.95	-17.76	33.19	40.00	-6.81	QP	P	
2	74.6568	52.93	-19.66	33.27	40.00	-6.73	QP	P	
3	133.6187	58.19	-20.69	37.50	43.50	-6.00	QP	P	
4	205.6750	54.75	-17.24	37.51	43.50	-5.99	QP	P	
5	404.6664	41.29	-14.42	26.87	46.00	-19.13	QP	P	
6	642.8612	40.41	-11.04	29.37	46.00	-16.63	QP	P	

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit.

Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add:101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



8. 20 DB BANDWIDTH MEASUREMENT

8.1. Block Diagram of Test Setup

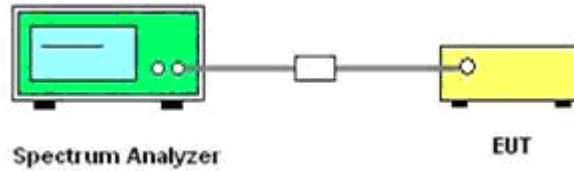

8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 1KHz

RBW = 100Hz

VBW = 300Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



8.3. Test Results


Test Result Of 20dB Bandwidth Measurement

Test Mode	Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
Mode 1	0.145	69.25	Non-Specified
Mode 2	0.360	0.250	Non-Specified

Result: Pass

Please refer to the following page for test plot.

Test plot of 20 dB Bandwidth Measurement

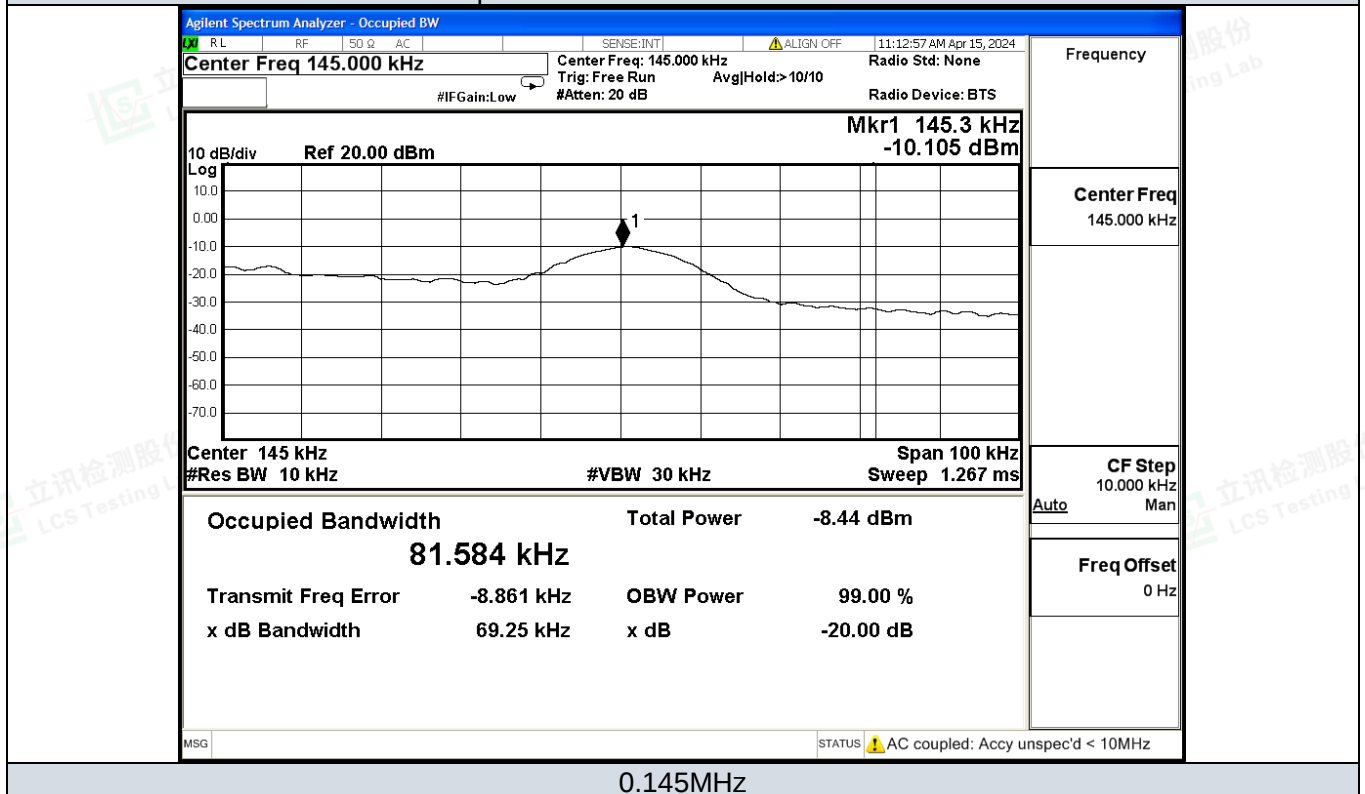

0.145MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

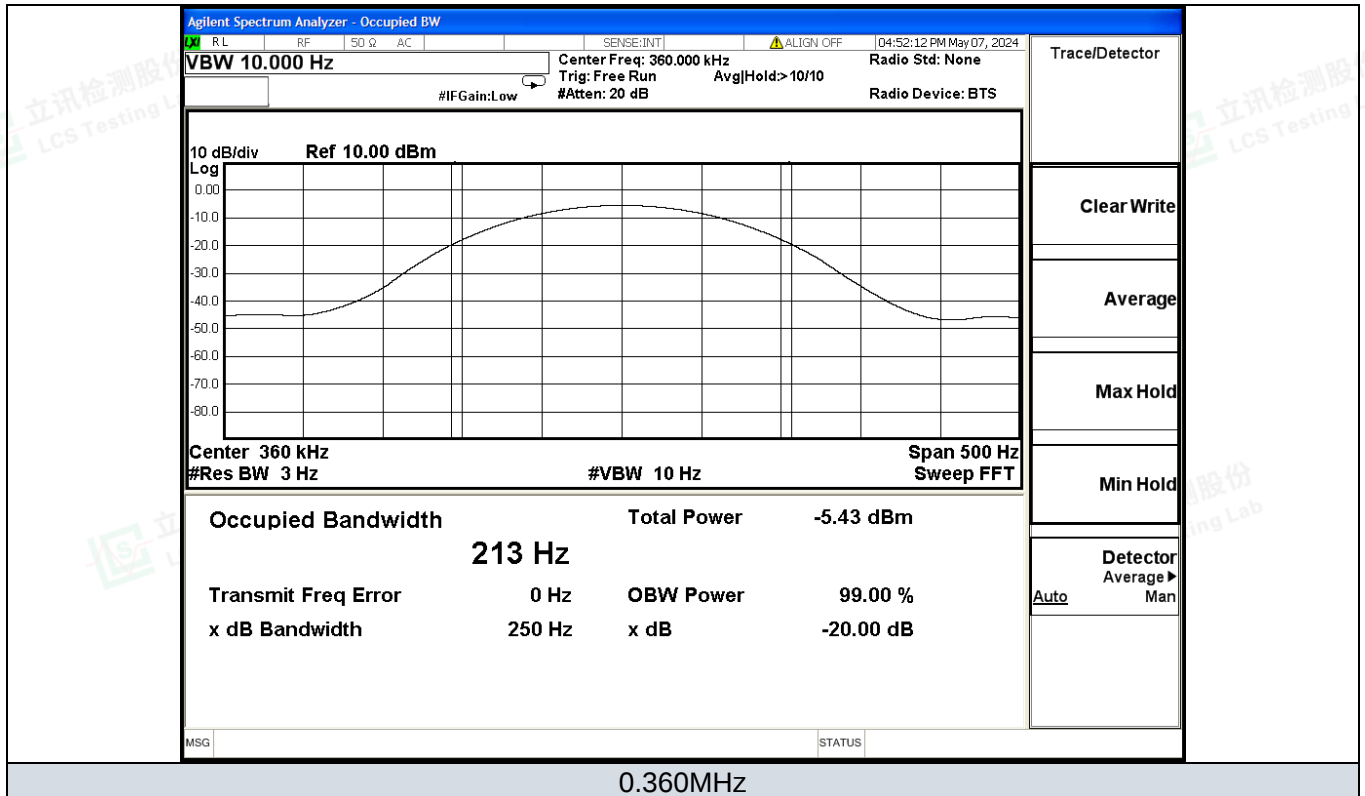

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

10. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

11. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity