FCC PART 15, SUBPART B and C; FCC 15.231; and RSS-210 & RSS GEN TEST REPORT

for

MOTION DETECTOR

Model: WST-742

Prepared for

ECOLINK INTELLIGENT TECHNOLOGY, INC. 2055 CORTE DEL NOGAL CARLSBAD, CALIFORNIA 92011

| Prepared by: | |
|---------------|---------------|
| | JAMES ROSS |
| Approved by:_ | |
| | KYLE FUJIMOTO |

COMPATIBLE ELECTRONICS INC. 114 OLINDA DRIVE BREA, CALIFORNIA 92823 (714) 579-0500

DATE: FEBRUARY 2, 2021

| | REPORT | | APPENDICES | | | | TOTAL |
|-------|--------|------------------|------------|---|----|----|-------|
| | BODY | \boldsymbol{A} | В | C | D | E | |
| PAGES | 22 | 2 | 2 | 2 | 10 | 26 | 64 |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

| Section | / Title | PAGE |
|---------|---|------|
| GENERA | AL REPORT SUMMARY | 4 |
| SUMMA | RY OF TEST RESULTS | 5 |
| 1. PU | JRPOSE | 6 |
| 1.1 | Decision Rule & Risk | 6 |
| 2. AI | OMINISTRATIVE DATA | 7 |
| 2.1 | Location of Testing | 7 |
| 2.2 | Traceability Statement | 7 |
| 2.3 | Cognizant Personnel | 7 |
| 2.4 | Date Test Sample was Received | 7 |
| 2.5 | Disposition of the Test Sample | 7 |
| 2.6 | Abbreviations and Acronyms | 7 |
| 3. AI | PPLICABLE DOCUMENTS | 8 |
| 4. DI | ESCRIPTION OF TEST CONFIGURATION | 9 |
| 4.1 | Description of Test Configuration – Emissions | 9 |
| 4.1.1 | Cable Construction and Termination | 9 |
| 5. LI | STS OF EUT, ACCESSORIES AND TEST EQUIPMENT | 10 |
| 5.1 | EUT and Accessory List | 10 |
| 5.2 | Emissions Test Equipment | 11 |
| 6. TI | EST SITE DESCRIPTION | 12 |
| 6.1 | Test Facility Description | 12 |
| 6.2 | EUT Mounting, Bonding and Grounding | 12 |
| 6.3 | Measurement Uncertainty | 12 |
| 7. TI | EST PROCEDURES | 13 |
| 7.1 | RF Emissions | 13 |
| 7.1.1 | Conducted Emissions Test | 13 |
| 7.1.2 | Radiated Emissions Test | 14 |
| 7.1.3 | RF Emissions Test Results | 16 |
| 7.1.4 | Sample Calculations | 17 |
| 7.1.5 | Duty Cycle Calculation | 19 |
| 7.1.6 | 99 % Bandwidth | 20 |
| 7.1.7 | -20 dB Bandwidth | 20 |
| 7.1.8 | Transmission Time | 21 |
| 8. CO | ONCLUSIONS | 22 |

Model: WST-742

LIST OF APPENDICES

| APPENDIX | TITLE | |
|----------|--|--|
| | | |
| A | Laboratory Accreditations and Recognitions | |
| В | Modifications to the EUT | |
| С | Models Covered Under This Report | |
| D | Diagrams, Charts, and Photos | |
| | Test Setup Diagrams | |
| | Antenna and Effective Gain Factors | |
| | • Radiated Emissions Photos | |
| Е | Data Sheets | |

LIST OF FIGURES

| FIGURE | TITLE |
|--------|--|
| 1 | |
| 1 | Layout of the Semi-Anechoic Test Chamber |

LIST OF TABLES

| TABLE | TITLE |
|-------|---------------------------|
| | |
| 1 | Radiated Emission Results |

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report PATIBLE

Motion Detector
Model: WST-742

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used by the client to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the United States government.

Device Tested: Motion Detector

Model: WST-742

S/N: N/A

Product Description: The equipment under test is a battery powered Motion Detector manufactured by Ecolink

Intelligent Technology. The transmit frequency is 345 MHz. The oscillator(s) are

10.78 MHz. Dimensions: 9.0 cm (L) x 6.8 cm (W) x 4.5 cm (H).

Modifications: The EUT was not modified to meet the specifications.

Customer: Ecolink Intelligent Technology, Inc.

2055 Corte Del Nogal Carlsbad, California 92011

Test Dates: December 15 and 16, 2020

Test Specifications covered by accreditation:

Test Specifications: Emissions requirements

CFR Title 47, Part 15, Subpart B;

CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231; RSS-210 and RSS-Gen



Test Procedures: ANSI C63.4 and ANSI C63.10

Test Deviations: The test procedure was not deviated from during the testing.

Model: WST-742

SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION | RESULTS |
|------|--|---|
| 1 | Spurious Radiated RF Emissions, 9 kHz – 3.45 GHz (Transmitter and Digital portion) | Complies with the Class B limits of CFR Title 47, Part 15 Subpart B; the limits of CFR Title 47, Part 15 Subpart C, sections 15.205, 15.209, and 15.231; and the limits of RSS-210 and RSS-Gen Highest reading in relation to spec limit 75.34 dBuV/m (AVG) @ 345 MHz (*U = 3.19 dB) |
| 2 | -20 dB Bandwidth | Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (c); and the limits of RSS-210 |
| 3 | Transmission Time | Complies with limits of CFR Title 47, Part 15 Subpart C, section 15.231 (a)(1) and (a)(2); and the limits of RSS-210 |

^{*}U = Expanded Uncertainty with a coverage factor of k=2

Report Number: **B01216D1**

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the Motion Detector, Model: WST-742. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4 and ANSI C63.10. The tests were performed to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15 Subpart B section, 15.109; the specification limits defined by CFR Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.231; and the specifications limits defined by RSS-210 and RSS-Gen.

1.1 Decision Rule & Risk

If a measured value exceeds a specification limit it implies non-compliance. If the value is below a specification limit it implies compliance. Measurement uncertainty of the laboratory is reported with all measurement results but generally not taken into consideration unless a standard, rule or law requires it to be considered.

Qualification test reports are only produced for products that are in compliance with the test requirements, therefore results are always in conformity. Otherwise, an engineering report or just the data is provided to the customer.

When performing a measurement and making a statement of conformity, in or out-of-specification to manufacturer's specifications or Pass/Fail against a requirement, there are two possible outcomes:

- The result is reported as conforming with the specification
- The result is reported as not conforming with the specification

The decision rule is defined below.

When the test result is found to be below the limit but within our measurement uncertainty of the limit, it is our policy that the final acceptance decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be exactly on the specification, it is our policy, in the case of unwanted emissions measurements to consider the result non-compliant, however, the final decision is left to the customer, after discussing the implications and potential risks of the decision.

When the test result is found to be over the specification limit under any condition, it is our policy to consider the result non-compliant.

In terms of uncertainty of measurement, the laboratory is a calibrated and tightly controlled environment and generally exceptionally stable, the measurement uncertainties are evaluated without the considering of the test sample. When it comes to the test sample however, as most testing is performed on a single sample rather than a sample population, and that sample is often a preproduction representation of the final product, that test sample represents a significantly higher source of measurement uncertainty. We advise our customers of this and that when in doubt (small test to limit margins), they may wish to perform statistical sampling on a population to gain a higher confidence in the results. All lab reported results are that of a single sample in any event.

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report

Motion Detector

Model: WST-742

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Ecolink Intelligent Technology, Inc.

David Shepard Product Compliance/QA Specialist

Jay Stone Director of Engineering

Compatible Electronics Inc.

Kyle Fujimoto Test Engineer James Ross Test Engineer

2.4 Date Test Sample was Received

The test sample was received prior to the date of this report.

2.5 Disposition of the Test Sample

The test sample has not been returned to Ecolink Intelligent Technology, Inc. as of the date of this report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

EMI Electromagnetic Interference EUT Equipment Under Test

P/N Part Number S/N Serial Number

FCC Federal Communications Commission

DoC Declaration of Conformity

N/A Not Applicable
Tx Transmit
Rx Receive
Inc. Incorporated

RSS Radio Standard Specification

RF Radio Frequency
BLE Bluetooth Low Energy
CFR Code of Federal Regulations

PCB Printed Circuit Board

DC Direct Current

LED Light Emitting Diode

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emission Test Report.

| SPEC | TITLE | |
|--|---|--|
| FCC Title 47, Part 15 Subpart C | FCC Rules – Radio frequency devices (including digital devices) – Intentional Radiators | |
| FCC Title 47, Part 15 Subpart B | FCC Rules – Radio frequency devices (including digital devices) –Unintentional Radiators | |
| RSS-210 Issue 10: 2019 | License-exempt Radio Apparatus: Category I Equipment | |
| RSS-Gen Issue 5: 2019 + Amendment 1 | General Requirements for Compliance of Radio Apparatus | |
| ANSI C63.4: 2014 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | |
| ANSI C63.10: 2013 | American National Standard of procedure for compliance testing of unlicensed wireless devices | |

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report

PATIBLE

Motion Detector

Model: WST-742

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – Emissions

The Motion Detector, Model: WST-742 (EUT) was tested as a stand alone unit. The EUT was transmtting at 345 MHz on a continuous basis.

The EUT was tested for emissions while in the X, Y and Z axis. The X orientation is when the EUT is parallel to the ground. The Y orientation is when the EUT is perpendicular to the ground mounted vertically. The Z orientation is when the EUT is perpendicular to the ground mounted horizontally.

The EUT was tested with a new battery.

The final radiated emissions data for the EUT was taken in the configuration described above. Please see Appendix E for the data sheets.

4.1.1 Cable Construction and Termination

The EUT had no external cables.

LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT 5.

5.1 EUT and Accessory List

| EQUIPMENT | MANUFACTURER | MANUFACTURER MODEL NUMBER | | FCC ID |
|--------------------------|--------------------------------------|---------------------------|-----|--------------------------------|
| MOTION DETECTOR (EUT) | ECOLINK INTELLIGENT TECHNOLOGY, INC. | WST-742 | N/A | XQC-WST742 IC: 9863B-WST742 |

Model: WST-742

5.2 **Emissions Test Equipment**

| EQUIPMENT TYPE | MANU- FACTURER | MODEL NUMBER | SERIAL NUMBER | CALIBRATION DATE | CAL. CYCLE |
|------------------------------------|--------------------------------|-----------------|------------------|---------------------|------------|
| | RADIA | TED EMISSION | S TEST EQUIPM | ENT | |
| TDK TestLab | TDK RF Solutions, Inc. | 9.22 | 700145 | N/A | N/A |
| MXE EMI Receiver, 3 Hz – 44 GHz | Keysight Technologies, Inc. | N9038A | MY59050117 | October 5, 2020 | 1 Year |
| Loop Antenna | Com-Power | AL-130R | 121090 | February 5, 2019 | 2 Year |
| CombiLog Antenna | Com-Power | AC-220 | 061093 | June 5, 2019 | 2 Year |
| Horn Antenna | Com-Power | AH-118 | 10050113 | February 4, 2020 | 2 Year |
| Preamplifier | Com-Power | PA-118 | 181653 | February 5, 2020 | 1 Year |
| System Controller | Sunol Sciences Corporation | SC110V | 112213-1 | N/A | N/A |
| Turntable | Sunol Sciences Corporation | 2011VS | N/A | N/A | N/A |
| Antenna-Mast | Sunol Sciences Corporation | TWR95-4 | 112213-3 | N/A | N/A |
| Computer | Hewlett Packard | p6716f | MXX1030PX0 | N/A | N/A |
| LCD Monitor | Hewlett Packard | 52031a | 3CQ046N3MG | N/A | N/A |

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report

PATIBLE

Motion Detector

Model: WST-742

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

For frequencies 1 GHz and below: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 0.8 meters above the ground plane.

For frequencies above 1 GHz: The EUT was mounted on a 0.6 by 1.2 meter non-conductive table 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Measurement Uncertainty

Compatible Electronics' U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_{\rm c}(y) = \sqrt{\sum_i c_i^2 \ u^2(x_i)}$$

| Measurement | | U_{cispr} | $U_{lab} = 2 uc (y)$ |
|---|----------------------|-------------|--|
| Conducted disturbance (mains port) | (150 kHz – 30 MHz) | 3.4 dB | 2.73 dB |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) | (30 MHz – 1 000 MHz) | 6.3 dB | 3.27 dB (Vertical) 3.19 dB (Horizontal) |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) | (1 GHz - 6 GHz) | 5.2 dB | 3.95 dB |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) | (6 GHz – 18 GHz) | 5.5 dB | 3.95 dB |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) | (18 GHz – 26.5 GHz) | N/A | 4.69 dB |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) | (26.5 GHz – 40 GHz) | N/A | 4.55 dB |

Report Number: B01216D1 Page 13 of 22

Motion Detector Model: WST-742

TEST PROCEDURES 7.

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 **RF Emissions**

7.1.1 **Conducted Emissions Test**

The EMI Receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. A 10 dB attenuator was used for the protection of the EMI Receiver input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the EMI Receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63:4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by computer software. The final qualification data is located in Appendix E.

Test Results:

This test was not performed because the EUT operates on battery power only and cannot be connected to the AC public mains.

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report PATIBLE

Motion Detector
Model: WST-742

7.1.2 Radiated Emissions Test

The EMI Receiver was used as the measuring meter. An internal preamplifier was used to increase the sensitivity of the instrument during emissions tests up to 1000 MHz, and an external preamplifier was used to increase the sensitivity of the instrument during emissions tests above 1 GHz. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which considers the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. The effective measurement bandwidth used for the radiated emissions test was according to the frequency measured.

The frequencies below 1 GHz, except for the fundamental frequency and the 2nd harmonic of the fundamental frequency, were quasi-peaked using the quasi-peak detector of the EMI Receiver.

The harmonic frequencies above 1 GHz, the fundamental frequency, and the 2nd harmonic were averaged using the duty cycle correction calculation.

All other frequencies above 1 GHz were averaged using the average detector of the EMI Receiver.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna to ensure accurate results.

The EUT was tested at a 3-meter test distance. The six highest emissions are listed in Table 1.

Radiated Emissions Test (Continued)

The measurement bandwidths and transducers used for the radiated emissions test were:

| FREQUENCY RANGE | EFFECTIVE MEASUREMENT BANDWIDTH | TRANSDUCER |
|-------------------|---------------------------------------|------------------|
| 9 kHz to 150 kHz | 200 Hz | Loop Antenna |
| 150 kHz to 30 MHz | 9 kHz | Loop Antenna |
| 30 MHz to 1 GHz | 120 kHz | CombiLog Antenna |
| 1 GHz to 3.45 GHz | 1 MHz | Horn Antenna |

Test Results:

The EUT complies with the Class B limits of CFR Title 47, Part 15, Subpart B; the limits of CFR Title 47, Part 15, Subpart C sections 15.205, 15.209 and 15.231; and the limits of RSS-210 and RSS-Gen for radiated emissions.

7.1.3 **RF Emissions Test Results**

Table 1 RADIATED EMISSION RESULTS

> Motion Detector Model: WST-742

| Frequency (MHz) | EMI Reading (dBuV/m) | Specification Limit (dBuV/m) | Delta (Cor. Reading – Spec. Limit) (dB) |
|----------------------|-------------------------|------------------------------|---|
| 345.00 (H) (X-Axis) | 75.34 (Avg) | 77.26 | -1.92 |
| 3105.00 (H) (X-Axis) | 53.42 (Avg) | 57.26 | -3.84 |
| 345.00 (V) (Y-Axis) | 71.99 (Avg) | 77.26 | -5.27 |
| 944.90 (H) (Y-Axis) | 38.84 (QP) | 46.00 | -7.16 |
| 944.30 (H) (Y-Axis) | 38.81 (QP) | 46.00 | -7.19 |
| 2070.00 (H) (X-Axis) | 50.02 (Avg) | 57.26 | -7.24 |

Notes:

- The complete emissions data is given in Appendix E of this report.
- (V) Vertical Polarization
- **Horizontal Polarization** (H)
- Average (Avg)
- Quasi-Peak (QP)

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report PATIBLE

Motion Detector
Model: WST-742

7.1.4 Sample Calculations

A correction factor for the antenna, cable, and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

Conversion to logarithmic terms: Specification limit (μ V/m) log x 20 = Specification Limit in dBuV/m

To correct for distance when measuring at a distance other than the specification

For measurements below 30 MHz: (Specification distance / test distance) $\log x$ 40 = distance factor

For measurements above 30 MHz: (Specification distance / test distance) $\log x 20 = \text{distance factor}$

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss.

Corrected Meter Reading = meter reading + F - A + C

where: F = antenna factor

A= amplifier gain C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

When the limit is in terms of magnetic field, the following equation applies:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H[dB(S/m)]$$

where: *H* is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

 L_C is the cable loss,

 G_{PA} is the gain of the preamplifier (if used), and

 AF^{H} is the magnetic antenna factor.

The G_{PA} term is only included in the equation when an external preamplifier is used in the measurement chain, in front of the receiver or spectrum analyzer. An external preamplifier is not usually necessary (or even advisable, due to risk of saturating the input mixer of the receiver) when an active loop antenna is used. In that case, the antenna factor of the loop already includes the gain of its built-in preamplifier.

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report

PATIBLE

Motion Detector

Model: WST-742

Sample Calculations (Continued)

If the "electrical" antenna factor is used instead, the above equation becomes:

$$H[dB(\mu A/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})] - 51.5[dB\Omega]$$

where: AF^E is the "electric" antenna factor, as provided by the antenna calibration laboratory.

When the limit is in terms of electric field, the following equation applies:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^E[dB(m^{-1})]$$
 or, if the magnetic antenna factor is used:

$$E[dB(\mu V/m)] = V[dB(\mu V)] + L_C[dB] - G_{PA}[dB] + AF^H[dB(S/m)] + 51.5[dB\Omega]$$

The display of the receiver (or spectrum analyzer) <u>shall not</u> be configured in units of current, e.g. μA or $dB(\mu A)$. That conversion is calculated inside the receiver (or spectrum analyzer) using its input impedance, which is 50 Ω , while the magnetic field calculation is based on the free-space impedance of 377 Ω .

7.1.5 **Duty Cycle Calculation**

The fundamental and harmonics were measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Where

$$\delta(dB) = 20 \log \left[\sum (nt_1 + mt_2 + ... + \xi t_x) / T \right]$$

n is the number of pulses of duration t1 m is the number of pulses of duration t2 ξ is the number of pulses of duration tx

T is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Duty Cycle Correction Factor = -20 dB*

Time of First Pulse = $23.2 \mu s$

Time of One Small Pulse = $148 \mu s$

Time of One Large Pulse = $283 \mu s$

Number of Small Pulses = 41

Number of Large Pulses = 11

Total On Time = $9204.2 \mu s = 9.2042 ms$

The time between pulses is greater than 100 ms

Duty Cycle = 9204.2 ms / 100 ms = 9.2042 %

*This is the maximum duty cycle factor allowed per FCC 15.35 (b).

7.1.6 99 % Bandwidth

The 99 % bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the 99 % bandwidth per RSS-GEN, Issue 5, clause 6.7:

- 1. Set RBW to 1 % to 5 % of the actual occupied bandwidth.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the EMI Receiver to the occupied bandwidth Function set at 99 %
- 4. Set the peak detector to max hold.
- 5. Set the sweep time to auto
- 6. Allow the trace to stabilize.

Please note that this was only used to determine the emission bandwidth and that there are no limits or pass/fail criteria for this test. Please see the data sheets located in Appendix E.

7.1.7 -20 dB Bandwidth

The -20 dB bandwidth was measured using an EMI Receiver.

The following steps were performed for measuring the -20 dB bandwidth:

- 1. Set RBW to at least 1% of the maximum occupied bandwidth allowed.
- 2. Set VBW to greater than 3 times the RBW.
- 3. Set the peak detector to max hold.
- 4. Set the sweep time to auto
- 5. Allow the trace to stabilize.
- 6. Set the markers to -20 dB of the peak fundamental emission

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (c); and the limits of RSS-210.

7.1.8 **Transmission Time**

The transmission time was measured using an EMI Receiver.

The following steps were performed for measuring transmission time:

- 1. Set RBW = 120 kHz.
- 2. Set VBW = 750 kHz
- 3. Span = 0 Hz
- 4. Set the sweep time to 10 seconds
- 5. Push a button on the EUT, which automatically activated the transmitter.
- 6. Allow the trace to stabilize.
- 7. Set the 1st marker to start of the transmission
- 8. Set the 2nd marker for 5 seconds after the start of the transmission
- 9. Verify the transmission does not go beyond the 2nd marker.

Test Results:

The EUT complies with limits of CFR Title 47, Part 15, Subpart C section 15.231 (a)(1) and (a)(2); and the limits of RSS-210.



8. **CONCLUSIONS**

The Motion Detector, Model: WST-742 (EUT), as tested, meets all of the specification limits defined in RSS-210, RSS-Gen, the Class B specification limits defined in CFR Title 47, Part 15, Subpart B; and the specification limits defined in CFR Title 47, Part, 15, Subpart C, sections 15.205, 15.209 and 15.231.

Model: WST-742

APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Model: WST-742

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

Innovation, Science and Economic Development Canada Lab Code 2154A

APPENDIX B

MODIFICATIONS TO THE EUT

Model: WST-742

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B, FCC 15.231, RSS-210, and RSS-Gen specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.



APPENDIX C

MODELS COVERED UNDER THIS REPORT

Model: WST-742

MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Motion Detector Model: WST-742 S/N: N/A


There are no additional models or part numbers covered under this report.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS

FIGURE 1: LAYOUT OF THE SEMI -ANECHOIC TEST CHAMBER

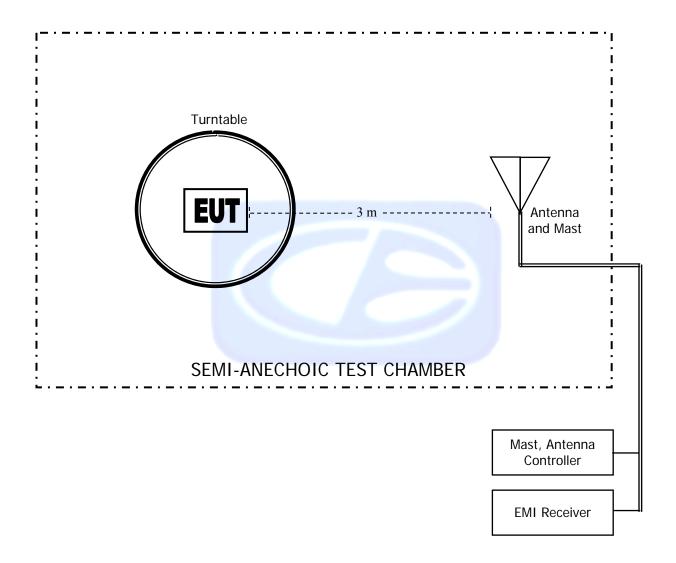

COM-POWER AL-130R LOOP ANTENNA

S/N: 121090

CALIBRATION DATE: FEBRUARY 5, 2019

| FREQUENCY | MAGNETIC | ELECTRIC |
|--------------------|----------|----------|
| FREQUENCY (MHz) | (dB/m) | (dB/m) |
| 0.009 | 16.1 | -35.4 |
| 0.01 | 15.6 | -35.9 |
| 0.02 | 14.8 | -36.7 |
| 0.03 | 15.6 | -35.9 |
| 0.04 | 15.1 | -36.4 |
| 0.05 | 14.4 | -37.0 |
| 0.06 | 14.6 | -36.9 |
| 0.07 | 14.4 | -37.1 |
| 0.08 | 14.3 | -37.1 |
| 0.09 | 14.5 | -36.9 |
| 0.10 | 14.1 | -37.3 |
| 0.20 | 14.1 | -37.3 |
| 0.30 | 14.0 | -37.4 |
| 0.40 | 14.0 | -37.4 |
| 0.50 | 14.2 | -37.2 |
| 0.60 | 14.2 | -37.2 |
| 0.70 | 14.2 | -37.2 |
| 0.80 | 14.2 | -37.3 |
| 0.90 | 14.3 | -37.2 |
| 1.00 | 14.5 | -37.0 |
| 2.00 | 14.5 | -36.9 |
| 3.00 | 14.5 | -36.9 |
| 4.00 | 14.7 | -36.8 |
| 5.00 | 14.6 | -36.9 |
| 6.00 | 14.6 | -36.9 |
| 7.00 | 14.6 | -36.9 |
| 8.00 | 14.6 | -36.9 |
| 9.00 | 14.6 | -36.9 |
| 10.00 | 14.8 | -36.6 |
| 11.00 | 14.9 | -36.6 |
| 12.00 | 14.8 | -36.6 |
| 13.00 | 14.8 | -36.7 |
| 14.00 | 14.6 | -36.8 |
| 15.00 | 14.5 | -36.9 |
| 16.00 | 14.5 | -37.0 |
| 17.00 | 14.6 | -36.9 |
| 18.00 | 14.7 | -36.7 |
| 19.00 | 14.8 | -36.6 |
| 20.00 | 14.9 | -36.6 |
| 21.00 | 14.6 | -36.8 |
| 22.00 | 14.2 | -37.2 |
| 23.00 | 13.7 | -37.7 |
| 24.00 | 13.3 | -38.2 |
| 25.00 | 13.0 | -38.5 |
| 26.00 | 12.9 | -38.6 |
| 27.00 | 13.0 | -38.5 |
| 28.00 | 13.1 | -38.4 |
| 29.00 | 13.1 | -38.4 |
| 30.00 | 12.9 | -38.5 |

COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61093

CALIBRATION DATE: JUNE 5, 2019

| FREQUENCY (MHz) | FACTOR (dB) | FREQUENCY (MHz) | FACTOR (dB) |
|--------------------|-------------|--------------------|-------------|
| 30 | 22.10 | 200 | 15.30 |
| 35 | 20.90 | 250 | 16.80 |
| 40 | 20.10 | 300 | 19.00 |
| 45 | 19.40 | 350 | 19.60 |
| 50 | 18.40 | 400 | 21.70 |
| 60 | 15.10 | 450 | 21.60 |
| 70 | 12.00 | 500 | 22.20 |
| 80 | 11.60 | 550 | 22.70 |
| 90 | 13.50 | 600 | 24.20 |
| 100 | 14.70 | 650 | 24.40 |
| 120 | 15.90 | 700 | 24.50 |
| 125 | 15.90 | 750 | 25.40 |
| 140 | 14.80 | 800 | 26.30 |
| 150 | 15.50 | 850 | 26.70 |
| 160 | 19.80 | 900 | 27.50 |
| 175 | 15.20 | 950 | 27.80 |
| 180 | 14.90 | 1000 | 27.90 |

COM POWER AH-118

HORN ANTENNA

S/N: 10050113

CALIBRATION DATE: FEBRUARY 4, 2020

| FREQUENCY (GHz) | FACTOR (dB) | FREQUENCY (GHz) | FACTOR (dB) |
|--------------------|-------------|--------------------|-------------|
| 1.0 | 24.343 | 10.0 | 38.826 |
| 1.5 | 25.419 | 10.5 | 39.102 |
| 2.0 | 28.838 | 11.0 | 38.259 |
| 2.5 | 28.971 | 11.5 | 39.920 |
| 3.0 | 29.919 | 12.0 | 40.149 |
| 3.5 | 30.674 | 12.5 | 40.576 |
| 4.0 | 31.670 | 13.0 | 40.264 |
| 4.5 | 32.437 | 13.5 | 40.364 |
| 5.0 | 33.414 | 14.0 | 40.424 |
| 5.5 | 34.003 | 14.5 | 41.677 |
| 6.0 | 34.799 | 15.0 | 43.010 |
| 6.5 | 35.381 | 15.5 | 39.799 |
| 7.0 | 37.024 | 16.0 | 40.187 |
| 7.5 | 37.403 | 16.5 | 40.155 |
| 8.0 | 37.445 | 17.0 | 40.507 |
| 8.5 | 37.390 | 17.5 | 41.963 |
| 9.0 | 38.076 | 18.0 | 43.196 |
| 9.5 | 38.809 | | |

COM-POWER PA-118

PREAMPLIFIER

S/N: 181653

CALIBRATION DATE: FEBRUARY 5, 2020

| FREQUENCY (GHz) | FACTOR (dB) | FREQUENCY (GHz) | FACTOR (dB) |
|--------------------|-------------|--------------------|-------------|
| 1.0 | 40.10 | 6.0 | 40.60 |
| 1.1 | 40.10 | 6.5 | 39.50 |
| 1.2 | 40.00 | 7.0 | 39.40 |
| 1.3 | 39.70 | 7.5 | 39.30 |
| 1.4 | 39.60 | 8.0 | 39.20 |
| 1.5 | 39.90 | 8.5 | 40.50 |
| 1.6 | 40.00 | 9.0 | 39.60 |
| 1.7 | 39.70 | 9.5 | 39.50 |
| 1.8 | 39.50 | 10.0 | 38.80 |
| 1.9 | 39.60 | 11.0 | 38.70 |
| 2.0 | 39.90 | 12.0 | 42.20 |
| 2.5 | 40.10 | 13.0 | 40.00 |
| 3.0 | 40.80 | 14.0 | 40.30 |
| 3.5 | 40.60 | 15.0 | 40.20 |
| 4.0 | 40.50 | 16.0 | 41.00 |
| 4.5 | 41.60 | 17.0 | 39.70 |
| 5.0 | 39.20 | 18.0 | 40.90 |
| 5.5 | 40.00 | | |



FRONT VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-742

FCC SUBPART B AND C; RSS-210 AND RSS-GEN - RADIATED EMISSIONS - BELOW 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



REAR VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC.

MOTION DETECTOR

MODEL: WST-742

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – BELOW 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



FRONT VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC.


MOTION DETECTOR

MODEL: WST-742

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



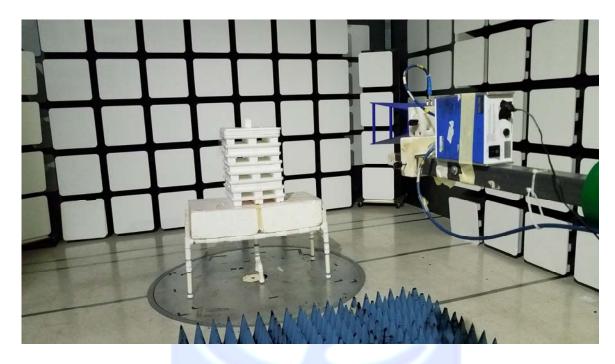

REAR VIEW

ECOLINK INTELLIGENT TECHNOLOGY, INC. MOTION DETECTOR MODEL: WST-742

FCC SUBPART B AND C; RSS-210 AND RSS-GEN – RADIATED EMISSIONS – ABOVE 1 GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

APPENDIX E

DATA SHEETS

RADIATED EMISSIONS

DATA SHEETS

12/16/2020 12:42:25 PM

Sequence: Preliminary Scan

Model: WST-742

Title: Pre-Scan - FCC Class B

File: 1 - Keysight - Pre-Scan - X-Axis - WST-742 - FCC Class B - 12-16-2020.set

Operator: Kyle Fujimoto

EUT Type: Motion Detector

EUT Condition: The EUT is continuously transmitting at 345 MHz

Company: Ecolink Intelligent Technology, Inc.


(PEAK) EMI (V)

Model: WST-742

Note: The emission at 345 MHz and 690 MHz are from the intentional radiator from the EUT and are subject to the limits of FCC 15.231 instead.

X-Axis

FCC Class B

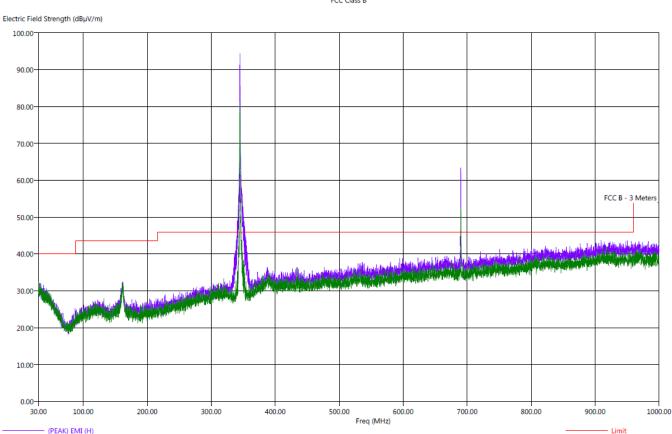



S/N: N/A Y-Axis

FCC Part 15 Subpart B and C; FCC Section 15.231; RSS-210 & RSS-GEN Test Report

COMPATIBLE

Motion Detector

ELECTRONICS

Model: WST-742

Title: Radiated Final - FCC Class B File: 1 - Keysight - Final Scan - Y-Axis - WST-742 - FCC Class B - 12-16-2020.set Operator: Kyle Fujimoto EUT Type: Motion Detector EUT Condition: The EUT is continuously transmitting at 345 MHz Company: Ecolink Intelligent Technology, Inc. Model: WST-742

12/16/2020 1:33:18 PM Sequence: Final Measurements

FCC Class B

| Freq | Pol | (PEAK) EMI | (QP) EMI | (PEAK) Margin | (QP) Margin | Limit | Transducer | Cable | Ttbl Agl | Twr Ht |
|--------|-----|---------------|----------|---------------|-------------|----------|------------|-------|----------|--------|
| (MHz) | | $(dB\mu V/m)$ | (dBµV/m) | (dB) | (dB) | (dBµV/m) | (dB) | (dB) | (deg) | (cm) |
| 818.30 | Н | 42.61 | 37.16 | -3.39 | -8.84 | 46.00 | 26.90 | 2.30 | 43.50 | 223.10 |
| 829.00 | Н | 42.69 | 37.35 | -3.31 | -8.65 | 46.00 | 27.10 | 2.30 | 352.25 | 316.59 |
| 906.60 | Н | 43.89 | 38.50 | -2.11 | -7.50 | 46.00 | 27.80 | 2.47 | 302.75 | 254.86 |
| 910.60 | Н | 44.03 | 38.59 | -1.97 | -7.41 | 46.00 | 27.90 | 2.49 | 124.50 | 286.62 |
| 911.40 | н | 44.04 | 38.57 | -1.96 | -7.43 | 46.00 | 27.90 | 2.49 | 180.50 | 293.67 |
| 913.80 | Н | 43.82 | 38.73 | -2.18 | -7.27 | 46.00 | 27.96 | 2.50 | -0.25 | 222.74 |
| 944.30 | н | 44.16 | 38.81 | -1.84 | -7.19 | 46.00 | 27.80 | 2.63 | 302.75 | 158.80 |
| 944.90 | н | 44.38 | 38.84 | -1.62 | -7.16 | 46.00 | 27.80 | 2.63 | 277.75 | 222.62 |



FUNDAMENTAL AND HARMONICS

DATA SHEETS



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Fundamental

| | | | | | Peak / | Table | Ant. | |
|----------------|-------------------|--------------|-------|--------|-------------|----------------|----------------|-------------------------|
| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | QP / Avg | Angle (deg) | Height (cm) | Comments |
| 345.00 | 77.34 | \ \ \ | 97.26 | -19.92 | Peak | 349.00 | 112.41 | X-Axis |
| 345.00 | 57.34 | V | 77.26 | -19.92 | Avg | 349.00 | 112.41 | Vertical Polarization |
| | | - | | | | | | |
| 345.00 | 91.99 | V | 97.26 | -5.27 | Peak | 97.50 | 176.17 | Y-Axis |
| 345.00 | 71.99 | V | 77.26 | -5.27 | Avg | 97.50 | 176.17 | Vertical Polarization |
| | | | | | | | | |
| 345.00 | 87.63 | V | 97.26 | -9.63 | Peak | 300.25 | 187.94 | Z-Axis |
| 345.00 | 67.63 | V | 77.26 | -9.63 | Avg | 300.25 | 187.94 | Vertical Polarization |
| | | | | | | | | |
| 345.00 | 95.34 | Н | 97.26 | -1.92 | Peak | 69.50 | 100.65 | X-Axis |
| 345.00 | 75.34 | Н | 77.26 | -1.92 | Avg | 69.50 | 100.65 | Horizontal Polarization |
| | | | | | | | | |
| 345.00 | 87.61 | Н | 97.26 | -9.65 | Peak | 188.75 | 208.53 | Y-Axis |
| 345.00 | 67.61 | Н | 77.26 | -9.65 | Avg | 188.75 | 208.53 | Horizontal Polarization |
| 0.45.00 | 00.00 | | 07.00 | 7.50 | | 400.75 | 400.44 | |
| 345.00 | 89.68 | H | 97.26 | -7.58 | Peak | 192.75 | 100.14 | Z-Axis |
| 345.00 | 69.68 | Н | 77.26 | -7.58 | Avg | 192.75 | 100.14 | Horizontal Polarization |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - X-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|---------------------------------|------------------------|----------|
| 690.00 | 64.42 | \ \ \ | 77.26 | -12.84 | Peak | 228.75 | 100.35 | Comments |
| 690.00 | 44.42 | V | 57.26 | -12.84 | Avg | 228.75 | 100.35 | |
| 030.00 | 77.72 | V | 37.20 | -12.04 | Avg | 220.73 | 100.55 | |
| 1035.00 | 38.76 | V | 73.97 | -35.21 | Peak | 248.50 | 135.28 | |
| 1035.00 | 18.76 | V | 53.97 | -35.21 | Avg | 248.50 | 135.28 | |
| | 70110 | - | | | | | | |
| 1380.00 | 41.17 | V | 73.97 | -32.80 | Peak | 312.00 | 220.41 | |
| 1380.00 | 21.17 | V | 53.97 | -32.80 | Avg | 312.00 | 220.41 | |
| | | | | | | / ² / ₁₀₀ | | |
| 1725.00 | 49.07 | V | 77.26 | -28.20 | Peak | 350.00 | 230.08 | |
| 1725.00 | 29.07 | V | 57.26 | -28.20 | Avg | 350.00 | 230.08 | |
| | | | | | | 75570000 | | |
| 2070.00 | 59.08 | V | 77.26 | -18.18 | Peak | 131.00 | 214.02 | |
| 2070.00 | 39.08 | V | 57.26 | -18.18 | Avg | 131.00 | 214.02 | |
| | | | | | | | | |
| 2415.00 | 50.61 | V | 77.26 | -26.65 | Peak | 249.25 | 123.10 | |
| 2415.00 | 30.61 | V | 57.26 | -26.65 | Avg | 249.25 | 123.10 | |
| | | | | | | | | |
| 2760.00 | 65.55 | V | 73.97 | -8.42 | Peak | 310.75 | 196.41 | |
| 2760.00 | 45.55 | V | 53.97 | -8.42 | Avg | 310.75 | 196.41 | |
| | | | | | | | | |
| 3105.00 | 65.68 | V | 77.26 | -11.58 | Peak | 87.00 | 211.40 | |
| 3105.00 | 45.68 | V | 57.26 | -11.58 | Avg | 87.00 | 211.40 | |
| | | | | | | | | |
| 3450.00 | 62.54 | V | 77.26 | -14.72 | Peak | 321.00 | 190.32 | |
| 3450.00 | 42.54 | V | 57.26 | -14.72 | Avg | 321.00 | 190.32 | |
| | | | | | | | | |



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Y-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|----------|
| 690.00 | 64.45 | V | 77.26 | -12.81 | Peak | 178.50 | 173.67 | |
| 690.00 | 44.45 | V | 57.26 | -12.81 | Avg | 178.50 | 173.67 | |
| 1035.00 | 56.86 | V | 73.97 | -17.11 | Peak | 265.75 | 160.00 | |
| 1035.00 | 36.86 | V | 53.97 | -17.11 | Avg | 265.75 | 160.00 | |
| 1380.00 | 62.70 | V | 73.97 | -11.27 | Peak | 334.50 | 130.20 | |
| 1380.00 | 42.70 | V | 53.97 | -11.27 | Avg | 334.50 | 130.20 | |
| 1725.00 | 58.89 | V | 77.26 | -18.37 | Peak | 188.75 | 159.04 | |
| 1725.00 | 38.89 | V | 57.26 | -18.37 | Avg | 188.75 | 159.04 | |
| 2070.00 | 55.71 | V | 77.26 | -21.55 | Peak | 350.25 | 144.83 | |
| 2070.00 | 35.71 | V | 57.26 | -21.55 | Avg | 350.25 | 144.83 | |
| 2415.00 | 48.50 | V | 77.26 | -28.76 | Peak | 130.00 | 125.61 | |
| 2415.00 | 28.50 | V | 57.26 | -28.76 | Avg | 130.00 | 125.61 | |
| 2760.00 | 60.40 | V | 73.97 | -13.57 | Peak | 42.50 | 139.52 | |
| 2760.00 | 40.40 | V | 53.97 | -13.57 | Avg | 42.50 | 139.52 | |
| 3105.00 | 65.87 | V | 77.26 | -11.39 | Peak | 80.50 | 141.91 | |
| 3105.00 | 45.87 | V | 57.26 | -11.39 | Avg | 80.50 | 141.91 | |
| 3450.00 | 64.19 | V | 77.26 | -13.07 | Peak | 58.75 | 208.95 | |
| 3450.00 | 44.19 | V | 57.26 | -13.07 | Avg | 58.75 | 208.95 | |



FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Z-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|----------|
| 690.00 | 58.11 | V | 77.26 | -19.15 | Peak | 351.25 | 138.74 | |
| 690.00 | 38.11 | V | 57.26 | -19.15 | Avg | 351.25 | 138.74 | |
| 1035.00 | 57.40 | V | 73.97 | -16.57 | Peak | 348.75 | 164.35 | |
| 1035.00 | 37.40 | V | 53.97 | -16.57 | Avg | 348.50 | 164.35 | |
| 1380.00 | 53.49 | V | 73.97 | -20.48 | Peak | 5.00 | 194.20 | |
| 1380.00 | 33.49 | V | 53.97 | -20.48 | Avg | 5.00 | 194.20 | |
| 1725.00 | 62.01 | V | 77.26 | -15.25 | Peak | 86.25 | 124.59 | |
| 1725.00 | 42.01 | V | 57.26 | -15.25 | Avg | 86.25 | 124.59 | |
| 2070.00 | 69.21 | V | 77.26 | -8.05 | Peak | 137.00 | 156.77 | |
| 2070.00 | 49.21 | V | 57.26 | -8.05 | Avg | 137.00 | 156.77 | |
| 2415.00 | 52.31 | V | 77.26 | -24.95 | Peak | 293.50 | 117.79 | |
| 2415.00 | 32.31 | V | 57.26 | -24.95 | Avg | 293.50 | 117.79 | |
| 2760.00 | 63.64 | V | 73.97 | -10.33 | Peak | 231.75 | 156.65 | |
| 2760.00 | 43.64 | V | 53.97 | -10.33 | Avg | 231.75 | 156.65 | |
| 3105.00 | 64.09 | V | 77.26 | -13.17 | Peak | 319.75 | 126.20 | |
| 3105.00 | 44.09 | V | 57.26 | -13.17 | Avg | 319.75 | 126.02 | |
| 3450.00 | 63.85 | V | 77.26 | -13.41 | Peak | 62.75 | 118.62 | |
| 3450.00 | 43.85 | V | 57.26 | -13.41 | Avg | 62.75 | 118.20 | |





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - X-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|----------|
| 690.00 | 54.62 | Н | 77.26 | -22.64 | Peak | 60.50 | 110.02 | |
| 690.00 | 34.62 | Н | 57.26 | -22.64 | Avg | 60.50 | 110.02 | |
| 1035.00 | 44.38 | Н | 73.97 | -29.59 | Peak | 347.00 | 158.68 | |
| 1035.00 | 24.38 | Н | 53.97 | -29.59 | Avg | 347.00 | 158.68 | |
| 1380.00 | 41.63 | Н | 73.97 | -32.34 | Peak | 71.25 | 144.05 | |
| 1380.00 | 21.63 | Н | 53.97 | -32.34 | Avg | 71.25 | 144.05 | |
| 1725.00 | 53.31 | Н | 77.26 | -23.95 | Peak | 102.00 | 148.35 | |
| 1725.00 | 33.31 | Н | 57.26 | -23.95 | Avg | 102.00 | 148.35 | |
| | | | | | | | | |
| 2070.00 | 70.02 | Н | 77.26 | -7.24 | Peak | 356.00 | 125.67 | |
| 2070.00 | 50.02 | Н | 57.26 | -7.24 | Avg | 356.00 | 125.67 | |
| 2415.00 | 58.37 | Н | 77.26 | -18.89 | Peak | 10.00 | 234.26 | |
| 2415.00 | 38.37 | Н | 57.26 | -18.89 | Avg | 10.00 | 234.26 | |
| 2760.00 | 66.11 | Н | 73.97 | -7.86 | Peak | 175.25 | 229.73 | |
| 2760.00 | 46.11 | Н | 53.97 | -7.86 | Avg | 175.25 | 229.73 | |
| 3105.00 | 73.42 | Н | 77.26 | -3.84 | Peak | 257.75 | 171.16 | |
| 3105.00 | 53.42 | Н | 57.26 | -3.84 | Avg | 257.75 | 171.16 | |
| 3450.00 | 69.08 | Н | 77.26 | -8.18 | Peak | 328.25 | 157.85 | |
| 3450.00 | 49.08 | Н | 57.26 | -8.18 | Avg | 328.25 | 157.85 | |
| | | | | | | | | |





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Y-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|----------|
| 690.00 | 58.50 | Н | 77.26 | -18.76 | Peak | 10.25 | 108.47 | |
| 690.00 | 38.50 | Н | 57.26 | -18.76 | Avg | 10.25 | 108.47 | |
| 1035.00 | 55.62 | Н | 73.97 | -18.35 | Peak | 357.00 | 132.17 | |
| 1035.00 | 35.62 | Н | 53.97 | -18.35 | Avg | 357.00 | 132.17 | |
| 1380.00 | 52.21 | Н | 73.97 | -21.76 | Peak | 74.75 | 154.38 | |
| 1380.00 | 32.21 | Н | 53.97 | -21.76 | Avg | 74.75 | 154.38 | |
| 1725.00 | 57.23 | Н | 77.26 | -20.03 | Peak | 350.00 | 108.89 | |
| 1725.00 | 37.23 | Н | 57.26 | -20.03 | Avg | 350.00 | 108.89 | |
| 2070.00 | 65.65 | Н | 77.26 | -11.61 | Peak | 185.50 | 103.16 | |
| 2070.00 | 45.65 | Н | 57.26 | -11.61 | Avg | 185.50 | 103.16 | |
| 2415.00 | 52.21 | Н | 77.26 | -25.05 | Peak | 282.25 | 169.85 | |
| 2415.00 | 32.21 | Н | 57.26 | -25.05 | Avg | 282.25 | 169.85 | |
| 2760.00 | 64.78 | Н | 73.97 | -9.19 | Peak | 137.75 | 148.47 | |
| 2760.00 | 44.78 | Н | 53.97 | -9.19 | Avg | 137.75 | 148.47 | |
| 3105.00 | 60.71 | Н | 77.26 | -16.55 | Peak | 202.00 | 125.97 | |
| 3105.00 | 40.71 | Н | 57.26 | -16.55 | Avg | 202.00 | 125.97 | |
| 3450.00 | 62.75 | Н | 77.26 | -14.51 | Peak | 10.25 | 152.35 | |
| 3450.00 | 42.75 | Н | 57.26 | -14.51 | Avg | 10.25 | 152.35 | |
| | | | | | | | | |





FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D

Model: WST-742 Tested By: Kyle Fujimoto

Harmonics

Transmit Mode - Z-Axis

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|----------|
| 690.00 | 67.71 | Н | 77.26 | -9.56 | Peak | 65.50 | 114.20 | |
| 690.00 | 47.71 | Н | 57.26 | -9.56 | Avg | 65.50 | 114.20 | |
| 1035.00 | 53.73 | Н | 73.97 | -20.24 | Peak | 250.75 | 241.49 | |
| 1035.00 | 33.73 | Н | 53.97 | -20.24 | Avg | 250.75 | 241.49 | |
| 1380.00 | 64.27 | Н | 73.97 | -9.70 | Peak | 87.00 | 130.86 | |
| 1380.00 | 44.27 | Н | 53.97 | -9.70 | Avg | 87.00 | 130.86 | |
| 1725.00 | 62.59 | Н | 77.26 | -14.67 | Peak | 251.50 | 192.47 | |
| 1725.00 | 42.59 | Н | 57.26 | -14.67 | Avg | 251.50 | 192.47 | |
| 2070.00 | 60.58 | Н | 77.26 | -16.68 | Peak | 269.50 | 181.25 | |
| 2070.00 | 40.58 | Н | 57.26 | -16.68 | Avg | 269.50 | 181.25 | |
| 2415.00 | 46.38 | Н | 77.26 | -30.88 | Peak | 350.00 | 136.77 | |
| 2415.00 | 26.38 | Н | 57.26 | -30.88 | Avg | 350.00 | 136.77 | |
| 2760.00 | 61.21 | Н | 73.97 | -12.76 | Peak | 114.25 | 119.76 | |
| 2760.00 | 41.21 | Н | 53.97 | -12.76 | Avg | 114.25 | 119.76 | |
| 3105.00 | 65.08 | Н | 77.26 | -12.18 | Peak | 64.50 | 164.41 | |
| 3105.00 | 45.08 | Н | 57.26 | -12.18 | Avg | 64.50 | 164.41 | |
| 3450.00 | 59.95 | Н | 77.26 | -17.31 | Peak | 132.50 | 110.32 | |
| 3450.00 | 39.95 | Н | 57.26 | -17.31 | Avg | 132.50 | 110.32 | |

FCC Class B and FCC 15.231

Ecolink Intelligent Technology, Inc. Date: 12/15/2020

Motion Detector Lab: D


Model: WST-742 Tested By: Kyle Fujimoto

Non Harmonic Emissions from the Tx and Digital Portion - 9 kHz to 30 MHz Non Harmonic Emissions from the Tx and Digital Portion - 1 GHz To 3.45 GHz

| Freq. (MHz) | Level (dBuV/m) | Pol (v/h) | Limit | Margin | Peak / QP / Avg | Table Angle (deg) | Ant. Height (cm) | Comments |
|----------------|-------------------|--------------|-------|--------|-----------------------|-------------------------|------------------------|--------------------------------|
| | | | | | | | | |
| | | | | | | | | No Emissions Detected |
| | | | | | | | | from 9 kHz to 30 MHz |
| | | | | | | | | for the digital portion |
| | | | | | | | | of the EUT |
| | | | | | | | | |
| | | | | | | | | No Emissions Detected |
| | | | | | | | | from 1 GHz to 3.45 GHz |
| | | | | | | | | for the digital portion |
| | | | | | | | | of the EUT |
| | | | | | | | | |
| | | | | | 1/45 | 1970 (1970) | | No Emissions Detected |
| | | | | | | | | from 9 kHz to 30 MHz |
| | | | | | | | | for the Non-Harmonic Emissions |
| | | | | | | | | of the Transmitter for the EUT |
| | | | | | | | | of the Transmitter for the 201 |
| | | | | | | | | No Emissions Detected |
| | | | | | | | | from 1 GHz to 3.45 GHz |
| | | | | | | | | for the Non-Harmonic Emissions |
| | | | | | | | | of the Transmitter for the EUT |
| | | | | | | | | of the Hansmitter for the EOT |
| | | | | | | | | Investigated in the V Avia |
| | | | | | | | | Investigated in the X-Axis, |
| | | | | | | | | Y-Axis, and Z-Axis |
| | | | | | | | | |
| | | | | - | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |


99 % BANDWIDTH DATA SHEET

Motion Detector Model: WST-742

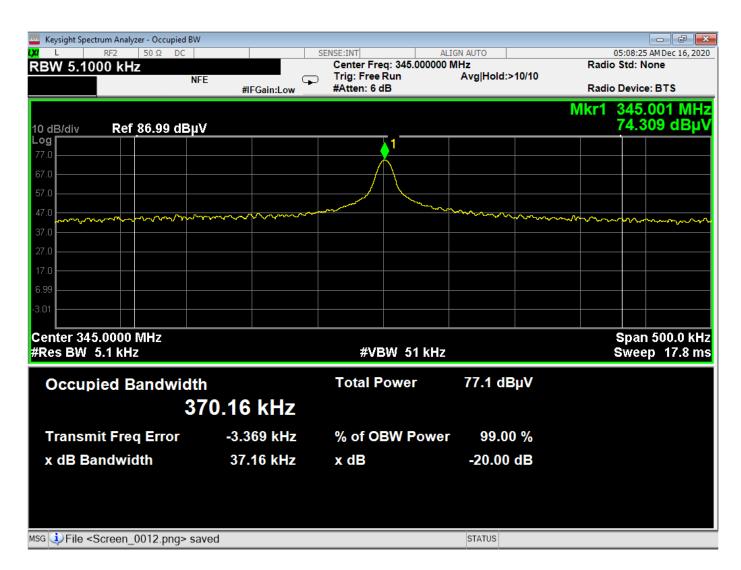

99 Percent Bandwidth Plot


-20 dB BANDWIDTH PLOT DATA SHEET

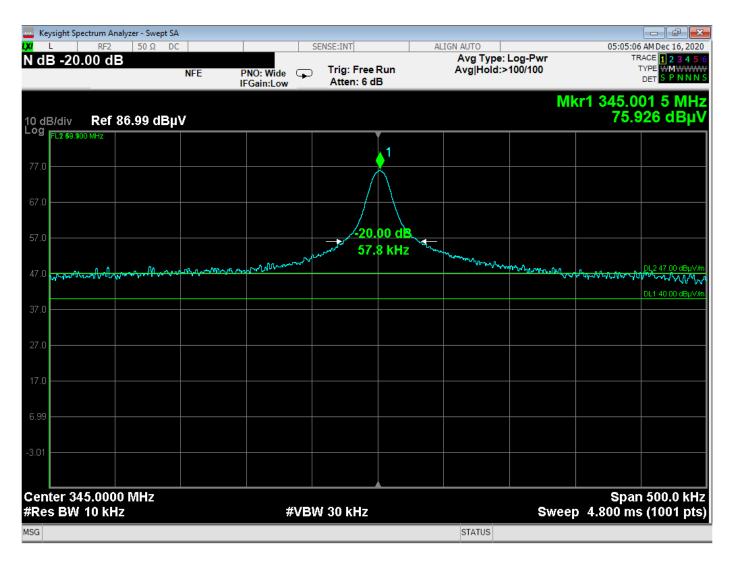


-20 dB Bandwidth Plot

TRANSMISSION TIME DATA SHEET

Motion Detector Model: WST-742

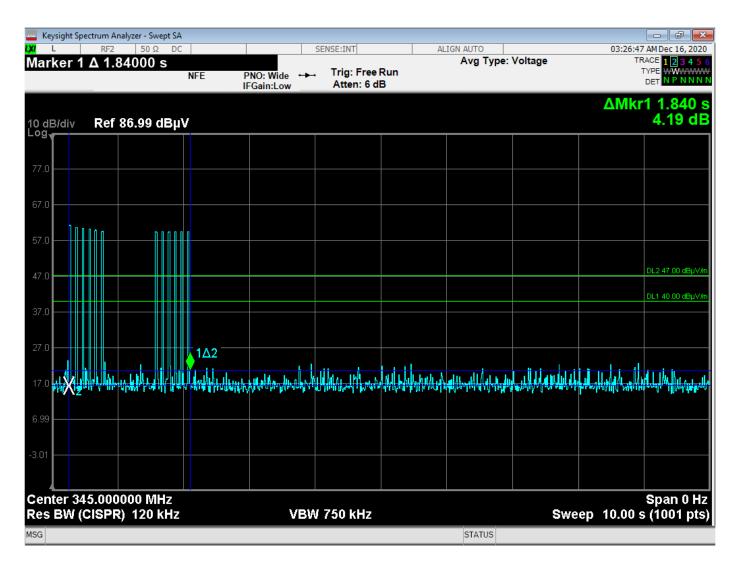

Time of Transmission – 1.840 Seconds

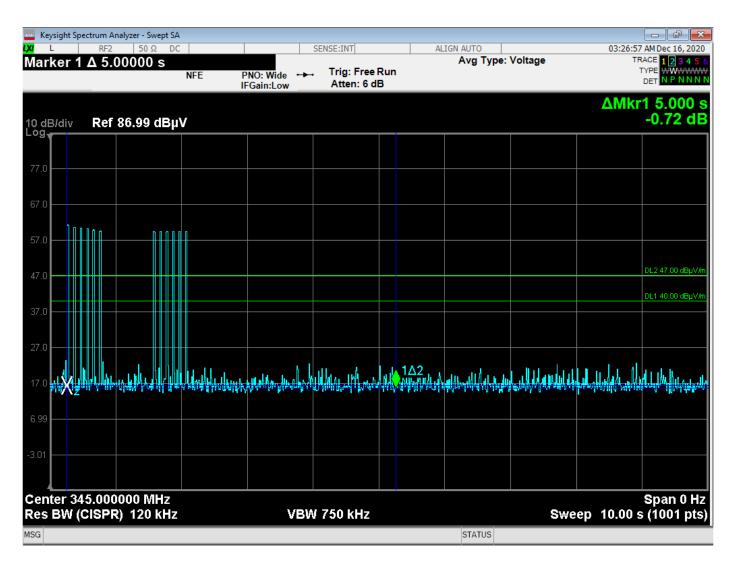

Time of Transmission is less than 5 Seconds


DUTY CYCLE

DATA SHEETS




The time between pulse trains is greater than 100 ms


Motion Detector Model: WST-742

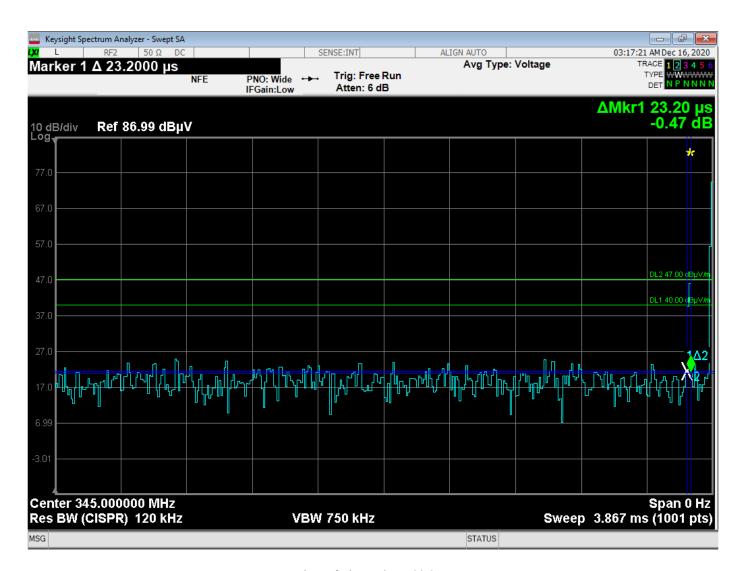


Time of First Pulse = 23.2 us

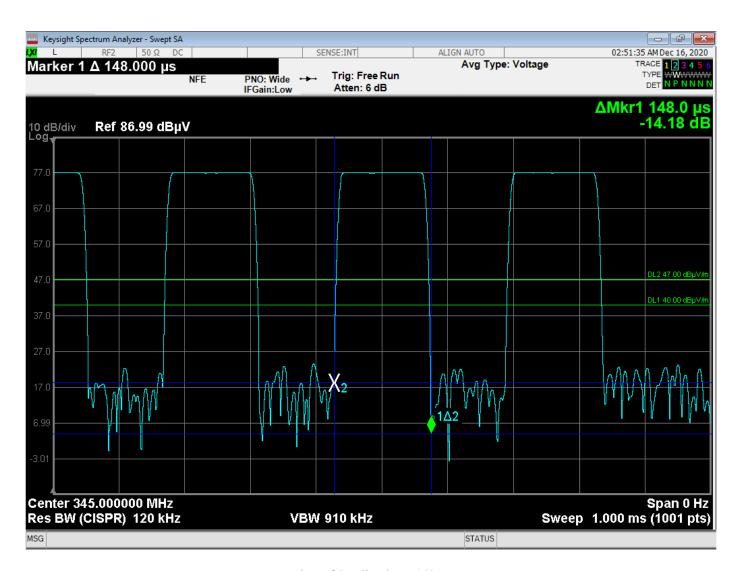

Time of Small Pulse = 148 us

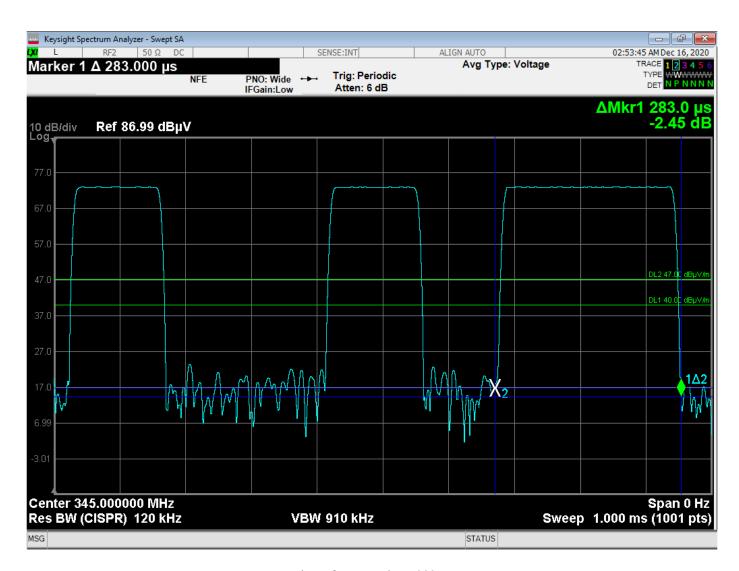

Time of Large Pulse = 283 us

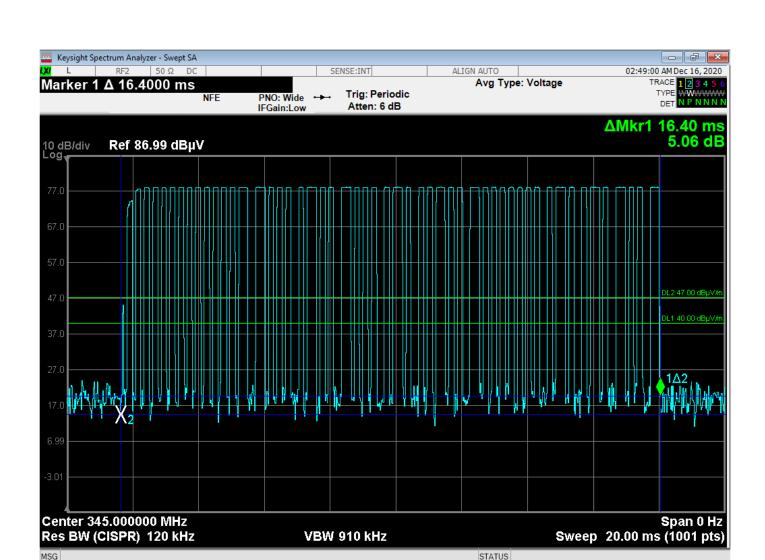

First Pulse = 1 = (1*23.2 us) = 23.2 usNumber of Small Pulses = 41 = (41*148 us) = 6068 usNumber of Large Pulses = 11 = (11*283 us) = 3113 us

Total On Time = 9204.2 us = 9.2042 ms

Duty Cycle = 9.2042 ms / 100 ms = 9.2042 %

The peak to average ratio is the maximum allowed of -20.00 dB