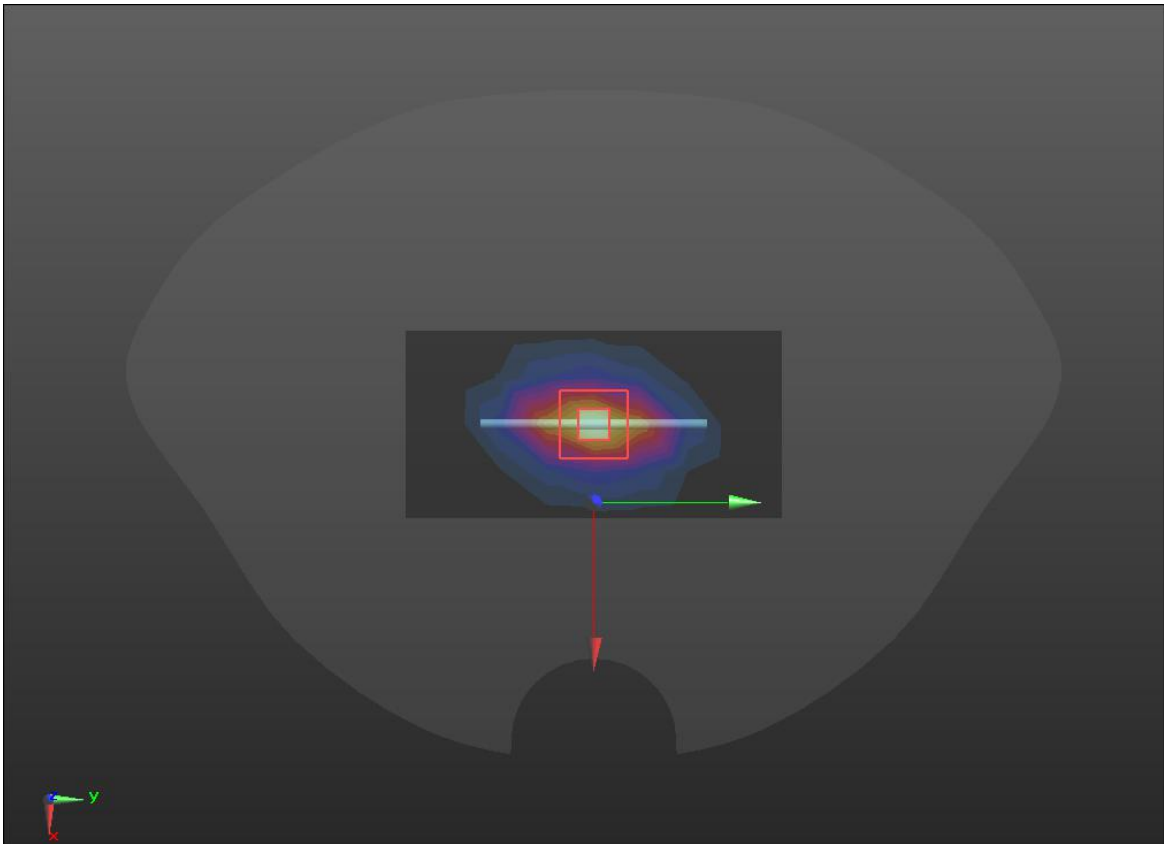
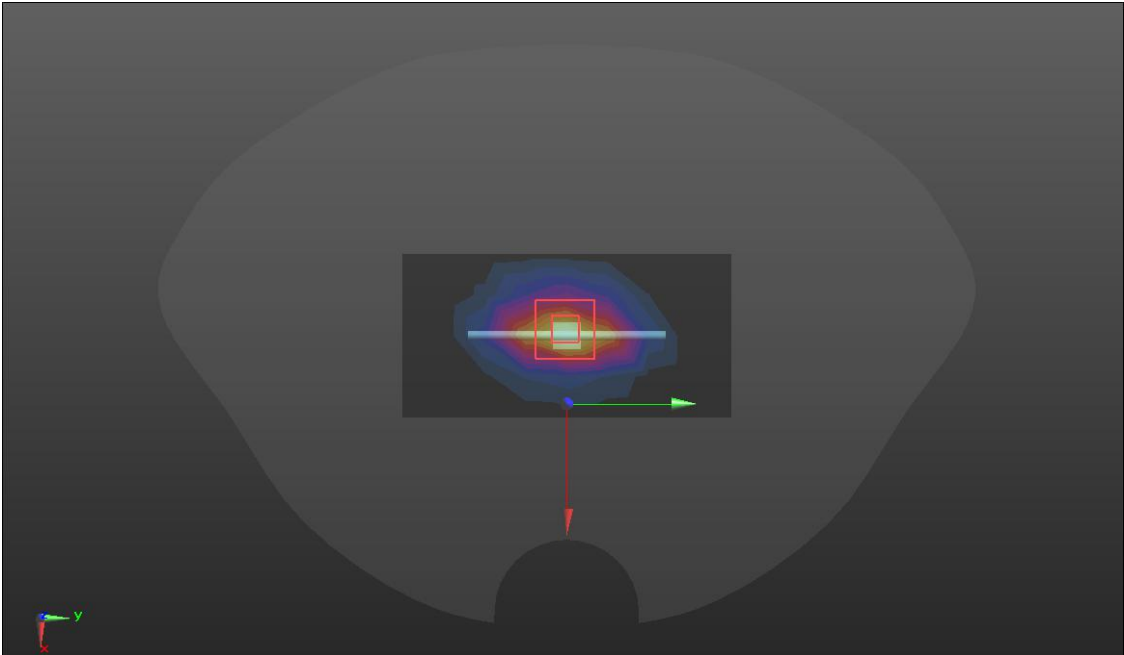
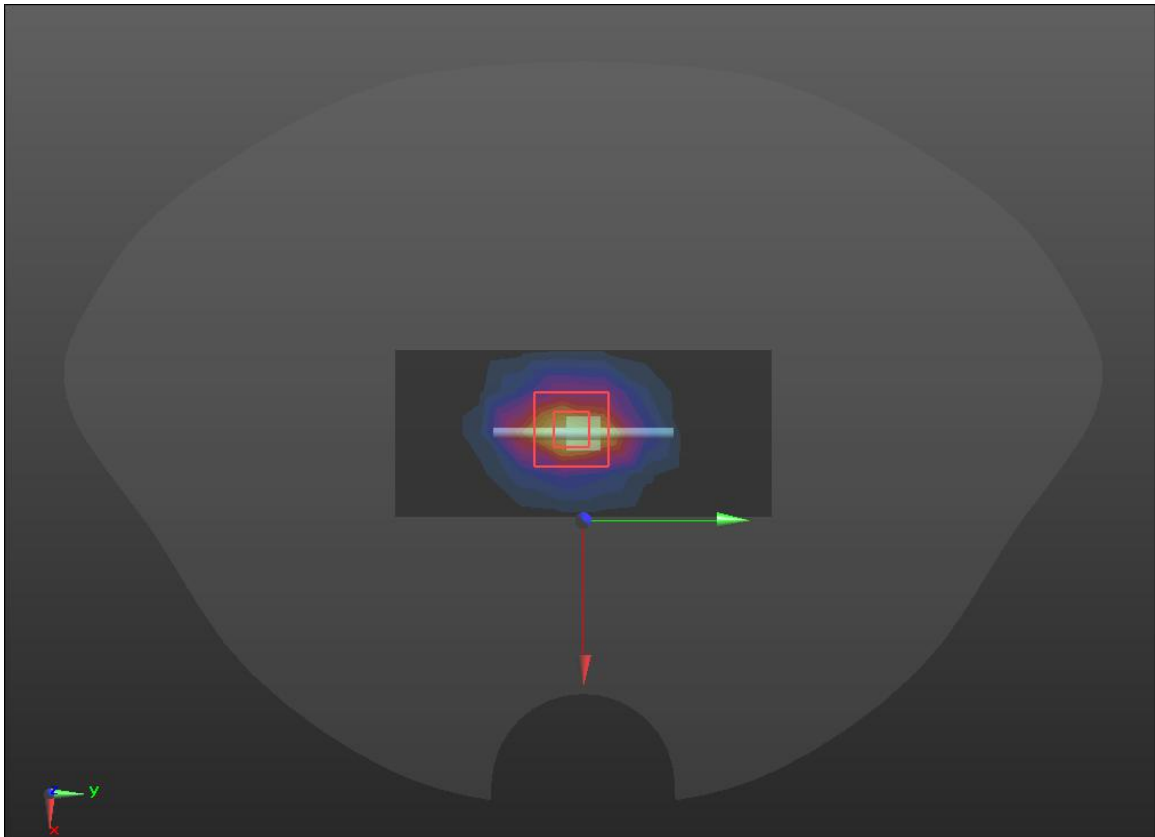


System check	1800MHz
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 40.69$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 13.9 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 105.5 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 16.8 W/kg SAR(1 g) = 9.63 W/kg; SAR(10 g) = 5.18 W/kg Maximum value of SAR (measured) = 15.1 W/kg 	

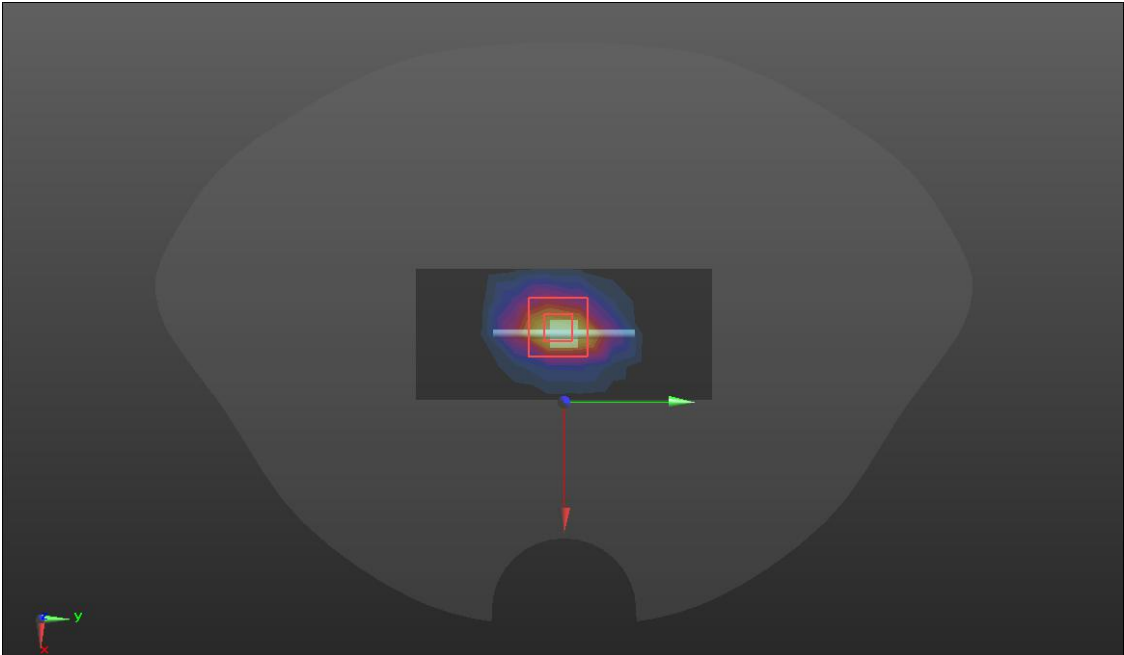
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
Communication System: UID 0, OFDM (0); Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 40.69$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D1800/Dipole 1800MHz/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 14.3 W/kg D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.8 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 16.7 W/kg SAR(1 g) = 9.70 W/kg; SAR(10 g) = 5.32 W/kg Maximum value of SAR (measured) = 15.2 W/kg 	

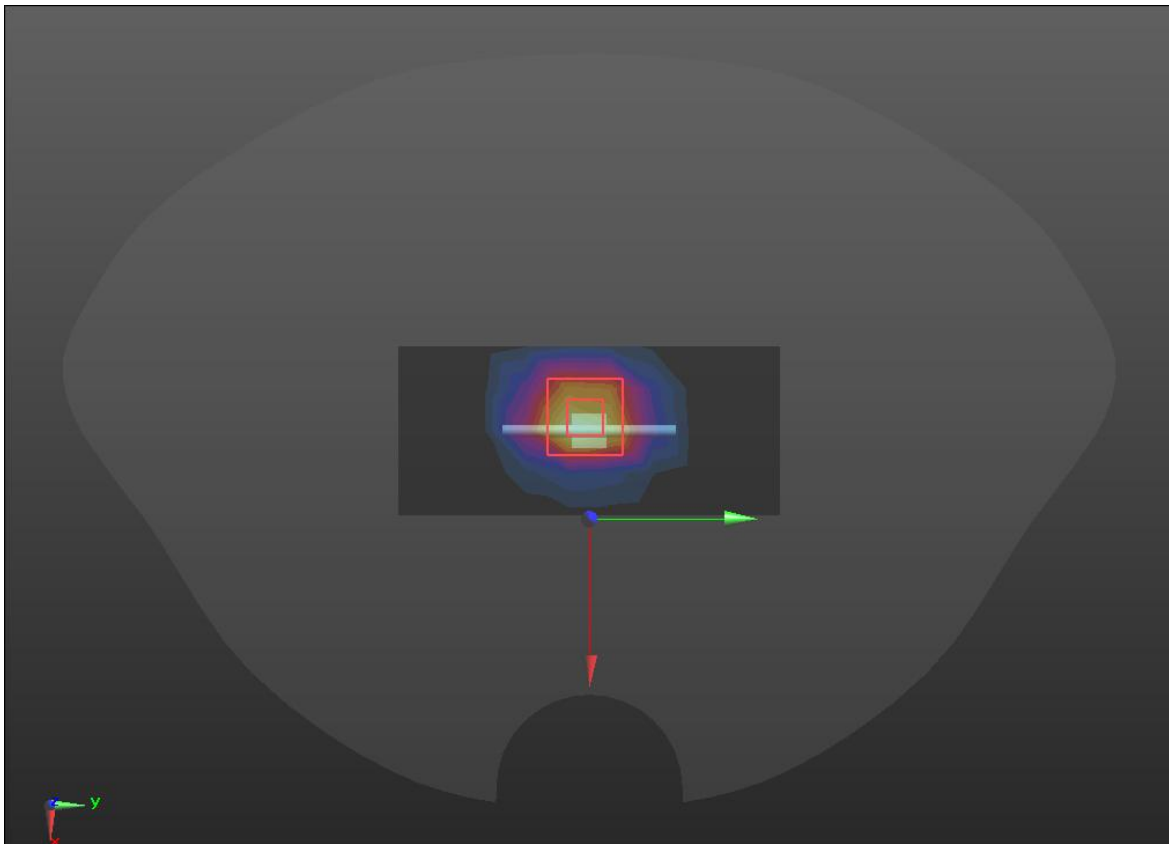
SRTC performed system check by using 250mw at antenna port

System check	2450MHz
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.73 \text{ S/m}$; $\epsilon_r = 39.04$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 19.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 109.6 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 24.1 W/kg SAR(1 g) = 13.05 W/kg; SAR(10 g) = 6.25 W/kg Maximum value of SAR (measured) = 21.3 W/kg 	

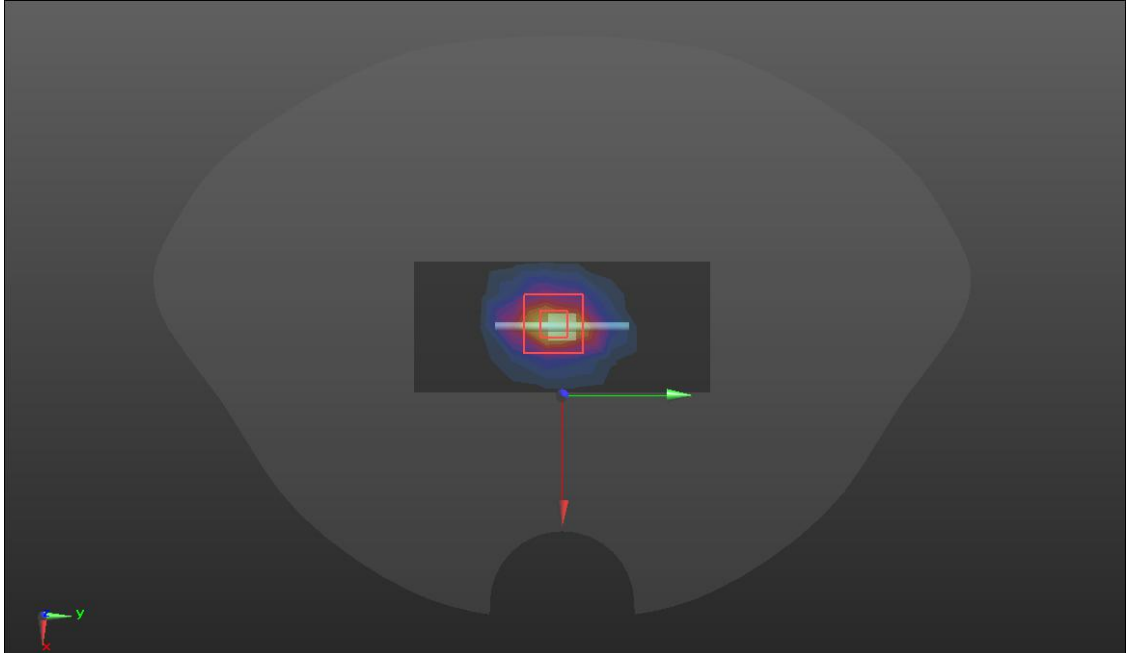
SRTC performed system check by using 250mw at antenna port

System check	2450MHz
Communication System: UID 0, OFDM (0); Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.73 \text{ S/m}$; $\epsilon_r = 39.04$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2450/Dipole 2450MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.6 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 25.1 W/kg SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.29 W/kg Maximum value of SAR (measured) = 20.3 W/kg 	

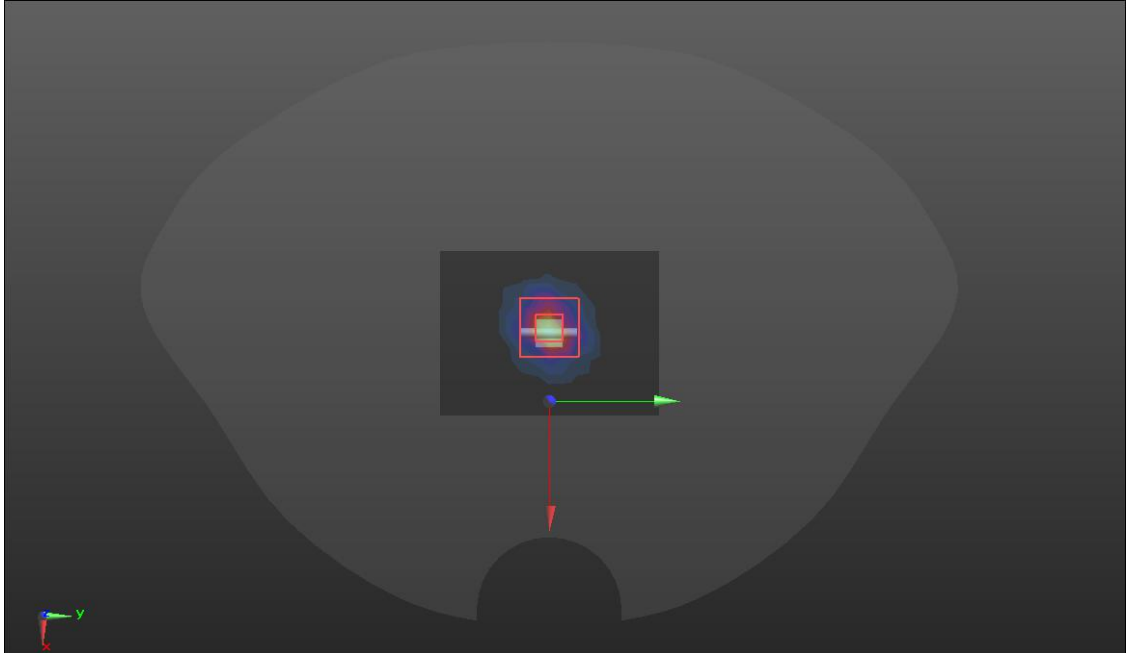
SRTC performed system check by using 250mw at antenna port

System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 37.16$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38) @ 2600 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.6 W/kg D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.0 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 27.6 W/kg SAR(1 g) = 14.66 W/kg; SAR(10 g) = 6.55 W/kg Maximum value of SAR (measured) = 21.3 W/kg 	

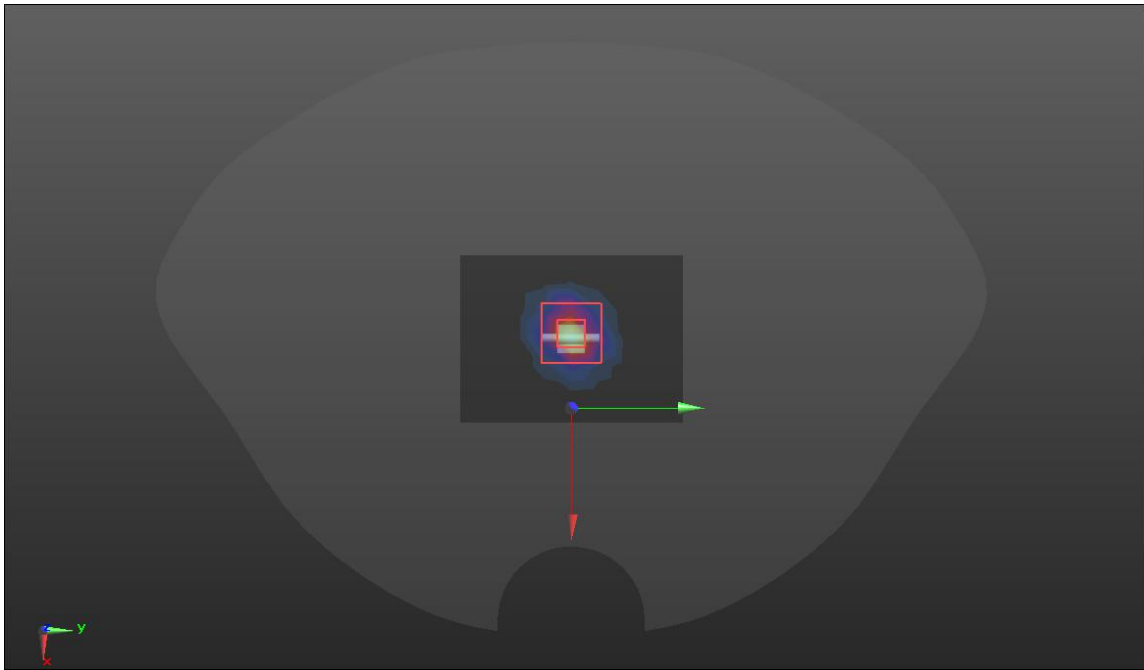
SRTC performed system check by using 250mw at antenna port

System check	2600MHz
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 37.16$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38) @ 2600 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 21.0 W/kg D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 107.0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 27.8 W/kg SAR(1 g) = 13.85 W/kg; SAR(10 g) = 6.31 W/kg Maximum value of SAR (measured) = 21.7 W/kg 	

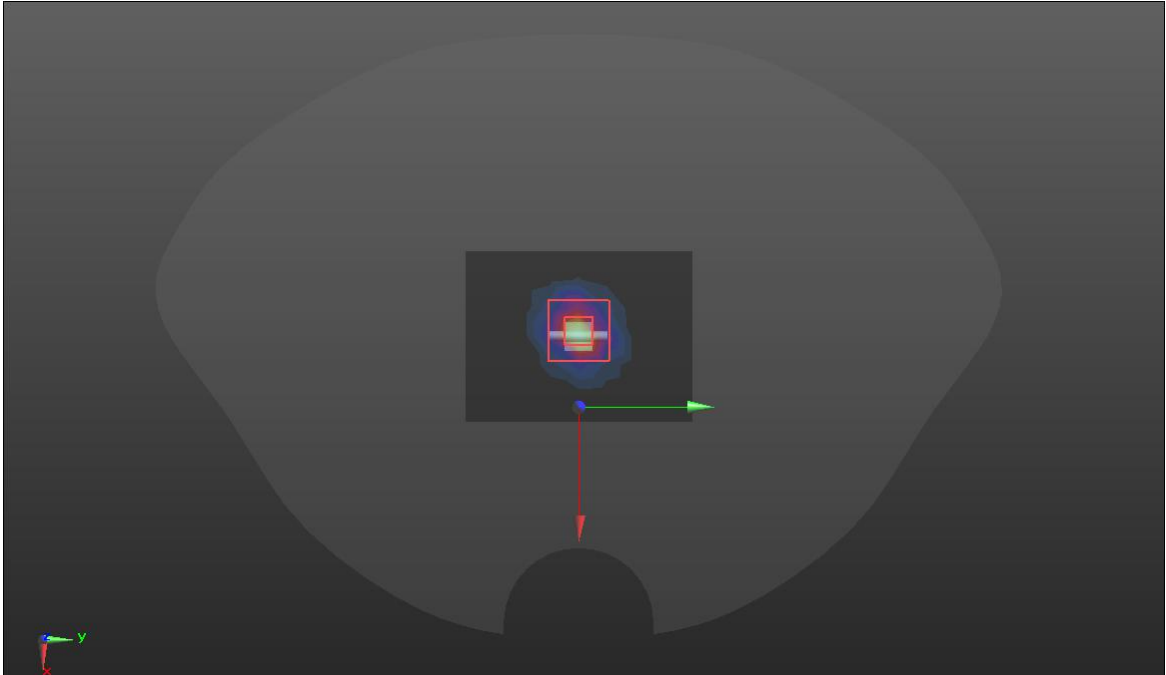
SRTC performed system check by using 250mw at antenna port

System check	5200MHz
Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.50 \text{ S/m}$; $\epsilon_r = 36.85$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58) @ 5200 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5200 SYSTEM CHECK 2 2/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 18.2 W/kg D5GV2 /D5200 SYSTEM CHECK 2 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 68.10 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 30.7 W/kg SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.2 W/kg Maximum value of SAR (measured) = 18.9 W/kg 	

SRTC performed system check by using 100mw at antenna port

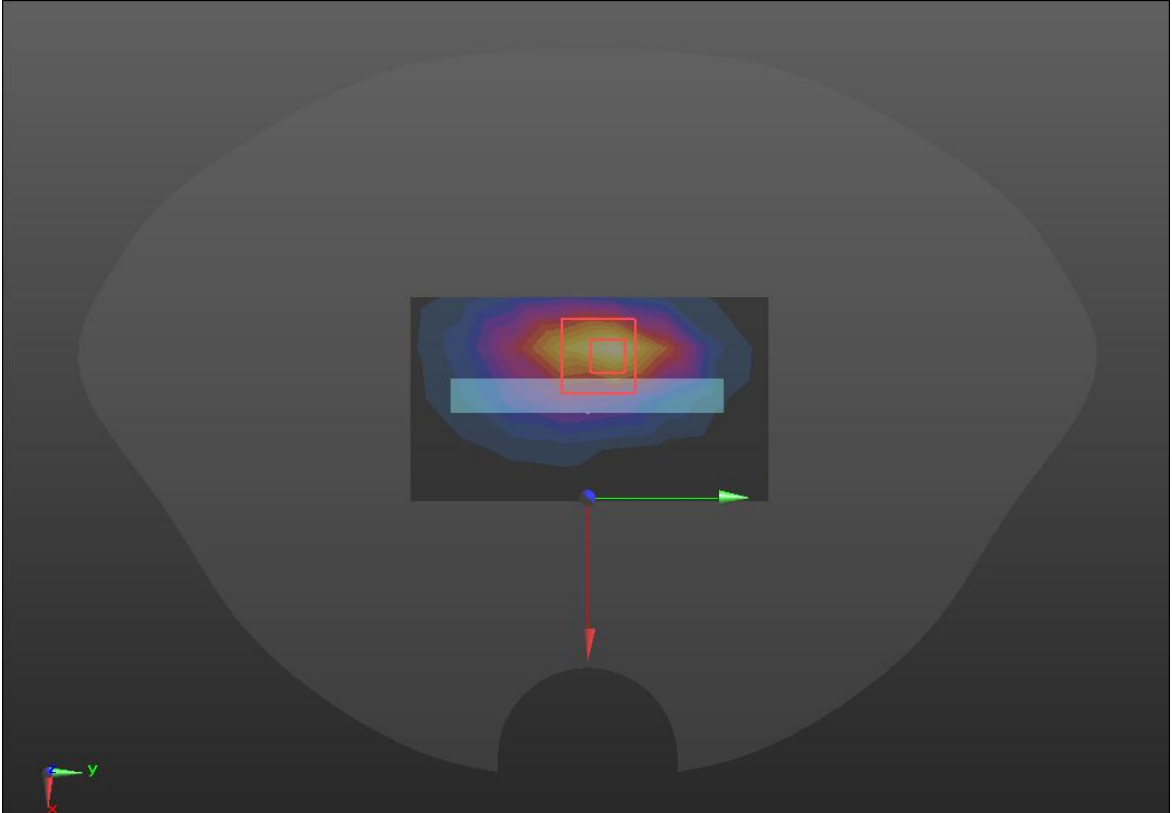
System check	5300MHz
Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.93 \text{ S/m}$; $\epsilon_r = 35.58$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52) @ 5300 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5300 SYSTEM CHECK/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 17.8 W/kg D5GV2 /D5300 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 66.76 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 30.5 W/kg SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.1 W/kg Maximum value of SAR (measured) = 18.4 W/kg 	

SRTC performed system check by using 100mw at antenna port

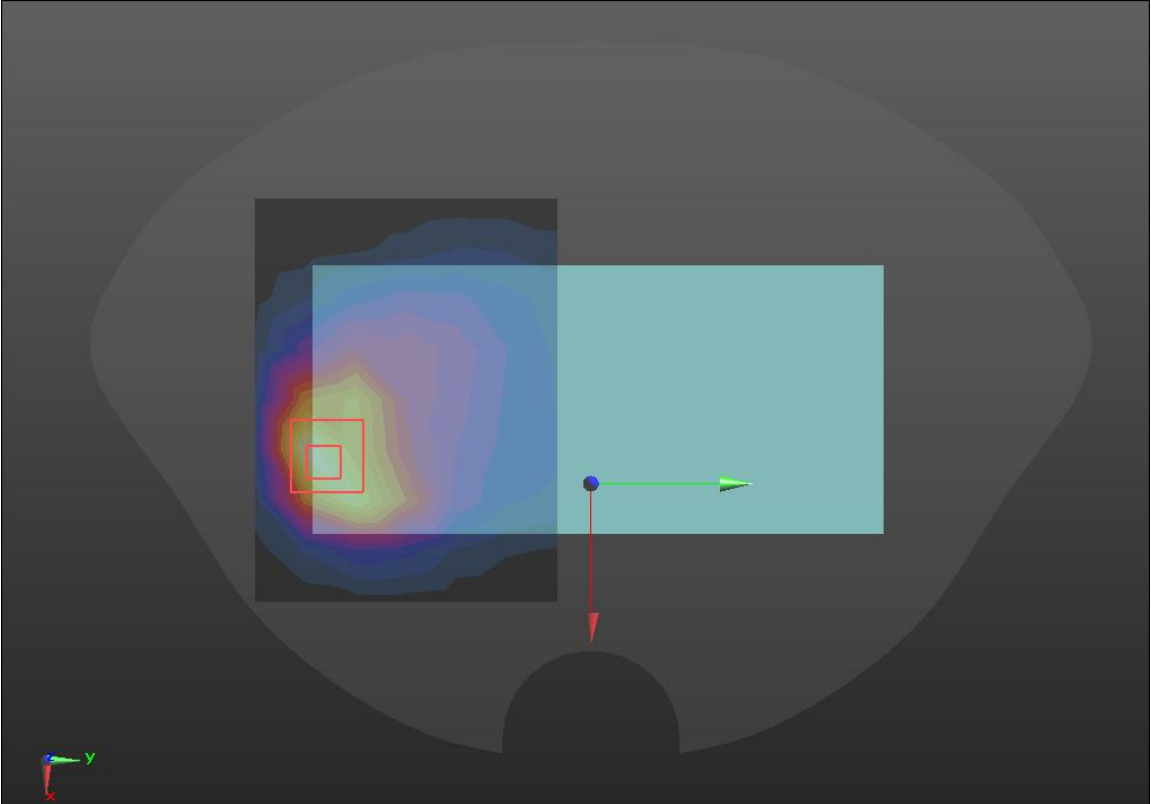
System check	5600MHz
Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.09 \text{ S/m}$; $\epsilon_r = 34.68$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5800 MHz; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5600 SYSTEM CHECK 2/Area Scan (7x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 18.1 W/kg D5GV2 /D5600 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 64.34 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 34.5 W/kg SAR(1 g) = 7.6 W/kg; SAR(10 g) = 2.2 W/kg Maximum value of SAR (measured) = 18.9 W/kg 	

SRTC performed system check by using 100mw at antenna port

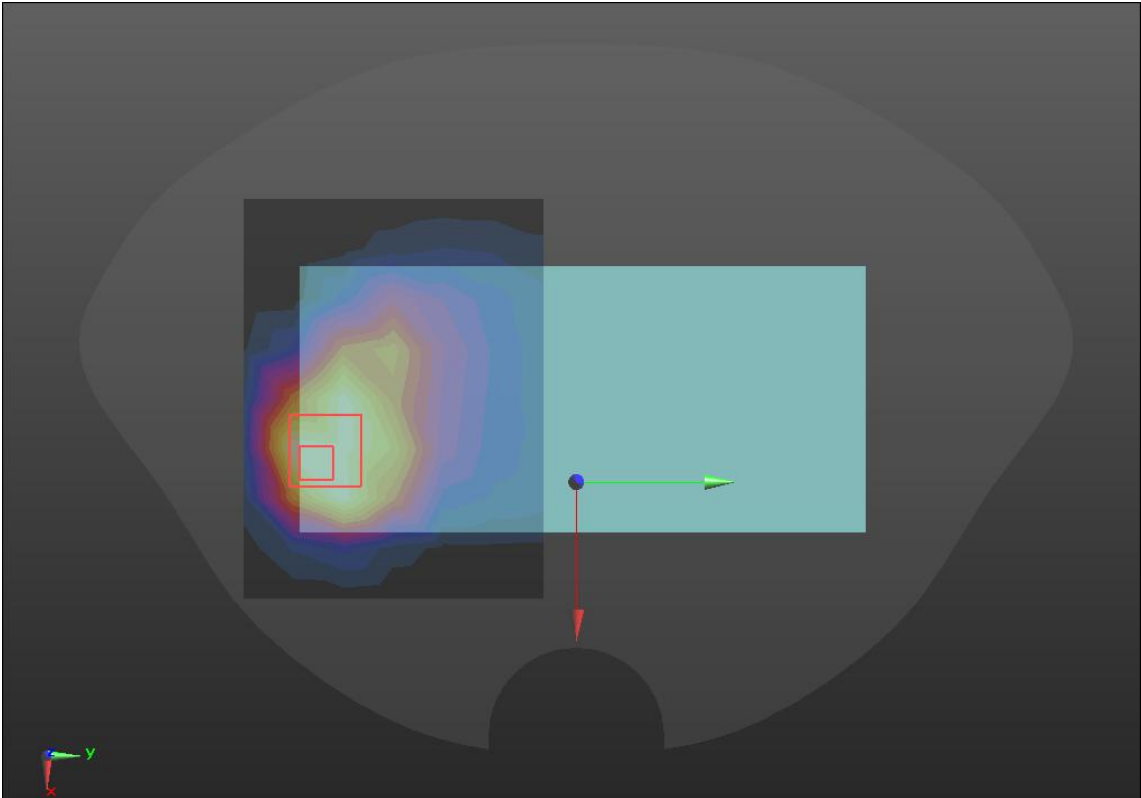
GSM 1900

Hotspot	Bottom
Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 4:8 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.02, 8.02, 8.02); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Bottom/GSM1900/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.63 W/kg Bottom/GSM1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.62 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 2.07 W/kg SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.563 W/kg Maximum value of SAR (measured) = 1.68 W/kg	
	

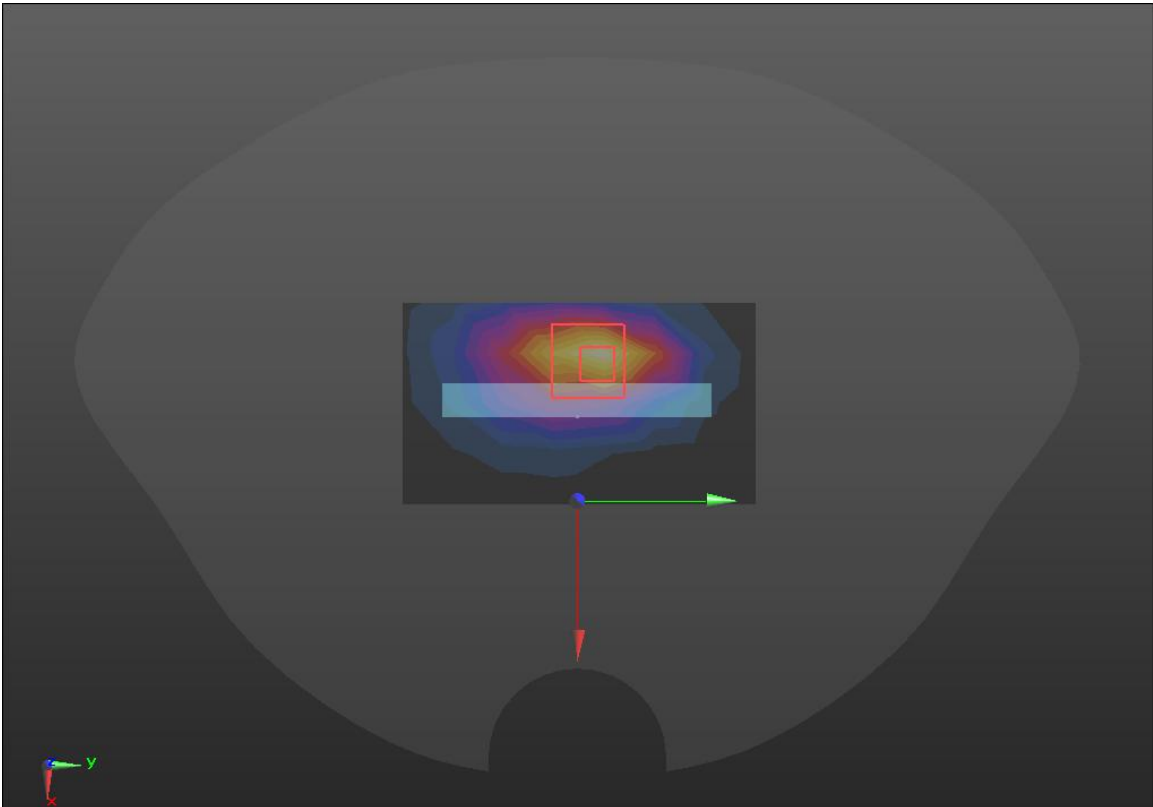
WCDMA B2

Hotspot	Back
Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Back/WCDMA B2/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.47 W/kg Back/WCDMA B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.31 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 2.10 W/kg SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.645 W/kg Maximum value of SAR (measured) = 1.75 W/kg	
	

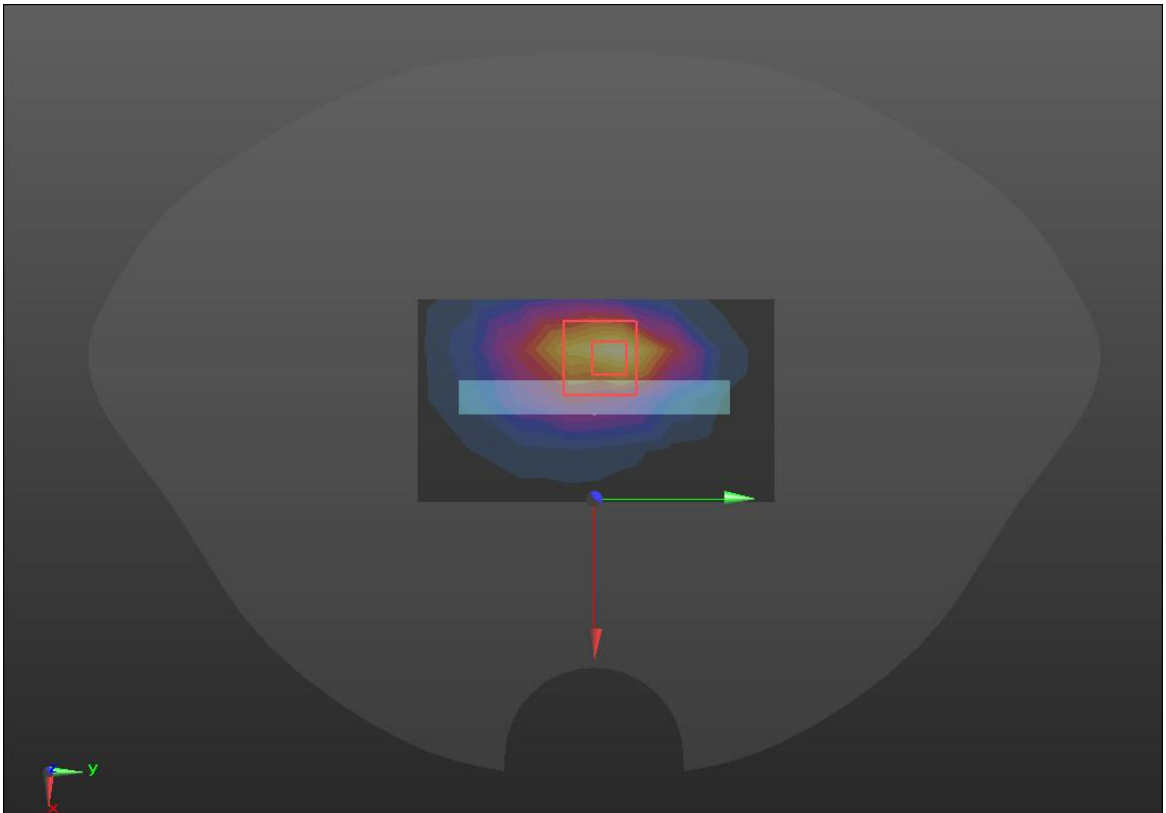
WCDMA B4

Hotspot	Back
Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.6 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 40.69$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Back/WCDMA B4/Area Scan (9x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.924 W/kg Back/WCDMA B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.934 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.37 W/kg SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.455 W/kg Maximum value of SAR (measured) = 1.13 W/kg	
	

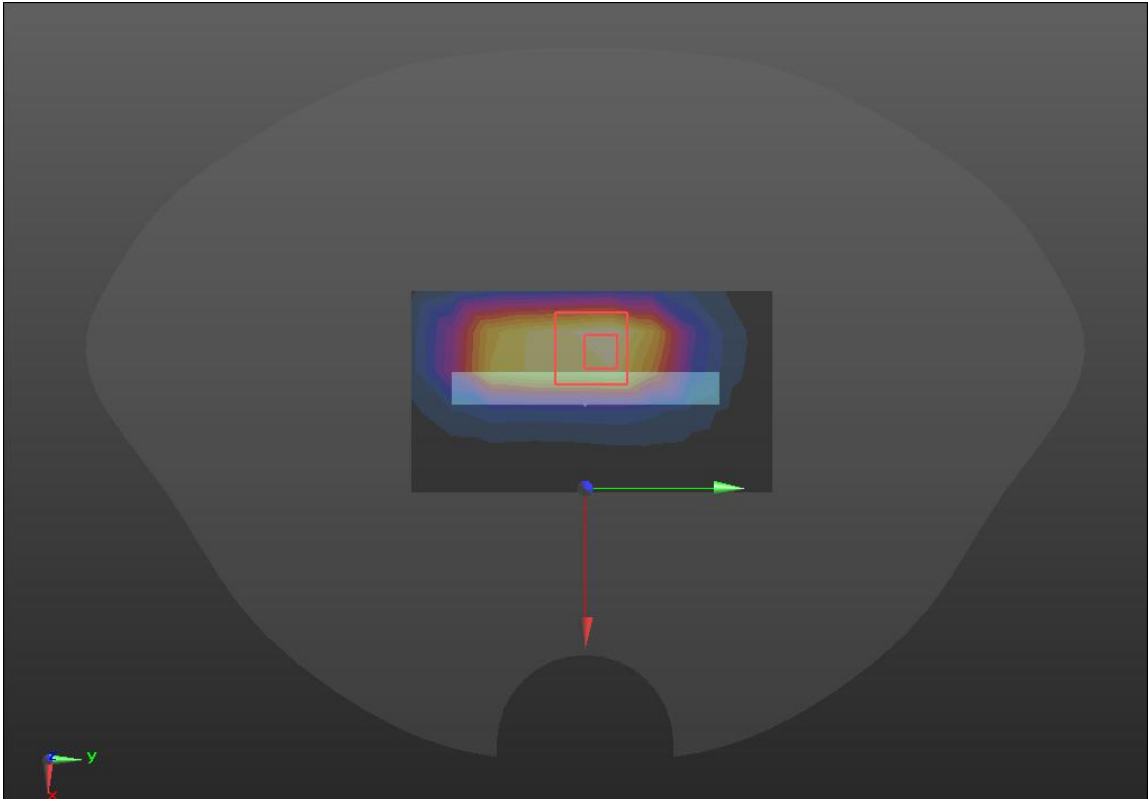
LTE Band2

Hotspot	Bottom
Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Bottom/LTE B2/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.97 W/kg Bottom/LTE B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 21.55 V/m; Power Drift = 0.11dB Peak SAR (extrapolated) = 2.53 W/kg SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.733 W/kg Maximum value of SAR (measured) = 2.08 W/kg	
	

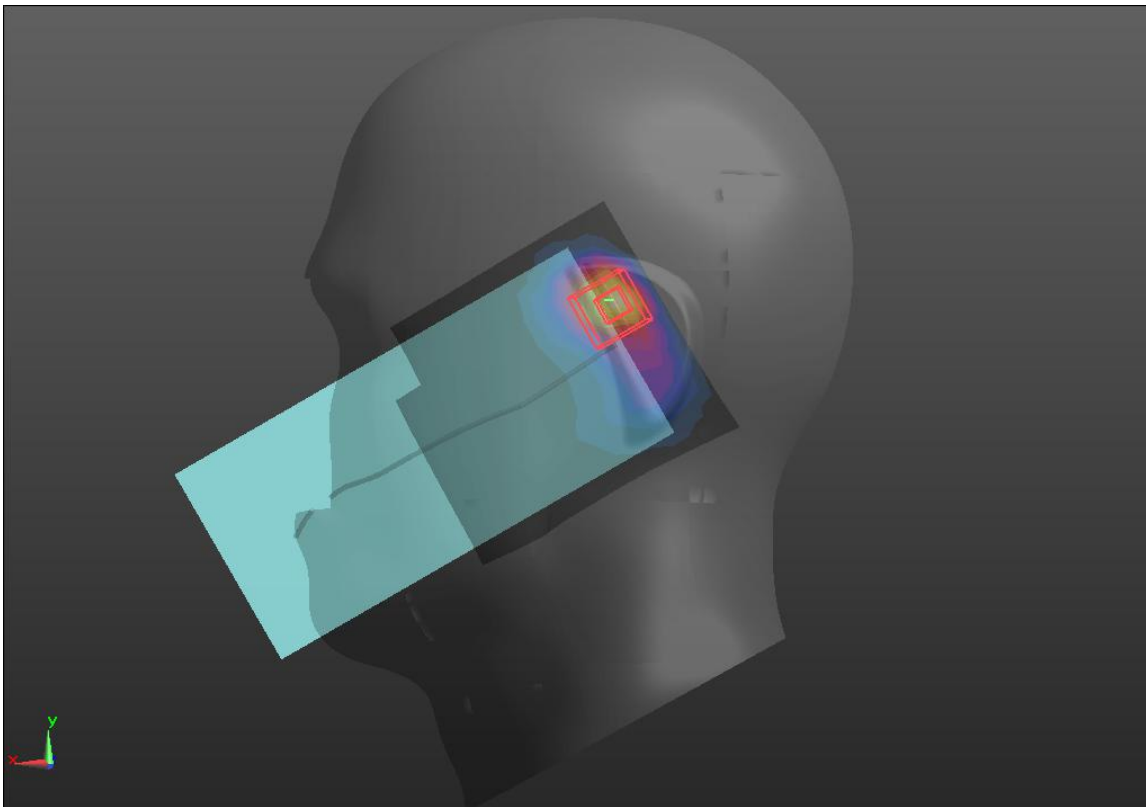
LTE Band4

Hotspot	Bottom
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Bottom/LTE B4/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.55 W/kg Bottom/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 20.26 V/m; Power Drift = 0.00dB Peak SAR (extrapolated) = 1.95 W/kg SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.604 W/kg. Maximum value of SAR (measured) = 1.63 W/kg	
	

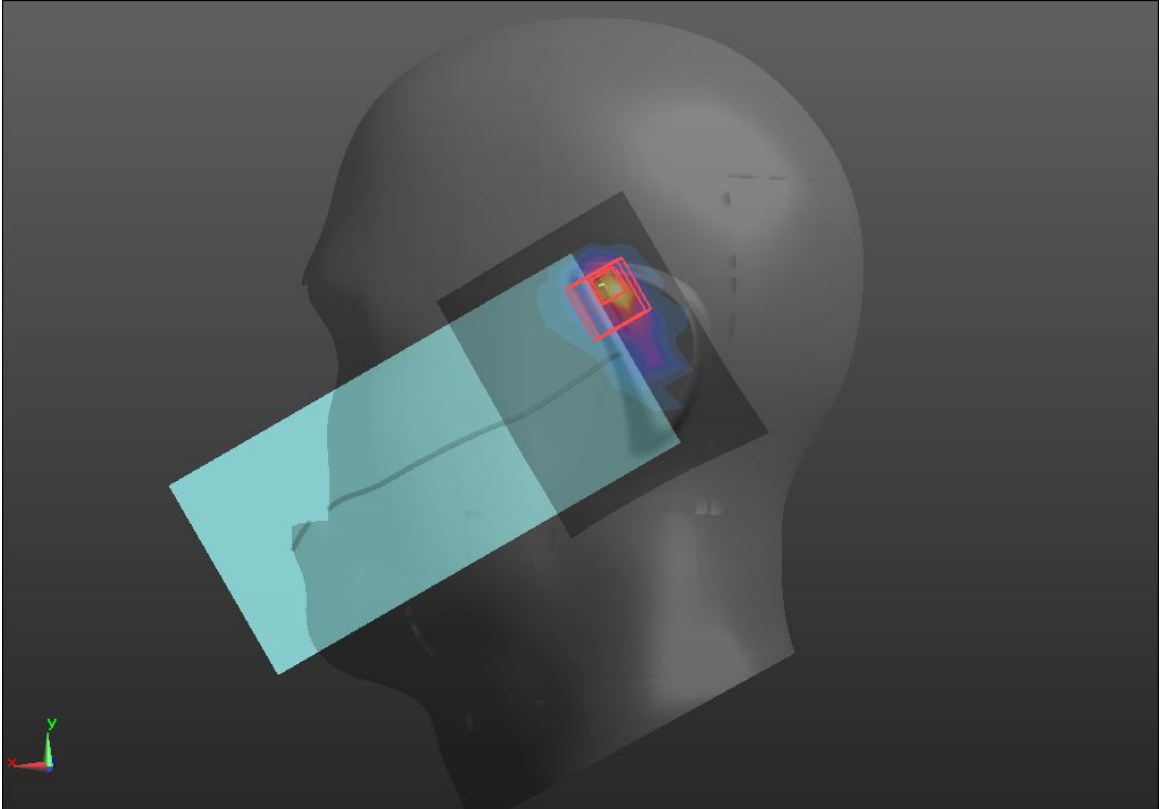
LTE Band41

Hotspot	Bottom
Communication System: UID 0, LTE Band 38 (0); Frequency: 2593 MHz; Duty Cycle: 0.633:1 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 37.16$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Bottom/LTE B41/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.919 W/kg Bottom/LTE B41/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.31 V/m; Power Drift = 0.06dB Peak SAR (extrapolated) = 1.48 W/kg SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.357 W/kg Maximum value of SAR (measured) = 1.19 W/kg	
	

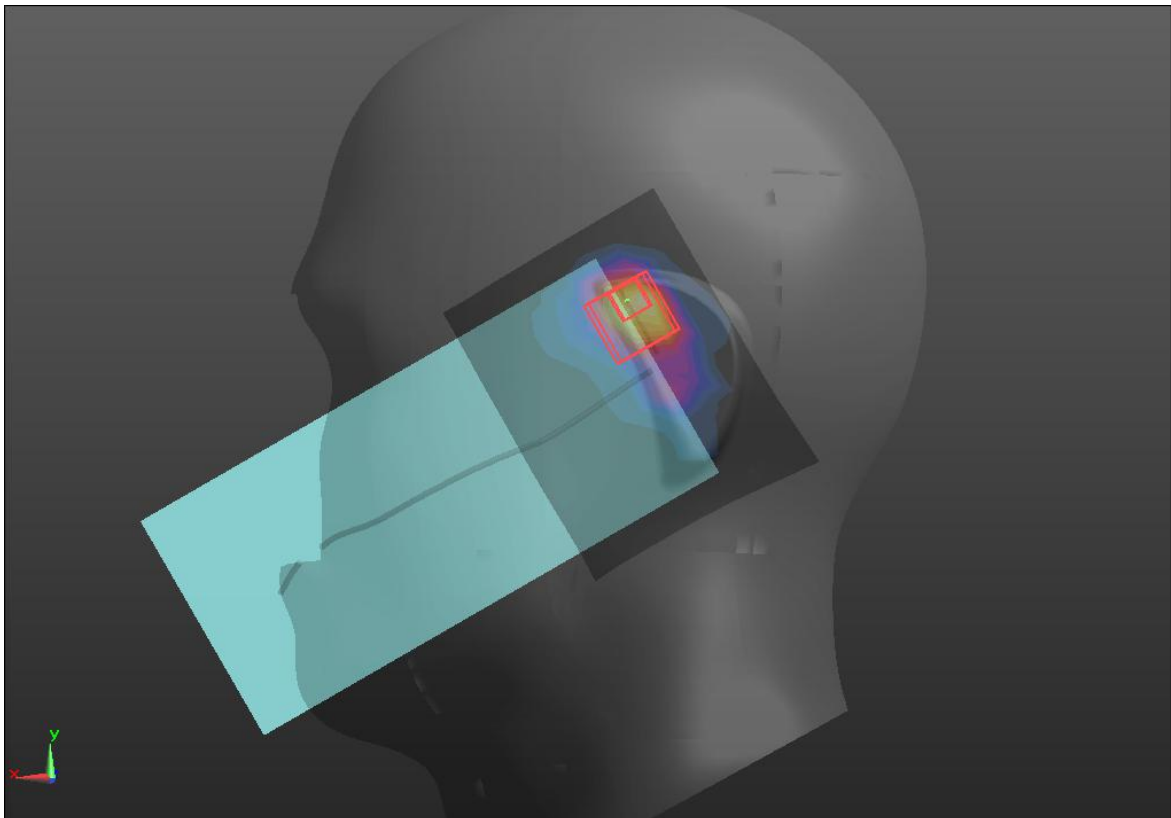
WIFI 2.4GHz

Head	Left Tilt
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 0.999:1 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Left Tilt/WIFI 2.4G/Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 1.77 W/kg Left Tilt/WIFI 2.4G/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 22.43 V/m; Power Drift = -0.18 dB Peak SAR (extrapolated) = 2.46 W/kg SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.513 W/kg Maximum value of SAR (measured) = 1.91 W/kg	
	

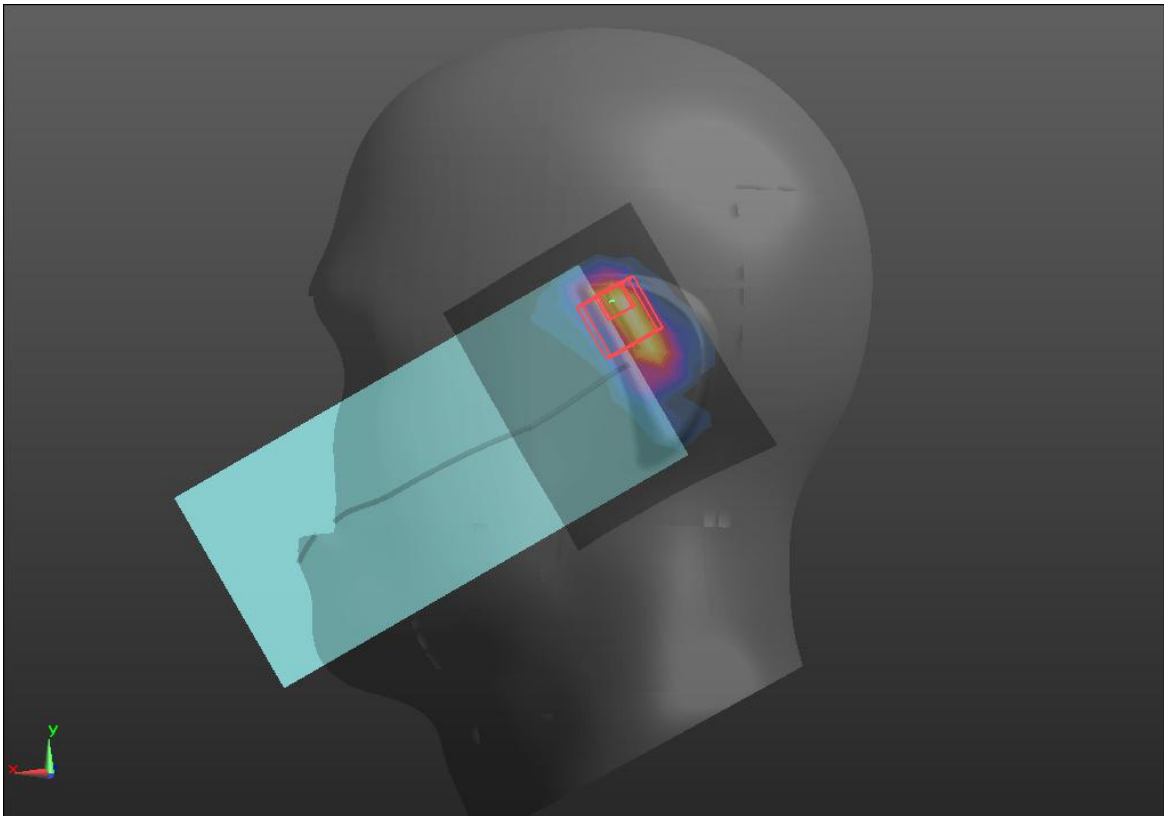
WIFI 5.2GHz

Head	Left Tilt
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5220 MHz; Duty Cycle: 0.992:1 Medium parameters used (interpolated): $f = 5220$ MHz; $\sigma = 4.50$ S/m; $\epsilon_r = 36.85$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Left Tilt/WIFI 5G NII1/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.56 W/kg Left Tilt/WIFI 5G NII1/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 8.409 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 3.19 W/kg SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.198 W/kg Maximum value of SAR (measured) = 1.67 W/kg	
	

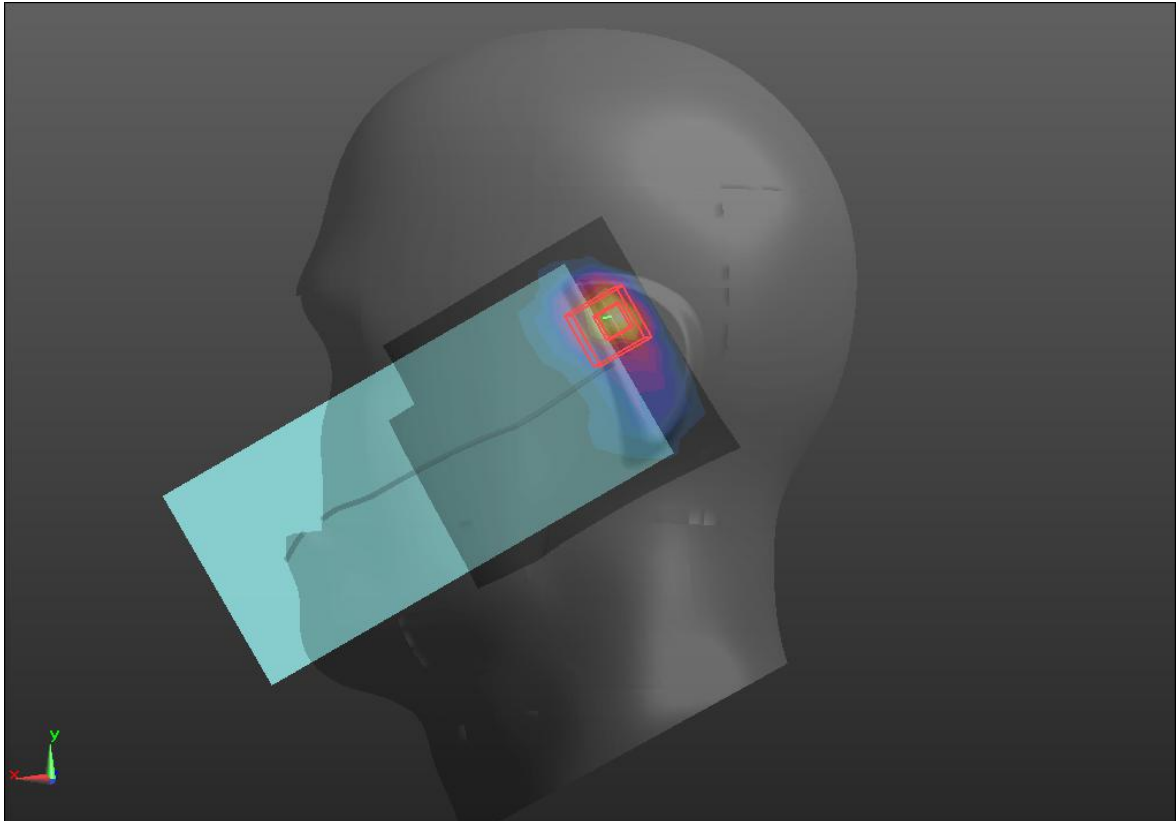
WIFI 5.3GHz

Head	Left Tilt
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 0.993:1 Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 35.58$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Left Tilt/WIFI 5G NII2A/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.04 W/kg Left Tilt/WIFI 5G NII2A/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 9.770 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 2.72 W/kg SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.190 W/kg Maximum value of SAR (measured) = 1.65 W/kg	
	

WIFI 5.6GHz

Head	Left Tilt
Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 0.9926:1 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.68$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05); Calibrated: 2021/10/20; - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Left Tilt/WIFI 5G NII2C/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.65 W/kg Left Tilt/WIFI 5G NII2C/Zoom Scan (6x6x12)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm Reference Value = 13.46 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 4.33 W/kg SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.237 W/kg Maximum value of SAR (measured) = 2.39 W/kg	
	

BT

Head	Left Tilt
Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.787:1 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 10/20/2021 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/8/2021 - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660 - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483) Left Tilt /BT/Area Scan (10x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.240 W/kg Left Tilt/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.260 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.337 W/kg SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.064 W/kg Maximum value of SAR (measured) = 0.262 W/kg 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.