

# TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.  
Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China  
Report Number : RA221021-48471E-20A  
FCC ID: 2ATZ4-CG1MG3M

## Test Standard (s)

FCC Part 2.1093

## Sample Description

Product Type: Smart phone  
Model No.: G1 Max  
Multiple Models: C1 Max(Please refer to DOS for Model difference)  
Trade Mark: UMIDIGI  
Date Received: 2022/10/29  
Date of Test: 2022/11/07-2022/11/19  
Report Date: 2022/11/23

Test Result:

Pass\*

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:



Lance Li

EMC Engineer

## Approved By:



Candy Li

EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".  
Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "\*". Customer model name, addresses, names, trademarks etc. are not considered data.  
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

| Attestation of Test Results |             |                                  |              |
|-----------------------------|-------------|----------------------------------|--------------|
| MODE                        |             | Max. SAR Level(s) Reported(W/kg) | Limit (W/kg) |
| GSM 850                     | 1g Head SAR | 0.10                             | 1.6          |
|                             | 1g Body SAR | 0.09                             |              |
| PCS 1900                    | 1g Head SAR | 0.68                             |              |
|                             | 1g Body SAR | 0.30                             |              |
| WCDMA Band 2                | 1g Head SAR | 0.74                             |              |
|                             | 1g Body SAR | 0.59                             |              |
| WCDMA Band 5                | 1g Head SAR | 0.17                             |              |
|                             | 1g Body SAR | 0.22                             |              |
| LTE Band 2                  | 1g Head SAR | 0.72                             |              |
|                             | 1g Body SAR | 0.70                             |              |
| LTE Band 5                  | 1g Head SAR | 0.28                             |              |
|                             | 1g Body SAR | 0.21                             |              |
| LTE Band 7                  | 1g Head SAR | 0.60                             |              |
|                             | 1g Body SAR | 0.48                             |              |
| LTE Band 12                 | 1g Head SAR | 0.60                             |              |
|                             | 1g Body SAR | 0.48                             |              |
| LTE Band 41                 | 1g Head SAR | 0.21                             |              |
|                             | 1g Body SAR | 0.44                             |              |
| 2.4G Wi-Fi                  | 1g Head SAR | 0.46                             |              |
|                             | 1g Body SAR | 0.22                             |              |
| 5.2G Wi-Fi                  | 1g Head SAR | 0.84                             |              |
|                             | 1g Body SAR | 0.24                             |              |
| 5.8G Wi-Fi                  | 1g Head SAR | 0.41                             |              |
|                             | 1g Body SAR | 0.07                             |              |
| Bluetooth                   | 1g Head SAR | 0.01                             |              |
|                             | 1g Body SAR | 0.09                             |              |
| Simultaneous                | 1g Head SAR | 1.58                             |              |
|                             | 1g Body SAR | 0.94                             |              |
|                             | 1g Body SAR | 0.94(Hotspot)                    |              |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicable Standards</b>                                                                                                                                                                                                                                                                                                                                                                                                                                   | <b>FCC 47 CFR part 2.1093</b><br>Radiofrequency radiation exposure evaluation: portable devices                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>RF Exposure Procedures: TCB Workshop October 2016(Bluetooth Duty Factor)</b>                                                                                                                                                                                                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>IEEE1528:2013</b><br>IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques                                                                                                                                                                                               |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>KDB procedures</b><br>KDB 447498 D04 Interim General RF Exposure Guidance v01<br>KDB 648474 D04 Handset SAR v01r03<br>KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04<br>KDB 865664 D02 RF Exposure Reporting v01r02<br>KDB 941225 D01 3G SAR Procedures v03r01<br>KDB 941225 D05 SAR for LTE Devices v02r05<br>KDB 941225 D06 Hotspot Mode v02r01<br>KDB 248227 D01 802.11 Wi-Fi SAR v02r02 |
| <b>Note:</b> This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in <b>FCC 47 CFR part 2.1093</b> and has been tested in Accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.<br><b>The results and statements contained in this report pertain only to the device(s) evaluated.</b> |                                                                                                                                                                                                                                                                                                                                                                                                        |

## **TABLE OF CONTENTS**

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>DOCUMENT REVISION HISTORY</b>                           | <b>5</b>  |
| <b>EUT DESCRIPTION</b>                                     | <b>6</b>  |
| TECHNICAL SPECIFICATION                                    | 6         |
| <b>REFERENCE, STANDARDS, AND GUIDELINES</b>                | <b>7</b>  |
| SAR LIMITS                                                 | 8         |
| <b>FACILITIES</b>                                          | <b>9</b>  |
| <b>DESCRIPTION OF TEST SYSTEM</b>                          | <b>10</b> |
| <b>EQUIPMENT LIST AND CALIBRATION</b>                      | <b>16</b> |
| EQUIPMENTS LIST & CALIBRATION INFORMATION                  | 16        |
| <b>SAR MEASUREMENT SYSTEM VERIFICATION</b>                 | <b>17</b> |
| LIQUID VERIFICATION                                        | 17        |
| SYSTEM ACCURACY VERIFICATION                               | 20        |
| SAR SYSTEM VALIDATION DATA                                 | 21        |
| <b>EUT TEST STRATEGY AND METHODOLOGY</b>                   | <b>28</b> |
| TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON'S EAR | 28        |
| CHEEK/TOUCH POSITION                                       | 29        |
| EAR/TILT POSITION                                          | 29        |
| TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS      | 30        |
| TEST DISTANCE FOR SAR EVALUATION                           | 30        |
| SAR EVALUATION PROCEDURE                                   | 31        |
| <b>CONDUCTED OUTPUT POWER MEASUREMENT</b>                  | <b>32</b> |
| TEST PROCEDURE                                             | 32        |
| RADIO CONFIGURATION                                        | 32        |
| MAXIMUM TARGET OUTPUT POWER                                | 38        |
| <b>STANDALONE SAR TEST EXCLUSION CONSIDERATIONS</b>        | <b>52</b> |
| ANTENNA DISTANCE TO EDGE:                                  | 54        |
| STANDALONE SAR TEST EXCLUSION CONSIDERATIONS(KDB)          | 55        |
| SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT  | 57        |
| EXTREMITY EXPOSURE CONFIGURATIONS                          | 57        |
| <b>SAR MEASUREMENT RESULTS</b>                             | <b>58</b> |
| SAR TEST DATA                                              | 58        |
| <b>SAR MEASUREMENT VARIABILITY</b>                         | <b>73</b> |
| <b>SAR SIMULTANEOUS TRANSMISSION DESCRIPTION</b>           | <b>74</b> |
| <b>SAR PLOTS</b>                                           | <b>75</b> |
| <b>APPENDIX A MEASUREMENT UNCERTAINTY</b>                  | <b>76</b> |
| <b>APPENDIX B EUT TEST POSITION PHOTOS</b>                 | <b>77</b> |
| <b>APPENDIX C PROBE CALIBRATION CERTIFICATES</b>           | <b>78</b> |
| <b>APPENDIX D DIPOLE CALIBRATION CERTIFICATES</b>          | <b>79</b> |

## DOCUMENT REVISION HISTORY

| Revision Number | Report Number       | Description of Revision | Date of Revision |
|-----------------|---------------------|-------------------------|------------------|
| 0               | RA221021-48471E-20A | Original Report         | 2022/11/23       |

## EUT DESCRIPTION

This report has been prepared on behalf of **Shenzhen Youmi Intelligent Technology Co., Ltd.** and their product **Smart phone**, Model: **G1 Max**, FCC ID: **2ATZ4-CG1MG3M** or the EUT (Equipment under Test) as referred to in the rest of this report.

*Notes: This series products model: G1 Max (Serial number: RA221021-48471-SA-S1) and C1 Max (Serial number: RA221021-48471-SA-S2); there are identical device, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.*

## Technical Specification

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Device Type:</b>           | Portable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Device Size:</b>           | 164.11mm x 76.15mm x 8.75mm (Both G1 Max and C1 Max)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Exposure Category:</b>     | Population / Uncontrolled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Antenna Type(s):</b>       | Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Power Sensor</b>           | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>DTM Type:</b>              | Class B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Multi-slot Class:</b>      | GPRS(Class 12)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Power Class</b>            | LTE Band 41 for power class 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Body-Worn Accessories:</b> | Headset                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Face-Head Accessories:</b> | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Proximity Sensor:</b>      | None Proximity Sensor for power reduction                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Operation Mode :</b>       | GSM Voice, GPRS Data<br>WCDMA( R99 (Voice+Data), HSDPA/HSUPA/ HSPA+)<br>FDD-LTE, TDD-LTE, Wi-Fi, Bluetooth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Frequency Band:</b>        | GSM 850: 824-849 MHz(TX); 869-894 MHz(RX)<br>PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX)<br>LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX)<br>LTE Band 5: 824-849 MHz(TX) ; 869-894 MHz (RX)<br>LTE Band 7: 2500-2570MHz(TX); 2620-2690MHz(RX)<br>LTE Band 12: 698-716 MHz(TX) ; 729-746 MHz(RX)<br>LTE Band 41: 2535-2655 MHz(TX&RX)<br>Wi-Fi 2.4G: 2412 -2472 MHz(TX&RX)<br>Wi-Fi 5.2G:5150-5250MHz(TX&RX)<br>Wi-Fi 5.8G:5725-5850MHz(TX&RX)<br>Bluetooth: 2402 -2480 MHz(TX&RX)<br>BLE: 2402 -2480 MHz(TX&RX) |
| <b>Power Source:</b>          | Rechargeable Battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Normal Operation:</b>      | Head and Body-worn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

---

## REFERENCE, STANDARDS, AND GUIDELINES

---

### FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

### IC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ISS-102 for an uncontrolled environment. According to the Safety Code 6 Health Canada's Radiofrequency Exposure Guidelines, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

**SAR Limits****FCC Limit(1g Tissue)**

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | <b>1.60</b>                                                    | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

**IC Limit(1g Tissue)**

| EXPOSURE LIMITS                                                  | SAR (W/kg)                                                     |                                                        |
|------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------|
|                                                                  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |
| Spatial Average<br>(averaged over the whole body)                | 0.08                                                           | 0.4                                                    |
| Spatial Peak<br>(averaged over any 1 g of tissue)                | <b>1.60</b>                                                    | 8.0                                                    |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0                                                            | 20.0                                                   |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) applied to the EUT.



---

## FACILITIES

---

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01 .

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

The test site has been registered with ISED Canada under ISED Canada Registration Number CN0016.


## DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



### DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

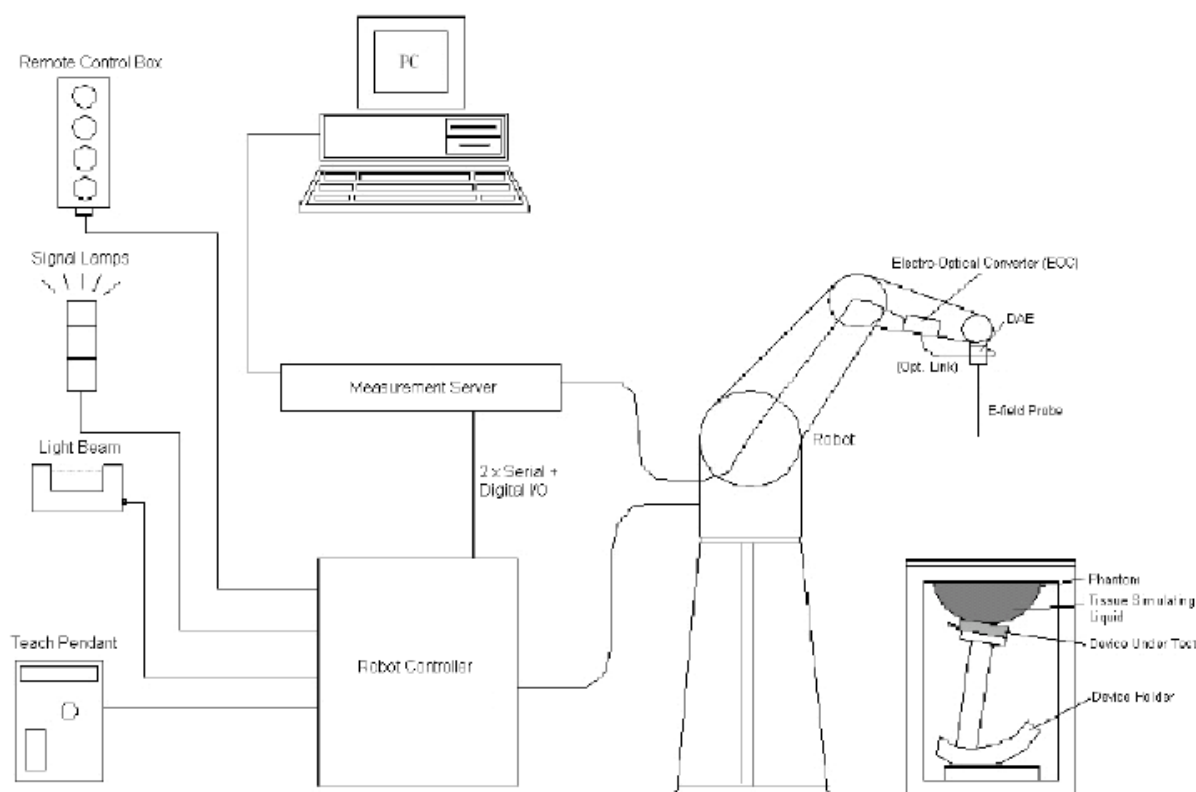

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### **DASY5 Measurement Server**

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

### **Data Acquisition Electronics**

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

**EX3DV4 E-Field Probes**

|                      |                                                                                                                                                                                                               |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Frequency</b>     | 10 MHz to > 6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                                                |
| <b>Directivity</b>   | $\pm 0.3$ dB in TSL (rotation around probe axis)<br>$\pm 0.5$ dB in TSL (rotation normal to probe axis)                                                                                                       |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to > 100 mW/g<br>Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)                                                                                                                        |
| <b>Dimensions</b>    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                                                                          |
| <b>Application</b>   | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |
| <b>Compatibility</b> | DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI                                                                                                                                                                |

**SAM Twin Phantom**

The SAM Twin Phantom (shown in front of DASY5) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm..

When the phantom is mounted inside allocated slot of the DASY5 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY5 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

**Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7441 Calibrated: 2022/05/16**

| Calibration Frequency Point(MHz) | Frequency Range(MHz) |      | Conversion Factor |       |       |
|----------------------------------|----------------------|------|-------------------|-------|-------|
|                                  | From                 | To   | X                 | Y     | Z     |
| 750 Head                         | 650                  | 850  | 10.04             | 10.04 | 10.04 |
| 900 Head                         | 850                  | 1000 | 9.61              | 9.61  | 9.61  |
| 1450 Head                        | 1350                 | 1550 | 8.52              | 8.52  | 8.52  |
| 1750 Head                        | 1650                 | 1850 | 8.32              | 8.32  | 8.32  |
| 1900 Head                        | 1850                 | 1950 | 7.94              | 7.94  | 7.94  |
| 2000 Head                        | 1950                 | 2100 | 7.99              | 7.99  | 7.99  |
| 2300 Head                        | 2200                 | 2400 | 7.78              | 7.78  | 7.78  |
| 2450 Head                        | 2400                 | 2550 | 7.54              | 7.54  | 7.54  |
| 2600 Head                        | 2550                 | 2700 | 7.30              | 7.30  | 7.30  |
| 3300 Head                        | 3200                 | 3400 | 7.09              | 7.09  | 7.09  |
| 3500 Head                        | 3400                 | 3600 | 6.89              | 6.89  | 6.89  |
| 3700 Head                        | 3600                 | 3800 | 6.55              | 6.55  | 6.55  |
| 3900 Head                        | 3800                 | 4000 | 6.60              | 6.60  | 6.60  |
| 4400 Head                        | 4300                 | 4500 | 6.34              | 6.34  | 6.34  |
| 4600 Head                        | 4500                 | 4700 | 6.26              | 6.26  | 6.26  |
| 4800 Head                        | 4700                 | 4900 | 6.16              | 6.16  | 6.16  |
| 4950 Head                        | 4900                 | 5050 | 5.85              | 5.85  | 5.85  |
| 5250 Head                        | 5140                 | 5360 | 5.35              | 5.35  | 5.35  |
| 5600 Head                        | 5490                 | 5700 | 4.85              | 4.85  | 4.85  |
| 5750 Head                        | 5700                 | 5860 | 4.83              | 4.83  | 4.83  |

**Area Scans**

|                                                                                                        | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                               |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm $\pm$ 1 mm                                                                                                                                                                                                                                                        | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | $30^\circ \pm 1^\circ$                                                                                                                                                                                                                                                 | $20^\circ \pm 1^\circ$                                  |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm      |
|                                                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                         |

**Zoom Scan (Cube Scan Averaging)**

|                                                                                                                                                                                                                                                                                                                                                           |                                           |                                                                                             |                                                         |                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                                                                           | uniform grid: $\Delta Z_{\text{Zoom}}(n)$ |                                                                                             | $\leq 5 \text{ mm}$                                     | 3 – 4 GHz: $\leq 4 \text{ mm}$<br>4 – 5 GHz: $\leq 3 \text{ mm}$<br>5 – 6 GHz: $\leq 2 \text{ mm}$    |
|                                                                                                                                                                                                                                                                                                                                                           | graded grid                               | $\Delta Z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4 \text{ mm}$                                     | 3 – 4 GHz: $\leq 3 \text{ mm}$<br>4 – 5 GHz: $\leq 2.5 \text{ mm}$<br>5 – 6 GHz: $\leq 2 \text{ mm}$  |
|                                                                                                                                                                                                                                                                                                                                                           |                                           | $\Delta Z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta Z_{\text{Zoom}}(n-1) \text{ mm}$ |                                                                                                       |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                                                                  | x, y, z                                   |                                                                                             | $\geq 30 \text{ mm}$                                    | 3 – 4 GHz: $\geq 28 \text{ mm}$<br>4 – 5 GHz: $\geq 25 \text{ mm}$<br>5 – 6 GHz: $\geq 22 \text{ mm}$ |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.                                                                                                                                                                                                                     |                                           |                                                                                             |                                                         |                                                                                                       |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$ , $\leq 8 \text{ mm}$ , $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                           |                                                                                             |                                                         |                                                                                                       |

## Tissue Dielectric Parameters for Head

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

### Recommended Tissue Dielectric Parameters for Head

**Table A.3 – Dielectric properties of the head tissue-equivalent liquid**

| Frequency<br>MHz | Relative permittivity<br>$\epsilon_r$ | Conductivity ( $\sigma$ )<br>S/m |
|------------------|---------------------------------------|----------------------------------|
| 300              | 45,3                                  | 0,87                             |
| 450              | 43,5                                  | 0,87                             |
| <i>750</i>       | <i>41,9</i>                           | <i>0,89</i>                      |
| 835              | 41,5                                  | 0,90                             |
| 900              | 41,5                                  | 0,97                             |
| 1 450            | 40,5                                  | 1,20                             |
| <i>1 500</i>     | <i>40,4</i>                           | <i>1,23</i>                      |
| <i>1 640</i>     | <i>40,2</i>                           | <i>1,31</i>                      |
| <i>1 750</i>     | <i>40,1</i>                           | <i>1,37</i>                      |
| 1 800            | 40,0                                  | 1,40                             |
| 1 900            | 40,0                                  | 1,40                             |
| 2 000            | 40,0                                  | 1,40                             |
| <i>2 100</i>     | <i>39,8</i>                           | <i>1,49</i>                      |
| <i>2 300</i>     | <i>39,5</i>                           | <i>1,67</i>                      |
| 2 450            | 39,2                                  | 1,80                             |
| <i>2 600</i>     | <i>39,0</i>                           | <i>1,96</i>                      |
| 3 000            | 38,5                                  | 2,40                             |
| <i>3 500</i>     | <i>37,9</i>                           | <i>2,91</i>                      |
| <i>4 000</i>     | <i>37,4</i>                           | <i>3,43</i>                      |
| <i>4 500</i>     | <i>36,8</i>                           | <i>3,94</i>                      |
| <i>5 000</i>     | <i>36,2</i>                           | <i>4,45</i>                      |
| <i>5 200</i>     | <i>36,0</i>                           | <i>4,66</i>                      |
| <i>5 400</i>     | <i>35,8</i>                           | <i>4,86</i>                      |
| <i>5 600</i>     | <i>35,5</i>                           | <i>5,07</i>                      |
| <i>5 800</i>     | <i>35,3</i>                           | <i>5,27</i>                      |
| <i>6 000</i>     | <i>35,1</i>                           | <i>5,48</i>                      |

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

## EQUIPMENT LIST AND CALIBRATION


### Equipments List & Calibration Information

| Equipment                           | Model                | S/N           | Calibration Date | Calibration Due Date |
|-------------------------------------|----------------------|---------------|------------------|----------------------|
| DASY5 Test Software                 | DASY52 52.10.4       | N/A           | NCR              | NCR                  |
| DASY5 Measurement Server            | DASY5 6.0.31         | N/A           | NCR              | NCR                  |
| Data Acquisition Electronics        | DAE4                 | 1211          | 2022/03/01       | 2023/02/28           |
| E-Field Probe                       | EX3DV4               | 7441          | 2022/05/16       | 2023/05/15           |
| Mounting Device                     | MD4HHTV5             | SD 000 H01 KA | NCR              | NCR                  |
| SAM Twin Phantom                    | SAM-Twin V5.0        | 1744          | NCR              | NCR                  |
| Dipole,750MHz                       | D750V3               | 1194          | 2020/1/13        | 2023/1/12            |
| Dipole,835MHz                       | D835V2               | 4d103         | 2021/10/27       | 2024/10/26           |
| Dipole,1900MHz                      | D1900V2              | 5d128         | 2021/10/27       | 2024/10/26           |
| Dipole,2450MHz                      | D2450V2              | 751           | 2020/10/13       | 2023/10/12           |
| Dipole,2600MHz                      | D2600V2              | 1073          | 2019/12/18       | 2022/12/17           |
| Dipole,5GHz                         | D5GHZV2              | 1301          | 2020/01/10       | 2023/01/09           |
| Simulated Tissue Liquid Head        | HBBL600-10000V6      | SL AAH U16 BC | Each Time        |                      |
| Network Analyzer                    | 8753D                | 3410A08288    | 2022/7/05        | 2023/7/04            |
| Dielectric Assessment Kit           | DAK-3.5              | 1320          | NCR              | NCR                  |
| Signal Generator                    | SMB100A              | 108362        | 2021/12/23       | 2022/12/22           |
| USB wideband power sensor           | U2021XA              | MY52350001    | 2021/12/23       | 2022/12/22           |
| Power Amplifier                     | CBA 1G-070           | T44328        | 2021/12/23       | 2022/12/22           |
| Linear Power Amplifier              | AS0860-40/45         | 1060913       | 2021/12/23       | 2022/12/22           |
| Directional Coupler                 | 4223-20              | 3.113.277     | 2021/12/23       | 2022/12/22           |
| 6dB Attenuator                      | 8493B 6dB Attenuator | 2708A 04769   | 2021/12/23       | 2022/12/22           |
| Spectrum Analyzer                   | FSV40                | 101949        | 2021/12/13       | 2022/12/12           |
| Wideband Radio Communication Tester | CMW500               | 143458        | 2022/03/02       | 2023/03/01           |



## SAR MEASUREMENT SYSTEM VERIFICATION

### Liquid Verification

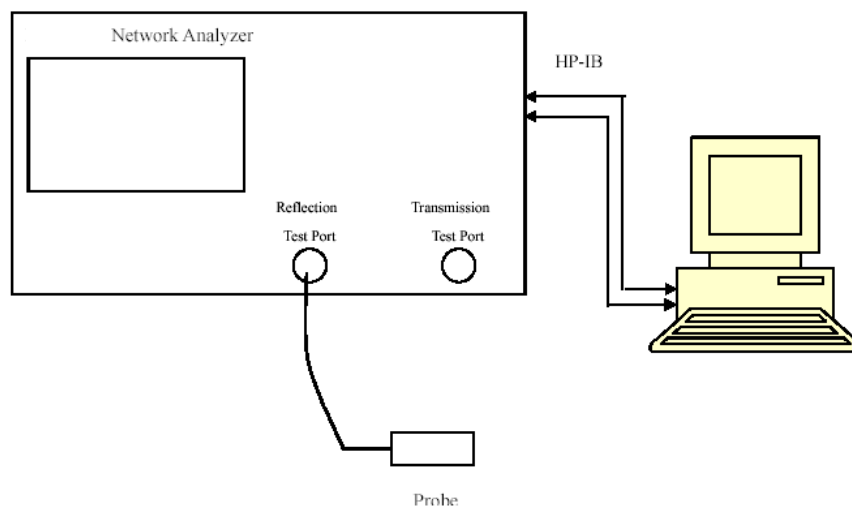

Liquid Verification Setup Block Diagram

### Liquid Verification Results

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 704             | Simulated Tissue Liquid Head | 43.165           | 0.879          | 42.15        | 0.89           | 2.41               | -1.24                | $\pm 5$       |
| 707.5           | Simulated Tissue Liquid Head | 42.974           | 0.887          | 42.13        | 0.89           | 2                  | -0.34                | $\pm 5$       |
| 711             | Simulated Tissue Liquid Head | 42.886           | 0.875          | 42.11        | 0.89           | 1.84               | -1.69                | $\pm 5$       |
| 750             | Simulated Tissue Liquid Head | 42.775           | 0.875          | 41.90        | 0.89           | 2.09               | -1.69                | $\pm 5$       |

\*Liquid Verification above was performed on 2022/11/12.

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 824.2           | Simulated Tissue Liquid Head | 42.416           | 0.903          | 41.55        | 0.90           | 2.08               | 0.33                 | $\pm 5$       |
| 826.4           | Simulated Tissue Liquid Head | 42.322           | 0.903          | 41.54        | 0.90           | 1.88               | 0.33                 | $\pm 5$       |
| 829             | Simulated Tissue Liquid Head | 42.798           | 0.908          | 41.53        | 0.90           | 3.05               | 0.89                 | $\pm 5$       |
| 835             | Simulated Tissue Liquid Head | 42.751           | 0.909          | 41.50        | 0.90           | 3.01               | 1                    | $\pm 5$       |
| 836.5           | Simulated Tissue Liquid Head | 42.274           | 0.905          | 41.50        | 0.90           | 1.87               | 0.56                 | $\pm 5$       |
| 836.6           | Simulated Tissue Liquid Head | 42.274           | 0.905          | 41.50        | 0.90           | 1.87               | 0.56                 | $\pm 5$       |
| 844             | Simulated Tissue Liquid Head | 42.605           | 0.905          | 41.50        | 0.91           | 2.66               | -0.55                | $\pm 5$       |
| 846.6           | Simulated Tissue Liquid Head | 42.576           | 0.912          | 41.50        | 0.91           | 2.59               | 0.22                 | $\pm 5$       |
| 848.8           | Simulated Tissue Liquid Head | 42.251           | 0.926          | 41.50        | 0.91           | 1.81               | 1.76                 | $\pm 5$       |

\*Liquid Verification above was performed on 2022/11/15.

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 1850.2          | Simulated Tissue Liquid Head | 40.221           | 1.404          | 40           | 1.4            | 0.55               | 0.29                 | $\pm 5$       |
| 1852.4          | Simulated Tissue Liquid Head | 40.008           | 1.402          | 40           | 1.4            | 0.02               | 0.14                 | $\pm 5$       |
| 1860            | Simulated Tissue Liquid Head | 40.385           | 1.416          | 40           | 1.4            | 0.96               | 1.14                 | $\pm 5$       |
| 1880            | Simulated Tissue Liquid Head | 39.633           | 1.423          | 40           | 1.4            | -0.92              | 1.64                 | $\pm 5$       |
| 1900            | Simulated Tissue Liquid Head | 39.05            | 1.422          | 40           | 1.4            | -2.38              | 1.57                 | $\pm 5$       |
| 1907.6          | Simulated Tissue Liquid Head | 40.078           | 1.423          | 40           | 1.4            | 0.20               | 1.64                 | $\pm 5$       |
| 1909.8          | Simulated Tissue Liquid Head | 39.881           | 1.421          | 40           | 1.4            | -0.30              | 1.5                  | $\pm 5$       |

\*Liquid Verification above was performed on 2022/11/17.

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ |               |
| 2402            | Simulated Tissue Liquid Head | 39.637           | 1.802          | 39.26        | 1.78           | 0.96               | 1.24           | $\pm 5$       |
| 2412            | Simulated Tissue Liquid Head | 39.43            | 1.809          | 39.26        | 1.78           | 0.43               | 1.63           | $\pm 5$       |
| 2441            | Simulated Tissue Liquid Head | 39.423           | 1.816          | 39.22        | 1.79           | 0.52               | 1.45           | $\pm 5$       |
| 2442            | Simulated Tissue Liquid Head | 39.423           | 1.816          | 39.22        | 1.79           | 0.52               | 1.45           | $\pm 5$       |
| 2450            | Simulated Tissue Liquid Head | 39.494           | 1.829          | 39.20        | 1.80           | 0.75               | 1.61           | $\pm 5$       |
| 2472            | Simulated Tissue Liquid Head | 39.281           | 1.828          | 39.18        | 1.81           | 0.26               | 0.99           | $\pm 5$       |
| 2480            | Simulated Tissue Liquid Head | 39.31            | 1.84           | 39.18        | 1.81           | 0.33               | 1.66           | $\pm 5$       |

\*Liquid Verification above was performed on 2022/11/07.

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                      | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) |               |
| 2510            | Simulated Tissue Liquid Head | 39.665           | 1.911          | 39.12        | 1.87           | 1.39               | 2.19                 | $\pm 5$       |
| 2535            | Simulated Tissue Liquid Head | 39.583           | 1.921          | 39.09        | 1.89           | 1.26               | 1.64                 | $\pm 5$       |
| 2545            | Simulated Tissue Liquid Head | 39.531           | 1.937          | 39.07        | 1.90           | 1.18               | 1.95                 | $\pm 5$       |
| 2560            | Simulated Tissue Liquid Head | 39.029           | 1.946          | 39.06        | 1.92           | -0.08              | 1.35                 | $\pm 5$       |
| 2570            | Simulated Tissue Liquid Head | 39.233           | 1.963          | 39.03        | 1.94           | 0.52               | 1.19                 | $\pm 5$       |
| 2595            | Simulated Tissue Liquid Head | 39.426           | 1.991          | 39.01        | 1.95           | 1.07               | 2.1                  | $\pm 5$       |
| 2600            | Simulated Tissue Liquid Head | 39.318           | 1.991          | 39.00        | 1.96           | 0.82               | 1.58                 | $\pm 5$       |
| 2620            | Simulated Tissue Liquid Head | 39.322           | 2.006          | 38.99        | 1.97           | 0.85               | 1.83                 | $\pm 5$       |
| 2645            | Simulated Tissue Liquid Head | 39.261           | 2.03           | 38.94        | 2.01           | 0.82               | 1                    | $\pm 5$       |

\*Liquid Verification above was performed on 2022/11/19.

| Frequency (MHz) | Liquid Type                  | Liquid Parameter |                | Target Value |                | Delta (%)          |                | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------|---------------|
|                 |                              | $\epsilon_r$     | $\sigma$ (S/m) | $\epsilon_r$ | $\sigma$ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ |               |
| 5180            | Simulated Tissue Liquid Head | 34.251           | 4.807          | 36.02        | 4.65           | -4.91              | 3.38           | $\pm 5$       |
| 5200            | Simulated Tissue Liquid Head | 34.217           | 4.819          | 36.00        | 4.66           | -4.95              | 3.41           | $\pm 5$       |

|      |                              |        |       |       |      |       |      |    |
|------|------------------------------|--------|-------|-------|------|-------|------|----|
| 5240 | Simulated Tissue Liquid Head | 34.446 | 4.858 | 35.96 | 4.70 | -4.21 | 3.36 | ±5 |
| 5250 | Simulated Tissue Liquid Head | 34.312 | 4.872 | 35.95 | 4.71 | -4.56 | 3.44 | ±5 |

\*Liquid Verification above was performed on 2022/11/08.

| Frequency<br>(MHz) | Liquid Type                  | Liquid<br>Parameter |                   | Target Value |                   | Delta<br>(%)       |                | Tolerance<br>(%) |
|--------------------|------------------------------|---------------------|-------------------|--------------|-------------------|--------------------|----------------|------------------|
|                    |                              | $\epsilon_r$        | $\sigma$<br>(S/m) | $\epsilon_r$ | $\sigma$<br>(S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ |                  |
| 5745               | Simulated Tissue Liquid Head | 33.611              | 5.441             | 35.36        | 5.21              | -4.95              | 4.43           | ±5               |
| 5785               | Simulated Tissue Liquid Head | 33.636              | 5.427             | 35.32        | 5.26              | -4.77              | 3.17           | ±5               |
| 5800               | Simulated Tissue Liquid Head | 33.607              | 5.463             | 35.30        | 5.27              | -4.8               | 3.66           | ±5               |
| 5825               | Simulated Tissue Liquid Head | 33.606              | 5.458             | 35.28        | 5.29              | -4.74              | 3.18           | ±5               |

\*Liquid Verification above was performed on 2022/11/08.


## System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$  for  $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$ ;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$  for  $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$ .

## System Verification Setup Block Diagram

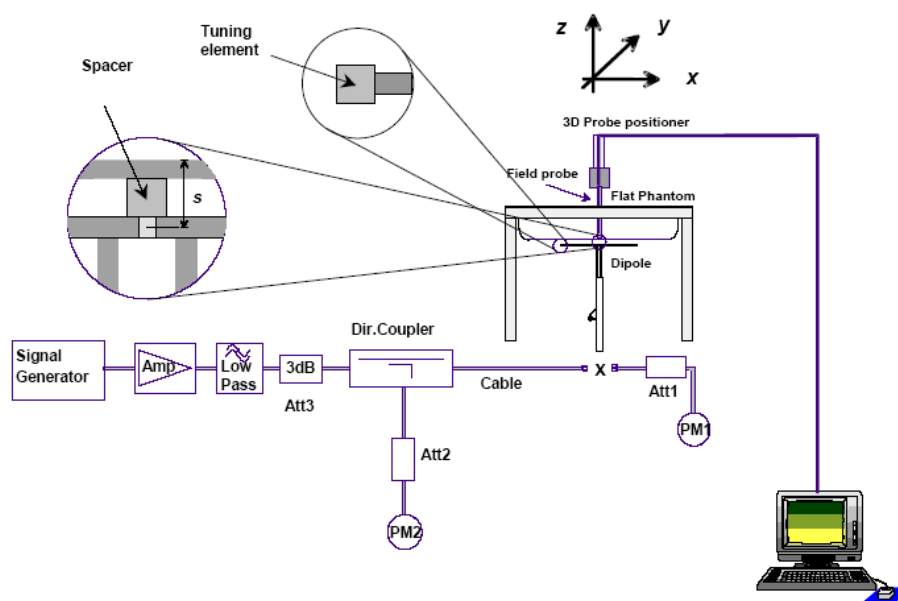

## System Accuracy Check Results

| Date       | Frequency Band | Liquid Type | Input Power (mW) | Measured SAR (W/kg) |       | Normalized to 1W (W/kg) | Target Value (W/kg) | Delta (%) | Tolerance (%) |
|------------|----------------|-------------|------------------|---------------------|-------|-------------------------|---------------------|-----------|---------------|
| 2022/11/12 | 750 MHz        | Head        | 100              | 1g                  | 0.876 | 8.76                    | 8.55                | 2.456     | $\pm 10$      |
| 2022/11/15 | 835 MHz        | Head        | 100              | 1g                  | 0.932 | 9.32                    | 9.65                | -3.420    | $\pm 10$      |
| 2022/11/17 | 1900 MHz       | Head        | 100              | 1g                  | 4.14  | 41.4                    | 40.0                | 3.500     | $\pm 10$      |
| 2022/11/07 | 2450 MHz       | Head        | 100              | 1g                  | 5.45  | 54.5                    | 53.0                | 2.830     | $\pm 10$      |
| 2022/11/19 | 2600 MHz       | Head        | 100              | 1g                  | 5.78  | 57.8                    | 55.4                | 4.332     | $\pm 10$      |
| 2022/11/08 | 5250 MHz       | Head        | 100              | 1g                  | 7.77  | 77.7                    | 80.7                | -3.717    | $\pm 10$      |
| 2022/11/08 | 5800 MHz       | Head        | 100              | 1g                  | 7.71  | 77.1                    | 80.2                | -3.865    | $\pm 10$      |

\*The SAR values above are normalized to 1 Watt forward power.

## SAR SYSTEM VALIDATION DATA

### System Performance 750 MHz

**DUT: Dipole 750MHz; Type: D750V3; Serial: 1194**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.875 \text{ S/m}$ ;  $\epsilon_r = 42.775$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 750MHz/d=15mm, Pin=100mw/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.848 W/kg


**System Performance Check at 750MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.52 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.524 W/kg**

Maximum value of SAR (measured) = 0.841 W/kg

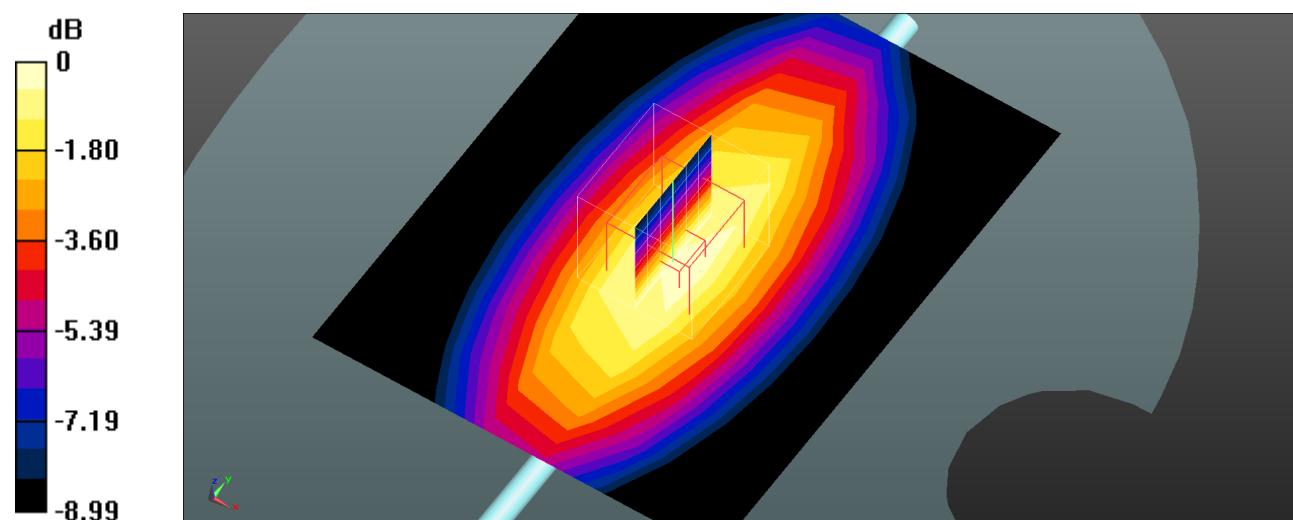

0 dB = 0.841 W/kg = -0.75 dBW/kg

**System Performance 835 MHz****DUT: D835V3; Type: 835 MHz; Serial: 4d103**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.909 \text{ S/m}$ ;  $\epsilon_r = 42.751$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 835MHz/d=15mm, Pin=100mw/Area Scan (71x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.967 W/kg


**System Performance Check at 835MHz/d=15mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.95 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.604 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

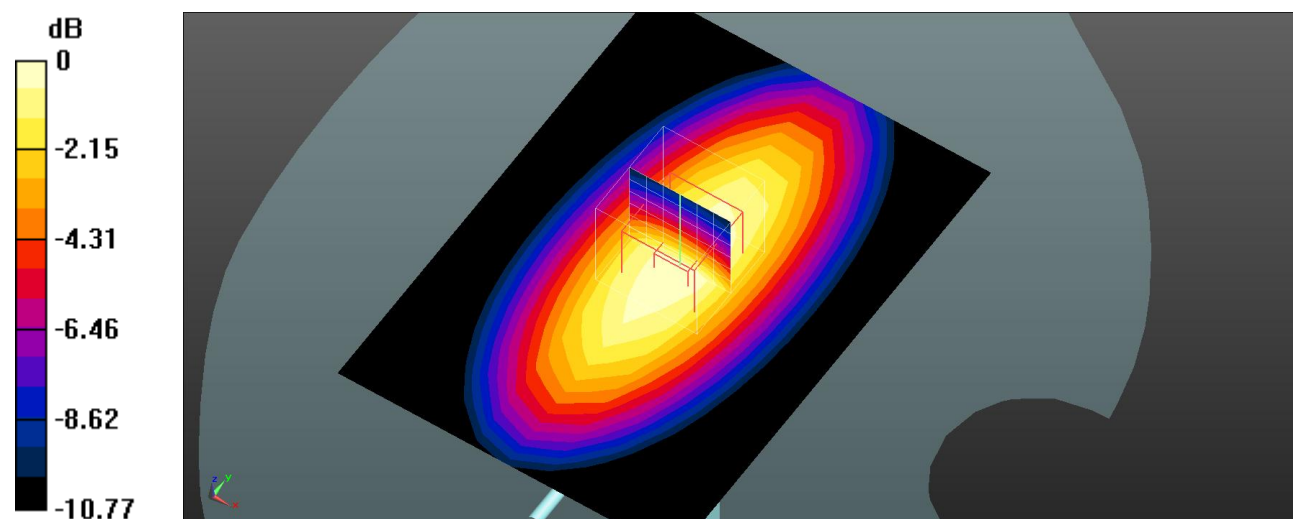

0 dB = 1.05 W/kg = 0.21 dBW/kg

**System Performance 1900MHz****DUT: D1900V2; Type: 1900 MHz; Serial: 5d128**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.422 \text{ S/m}$ ;  $\epsilon_r = 39.05$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 1900MHz/d=10mm, Pin=100mw/Area Scan (71x111x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.61 W/kg

**System Performance Check at 1900MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.16 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 5.61 W/kg

**SAR(1 g) = 4.14 W/kg; SAR(10 g) = 2.12 W/kg**

Maximum value of SAR (measured) = 4.37 W/kg

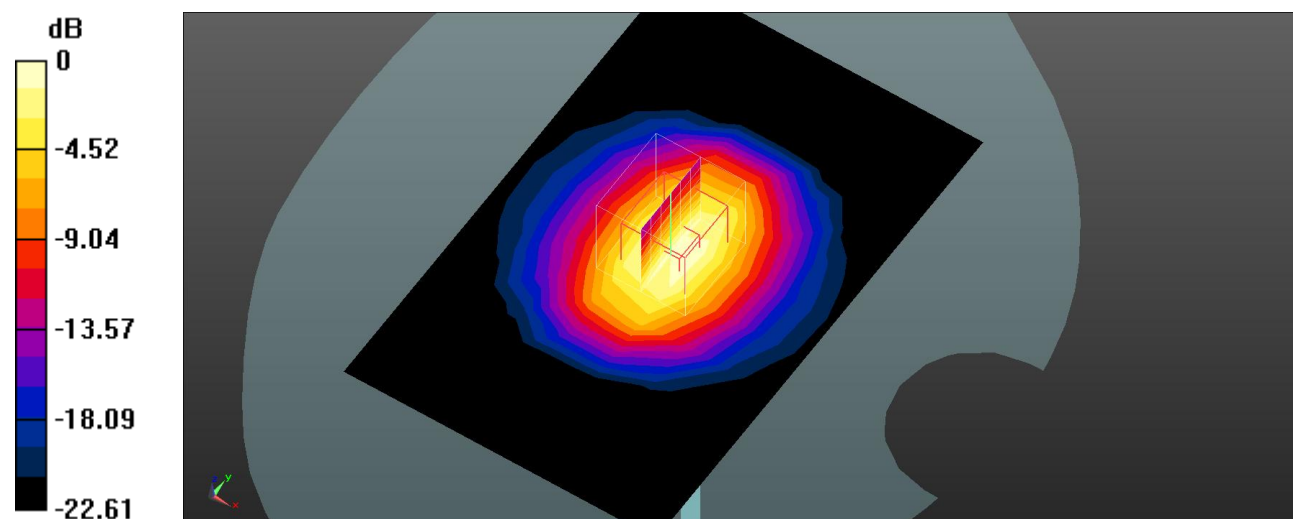

0 dB = 4.37 W/kg = 6.40 dBW/kg

## System Performance 2450MHz

**DUT: D2450V2; Type: 2450 MHz; Serial: 751**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 39.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Cheek at 2450MHz/d=10mm, Pin=100mw/Area Scan (101x111x1):** Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.31 W/kg

**System Performance Cheek at 2450MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.18 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(1 g) = 5.45 W/kg; SAR(10 g) = 2.51 W/kg**

Maximum value of SAR (measured) = 6.26 W/kg

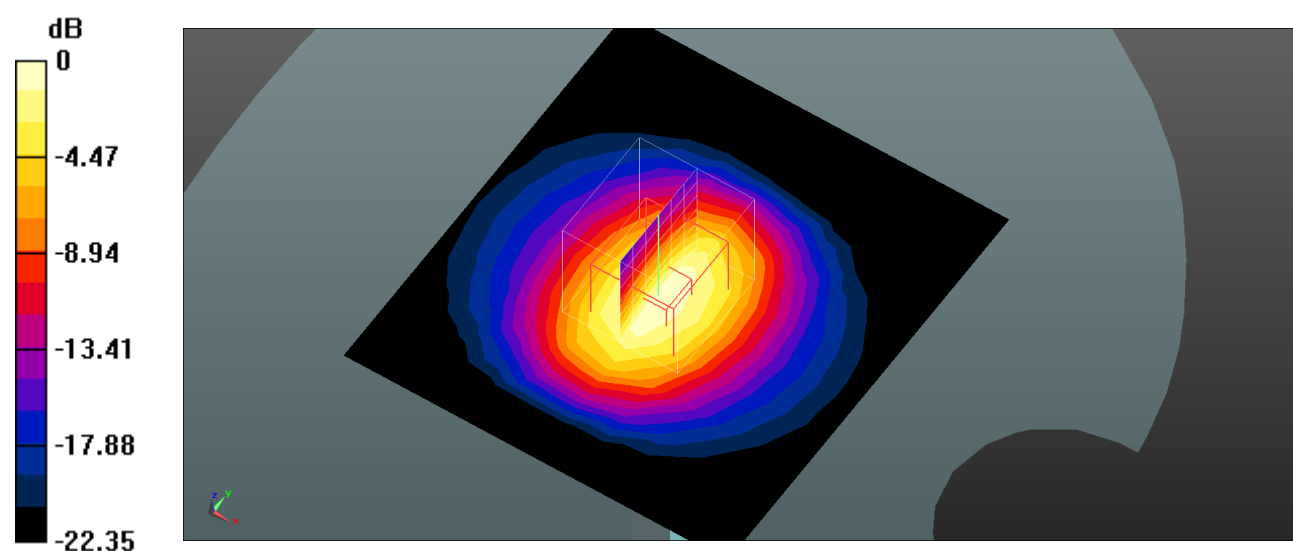

0 dB = 6.26 W/kg = 7.97 dBW/kg



## System Performance 2600MHz

**DUT: D2600V2; Type: 2600 MHz; Serial: 1073**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.991$  S/m;  $\epsilon_r = 39.318$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.3, 7.3, 7.3); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 2600MHz/d=10mm, Pin=100mw/Area Scan (101x131x1):** Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.84 W/kg

**System Performance Check at 2600MHz/d=10mm, Pin=100mw/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.02 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 12.1 W/kg

**SAR(1 g) = 5.78 W/kg; SAR(10 g) = 2.57 W/kg**

Maximum value of SAR (measured) = 6.53 W/kg

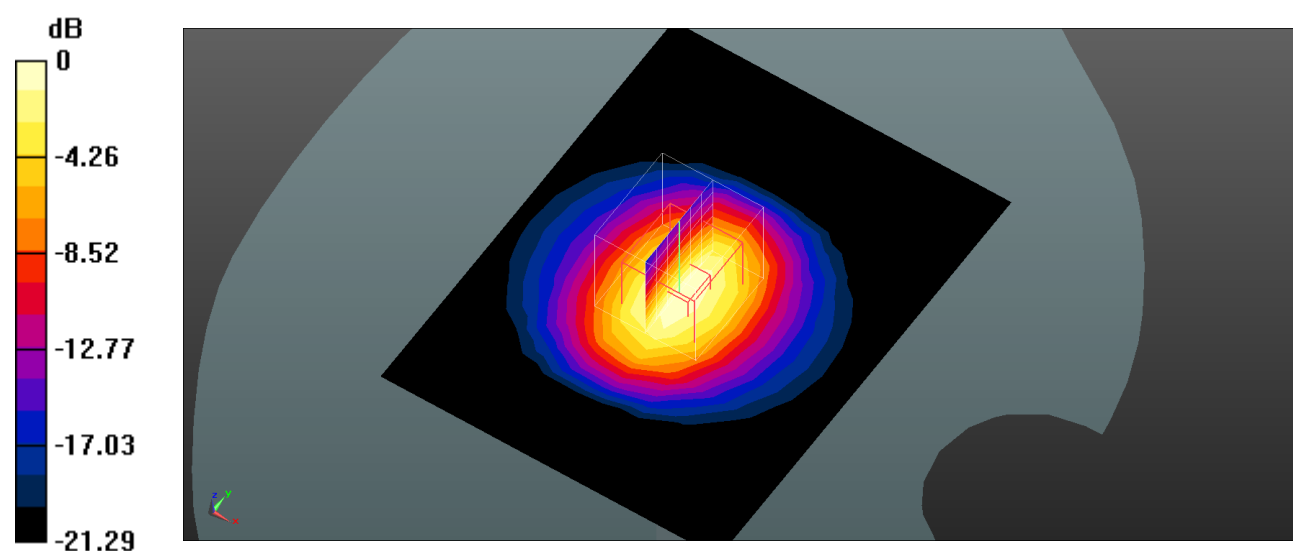

0 dB = 6.53 W/kg = 8.15 dBW/kg

**System Performance 5250 MHz****DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.872 \text{ S/m}$ ;  $\epsilon_r = 34.312$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 5250MHz/d=10mm, Pin=100mw/Area Scan (61x81x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 17.5 W/kg


**System Performance Check at 5250MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 46.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 25.8 W/kg

**SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 16.1 W/kg

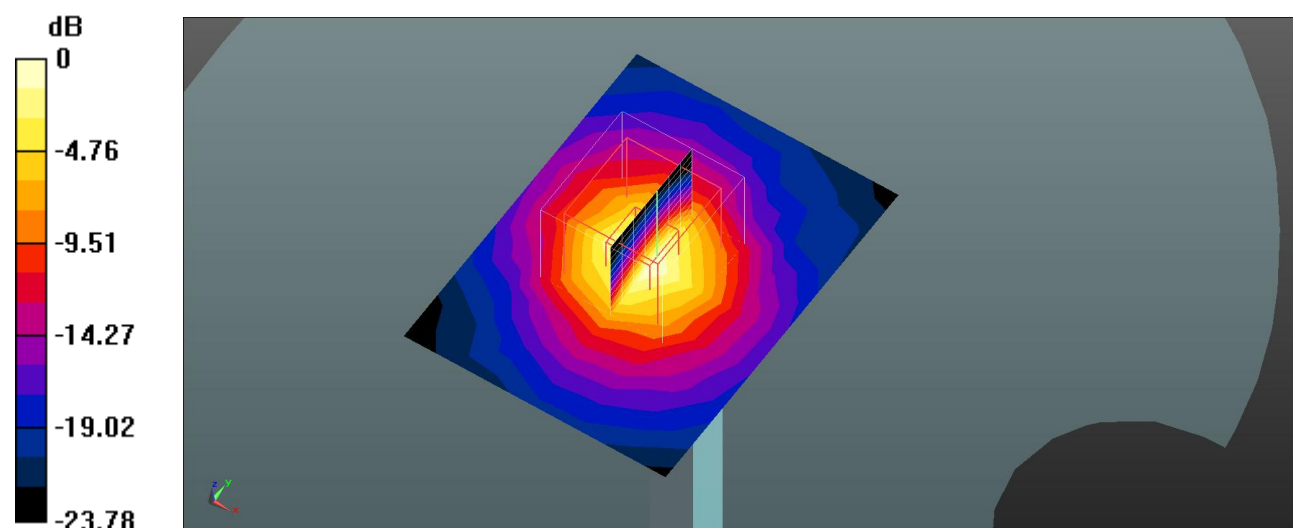

0 dB = 16.1 W/kg = 12.07 dBW/kg

**System Performance 5800 MHz****DUT: Dipole 5GHz Type: D5GHZV2; Serial: 1301**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.463 \text{ S/m}$ ;  $\epsilon_r = 33.607$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: 1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**System Performance Check at 5800MHz/d=10mm, Pin=100mw/Area Scan (61x81x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 18.2 W/kg


**System Performance Check at 5800MHz/d=10mm, Pin=100mw/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 48.54 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.8 W/kg

**SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.21 W/kg**

Maximum value of SAR (measured) = 17.5 W/kg

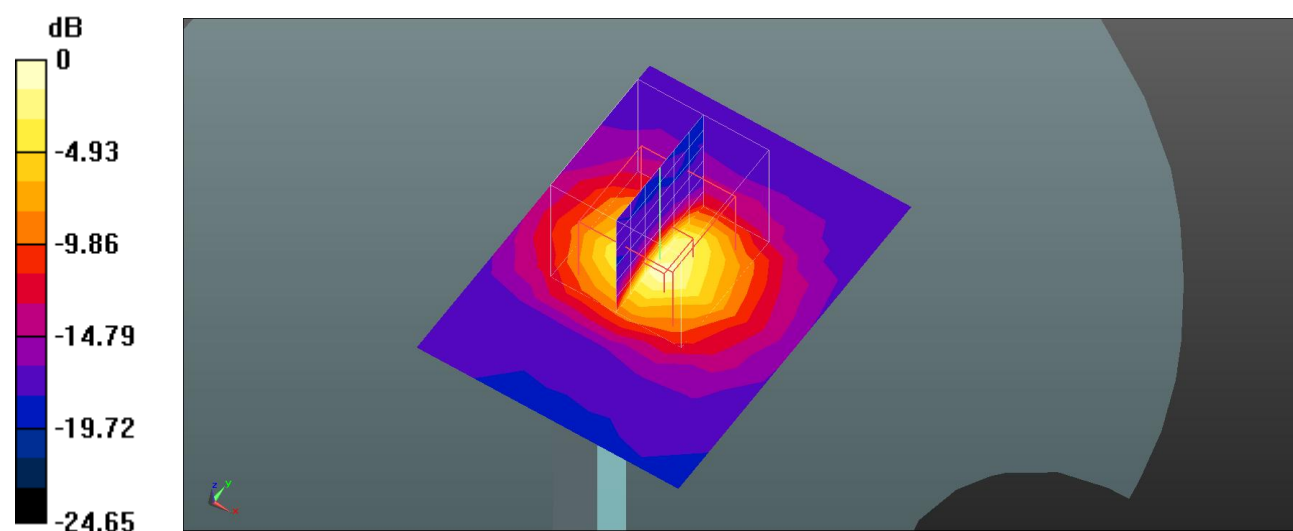



0 dB = 17.5 W/kg = 12.43 dBW/kg

## EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

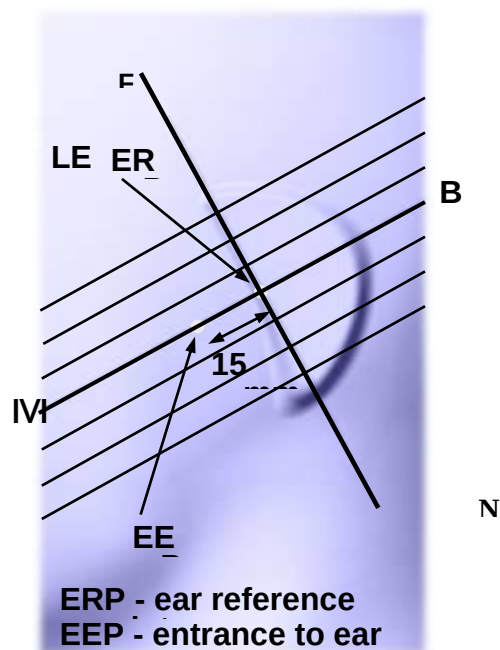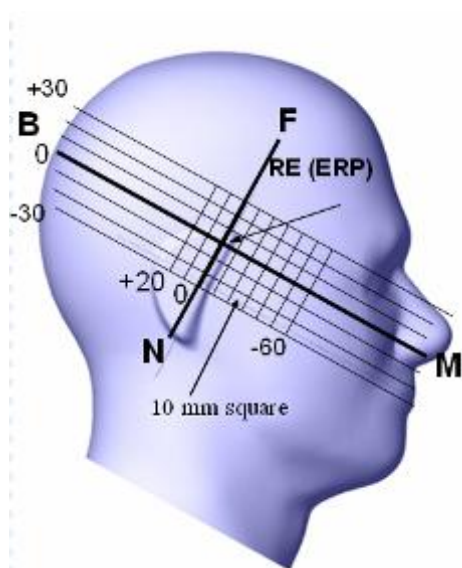

## Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.  
(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

### Cheek /Touch Position

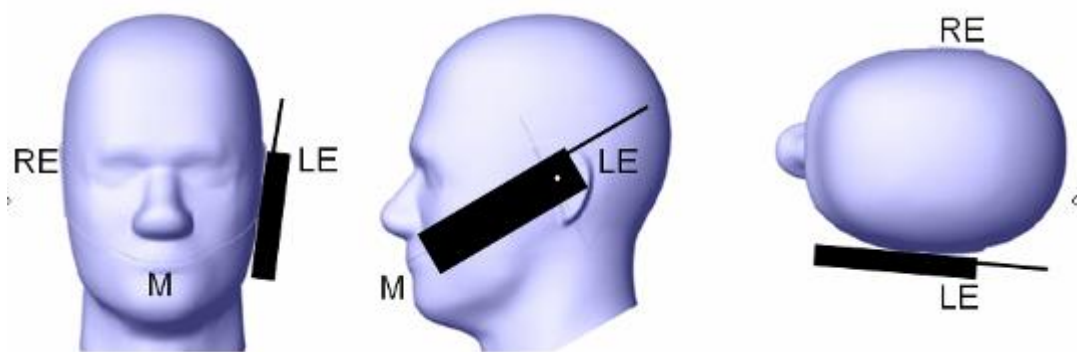


## Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.


2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 to 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

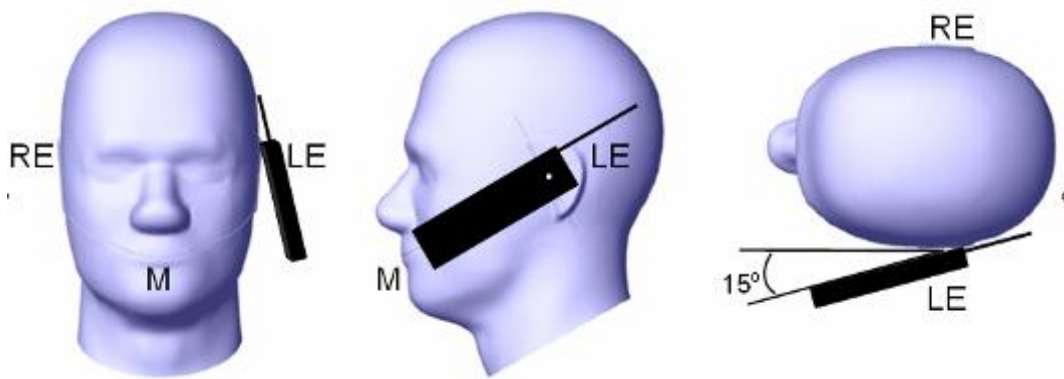**Ear /Tilt 15° Position****Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

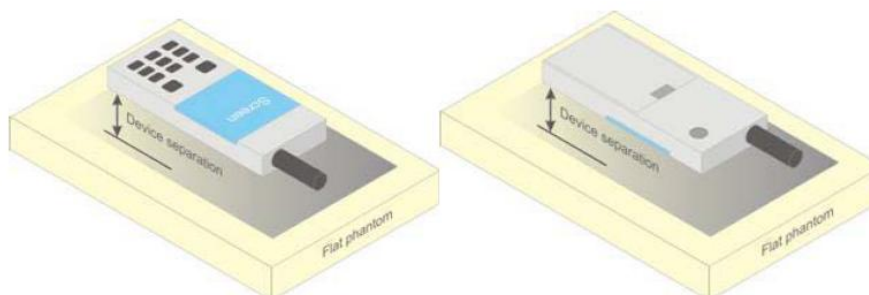

**Figure 5 – Test positions for body-worn devices**

**Test Distance for SAR Evaluation**

For this case the EUT(Equipment Under Test) is set 10mm away from the phantom, the test distance is 10mm.

## SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:


- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

## CONDUCTED OUTPUT POWER MEASUREMENT

### Test Procedure



### GSM/WCDMA/LTE

#### Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

#### GSM/GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings



**WCDMA Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                       |                         |              |
|---------------------------------------|-------------------------|--------------|
| <b>WCDMA<br/>General<br/>Settings</b> | Loopback Mode           | Test Mode 1  |
|                                       | Rel99 RMC               | 12.2kbps RMC |
|                                       | Power Control Algorithm | Algorithm2   |
|                                       | $\beta_c/\beta_d$       | 8/15         |

**HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                                  | Mode                        | HSDPA        | HSDPA | HSDPA | HSDPA |
|--------------------------------------------------|-----------------------------|--------------|-------|-------|-------|
|                                                  | Subset                      | 1            | 2     | 3     | 4     |
| <b>WCDMA<br/>General<br/>Settings</b>            | Loopback Mode               | Test Mode 1  |       |       |       |
|                                                  | Rel99 RMC                   | 12.2kbps RMC |       |       |       |
|                                                  | HSDPA FRC                   | H-Set1       |       |       |       |
|                                                  | Power Control Algorithm     | Algorithm2   |       |       |       |
|                                                  | $\beta_c$                   | 2/15         | 12/15 | 15/15 | 15/15 |
|                                                  | $\beta_d$                   | 15/15        | 15/15 | 8/15  | 4/15  |
|                                                  | $\beta_d(\text{SF})$        | 64           |       |       |       |
|                                                  | $\beta_c/\beta_d$           | 2/15         | 12/15 | 15/8  | 15/4  |
|                                                  | $\beta_{hs}$                | 4/15         | 24/15 | 30/15 | 30/15 |
|                                                  | MPR(dB)                     | 0            | 0     | 0.5   | 0.5   |
| <b>HSDPA<br/>Specifi<br/>c<br/>Setting<br/>s</b> | DACK                        | 8            |       |       |       |
|                                                  | DNAK                        | 8            |       |       |       |
|                                                  | DCQI                        | 8            |       |       |       |
|                                                  | Ack-Nack repetition factor  | 3            |       |       |       |
|                                                  | CQI Feedback                | 4ms          |       |       |       |
|                                                  | CQI Repetition Factor       | 2            |       |       |       |
|                                                  | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15        |       |       |       |

**HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                        | <b>Mode</b>                      | <b>HSUPA</b>                                                                                                                                 | <b>HSUPA</b> | <b>HSUPA</b>                                         | <b>HSUPA</b> | <b>HSUPA</b>                                                                                                                                 |
|----------------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|                                        | <b>Subset</b>                    | <b>1</b>                                                                                                                                     | <b>2</b>     | <b>3</b>                                             | <b>4</b>     | <b>5</b>                                                                                                                                     |
| <b>WCDMA<br/>General<br/>Settings</b>  | Loopback Mode                    | Test Mode 1                                                                                                                                  |              |                                                      |              |                                                                                                                                              |
|                                        | Rel99 RMC                        | 12.2kbps RMC                                                                                                                                 |              |                                                      |              |                                                                                                                                              |
|                                        | HSDPA FRC                        | H-Set1                                                                                                                                       |              |                                                      |              |                                                                                                                                              |
|                                        | HSUPA Test                       | HSUPA Loopback                                                                                                                               |              |                                                      |              |                                                                                                                                              |
|                                        | Power Control Algorithm          | Algorithm2                                                                                                                                   |              |                                                      |              |                                                                                                                                              |
|                                        | $\beta_c$                        | 11/15                                                                                                                                        | 6/15         | 15/15                                                | 2/15         | 15/15                                                                                                                                        |
|                                        | $\beta_d$                        | 15/15                                                                                                                                        | 15/15        | 9/15                                                 | 15/15        | 0                                                                                                                                            |
|                                        | $\beta_{ec}$                     | 209/225                                                                                                                                      | 12/15        | 30/15                                                | 2/15         | 5/15                                                                                                                                         |
|                                        | $\beta_c / \beta_d$              | 11/15                                                                                                                                        | 6/15         | 15/9                                                 | 2/15         | -                                                                                                                                            |
|                                        | $\beta_{hs}$                     | 22/15                                                                                                                                        | 12/15        | 30/15                                                | 4/15         | 5/15                                                                                                                                         |
|                                        | CM(dB)                           | 1.0                                                                                                                                          | 3.0          | 2.0                                                  | 3.0          | 1.0                                                                                                                                          |
|                                        | MPR(dB)                          | 0                                                                                                                                            | 2            | 1                                                    | 2            | 0                                                                                                                                            |
| <b>HSDPA<br/>Specific<br/>Settings</b> | DACK                             | 8                                                                                                                                            |              |                                                      |              |                                                                                                                                              |
|                                        | DNAK                             | 8                                                                                                                                            |              |                                                      |              |                                                                                                                                              |
|                                        | DCQI                             | 8                                                                                                                                            |              |                                                      |              |                                                                                                                                              |
|                                        | Ack-Nack repetition factor       | 3                                                                                                                                            |              |                                                      |              |                                                                                                                                              |
|                                        | CQI Feedback                     | 4ms                                                                                                                                          |              |                                                      |              |                                                                                                                                              |
|                                        | CQI Repetition Factor            | 2                                                                                                                                            |              |                                                      |              |                                                                                                                                              |
|                                        | $A_{hs} = \beta_{hs} / \beta_c$  | 30/15                                                                                                                                        |              |                                                      |              |                                                                                                                                              |
| <b>HSUPA<br/>Specific<br/>Settings</b> | DE-DPCCH                         | 6                                                                                                                                            | 8            | 8                                                    | 5            | 7                                                                                                                                            |
|                                        | DHARQ                            | 0                                                                                                                                            | 0            | 0                                                    | 0            | 0                                                                                                                                            |
|                                        | AG Index                         | 20                                                                                                                                           | 12           | 15                                                   | 17           | 21                                                                                                                                           |
|                                        | ETFCI                            | 75                                                                                                                                           | 67           | 92                                                   | 71           | 81                                                                                                                                           |
|                                        | Associated Max UL Data Rate kbps | 242.1                                                                                                                                        | 174.9        | 482.8                                                | 205.8        | 308.9                                                                                                                                        |
|                                        | Reference E_FCI                  | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |              | E-TFCI 11<br>E-TFCI PO4<br>E-TFCI 92<br>E-TFCI PO 18 |              | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |
|                                        |                                  |                                                                                                                                              |              |                                                      |              |                                                                                                                                              |

**HSPA+**

| Sub-test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $\beta_c$<br>(Note 3) | $\beta_d$ | $\beta_{HS}$<br>(Note 1) | $\beta_{ec}$ | $\beta_{ed}$<br>(2xSF2)<br>(Note 4)            | $\beta_{ed}$<br>(2xSF4)<br>(Note 4)            | CM<br>(dB)<br>(Note 2) | MPR<br>(dB)<br>(Note 2) | AG<br>Index<br>(Note 4) | E-TFCI<br>(Note 5) | E-TFCI<br>(boost) |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------|--------------------------|--------------|------------------------------------------------|------------------------------------------------|------------------------|-------------------------|-------------------------|--------------------|-------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1                     | 0         | 30/15                    | 30/15        | $\beta_{ed1}$ : 30/15<br>$\beta_{ed2}$ : 30/15 | $\beta_{ed3}$ : 24/15<br>$\beta_{ed4}$ : 24/15 | 3.5                    | 2.5                     | 14                      | 105                | 105               |
| <p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).</p> <p>Note 3: DPDCH is not configured, therefore the <math>\beta_c</math> is set to 1 and <math>\beta_d = 0</math> by default.</p> <p>Note 4: <math>\beta_{ed}</math> can not be set directly; it is set by Absolute Grant Value.</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.</p> |                       |           |                          |              |                                                |                                                |                        |                         |                         |                    |                   |

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

**FDD-LTE**

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3**

| Modulation | Channel bandwidth / Transmission bandwidth ( $N_{RB}$ ) |         |       |        |        |        | MPR (dB) |
|------------|---------------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                                 | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                                     | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

| Network Signalling value | Requirements (subclause)      | E-UTRA Band              | Channel bandwidth (MHz) | Resources Blocks ( $N_{RB}$ )                     | A-MPR (dB) |
|--------------------------|-------------------------------|--------------------------|-------------------------|---------------------------------------------------|------------|
| NS_01                    | 6.6.2.1.1                     | Table 5.5-1              | 1.4, 3, 5, 10, 15, 20   | Table 5.6-1                                       | N/A        |
| NS_03                    | 6.6.2.2.1                     | 2, 4, 10, 23, 25, 35, 36 | 3                       | >5                                                | ≤ 1        |
|                          |                               |                          | 5                       | >6                                                | ≤ 1        |
|                          |                               |                          | 10                      | >6                                                | ≤ 1        |
|                          |                               |                          | 15                      | >8                                                | ≤ 1        |
|                          |                               |                          | 20                      | >10                                               | ≤ 1        |
| NS_04                    | 6.6.2.2.2                     | 41                       | 5                       | >6                                                | ≤ 1        |
| NS_05                    | 6.6.3.3.1                     | 1                        | 10, 15, 20              | Table 6.2.4-4                                     |            |
| NS_06                    | 6.6.2.2.3                     | 12, 13, 14, 17           | 1.4, 3, 5, 10           | ≥ 50                                              | ≤ 1        |
| NS_07                    | 6.6.2.2.3                     | 13                       | 10                      | Table 6.2.4-2                                     |            |
| NS_08                    | 6.6.3.3.2                     |                          |                         |                                                   |            |
| NS_09                    | 6.6.3.3.3                     | 19                       | 10, 15                  | > 44                                              | ≤ 3        |
|                          |                               |                          |                         | > 40                                              | ≤ 1        |
|                          |                               |                          |                         | > 55                                              | ≤ 2        |
| NS_10                    |                               | 20                       | 15, 20                  | Table 6.2.4-3                                     |            |
| NS_11                    | 6.6.2.2.1                     | 23                       | 1.4, 3, 5, 10, 15, 20   | Table 6.2.4-5                                     |            |
| NS_12                    | 6.6.3.3.5                     | 26                       | 1.4, 3, 5               | Table 6.2.4-6                                     |            |
| NS_13                    | 6.6.3.3.6                     | 26                       | 5                       | Table 6.2.4-7                                     |            |
| NS_14                    | 6.6.3.3.7                     | 26                       | 10, 15                  | Table 6.2.4-8                                     |            |
| NS_15                    | 6.6.3.3.8                     | 26                       | 1.4, 3, 5, 10, 15       | Table 6.2.4-9<br>Table 6.2.4-10                   |            |
| NS_16                    | 6.6.3.3.9                     | 27                       | 3, 5, 10                | Table 6.2.4-11, Table 6.2.4-12,<br>Table 6.2.4-13 |            |
| NS_17                    | 6.6.3.3.10                    | 28                       | 5, 10                   | Table 5.6-1                                       | N/A        |
| NS_18                    | 6.6.3.3.11                    | 28                       | 5                       | ≥ 2                                               | ≤ 1        |
|                          |                               |                          | 10, 15, 20              | ≥ 1                                               | ≤ 4        |
| NS_19                    | 6.6.3.3.12                    | 44                       | 10, 15, 20              | Table 6.2.4-14                                    |            |
| NS_20                    | 6.2.2<br>6.6.2.2.1<br>6.6.3.2 | 23                       | 5, 10, 15, 20           | Table 6.2.4-15                                    |            |
| ...                      |                               |                          |                         |                                                   |            |
| NS_32                    | -                             | -                        | -                       | -                                                 | -          |

**TDD-LTE**

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink |                                |                                  | Extended cyclic prefix in downlink |                                |                                  |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
|                                | DwPTS                            | UpPTS                          |                                  | DwPTS                              | UpPTS                          |                                  |
|                                |                                  | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |                                    | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0                              | $6592 \cdot T_s$                 | $2192 \cdot T_s$               | $2560 \cdot T_s$                 | $7680 \cdot T_s$                   | $2192 \cdot T_s$               | $2560 \cdot T_s$                 |
| 1                              | $19760 \cdot T_s$                |                                |                                  | $20480 \cdot T_s$                  |                                |                                  |
| 2                              | $21952 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 3                              | $24144 \cdot T_s$                |                                |                                  | $25600 \cdot T_s$                  |                                |                                  |
| 4                              | $26336 \cdot T_s$                |                                |                                  | $7680 \cdot T_s$                   |                                |                                  |
| 5                              | $6592 \cdot T_s$                 | $4384 \cdot T_s$               | $5120 \cdot T_s$                 | $20480 \cdot T_s$                  | $4384 \cdot T_s$               | $5120 \cdot T_s$                 |
| 6                              | $19760 \cdot T_s$                |                                |                                  | $23040 \cdot T_s$                  |                                |                                  |
| 7                              | $21952 \cdot T_s$                |                                |                                  | $12800 \cdot T_s$                  |                                |                                  |
| 8                              | $24144 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |
| 9                              | $13168 \cdot T_s$                |                                |                                  | -                                  | -                              | -                                |

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number |   |   |   |   |   |   |   |   |   |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D |

**Calculated Duty Cycle**

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-point Periodicity | Subframe Number |   |   |   |   |   |   |   |   |   | Calculated Duty Cycle (%) |
|-------------------------------|---------------------------------------------|-----------------|---|---|---|---|---|---|---|---|---|---------------------------|
|                               |                                             | 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |                           |
| 0                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | U | 63.33                     |
| 1                             | 5 ms                                        | D               | S | U | U | D | D | S | U | U | D | 43.33                     |
| 2                             | 5 ms                                        | D               | S | U | D | D | D | S | U | D | D | 23.33                     |
| 3                             | 10 ms                                       | D               | S | U | U | U | D | D | D | D | D | 31.67                     |
| 4                             | 10 ms                                       | D               | S | U | U | D | D | D | D | D | D | 21.67                     |
| 5                             | 10 ms                                       | D               | S | U | D | D | D | D | D | D | D | 11.67                     |
| 6                             | 5 ms                                        | D               | S | U | U | U | D | S | U | U | D | 53.33                     |

Note: This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.33% duty cycle.

**Maximum Target Output Power**

| <b>Max Target Power(dBm)</b> |                |               |             |
|------------------------------|----------------|---------------|-------------|
| <b>Mode/Band</b>             | <b>Channel</b> |               |             |
|                              | <b>Low</b>     | <b>Middle</b> | <b>High</b> |
| GSM 850                      | 31.5           | 31.5          | 31.5        |
| GPRS 1 TX Slot               | 31.5           | 31.5          | 31.5        |
| GPRS 2 TX Slot               | 30.0           | 30.0          | 30.0        |
| GPRS 3 TX Slot               | 28.0           | 28.0          | 28.0        |
| GPRS 4 TX Slot               | 26.0           | 26.0          | 26.0        |
| PCS 1900                     | 30.0           | 30.0          | 30.0        |
| GPRS 1 TX Slot               | 29.5           | 29.5          | 29.5        |
| GPRS 2 TX Slot               | 27.5           | 27.5          | 27.5        |
| GPRS 3 TX Slot               | 26.0           | 26.0          | 26.0        |
| GPRS 4 TX Slot               | 24.0           | 24.0          | 24.0        |
| WCDMA Band 2                 | 23.0           | 23.0          | 23.0        |
| WCDMA Band 5                 | 23.0           | 23.0          | 23.0        |
| LTE Band 2                   | 22.0           | 22.0          | 22.0        |
| LTE Band 5                   | 23.0           | 23.0          | 23.0        |
| LTE Band 7                   | 21.5           | 21.5          | 21.5        |
| LTE Band 12                  | 23.0           | 23.0          | 23.0        |
| LTE Band 41                  | 21.5           | 21.5          | 21.5        |
| WLAN 2.4G                    | 11.5           | 11.5          | 11.5        |
| WLAN 5.2G                    | 13.5           | 13.5          | 13.5        |
| WLAN 5.8G                    | 11.5           | 11.5          | 11.5        |
| Bluetooth                    | 6.5            | 6.5           | 6.5         |
| BLE                          | 3.5            | 3.5           | 3.5         |

**Test Results:****GSM:**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |
|----------|-------------|-----------------|-----------------------|
| GSM 850  | 128         | 824.2           | 31.40                 |
|          | 190         | 836.6           | 31.40                 |
|          | 251         | 848.8           | 31.30                 |
| PCS 1900 | 512         | 1850.2          | 29.90                 |
|          | 661         | 1880            | 29.90                 |
|          | 810         | 1909.8          | 29.90                 |

**GPRS:**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |         |         |         |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
|          |             |                 | 1 slot                | 2 slots | 3 slots | 4 slots |
| GSM 850  | 128         | 824.2           | 31.35                 | 29.74   | 27.92   | 25.87   |
|          | 190         | 836.6           | 31.33                 | 29.78   | 27.87   | 25.81   |
|          | 251         | 848.8           | 31.22                 | 29.67   | 27.62   | 25.59   |
| PCS 1900 | 512         | 1850.2          | 29.32                 | 27.44   | 25.83   | 23.71   |
|          | 661         | 1880            | 29.31                 | 27.42   | 25.82   | 23.92   |
|          | 810         | 1909.8          | 29.18                 | 27.23   | 25.60   | 23.64   |

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot                                  | 1     | 2     | 3        | 4     |
|------------------------------------------------------|-------|-------|----------|-------|
| Duty Cycle                                           | 1:8   | 1:4   | 1:2.66   | 1:2   |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor                                         | 8     | 4     | 2.66     | 2     |

**The time based average power for GPRS**

| Band     | Channel No. | Frequency (MHz) | RF Output Power (dBm) |              |              |         |
|----------|-------------|-----------------|-----------------------|--------------|--------------|---------|
|          |             |                 | 1 slot                | 2 slots      | 3 slots      | 4 slots |
| GSM 850  | 128         | 824.2           | 22.35                 | 23.74        | 23.67        | 22.87   |
|          | 190         | 836.6           | 22.33                 | <b>23.78</b> | 23.62        | 22.81   |
|          | 251         | 848.8           | 22.22                 | 23.67        | 23.37        | 22.59   |
| PCS 1900 | 512         | 1850.2          | 20.32                 | 21.44        | <b>21.58</b> | 20.71   |
|          | 661         | 1880            | 20.31                 | 21.42        | 21.57        | 20.92   |
|          | 810         | 1909.8          | 20.18                 | 21.23        | 21.35        | 20.64   |

**Note:**

- 1 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
2. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).



**WCDMA Band 2:**

| Test Condition | Test Mode | 3GPP Sub Test | Averaged Mean Power (dBm) |               |                |
|----------------|-----------|---------------|---------------------------|---------------|----------------|
|                |           |               | Low Frequency             | Mid Frequency | High Frequency |
| Normal         | RMC12.2k  |               | 22.87                     | 22.82         | 22.66          |
|                | HSDPA     | 1             | 22.06                     | 21.99         | 21.25          |
|                |           | 2             | 22.01                     | 21.47         | 21.30          |
|                |           | 3             | 22.03                     | 21.34         | 21.35          |
|                |           | 4             | 21.53                     | 21.42         | 21.64          |
|                | HSUPA     | 1             | 22.15                     | 21.93         | 21.88          |
|                |           | 2             | 22.37                     | 21.80         | 21.78          |
|                |           | 3             | 22.21                     | 21.88         | 21.54          |
|                |           | 4             | 22.24                     | 21.76         | 21.69          |
|                |           | 5             | 22.18                     | 21.54         | 21.82          |
|                | HSPA+     | 1             | 22.25                     | 21.36         | 21.56          |

**WCDMA Band 5:**

| Test Condition | Test Mode | 3GPP Sub Test | Averaged Mean Power (dBm) |               |                |
|----------------|-----------|---------------|---------------------------|---------------|----------------|
|                |           |               | Low Frequency             | Mid Frequency | High Frequency |
| Normal         | RMC12.2k  |               | 22.63                     | 22.59         | 22.57          |
|                | HSDPA     | 1             | 21.54                     | 21.82         | 21.95          |
|                |           | 2             | 21.48                     | 21.73         | 21.94          |
|                |           | 3             | 21.46                     | 21.51         | 21.78          |
|                |           | 4             | 21.42                     | 21.47         | 21.66          |
|                | HSUPA     | 1             | 21.66                     | 21.79         | 21.52          |
|                |           | 2             | 21.41                     | 21.51         | 21.41          |
|                |           | 3             | 21.59                     | 21.30         | 21.59          |
|                |           | 4             | 21.38                     | 21.19         | 21.37          |
|                |           | 5             | 21.57                     | 21.43         | 21.33          |
|                | HSPA+     | 1             | 21.34                     | 21.45         | 21.19          |

**Note:**

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

**LTE Band 2:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 21.52             | 21.50                | 21.58              |
|                |                 | RB1#3                      | 0          | 0        | 21.45             | 21.44                | 21.42              |
|                |                 | RB1#5                      | 0          | 0        | 21.23             | 21.51                | 21.51              |
|                |                 | RB3#0                      | 1          | 1        | 21.51             | 21.49                | 21.57              |
|                |                 | RB3#3                      | 1          | 1        | 21.44             | 21.43                | 21.41              |
|                |                 | RB6#0                      | 1          | 1        | 21.22             | 21.50                | 21.50              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.15             | 21.21                | 21.19              |
|                |                 | RB1#3                      | 1          | 1        | 21.04             | 21.17                | 21.18              |
|                |                 | RB1#5                      | 1          | 1        | 21.05             | 21.17                | 21.17              |
|                |                 | RB3#0                      | 2          | 2        | 21.13             | 21.19                | 21.17              |
|                |                 | RB3#3                      | 2          | 2        | 21.02             | 21.15                | 21.16              |
|                |                 | RB6#0                      | 2          | 2        | 21.03             | 21.15                | 21.15              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 21.55             | 21.53                | 21.61              |
|                |                 | RB1#8                      | 0          | 0        | 21.48             | 21.47                | 21.45              |
|                |                 | RB1#14                     | 0          | 0        | 21.26             | 21.54                | 21.54              |
|                |                 | RB6#0                      | 1          | 1        | 21.30             | 21.38                | 21.47              |
|                |                 | RB6#9                      | 1          | 1        | 21.20             | 21.36                | 21.35              |
|                |                 | RB15#0                     | 1          | 1        | 21.09             | 21.33                | 21.13              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.18             | 21.24                | 21.22              |
|                |                 | RB1#8                      | 1          | 1        | 21.07             | 21.20                | 21.21              |
|                |                 | RB1#14                     | 1          | 1        | 21.08             | 21.20                | 21.20              |
|                |                 | RB6#0                      | 2          | 2        | 20.17             | 20.33                | 20.28              |
|                |                 | RB6#9                      | 2          | 2        | 20.15             | 20.35                | 20.32              |
|                |                 | RB15#0                     | 2          | 2        | 20.11             | 20.22                | 20.18              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 21.58             | 21.56                | 21.64              |
|                |                 | RB1#13                     | 0          | 0        | 21.51             | 21.50                | 21.48              |
|                |                 | RB1#24                     | 0          | 0        | 21.29             | 21.57                | 21.57              |
|                |                 | RB15#0                     | 1          | 1        | 21.33             | 21.41                | 21.50              |
|                |                 | RB15#10                    | 1          | 1        | 21.23             | 21.39                | 21.38              |
|                |                 | RB25#0                     | 1          | 1        | 21.12             | 21.36                | 21.16              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.21             | 21.27                | 21.25              |
|                |                 | RB1#13                     | 1          | 1        | 21.10             | 21.23                | 21.24              |
|                |                 | RB1#24                     | 1          | 1        | 21.11             | 21.23                | 21.23              |
|                |                 | RB15#0                     | 2          | 2        | 20.20             | 20.36                | 20.31              |
|                |                 | RB15#10                    | 2          | 2        | 20.18             | 20.38                | 20.35              |
|                |                 | RB25#0                     | 2          | 2        | 20.14             | 20.25                | 20.21              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 21.60             | 21.58                | 21.66              |
|                |                 | RB1#25                     | 0          | 0        | 21.53             | 21.52                | 21.50              |
|                |                 | RB1#49                     | 0          | 0        | 21.31             | 21.59                | 21.59              |
|                |                 | RB25#0                     | 1          | 1        | 21.35             | 21.43                | 21.52              |
|                |                 | RB25#25                    | 1          | 1        | 21.25             | 21.41                | 21.40              |
|                |                 | RB50#0                     | 1          | 1        | 21.14             | 21.38                | 21.18              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.23             | 21.29                | 21.27              |
|                |                 | RB1#25                     | 1          | 1        | 21.12             | 21.25                | 21.26              |

|     |        |         |   |   |       |              |       |
|-----|--------|---------|---|---|-------|--------------|-------|
|     |        | RB1#49  | 1 | 1 | 21.13 | 21.25        | 21.25 |
|     |        | RB25#0  | 2 | 2 | 20.22 | 20.38        | 20.33 |
|     |        | RB25#25 | 2 | 2 | 20.20 | 20.40        | 20.37 |
|     |        | RB50#0  | 2 | 2 | 20.16 | 20.27        | 20.23 |
| 15M | QPSK   | RB1#0   | 0 | 0 | 21.63 | 21.61        | 21.69 |
|     |        | RB1#38  | 0 | 0 | 21.56 | 21.55        | 21.53 |
|     |        | RB1#74  | 0 | 0 | 21.34 | 21.62        | 21.62 |
|     |        | RB36#0  | 1 | 1 | 21.38 | 21.46        | 21.55 |
|     |        | RB36#39 | 1 | 1 | 21.28 | 21.44        | 21.43 |
|     |        | RB75#0  | 1 | 1 | 21.17 | 21.41        | 21.21 |
|     | 16-QAM | RB1#0   | 1 | 1 | 21.26 | 21.32        | 21.30 |
|     |        | RB1#38  | 1 | 1 | 21.15 | 21.28        | 21.29 |
|     |        | RB1#74  | 1 | 1 | 21.16 | 21.28        | 21.28 |
|     |        | RB36#0  | 2 | 2 | 20.25 | 20.41        | 20.36 |
|     |        | RB36#39 | 2 | 2 | 20.23 | 20.43        | 20.40 |
|     |        | RB75#0  | 2 | 2 | 20.19 | 20.30        | 20.26 |
| 20M | QPSK   | RB1#0   | 0 | 0 | 21.68 | <b>21.82</b> | 21.74 |
|     |        | RB1#50  | 0 | 0 | 21.64 | 21.73        | 21.70 |
|     |        | RB1#99  | 0 | 0 | 21.55 | 21.69        | 21.66 |
|     |        | RB50#0  | 1 | 1 | 21.49 | 21.63        | 21.59 |
|     |        | RB50#50 | 1 | 1 | 21.46 | 21.56        | 21.52 |
|     |        | RB100#0 | 1 | 1 | 21.37 | 21.47        | 21.44 |
|     | 16-QAM | RB1#0   | 1 | 1 | 21.31 | 21.41        | 21.38 |
|     |        | RB1#50  | 1 | 1 | 21.28 | 21.38        | 21.35 |
|     |        | RB1#99  | 1 | 1 | 21.27 | 21.37        | 21.34 |
|     |        | RB50#0  | 2 | 2 | 20.39 | 20.49        | 20.46 |
|     |        | RB50#50 | 2 | 2 | 20.38 | 20.48        | 20.45 |
|     |        | RB100#0 | 2 | 2 | 20.33 | 20.43        | 20.40 |

**LTE Band 5:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.59             | 22.66                | 22.45              |
|                |                 | RB1#3                      | 0          | 0        | 22.44             | 22.51                | 22.43              |
|                |                 | RB1#5                      | 0          | 0        | 22.42             | 22.47                | 22.36              |
|                |                 | RB3#0                      | 1          | 1        | 22.57             | 22.64                | 22.43              |
|                |                 | RB3#3                      | 1          | 1        | 22.42             | 22.49                | 22.41              |
|                |                 | RB6#0                      | 1          | 1        | 22.40             | 22.45                | 22.34              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.09             | 22.31                | 22.10              |
|                |                 | RB1#3                      | 1          | 1        | 22.12             | 22.34                | 22.08              |
|                |                 | RB1#5                      | 1          | 1        | 22.09             | 22.30                | 22.13              |
|                |                 | RB3#0                      | 2          | 2        | 22.08             | 22.30                | 22.09              |
|                |                 | RB3#3                      | 2          | 2        | 22.11             | 22.33                | 22.07              |
|                |                 | RB6#0                      | 2          | 2        | 22.08             | 22.29                | 22.12              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 22.63             | 22.70                | 22.49              |
|                |                 | RB1#8                      | 0          | 0        | 22.48             | 22.55                | 22.47              |
|                |                 | RB1#14                     | 0          | 0        | 22.46             | 22.51                | 22.40              |
|                |                 | RB6#0                      | 1          | 1        | 22.32             | 22.48                | 22.32              |
|                |                 | RB6#9                      | 1          | 1        | 22.28             | 22.40                | 22.28              |
|                |                 | RB15#0                     | 1          | 1        | 22.17             | 22.42                | 22.20              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.13             | 22.35                | 22.14              |
|                |                 | RB1#8                      | 1          | 1        | 22.16             | 22.38                | 22.12              |
|                |                 | RB1#14                     | 1          | 1        | 22.13             | 22.34                | 22.17              |
|                |                 | RB6#0                      | 2          | 2        | 21.87             | 22.00                | 21.88              |
|                |                 | RB6#9                      | 2          | 2        | 21.78             | 22.00                | 21.89              |
|                |                 | RB15#0                     | 2          | 2        | 21.80             | 21.97                | 21.83              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.69             | 22.76                | 22.55              |
|                |                 | RB1#13                     | 0          | 0        | 22.54             | 22.61                | 22.53              |
|                |                 | RB1#24                     | 0          | 0        | 22.52             | 22.57                | 22.46              |
|                |                 | RB15#0                     | 1          | 1        | 22.38             | 22.54                | 22.38              |
|                |                 | RB15#10                    | 1          | 1        | 22.34             | 22.46                | 22.34              |
|                |                 | RB25#0                     | 1          | 1        | 22.23             | 22.48                | 22.26              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.19             | 22.41                | 22.20              |
|                |                 | RB1#13                     | 1          | 1        | 22.22             | 22.44                | 22.18              |
|                |                 | RB1#24                     | 1          | 1        | 22.19             | 22.40                | 22.23              |
|                |                 | RB15#0                     | 2          | 2        | 21.93             | 22.06                | 21.94              |
|                |                 | RB15#10                    | 2          | 2        | 21.84             | 22.06                | 21.95              |
|                |                 | RB25#0                     | 2          | 2        | 21.86             | 22.03                | 21.89              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 22.75             | 22.84                | 22.69              |
|                |                 | RB1#25                     | 0          | 0        | 22.67             | 22.75                | 22.61              |
|                |                 | RB1#49                     | 0          | 0        | 22.58             | 22.70                | 22.56              |
|                |                 | RB25#0                     | 1          | 1        | 22.49             | 22.66                | 22.52              |
|                |                 | RB25#25                    | 1          | 1        | 22.46             | 22.62                | 22.43              |
|                |                 | RB50#0                     | 1          | 1        | 22.37             | 22.57                | 22.39              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.32             | 22.52                | 22.34              |
|                |                 | RB1#25                     | 1          | 1        | 22.29             | 22.49                | 22.31              |

|  |  |         |   |   |       |       |       |
|--|--|---------|---|---|-------|-------|-------|
|  |  | RB1#49  | 1 | 1 | 22.28 | 22.48 | 22.30 |
|  |  | RB25#0  | 2 | 2 | 21.99 | 22.19 | 22.01 |
|  |  | RB25#25 | 2 | 2 | 21.98 | 22.18 | 22.00 |
|  |  | RB50#0  | 2 | 2 | 21.93 | 22.13 | 21.95 |

**LTE Band 7:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 20.87             | 21.03                | 20.88              |
|                |                 | RB1#13                     | 0          | 0        | 20.81             | 20.94                | 20.91              |
|                |                 | RB1#24                     | 0          | 0        | 20.72             | 20.90                | 20.82              |
|                |                 | RB15#0                     | 1          | 1        | 20.68             | 20.85                | 20.80              |
|                |                 | RB15#10                    | 1          | 1        | 20.61             | 20.84                | 20.75              |
|                |                 | RB25#0                     | 1          | 1        | 20.57             | 20.78                | 20.74              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.57             | 20.74                | 20.67              |
|                |                 | RB1#13                     | 1          | 1        | 20.50             | 20.75                | 20.66              |
|                |                 | RB1#24                     | 1          | 1        | 20.50             | 20.74                | 20.67              |
|                |                 | RB15#0                     | 2          | 2        | 20.45             | 20.63                | 20.57              |
|                |                 | RB15#10                    | 2          | 2        | 20.45             | 20.61                | 20.55              |
|                |                 | RB25#0                     | 2          | 2        | 20.36             | 20.60                | 20.52              |
| 10M            | QPSK            | RB1#0                      | 0          | 0        | 20.91             | 21.07                | 20.92              |
|                |                 | RB1#25                     | 0          | 0        | 20.85             | 20.98                | 20.95              |
|                |                 | RB1#49                     | 0          | 0        | 20.76             | 20.94                | 20.86              |
|                |                 | RB25#0                     | 1          | 1        | 20.72             | 20.89                | 20.84              |
|                |                 | RB25#25                    | 1          | 1        | 20.65             | 20.88                | 20.79              |
|                |                 | RB50#0                     | 1          | 1        | 20.61             | 20.82                | 20.78              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.61             | 20.78                | 20.71              |
|                |                 | RB1#25                     | 1          | 1        | 20.54             | 20.79                | 20.70              |
|                |                 | RB1#49                     | 1          | 1        | 20.54             | 20.78                | 20.71              |
|                |                 | RB25#0                     | 2          | 2        | 20.49             | 20.67                | 20.61              |
| 15M            | QPSK            | RB1#0                      | 0          | 0        | 20.97             | 21.13                | 20.98              |
|                |                 | RB1#38                     | 0          | 0        | 20.91             | 21.04                | 21.01              |
|                |                 | RB1#74                     | 0          | 0        | 20.82             | 21.00                | 20.92              |
|                |                 | RB36#0                     | 1          | 1        | 20.78             | 20.95                | 20.90              |
|                |                 | RB36#39                    | 1          | 1        | 20.71             | 20.94                | 20.85              |
|                |                 | RB75#0                     | 1          | 1        | 20.67             | 20.88                | 20.84              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 20.67             | 20.84                | 20.77              |
|                |                 | RB1#38                     | 1          | 1        | 20.60             | 20.85                | 20.76              |
|                |                 | RB1#74                     | 1          | 1        | 20.60             | 20.84                | 20.77              |
|                |                 | RB36#0                     | 2          | 2        | 20.55             | 20.73                | 20.67              |
|                |                 | RB36#39                    | 2          | 2        | 20.55             | 20.71                | 20.65              |
|                |                 | RB75#0                     | 2          | 2        | 20.46             | 20.70                | 20.62              |
| 20M            | QPSK            | RB1#0                      | 0          | 0        | 21.02             | 21.19                | 21.11              |
|                |                 | RB1#50                     | 0          | 0        | 21.00             | 21.17                | 21.09              |
|                |                 | RB1#99                     | 0          | 0        | 20.93             | 21.11                | 21.05              |

|  |        |         |   |   |       |       |       |
|--|--------|---------|---|---|-------|-------|-------|
|  |        | RB50#0  | 1 | 1 | 20.89 | 21.08 | 21.02 |
|  |        | RB50#50 | 1 | 1 | 20.83 | 21.02 | 20.95 |
|  |        | RB100#0 | 1 | 1 | 20.76 | 20.97 | 20.90 |
|  | 16-QAM | RB1#0   | 1 | 1 | 20.71 | 20.92 | 20.85 |
|  |        | RB1#50  | 1 | 1 | 20.68 | 20.89 | 20.82 |
|  |        | RB1#99  | 1 | 1 | 20.67 | 20.88 | 20.81 |
|  |        | RB50#0  | 2 | 2 | 20.59 | 20.80 | 20.73 |
|  |        | RB50#50 | 2 | 2 | 20.58 | 20.79 | 20.72 |
|  |        | RB100#0 | 2 | 2 | 20.53 | 20.74 | 20.67 |

**LTE Band 12:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M           | QPSK            | RB1#0                      | 0          | 0        | 22.37             | 22.50                | 22.35              |
|                |                 | RB1#3                      | 0          | 0        | 22.24             | 22.42                | 22.28              |
|                |                 | RB1#5                      | 0          | 0        | 22.24             | 22.34                | 22.24              |
|                |                 | RB3#0                      | 1          | 1        | 22.35             | 22.48                | 22.33              |
|                |                 | RB3#3                      | 1          | 1        | 22.22             | 22.40                | 22.26              |
|                |                 | RB6#0                      | 1          | 1        | 22.22             | 22.32                | 22.22              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.95             | 22.11                | 21.96              |
|                |                 | RB1#3                      | 1          | 1        | 21.98             | 21.99                | 21.93              |
|                |                 | RB1#5                      | 1          | 1        | 21.90             | 21.98                | 21.91              |
|                |                 | RB3#0                      | 2          | 2        | 21.94             | 22.10                | 21.95              |
|                |                 | RB3#3                      | 2          | 2        | 21.97             | 21.98                | 21.92              |
|                |                 | RB6#0                      | 2          | 2        | 21.89             | 21.97                | 21.90              |
| 3M             | QPSK            | RB1#0                      | 0          | 0        | 22.41             | 22.54                | 22.39              |
|                |                 | RB1#8                      | 0          | 0        | 22.28             | 22.46                | 22.32              |
|                |                 | RB1#14                     | 0          | 0        | 22.28             | 22.38                | 22.28              |
|                |                 | RB6#0                      | 1          | 1        | 22.16             | 22.30                | 22.15              |
|                |                 | RB6#9                      | 1          | 1        | 22.05             | 22.25                | 22.16              |
|                |                 | RB15#0                     | 1          | 1        | 22.06             | 22.12                | 22.05              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 21.99             | 22.15                | 22.00              |
|                |                 | RB1#8                      | 1          | 1        | 22.02             | 22.03                | 21.97              |
|                |                 | RB1#14                     | 1          | 1        | 21.94             | 22.02                | 21.95              |
|                |                 | RB6#0                      | 2          | 2        | 21.79             | 21.99                | 21.79              |
|                |                 | RB6#9                      | 2          | 2        | 21.80             | 21.98                | 21.79              |
|                |                 | RB15#0                     | 2          | 2        | 21.75             | 21.87                | 21.78              |
| 5M             | QPSK            | RB1#0                      | 0          | 0        | 22.47             | 22.60                | 22.45              |
|                |                 | RB1#13                     | 0          | 0        | 22.34             | 22.52                | 22.38              |
|                |                 | RB1#24                     | 0          | 0        | 22.34             | 22.44                | 22.34              |
|                |                 | RB15#0                     | 1          | 1        | 22.22             | 22.36                | 22.21              |
|                |                 | RB15#10                    | 1          | 1        | 22.11             | 22.31                | 22.22              |
|                |                 | RB25#0                     | 1          | 1        | 22.12             | 22.18                | 22.11              |
|                | 16-QAM          | RB1#0                      | 1          | 1        | 22.05             | 22.21                | 22.06              |
|                |                 | RB1#13                     | 1          | 1        | 22.08             | 22.09                | 22.03              |
|                |                 | RB1#24                     | 1          | 1        | 22.00             | 22.08                | 22.01              |
|                |                 | RB15#0                     | 2          | 2        | 21.85             | 22.05                | 21.85              |

|     |        |         |   |   |       |              |       |
|-----|--------|---------|---|---|-------|--------------|-------|
| 10M |        | RB15#10 | 2 | 2 | 21.86 | 22.04        | 21.85 |
|     |        | RB25#0  | 2 | 2 | 21.81 | 21.93        | 21.84 |
|     | QPSK   | RB1#0   | 0 | 0 | 22.59 | <b>22.68</b> | 22.61 |
|     |        | RB1#25  | 0 | 0 | 22.48 | 22.59        | 22.54 |
|     |        | RB1#49  | 0 | 0 | 22.42 | 22.51        | 22.44 |
|     |        | RB25#0  | 1 | 1 | 22.33 | 22.47        | 22.36 |
|     |        | RB25#25 | 1 | 1 | 22.24 | 22.37        | 22.30 |
|     |        | RB50#0  | 1 | 1 | 22.20 | 22.31        | 22.21 |
|     | 16-QAM | RB1#0   | 1 | 1 | 22.15 | 22.26        | 22.16 |
|     |        | RB1#25  | 1 | 1 | 22.12 | 22.23        | 22.13 |
|     |        | RB1#49  | 1 | 1 | 22.11 | 22.22        | 22.12 |
|     |        | RB25#0  | 2 | 2 | 21.98 | 22.09        | 21.99 |
|     |        | RB25#25 | 2 | 2 | 21.97 | 22.08        | 21.98 |
|     |        | RB50#0  | 2 | 2 | 21.92 | 22.03        | 21.93 |

**LTE Band 41:**

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MP R | Meas M PR | Low Channel (dBm ) | Low-Mid Channel (dBm) | Mid Channel (dBm) | Mid-High Channel (dBm) | High Channel (dBm ) |
|----------------|-----------------|----------------------------|-------------|-----------|--------------------|-----------------------|-------------------|------------------------|---------------------|
| 5M             | QPSK            | RB1#0                      | 0           | 0         | 21.14              | 21.22                 | 21.30             | 21.17                  | 21.05               |
|                |                 | RB1#13                     | 0           | 0         | 21.02              | 21.03                 | 21.09             | 21.00                  | 20.86               |
|                |                 | RB1#24                     | 0           | 0         | 20.92              | 20.93                 | 21.07             | 20.98                  | 20.80               |
|                |                 | RB15#0                     | 1           | 1         | 20.91              | 20.83                 | 21.01             | 20.95                  | 20.72               |
|                |                 | RB15#10                    | 1           | 1         | 20.80              | 20.73                 | 20.90             | 20.86                  | 20.65               |
|                |                 | RB25#0                     | 1           | 1         | 20.73              | 20.67                 | 20.86             | 20.79                  | 20.60               |
|                | 16-QAM          | RB1#0                      | 1           | 1         | 20.67              | 20.65                 | 20.79             | 20.75                  | 20.57               |
|                |                 | RB1#13                     | 1           | 1         | 20.65              | 20.63                 | 20.75             | 20.70                  | 20.53               |
|                |                 | RB1#24                     | 1           | 1         | 20.46              | 20.52                 | 20.56             | 20.57                  | 20.41               |
|                |                 | RB15#0                     | 2           | 2         | 20.44              | 20.50                 | 20.53             | 20.56                  | 20.38               |
|                |                 | RB15#10                    | 2           | 2         | 20.36              | 20.31                 | 20.42             | 20.39                  | 20.23               |
|                |                 | RB25#0                     | 2           | 2         | 20.34              | 20.23                 | 20.38             | 20.36                  | 20.16               |
| 10M            | QPSK            | RB1#0                      | 0           | 0         | 21.17              | 21.25                 | 21.33             | 21.20                  | 21.08               |
|                |                 | RB1#25                     | 0           | 0         | 21.05              | 21.06                 | 21.12             | 21.03                  | 20.89               |
|                |                 | RB1#49                     | 0           | 0         | 20.95              | 20.96                 | 21.10             | 21.01                  | 20.83               |
|                |                 | RB25#0                     | 1           | 1         | 20.94              | 20.86                 | 21.04             | 20.98                  | 20.75               |
|                |                 | RB25#25                    | 1           | 1         | 20.83              | 20.76                 | 20.93             | 20.89                  | 20.68               |
|                |                 | RB50#0                     | 1           | 1         | 20.76              | 20.70                 | 20.89             | 20.82                  | 20.63               |
|                | 16-QAM          | RB1#0                      | 1           | 1         | 20.70              | 20.68                 | 20.82             | 20.78                  | 20.60               |
|                |                 | RB1#25                     | 1           | 1         | 20.68              | 20.66                 | 20.78             | 20.73                  | 20.56               |
|                |                 | RB1#49                     | 1           | 1         | 20.49              | 20.55                 | 20.59             | 20.60                  | 20.44               |
|                |                 | RB25#0                     | 2           | 2         | 20.47              | 20.53                 | 20.56             | 20.59                  | 20.41               |
|                |                 | RB25#25                    | 2           | 2         | 20.39              | 20.34                 | 20.45             | 20.42                  | 20.26               |
|                |                 | RB50#0                     | 2           | 2         | 20.37              | 20.26                 | 20.41             | 20.39                  | 20.19               |
| 15M            | QPSK            | RB1#0                      | 0           | 0         | 21.21              | 21.29                 | 21.37             | 21.24                  | 21.12               |
|                |                 | RB1#38                     | 0           | 0         | 21.09              | 21.10                 | 21.16             | 21.07                  | 20.93               |
|                |                 | RB1#74                     | 0           | 0         | 20.99              | 21.00                 | 21.14             | 21.05                  | 20.87               |
|                |                 | RB36#0                     | 1           | 1         | 20.98              | 20.90                 | 21.08             | 21.02                  | 20.79               |

|     |        |         |   |   |       |       |              |       |       |
|-----|--------|---------|---|---|-------|-------|--------------|-------|-------|
|     | 16-QAM | RB36#39 | 1 | 1 | 20.87 | 20.80 | 20.97        | 20.93 | 20.72 |
|     |        | RB75#0  | 1 | 1 | 20.80 | 20.74 | 20.93        | 20.86 | 20.67 |
|     |        | RB1#0   | 1 | 1 | 20.74 | 20.72 | 20.86        | 20.82 | 20.64 |
|     |        | RB1#38  | 1 | 1 | 20.72 | 20.70 | 20.82        | 20.77 | 20.60 |
|     |        | RB1#74  | 1 | 1 | 20.53 | 20.59 | 20.63        | 20.64 | 20.48 |
|     |        | RB36#0  | 2 | 2 | 20.51 | 20.57 | 20.60        | 20.63 | 20.45 |
|     |        | RB36#39 | 2 | 2 | 20.43 | 20.38 | 20.49        | 20.46 | 20.30 |
|     |        | RB75#0  | 2 | 2 | 20.41 | 20.30 | 20.45        | 20.43 | 20.23 |
| 20M | QPSK   | RB1#0   | 0 | 0 | 21.26 | 21.35 | <b>21.41</b> | 21.29 | 21.18 |
|     |        | RB1#50  | 0 | 0 | 21.15 | 21.16 | 21.22        | 21.13 | 20.99 |
|     |        | RB1#99  | 0 | 0 | 21.05 | 21.06 | 21.20        | 21.11 | 20.93 |
|     |        | RB50#0  | 1 | 1 | 21.04 | 20.96 | 21.14        | 21.08 | 20.85 |
|     |        | RB50#50 | 1 | 1 | 20.93 | 20.86 | 21.03        | 20.99 | 20.78 |
|     |        | RB100#0 | 1 | 1 | 20.86 | 20.80 | 20.99        | 20.92 | 20.73 |
|     | 16-QAM | RB1#0   | 1 | 1 | 20.80 | 20.78 | 20.92        | 20.88 | 20.70 |
|     |        | RB1#50  | 1 | 1 | 20.78 | 20.76 | 20.88        | 20.83 | 20.66 |
|     |        | RB1#99  | 1 | 1 | 20.59 | 20.65 | 20.69        | 20.70 | 20.54 |
|     |        | RB50#0  | 2 | 2 | 20.57 | 20.63 | 20.66        | 20.69 | 20.51 |
|     |        | RB50#50 | 2 | 2 | 20.49 | 20.44 | 20.55        | 20.52 | 20.36 |
|     |        | RB100#0 | 2 | 2 | 20.48 | 20.43 | 20.53        | 20.51 | 20.35 |

The frequency range of LTE Band 41 is 2535 ~ 2655MHz. Per KDB 447498 D04, according to the following formula Calculate  $N_c$  is 4, We chose to test 5 frequency points.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.<sup>14</sup>

$$N_c = \text{Round} \left\{ \left[ 100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- $N_c$  is the number of test channels, rounded to the nearest integer,
- $f_{\text{high}}$  and  $f_{\text{low}}$  are the highest and lowest channel frequencies within the transmission band,
- $f_c$  is the mid-band channel frequency,
- all frequencies are in MHz.



**Bluetooth:**

| Mode                 | Channel frequency (MHz) | RF Output Power (dBm) |
|----------------------|-------------------------|-----------------------|
| BDR(GFSK)            | 2402                    | 3.89                  |
|                      | 2441                    | 3.96                  |
|                      | 2480                    | 4.04                  |
| EDR( $\pi/4$ -DQPSK) | 2402                    | 5.63                  |
|                      | 2441                    | 5.59                  |
|                      | 2480                    | 5.68                  |
| EDR(8DPSK)           | 2402                    | 5.91                  |
|                      | 2441                    | 5.98                  |
|                      | 2480                    | 6.03                  |
| BLE(1M)              | 2402                    | 3.15                  |
|                      | 2440                    | 3.21                  |
|                      | 2480                    | 3.26                  |
| BLE(2M)              | 2402                    | 3.08                  |
|                      | 2440                    | 3.12                  |
|                      | 2480                    | 3.21                  |

**Wi-Fi 2.4G:**

| Mode         | Channel frequency (MHz) | Data Rate | Conducted Average Output |
|--------------|-------------------------|-----------|--------------------------|
| 802.11b      | 2412                    | 1Mbps     | 11.15                    |
|              | 2442                    |           | 11.06                    |
|              | 2472                    |           | 11.08                    |
| 802.11g      | 2412                    | 6Mbps     | 8.15                     |
|              | 2442                    |           | 8.05                     |
|              | 2472                    |           | 7.89                     |
| 802.11n HT20 | 2412                    | MCS0      | 8.17                     |
|              | 2442                    |           | 8.03                     |
|              | 2472                    |           | 7.95                     |
| 802.11n HT40 | 2422                    | MCS0      | 8.21                     |
|              | 2442                    |           | 8.11                     |
|              | 2462                    |           | 7.91                     |

**WLAN 5G:**

| Mode         | Channel frequency | Data Rate | RF Output Power(dBm) |
|--------------|-------------------|-----------|----------------------|
| 802.11a      | 5180              | 6Mbps     | 13.06                |
|              | 5200              |           | 13.06                |
|              | 5240              |           | 13.01                |
| 802.11n HT20 | 5180              | MCS0      | 12.93                |
|              | 5200              |           | 12.60                |
|              | 5240              |           | 12.76                |
| 802.11n HT40 | 5190              | MCS0      | 12.55                |
|              | 5230              |           | 12.52                |
| 802.11AC20   | 5180              | MCS0      | 12.95                |
|              | 5200              |           | 12.71                |
|              | 5240              |           | 12.77                |
| 802.11AC40   | 5190              | MCS0      | 12.58                |
|              | 5230              |           | 12.59                |
| 802.11AC80   | 5210              | MCS0      | 12.28                |

| Mode         | Channel frequency | Data Rate | RF Output Power(dBm) |
|--------------|-------------------|-----------|----------------------|
| 802.11a      | 5745              | 6Mbps     | 11.05                |
|              | 5785              |           | 11.19                |
|              | 5825              |           | 11.37                |
| 802.11n HT20 | 5745              | MCS0      | 11.00                |
|              | 5785              |           | 11.04                |
|              | 5825              |           | 11.09                |
| 802.11n HT40 | 5755              | MCS0      | 10.55                |
|              | 5795              |           | 10.58                |
| 802.11AC20   | 5745              | MCS0      | 10.84                |
|              | 5785              |           | 10.82                |
|              | 5825              |           | 11.31                |
| 802.11AC40   | 5755              | MCS0      | 10.55                |
|              | 5795              |           | 10.56                |
| 802.11AC80   | 5775              | MCS0      | 10.32                |

**Duty Cycle:**


| Test Mode  | Channel | Duty Cycle [%] |
|------------|---------|----------------|
| 11B        | 2442    | 99.41          |
| 11G        | 2442    | 95.86          |
| 11N20SISO  | 2442    | 95.16          |
| 11N40SISO  | 2442    | 90.63          |
| BT         | 2441    | 76.74          |
| BLE_1M     | 2440    | 87.23          |
| BLE_2M     | 2440    | 66.40          |
| 11A        | 5180    | 95.86          |
|            | 5200    | 95.86          |
|            | 5240    | 95.86          |
|            | 5745    | 95.86          |
|            | 5785    | 95.86          |
|            | 5825    | 95.86          |
| 11N20SISO  | 5180    | 95.16          |
|            | 5200    | 95.16          |
|            | 5240    | 95.16          |
|            | 5745    | 95.16          |
|            | 5785    | 95.16          |
|            | 5825    | 95.16          |
| 11N40SISO  | 5190    | 90.63          |
|            | 5230    | 90.63          |
|            | 5755    | 90.63          |
|            | 5795    | 90.63          |
| 11AC20SISO | 5180    | 95.20          |
|            | 5200    | 95.16          |
|            | 5240    | 95.20          |
|            | 5745    | 95.20          |
|            | 5785    | 95.20          |
|            | 5825    | 95.20          |
| 11AC40SISO | 5190    | 90.77          |
|            | 5230    | 90.77          |
|            | 5755    | 90.77          |
|            | 5795    | 90.77          |
| 11AC80SISO | 5210    | 82.86          |
|            | 5775    | 82.86          |

Note: Duty cycle for WI-Fi and BT is referenced from the DTS and U-NII and BT radio reports.

## Standalone SAR test exclusion considerations


**Preview:**


**G1 Max:**

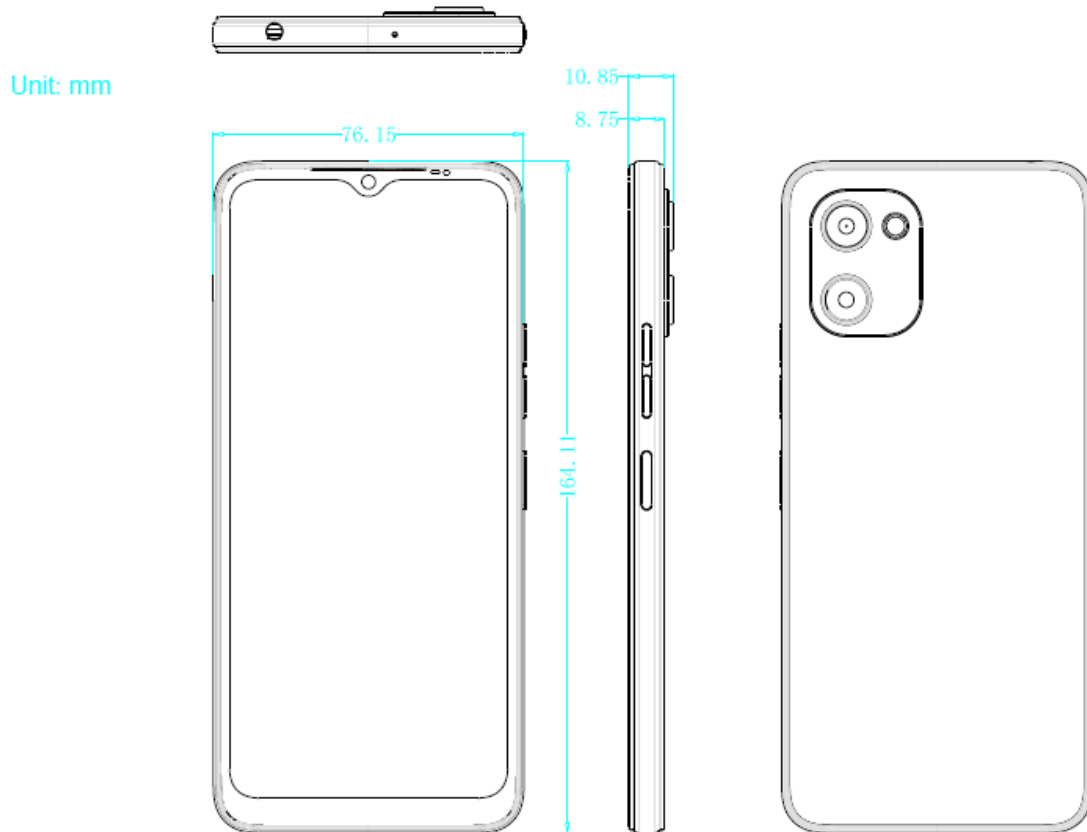

**C1 Max:**

Unit: mm

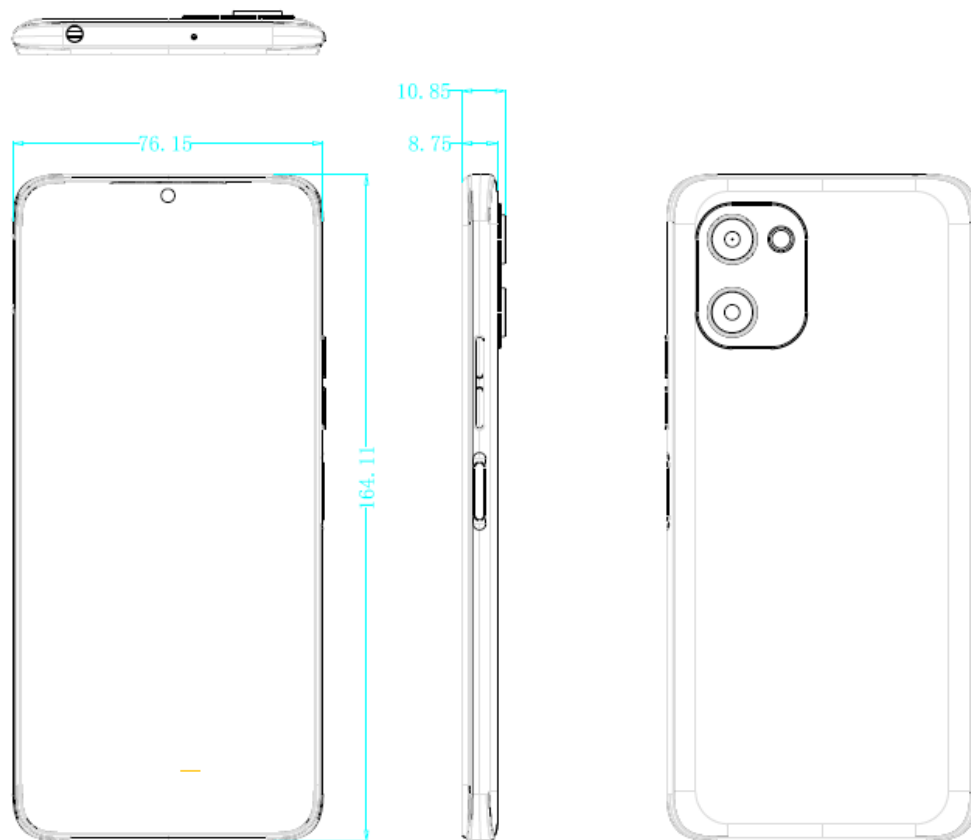

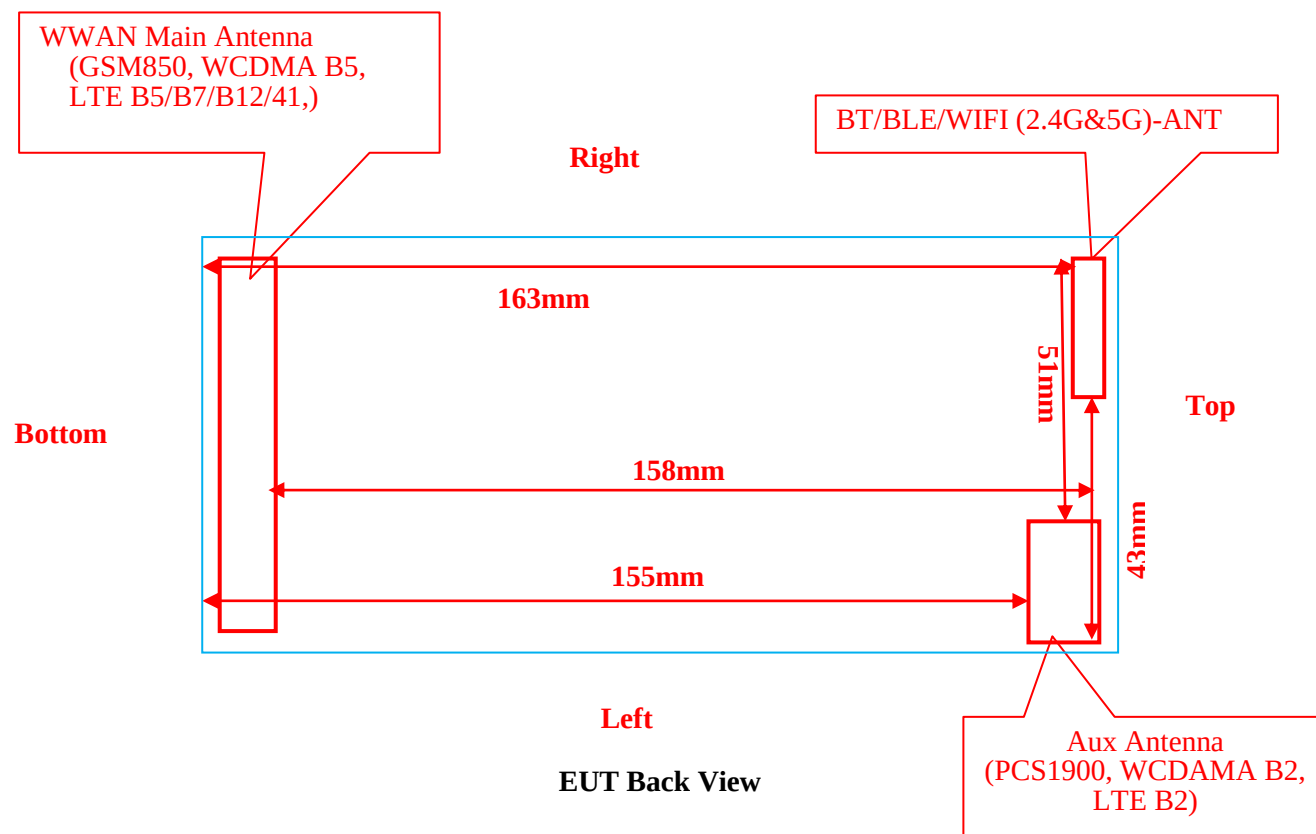
**Antennas Location:****Antenna Distance To Edge:**

| Antenna Distance To Edge(mm) |       |      |      |       |     |        |
|------------------------------|-------|------|------|-------|-----|--------|
| Antenna                      | Front | Back | Left | Right | Top | Bottom |
| Main Antenna                 | < 5   | < 5  | < 5  | < 5   | 158 | < 5    |
| Aux Antenna                  | < 5   | < 5  | < 5  | 51    | < 5 | 155    |
| BT/BLE/WIFI 2.4G/ WIFI 5G    | < 5   | < 5  | 43   | < 5   | < 5 | 163    |

Note: The models G1 Max and C1 Max have the same size, there are identical device, and we only choose G1 Max to test.

**Standalone SAR test exclusion considerations(KDB)**

General Sequence for Determination of Procedure (exemption or evaluation) to Establish Compliance with Exposure Limits for a Single RF Source:

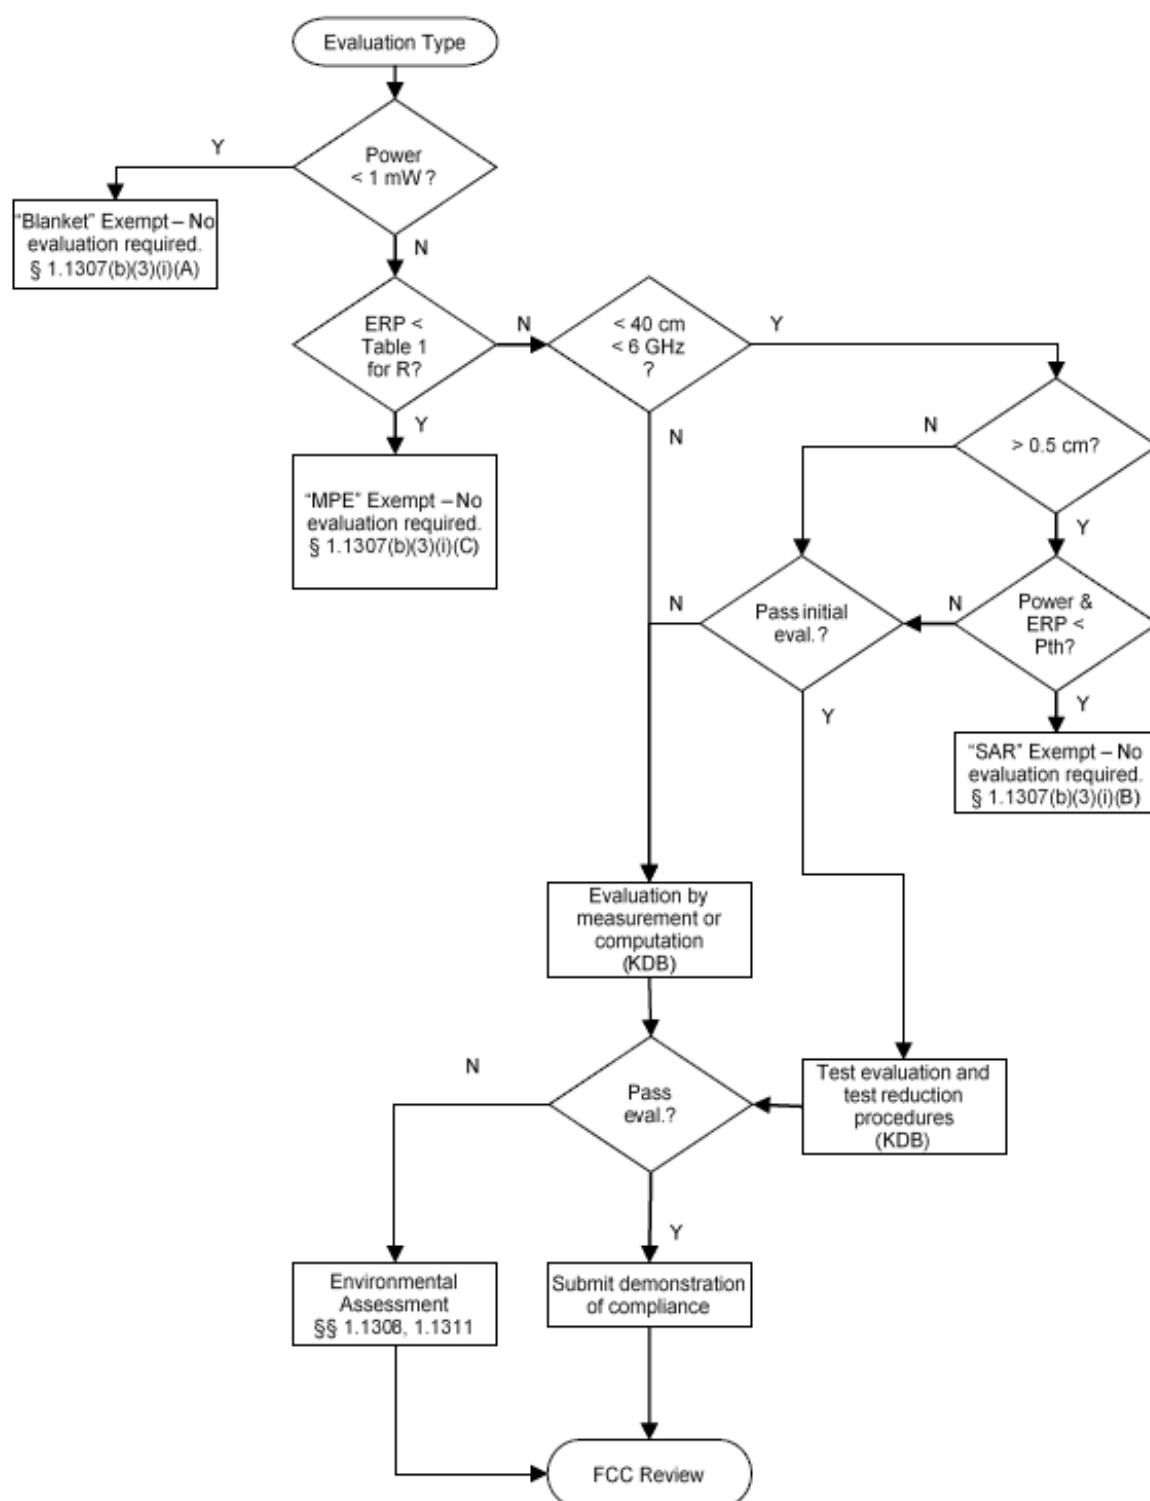

| Mode       | Frequency (MHz) | Max Target Power (dBm) | Antenna gain (dBi) | P <sub>Max</sub> (dBm) | P <sub>Max</sub> (mW) | Distance (mm) | P <sub>th</sub> (mW) | SAR Test Exclusion |
|------------|-----------------|------------------------|--------------------|------------------------|-----------------------|---------------|----------------------|--------------------|
| 2.4G Wi-Fi | 2472            | 11.5                   | 1.8                | 11.5                   | 14.13                 | < 5           | 2.72                 | No                 |
| 5.2G Wi-Fi | 5240            | 13.5                   | 1.1                | 13.5                   | 22.39                 | < 5           | 1.49                 | No                 |
| 5.8G Wi-Fi | 5825            | 11.5                   | 1.1                | 11.5                   | 14.13                 | < 5           | 1.37                 | No                 |
| Bluetooth  | 2480            | 6.5                    | 1.8                | 6.5                    | 4.47                  | < 5           | 2.72                 | No                 |

**Note:**

1. ERP= Max Target Power+ Antenna gain-2.15
2. P<sub>Max</sub> refers to the greater value in the Max Target Power and ERP.
3. The formula for calculating P<sub>th</sub> is given below, with distances ranging from 20cm to 40cm.

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

4. The formula for calculating P<sub>th</sub> is given below, with distances ranging from 0.5cm to 40cm.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and  $f$  is in GHz,  $d$  is the separation distance (cm), and ERP<sub>20cm</sub> is per Formula (Note 3).

5. When the separation distance is less than 0.5cm, 0cm is used as the calculation distance



**SAR test exclusion for the EUT edge considerations Result**

| Antenna Distance To Edge(mm) |          |          |           |           |           |           |
|------------------------------|----------|----------|-----------|-----------|-----------|-----------|
| Mode                         | Front    | Back     | Left      | Right     | Top       | Bottom    |
| Bluetooth                    | Required | Required | Exclusion | Required  | Required  | Exclusion |
| 2.4G Wi-Fi                   | Required | Required | Exclusion | Required  | Required  | Exclusion |
| 5G Wi-Fi                     | Required | Required | Exclusion | Required  | Required  | Exclusion |
| Main Antenna                 | Required | Required | Required  | Required  | Exclusion | Required  |
| Aux Antenna                  | Required | Required | Required  | Exclusion | Required  | Exclusion |

**Note:**

**Required:** The distance to Edge is less than 25mm, testing is required.

**Exclusion:** The distance to Edge is more than 25 mm, testing is not required.

**Extremity Exposure Configurations**

Per KDB 648474 D04v01r03, this device is considered a “Phablet” since the diagonal dimension is  $>160$  mm and  $<200$ mm, when hotspot mode applies, extremity SAR is required only for the surfaces and edges with hotspot mode scaled to the maximum output power (with tolerance is 1g SAR  $>1.2$  W/kg

| Extremity Exposure Condition |                   |                          |
|------------------------------|-------------------|--------------------------|
| Worst Mode                   | Hotspot SAR value | Extremity Condition Test |
| LTE BAND 2                   | 0.70 W/kg@1g      | Exclusion                |

**Exclusion:** Extremity Condition SAR testing is not required.

## SAR MEASUREMENT RESULTS

---

This page summarizes the results of the performed dosimetric evaluation.

### SAR Test Data

#### Environmental Conditions

|                           |              |              |              |              |              |              |
|---------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| <b>Temperature:</b>       | 23.1-23.9 °C | 22.3-23.5 °C | 22.1-23.2 °C | 22.8-23.6 °C | 23.1-23.9 °C | 22.2-23.1 °C |
| <b>Relative Humidity:</b> | 45-59 %      | 42-58 %      | 47-60 %      | 51-62 %      | 45-59 %      | 50-59 %      |
| <b>ATM Pressure:</b>      | 101.3 kPa    | 101.3 kPa    | 101.3 kPa    | 101.3 kPa    | 101.3 kPa    | 101.1 kPa    |
| <b>Test Date:</b>         | 2022/11/07   | 2022/11/08   | 2022/11/12   | 2022/11/15   | 2022/11/17   | 2022/11/19   |

*Testing was performed by Seven Liang, Jacky Yang, Ryse Chai.*

**GSM 850 :**

| EUT Position          | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|-----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                       |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek       | 824.2           | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.091     | 0.09       | 1    |
|                       | 848.8           | GSM       | /                      | /                      | /             | /         | /          | /    |
| Head Left Tilt        | 824.2           | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.053     | 0.05       | 2    |
|                       | 848.8           | GSM       | /                      | /                      | /             | /         | /          | /    |
| Head Right Cheek      | 824.2           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.098     | 0.10       | 3    |
|                       | 836.6           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.093     | 0.10       | 4    |
|                       | 848.8           | GSM       | 31.30                  | 31.5                   | 1.047         | 0.087     | 0.09       | 5    |
| Head Right Tilt       | 824.2           | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.046     | 0.05       | 6    |
|                       | 848.8           | GSM       | /                      | /                      | /             | /         | /          | /    |
| Body Worn Back (10mm) | 824.2           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.096     | 0.10       | 7    |
|                       | 836.6           | GSM       | 31.40                  | 31.5                   | 1.023         | 0.094     | 0.10       | 8    |
|                       | 848.8           | GSM       | 31.30                  | 31.5                   | 1.047         | 0.068     | 0.07       | 9    |
| Body Front (10mm)     | 824.2           | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GPRS      | 29.78                  | 30.0                   | 1.052         | 0.072     | 0.08       | 10   |
|                       | 848.8           | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Back (10mm)      | 824.2           | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GPRS      | 29.78                  | 30.0                   | 1.052         | 0.089     | 0.09       | 11   |
|                       | 848.8           | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Left (10mm)      | 824.2           | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GPRS      | 29.78                  | 30.0                   | 1.052         | 0.038     | 0.04       | 12   |
|                       | 848.8           | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Right (10mm)     | 824.2           | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GPRS      | 29.78                  | 30.0                   | 1.052         | 0.081     | 0.09       | 13   |
|                       | 848.8           | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Bottom (10mm)    | 824.2           | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 836.6           | GPRS      | 29.78                  | 30.0                   | 1.052         | 0.07      | 0.07       | 14   |
|                       | 848.8           | GPRS      | /                      | /                      | /             | /         | /          | /    |

**Note:**

1. The EUT transmit and receive through the same GSM antenna while testing SAR.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
4. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

**PCS 1900 :**

| EUT Position          | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|-----------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                       |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek       | 1850.2          | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GSM       | 29.9                   | 30.0                   | 1.023         | 0.389     | 0.40       | 15   |
|                       | 1909.8          | GSM       | /                      | /                      | /             | /         | /          | /    |
| Head Left Tilt        | 1850.2          | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GSM       | 29.9                   | 30.0                   | 1.023         | 0.587     | 0.60       | 16   |
|                       | 1909.8          | GSM       | /                      | /                      | /             | /         | /          | /    |
| Head Right Cheek      | 1850.2          | GSM       | 29.9                   | 30.0                   | 1.023         | 0.656     | 0.67       | 17   |
|                       | 1880            | GSM       | 29.9                   | 30.0                   | 1.023         | 0.661     | 0.68       | 18   |
|                       | 1909.8          | GSM       | 29.9                   | 30.0                   | 1.023         | 0.665     | 0.68       | 19   |
| Head Right Tilt       | 1850.2          | GSM       | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GSM       | 29.9                   | 30.0                   | 1.023         | 0.659     | 0.67       | 20   |
|                       | 1909.8          | GSM       | /                      | /                      | /             | /         | /          | /    |
| Body Worn Back (10mm) | 1850.2          | GSM       | 29.9                   | 30.0                   | 1.023         | 0.178     | 0.18       | 21   |
|                       | 1880            | GSM       | 29.9                   | 30.0                   | 1.023         | 0.222     | 0.23       | 22   |
|                       | 1909.8          | GSM       | 29.9                   | 30.0                   | 1.023         | 0.297     | 0.30       | 23   |
| Body Front (10mm)     | 1850.2          | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GPRS      | 25.82                  | 26.0                   | 1.042         | 0.166     | 0.17       | 24   |
|                       | 1909.8          | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Back (10mm)      | 1850.2          | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GPRS      | 25.82                  | 26.0                   | 1.042         | 0.187     | 0.19       | 25   |
|                       | 1909.8          | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Left (10mm)      | 1850.2          | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GPRS      | 25.82                  | 26.0                   | 1.042         | 0.12      | 0.13       | 26   |
|                       | 1909.8          | GPRS      | /                      | /                      | /             | /         | /          | /    |
| Body Top (10mm)       | 1850.2          | GPRS      | /                      | /                      | /             | /         | /          | /    |
|                       | 1880            | GPRS      | 25.82                  | 26.0                   | 1.042         | 0.135     | 0.14       | 27   |
|                       | 1909.8          | GPRS      | /                      | /                      | /             | /         | /          | /    |

**Note:**

1. The EUT transmit and receive through the same GSM antenna while testing SAR.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
4. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 2DL+3UL is the worst case.

**WCDMA Band 2 :**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                   |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek   | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.504     | 0.53       | 28   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |
| Head Left Tilt    | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.562     | 0.59       | 29   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |
| Head Right Cheek  | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.614     | 0.64       | 30   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |
| Head Right Tilt   | 1852.4          | RMC       | 22.87                  | 23.0                   | 1.030         | 0.607     | 0.63       | 31   |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.629     | 0.66       | 32   |
|                   | 1907.6          | RMC       | 22.66                  | 23.0                   | 1.081         | 0.686     | 0.74       | 33   |
| Body Front (10mm) | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.107     | 0.11       | 34   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Back (10mm)  | 1852.4          | RMC       | 22.87                  | 23.0                   | 1.030         | 0.48      | 0.49       | 35   |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.496     | 0.52       | 36   |
|                   | 1907.6          | RMC       | 22.66                  | 23.0                   | 1.081         | 0.549     | 0.59       | 37   |
| Body Left (10mm)  | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.399     | 0.42       | 38   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Top (10mm)   | 1852.4          | RMC       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | RMC       | 22.82                  | 23.0                   | 1.042         | 0.322     | 0.34       | 39   |
|                   | 1907.6          | RMC       | /                      | /                      | /             | /         | /          | /    |

**WCDMA Band 5 :**

| EUT Position       | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|--------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                    |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek    | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.139     | 0.15       | 40   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Head Left Tilt     | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.083     | 0.09       | 41   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Head Right Cheek   | 826.4           | RMC       | 22.63                  | 23.0                   | 1.089         | 0.063     | 0.07       | 42   |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.152     | 0.17       | 43   |
|                    | 846.6           | RMC       | 22.57                  | 23.0                   | 1.104         | 0.046     | 0.05       | 44   |
| Head Right Tilt    | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.076     | 0.08       | 45   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Front (10mm)  | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.189     | 0.21       | 46   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Back (10mm)   | 826.4           | RMC       | 22.63                  | 23.0                   | 1.089         | 0.167     | 0.18       | 47   |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.196     | 0.22       | 48   |
|                    | 846.6           | RMC       | 22.57                  | 23.0                   | 1.104         | 0.157     | 0.17       | 49   |
| Body Left (10mm)   | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.076     | 0.08       | 50   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Right (10mm)  | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.148     | 0.16       | 51   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |
| Body Bottom (10mm) | 826.4           | RMC       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.6           | RMC       | 22.59                  | 23.0                   | 1.099         | 0.119     | 0.13       | 52   |
|                    | 846.6           | RMC       | /                      | /                      | /             | /         | /          | /    |

**Note:**

1. The EUT transmit and receive through the same antenna while testing SAR.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
3. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/ HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
4. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

**LTE Band 2 :**

| EUT Position      | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|-------------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                   |                 |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek   | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.666     | 0.69       | 53   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.523     | 0.57       | 54   |
| Head Left Tilt    | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.668     | 0.70       | 55   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.541     | 0.59       | 56   |
| Head Right Cheek  | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.668     | 0.70       | 57   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.577     | 0.63       | 58   |
| Head Right Tilt   | 1860            | 20              | 1RB       | 21.68                  | 22.0                   | 1.076         | 0.639     | 0.69       | 59   |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.677     | 0.71       | 60   |
|                   | 1900            | 20              | 1RB       | 21.74                  | 22.0                   | 1.062         | 0.682     | 0.72       | 61   |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.627     | 0.68       | 62   |
| Body Front (10mm) | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.61      | 0.64       | 63   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.495     | 0.54       | 64   |
| Body Back (10mm)  | 1860            | 20              | 1RB       | 21.68                  | 22.0                   | 1.076         | 0.371     | 0.40       | 65   |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.676     | 0.70       | 66   |
|                   | 1900            | 20              | 1RB       | 21.74                  | 22.0                   | 1.062         | 0.417     | 0.44       | 67   |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.544     | 0.59       | 68   |
| Body Left (10mm)  | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.337     | 0.35       | 69   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.276     | 0.30       | 70   |
| Body Top (10mm)   | 1860            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 1RB       | 21.82                  | 22.0                   | 1.042         | 0.382     | 0.40       | 71   |
|                   | 1900            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 1880            | 20              | 50%RB     | 21.63                  | 22.0                   | 1.089         | 0.319     | 0.35       | 72   |

**LTE Band 5 :**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|--------------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                    |                 |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek    | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.158     | 0.16       | 73   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.131     | 0.14       | 74   |
| Head Left Tilt     | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.089     | 0.09       | 75   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.071     | 0.08       | 76   |
| Head Right Cheek   | 829             | 10              | 1RB       | 22.75                  | 23.0                   | 1.059         | 0.175     | 0.19       | 77   |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.191     | 0.20       | 78   |
|                    | 844             | 10              | 1RB       | 22.69                  | 23.0                   | 1.074         | 0.262     | 0.28       | 79   |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.153     | 0.17       | 80   |
| Head Right Tilt    | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.092     | 0.10       | 81   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.075     | 0.08       | 82   |
| Body Front (10mm)  | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.167     | 0.17       | 83   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.139     | 0.15       | 84   |
| Body Back (10mm)   | 829             | 10              | 1RB       | 22.75                  | 23.0                   | 1.059         | 0.154     | 0.16       | 85   |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.201     | 0.21       | 86   |
|                    | 844             | 10              | 1RB       | 22.69                  | 23.0                   | 1.074         | 0.2       | 0.21       | 87   |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.168     | 0.18       | 88   |
| Body Left (10mm)   | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.094     | 0.10       | 89   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.074     | 0.08       | 90   |
| Body Right (10mm)  | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.16      | 0.17       | 91   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.134     | 0.14       | 92   |
| Body Bottom (10mm) | 829             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 1RB       | 22.84                  | 23.0                   | 1.038         | 0.122     | 0.13       | 93   |
|                    | 844             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 836.5           | 10              | 50%RB     | 22.66                  | 23.0                   | 1.081         | 0.103     | 0.11       | 94   |



**LTE Band 7 :**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|--------------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                    |                 |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek    | 2510            | 20              | 1RB       | 21.02                  | 21.5                   | 1.117         | 0.435     | 0.49       | 95   |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.271     | 0.29       | 96   |
|                    | 2560            | 20              | 1RB       | 21.11                  | 21.5                   | 1.094         | 0.549     | 0.60       | 97   |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.205     | 0.23       | 98   |
| Head Left Tilt     | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.071     | 0.08       | 99   |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.043     | 0.05       | 100  |
| Head Right Cheek   | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.094     | 0.10       | 101  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.075     | 0.08       | 102  |
| Head Right Tilt    | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.096     | 0.10       | 103  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.071     | 0.08       | 104  |
| Body Front (10mm)  | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.327     | 0.35       | 105  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.325     | 0.36       | 106  |
| Body Back (10mm)   | 2510            | 20              | 1RB       | 21.02                  | 21.5                   | 1.117         | 0.343     | 0.38       | 107  |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.404     | 0.43       | 108  |
|                    | 2560            | 20              | 1RB       | 21.11                  | 21.5                   | 1.094         | 0.436     | 0.48       | 109  |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.314     | 0.35       | 110  |
| Body Left (10mm)   | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.268     | 0.29       | 111  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.209     | 0.23       | 112  |
| Body Right (10mm)  | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.074     | 0.08       | 113  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.064     | 0.07       | 114  |
| Body Bottom (10mm) | 2510            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 1RB       | 21.19                  | 21.5                   | 1.074         | 0.242     | 0.26       | 115  |
|                    | 2560            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 2535            | 20              | 50%RB     | 21.08                  | 21.5                   | 1.102         | 0.196     | 0.22       | 116  |

**LTE Band 12 :**

| EUT Position       | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|--------------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                    |                 |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek    | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.068     | 0.07       | 117  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.054     | 0.06       | 118  |
| Head Left Tilt     | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.033     | 0.04       | 119  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.026     | 0.03       | 120  |
| Head Right Cheek   | 704             | 10              | 1RB       | 22.59                  | 23.0                   | 1.099         | 0.055     | 0.06       | 121  |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.073     | 0.08       | 122  |
|                    | 711             | 10              | 1RB       | 22.61                  | 23.0                   | 1.094         | 0.049     | 0.05       | 123  |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.057     | 0.06       | 124  |
| Head Right Tilt    | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.034     | 0.04       | 125  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.026     | 0.03       | 126  |
| Body Front (10mm)  | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.088     | 0.09       | 127  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.069     | 0.08       | 128  |
| Body Back (10mm)   | 704             | 10              | 1RB       | 22.59                  | 23.0                   | 1.099         | 0.08      | 0.09       | 129  |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.099     | 0.11       | 130  |
|                    | 711             | 10              | 1RB       | 22.61                  | 23.0                   | 1.094         | 0.081     | 0.09       | 131  |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.083     | 0.09       | 132  |
| Body Left (10mm)   | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.071     | 0.08       | 133  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.055     | 0.06       | 134  |
| Body Right (10mm)  | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.089     | 0.10       | 135  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.07      | 0.08       | 136  |
| Body Bottom (10mm) | 704             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 1RB       | 22.68                  | 23.0                   | 1.076         | 0.024     | 0.03       | 137  |
|                    | 711             | 10              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                    | 707.5           | 10              | 50%RB     | 22.47                  | 23.0                   | 1.130         | 0.02      | 0.02       | 138  |

**LTE Band 41 (Power Class 3) :**

| EUT Position      | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |            |      |
|-------------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
|                   |                 |                 |           |                        |                        | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek   | 2545            | 20              | 1RB       | 21.26                  | 21.5                   | 1.057         | 0.113     | 0.12       | 139  |
|                   | 2570            | 20              | 1RB       | 21.35                  | 21.5                   | 1.035         | 0.104     | 0.11       | 140  |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.206     | 0.21       | 141  |
|                   | 2620            | 20              | 1RB       | 21.29                  | 21.5                   | 1.050         | 0.144     | 0.15       | 142  |
|                   | 2645            | 20              | 1RB       | 21.18                  | 21.5                   | 1.076         | 0.128     | 0.14       | 143  |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.152     | 0.17       | 144  |
| Head Left Tilt    | 2545            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2570            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.067     | 0.07       | 145  |
|                   | 2620            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2645            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.05      | 0.05       | 146  |
| Head Right Cheek  | 2545            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2570            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.094     | 0.10       | 147  |
|                   | 2620            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2645            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.075     | 0.08       | 148  |
| Head Right Tilt   | 2545            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2570            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.1       | 0.10       | 149  |
|                   | 2620            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2645            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.084     | 0.09       | 150  |
| Body Front (10mm) | 2545            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2570            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.188     | 0.19       | 151  |
|                   | 2620            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2645            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.147     | 0.16       | 152  |
| Body Back (10mm)  | 2545            | 20              | 1RB       | 21.26                  | 21.5                   | 1.057         | 0.271     | 0.29       | 153  |
|                   | 2570            | 20              | 1RB       | 21.35                  | 21.5                   | 1.035         | 0.267     | 0.28       | 154  |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.221     | 0.23       | 155  |
|                   | 2620            | 20              | 1RB       | 21.29                  | 21.5                   | 1.050         | 0.342     | 0.36       | 156  |
|                   | 2645            | 20              | 1RB       | 21.18                  | 21.5                   | 1.076         | 0.408     | 0.44       | 157  |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.201     | 0.22       | 158  |
| Body Left (10mm)  | 2545            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2570            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 1RB       | 21.41                  | 21.5                   | 1.021         | 0.131     | 0.13       | 159  |
|                   | 2620            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2645            | 20              | 1RB       | /                      | /                      | /             | /         | /          | /    |
|                   | 2595            | 20              | 50%RB     | 21.14                  | 21.5                   | 1.086         | 0.107     | 0.12       | 160  |

|                       |      |    |       |       |      |       |       |      |     |
|-----------------------|------|----|-------|-------|------|-------|-------|------|-----|
| Body Right<br>(10mm)  | 2545 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2570 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2595 | 20 | 1RB   | 21.41 | 21.5 | 1.021 | 0.044 | 0.04 | 161 |
|                       | 2620 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2645 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2595 | 20 | 50%RB | 21.14 | 21.5 | 1.086 | 0.035 | 0.04 | 162 |
| Body Bottom<br>(10mm) | 2545 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2570 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2595 | 20 | 1RB   | 21.41 | 21.5 | 1.021 | 0.165 | 0.17 | 163 |
|                       | 2620 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2645 | 20 | 1RB   | /     | /    | /     | /     | /    | /   |
|                       | 2595 | 20 | 50%RB | 21.14 | 21.5 | 1.086 | 0.131 | 0.14 | 164 |

**Note:**

1. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
2. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
3. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is <1.45 W/kg, tests for the remaining required test channels are optional.
4. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg.
5. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
6. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
7. Worst case SAR for 50% RB allocation is selected to be tested.
8. From May 2017 TCB Workshop, SAR tested were performed using Power Class 3 and maximum output power(Tune-up Limit) PC3 is higher from PC2.

**WLAN:**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | Scaled Factor | 1g SAR (W/kg) |                |            |      |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|---------------|----------------|------------|------|
|                   |                 |           |                        |                        |               | Meas. SAR     | Duty Cycle (%) | Scaled SAR | Plot |
| Head Left Cheek   | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.346         | 99.41          | 0.39       | 165  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
| Head Left Tilt    | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.383         | 99.41          | 0.43       | 166  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
| Head Right Cheek  | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.274         | 99.41          | 0.31       | 167  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
| Head Right Tilt   | 2412            | 802.11b   | 11.15                  | 11.5                   | 1.084         | 0.071         | 99.41          | 0.08       | 168  |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.413         | 99.41          | 0.46       | 169  |
|                   | 2472            | 802.11b   | 11.08                  | 11.5                   | 1.102         | 0.201         | 99.41          | 0.22       | 170  |
| Body Front (10mm) | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.079         | 99.41          | 0.09       | 171  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Back (10mm)  | 2412            | 802.11b   | 11.15                  | 11.5                   | 1.084         | 0.078         | 99.41          | 0.09       | 172  |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.131         | 99.41          | 0.15       | 173  |
|                   | 2472            | 802.11b   | 11.08                  | 11.5                   | 1.102         | 0.196         | 99.41          | 0.22       | 174  |
| Body Right (10mm) | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.036         | 99.41          | 0.04       | 175  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Top (10mm)   | 2412            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 2442            | 802.11b   | 11.06                  | 11.5                   | 1.107         | 0.109         | 99.41          | 0.12       | 176  |
|                   | 2472            | 802.11b   | /                      | /                      | /             | /             | /              | /          | /    |

**Note:**

1. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, OFDM SAR is not required.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11b/g/n mode is use for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
4. According 2016 Oct. TCB, for SAR testing of 2.4G WIFI 802.11b signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/( duty cycle)".

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | Scaled Factor | 1g SAR (W/kg) |                |            |      |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|---------------|----------------|------------|------|
|                   |                 |           |                        |                        |               | Meas. SAR     | Duty Cycle (%) | Scaled SAR | Plot |
| Head Left Cheek   | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.500         | 95.86          | 0.58       | 177  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Head Left Tilt    | 5180            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.567         | 95.86          | 0.65       | 178  |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.654         | 95.86          | 0.75       | 179  |
|                   | 5240            | 802.11a   | 13.01                  | 13.5                   | 1.119         | 0.717         | 95.86          | 0.84       | 180  |
| Head Right Cheek  | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.372         | 95.86          | 0.43       | 181  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Head Right Tilt   | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.411         | 95.86          | 0.47       | 182  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Front (10mm) | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.091         | 95.86          | 0.11       | 183  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Back (10mm)  | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.096         | 95.86          | 0.11       | 184  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Right (10mm) | 5180            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.017         | 95.86          | 0.02       | 185  |
|                   | 5240            | 802.11a   | /                      | /                      | /             | /             | /              | /          | /    |
| Body Top (10mm)   | 5180            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.189         | 95.86          | 0.22       | 186  |
|                   | 5200            | 802.11a   | 13.06                  | 13.5                   | 1.107         | 0.212         | 95.86          | 0.24       | 187  |
|                   | 5240            | 802.11a   | 13.01                  | 13.5                   | 1.119         | 0.150         | 95.86          | 0.18       | 188  |

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | Scaled Factor | 1g SAR (W/kg) |                |            |      |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|---------------|----------------|------------|------|
|                   |                 |           |                        |                        |               | Meas. SAR     | Duty Cycle (%) | Scaled SAR | Plot |
| Head Left Cheek   | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.256         | 95.86          | 0.29       | 189  |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Head Left Tilt    | 5745            | 802.11a   | 11.05                  | 11.5                   | 1.109         | 0.351         | 95.86          | 0.41       | 190  |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.347         | 95.86          | 0.39       | 191  |
|                   | 5825            | 802.11a   | 11.37                  | 11.5                   | 1.030         | 0.268         | 95.86          | 0.29       | 192  |
| Head Right Cheek  | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.141         | 95.86          | 0.16       | 193  |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Head Right Tilt   | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.181         | 95.86          | 0.20       | 194  |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Body Front (10mm) | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.054         | 95.86          | 0.06       | 195  |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Body Back (10mm)  | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.036         | 95.86          | 0.04       | 196  |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Body Right (10mm) | 5745            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | <0.01         | 95.86          | 0.01       | /    |
|                   | 5825            | 802.11a   | /                      | /                      | /             | /             |                | /          | /    |
| Body Top (10mm)   | 5745            | 802.11a   | 11.05                  | 11.5                   | 1.109         | 0.058         | 95.86          | 0.07       | 197  |
|                   | 5785            | 802.11a   | 11.19                  | 11.5                   | 1.074         | 0.059         | 95.86          | 0.07       | 198  |
|                   | 5825            | 802.11a   | 11.37                  | 11.5                   | 1.030         | 0.041         | 95.86          | 0.04       | 199  |

**Note:**

1. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance
2. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

**Bluetooth:**

| EUT Position      | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) |           |                |            |      |
|-------------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|----------------|------------|------|
|                   |                 |           |                        |                        | Scaled Factor | Meas. SAR | Duty Cycle (%) | Scaled SAR | Plot |
| Head Left Cheek   | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Head Left Tilt    | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Head Right Cheek  | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Head Right Tilt   | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Body Front (10mm) | 2402            | 8DPSK     | 5.91                   | 6.5                    | 1.146         | 0.062     | 76.74          | 0.09       | 200  |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | 0.055     | 76.74          | 0.08       | 201  |
|                   | 2480            | 8DPSK     | 6.03                   | 6.5                    | 1.114         | 0.030     | 76.74          | 0.04       | 202  |
| Body Back (10mm)  | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Body Right (10mm) | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
| Body Top (10mm)   | 2402            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |
|                   | 2441            | 8DPSK     | 5.98                   | 6.5                    | 1.127         | <0.01     | 76.74          | 0.01       | /    |
|                   | 2480            | 8DPSK     | /                      | /                      | /             | /         | /              | /          | /    |

**Note:**

1. When the 1-g SAR is  $\leq 0.8\text{W/Kg}$ , testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. 8DPSK is the worst case for Bluetooth.
3. According 2016 Oct. TCB, for SAR testing of Bluetooth signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".



## SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### The Highest Measured SAR Configuration in Each Frequency Band

#### Head

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) |          | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
|                             |                |            |              | Original         | Repeated |                               |
| /                           | /              | /          | /            | /                | /        | /                             |

#### Body

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) |          | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
|                             |                |            |              | Original         | Repeated |                               |
| /                           | /              | /          | /            | /                | /        | /                             |

#### Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

## SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

### Simultaneous Transmission:

| Description of Simultaneous Transmit Capabilities |               |          |
|---------------------------------------------------|---------------|----------|
| Transmitter Combination                           | Simultaneous? | Hotspot? |
| WWAN + Bluetooth                                  | √             | ×        |
| WWAN + WLAN                                       | √             | √        |
| WLAN + Bluetooth                                  | ×             | ×        |

### Simultaneous and Hotspot SAR test exclusion considerations:

| Mode(SAR1+SAR2)    | Position | Reported SAR(W/kg) |      | $\Sigma$ SAR < 1.6W/kg |
|--------------------|----------|--------------------|------|------------------------|
|                    |          | SAR1               | SAR2 |                        |
| WWAN+WLAN          | Head     | 0.74               | 0.84 | <b>1.58</b>            |
|                    | Body     | 0.70               | 0.24 | <b>0.94</b>            |
| WWAN+BT            | Head     | 0.74               | 0.01 | 0.75                   |
|                    | Body     | 0.70               | 0.09 | 0.79                   |
| WWAN(Hotspot)+WLAN | Body     | 0.70               | 0.24 | <b>0.94</b>            |

### Note:

1. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.
2. Hotspot Mode is not feasible during voice calls.

### Conclusion:

Sum of SAR:  $\Sigma$ SAR  $\leq$  1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

## **SAR Plots**

---

**Please Refer to the Attachment.**

## APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

### Measurement uncertainty evaluation for IEEE1528-2013 SAR test

| Source of uncertainty                                | Tolerance/<br>uncertainty<br>± % | Probability<br>distribution | Divisor    | ci<br>(1 g) | ci<br>(10 g) | Standard<br>uncertainty<br>± %, (1 g) | Standard<br>uncertainty<br>± %, (10 g) |
|------------------------------------------------------|----------------------------------|-----------------------------|------------|-------------|--------------|---------------------------------------|----------------------------------------|
| <b>Measurement system</b>                            |                                  |                             |            |             |              |                                       |                                        |
| Probe calibration                                    | 6.55                             | N                           | 1          | 1           | 1            | 6.6                                   | 6.6                                    |
| Axial Isotropy                                       | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Hemispherical Isotropy                               | 9.6                              | R                           | $\sqrt{3}$ | 0           | 0            | 0.0                                   | 0.0                                    |
| Boundary effect                                      | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Linearity                                            | 4.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.7                                   | 2.7                                    |
| Detection limits                                     | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Readout electronics                                  | 0.3                              | N                           | 1          | 1           | 1            | 0.3                                   | 0.3                                    |
| Response time                                        | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| Integration time                                     | 0.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.0                                   | 0.0                                    |
| RF ambient conditions – noise                        | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| RF ambient conditions–reflections                    | 1.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.6                                   | 0.6                                    |
| Probe positioner mech. Restrictions                  | 0.8                              | R                           | $\sqrt{3}$ | 1           | 1            | 0.5                                   | 0.5                                    |
| Probe positioning with respect to phantom shell      | 6.7                              | R                           | $\sqrt{3}$ | 1           | 1            | 3.9                                   | 3.9                                    |
| Post-processing                                      | 2.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 1.2                                   | 1.2                                    |
| <b>Test sample related</b>                           |                                  |                             |            |             |              |                                       |                                        |
| Test sample positioning                              | 2.8                              | N                           | 1          | 1           | 1            | 2.8                                   | 2.8                                    |
| Device holder uncertainty                            | 6.3                              | N                           | 1          | 1           | 1            | 6.3                                   | 6.3                                    |
| Drift of output power                                | 5.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.9                                   | 2.9                                    |
| <b>Phantom and set-up</b>                            |                                  |                             |            |             |              |                                       |                                        |
| Phantom uncertainty (shape and thickness tolerances) | 4.0                              | R                           | $\sqrt{3}$ | 1           | 1            | 2.3                                   | 2.3                                    |
| Liquid conductivity target)                          | 5.0                              | R                           | $\sqrt{3}$ | 0.64        | 0.43         | 1.8                                   | 1.2                                    |
| Liquid conductivity meas.)                           | 2.5                              | N                           | 1          | 0.64        | 0.43         | 1.6                                   | 1.1                                    |
| Liquid permittivity target)                          | 5.0                              | R                           | $\sqrt{3}$ | 0.6         | 0.49         | 1.7                                   | 1.4                                    |
| Liquid permittivity meas.)                           | 2.5                              | N                           | 1          | 0.6         | 0.49         | 1.5                                   | 1.2                                    |
| Combined standard uncertainty                        |                                  | RSS                         |            |             |              | 12.2                                  | 12.0                                   |
| Expanded uncertainty 95 % confidence interval)       |                                  |                             |            |             |              | 24.3                                  | 23.9                                   |

## **APPENDIX B EUT TEST POSITION PHOTOS**

---

**Please Refer to the Attachment.**

---

## APPENDIX C PROBE CALIBRATION CERTIFICATES

---

**Please Refer to the Attachment.**

---

## APPENDIX D DIPOLE CALIBRATION CERTIFICATES

---

**Please Refer to the Attachment.**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***