

# FCC TEST REPORT

**FCC ID: 2BM8K-TPRO10K**

**Report No.** : SSP24120177-1E

**Prepared For** : AMAZINGTHING (DONGGUAN)CO..LTD

**Product Name** : Amazingting Thunder Max 10000

**Model Name** : TPRO10K

**FCC Rule** : FCC Part 15 Subpart C

**Date of Issue** : 2025-01-16

**Prepared By** : Shenzhen CCUT Quality Technology Co., Ltd.







**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.:+86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	AMAZINGTHING (DONGGUAN)CO..LTD Room 701, Unit 3, Building 1, Anhe innovationTechnology Park, No.16, Bihu Address of Applicant.....: Road, Fenggang Town, Dongguan, China
<b>Manufacturer</b> .....:	Shenzhen Haopin Technology Co., LTD 7 / F, Building A2, Xinghuaxiong, Baihua Community, Guangming Street, Address of Manufacturer.....: Guangming District, Shenzhen, China
<b>Product Name</b> .....:	Amazingting Thunder Max 10000
<b>Brand Name</b> .....:	Amazingting
<b>Main Model</b> .....:	TPRO10K
<b>Series Models</b> .....:	TPRO10KBK, TPRO10KGY, TPRO10KBU
<b>Test Standard</b> .....:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2013
<b>Date of Test</b> .....	2024-12-18 to 2024-12-25
<b>Test Result</b> .....:	Pass
<b>Tested Engineer</b> .....	 (Walker Wu)
<b>Project Manager</b> .....:	 (Lieber Ouyang)
<b>Authorized Signatory</b> .....	 (Lahm Peng)
	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.	

## CONTENTS

<b>1. General Information.....</b>	<b>5</b>
1.1 Product Information .....	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments .....	8
1.6 Measurement Uncertainty .....	8
<b>2. Summary of Test Results .....</b>	<b>9</b>
<b>3. Antenna Requirement.....</b>	<b>10</b>
3.1 Standard and Limit.....	10
3.2 Test Result.....	10
<b>4. Conducted Emissions .....</b>	<b>11</b>
4.1 Standard and Limit.....	11
4.2 Test Procedure.....	11
4.3 Test Data and Results .....	12
<b>5. Radiated Emissions .....</b>	<b>17</b>
5.1 Standard and Limit.....	17
5.2 Test Procedure.....	17
5.3 Test Data and Results .....	19
<b>6. Occupied Bandwidth .....</b>	<b>36</b>
6.1 Standard and Limit.....	36
6.2 Test Procedure.....	36
6.3 Test Data and Results .....	36

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2025-01-16	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	Amazingting Thunder Max 10000
Trade Name:	Amazingting
Main Model:	TPRO10K
Series Models:	TPRO10KBK, TPRO10KGY, TPRO10KBU
Rated Voltage:	Type-C Input: 5V=3A, 9V=2A, 12V=1.5A Type-C cables1 Input: 5V=3A, 9V=2A, 12V=1.5A Type-C Output: 5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A Type-C cables1 output: 5V=3A, 9V=2.22A, 10V=2.25A, 12V=1.67A Type-C cables2 output: 5V=2.4A wireless charging output: 5W, 7.5W, 10W, 15W watch wireless charging output: 2.5W
Power Adapter:	-
Battery:	DC 3.85V, 10000mAh
Test Sample No:	SSP24120177-1
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	WPC
Operating Frequency:	Wireless charging Output (Phone/Earphone):110.5kHz-205kHz Wireless charging Output (Watch): 310kHz-340kHz
Modulation:	FSK
Antenna Gain:	0dBi
Type of Antenna:	Coil Antenna
Type of Device:	<input checked="" type="checkbox"/> Portable Device <input type="checkbox"/> Mobile Device <input type="checkbox"/> Modular Device

## 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description		Remark
TM1	Wireless charging 15W		Maximum Power
TM2	Wireless charging 10W		Maximum Power
TM3	Wireless charging 7.5W		Maximum Power
TM4	Wireless charging 5W		Maximum Power
TM5	Wireless charging 2.5W		Maximum Power
TM6	Wireless charging 5W+Chargiing		Maximum Power
TM7	Wireless charging 2.5W+Chargiing		AC 120V/60Hz
Note: All modes have been tested and only the worst mode Wireless charging 15W and Wireless charging 5W+Chargiing, Wireless charging 2.5W and Wireless charging 2.5W+Chargiing data is represented in the report.			
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB Cable	100	Unshielded	Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Dummy load	YBZ	YBZ-001	N/A
Dummy load	YBZ	YBZ-002	N/A
Adapter	UGREEN	CD289	90324

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

## 1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
<b>Conducted Emissions</b>					
AMN	ROHDE&SCHWARZ	ENV216	101097	2024-08-07	2025-08-06
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2024-08-07	2025-08-06
Test Cable	N/A	Cable 5	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
<b>Radiated Emissions</b>					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2024-08-07	2025-08-06
Amplifier	SCHWARZBECK	BBV 9743B	00251	2024-08-07	2025-08-06
Amplifier	HUABO	YXL0518-2.5-45	--	2024-08-07	2025-08-06
Loop Antenna	DAZE	ZN30900C	21104	2024-08-03	2025-08-02
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2024-08-03	2025-08-02
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2024-08-03	2025-08-02
Attenuator	QUANJUDA	6dB	220731	2024-08-07	2025-08-06
Test Cable	N/A	Cable 1	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 2	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 3	N/A	2024-08-07	2025-08-06
Test Cable	N/A	Cable 4	N/A	2024-08-07	2025-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A
<b>Conducted RF Testing</b>					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2024-08-07	2025-08-06
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2024-08-07	2025-08-06

## 1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %



## 2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209	Radiated Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

### **3. Antenna Requirement**

---

#### **3.1 Standard and Limit**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an Coil antenna, fulfill the requirement of this section.

## 4. Conducted Emissions

### 4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

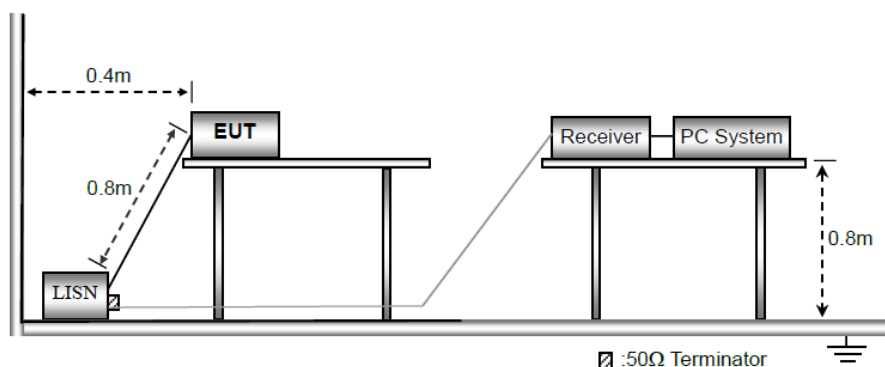

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.

### **4.3 Test Data and Results**

Based on all tested mode data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case TM6 and TM7 as below:

Remark: Level = Reading + Factor, Margin = Level - Limit


## Test Plots and Data of Conducted Emissions

Tested Mode: TM6

Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

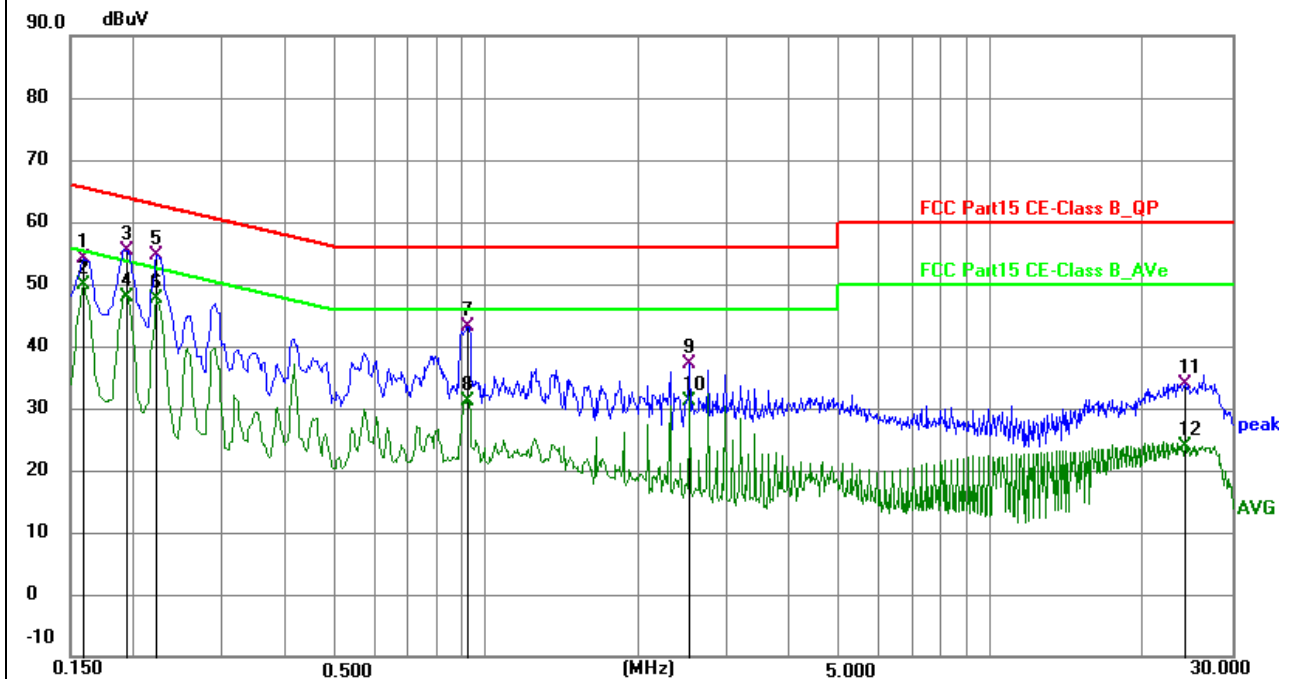

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	44.82	9.24	54.06	65.52	-11.46	QP	P	
2	0.1590	40.67	9.24	49.91	55.52	-5.61	AVG	P	
3	0.1949	46.23	9.21	55.44	63.83	-8.39	QP	P	
4	0.1949	38.70	9.21	47.91	53.83	-5.92	AVG	P	
5	0.2220	45.50	9.25	54.75	62.74	-7.99	QP	P	
6 *	0.2220	38.29	9.25	47.54	52.74	-5.20	AVG	P	
7	0.9195	33.78	9.38	43.16	56.00	-12.84	QP	P	
8	0.9195	21.76	9.38	31.14	46.00	-14.86	AVG	P	
9	2.5305	27.56	9.48	37.04	56.00	-18.96	QP	P	
10	2.5305	21.74	9.48	31.22	46.00	-14.78	AVG	P	
11	24.1980	23.92	10.04	33.96	60.00	-26.04	QP	P	
12	24.1980	13.74	10.04	23.78	50.00	-26.22	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM6

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

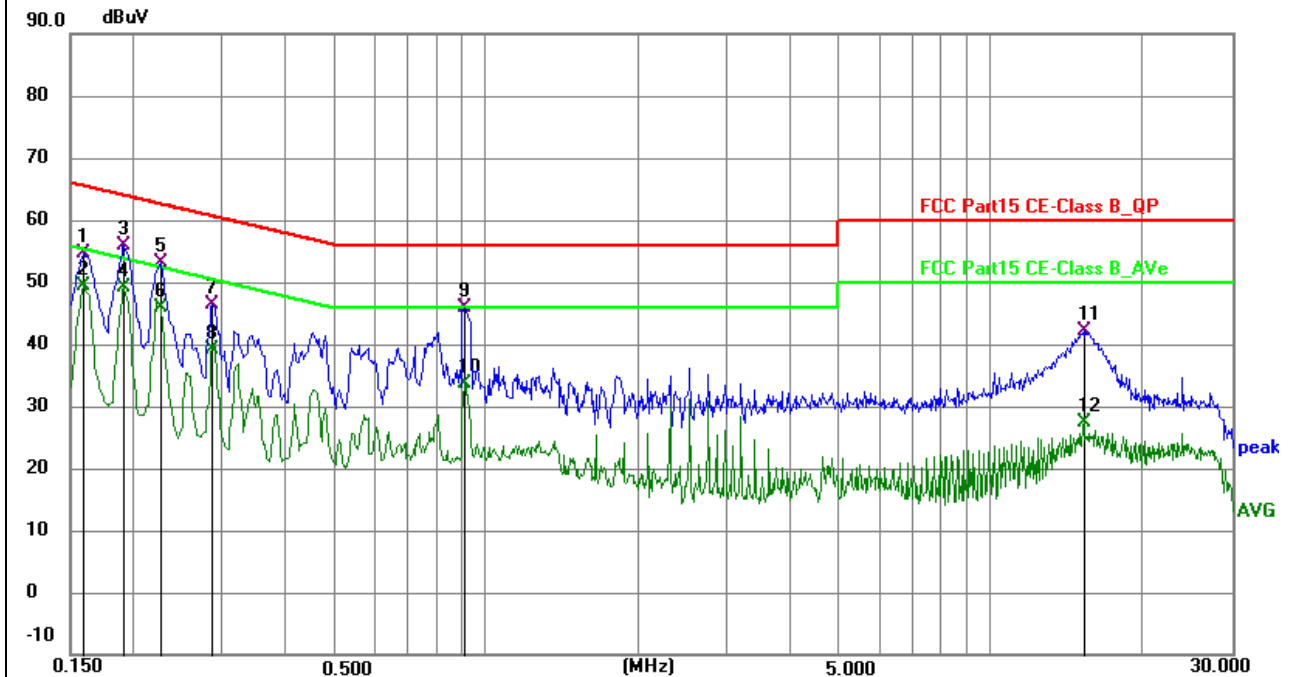

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	45.13	9.41	54.54	65.52	-10.98	QP	P	
2	0.1590	40.01	9.41	49.42	55.52	-6.10	AVG	P	
3	0.1905	46.51	9.39	55.90	64.01	-8.11	QP	P	
4 *	0.1905	39.68	9.39	49.07	54.01	-4.94	AVG	P	
5	0.2265	43.75	9.44	53.19	62.58	-9.39	QP	P	
6	0.2265	36.53	9.44	45.97	52.58	-6.61	AVG	P	
7	0.2850	36.80	9.56	46.36	60.67	-14.31	QP	P	
8	0.2850	29.59	9.56	39.15	50.67	-11.52	AVG	P	
9	0.9060	36.42	9.56	45.98	56.00	-10.02	QP	P	
10	0.9060	24.06	9.56	33.62	46.00	-12.38	AVG	P	
11	15.2385	32.35	9.73	42.08	60.00	-17.92	QP	P	
12	15.2385	17.58	9.73	27.31	50.00	-22.69	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM7

Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

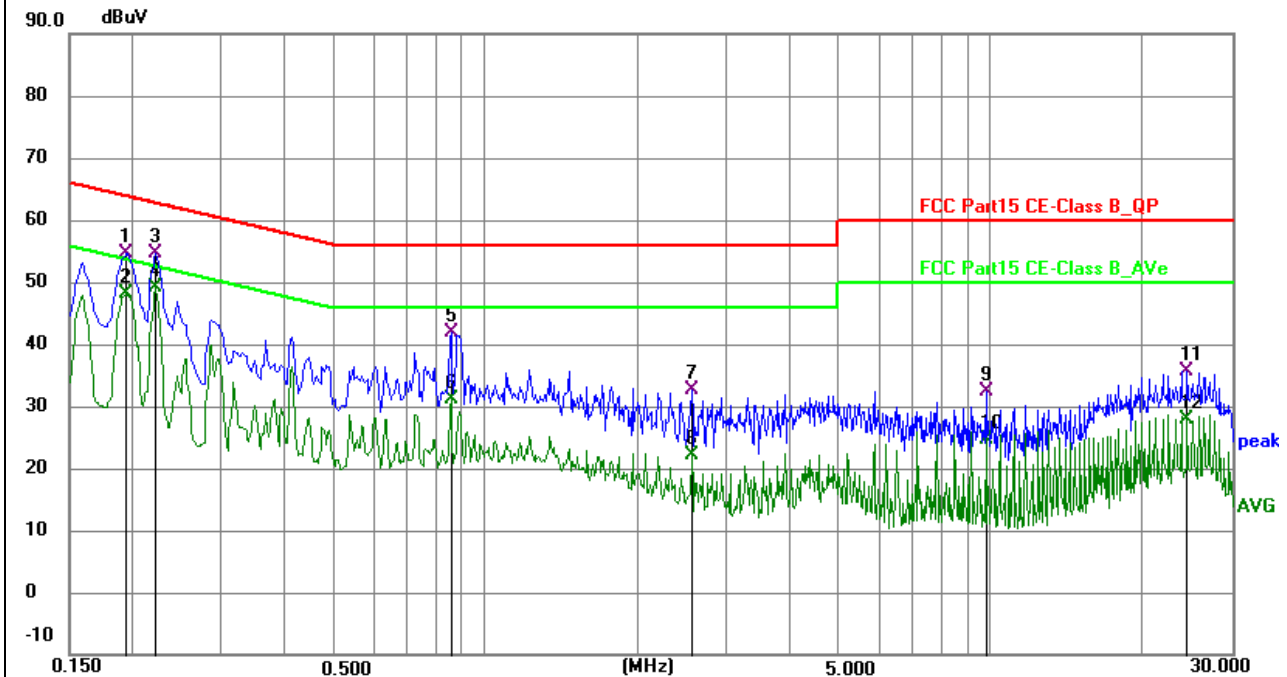

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	45.53	9.21	54.74	63.83	-9.09	QP	P	
2	0.1949	38.85	9.21	48.06	53.83	-5.77	AVG	P	
3	0.2220	45.28	9.25	54.53	62.74	-8.21	QP	P	
4 *	0.2220	39.83	9.25	49.08	52.74	-3.66	AVG	P	
5	0.8565	32.58	9.39	41.97	56.00	-14.03	QP	P	
6	0.8565	21.68	9.39	31.07	46.00	-14.93	AVG	P	
7	2.5620	23.22	9.48	32.70	56.00	-23.30	QP	P	
8	2.5620	12.71	9.48	22.19	46.00	-23.81	AVG	P	
9	9.7800	22.91	9.56	32.47	60.00	-27.53	QP	P	
10	9.7800	15.19	9.56	24.75	50.00	-25.25	AVG	P	
11	24.4545	25.53	10.04	35.57	60.00	-24.43	QP	P	
12	24.4545	17.90	10.04	27.94	50.00	-22.06	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM7

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

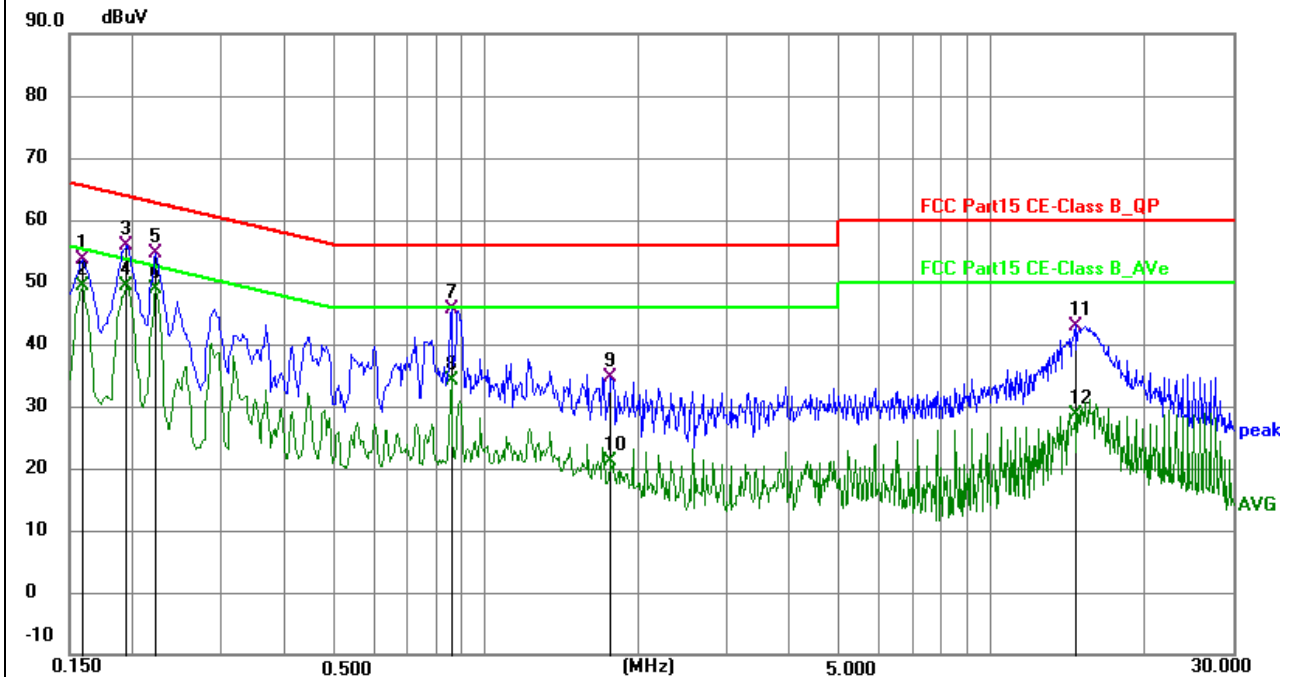

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1590	44.26	9.41	53.67	65.52	-11.85	QP	P	
2	0.1590	40.00	9.41	49.41	55.52	-6.11	AVG	P	
3	0.1949	46.50	9.39	55.89	63.83	-7.94	QP	P	
4	0.1949	40.03	9.39	49.42	53.83	-4.41	AVG	P	
5	0.2220	45.32	9.43	54.75	62.74	-7.99	QP	P	
6 *	0.2220	39.45	9.43	48.88	52.74	-3.86	AVG	P	
7	0.8565	35.95	9.58	45.53	56.00	-10.47	QP	P	
8	0.8565	24.63	9.58	34.21	46.00	-11.79	AVG	P	
9	1.7655	24.98	9.65	34.63	56.00	-21.37	QP	P	
10	1.7655	11.57	9.65	21.22	46.00	-24.78	AVG	P	
11	14.6670	33.28	9.72	43.00	60.00	-17.00	QP	P	
12	14.6670	18.92	9.72	28.64	50.00	-21.36	AVG	P	



## 5. Radiated Emissions

### 5.1 Standard and Limit


According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:

Frequency of Emission (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3
Note: The more stringent limit applies at transition frequencies.		


*Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.*

### 5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

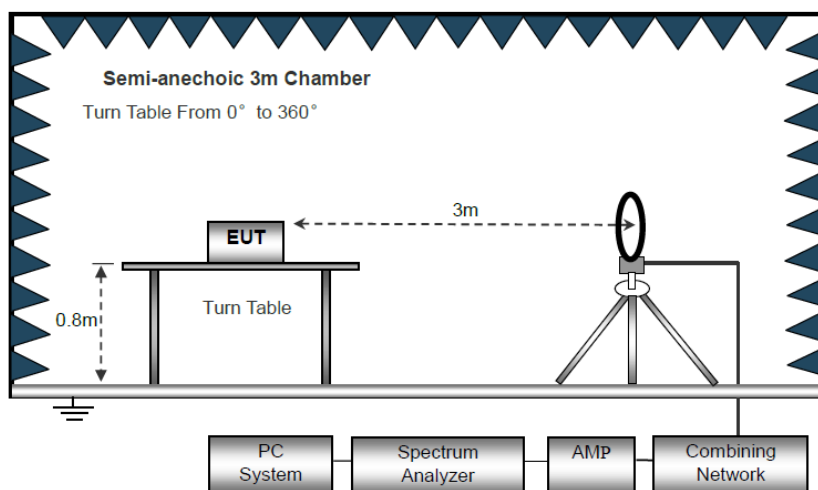

Block Diagram of Radiated Emission Below 30MHz

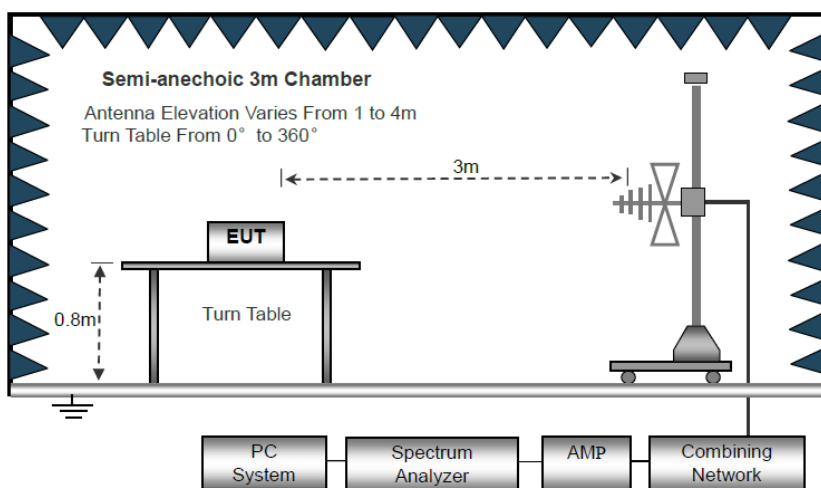

Block Diagram of Radiated Emission From 30MHz to 1GHz

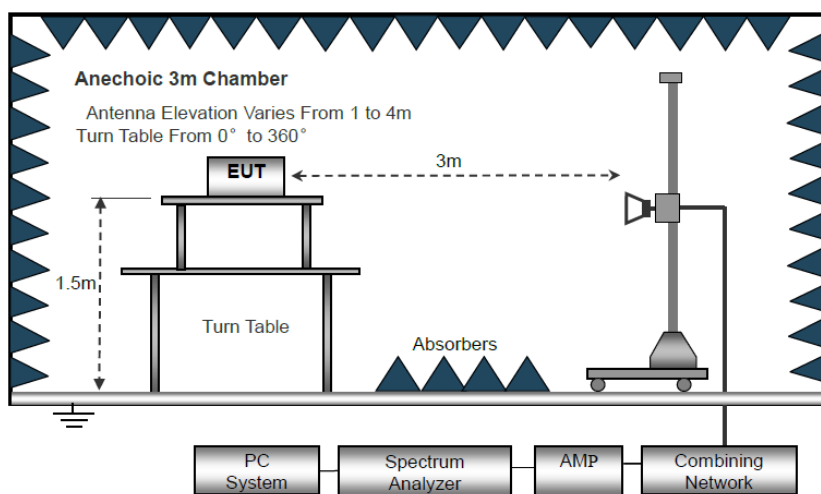

Block Diagram of Radiated Emission Above 1GHz


- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$ , 10kHz for  $f < 30\text{MHz}$   
VBW  $\geq$  RBW, Sweep = auto  
Detector function = peak  
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

### 5.3 Test Data and Results


Based on all mode tested data, the EUT complied with the FCC Part 15.209 standard limit for a wireless device, and with the worst case TM1, TM6, TM5 and TM7 as below:

## Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM1	Phase:	Coplaner
Test Voltage:	DC 3.85V from battery		
Remark:	-		

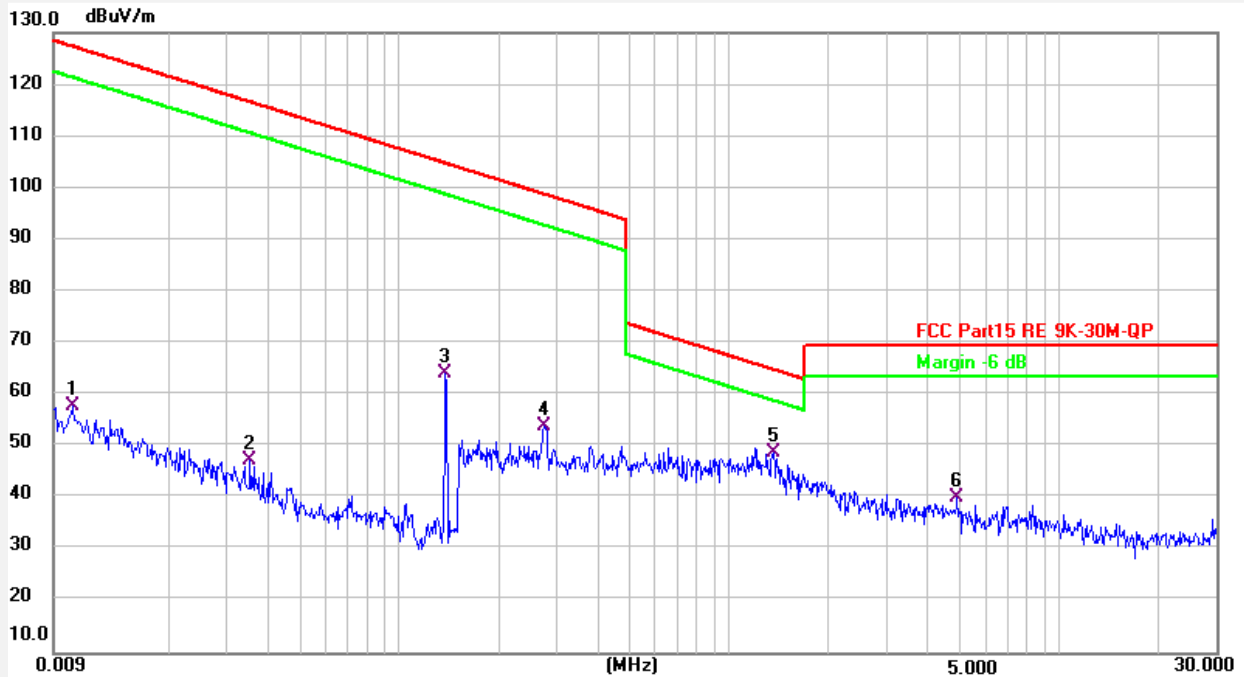


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0102	21.79	35.92	57.71	127.41	-69.70	QP	100	352	P	
2	0.0352	14.97	32.37	47.34	116.66	-69.32	QP	100	5	P	
3	0.1382	38.75	25.51	64.26	104.79	-40.53	QP	100	54	P	
4	0.2758	28.12	25.80	53.92	98.79	-44.87	QP	100	41	P	
5 *	1.3593	22.78	25.98	48.76	64.93	-16.17	QP	100	222	P	
6	4.8996	13.65	26.60	40.25	69.50	-29.25	QP	100	4	P	

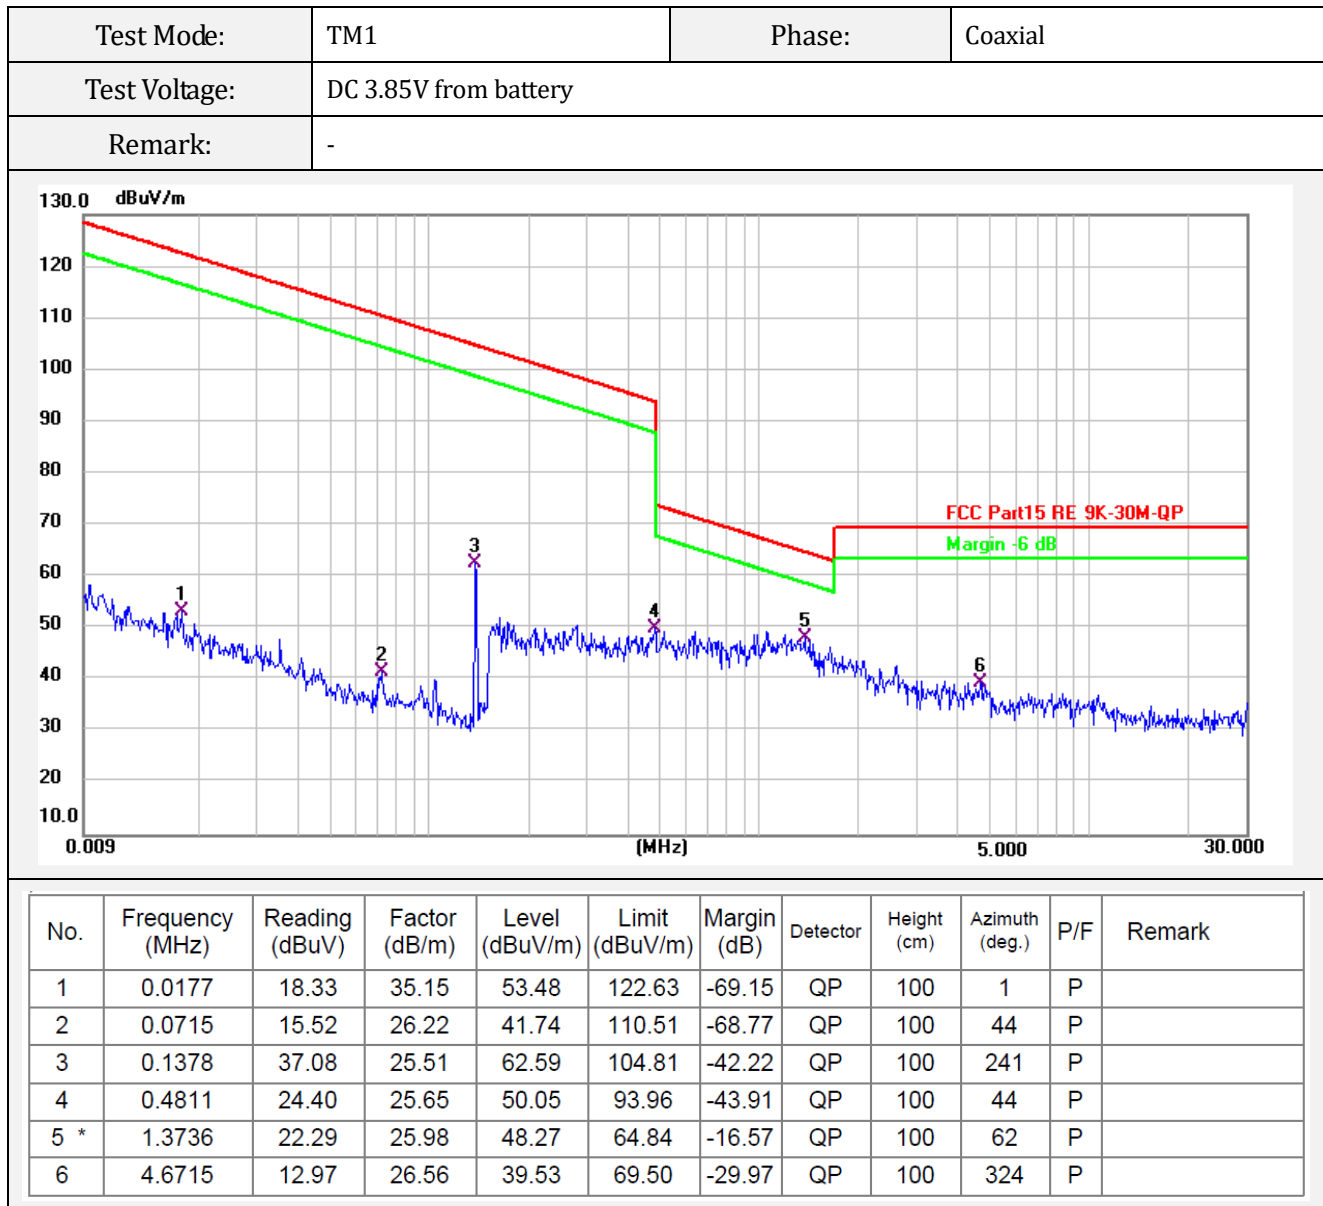


## Test Data of Radiated Emissions from 9kHz to 30MHz

Test Mode:	TM6	Phase:	Coplaner
Test Voltage:	AC 120V/60Hz		
Remark:	-		

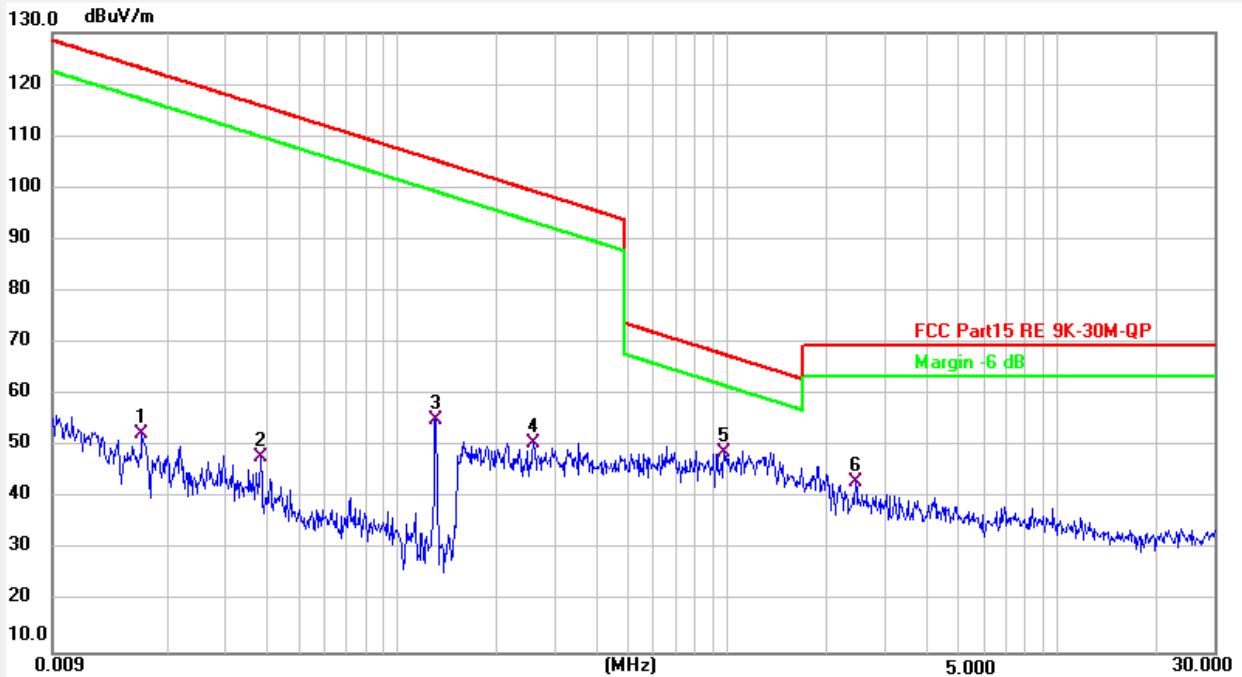


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0168	17.16	35.24	52.40	123.08	-70.68	QP	100	123	P	
2	0.0383	16.32	31.49	47.81	115.93	-68.12	QP	100	1	P	
3	0.1300	29.89	25.35	55.24	105.32	-50.08	QP	100	42	P	
4	0.2575	24.81	25.80	50.61	99.39	-48.78	QP	100	324	P	
5 *	0.9735	22.89	25.91	48.80	67.83	-19.03	QP	100	42	P	
6	2.4346	17.02	26.18	43.20	69.50	-26.30	QP	100	125	P	

Test Mode:	TM6	Phase:	Coaxial
Test Voltage:	AC 120V/60Hz		
Remark:	-		

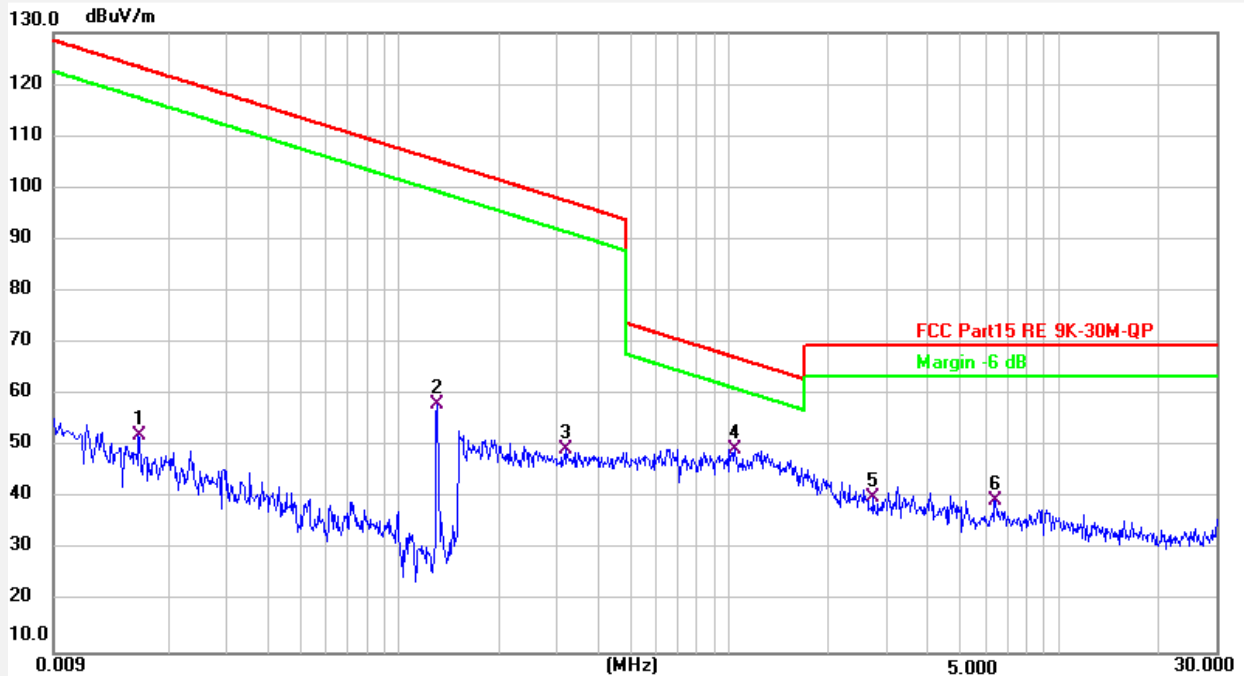


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0162	16.73	35.30	52.03	123.40	-71.37	QP	100	182	P	
2	0.1300	32.68	25.35	58.03	105.32	-47.29	QP	100	4	P	
3	0.3200	23.76	25.81	49.57	97.50	-47.93	QP	100	38	P	
4 *	1.0430	23.64	25.93	49.57	67.23	-17.66	QP	100	245	P	
5	2.7211	13.94	26.22	40.16	69.50	-29.34	QP	100	282	P	
6	6.3858	12.68	26.85	39.53	69.50	-29.97	QP	100	76	P	

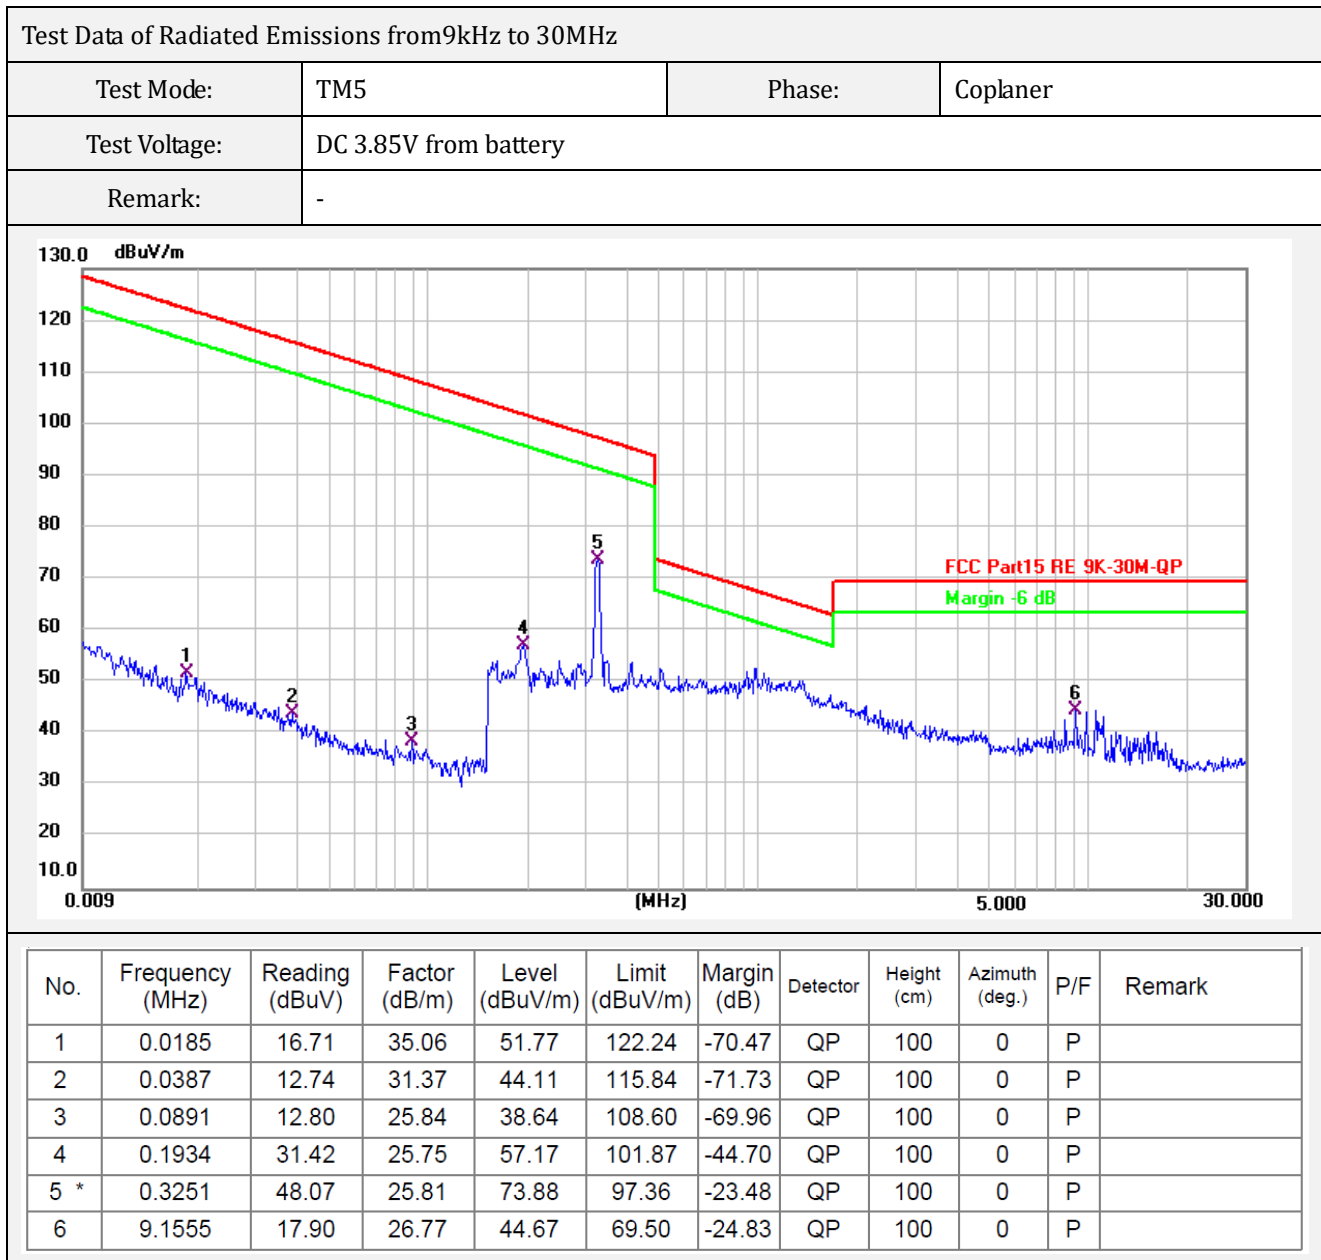





Test Mode:	TM5	Phase:	Coaxial
Test Voltage:	DC 3.85V from battery		
Remark:	-		

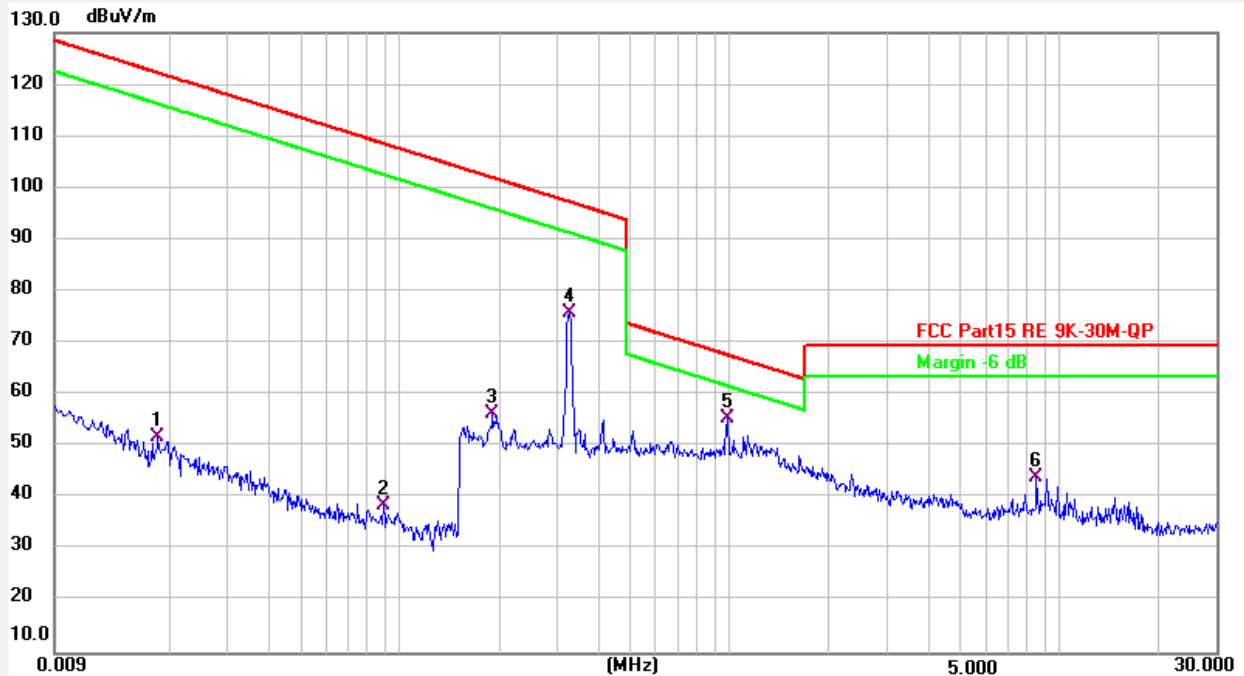

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0184	16.69	35.08	51.77	122.29	-70.52	QP	100	0	P	
2	0.0890	12.79	25.85	38.64	108.61	-69.97	QP	100	0	P	
3	0.1903	30.65	25.75	56.40	102.01	-45.61	QP	100	0	P	
4	0.3268	49.95	25.81	75.76	97.32	-21.56	QP	100	0	P	
5 *	0.9787	29.47	25.92	55.39	67.79	-12.40	QP	100	0	P	
6	8.5011	17.15	26.84	43.99	69.50	-25.51	QP	100	0	P	

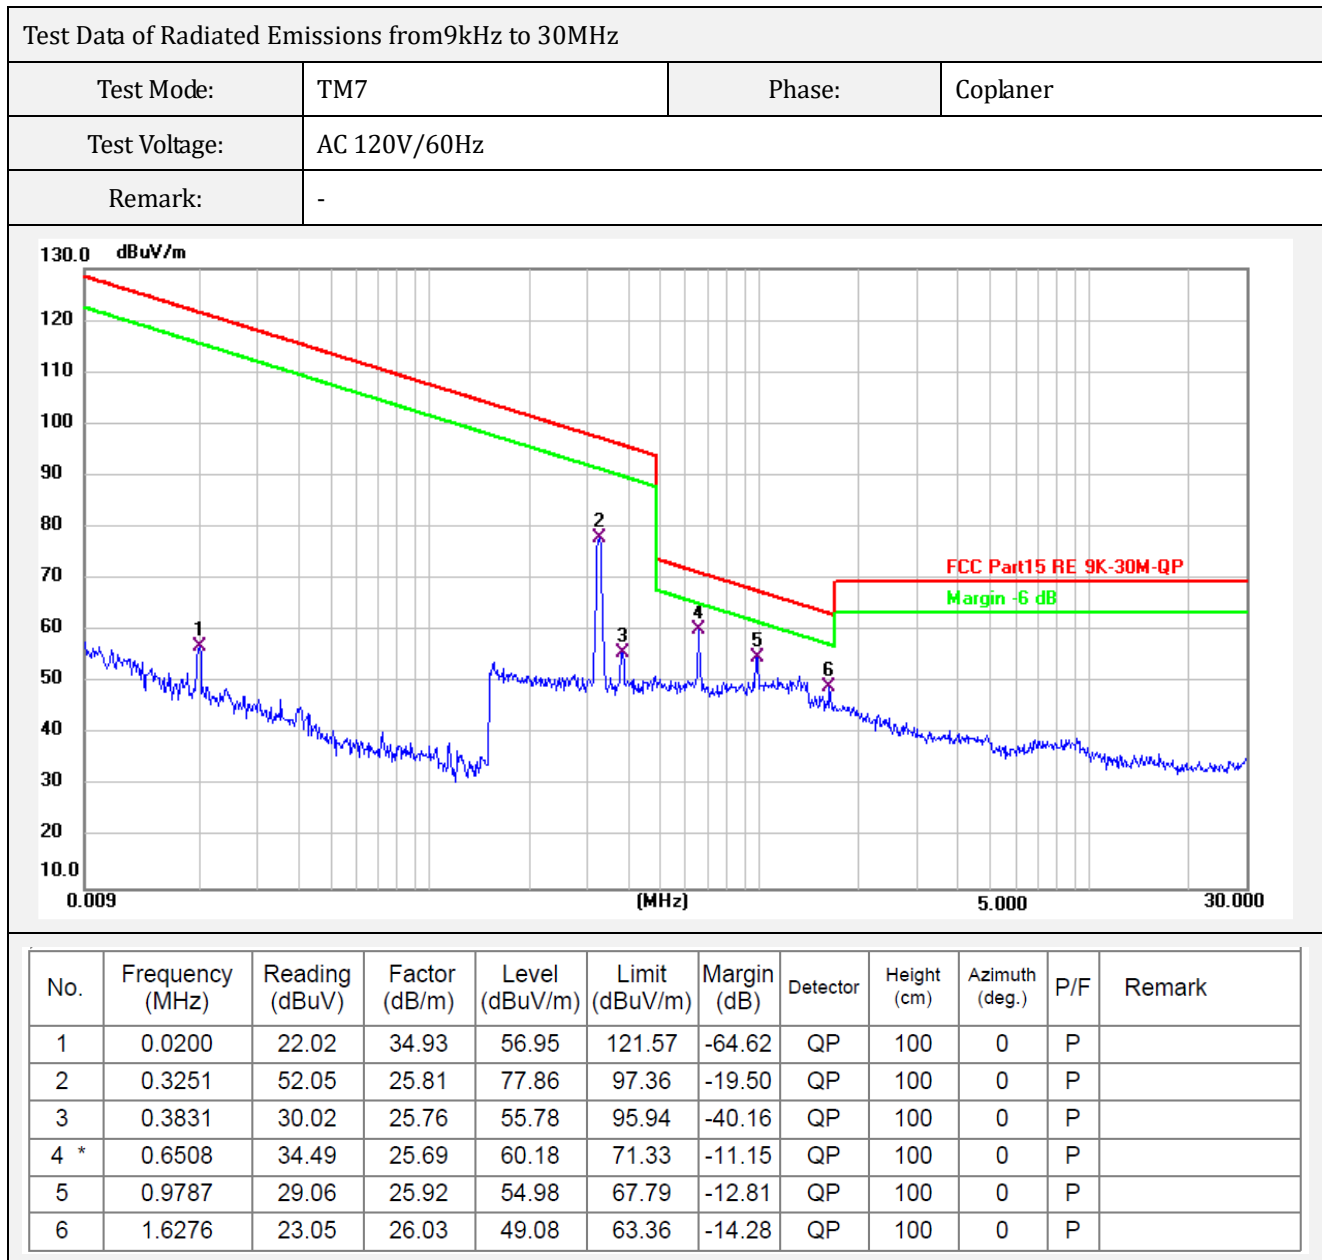

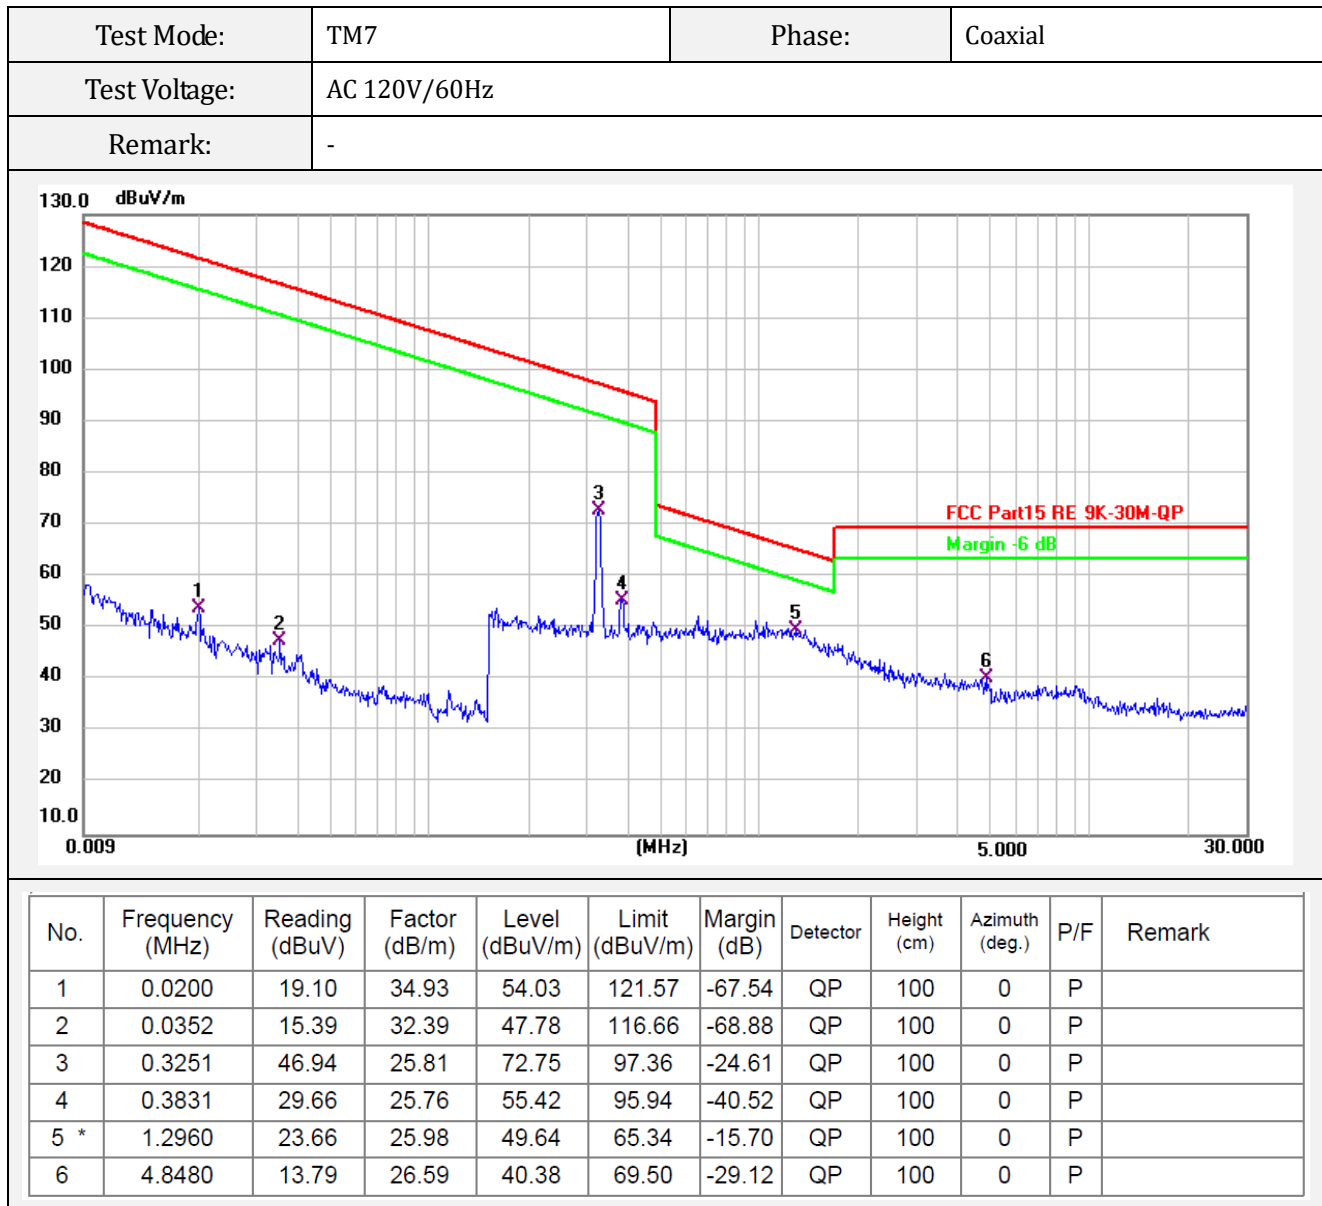

## Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40


Margin = Reading - Limit.

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM1

Test Antenna Polarization: Horizontal

Remark:

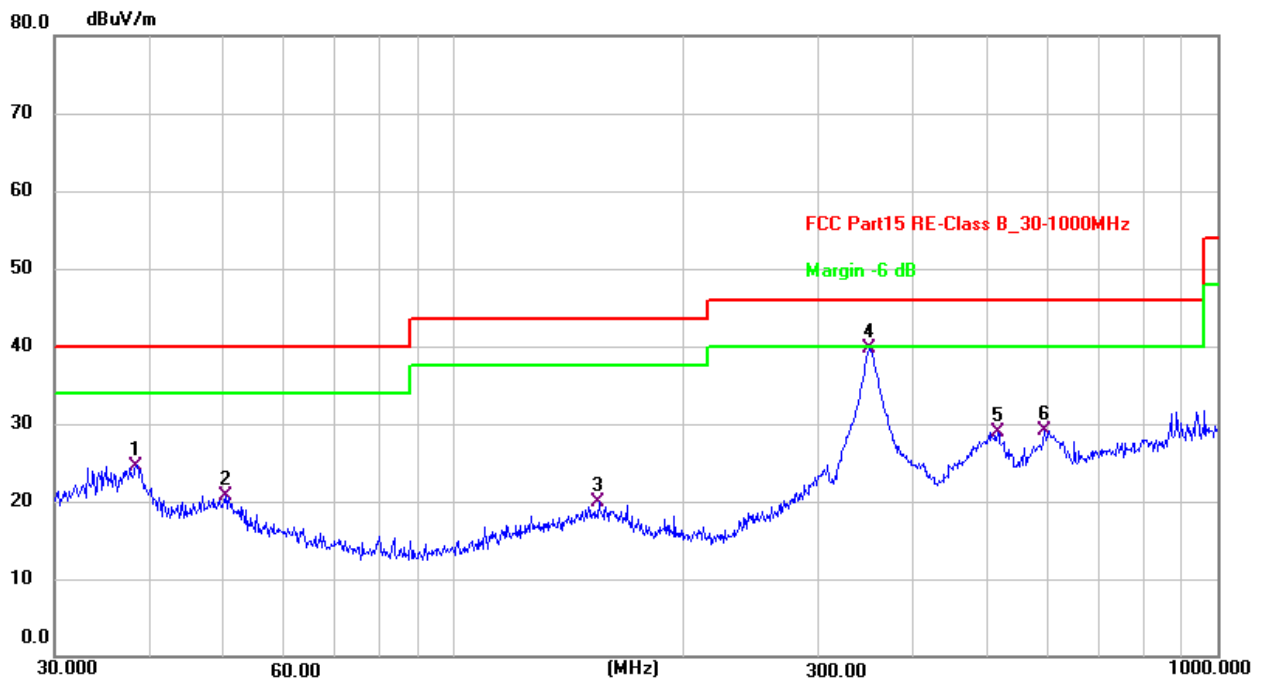


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.4809	33.14	-8.54	24.60	40.00	-15.40	QP	100	327	P	
2	50.2324	29.11	-8.44	20.67	40.00	-19.33	QP	100	338	P	
3	154.8204	27.67	-7.80	19.87	43.50	-23.63	QP	100	11	P	
4 *	350.4768	47.18	-7.38	39.80	46.00	-6.20	QP	100	11	P	
5	515.4374	31.99	-3.10	28.89	46.00	-17.11	QP	100	11	P	
6	593.0497	30.87	-1.77	29.10	46.00	-16.90	QP	100	11	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM1

Test Antenna Polarization: Vertical

Remark:

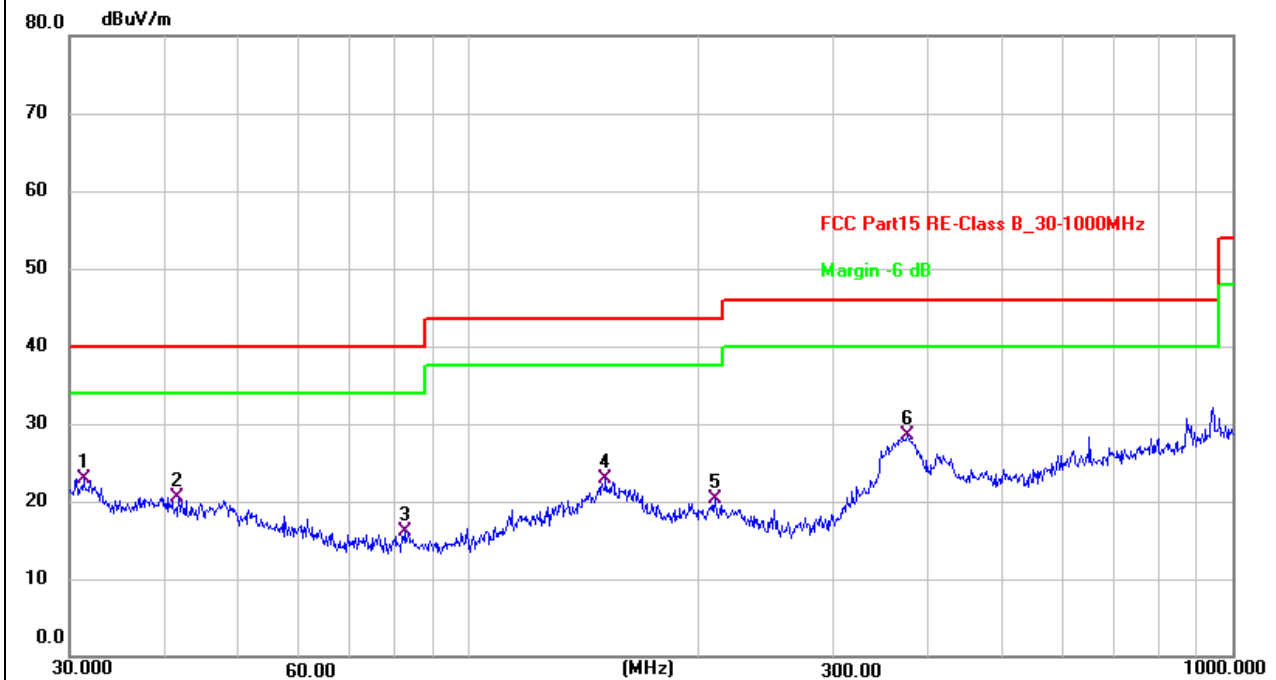


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	31.2893	31.84	-8.95	22.89	40.00	-17.11	QP	100	6	P	
2	41.7129	28.78	-8.29	20.49	40.00	-19.51	QP	100	349	P	
3	82.3588	28.93	-12.90	16.03	40.00	-23.97	QP	100	349	P	
4	151.0666	30.57	-7.73	22.84	43.50	-20.66	QP	100	319	P	
5	210.0482	32.27	-11.91	20.36	43.50	-23.14	QP	100	349	P	
6	375.9385	34.83	-6.39	28.44	46.00	-17.56	QP	100	349	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM6

Test Antenna Polarization: Horizontal

Remark:

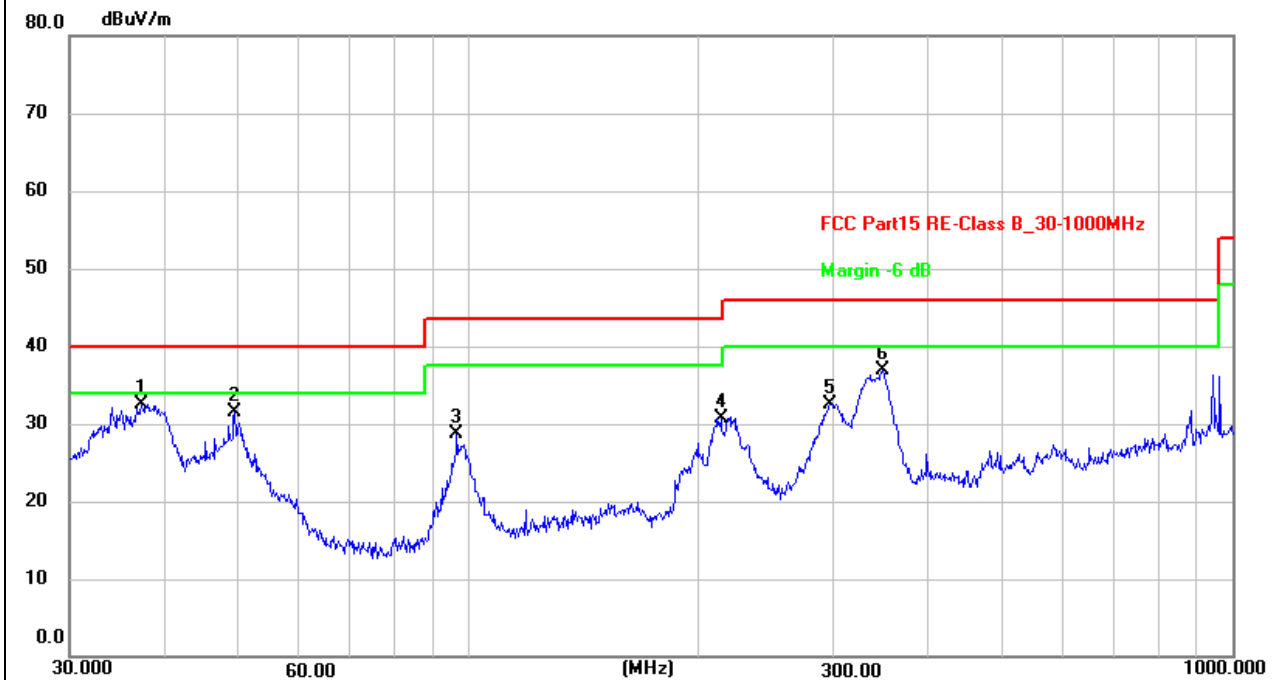


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	37.2855	41.25	-8.73	32.52	40.00	-7.48	peak	100	349	P	
2	49.3594	39.84	-8.39	31.45	40.00	-8.55	peak	100	299	P	
3	96.4362	41.19	-12.51	28.68	43.50	-14.82	peak	100	349	P	
4	213.7634	42.63	-11.88	30.75	43.50	-12.75	peak	100	308	P	
5	297.2241	40.77	-8.19	32.58	46.00	-13.42	peak	100	308	P	
6	348.0274	44.28	-7.38	36.90	46.00	-9.10	peak	100	329	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM6

Test Antenna Polarization: Vertical

Remark:

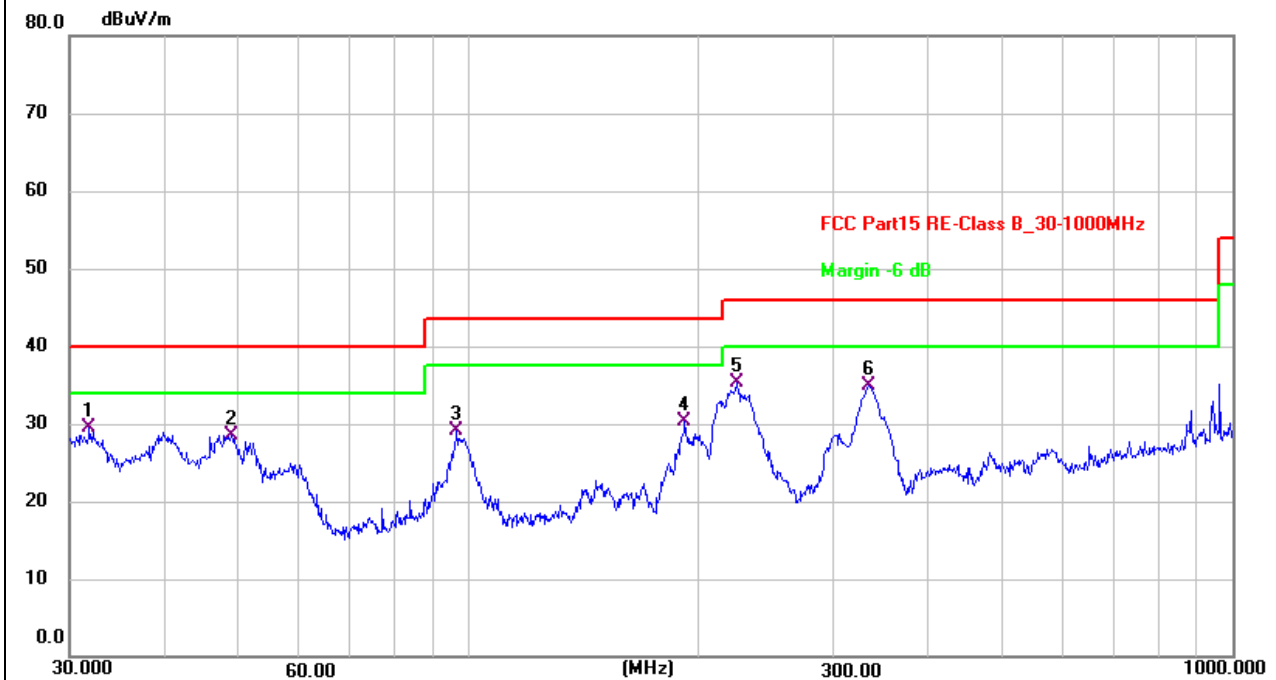


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	31.8427	38.38	-8.97	29.41	40.00	-10.59	QP	100	349	P	
2	48.8429	36.94	-8.36	28.58	40.00	-11.42	QP	100	349	P	
3	96.4362	41.64	-12.51	29.13	43.50	-14.37	QP	100	319	P	
4	191.7450	41.68	-11.31	30.37	43.50	-13.13	QP	100	175	P	
5	224.5193	46.84	-11.50	35.34	46.00	-10.66	QP	100	14	P	
6	333.6867	42.03	-7.19	34.84	46.00	-11.16	QP	100	0	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM5

Test Antenna Polarization: Horizontal

Remark:

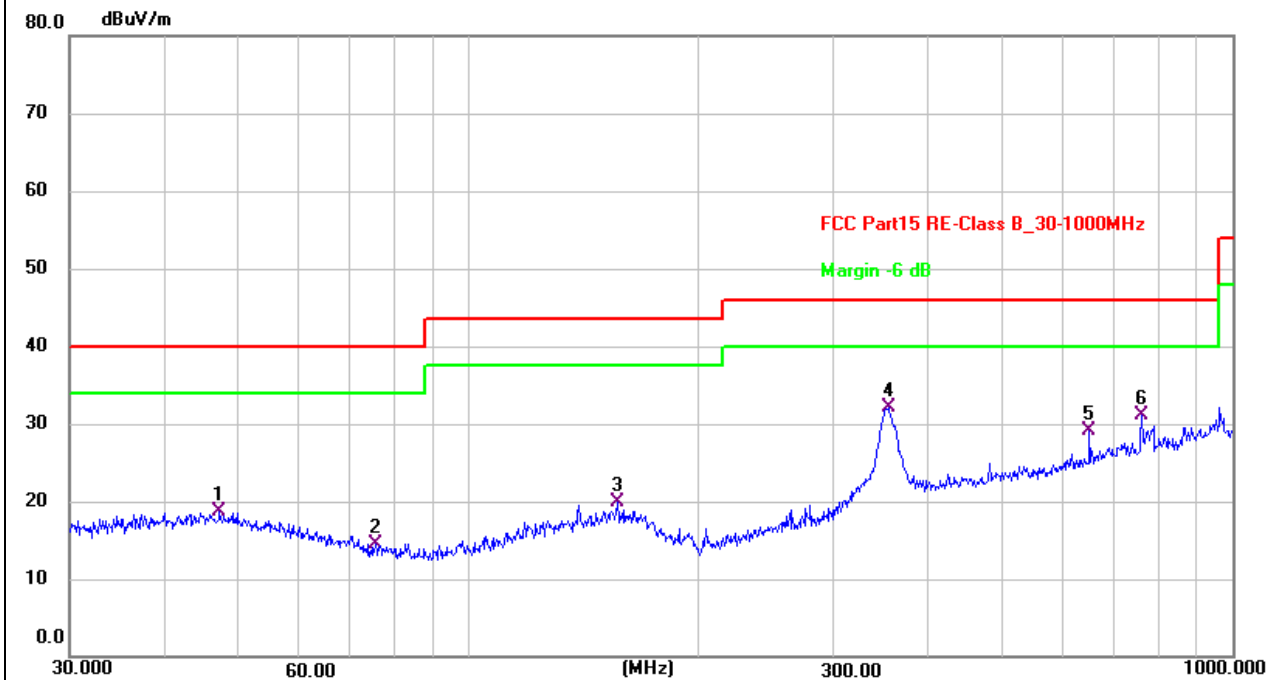

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.1599	26.93	-8.32	18.61	40.00	-21.39	QP	100	339	P	
2	75.4464	26.77	-12.32	14.45	40.00	-25.55	QP	100	352	P	
3	156.4578	27.66	-7.82	19.84	43.50	-23.66	QP	100	30	P	
4 *	354.1831	39.41	-7.24	32.17	46.00	-13.83	QP	100	112	P	
5	649.6597	29.99	-0.85	29.14	46.00	-16.86	QP	100	99	P	
6	760.7036	30.19	1.01	31.20	46.00	-14.80	QP	100	228	P	




## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM5

Test Antenna Polarization: Vertical

Remark:

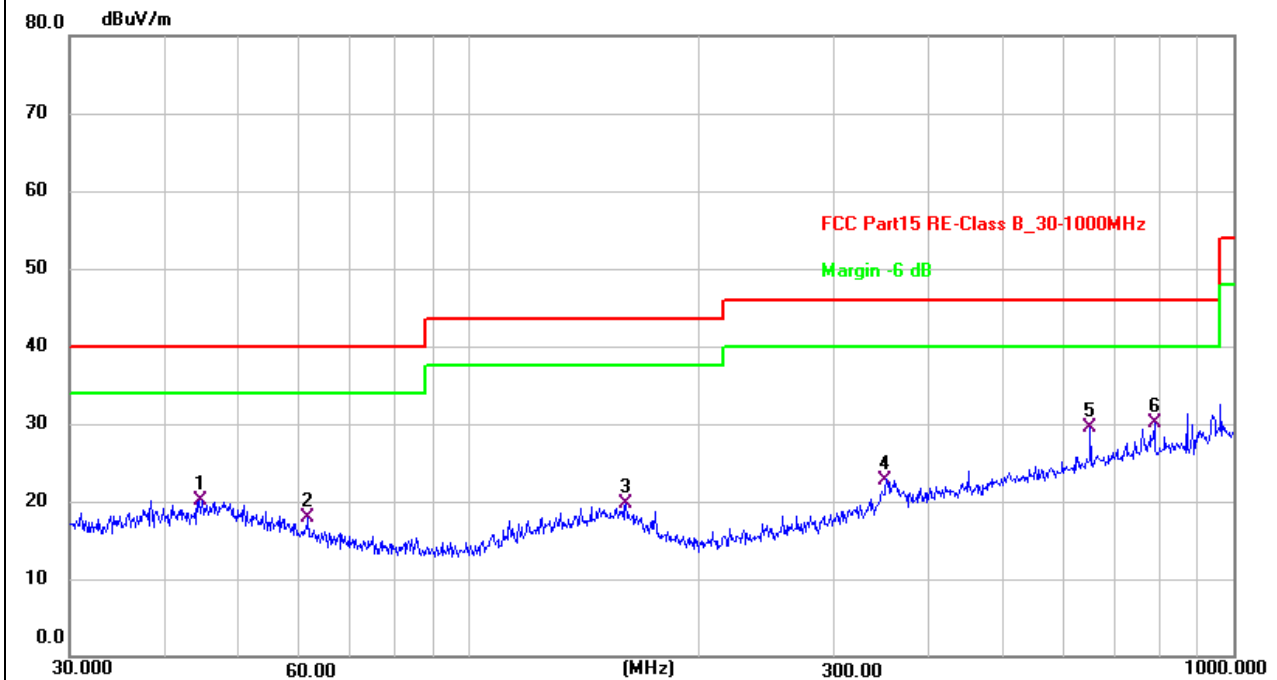


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.7433	28.34	-8.25	20.09	40.00	-19.91	QP	100	96	P	
2	61.5618	28.04	-10.22	17.82	40.00	-22.18	QP	100	151	P	
3	160.3456	27.68	-7.90	19.78	43.50	-23.72	QP	100	144	P	
4	351.7079	30.14	-7.34	22.80	46.00	-23.20	QP	100	350	P	
5	649.6597	30.30	-0.85	29.45	46.00	-16.55	QP	100	330	P	
6 *	787.8513	28.65	1.36	30.01	46.00	-15.99	QP	100	199	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM7

Test Antenna Polarization: Horizontal

Remark:

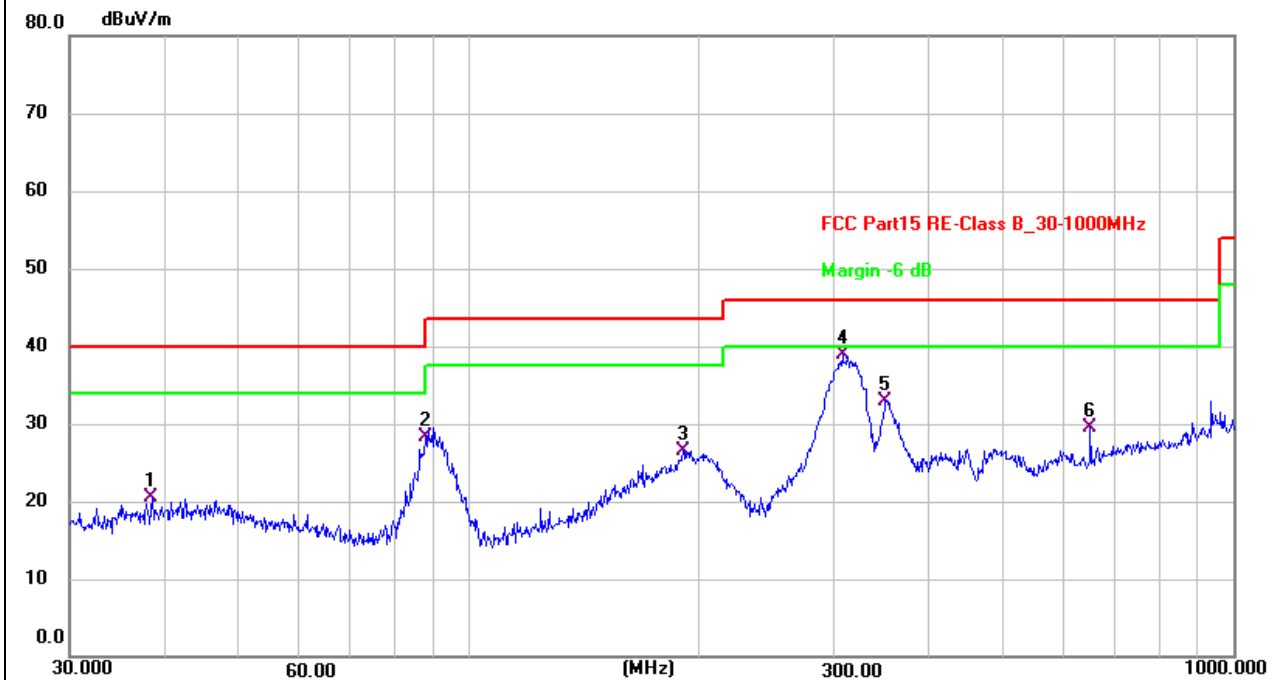


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.4809	28.95	-8.54	20.41	40.00	-19.59	QP	100	34	P	
2	87.7248	41.43	-13.03	28.40	40.00	-11.60	QP	100	356	P	
3	190.4050	37.73	-11.20	26.53	43.50	-16.97	QP	100	92	P	
4 *	307.8313	46.62	-7.74	38.88	46.00	-7.12	QP	100	275	P	
5	350.4768	40.38	-7.38	33.00	46.00	-13.00	QP	100	350	P	
6	649.6597	30.30	-0.85	29.45	46.00	-16.55	QP	100	247	P	

## Test Plots and Data of Radiated Emissions from 30MHz to 1GHz

Tested Mode: TM7

Test Antenna Polarization: Vertical

Remark:

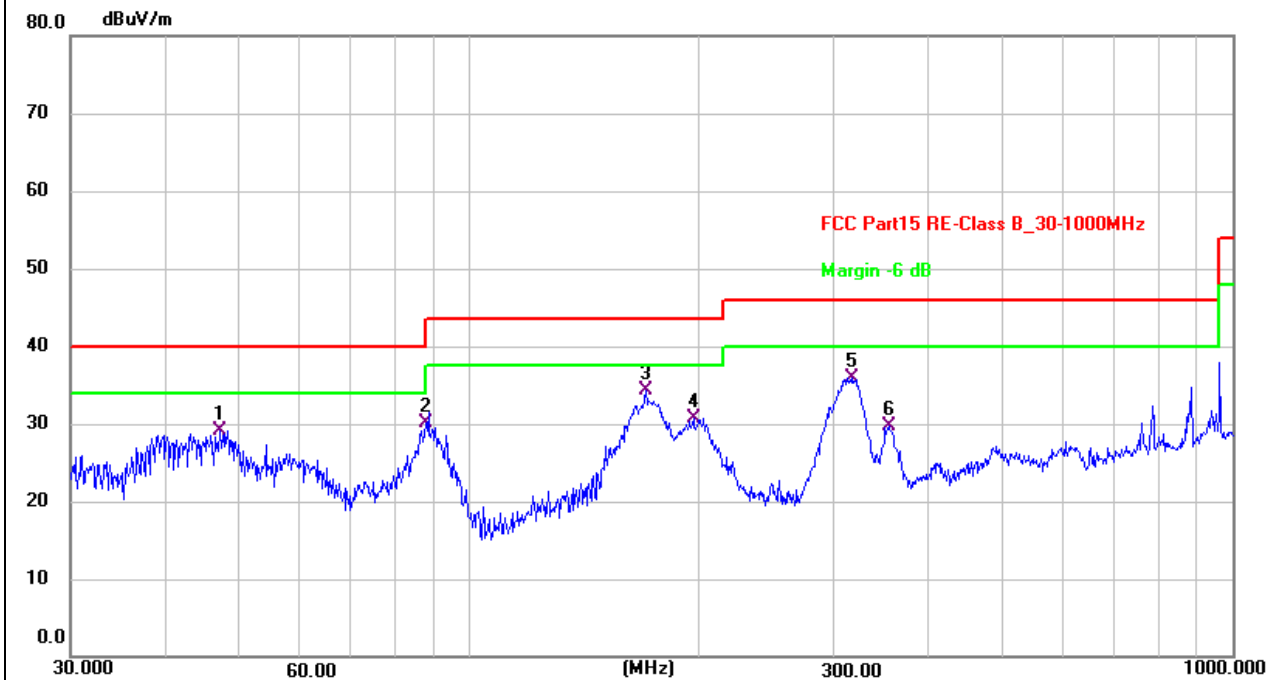

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	47.1599	37.41	-8.32	29.09	40.00	-10.91	QP	100	360	P	
2	87.7248	43.09	-13.03	30.06	40.00	-9.94	QP	100	9	P	
3 *	170.1948	43.15	-8.80	34.35	43.50	-9.15	QP	100	359	P	
4	196.5098	42.46	-11.74	30.72	43.50	-12.78	QP	100	200	P	
5	317.7011	43.32	-7.35	35.97	46.00	-10.03	QP	100	125	P	
6	354.1831	36.89	-7.24	29.65	46.00	-16.35	QP	100	180	P	

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than

Note 3: For 9kHz-30MHz, Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits (dBuV) + distance extrapolation factor.

Note 4: Level = Reading + Factor, Margin = Level – Limit.

## 6. Occupied Bandwidth

### 6.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
  - 2) Set the spectrum analyzer to any one measured frequency within its operating range.
  - 3) Set RBW = 1% of the 20 dB bandwidth, VBW = RBW.
  - 4) Set Sweep = Auto, Detector function = peak, Trace = max hold.
  - 5) Set a reference level on the measuring instrument equal to the highest peak value.
  - 6) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level.
- Record the frequency difference as the emission bandwidth.

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.




Test Setup Block Diagram

### 6.3 Test Data and Results

Test Frequency	20dB Bandwidth	99% Bandwidth
148.7kHz	73Hz	89Hz


Phone/ Earphone:

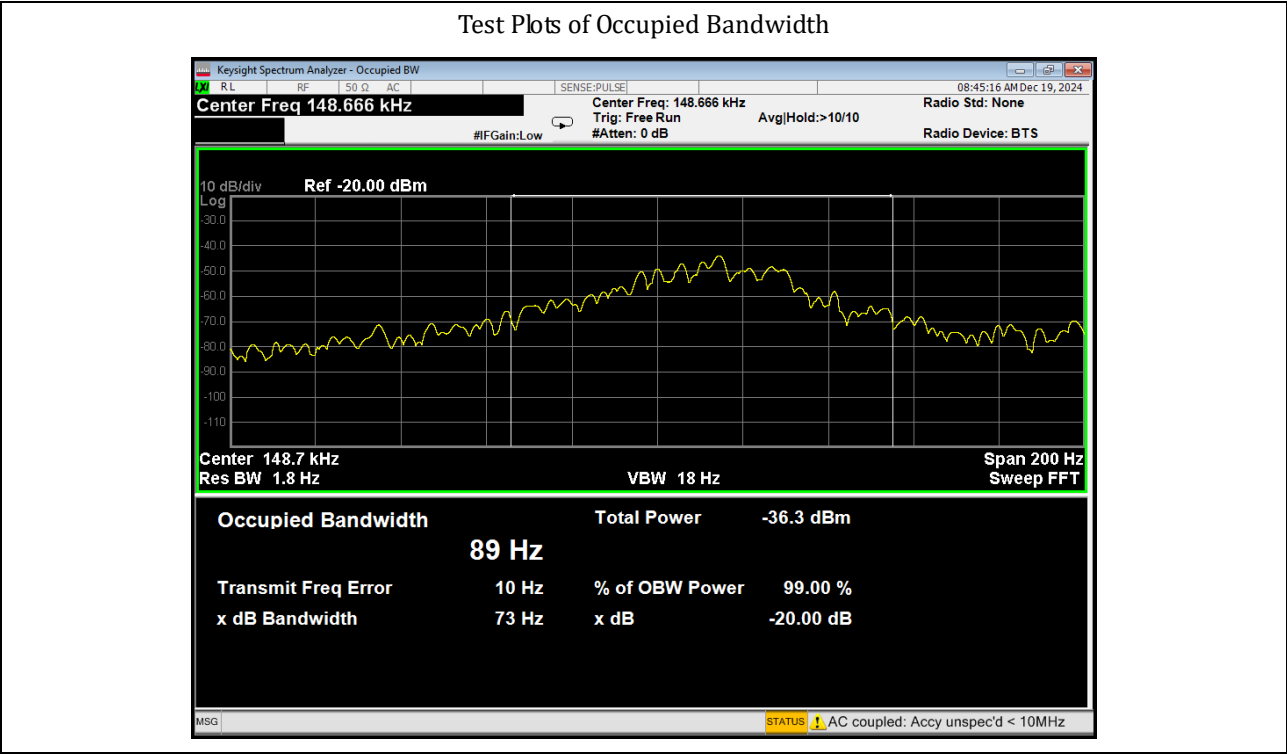

Test Frequency	20dB Bandwidth	99% Bandwidth
325.1kHz	278Hz	294Hz

Watch:

Test Plots of Occupied Bandwidth

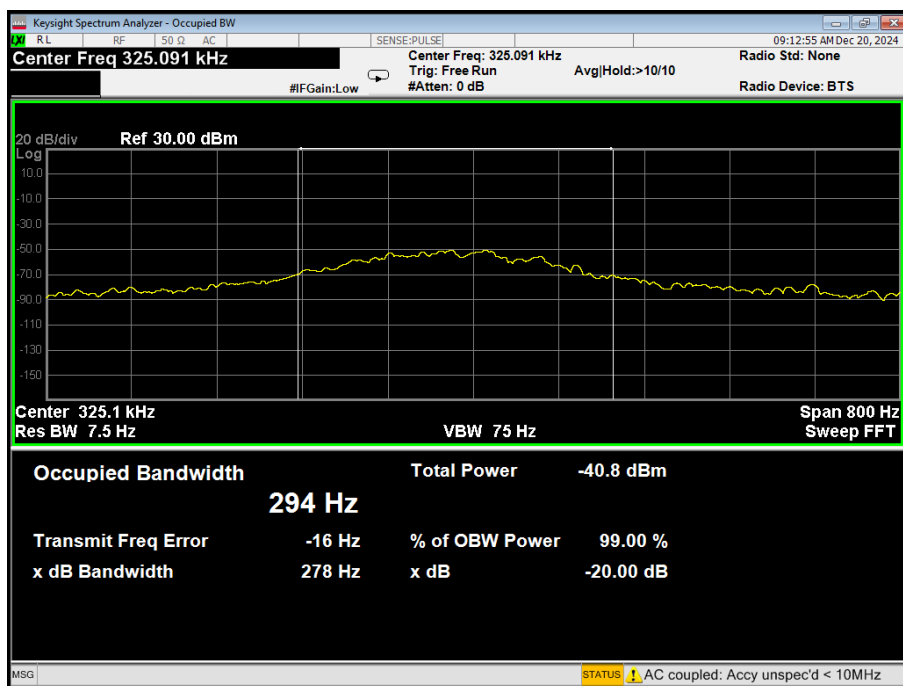

\*\*\*\*\* END OF REPORT \*\*\*\*\*