



# FCC TEST REPORT

**REPORT NO.:** RF900906R05

**MODEL NO.:** G-RA4A (for Gamepad)  
C-UD10A (for USB Transceiver)

**RECEIVED:** September 6, 2001

**TESTED:** Sep. 7 ~ Sep. 13, 2001

**APPLICANT:** Logitech Inc.

**ADDRESS:** 6505 Kaiser Drive Fremont, CA 94555-3615

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 40 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528



Lab Code: 200102-0



## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST PROCEDURES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS.....	9
4.1.3	TEST PROCEDURES.....	10
4.1.4	TEST SETUP.....	10
4.1.5	TEST RESULTS(A).....	11
4.1.6	TEST RESULTS(B).....	17
4.2	RADIATED EMISSION MEASUREMENT .....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	18
4.2.2	TEST INSTRUMENTS.....	19
4.2.3	TEST PROCEDURES.....	20
4.2.4	TEST SETUP.....	21
4.2.5	TEST RESULTS .....	22
4.2.6	TEST RESULTS (A).....	23
4.2.7	TEST RESULTS (B).....	26
4.3	BAND EDGES MEASUREMENT .....	29
4.3.1	LIMITS OF BAND EDGES MEASUREMENT .....	29
4.3.2	TEST INSTRUMENTS.....	29
4.3.3	TEST PROCEDURE .....	29
4.3.4	EUT OPERATING CONDITION.....	30
4.3.5	TEST RESULTS (A).....	30
4.3.6	TEST RESULTS (B).....	33



4.4	ANTENNA REQUIREMENT .....	36
4.4.1	STANDARD APPLICABLE.....	36
4.4.2	ANTENNA CONNECTED CONSTRUCTION .....	36
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	37
6	INFORMATION ON THE TESTING LABORATORIES .....	39



## 1 CERTIFICATION

**PRODUCT :** WingMan Cordless RumblePad  
**BRAND NAME :** Logitech  
**MODEL NO. :** G-RA4A (for Gamepad)  
C-UD10A (for USB Transceiver)  
**APPLICANT :** Logitech Inc.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.249)  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Sep. 7, 2001 to Sep. 13, 2001, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY : Steven Lu · DATE: Sept. 15, 2001  
Steven Lu

CHECKED BY : Emily Lu · DATE: Sept. 15, 2001  
Emily Lu

APPROVED BY : Alan Lane · DATE: Sept. 25, 2001  
Dr. Alan Lane, Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -5.17 dBuV at 0.504 MHz
15.249	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.0 dBuV at 2402.00 MHz
15.249	Band Edge Measurement	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	WingMan Cordless RumblePad
<b>MODEL NO.</b>	G-RA4A / C-UD10A
<b>POWER SUPPLY</b>	6VDC from Batteries for GamePad 5VDC from PC for USB Transceiver
<b>MODULATION TYPE</b>	FHSS (GFSK)
<b>FREQUENCY RANGE</b>	2402MHz ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>OUTPUT POWER</b>	-1.9dBm
<b>ANTENNA TYPE</b>	Sheet metal inverted-F antenna
<b>DATA CABLE</b>	1.5m (shielded)
<b>I/O PORTS</b>	USB
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is computer wireless game player which contains two parts in this report. One is Gamepad and another is USB Transceiver.
2. Model name G-RA4A is for product Gamepad and model name C-UD10A is for USB Transceiver.
3. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### **3.2 DESCRIPTION OF TEST MODES**

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

**NOTE:** The test results (A) is for USB Transceiver which is held on user's hand and (B) is for GamePad which is connected with PC.

### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a computer wireless game player. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR 47 Part 15, Subpart C. (15.249)**  
**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Personal Computer	IBM	2187-12W	1S218714ABNA000V	DoC
2	MONITOR	HP	D2842A	KR93473168	BEJCB910
3	MODEM	ACEEX	1414	980020503	IFAXDM1414
4	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
5	KEYBOARD	FORWARD	FDA-104GA	FDKB8110111	F4ZDA-104G
6	PS/2 MOUSE	LOGITECH	M-S43	LZE00703207	DZL211106

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
4	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
5	1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.
6	1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.

**NOTE:** All power cords of the above support units are non shielded (1.8m).



## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.45 – 30	48	-	48	-

Notes:

1. The lower limit shall apply at the transition frequencies.
1. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 4, 2002
*ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 3, 2002
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 28, 2001
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Dec. 3, 2001
*EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 3, 2002
*Software	Cond-V2J	NA	NA
*RF cable (JYEBAO)	RG-58A/U	Cable-C02.01	July 9, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2002
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2002
Shielded Room	Site 2	ADT-C02	NA
VCCI Site Registration No.	Site 2	C-240	NA


**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
- “\*” = These equipments are used for the final measurement.

#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 TEST SETUP

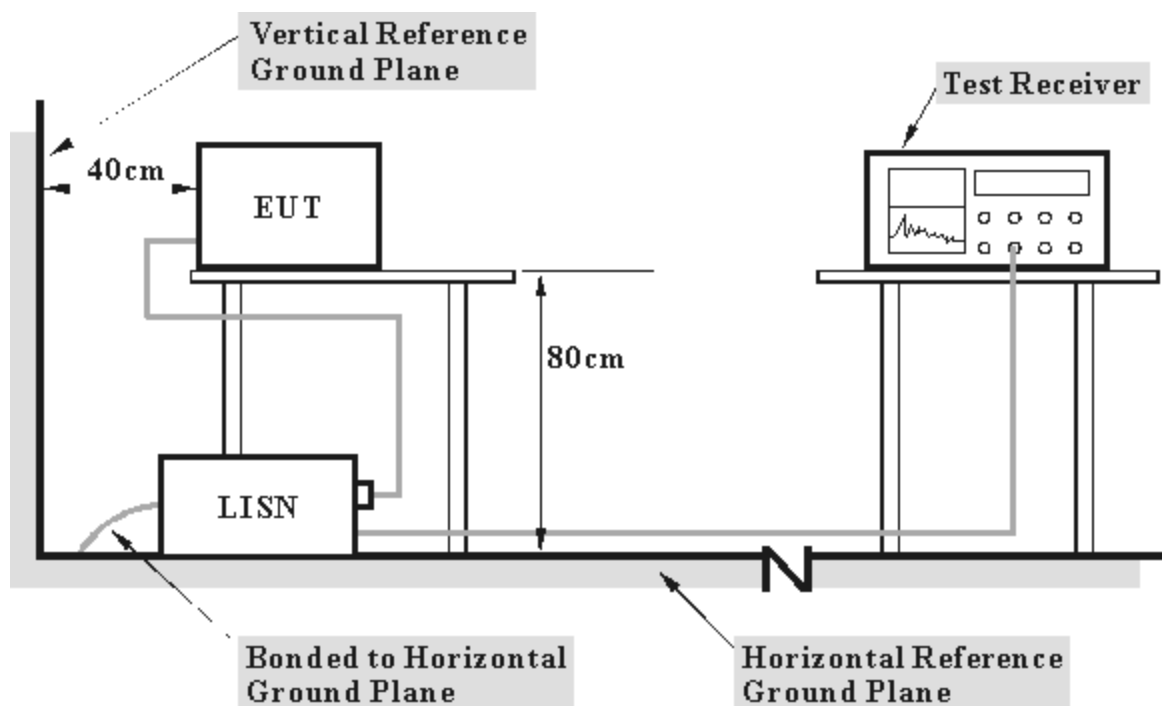

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


## 4.1.5 TEST RESULTS(A)

<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 0	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	40.79	-	40.89	-	48.00	-	-7.11	-
2	0.805	0.10	36.24	-	36.34	-	48.00	-	-11.66	-
3	1.209	0.10	35.62	-	35.72	-	48.00	-	-12.28	-
4	9.776	0.49	34.17	-	34.66	-	48.00	-	-13.34	-
5	13.101	0.69	36.47	-	37.16	-	48.00	-	-10.84	-
6	22.568	1.05	35.02	-	36.07	-	48.00	-	-11.93	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

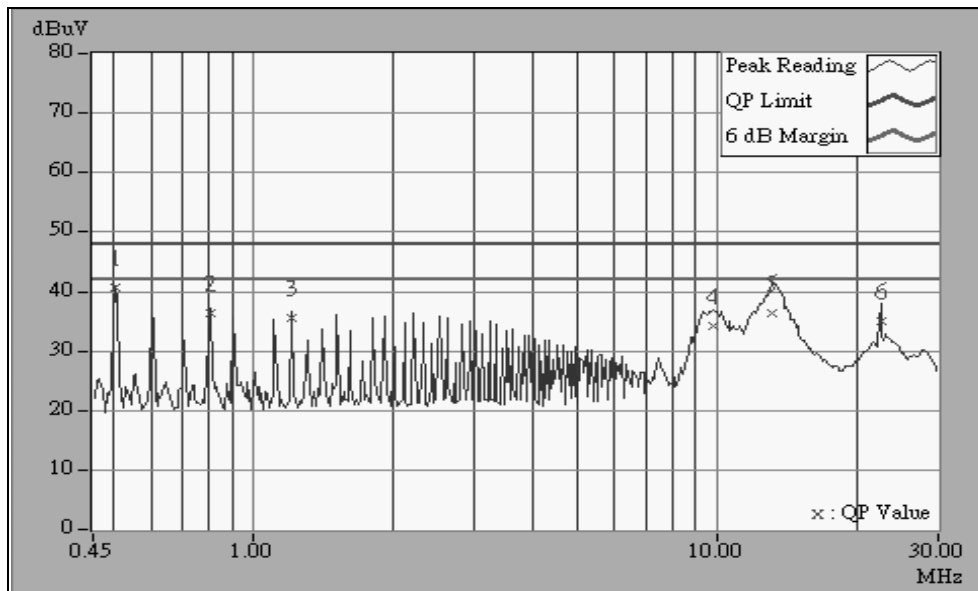


<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 0	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	42.57	-	42.67	-	48.00	-	-5.33	-
2	0.806	0.10	37.17	-	37.27	-	48.00	-	-10.73	-
3	1.209	0.10	35.86	-	35.96	-	48.00	-	-12.04	-
4	2.217	0.12	34.88	-	35.00	-	48.00	-	-13.00	-
5	9.071	0.38	28.98	-	29.36	-	48.00	-	-18.64	-
6	22.569	0.85	34.28	-	35.13	-	48.00	-	-12.87	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

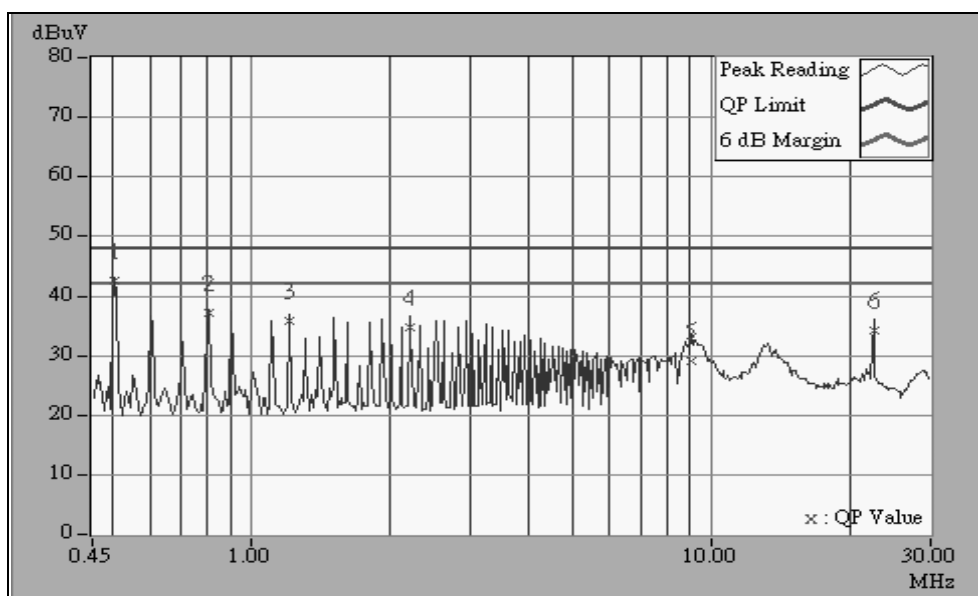


<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 39	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	40.65	-	40.75	-	48.00	-	-7.25	-
2	0.807	0.10	36.28	-	36.38	-	48.00	-	-11.62	-
3	1.209	0.10	35.62	-	35.72	-	48.00	-	-12.28	-
4	9.676	0.49	33.75	-	34.24	-	48.00	-	-13.76	-
5	13.307	0.70	38.98	-	39.68	-	48.00	-	-8.32	-
6	22.568	1.05	34.58	-	35.63	-	48.00	-	-12.37	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

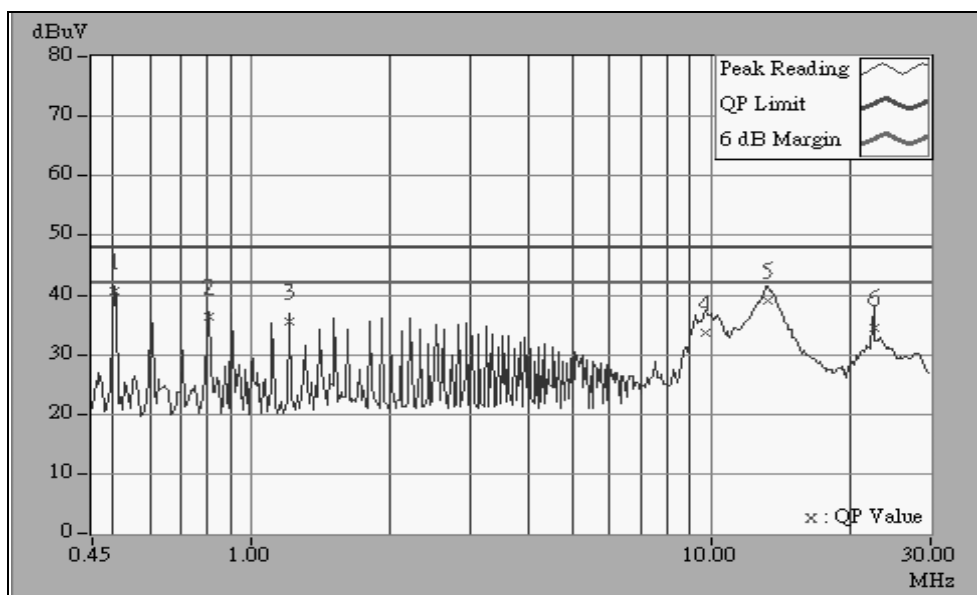


<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 39	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	42.69	-	42.79	-	48.00	-	-5.21	-
2	0.807	0.10	37.07	-	37.17	-	48.00	-	-10.83	-
3	1.209	0.10	36.04	-	36.14	-	48.00	-	-11.86	-
4	2.217	0.12	35.51	-	35.63	-	48.00	-	-12.37	-
5	9.173	0.39	30.21	-	30.60	-	48.00	-	-17.40	-
6	22.568	0.85	34.28	-	35.13	-	48.00	-	-12.87	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

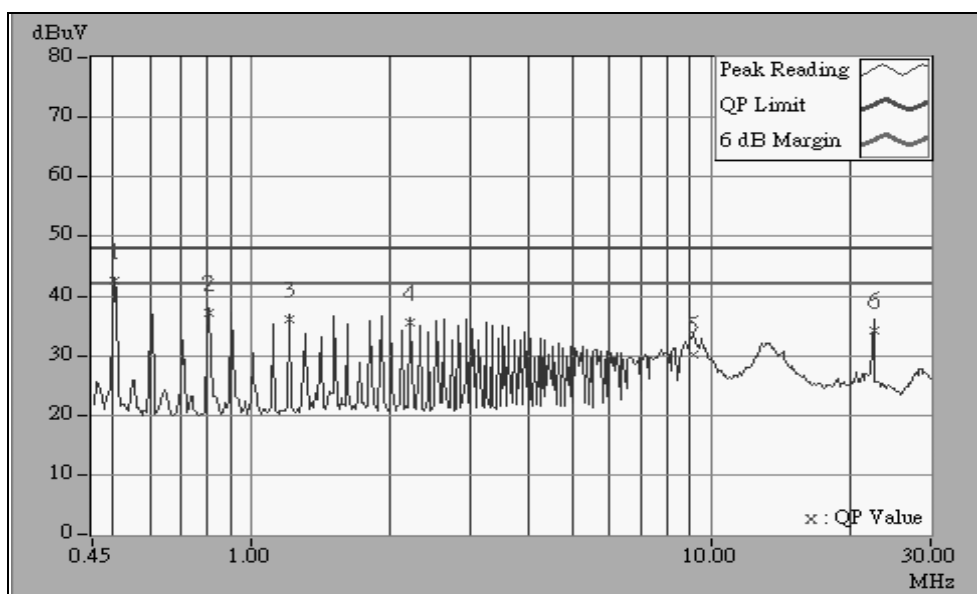


<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 78	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	40.69	-	40.79	-	48.00	-	-7.21	-
2	0.807	0.10	36.34	-	36.44	-	48.00	-	-11.56	-
3	1.210	0.10	37.27	-	37.37	-	48.00	-	-10.63	-
4	9.985	0.50	34.80	-	35.30	-	48.00	-	-12.70	-
5	13.313	0.70	35.34	-	36.04	-	48.00	-	-11.96	-
6	22.568	1.05	36.29	-	37.34	-	48.00	-	-10.66	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

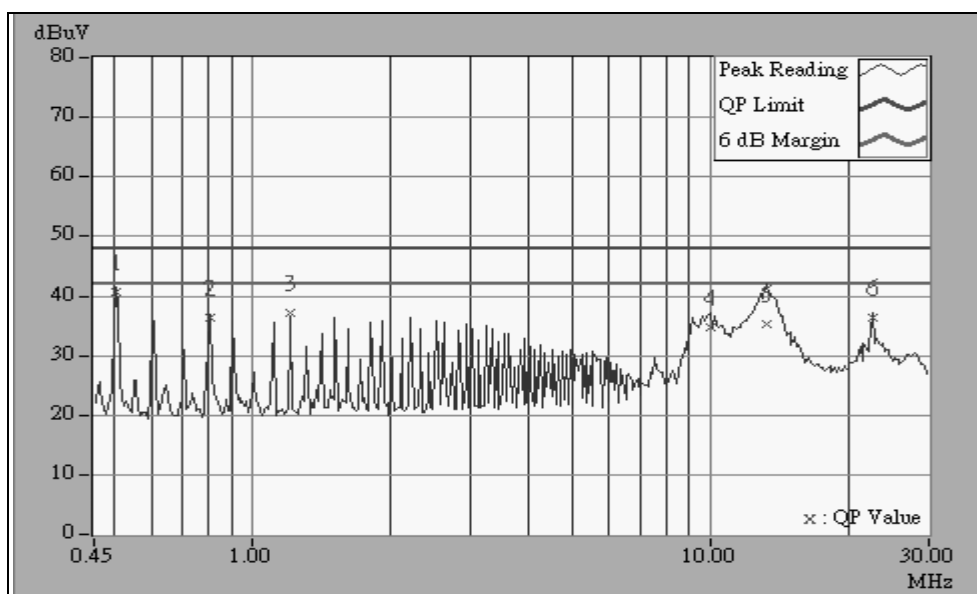




<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 78	<b>6dB BANDWIDTH</b>	10 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Netural (N)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1005 hPa	<b>TESTED BY:</b> Steven Lu	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.504	0.10	42.73	-	42.83	-	48.00	-	-5.17	-
2	0.807	0.10	37.15	-	37.25	-	48.00	-	-10.75	-
3	1.209	0.10	36.00	-	36.10	-	48.00	-	-11.90	-
4	2.217	0.12	35.33	-	35.45	-	48.00	-	-12.55	-
5	9.476	0.39	26.95	-	27.34	-	48.00	-	-20.66	-
6	22.568	0.85	34.32	-	35.17	-	48.00	-	-12.83	-

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

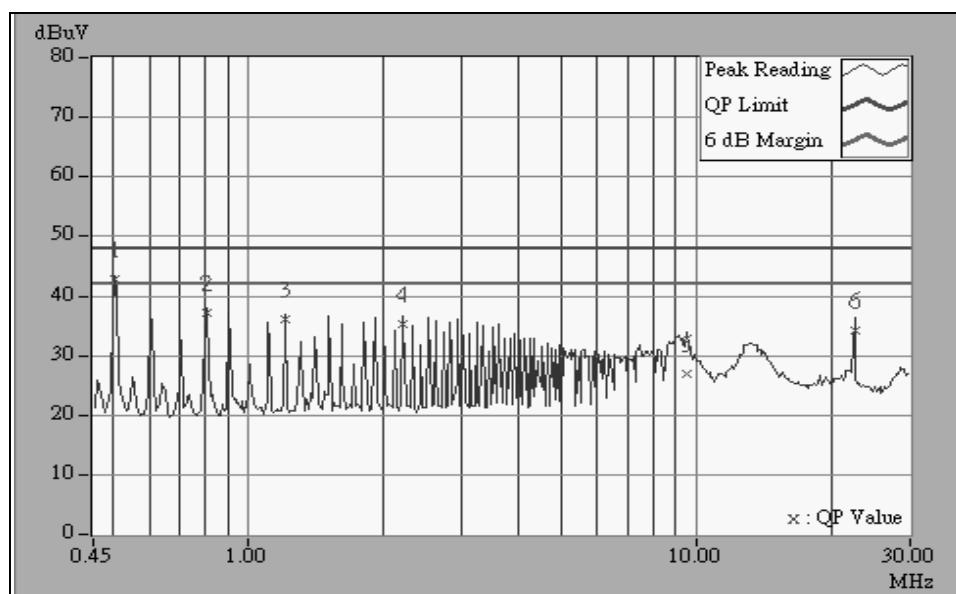





#### 4.1.6 TEST RESULTS(B)

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to paragraph 15.207(a), measurements to demonstrate compliance with the conducted limited are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	114	94

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
HP Preamplifier	8447D	2944A08485	Nov. 3, 2001
*HP Preamplifier	8449B	3008A01201	Dec. 13, 2001
*HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
*ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 25, 2002
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2001
*CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
*SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
*EMCO Horn Antenna	3115	9312-4192	April 15, 2002
*EMCO Turn Table	1060	1115	NA
*SHOSHIN Tower	AP-4701	A6Y005	NA
*Software	AS61D4	NA	NA
*ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
*TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Antenna (Horn)	BBHA9120-D	D130	July 10, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
VCCI Site Registration No.	Site 5	R-1039	NA
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

**NOTE:**

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. "\*" = These equipment are used for the final measurement.




### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 30 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 TEST SETUP

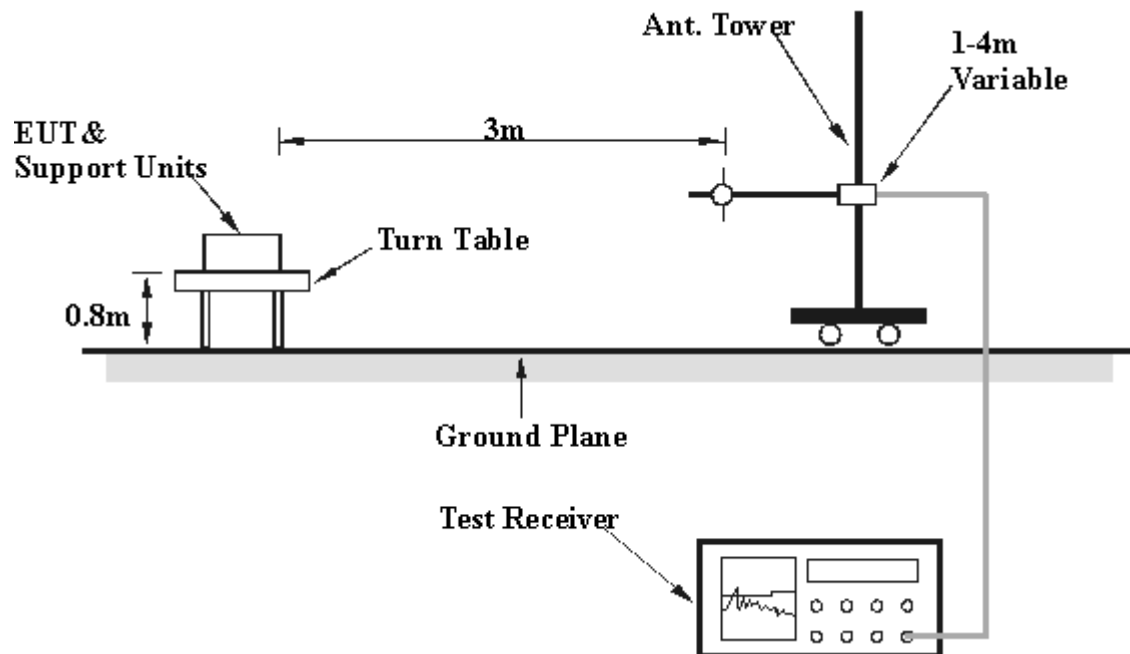

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



#### 4.2.5 TEST RESULTS

##### Digital Portion: USB Transceiver and GamePad

<b>EUT</b>	WingMan Cordless RumblePad	<b>MODEL</b>	G-RA4A / C-UD10A
<b>MODE</b>	Channel 78	<b>FREQUENCY RANGE</b>	30-1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	72.00	34.0 QP	40.00	-6.00	2.05H	228	26.73	6.45	0.82	0.00	-7.27
2	84.00	30.2 QP	40.00	-9.80	1.97H	217	21.75	7.63	0.87	0.00	-8.50
3	168.00	27.4 QP	43.50	-16.10	1.63H	107	16.71	9.35	1.30	0.00	-10.65
4	192.00	28.4 QP	43.50	-15.10	1.67H	234	18.01	8.95	1.39	0.00	-10.35
5	216.00	25.4 QP	43.50	-18.10	1.25H	304	13.89	9.97	1.50	0.00	-11.47
6	264.00	25.4 QP	46.00	-20.60	1.30H	184	10.78	12.89	1.70	0.00	-14.58
7	300.00	28.3 QP	46.00	-17.70	1.41H	32	13.26	13.18	1.88	0.00	-15.07
8	312.00	28.3 QP	46.00	-17.70	1.41H	180	12.98	13.43	1.92	0.00	-15.34
9	528.00	31.0 QP	46.00	-15.00	1.66H	319	10.80	17.62	2.60	0.00	-20.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	72.00	32.7 QP	40.00	-7.30	1.66V	59	25.43	6.45	0.82	0.00	-7.27
2	84.00	32.2 QP	40.00	-7.80	1.49V	134	23.71	7.63	0.87	0.00	-8.50
3	168.00	25.8 QP	43.50	-17.70	1.12V	205	15.13	9.35	1.30	0.00	-10.65
4	192.00	26.8 QP	43.50	-16.70	1.12V	3	16.45	8.95	1.39	0.00	-10.35
5	216.00	28.3 QP	43.50	-15.20	1.00V	184	16.85	9.97	1.50	0.00	-11.47
6	264.00	25.4 QP	46.00	-20.60	1.50V	287	10.78	12.89	1.70	0.00	-14.58
7	300.00	28.4 QP	46.00	-17.60	1.52V	8	13.39	13.18	1.88	0.00	-15.07
8	312.00	24.4 QP	46.00	-21.60	1.09V	113	9.01	13.43	1.92	0.00	-15.35
9	528.00	32.2 QP	46.00	-13.80	1.52V	333	12.02	17.62	2.60	0.00	-20.22

##### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value  
The other emission levels were very low against the limit.

## 4.2.6 TEST RESULTS (A)

<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 0	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

## RF Portion :

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	100.0 PK	114.0	-14.0	1.16H	311	67.82	27.11	5.10	0.00	-32.21
2	*2402.00	92.0 AV	94.0	-2.0	1.16H	311	59.80	27.11	5.10	0.00	-32.21
3	4803.90	57.9 PK	74.0	-16.1	1.01H	63	21.32	31.40	5.19	0.00	-36.59
4	4803.90	45.9 AV	54.0	-8.1	1.01H	63	9.32	31.40	5.19	0.00	-36.59

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M											
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	93.2 PK	114.0	-20.8	1.02V	16	60.95	27.11	5.10	0.00	-32.21
2	*2402.00	88.1 AV	94.0	-5.9	1.02V	16	55.92	27.11	5.10	0.00	-32.21
3	4803.90	55.9 PK	74.0	-18.1	1.18V	283	19.32	31.40	5.19	0.00	-36.59
4	4803.90	45.0 AV	54.0	-9.0	1.18V	283	8.36	31.40	5.19	0.00	-36.59

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.



<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 39	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	98.5 PK	114.0	-15.5	1.25H	355	66.10	27.33	5.08	0.00	-32.40
2	*2441.00	90.2 AV	94.0	-3.8	1.25H	355	57.82	27.33	5.08	0.00	-32.40
3	4881.90	60.0 PK	74.0	-14.0	1.08H	68	23.21	31.49	5.26	0.00	-36.77
4	4881.90	47.8 AV	54.0	-6.2	1.08H	68	11.00	31.49	5.26	0.00	-36.76

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	96.7 PK	114.0	-17.3	1.80V	12	64.30	27.33	5.08	0.00	-32.40
2	*2441.00	87.5 AV	94.0	-6.5	1.80V	12	55.13	27.33	5.08	0.00	-32.40
3	4881.80	56.0 PK	74.0	-18.0	1.07V	53	19.21	31.49	5.26	0.00	-36.77
4	4881.80	45.7 AV	54.0	-8.3	1.07V	53	8.96	31.49	5.26	0.00	-36.76

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.





<b>EUT</b>	USB Transceiver	<b>MODEL</b>	C-UD10A
<b>MODE</b>	Channel 78	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	99.8 PK	114.0	-14.2	1.04H	17	58.53	27.54	5.06	0.00	-32.59
2	*2480.00	91.1 AV	94.0	-2.9	1.04H	17	67.20	27.54	5.06	0.00	-32.59
3	4959.80	57.3 PK	74.0	-16.7	1.17H	311	20.40	31.56	5.32	0.00	-36.88
4	4959.80	46.6 AV	54.0	-7.4	1.17H	311	9.70	31.56	5.32	0.00	-36.88

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	96.0 PK	114.0	-18.0	1.93H	337	63.40	27.54	5.06	0.00	-32.59
2	*2480.00	85.7 AV	94.0	-8.3	1.93H	337	53.12	27.54	5.06	0.00	-32.59
3	4959.80	55.4 PK	74.0	-18.6	1.05V	94	18.56	31.56	5.32	0.00	-36.88
4	4959.80	44.2 AV	54.0	-9.8	1.05V	94	7.32	31.56	5.32	0.00	-36.88

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.



## 4.2.7 TEST RESULTS (B)

## RF Portion :

<b>EUT</b>	Gamepad	<b>MODEL</b>	G-RA4A
<b>MODE</b>	Channel 0	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.00	89.3 PK	114.00	-24.7	1.53H	291	58.65	27.08	3.60	0.00	-30.67
2	*2402.00	87.9 AV	94.00	-6.1	1.53H	291	57.18	27.08	3.60	0.00	-30.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	2402.00	86.9 PK	114.00	-27.1	1.52V	162	56.20	27.08	3.60	0.00	-30.67
2	2402.00	85.0 AV	94.00	-9.0	1.52V	162	54.36	27.08	3.60	0.00	-30.67

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.



<b>EUT</b>	Gamepad	<b>MODEL</b>	G-RA4A
<b>MODE</b>	Channel 39	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	86.2 AV	114.00	-27.8	1.52H	273	55.23	27.30	3.64	0.00	-30.94
2	*2441.00	87.8 PK	94.00	-6.2	1.52H	273	56.89	27.30	3.64	0.00	-30.94

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.00	87.3 PK	114.00	-26.7	1.19V	261	56.32	27.30	3.64	0.00	-30.94
2	*2441.00	85.6 Av	94.00	-8.4	1.19V	261	54.62	27.30	3.64	0.00	-30.94

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.



<b>EUT</b>	Gamepad	<b>MODEL</b>	G-RA4A
<b>MODE</b>	Channel 78	<b>FREQUENCY RANGE</b>	Above 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	27 deg. C, 60%RH, 1050 hPa	<b>TESTED BY:</b> Steven Lu	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	89.6 pk	114.00	-24.4	1.27H	113	58.36	27.52	3.68	0.00	-31.20
2	*2480.00	87.4 Av	94.00	-6.6	1.27H	113	56.22	27.52	3.68	0.00	-31.20

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.00	86.4 PK	114.00	-27.6	1.39V	53	55.20	27.52	3.68	0.00	-31.20
2	*2480.00	84.9 AV	94.00	-9.1	1.39V	53	53.65	27.52	3.68	0.00	-31.20

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " \* " : Fundamental frequency
5. The other emission levels were very low against the limit.

### 4.3 BAND EDGES MEASUREMENT

#### 4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 16, 2002

#### Notes:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.





#### 4.3.4 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.3.5 TEST RESULTS (A)

The spectrum plots are attached below. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.249.

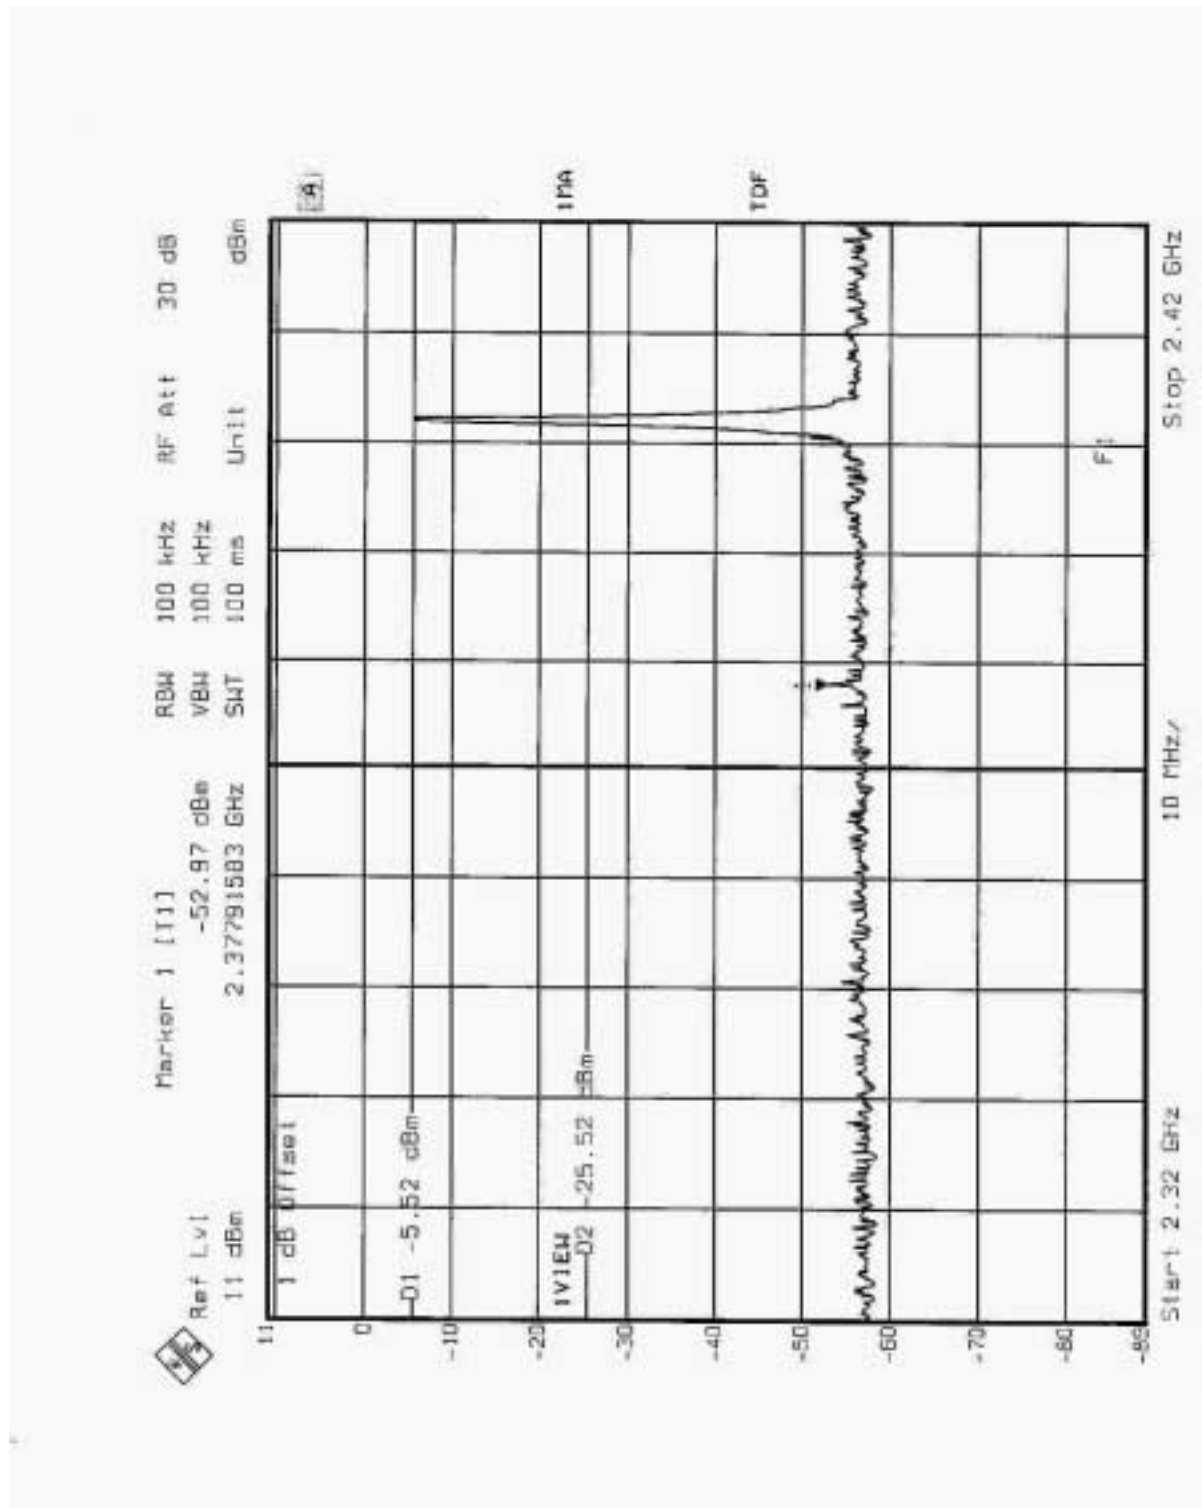

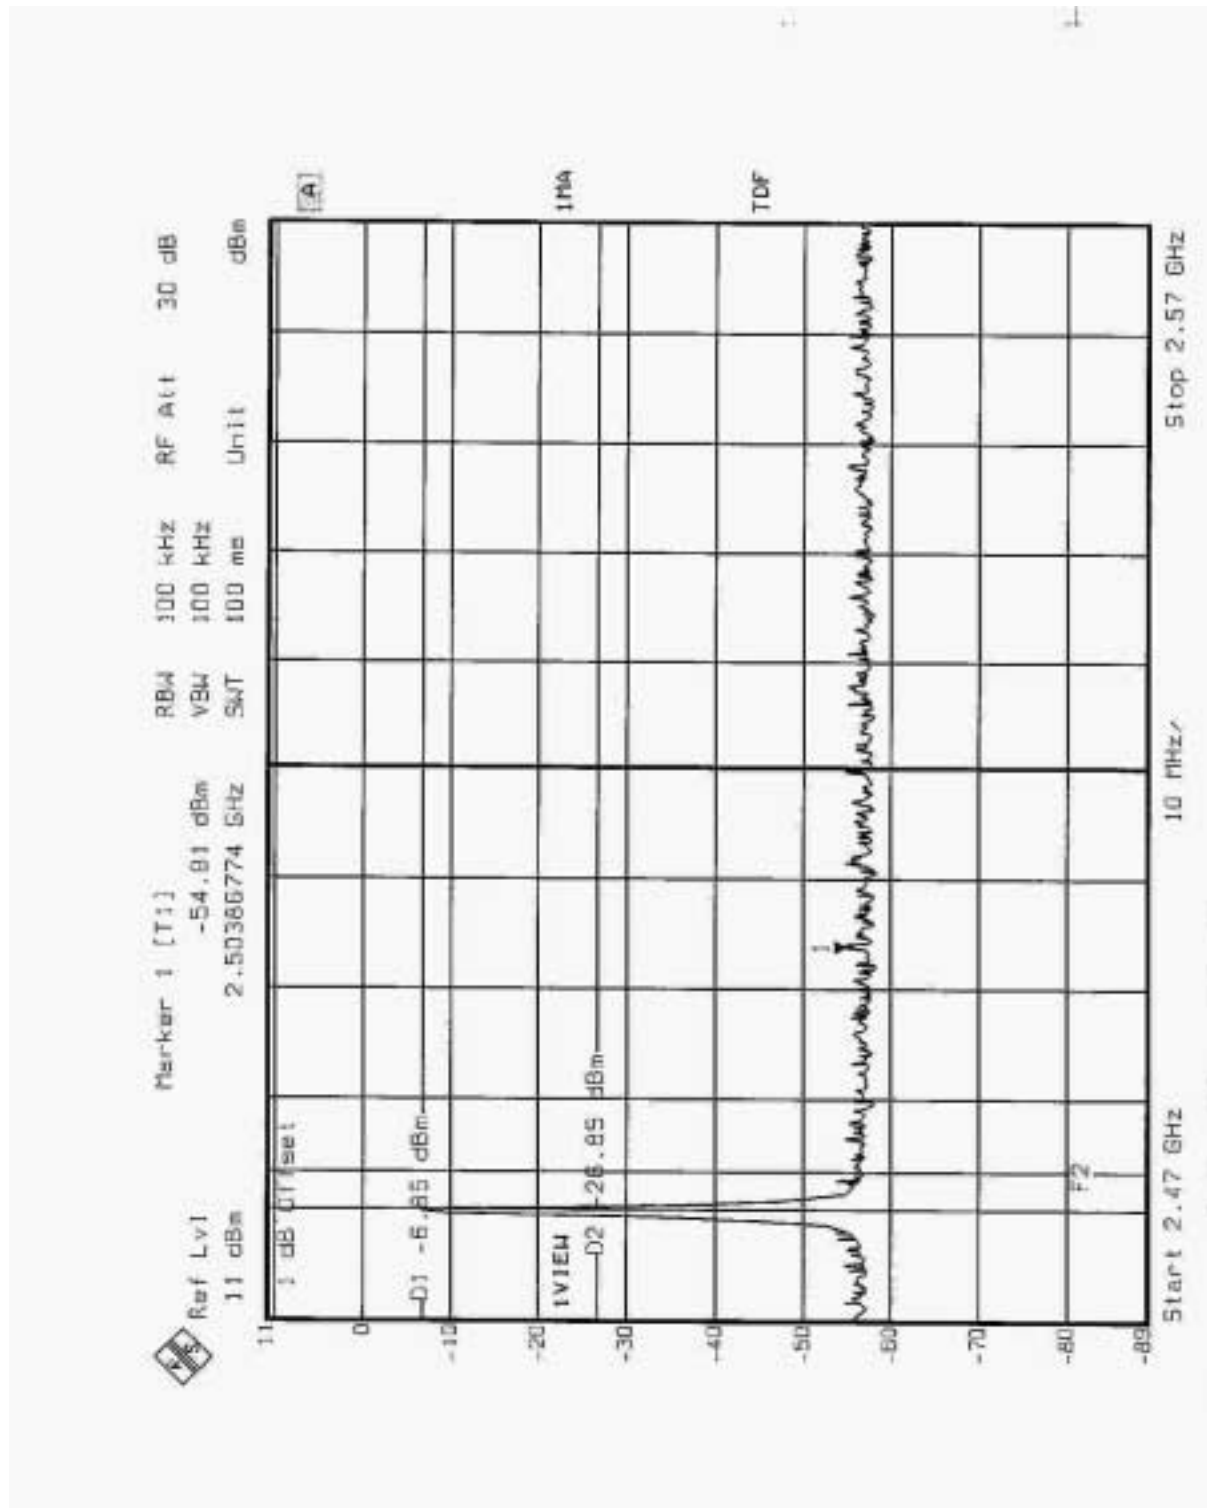







#### 4.3.6 TEST RESULTS (B)

The spectrum plots are attached below. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.249.

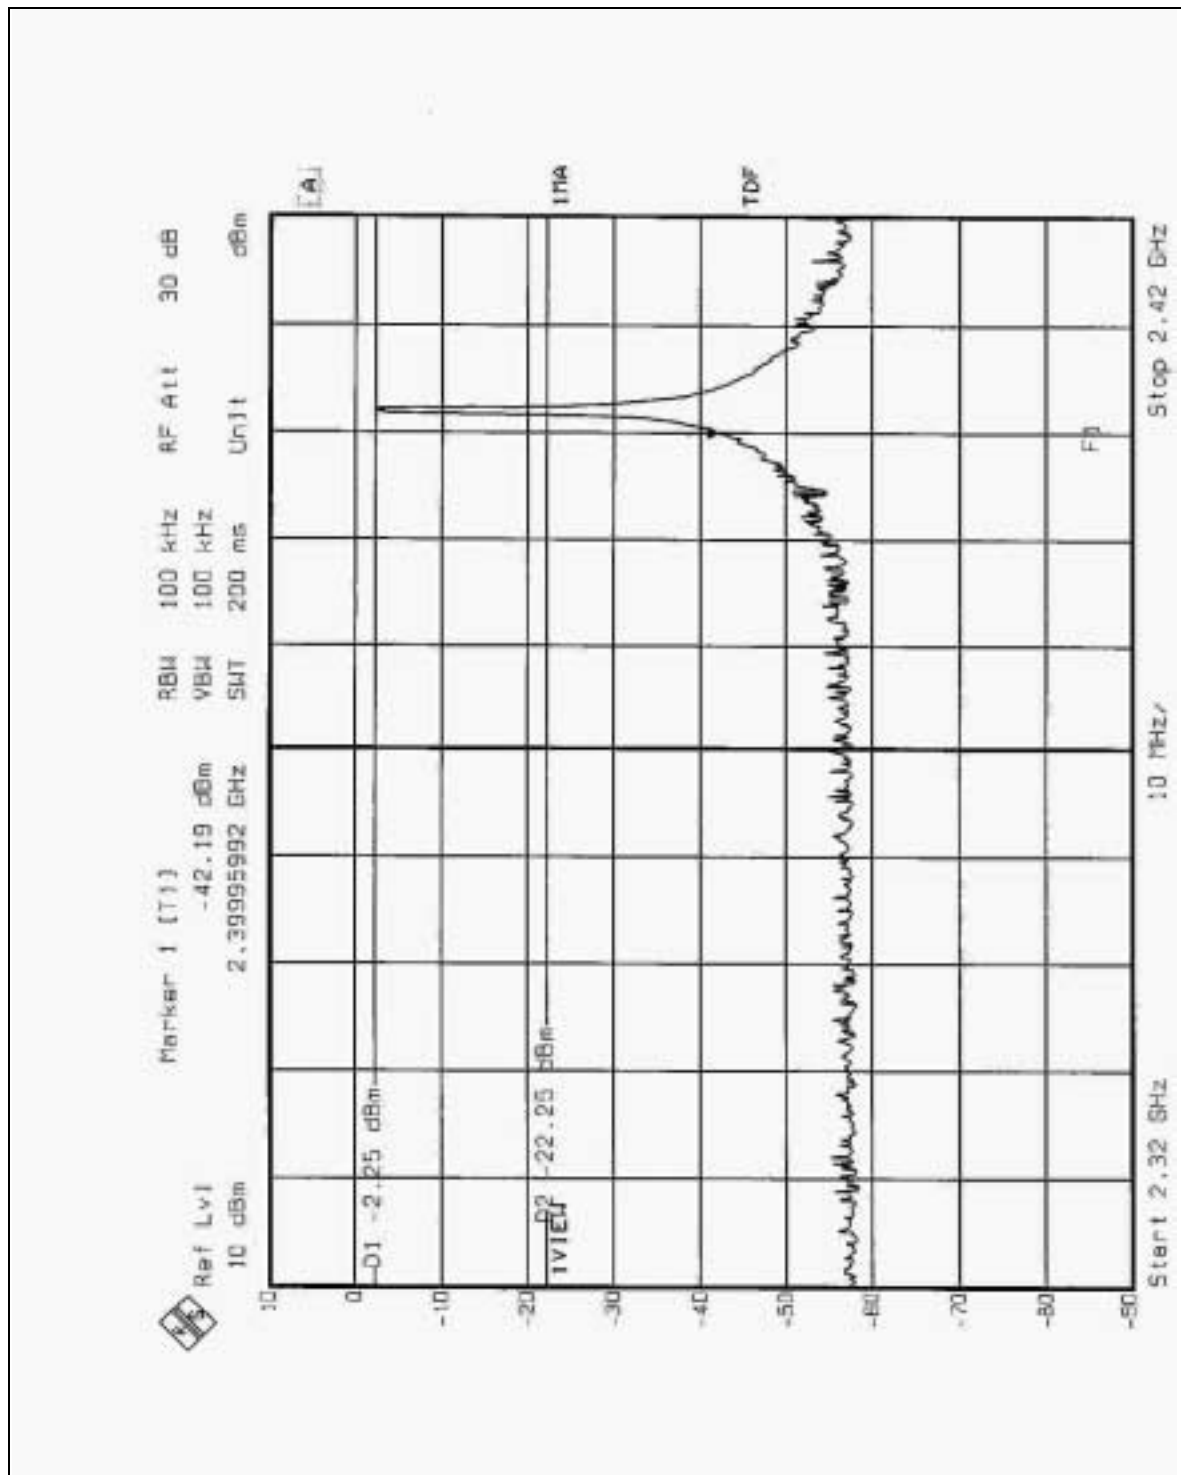

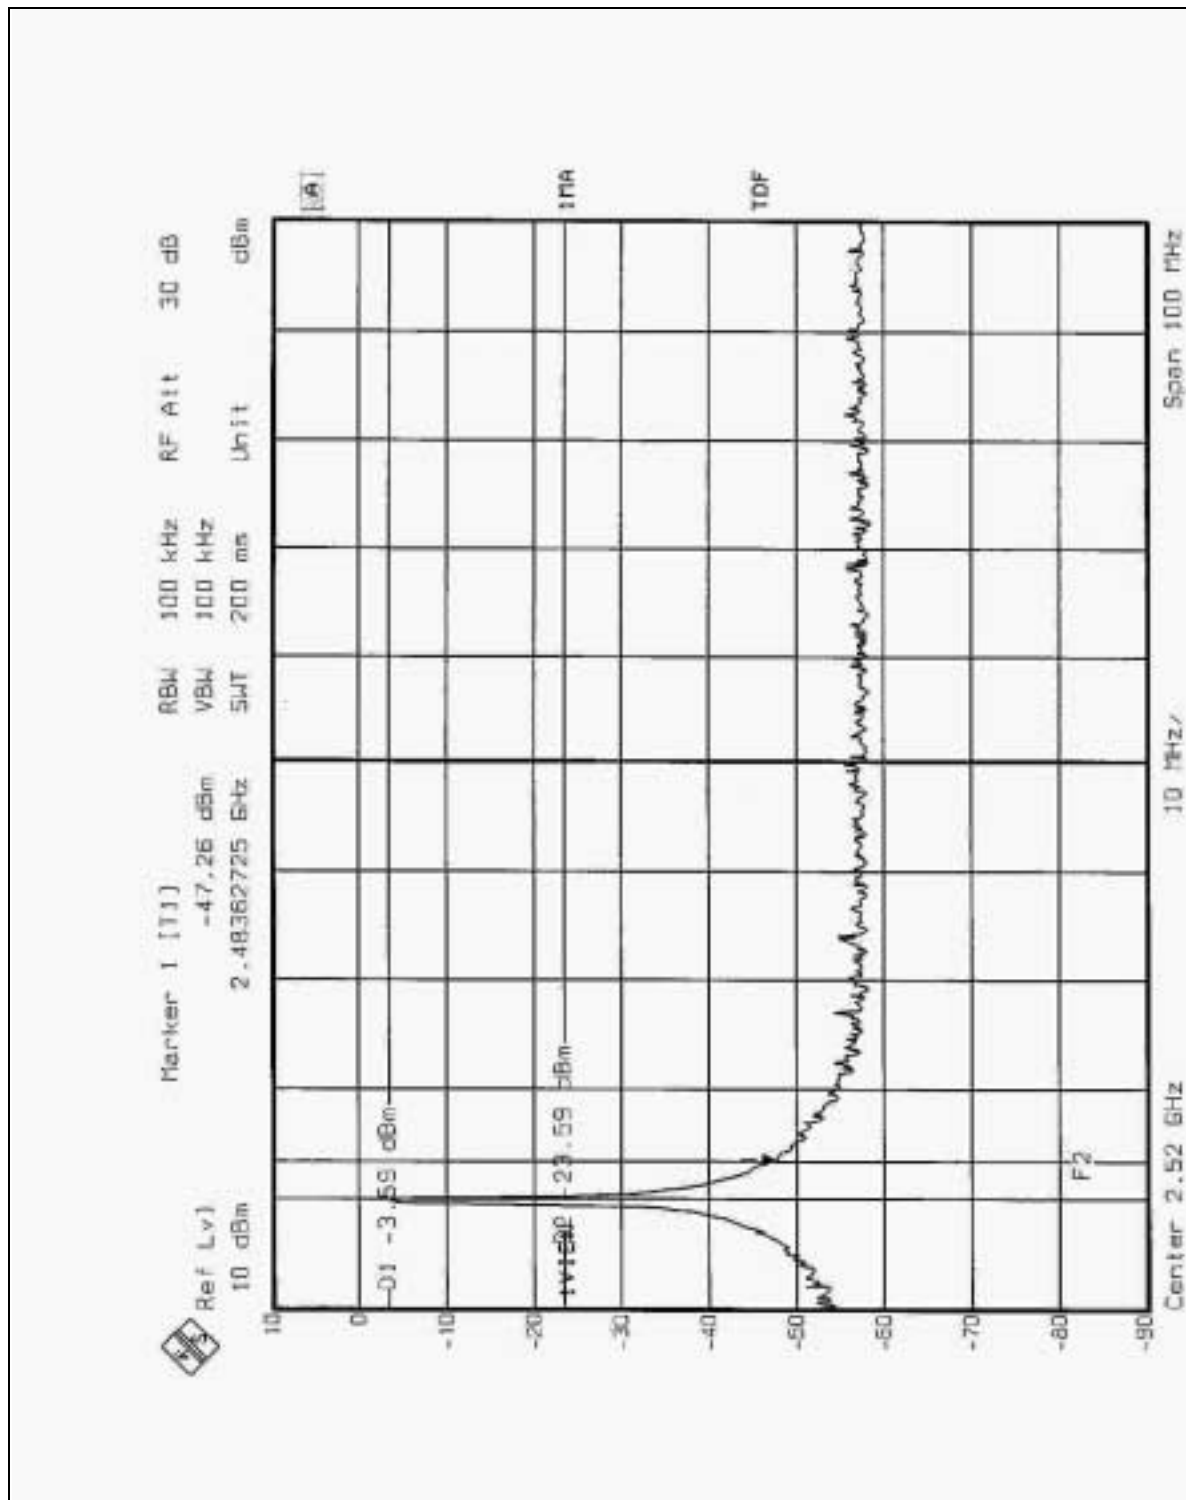



#### **4.4 ANTENNA REQUIREMENT**

##### **4.4.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### **4.4.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Sheet metal inverted-F antenna. There is no antenna connector. The maximum Gain of this antenna is only 0dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



## RADIATED EMISSION TEST





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.