



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GTS20191209008-1-11

FCC ID.....: 2AVEDBL-M7668BU2

Compiled by

(position+printed name+signature)...: File administrators Peter Xiao

Peter Xiao

Supervised by

(position+printed name+signature)...: Test Engineer Moon Tan

Moon Tan

Approved by

(position+printed name+signature)...: Manager Simon Hu

Simon Hu

Date of issue.....: Dec.19,2019

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name.....: Shenzhen Feng Ruixiang Intelligent Technology Co., Ltd.

Address: 302, Building 6, no.4 Zhongxing road, Zhangge community, Fucheng street, Longhua district, Shenzhen, Guangdong, P.R. China

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description **EEE802.11a/b/g/n/ac2T2R WIFI+BT5.0ADIO Module**

Trade Mark: N/A

Manufacturer: Shenzhen Feng Ruixiang Intelligent Technology Co., Ltd.

Model/Type reference.....: BL-M7668BU2

Listed Models: N/A

Operation Frequency.....: From 2412MHz to 2462MHz

Hardware Version: N/A

Software Version: V1.0

Rating: DC 3.3V

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20191209008-1-11	Dec.19,2019 Date of issue
---	------------------------------

Equipment under Test : EEE802.11a/b/g/n/ac2T2R WIFI+BT5.0ADIO Module

Model /Type : BL-M7668BU2

Listed Models : N/A

Applicant : **Shenzhen Feng Ruixiang Intelligent Technology Co., Ltd.**

Address : 302, Building 6, no.4 Zhongxing road, Zhangge community, Fucheng street, Longhua district, Shenzhen, Guangdong, P.R. China

Manufacturer : **Shenzhen Feng Ruixiang Intelligent Technology Co., Ltd.**

Address : 302, Building 6, no.4 Zhongxing road, Zhangge community, Fucheng street, Longhua district, Shenzhen, Guangdong, P.R. China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS.....	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Equipment Under Test	6
2.4. Short description of the Equipment under Test (EUT)	6
2.5. EUT operation mode	6
2.6. Block Diagram of Test Setup	6
2.7. Related Submittal(s) / Grant (s)	6
2.8. Special Accessories	6
2.9. Modifications	6
3. TEST ENVIRONMENT.....	7
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Environmental conditions	7
3.4. Test Description	8
3.5. Statement of the measurement uncertainty	7
3.6. Equipments Used during the Test	10
4. TEST CONDITIONS AND RESULTS	11
4.1. AC Power Conducted Emission	11
4.2. Radiated Emission	13
4.3. Maximum Peak Output Power	19
4.4. Power Spectral Density	21
4.5. 6dB Bandwidth	27
4.6. Band Edge Compliance of RF Emission	32
4.7. Antenna Requirement	39
5. TEST SETUP PHOTOS OF THE EUT	40
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	40

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 DTS Meas Guidance v05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Dec. 12, 2019
	:	
Testing commenced on	:	Dec. 12, 2019
	:	
Testing concluded on	:	Dec.19,2019

2.2. Product Description

Product Name	EEE802.11a/b/g/n/ac2T2R WIFI+BT5.0ADIO Module
Trade Mark	N/A
Model/Type reference	BL-M7668BU2
List Models	N/A
Model Declaration	N/A
Power supply:	DC 3.3V
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
WIFI(5.2G Band)	
Frequency Range	5180MHz ~ 5240MHz
Channel Number	4 channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	802.11a/n/ac: OFDM
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac: OFDM
Antenna Description	Three same FPC Antenna, but WLAN support MIMO technology ANT0 used for WIFI TX/RX, 5.0dBi(Max.) for 2.4G Band and 5.0dBi(Max.) for 5G Band ANT1 used for WIFI TX/RX, 5.0dBi(Max.) for 2.4G Band and 5.0dBi(Max.) for 5G Band ANT2 used for Bluetooth, 5.0dBi(Max.)

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 3.3V

2.4. Short description of the Equipment under Test (EUT)

This is a IEEE802.11a/b/g/n/ac2T2R WIFI+BT5.0ADIO Module.
For more details, refer to the user's manual of the EUT.


2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.6. Block Diagram of Test Setup

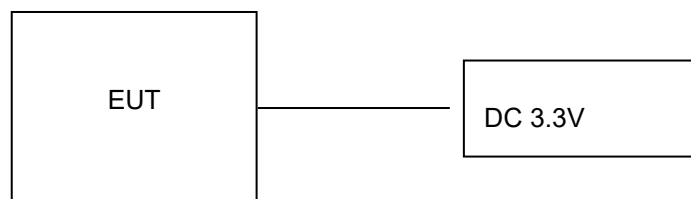

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AVEDBL-M7668BU2** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
TOSHIBA	PC	Satellite S40Dt-A	--	SDOC

Note: The Pc is only used for auxiliary testing.

2.9. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	802.11b	☒ Lowest ☒ Middle ☒ Highest	802.11b	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(a)(2)	Spectrum bandwidth – 6 dB bandwidth	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☐	☐	☒	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11b	-/-	802.11b	-/-	☐	☐	☒	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10 th Harmonic	11b/DSSS	1 Mbps	1/7/11
	11g/OFDM	6 Mbps	1/7/11
	11n(20MHz)/OFDM	6.5Mbps	1/7/11
	11n(40MHz)/OFDM	13.5Mbps	3/7/11
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5Mbps	3/9

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESPI3	101841-cd	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSV40	100019	2019/09/20	2020/09/19
Vector Signal generator	Agilent	N5181A	MY49060502	2019/09/20	2020/09/19
Signal generator	Agilent	E4421B	3610AO1069	2019/09/20	2020/09/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/23	2020/09/22
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2019/10/12	2020/10/11
Bilog Antenna	Schwarzbeck	VULB9163	000976	2019/05/26	2020/05/25
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV9179	9719-025	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
Test Control Unit	Tonscend	JS0806-1	178060067	2019/06/20	2020/06/19
Automated filter bank	Tonscend	JS0806-F	19F8060177	2019/06/20	2020/06/19
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

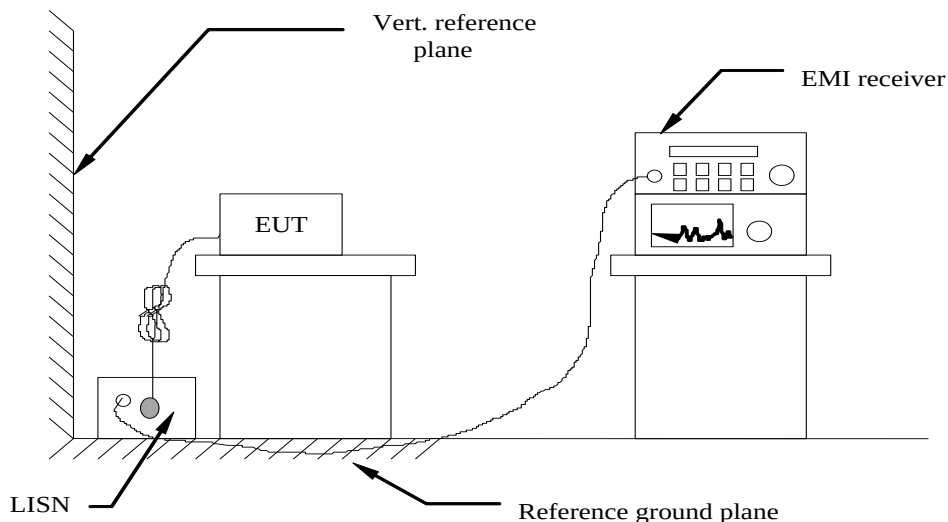

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
- 4 The EUT received DC 5V power, the PC received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 150 KHz to 30MHz in AC120V and the worst case was recorded.


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

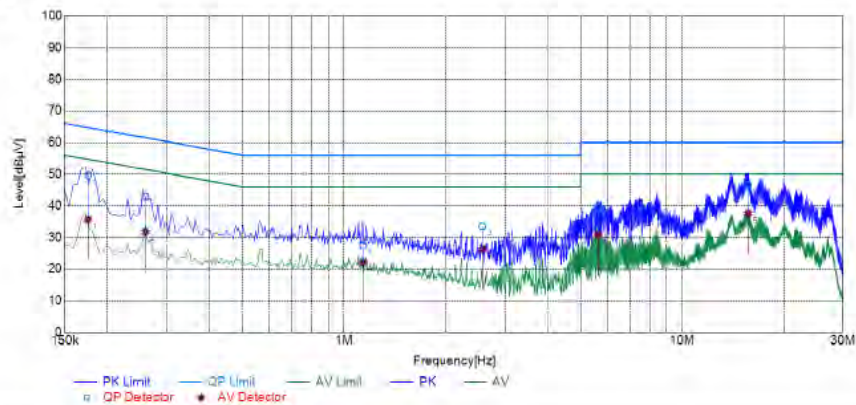

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1759	39.38	25.48	10.22	49.61	35.71	64.68	54.68	15.07	18.97	L1	PASS
2	0.2580	32.80	21.70	10.12	42.92	31.82	61.50	51.50	18.58	19.68	L1	PASS
3	2.5648	23.33	16.24	10.31	33.54	26.45	56.00	46.00	22.46	19.55	L1	PASS
4	1.1358	17.27	11.88	10.21	27.48	22.09	56.00	46.00	28.52	23.91	L1	PASS
5	5.6384	28.90	20.53	10.44	39.33	30.96	60.00	50.00	20.67	19.04	L1	PASS
6	15.6684	35.50	26.55	11.12	46.62	37.67	60.00	50.00	13.38	12.33	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

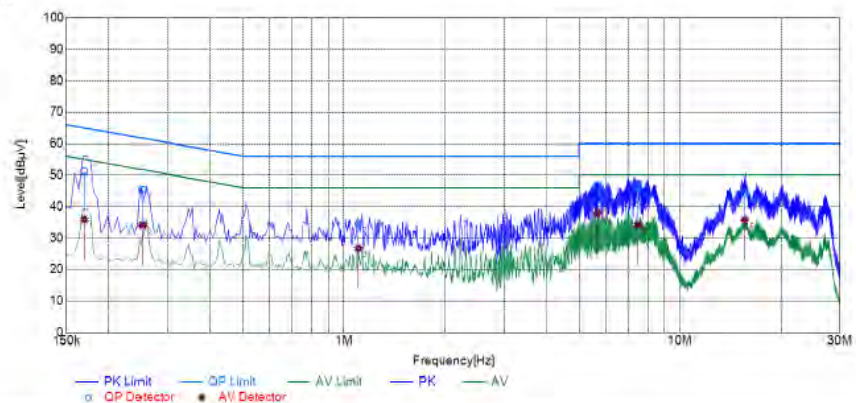

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1695	40.99	25.74	10.24	51.25	36.00	64.98	54.98	13.73	18.98	N	PASS
2	0.2523	35.23	24.02	10.12	45.35	34.14	61.68	51.68	16.33	17.54	N	PASS
3	1.1023	24.41	16.62	10.21	34.62	26.83	56.00	46.00	21.38	19.17	N	PASS
4	5.6821	36.28	27.54	10.44	46.73	37.99	60.00	50.00	13.27	12.01	N	PASS
5	7.4926	35.69	23.79	10.54	46.23	34.33	60.00	50.00	13.77	15.67	N	PASS
6	15.5711	33.18	24.74	11.10	44.28	35.84	60.00	50.00	15.72	14.16	N	PASS


Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

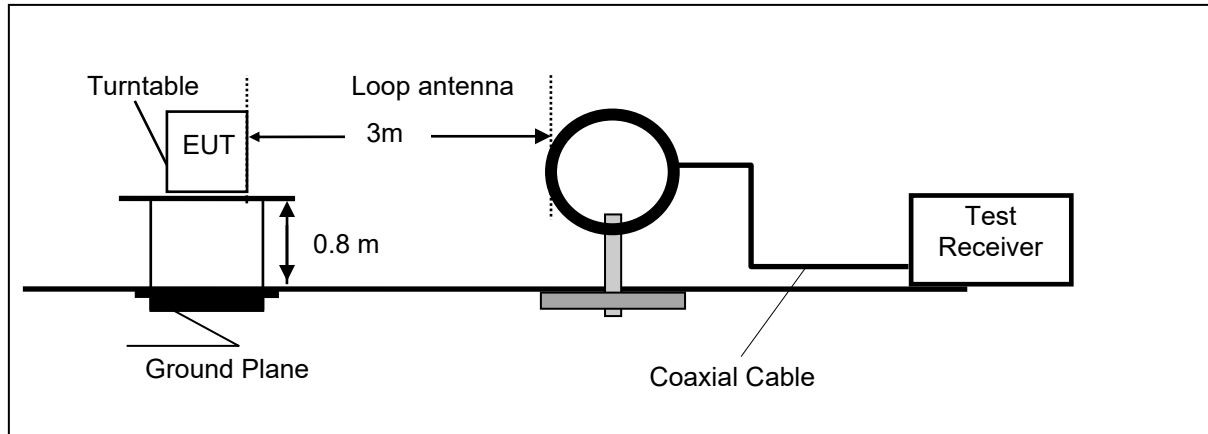

Frequency range 30MHz – 1000MHz

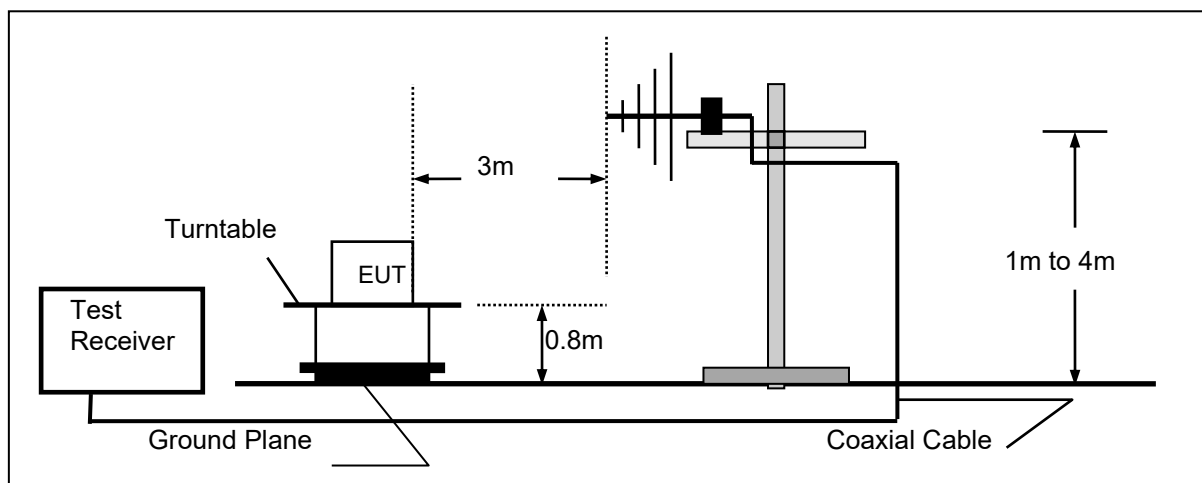

Frequency range above 1GHz-25GHz

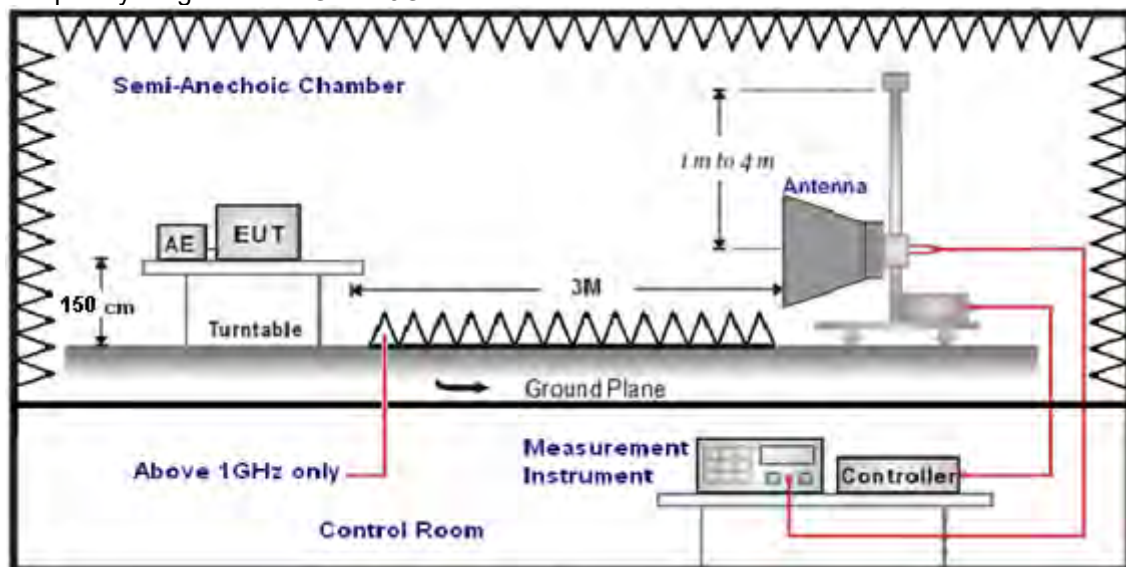

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 30MHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 30MHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark: We measured Radiated Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 30 MHz to 25GHz in AC120V and the worst case was recorded.

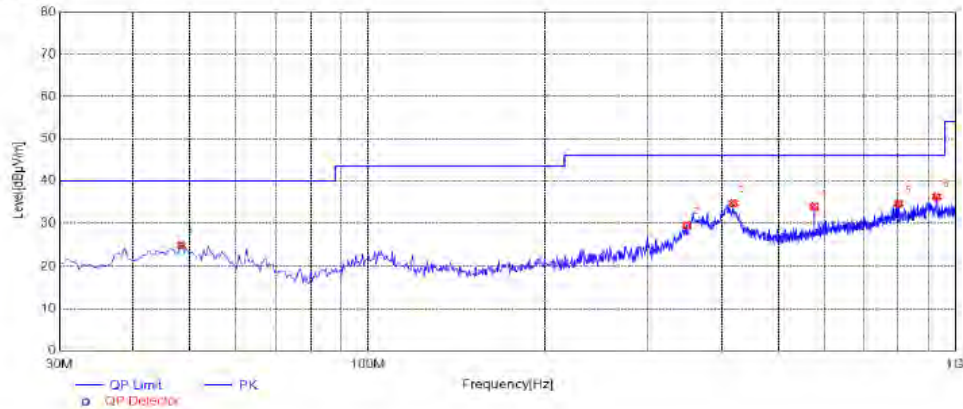For 30MHz-1GHz**Horizontal****Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	48.4300	31.12	-6.47	24.65	40.00	15.35	100	230	PK	Horizontal	PASS
2	349.1300	35.44	-5.95	29.49	46.00	16.51	100	320	PK	Horizontal	PASS
3	418.9700	39.53	-4.80	34.73	46.00	11.27	100	30	PK	Horizontal	PASS
4	576.1100	36.33	-2.48	33.85	46.00	12.15	100	270	PK	Horizontal	PASS
5	801.6350	33.41	1.19	34.60	46.00	11.40	100	310	PK	Horizontal	PASS
6	929.6750	30.97	5.26	36.23	46.00	9.77	100	240	PK	Horizontal	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

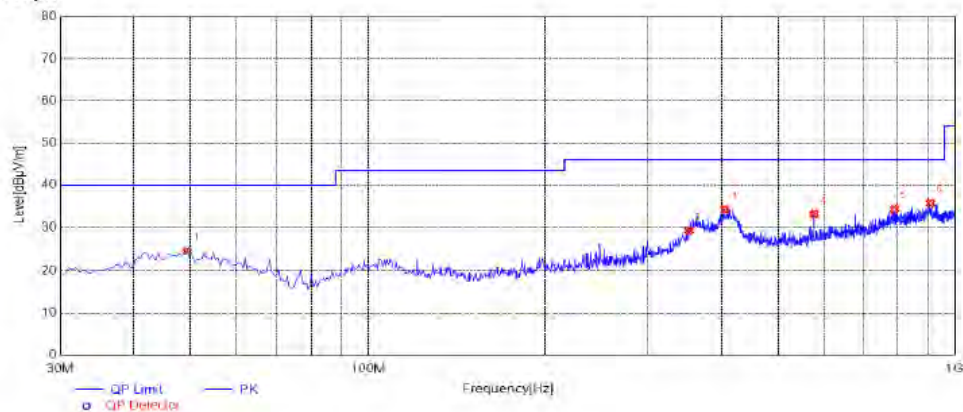Vertical**Test Graph****Suspected List**

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	49.4000	30.84	-6.51	24.33	40.00	15.67	100	350	PK	Vertical	PASS
2	352.0400	35.21	-6.00	29.21	46.00	16.79	100	120	PK	Vertical	PASS
3	405.8750	39.38	-5.10	34.28	46.00	11.72	100	40	PK	Vertical	PASS
4	576.1100	35.67	-2.48	33.19	46.00	12.81	100	220	PK	Vertical	PASS
5	789.0250	33.27	1.08	34.35	46.00	11.65	100	210	PK	Vertical	PASS
6	908.8200	32.18	3.54	35.72	46.00	10.28	100	190	PK	Vertical	PASS

Note: 1. Result (dBμV/m) = Reading (dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz*IEEE 802.11b**Channel 1 / 2412 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.89	31.60	36.50	7.00	51.99	74.00	-22.01	Peak	Horizontal
4824.00	36.73	31.60	36.50	7.00	38.83	54.00	-15.17	Average	Horizontal
4824.00	53.55	31.60	36.50	7.00	55.65	74.00	-18.35	Peak	Vertical
4824.00	34.97	31.60	36.50	7.00	37.07	54.00	-16.93	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	51.16	31.02	36.50	7.60	53.28	74.00	-20.72	Peak	Horizontal
4874.00	35.81	31.02	36.50	7.60	37.93	54.00	-16.07	Average	Horizontal
4874.00	53.01	31.02	36.50	7.60	55.13	74.00	-18.87	Peak	Vertical
4874.00	41.28	31.02	36.50	7.60	43.40	54.00	-10.60	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.95	31.58	36.20	7.82	54.15	74.00	-19.85	Peak	Horizontal
4924.00	38.80	31.58	36.20	7.82	42.00	54.00	-12.00	Average	Horizontal
4924.00	53.81	31.58	36.20	7.82	57.01	74.00	-16.99	Peak	Vertical
4924.00	36.98	31.58	36.20	7.82	40.18	54.00	-13.82	Average	Vertical

*IEEE 802.11g**Channel 1 / 2412 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	51.19	31.60	36.50	7.00	53.29	74.00	-20.71	Peak	Horizontal
4824.00	35.13	31.60	36.50	7.00	37.23	54.00	-16.77	Average	Horizontal
4824.00	53.33	31.60	36.50	7.00	55.43	74.00	-18.57	Peak	Vertical
4824.00	33.99	31.60	36.50	7.00	36.09	54.00	-17.91	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.36	31.02	36.50	7.60	51.48	74.00	-22.52	Peak	Horizontal
4874.00	35.58	31.02	36.50	7.60	37.70	54.00	-16.30	Average	Horizontal
4874.00	54.30	31.02	36.50	7.60	56.42	74.00	-17.58	Peak	Vertical
4874.00	40.67	31.02	36.50	7.60	42.79	54.00	-11.21	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.74	31.58	36.20	7.82	54.94	74.00	-19.06	Peak	Horizontal
4924.00	38.25	31.58	36.20	7.82	41.45	54.00	-12.55	Average	Horizontal
4924.00	52.80	31.58	36.20	7.82	56.00	74.00	-18.00	Peak	Vertical
4924.00	37.92	31.58	36.20	7.82	41.12	54.00	-12.88	Average	Vertical

*IEEE802.11 n HT20**Channel 1 / 2412 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.79	31.60	36.50	7.00	51.89	74.00	-22.11	Peak	Horizontal
4824.00	36.63	31.60	36.50	7.00	38.73	54.00	-15.27	Average	Horizontal
4824.00	54.84	31.60	36.50	7.00	56.94	74.00	-17.06	Peak	Vertical
4824.00	35.23	31.60	36.50	7.00	37.33	54.00	-16.67	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.94	31.02	36.50	7.60	53.06	74.00	-20.94	Peak	Horizontal
4874.00	35.83	31.02	36.50	7.60	37.95	54.00	-16.05	Average	Horizontal
4874.00	53.09	31.02	36.50	7.60	55.21	74.00	-18.79	Peak	Vertical
4874.00	41.18	31.02	36.50	7.60	43.30	54.00	-10.70	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	52.19	31.58	36.20	7.82	55.39	74.00	-18.61	Peak	Horizontal
4924.00	37.85	31.58	36.20	7.82	41.05	54.00	-12.95	Average	Horizontal
4924.00	54.51	31.58	36.20	7.82	57.71	74.00	-16.29	Peak	Vertical
4924.00	37.16	31.58	36.20	7.82	40.36	54.00	-13.64	Average	Vertical

*IEEE802.11 n HT40**Channel 1 / 2422 MHz*

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	49.85	31.60	36.50	7.00	51.95	74.00	-22.05	Peak	Horizontal
4844.00	35.71	31.60	36.50	7.00	37.81	54.00	-16.19	Average	Horizontal
4844.00	52.95	31.60	36.50	7.00	55.05	74.00	-18.95	Peak	Vertical
4844.00	34.66	31.60	36.50	7.00	36.76	54.00	-17.24	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.89	31.02	36.50	7.60	52.01	74.00	-21.99	Peak	Horizontal
4874.00	35.86	31.02	36.50	7.60	37.98	54.00	-16.02	Average	Horizontal
4874.00	54.64	31.02	36.50	7.60	56.76	74.00	-17.24	Peak	Vertical
4874.00	41.05	31.02	36.50	7.60	43.17	54.00	-10.83	Average	Vertical

Channel 11 / 2452 MHz


Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	51.32	31.58	36.20	7.82	54.52	74.00	-19.48	Peak	Horizontal
4904.00	37.09	31.58	36.20	7.82	40.29	54.00	-13.71	Average	Horizontal
4904.00	54.05	31.58	36.20	7.82	57.25	74.00	-16.75	Peak	Vertical
4904.00	37.90	31.58	36.20	7.82	41.10	54.00	-12.90	Average	Vertical

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2. and Average conducted output power, 9.2.3.1.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Antenna 0:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.36	12.27	30.00	Pass
	06	15.78	12.55		
	11	16.15	13.12		
802.11g	01	15.38	12.27	30.00	Pass
	06	15.48	12.48		
	11	16.14	13.20		
802.11n(HT20)	01	14.35	10.53	30.00	Pass
	06	14.73	10.17		
	11	14.65	10.22		
802.11n(HT40)	03	14.39	9.78	30.00	Pass
	06	14.46	9.65		
	09	14.86	9.32		

Antenna 1:

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	15.20	12.56	30.00	Pass
	06	15.46	12.18		
	11	16.12	13.26		
802.11g	01	15.21	12.63	30.00	Pass
	06	15.62	12.08		
	11	15.62	12.36		
802.11n(HT20)	01	14.39	10.25	30.00	Pass
	06	14.72	10.34		
	11	14.73	10.17		
802.11n(HT40)	03	14.28	9.36	30.00	Pass
	06	14.46	9.52		
	09	14.65	9.41		

Note: 1.The test results including the cable lose.


Duty cycle used in all test items: 100%

MIMO*2

Type	Channel	Peak Output power ANT0 (dBm)	Peak Output power ANT1 (dBm)	average Output power ANT0 (dBm)	average Output power ANT1 (dBm)	Peak Output power Total (dBm)	average Output power Total (dBm)	Limit (dBm)	Result
802.11n (HT20)	01	14.35	14.39	10.53	10.25	17.38	13.40	27.99	Pass
	06	14.73	14.72	10.17	10.34	17.74	13.27		
	11	14.65	14.73	10.22	10.17	17.70	13.21		
802.11n (HT40)	03	14.39	14.28	9.78	9.36	17.35	12.59	27.99	Pass
	06	14.46	14.46	9.65	9.52	17.47	12.60		
	09	14.86	14.65	9.32	9.41	17.77	12.38		

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

Antenna 0:

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-14.60	8.00	Pass
	06	-14.62		
	11	-2.42		
802.11g	01	-19.38	8.00	Pass
	06	-19.82		
	11	-17.65		
802.11n(HT20)	01	-19.68	8.00	Pass
	06	-20.26		
	11	-18.26		
802.11n(HT40)	03	-23.11	8.00	Pass
	06	-21.66		
	09	-22.20		





Antenna 1:


Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-2.64	8.00	Pass
	06	-4.86		
	11	-14.69		
802.11g	01	-20.99	8.00	Pass
	06	-19.99		
	11	-19.88		
802.11n(HT20)	01	-19.57	8.00	Pass
	06	-20.27		
	11	-20.31		
802.11n(HT40)	03	-23.27	8.00	Pass
	06	-23.06		
	09	-22.51		

MIMO*2


Type	Channel	Power Spectral Density ANT0 (dBm/3KHz)	Power Spectral Density ANT0 (dBm/3KHz)	Power Spectral Density Total (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11n(HT20)	01	-19.68	-19.57	-16.61	5.99	Pass
	06	-20.26	-20.27	-17.25		
	11	-18.26	-20.31	-16.15		
802.11n(HT40)	03	-23.11	-23.27	-20.18	5.99	Pass
	06	-21.66	-23.06	-19.29		
	09	-22.20	-22.51	-19.34		

Antenna 0:

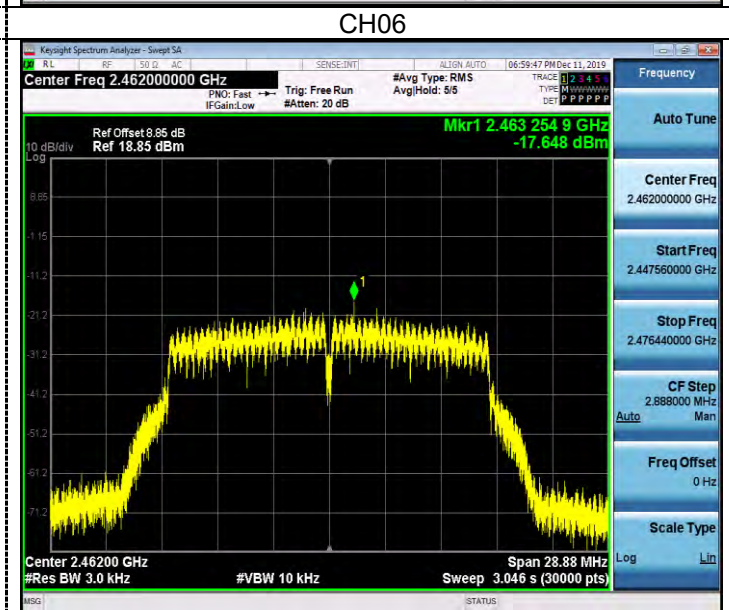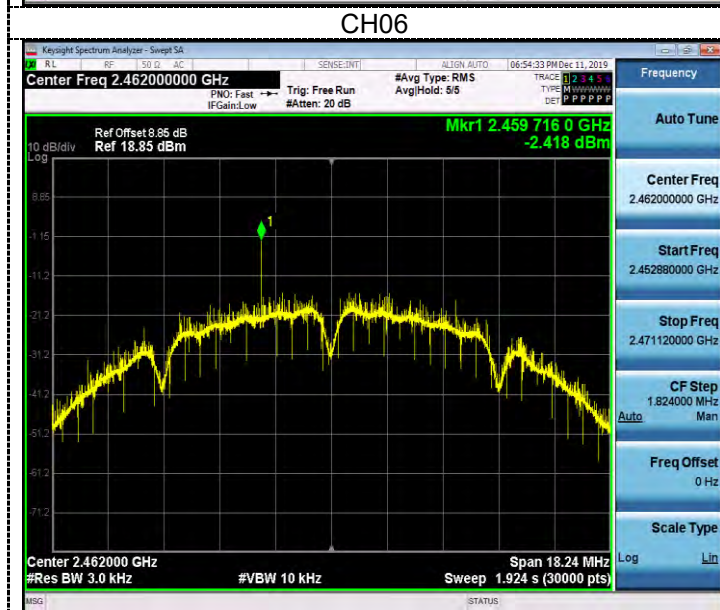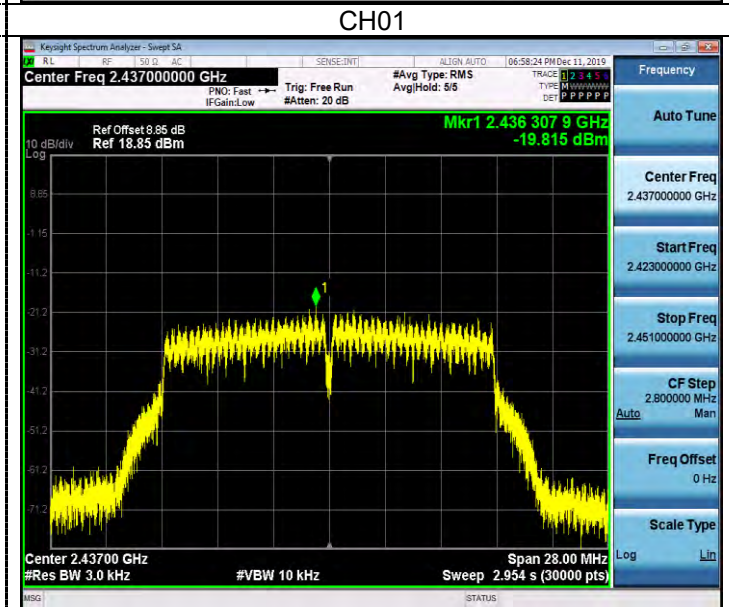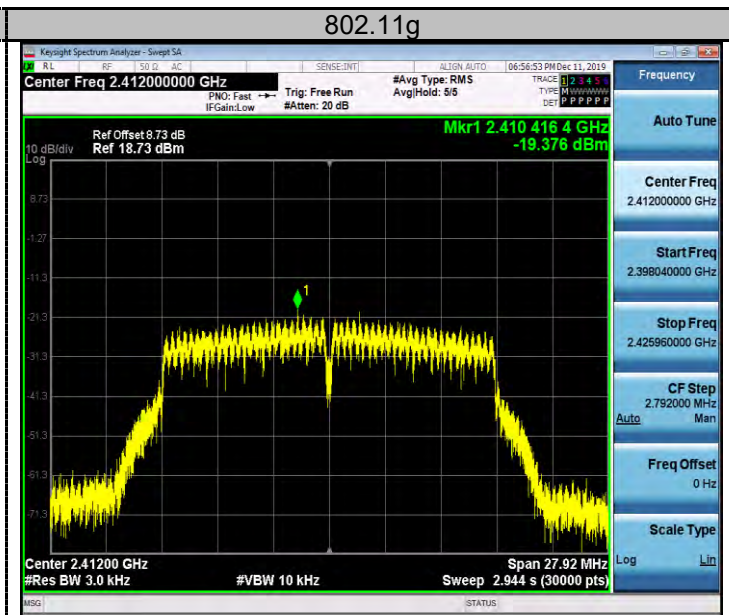


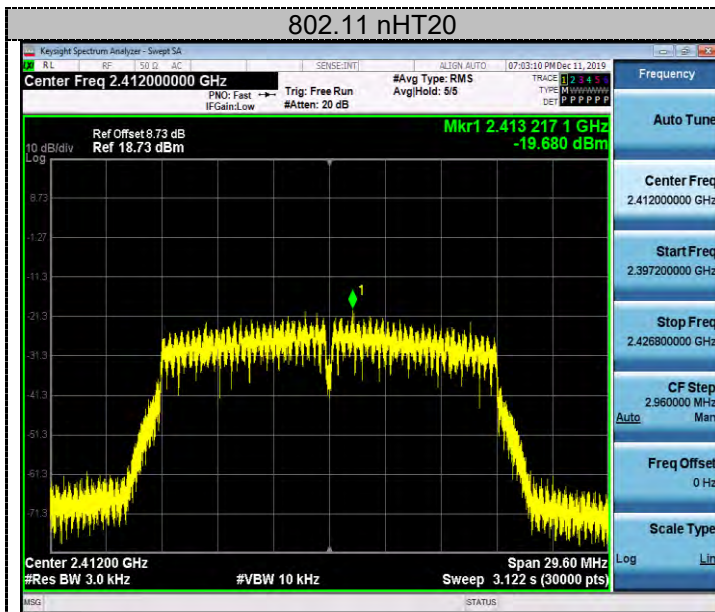


CH01

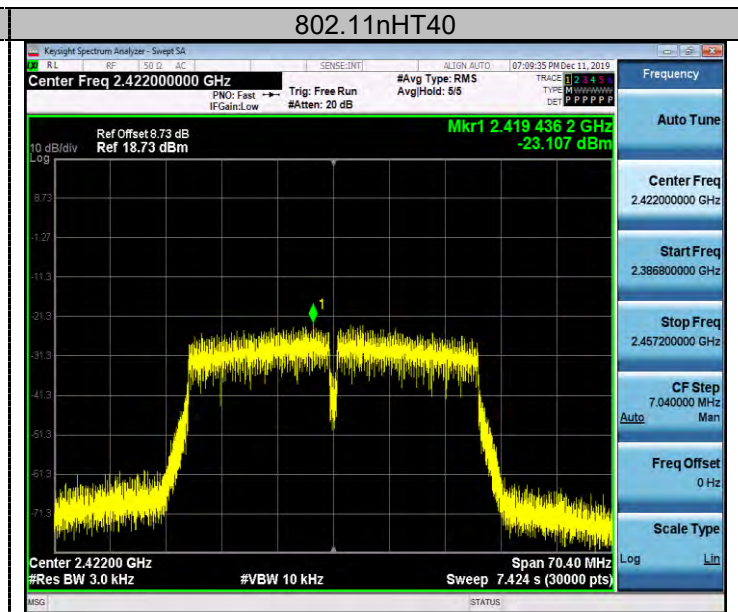


CH03

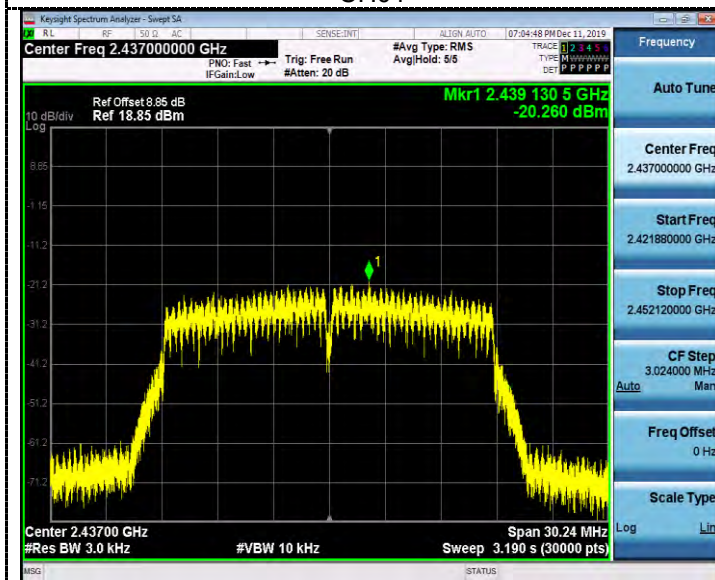


CH06

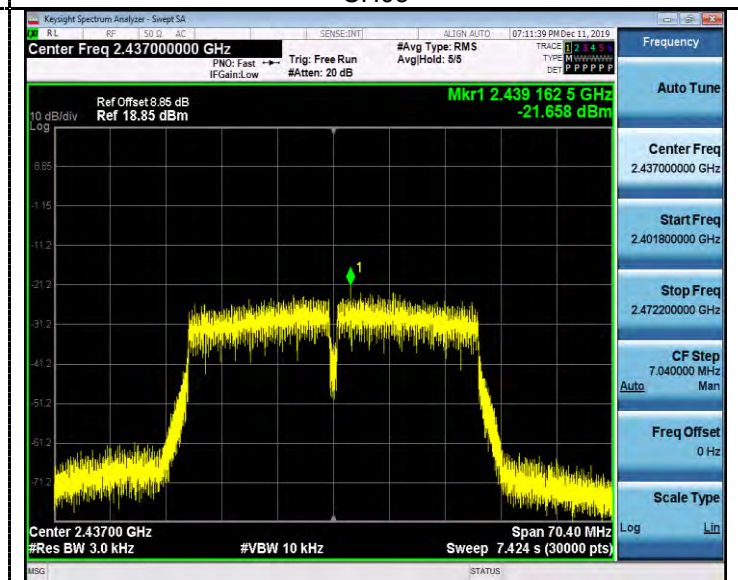

CH06






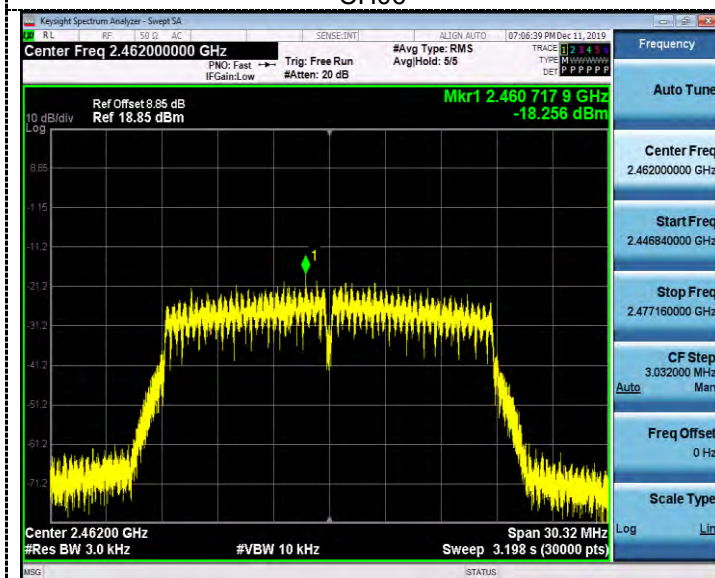



CH11

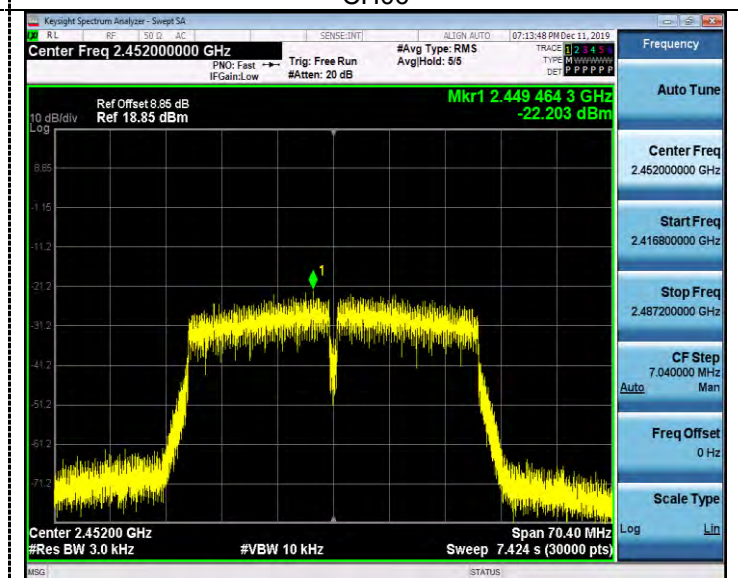


CH09

Antenna 1:

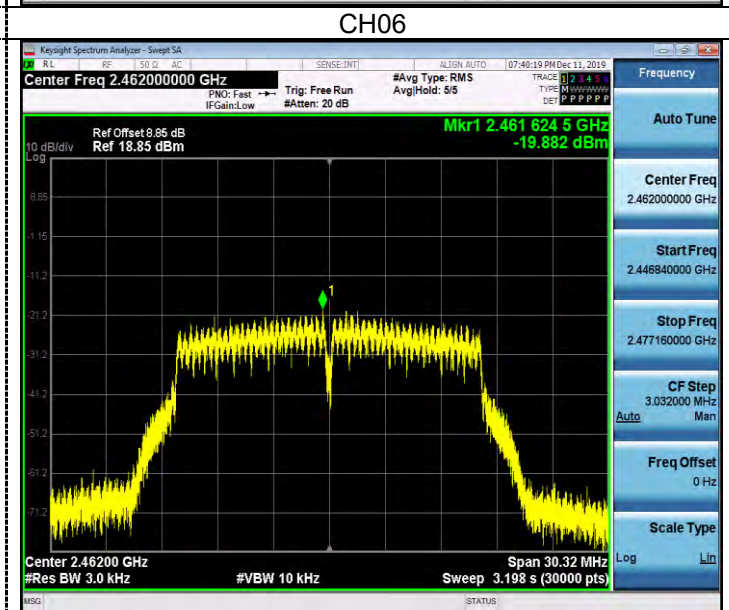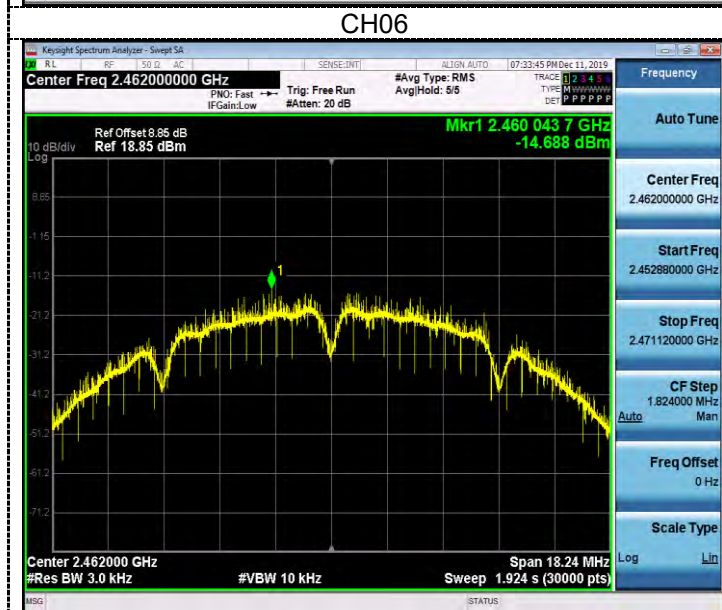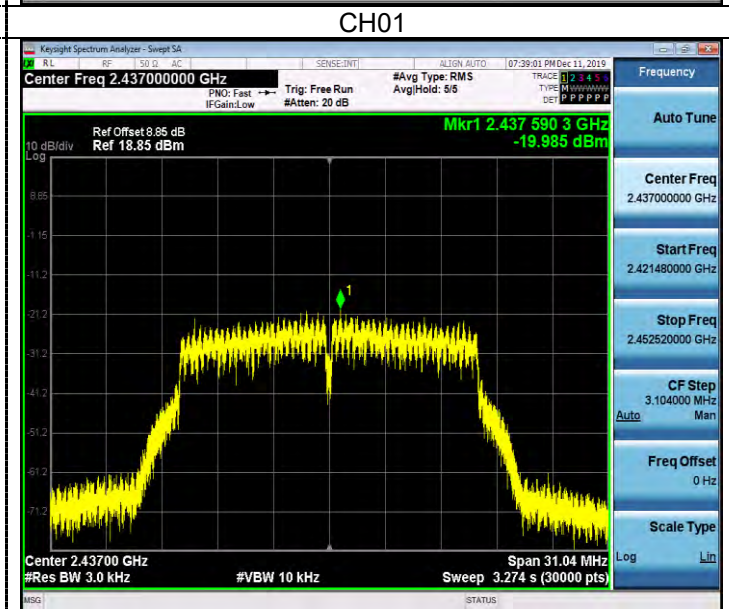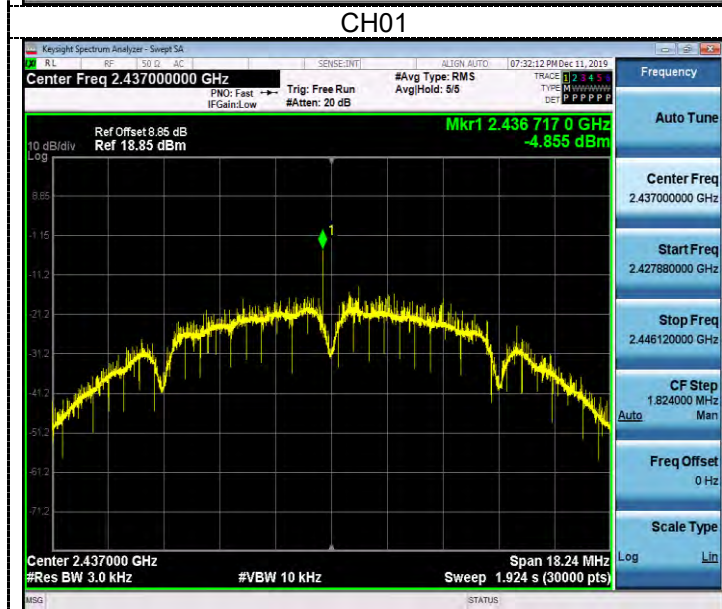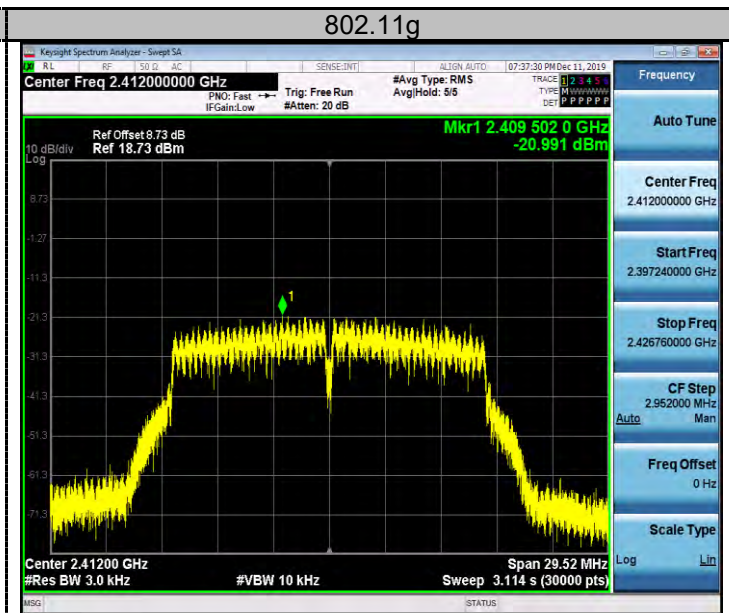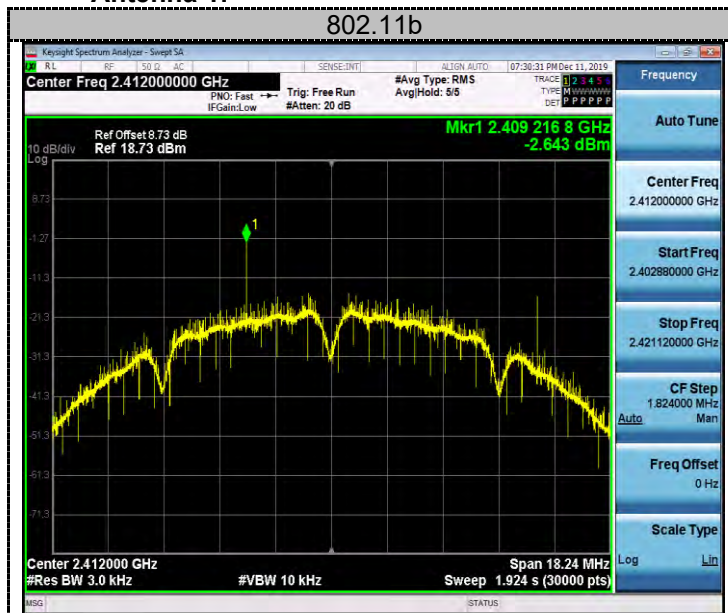


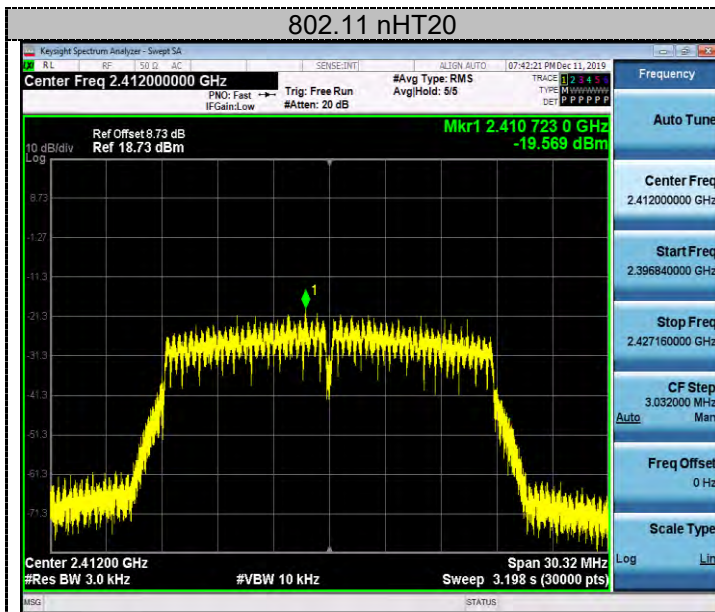


CH01

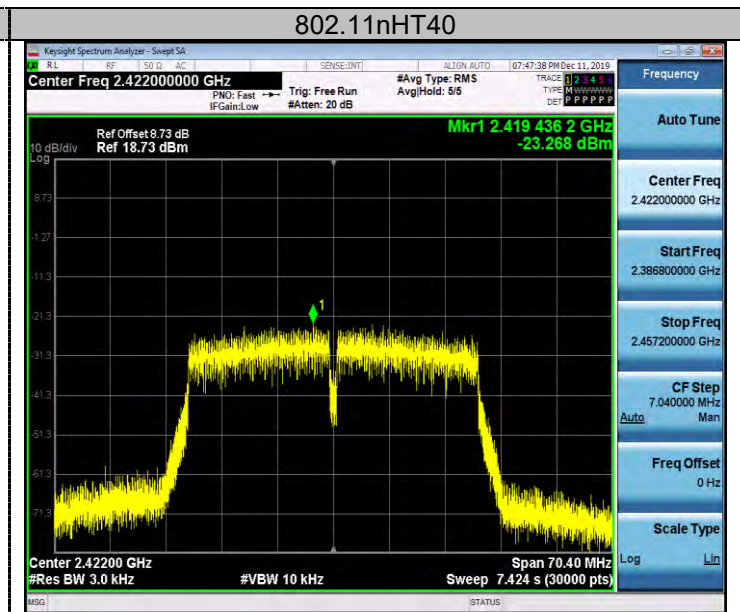


CH03

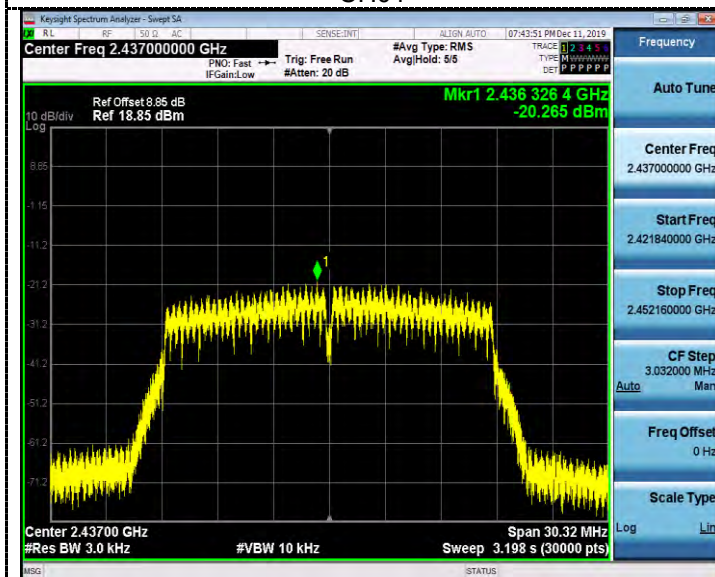


CH06

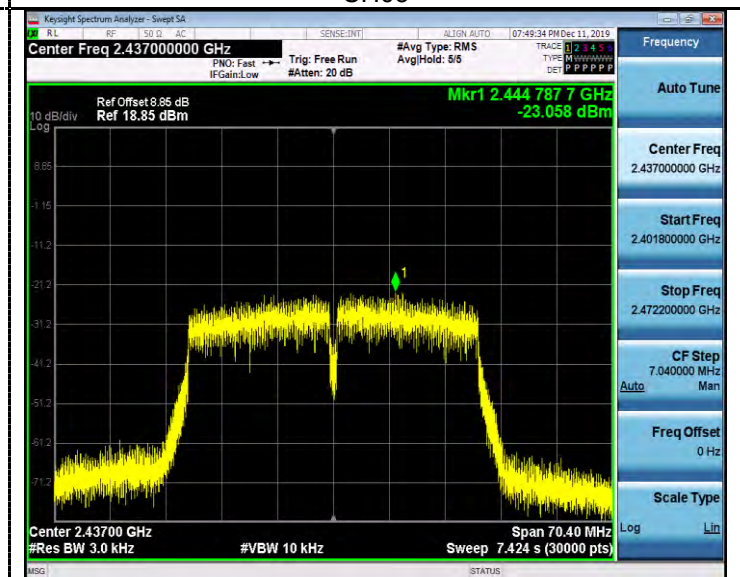

CH06

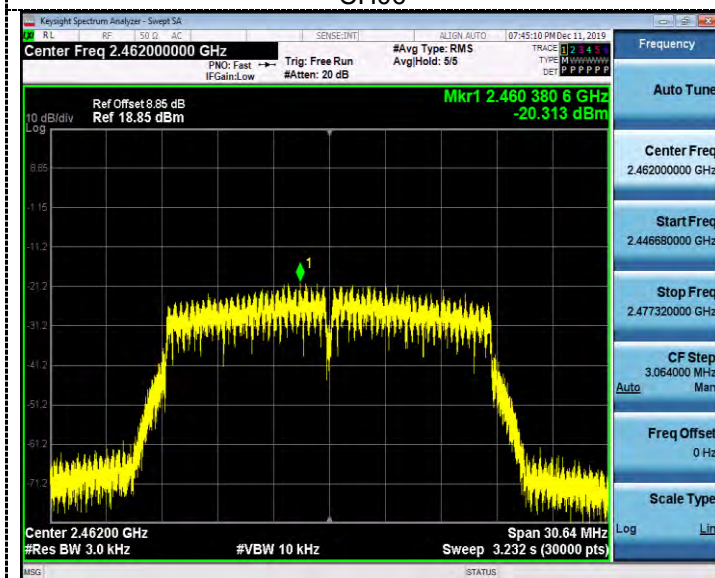


CH11

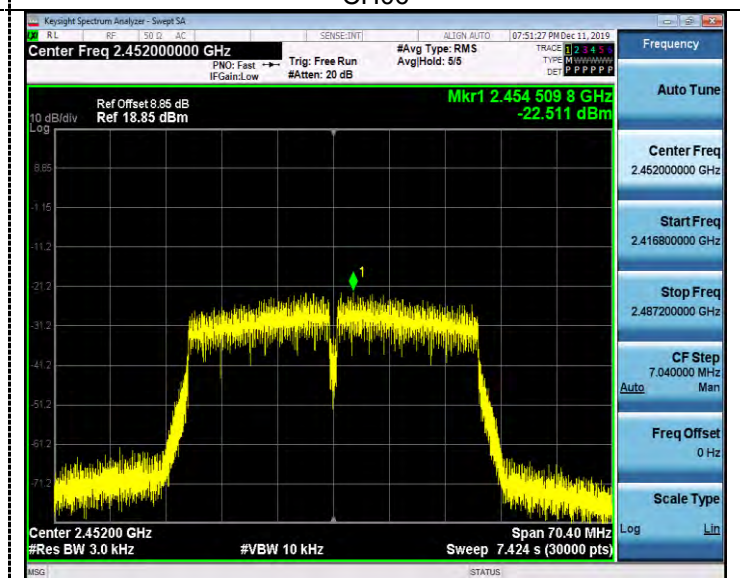

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz.

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

TEST RESULTS


Antenna 0:

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	9.120	≥ 500	Pass
	06	9.120		
	11	9.120		
802.11g	01	13.960	≥ 500	Pass
	06	14.000		
	11	14.440		
802.11nHT20	01	14.800	≥ 500	Pass
	06	15.120		
	11	15.160		
802.11nHT40	03	35.200	≥ 500	Pass
	06	35.200		
	09	35.200		

Antenna 1:

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	9.120	≥ 500	Pass
	06	9.120		
	11	9.120		
802.11g	01	14.760	≥ 500	Pass
	06	15.520		
	11	15.160		
802.11nHT20	01	15.160	≥ 500	Pass
	06	15.160		
	11	15.320		
802.11nHT40	03	35.200	≥ 500	Pass
	06	35.200		
	09	35.200		

Antenna 0:

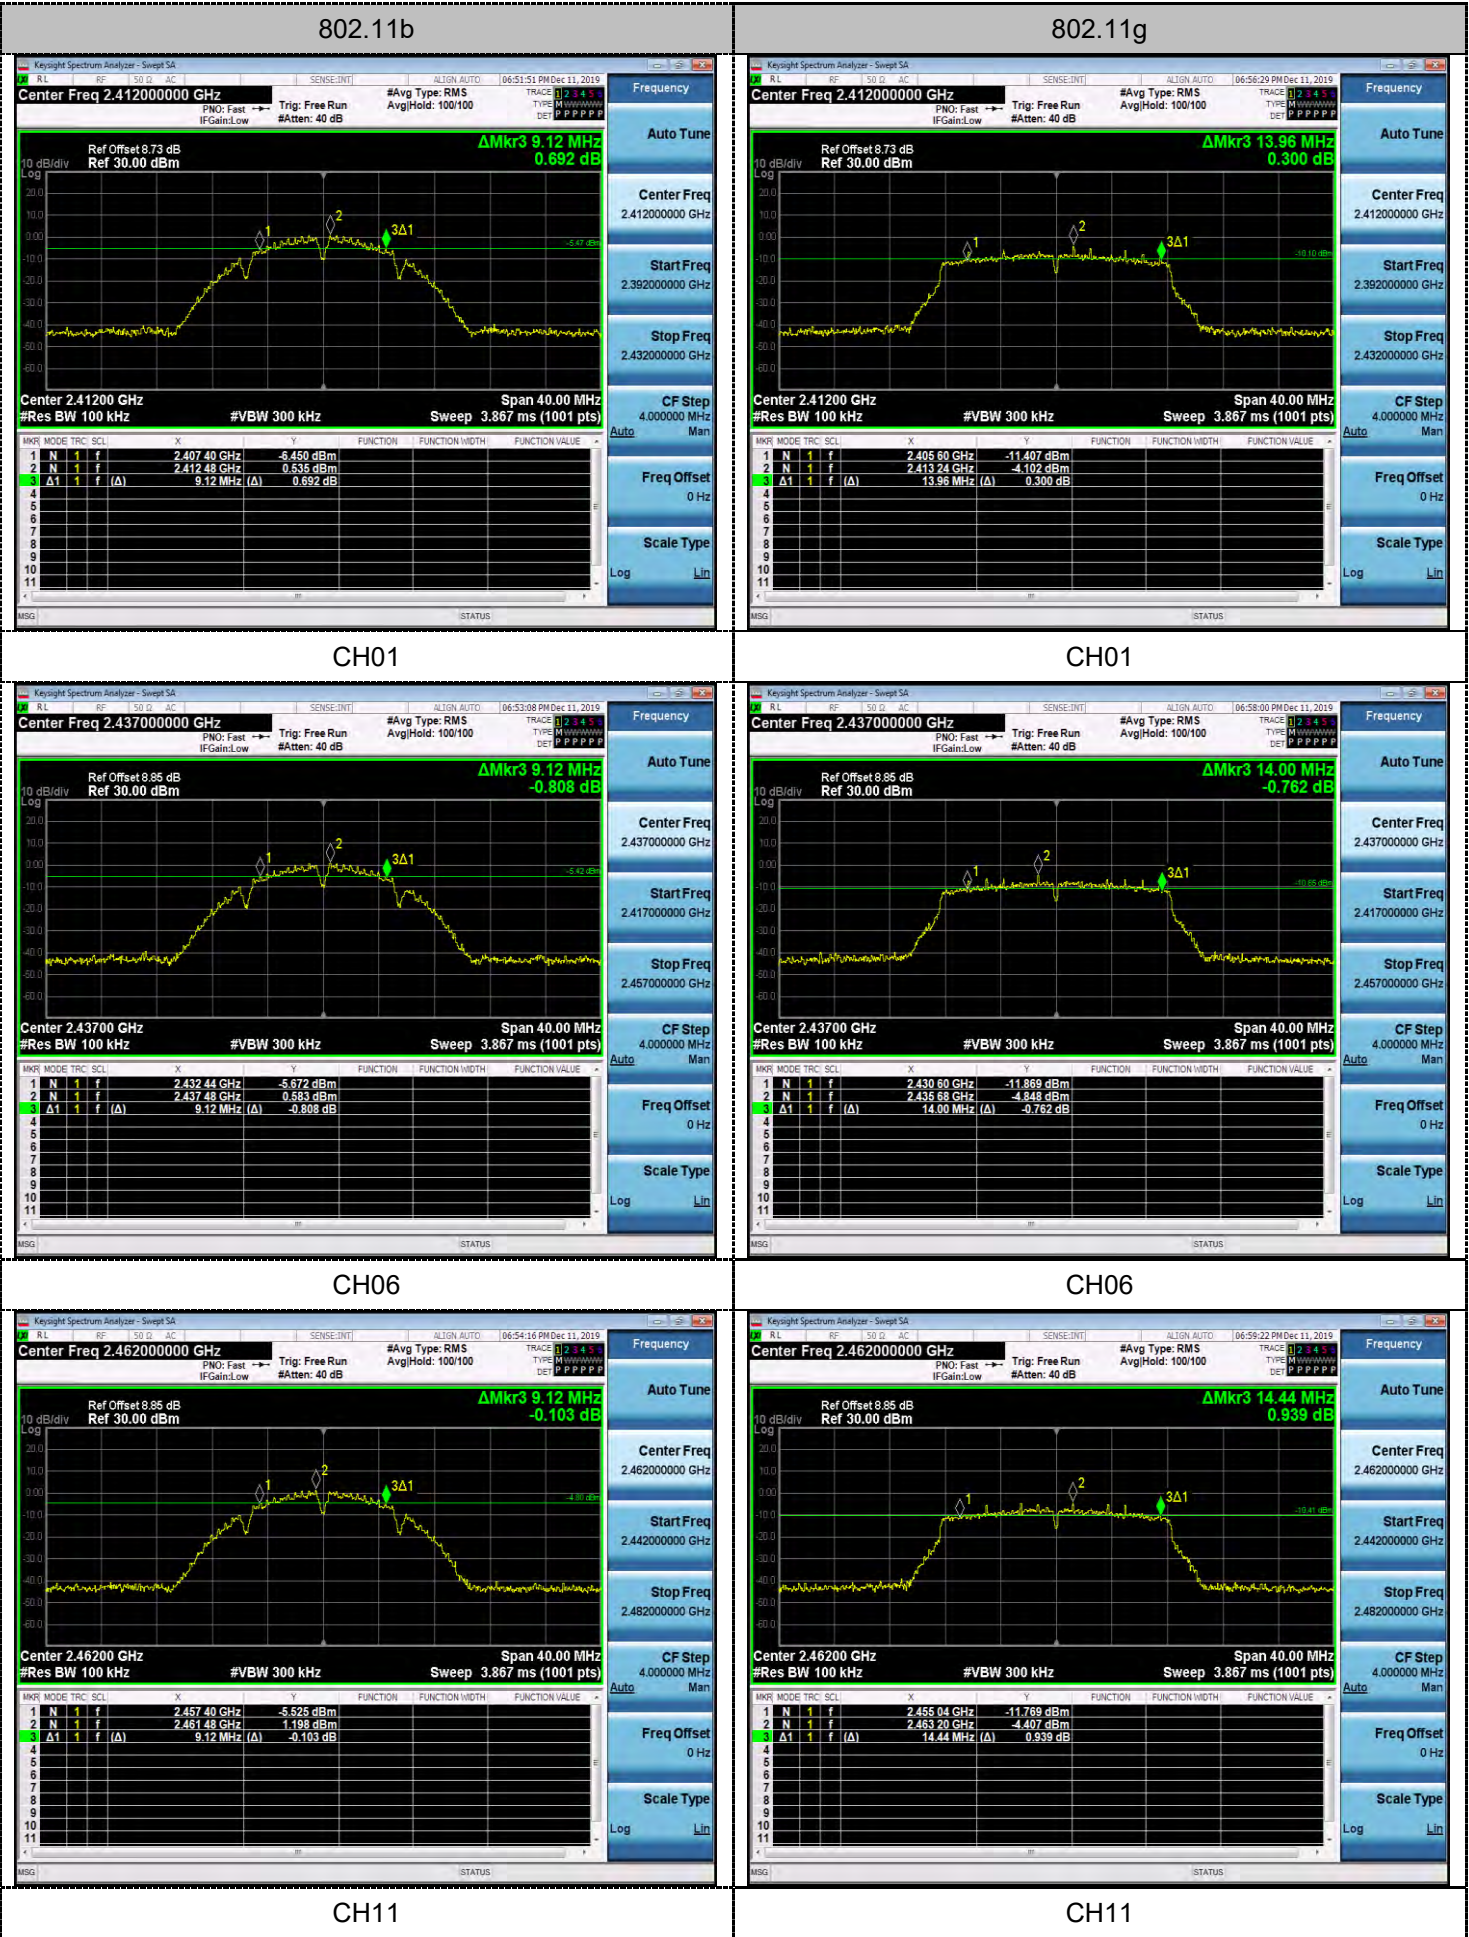

Center Freq 2.437000000 GHz

Ref Offset 8.85 dB

Ref 30.00 dBm

ΔMkr3 14.00 MHz

-0.762 dB

10 dB/div

Log

Center 2.43700 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.867 ms (1001 pts)

CF Step 4.000000 MHz

Man

Auto Tune

Center Freq 2.437000000 GHz

Start Freq 2.417000000 GHz

Stop Freq 2.457000000 GHz

CF Step 4.000000 MHz

Man

Auto

Freq Offset 0 Hz

Scale Type Log

Lin

MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.430 80 GHz	-11.869 dBm			
2	N	1	f	2.435 88 GHz	-4.848 dBm			
3	A1	1	f (Δ)	14.00 MHz (Δ)	-0.762 dB			

CH06

Center Freq 2.462000000 GHz

Ref Offset 8.85 dB

Ref 30.00 dBm

ΔMkr3 9.12 MHz

-0.103 dB

10 dB/div

Log

Center 2.46200 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.867 ms (1001 pts)

CF Step 4.000000 MHz

Man

Auto Tune

Center Freq 2.462000000 GHz

Start Freq 2.442000000 GHz

Stop Freq 2.482000000 GHz

CF Step 4.000000 MHz

Man

Auto

Freq Offset 0 Hz

Scale Type Log

Lin

MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.457 40 GHz	-5.525 dBm			
2	N	1	f	2.461 48 GHz	1.198 dBm			
3	A1	1	f (Δ)	9.12 MHz (Δ)	-0.103 dB			

CH11

Center Freq 2.462000000 GHz

Ref Offset 8.85 dB

Ref 30.00 dBm

ΔMkr3 14.44 MHz

0.939 dB

10 dB/div

Log

Center 2.46200 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 3.867 ms (1001 pts)

CF Step 4.000000 MHz

Man

Auto Tune

Center Freq 2.462000000 GHz

Start Freq 2.442000000 GHz

Stop Freq 2.482000000 GHz

CF Step 4.000000 MHz

Man

Auto

Freq Offset 0 Hz


Scale Type Log

Lin


MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.455 84 GHz	-11.769 dBm			
2	N	1	f	2.463 20 GHz	-4.407 dBm			
3	A1	1	f (Δ)	14.44 MHz (Δ)	0.939 dB			

CH11


802.11n HT20

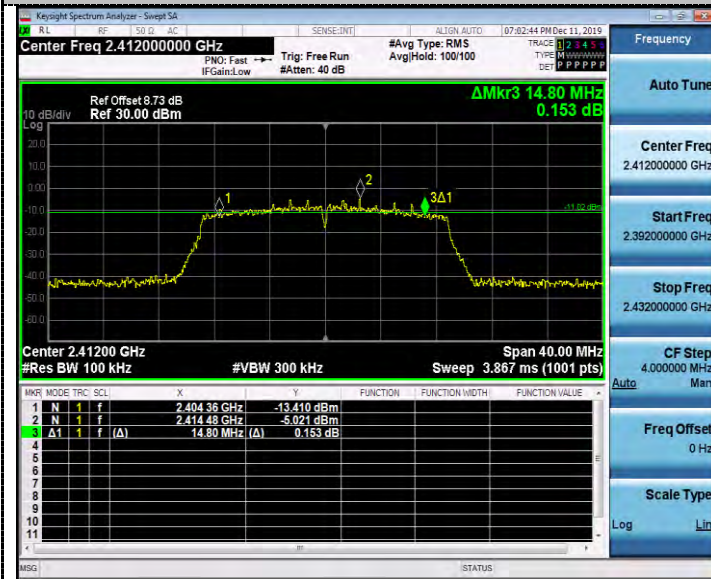

CH01

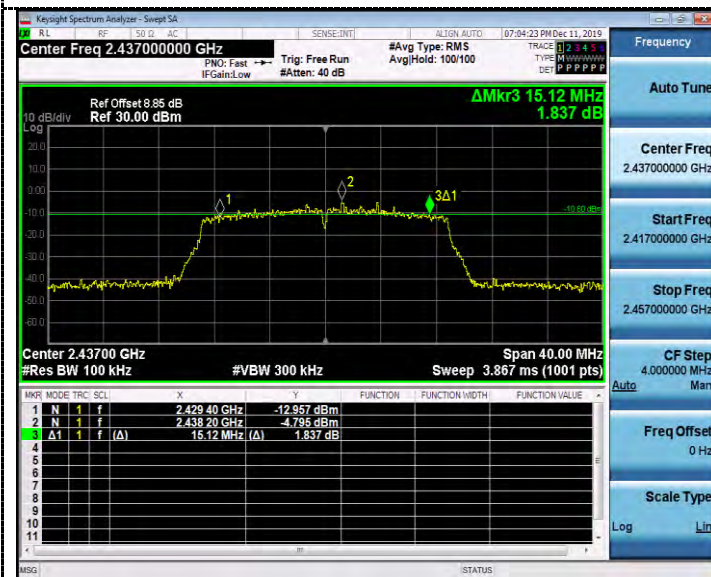


CH06

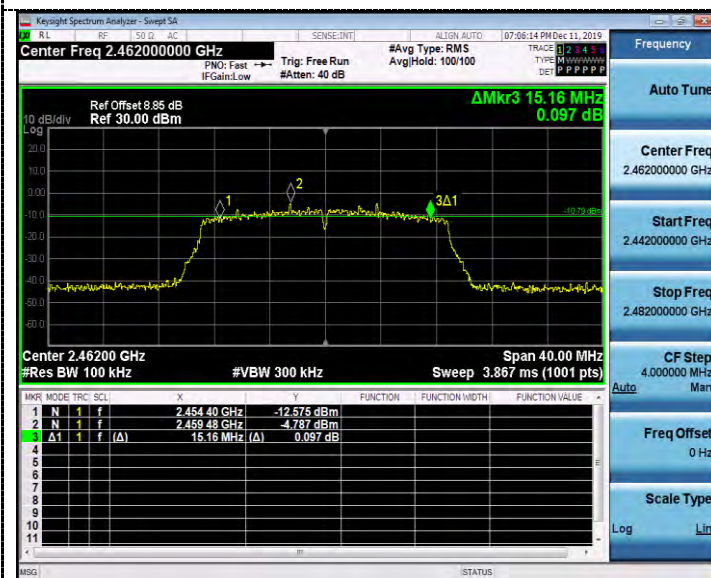


CH11


802.11n HT40

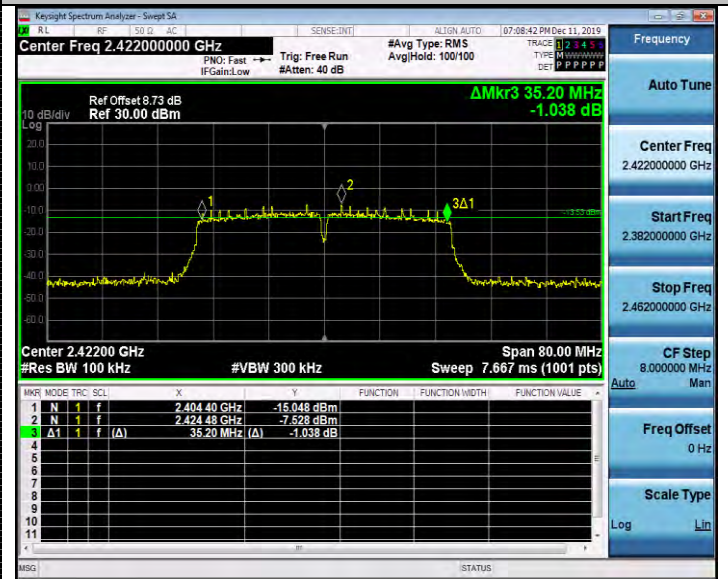

CH03

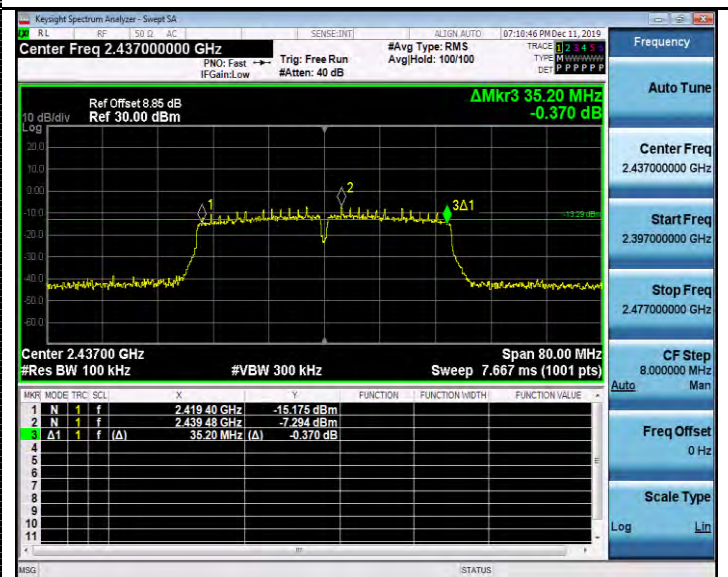


CH06

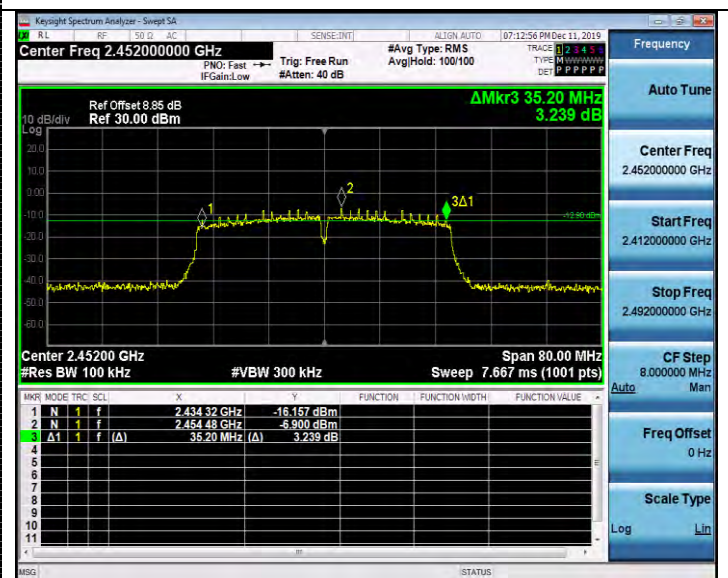


CH09

Antenna 1:

802.11b

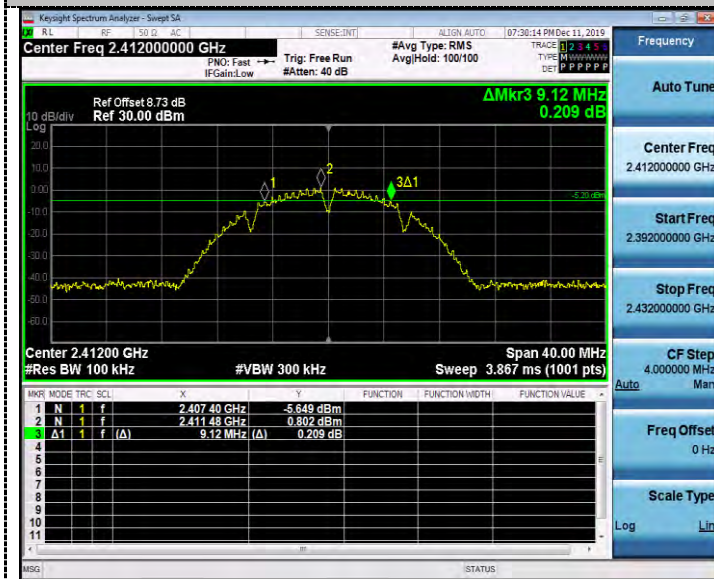

CH01

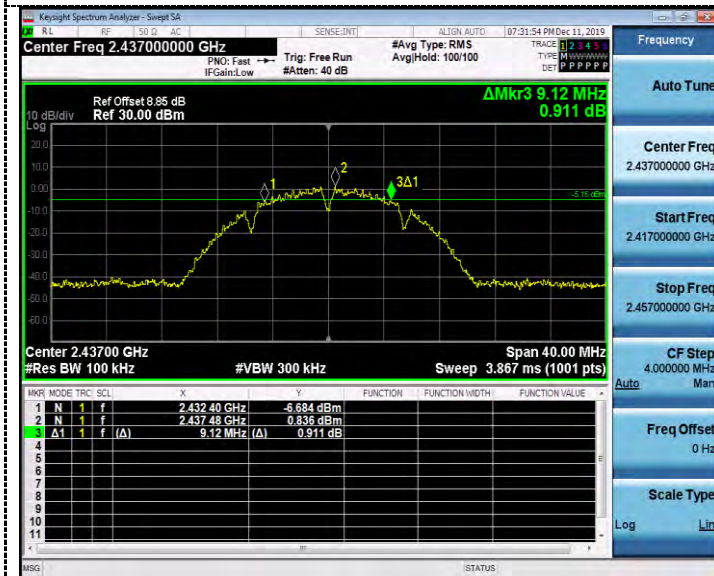


CH06




CH11


802.11g

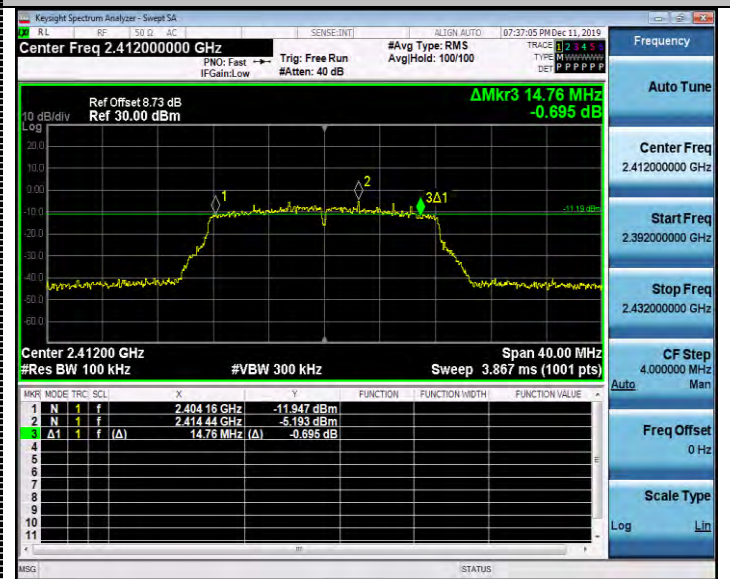



CH01

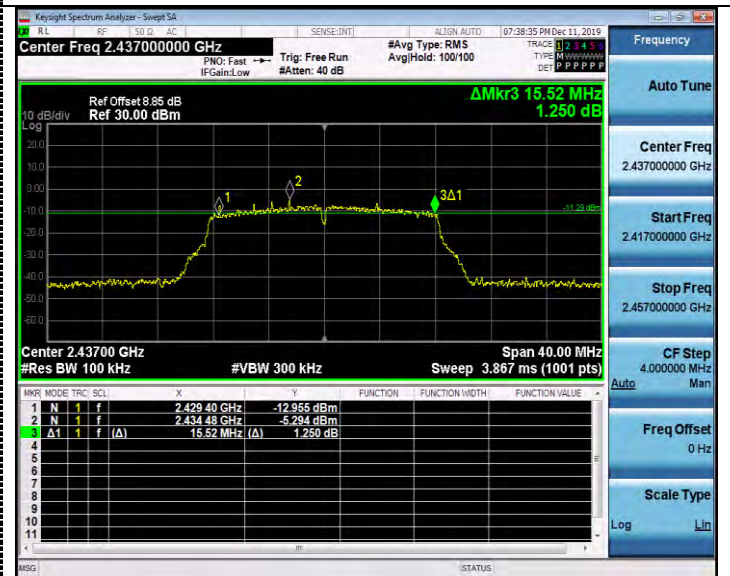

CH06


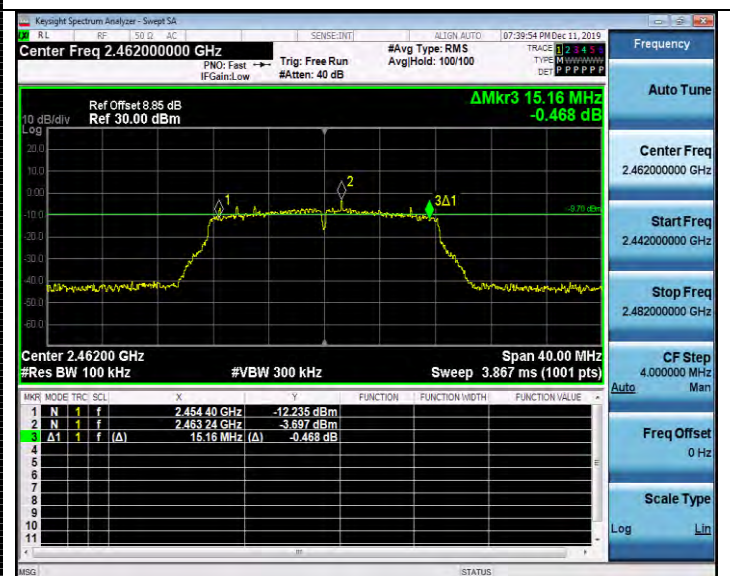


CH11

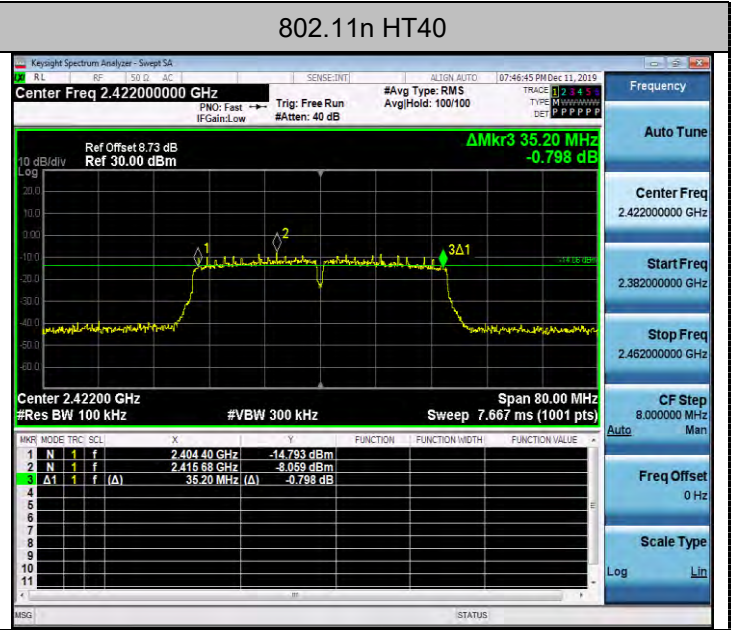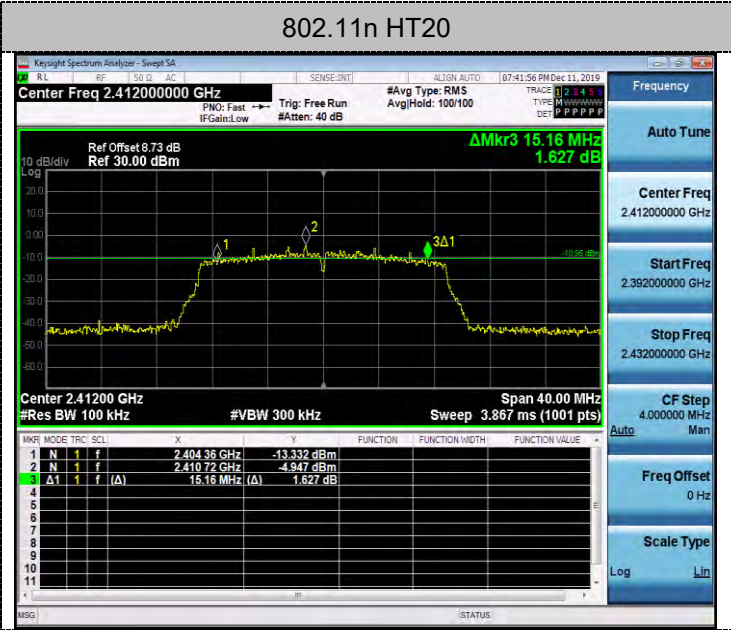



CH01

CH03

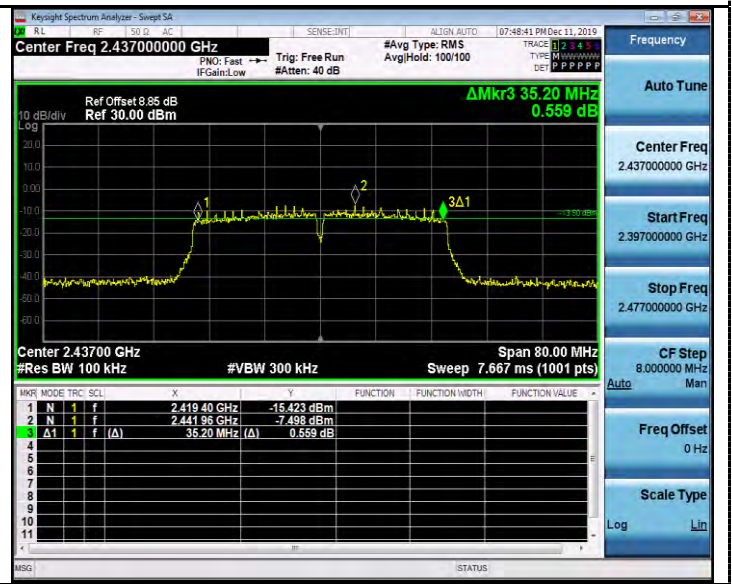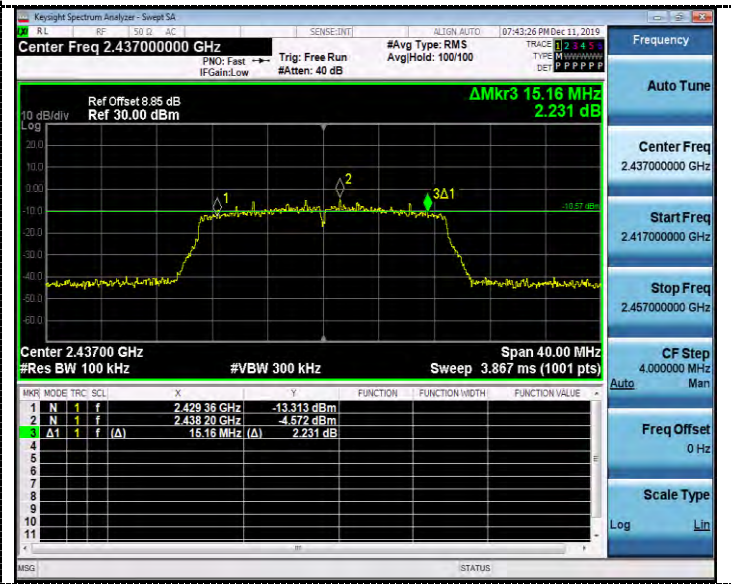

CH06

CH06

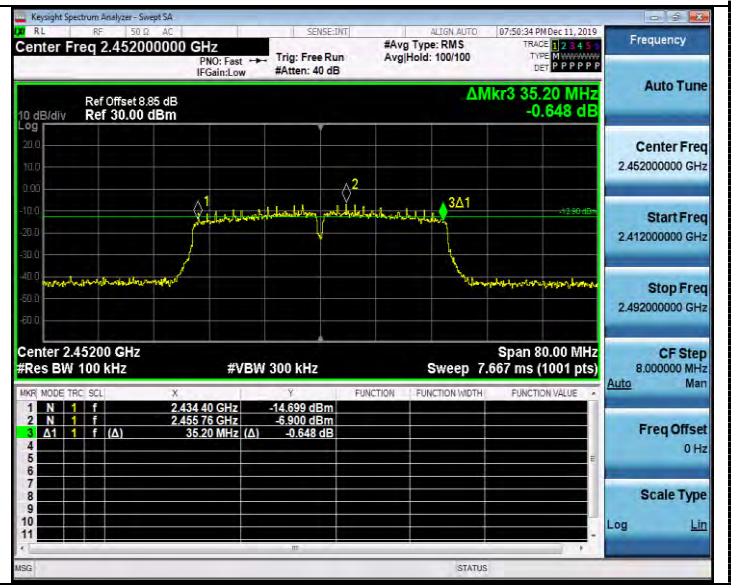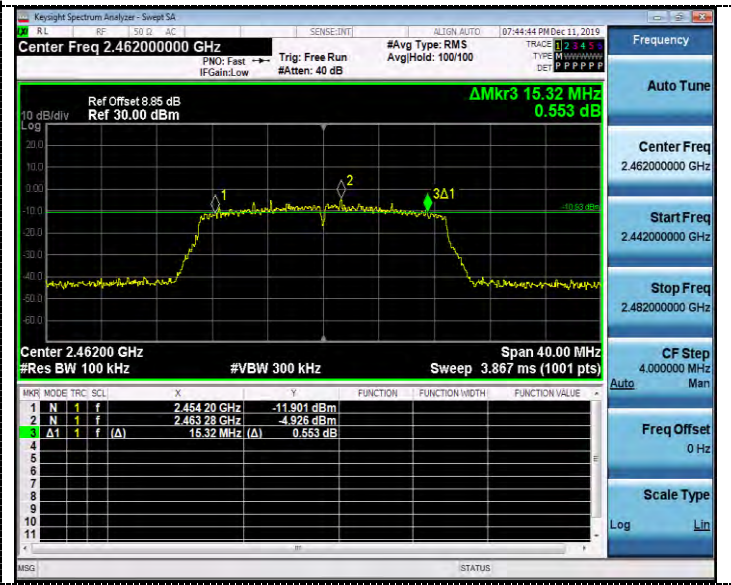

CH11

CH09

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

TEST RESULTS**NOTE:**the worst case was ant 0 and ant 1 operation simultaneously.**4.6.1 For Radiated Bandedge Measurement****802.11b**

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.88	PK	74.00	-28.12	1	124	51.19	27.49	3.32	36.12	-5.31
2390.00	34.62	AV	54.00	-19.38	1	124	39.93	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.26	PK	74.00	-28.74	1	123	50.57	27.49	3.32	36.12	-5.31
2390.00	35.15	AV	54.00	-18.85	1	123	40.46	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.47	PK	74.00	-25.53	1	225	54.19	27.45	3.38	36.55	-5.72
2483.50	35.78	AV	54.00	-18.22	1	225	41.50	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	50.06	PK	74.00	-23.94	1	107	55.78	27.45	3.38	36.55	-5.72
2483.50	36.14	AV	54.00	-17.86	1	107	41.86	27.45	3.38	36.55	-5.72

802.11g

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.74	PK	74.00	-28.26	1	287	51.05	27.49	3.32	36.12	-5.31
2390.00	34.72	AV	54.00	-19.28	1	287	40.03	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.60	PK	74.00	-27.40	1	234	51.91	27.49	3.32	36.12	-5.31
2390.00	33.81	AV	54.00	-20.19	1	234	39.12	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.80	PK	74.00	-25.20	1	113	54.52	27.45	3.38	36.55	-5.72
2483.50	35.65	AV	54.00	-18.35	1	113	41.37	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	49.43	PK	74.00	-24.57	1	208	55.15	27.45	3.38	36.55	-5.72
2483.50	35.35	AV	54.00	-18.65	1	208	41.07	27.45	3.38	36.55	-5.72


802.11n HT20

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.03	PK	74.00	-27.97	1	177	51.34	27.49	3.32	36.12	-5.31
2390.00	34.43	AV	54.00	-19.57	1	177	39.74	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.79	PK	74.00	-27.21	1	115	52.10	27.49	3.32	36.12	-5.31
2390.00	34.18	AV	54.00	-19.82	1	115	39.49	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.18	PK	74.00	-25.82	1	215	53.90	27.45	3.38	36.55	-5.72
2483.50	35.49	AV	54.00	-18.51	1	215	41.21	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	49.19	PK	74.00	-24.81	1	168	54.91	27.45	3.38	36.55	-5.72
2483.50	35.29	AV	54.00	-18.71	1	168	41.01	27.45	3.38	36.55	-5.72

802.11n HT40

Frequency(MHz):			2422			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.13	PK	74.00	-27.87	1	143	51.44	27.49	3.32	36.12	-5.31
2390.00	35.08	AV	54.00	-18.92	1	143	40.39	27.49	3.32	36.12	-5.31
Frequency(MHz):			2422			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.42	PK	74.00	-28.58	1	273	50.73	27.49	3.32	36.12	-5.31
2390.00	33.92	AV	54.00	-20.08	1	273	39.23	27.49	3.32	36.12	-5.31
Frequency(MHz):			2452			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.37	PK	74.00	-25.63	1	228	54.09	27.45	3.38	36.55	-5.72
2483.50	36.74	AV	54.00	-17.26	1	228	42.46	27.45	3.38	36.55	-5.72
Frequency(MHz):			2452			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.60	PK	74.00	-25.40	1	196	54.32	27.45	3.38	36.55	-5.72
2483.50	36.06	AV	54.00	-17.94	1	196	41.78	27.45	3.38	36.55	-5.72


4.6.2 For Conducted Bandedge Measurement
Antenna 0:

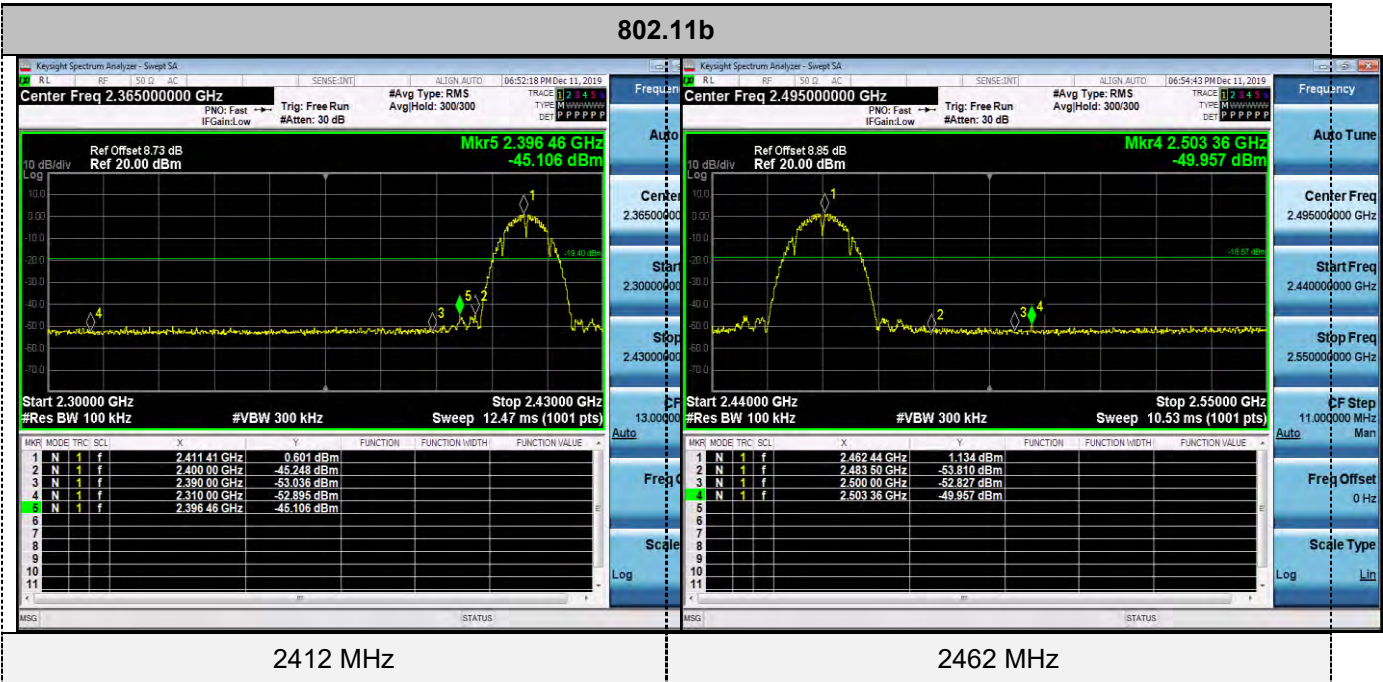



802.11n HT20





802.11n HT40

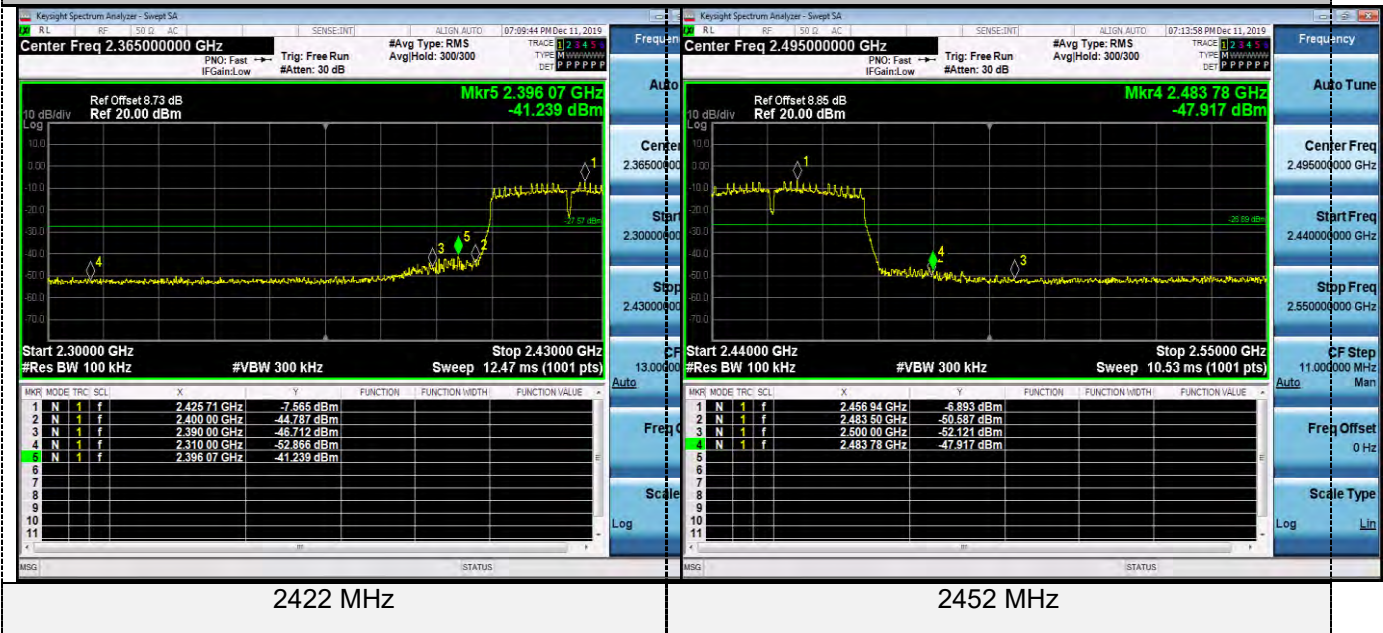

Antenna 1:

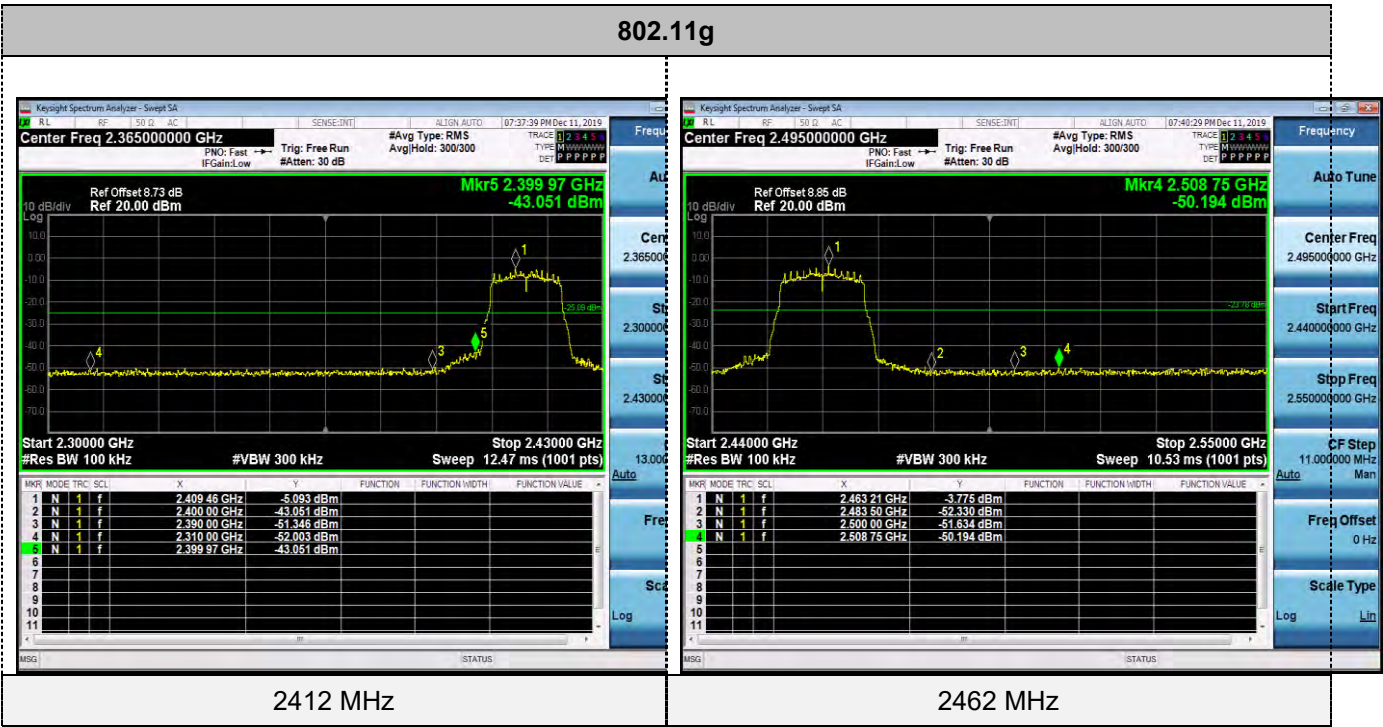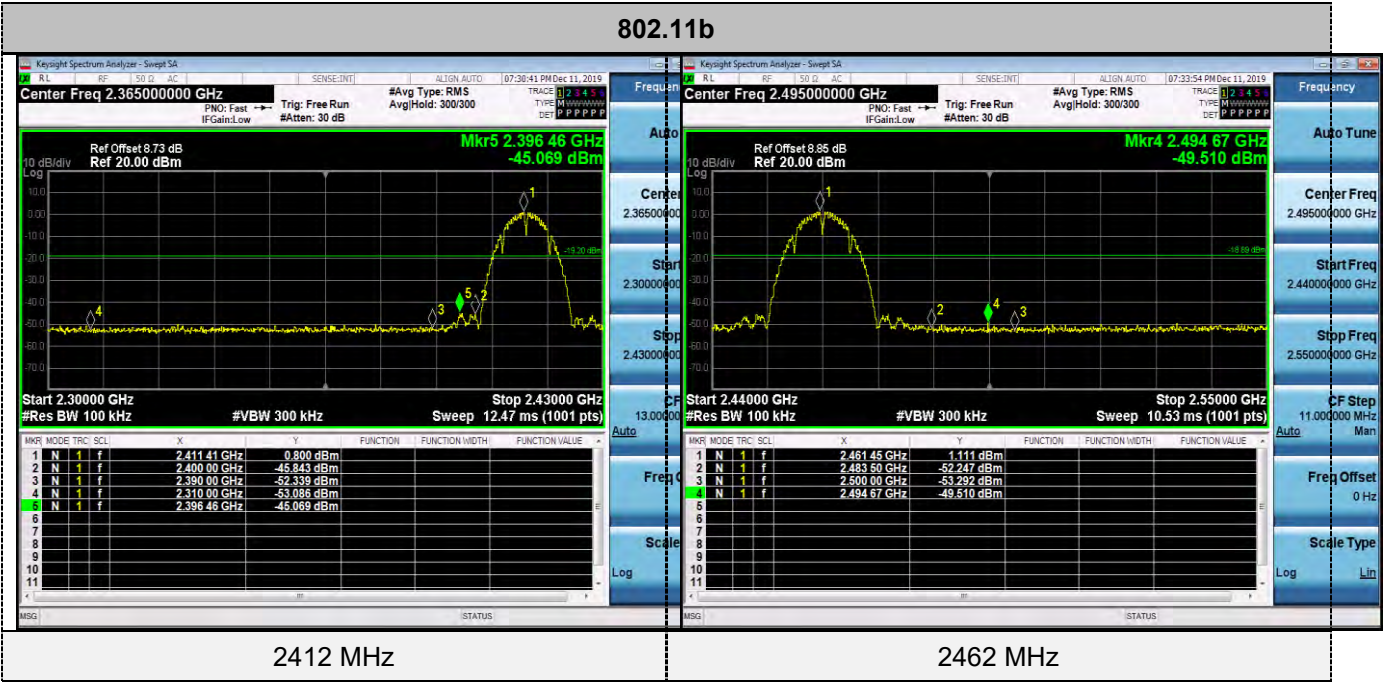

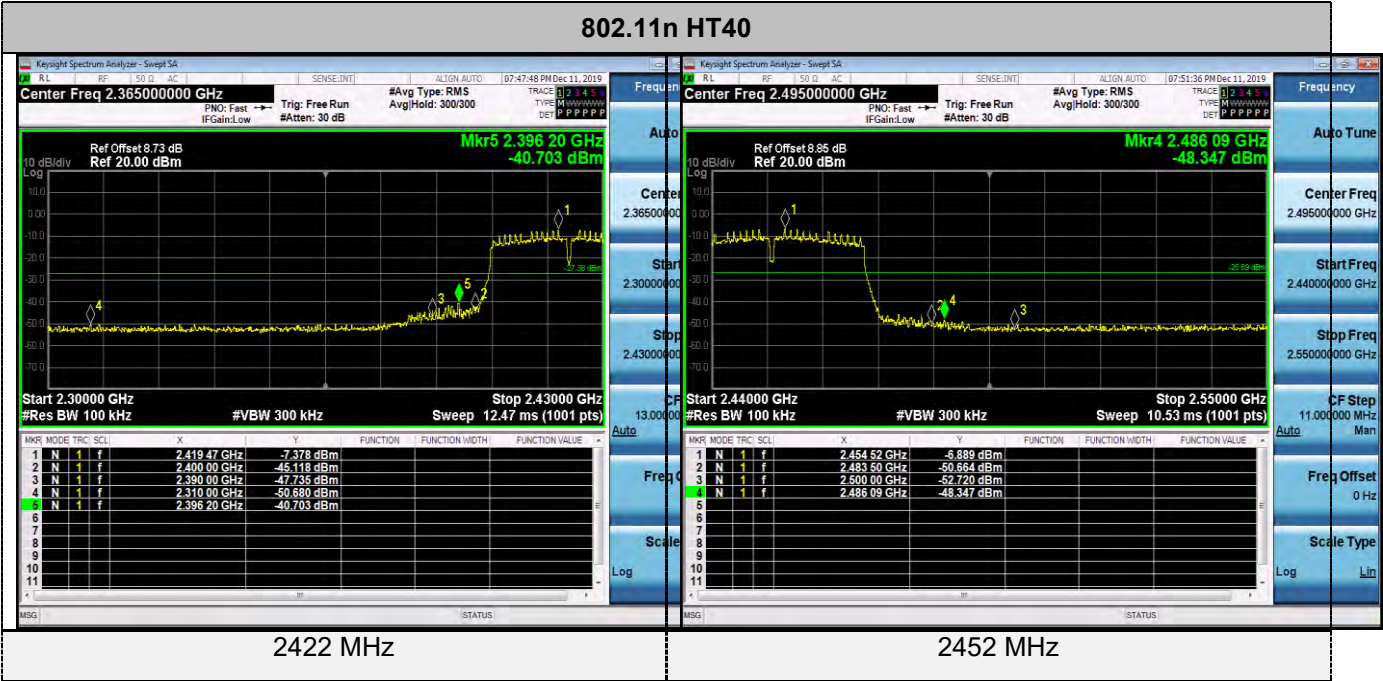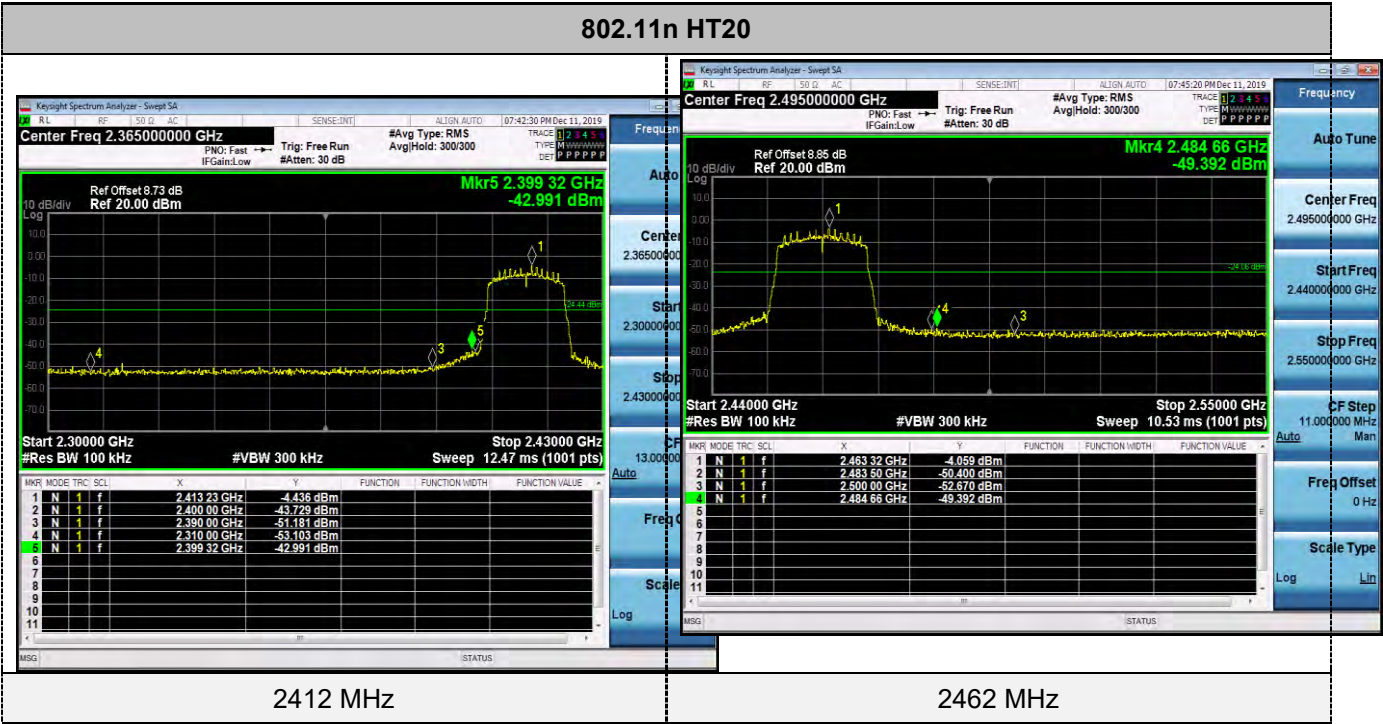

4.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is FPC antenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 5.0dBi.

Reference to the Test Report: **GTS20191209008-1-9**

5. TEST SETUP PHOTOS OF THE EUT

Reference to the TEST SETUP PHOTOS

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the EXTERNAL AND INTERNAL PHOTOS

.....**End of Report**.....