

SPECIFICATION FOR APPROVAL

CUSTOMER/PROJECT: **X SOLAX**

CUSTOMER P.N: **311601001800**

PRODUCT NAME: **WIFI ANT**

MODEL NO: **4S001A**

SUPPLIER AUTHORIZED SIGNATURE		
PREPARED	CHECKED	APPROVED
Jenny	Steven	Alex

CUSTOMER AUTHORIZED SIGNATURE			
PM	Jenny	QE	sun

Please return to us one copy of "SPECIFICATION FOR APPROVAL" with your approved signature.

**ADD: No.358 Liuyuan RD., Baoshan Urban Industrial
District., Shanghai, PR.China.**

TEL: +86-21-66276925(26/29/35) - 615

Content

content	1
1 Noun explanation	4
2 Test equipment	4
3 Working frequency band	4
4 Test project	5
4.1 VSWR plot	5
4.2 Simth plot	5
4.3 Radiation pattern	5
4.4 Gain & Efficiency	5
5 Antenna parameter	5
5.1 VSWR	5
5.1.1 VSWR plot	5
5.1.2 VSWR data	6
5.2 Simth plot	6
5.3 Radiation pattern	7
5.3.1 H-plane	7
5.3.2 E-plane	8-9
5.4 UGain & Efficiency	10
6 Environmental treatment suggestions	10
7 Impedance matching	10
8 Antenna plan	11
8.1 Antenna dimensional drawing	11
8.2 Coaxical cable length drawing	11



8.3 Connector drawing.....	11
9 Antenna installation guide.....	12
9.1 Antenna installation instructions.....	12
9.2 Coaxical routing	12
10 Other.....	12

1 Noun explanation

dBi	Decibel relative isotropic antenna
Tx	Transmit frequency
Rx	Receive frequency
TRP	Total Radiated Power
TIS	Total Isotropic Sensitivity
VSWR	Voltage Standing Wave Ratio
GSM	Global Service for Mobile communication
DCS	Digital Communication System
CDMA	Code Division Multiple Access
WCDMA	Wideband Code Division Multiple Access

2 Test equipment

network analyzer
Agilent8960
SATIMO64 chamber

3 Working frequency band

The yellow Identification is the using band

Band	
(2. 4G)	2400MHz~2500MHz
5. 8G	5150MHz~5850MHz

4 Test project

4.1 VSWR plot

4.2 Smith plot

4.3 Radiation pattern


4.4 Gain & Efficiency

4.5 TRP&TIS

5 Antenna parameter

5.1 VSWR

5.1.1 VSWR plot

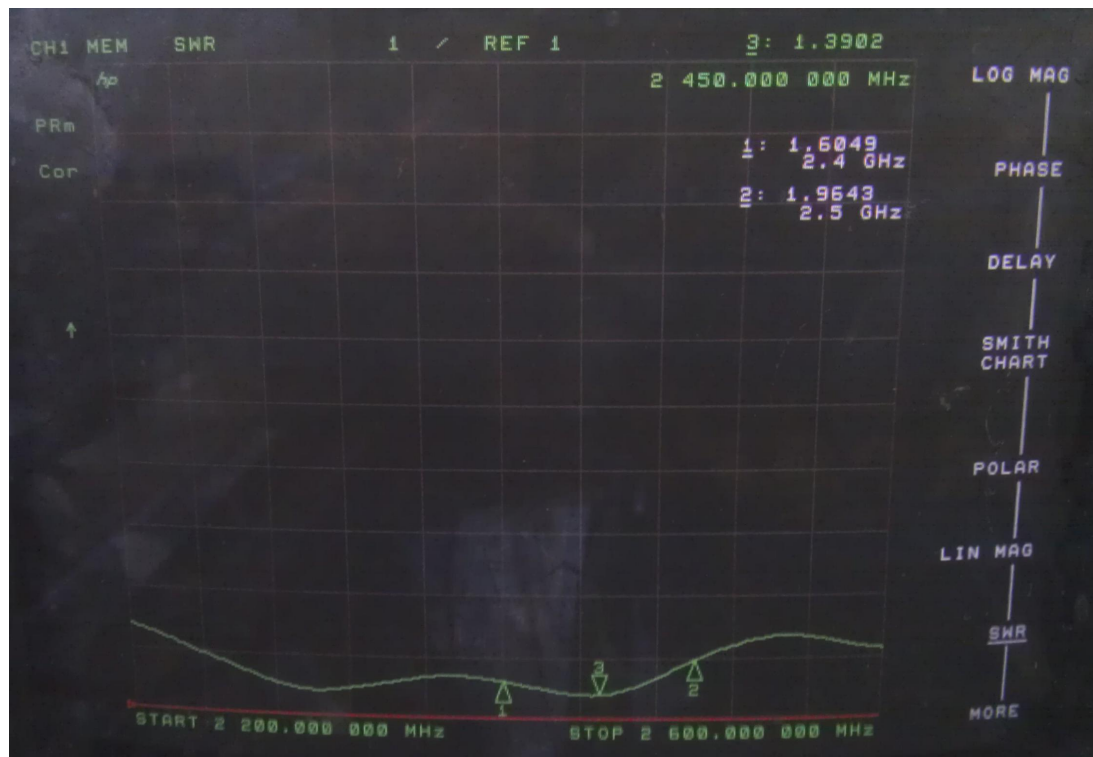

5.1.2 VSWR data


Freq/MHz	2400	2500
VSWR	1.6	1.9

5.2 Smith plot




5.3 Radiation pattern

5.3.1 H-plane

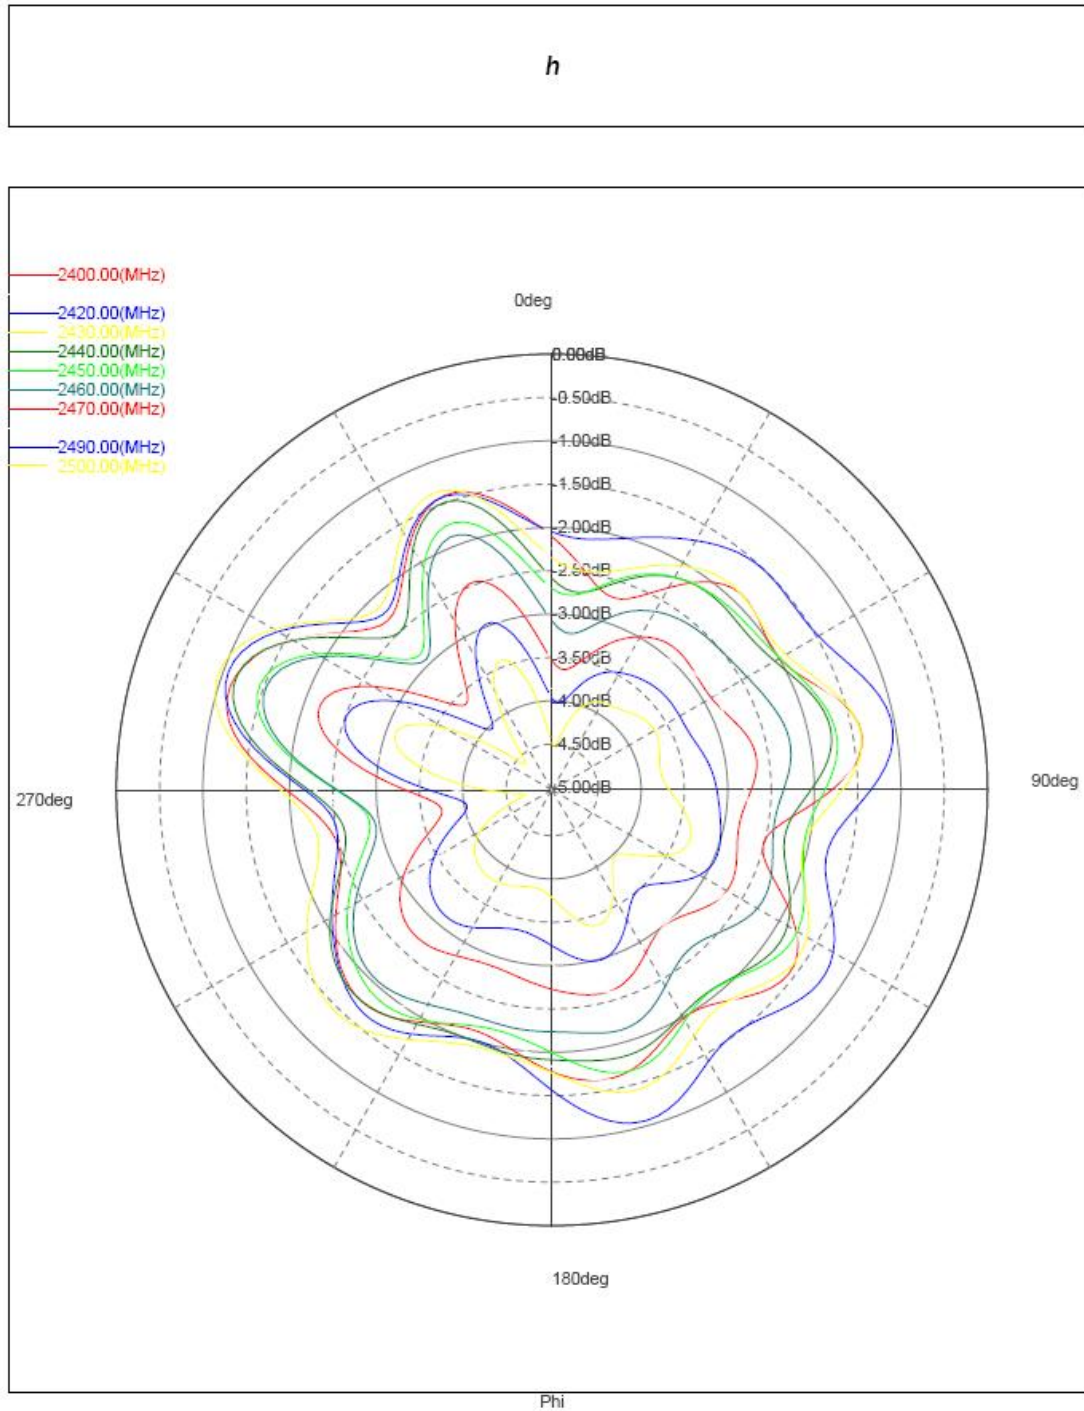


5.3.2 E-plane

E1

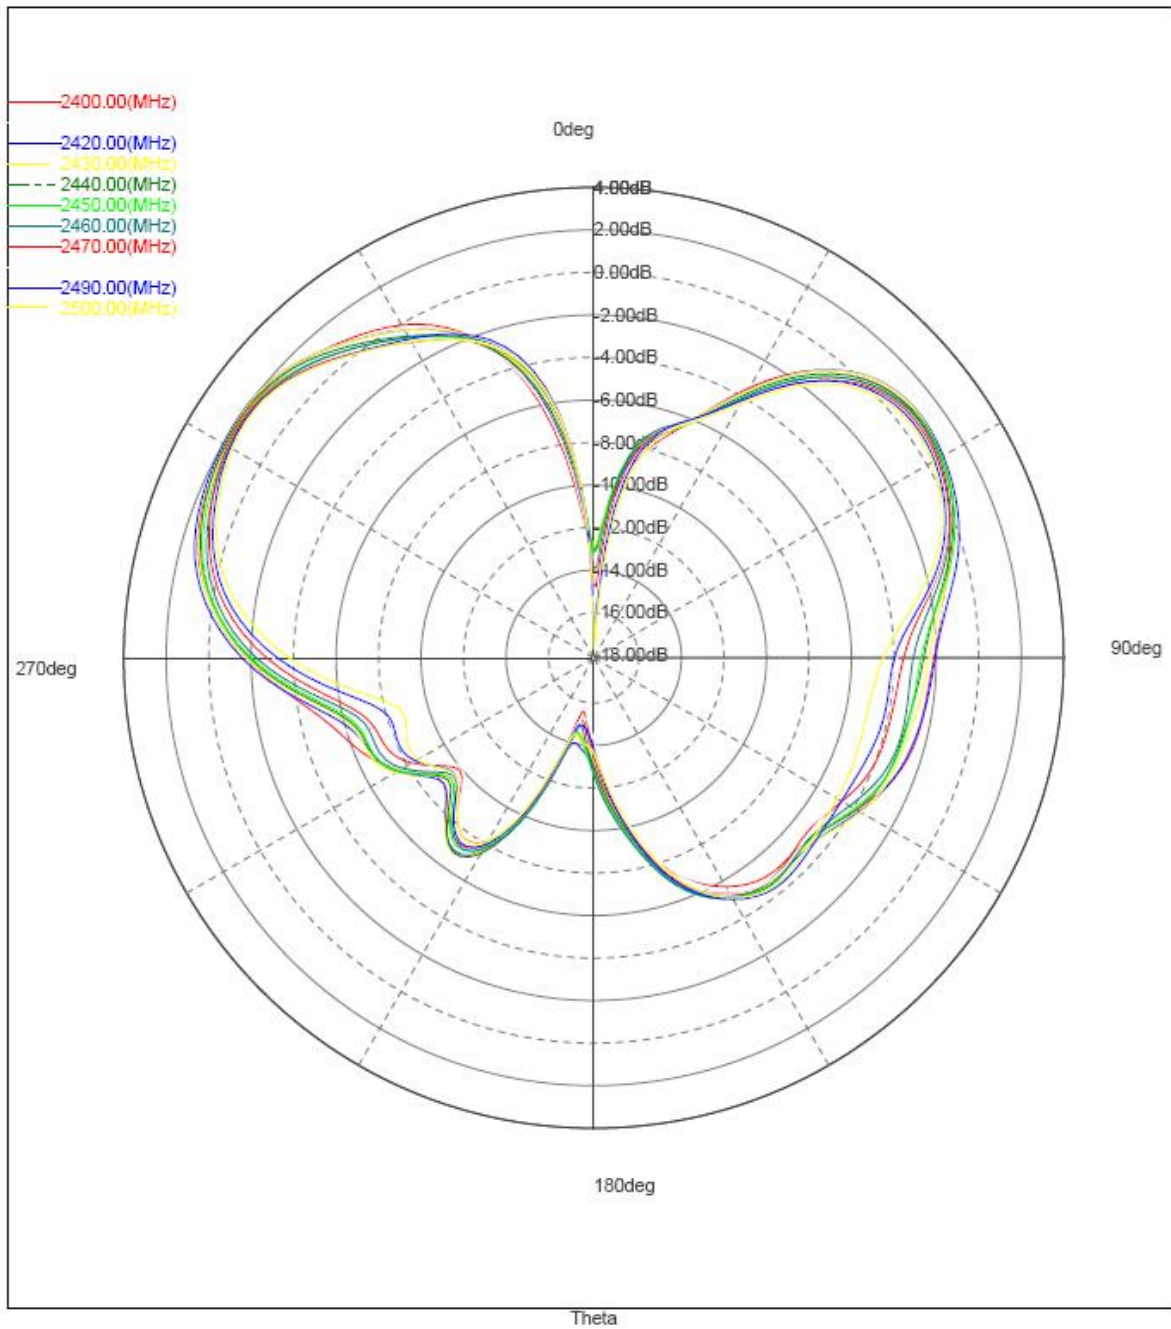

E2

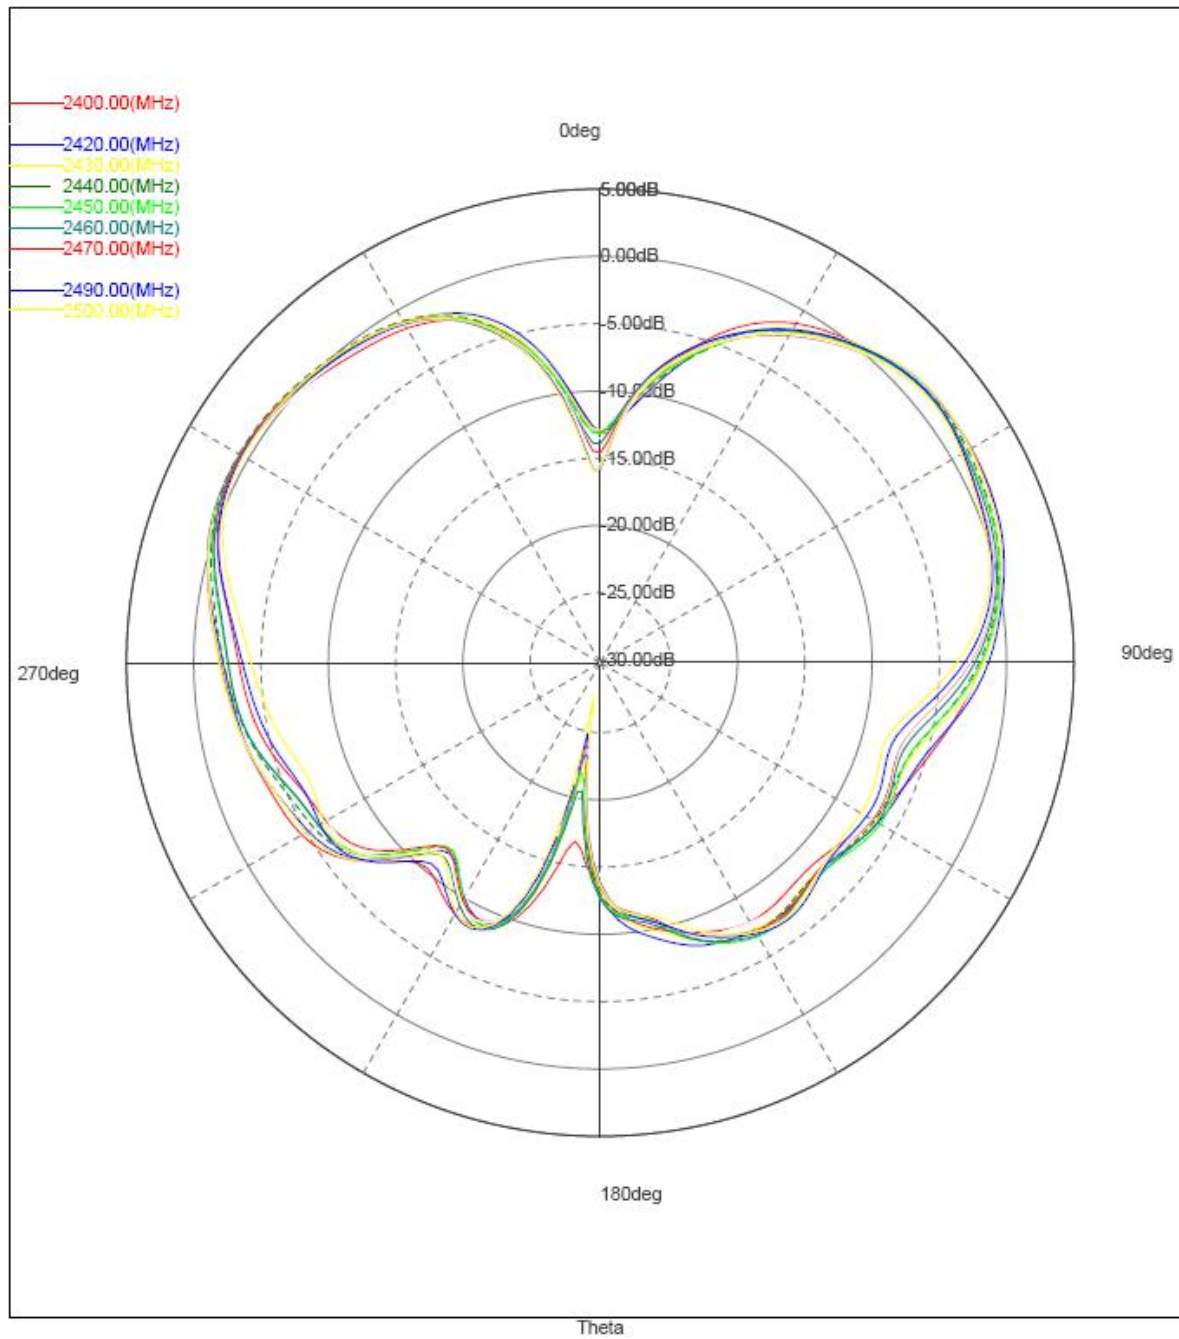

5.4 UGain & Efficiency

Frequency [Hz]	Efficiency	Gain [dBi]
2.4E+09	66%	3.082669
2.41E+09	65%	3.02835
2.42E+09	68%	3.152057
2.43E+09	67%	3.249786
2.44E+09	64%	2.917737
2.45E+09	63%	2.803774
2.46E+09	62%	2.819249
2.47E+09	58%	2.563009
2.48E+09	56%	2.334871
2.49E+09	57%	2.515357
2.5E+09	54%	2.185912

6 Environmental treatment suggestions

Environment does not need treatment

7 Impedance matching

The matching circuit has not been changed

8 Antenna plan

Notes:

1. no bad appearance
2. with * size for the key size.
3. of all related materials and processing technology to meet the requirements of ROHS.

RG174 (BLACK)
1500mm

SMA Male

Black Tube

110

27

81

Shanghai Jiesoncom Communication Engineering Co., Ltd

2013.12.08

9 Antenna installation guide

9.1 Antenna installation instructions



10 Other