



Radio Test Report

C9120AXE-x
(x = A, B, N, T)

FCC ID: LDKEDAC92157
IC: 2461N-EDAC92157

Wi-Fi/Chillwave 2412-2462 MHz
BLE 2402MHz – 2480MHz

Against the following Specifications:

FCC Part 15.247; LP0002 (2018);
RSS-247 Issue 2, Feb 2017;
RSS-Gen Issue 5, Feb 2019



Cisco Systems
170 West Tasman Drive
San Jose, CA 95134

| | |
|---|--|
| | |
| Author: Allan Beecroft Tested By: Allan Beecroft | Approved By: Gerard Thorpe Title: Manager. MGMT-Engineering |
| Revision: 1.1 | Issue Date: 12-AUG-2020 |

This report replaces any previously entered test report under EDCS – 19928416. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 703456.



| | |
|--|-----------|
| SECTION 1: OVERVIEW | 3 |
| 1.1 TEST SUMMARY..... | 3 |
| SECTION 2: ASSESSMENT INFORMATION | 4 |
| 2.1 GENERAL | 4 |
| 2.2 UNITS OF MEASUREMENT | 4 |
| 2.3 DATE OF TESTING (INITIAL SAMPLE RECEIPT DATE TO LAST DATE OF TESTING) | 6 |
| 2.4 REPORT ISSUE DATE | 6 |
| 2.5 TESTING FACILITIES..... | 6 |
| 2.6 EQUIPMENT ASSESSED (EUT) | 7 |
| 2.7 EUT DESCRIPTION..... | 7 |
| SECTION 3: RESULT SUMMARY..... | 8 |
| 3.1 RESULTS SUMMARY TABLE | 8 |
| SECTION 4: SAMPLE DETAILS..... | 9 |
| 4.1 SAMPLE DETAILS..... | 9 |
| 4.2 SYSTEM DETAILS..... | 9 |
| 4.3 MODE OF OPERATION DETAILS | 9 |
| 4.4 SOFTWARE IMAGE..... | 9 |
| APPENDIX A: EMISSION TEST RESULTS (2.4GHZ WI-FI & CHILLWAVE)..... | 10 |
| RADIATED EMISSION SETUP DIAGRAM-BELOW 1G..... | 10 |
| A.1 RADIATED SPURIOUS EMISSIONS 1GHz – 26.5GHz | 11 |
| A.2 RADIATED EMISSIONS 30MHZ TO 1GHZ..... | 26 |
| APPENDIX B: EMISSION TEST RESULTS (BLE)..... | 28 |
| RADIATED EMISSION SETUP DIAGRAM-BELOW 1G..... | 28 |
| B.1 RADIATED SPURIOUS EMISSIONS 1GHz – 26.5GHz | 29 |
| B.2 RADIATED EMISSIONS 30MHZ TO 1GHZ..... | 44 |
| APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST..... | 46 |
| APPENDIX D: ABBREVIATION KEY AND DEFINITIONS | 48 |
| APPENDIX E: PHOTOGRAPHS OF TEST SETUPS | 49 |
| APPENDIX F: SOFTWARE USED TO PERFORM TESTING | 49 |
| APPENDIX G: TEST PROCEDURES | 49 |
| APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01)..... | 49 |
| APPENDIX I: TEST ASSESSMENT PLAN | 49 |



Section 1: Overview

1.1 Test Summary

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| Specifications |
|---|
| FCC Part 15.247; LP0002 (2018); RSS-247 Issue 2, Feb 2017; RSS-Gen Issue 5, Feb 2019 |

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Radio Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature 15°C to 35°C (54°F to 95°F)

Atmospheric Pressure 860mbar to 1060mbar (25.4" to 31.3")

Humidity 10% to 75*%

1.All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)

2.2 Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

Emission level [dBuV] = Indicated voltage level [dBuV] + Cable Loss [dB] + Other correction factors [dB]

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

Level in uV/m = Common Antilogarithm [(X dBuV/m)/20] = Y uV/m



Measurement Uncertainty Values

| | |
|-----------------------------------|-------------------------|
| voltage and power measurements | ± 2 dB |
| conducted EIRP measurements | ± 1.4 dB |
| radiated measurements | ± 3.2 dB |
| frequency measurements | $\pm 2.4 \cdot 10^{-7}$ |
| temperature measurements | $\pm 0.54^\circ$ |
| humidity measurements | $\pm 2.3\%$ |
| DC and low frequency measurements | $\pm 2.5\%$ |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

| | |
|--------------------|------------|
| 30 MHz - 300 MHz | +/- 3.8 dB |
| 300 MHz - 1000 MHz | +/- 4.3 dB |
| 1 GHz - 10 GHz | +/- 4.0 dB |
| 10 GHz - 18GHz | +/- 8.2 dB |
| 18GHz - 26.5GHz | +/- 4.1 dB |
| 26.5GHz - 40GHz | +/- 3.9 dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

| | |
|----------------|-------------|
| 30 MHz – 40GHz | +/- 0.38 dB |
|----------------|-------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

**2.3 Date of testing (initial sample receipt date to last date of testing)**

02-JUL-2020 to 09-JUL-2020

2.4 Report Issue Date

See cover page.

2.5 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134
USA

Registration Numbers for ISED (Innovation, Science and Economic Development Canada)

| Cisco System Site | Address | Site Identifier |
|-------------------------|--|--------------------|
| Building P, 10m Chamber | 125 West Tasman Dr San Jose, CA 95134 United States | Company #: 2461N-2 |
| Building P, 5m Chamber | 125 West Tasman Dr San Jose, CA 95134 United States | Company #: 2461N-1 |
| Building I, 5m Chamber | 285 W. Tasman Drive San Jose, California 95134 United States | Company #: 2461M-1 |
| Building 7, 5m Chamber | 425 E. Tasman Drive San Jose, California 95134 United States | Company #: 2461N-3 |

Test Engineers

Allan Beecroft



2.6 Equipment Assessed (EUT)

Model: C9120AXE-A, V04

2.7 EUT Description

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes. Data is recorded at the lowest supported data rate for each mode. This report covers operation on channel 1-11.

802.11g - Non HT20, One Antenna, 6 to 54 Mbps

The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

| Frequency | Part Number | Antenna Type | Antenna Gain (dBi) |
|---------------|-------------------|---|--------------------------|
| -E SKU | | | |
| 2.4GHz&5GHz | AIR-ANT2524DB-R/= | 2.4 GHz 2 dBi/5 GHz 4 dBi Dipole Ant., Black, connectors RP-TNC | 2dBi@2.4GHz 4dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2524DG-R/= | 2.4 GHz 2 dBi/5 GHz 4 dBi Dipole Ant., Gray, connectors RP-TNC | 2dBi@2.4GHz 4dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2524DW-R/= | 2.4 GHz 2 dBi/5 GHz 4 dBi Dipole Ant., White, connectors RP-TNC | 2dBi@2.4GHz 4dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2535SDW-R | 2.4 GHz 3dBi/5 GHz 5 dBi Low Profile Antenna, White, connectors RP-TNC | 3dBi@2.4GHz 5dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2566P4W-R= | 2.4 GHz 6 dBi/5 GHz 6 dBi Directionnel Ant., 4-port, connectors RP-TNC | 6dBi@2.4GHz 6dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2524V4C-R= | 2.4GHz 2 dBi/5GHz 4 dBi Ceiling Mount Omni Ant., 4-port, connectors RP-TNC | 2dBi@2.4GHz 4dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2544V4M-R= | 2.4GHz 4 dBi/5GHz 4 dBi Wall Mount Omni Ant., 4-port, connectors RP-TNC | 4dBi@2.4GHz 4dBi@5GHz |
| 2.4GHz&5GHz | AIR-ANT2566D4M-R= | 2.4 GHz 6 dBi/5 GHz 6 dBi 60 Deg. Patch Ant., 4-port, RP-TNC | 6dBi@2.4GHz 6dBi@5GHz |



Section 3: Result Summary

3.1 Results Summary Table

Radiated Emissions (General requirements)

| Basic Standard | Technical Requirements / Details | Result |
|---|---|--------|
| FCC 15.209 FCC 15.205 FCC 15.247 RSS-Gen Sec 8.9 & 8.10 RSS-247 Sec 5.5 LP0002 (2018) Sec 3.10, 2.7 & 2.8 | TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the filed strength limits table in this section. Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) and RSS-Gen 8.10 must also comply with the radiated emission limits specified in FCC 15.209 (a) and RSS-Gen 8.9 | Pass |



Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details

| Sample Number | Equipment Details | Serial Number | CISCO Part Number |
|---------------|-------------------|--------------------|-------------------|
| S01 | C9120AXI-x | FOC24172PXD | 074-124657-01 |
| S02 | AIR-PWRINJ6 V01 | C16036663000000279 | 341-100456-01 |

4.2 System Details

| System # | Description | Samples |
|----------|------------------|----------|
| 1 | UUT + PoE supply | S01 +S02 |

4.3 Mode of Operation Details



| Mode# | Description | Comments |
|-------|---------------------|--|
| 1 | Continuous Transmit | All radios transmitting simultaneously. |
| 2 | Continuous Receive | All radios simultaneously in receive mode. |

4.4 Software Image

| |
|---|
| Cisco AP Software, (ap1g7), [rtp-ads-139:/nobackup/eyankevi/Vanc-E_VE_c172_thr_May09/router] Technical Support: http://www.cisco.com/techsupport Copyright (c) 1986-2020 by Cisco Systems, Inc. Compiled Tue May 19 23:48:59 EDT 2020 |
|---|

Appendix A: Emission Test Results (2.4GHz Wi-Fi & Chillwave)

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

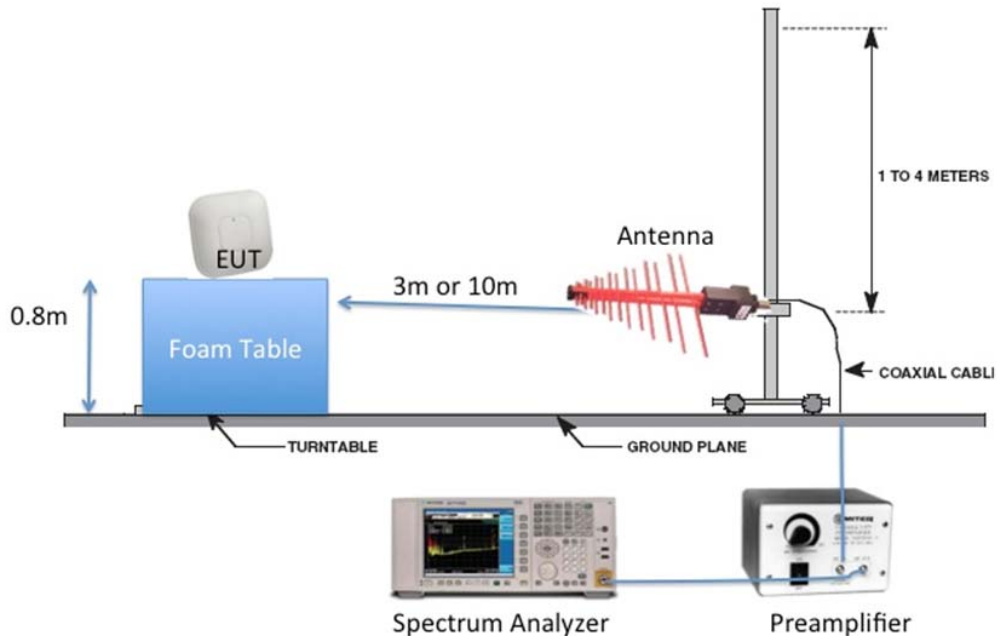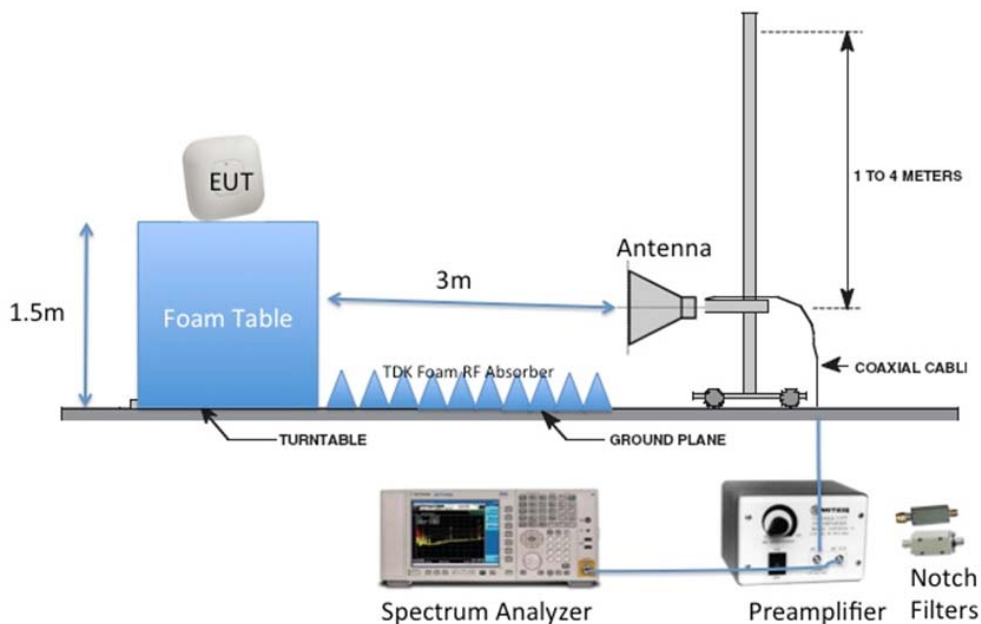Radiated Emission Setup Diagram-Below 1G**Radiated Emission Setup Diagram-Above 1G**



A.1 Radiated Spurious Emissions 1GHz – 26.5GHz

15.205 / RSS-Gen: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen 8.9.

Ref. ANSI C63.10: 2013 section 4.1.4.2.2, 4.1.4.2.3, 6.6.4 & 11.12.2

| Radiated Spurious Emissions | |
|--|---|
| Test parameters | |
| Peak Span = 1-18GHz /18GHz-26.5GHz RBW = 1 MHz VBW \geq 3 MHz Sweep = Auto couple Detector = Peak Trace = Max Hold. | Average Span = 1-18GHz /18GHz-26.5GHz RBW = 1 MHz VBW \geq 3 MHz Sweep = Auto couple Detector = Average |

Using Vasona, configure the spectrum analyzer as shown above (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode. Terminate the access Point RF ports with 50 ohm loads.

Define worst case orientation x, y, z
 Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents data for all supported operating modes and antennas.

| System Number | Description | Samples | System under test | Support equipment |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1 | EUT | S01 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | Support | S02 | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

| | |
|-----------------------------------|--|
| Tested By : Allan Beecroft | Date of testing: 02-JUL-2020 to 09-JUL-2020 |
| Test Result : PASS | |

See Appendix C for list of test equipment



A.1.A Transmitter Radiated Spurious Emissions-Average

Tx Spurious Emissions 1GHz-10GHz. 2412MHz average (horizontal polarity)



Tx Spurious Emissions 1GHz-10GHz. 2412MHz average (vertical polarity)





Tx Spurious Emissions 1GHz-10GHz. 2442MHz average (horizontal polarity)



Tx Spurious Emissions 1GHz-10GHz. 2442MHz average (vertical polarity)





Tx Spurious Emissions 1GHz-10GHz. 2462MHz average (horizontal polarity)




Tx Spurious Emissions 1GHz-10GHz. 2462MHz average (vertical polarity)






Tx Spurious Emissions 10GHz-18GHz. 2412MHz average horizontal

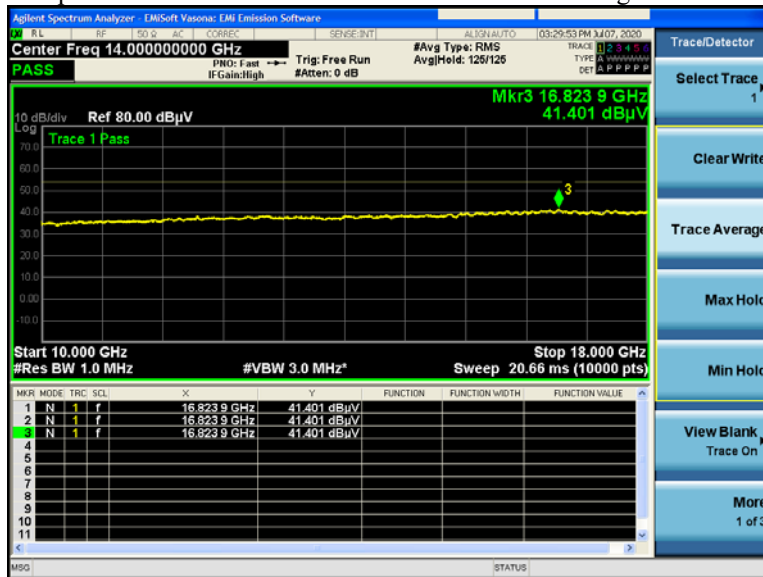


Tx Spurious Emissions 10GHz-18GHz. 2412MHz average vertical

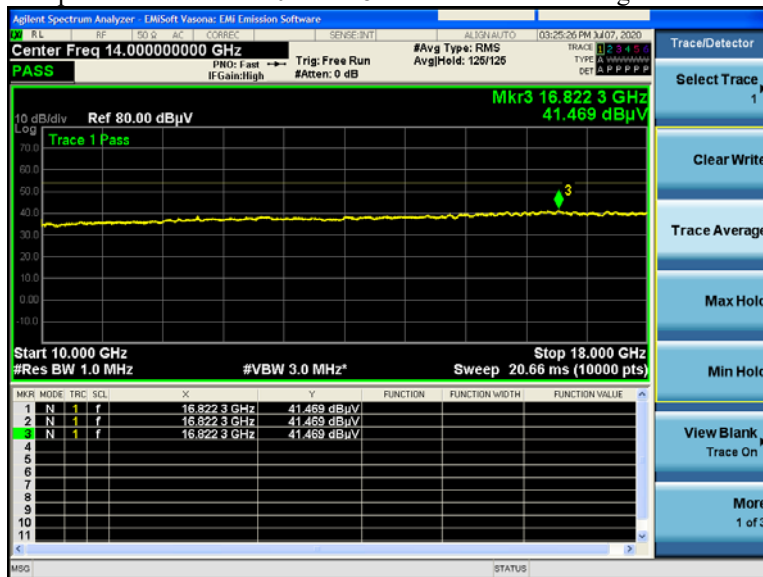




Tx Spurious Emissions 10GHz-18GHz. 2442MHz average horizontal

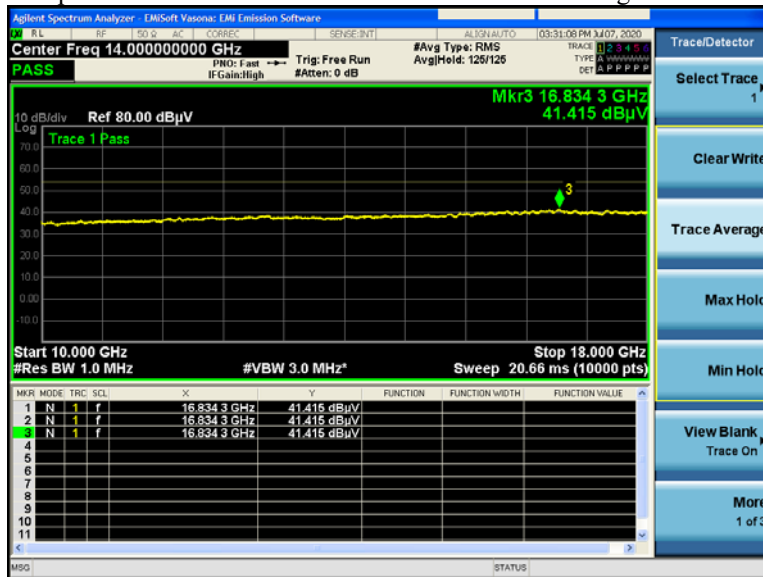


Tx Spurious Emissions 10GHz-18GHz. 2442MHz average vertical

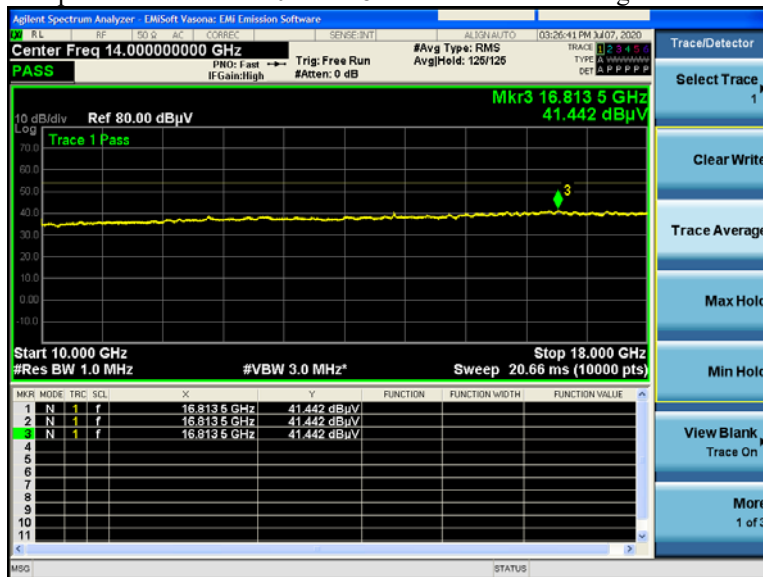




Tx Spurious Emissions 10GHz-18GHz. 2462MHz average horizontal

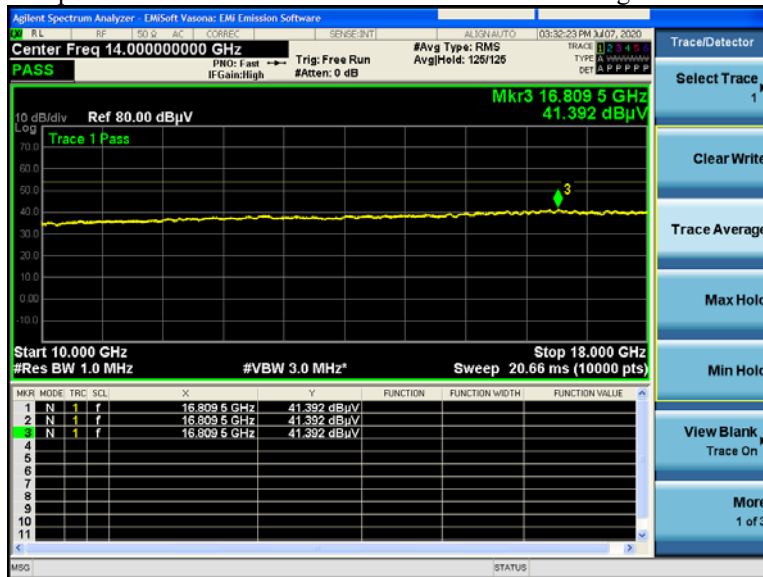


Tx Spurious Emissions 10GHz-18GHz. 2462MHz average vertical

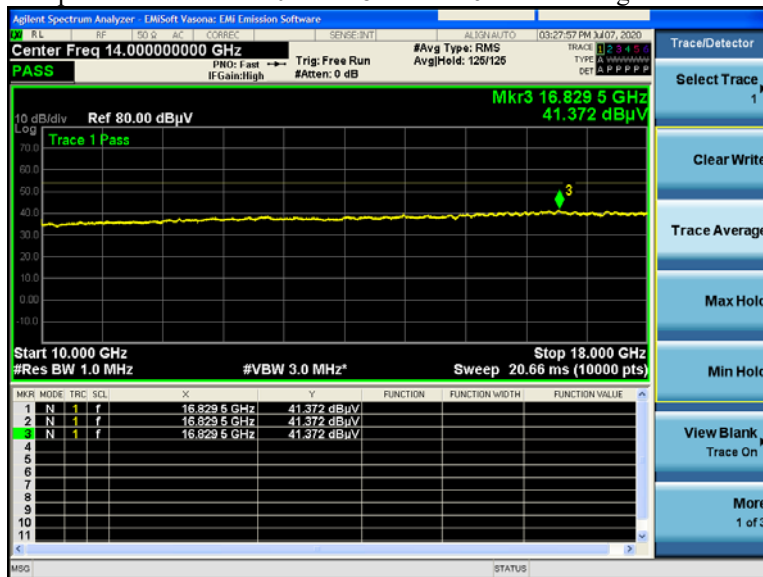



Transmitter Radiated Spurious Emissions peak/average horizontal & vertical 18GHz – 26.5GHz

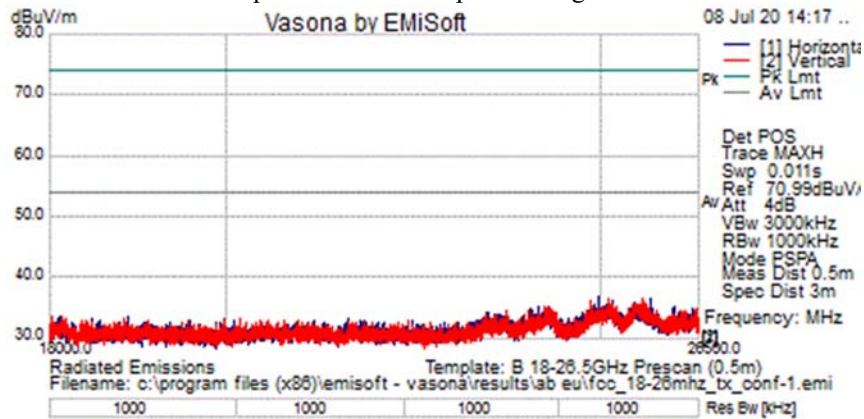



A.1.P Transmitter Radiated Spurious Emissions-Peak

Tx Spurious Emissions 1GHz-10GHz. 2412MHz peak horizontal



Tx Spurious Emissions 1GHz-10GHz. 2412MHz peak vertical



Agilent Spectrum Analyzer - Sweep SA

Marker 2 4.884000000000 GHz

Trig: Free Run #Ave Type: RMS AvgHold: 126/125

PASS PKF: 1 ref IF Gain: low #Atten: 10 dB

10 dB/div Ref 106.99 dBμV

Trace 1 Pass

Mkr3 2.438 9 GHz 73.253 dBμV

Start 1.000 GHz Stop 13.000 GHz

#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 20.66 ms (10000 pts)

| MKR | MODE | TRC | SCN | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |
|-----|------|-----|-----|-------------|-------------|----------|----------------|----------------|
| 1 | N | 1 | f | 2.442 0 GHz | 70.418 dBμV | | | |
| 2 | N | 1 | f | 4.884 0 GHz | 48.855 dBμV | | | |
| 3 | N | 1 | f | 2.438 9 GHz | 73.253 dBμV | | | |

Agilent Spectrum Analyzer - Sweep SA

Marker 2 4.884000000000 GHz

Trace 1 Pass

Mkr3 2.435 3 GHz
76.347 dBμV

Start 1.000 GHz Stop 13.000 GHz
#VBW 3.0 MHz Sweep 20.66 ms (10000 pts)

| Mkr | Mode | Trc | Scn | X | Y | Function | Function Width | Function Value |
|-----|------|-----|-----|-------------|-------------|----------|----------------|----------------|
| 1 | N | 1 | f | 2.442 0 GHz | 65.991 dBμV | | | |
| 2 | N | 1 | f | 4.884 0 GHz | 46.556 dBμV | | | |
| 3 | N | 1 | f | 2.435 3 GHz | 76.347 dBμV | | | |



Tx Spurious Emissions 1GHz-10GHz. 2462MHz peak horizontal




Tx Spurious Emissions 1GHz-10GHz. 2462MHz peak vertical






Tx Spurious Emissions 10GHz-18GHz. 2412MHz peak horizontal

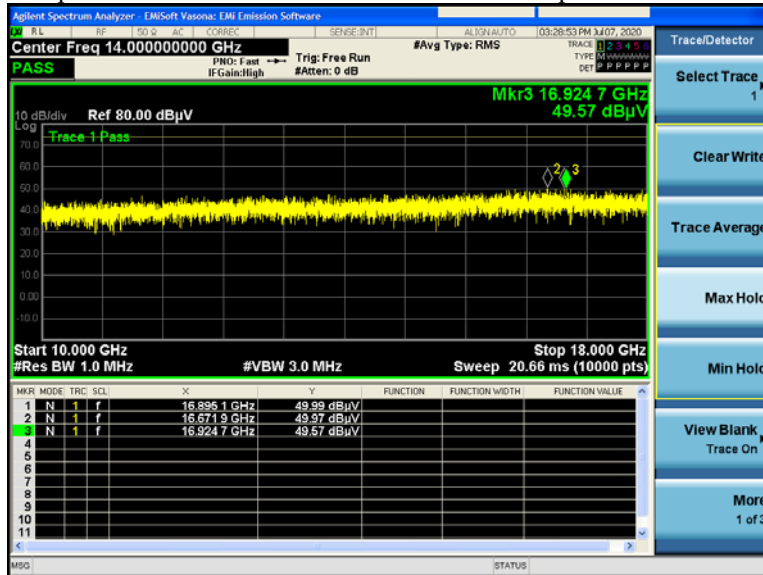


Tx Spurious Emissions 10GHz-18GHz. 2412MHz peak vertical

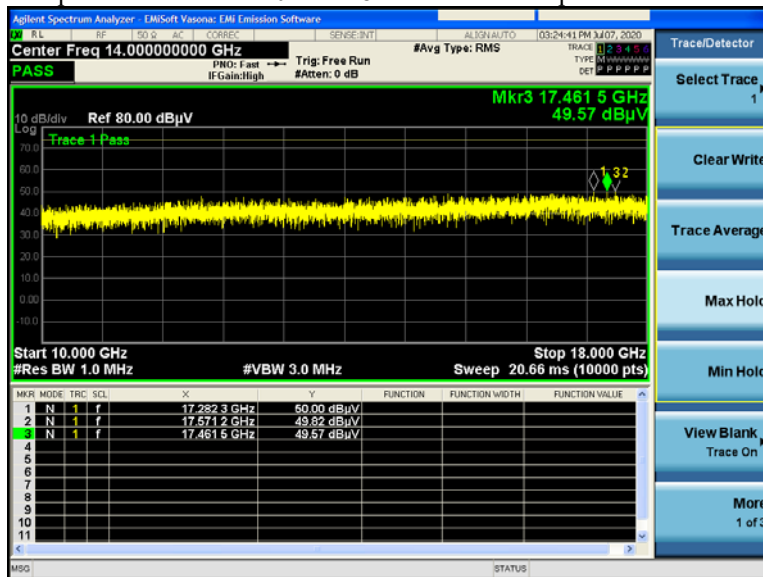




Tx Spurious Emissions 10GHz-18GHz. 2442MHz peak horizontal

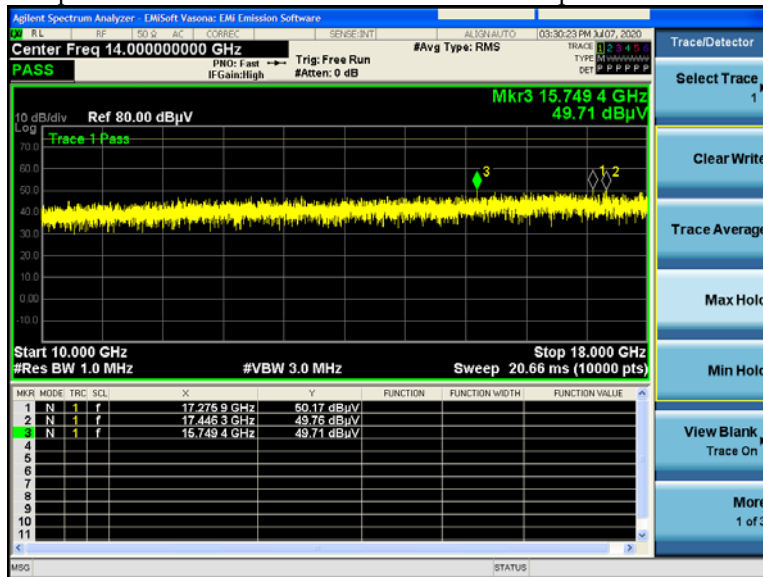


Tx Spurious Emissions 10GHz-18GHz. 2442MHz peak vertical

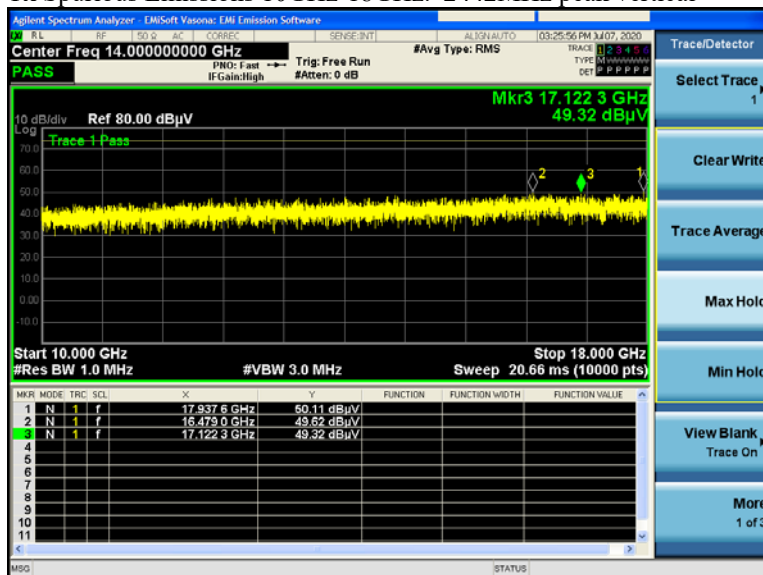




Tx Spurious Emissions 10GHz-18GHz. 2462MHz peak horizontal

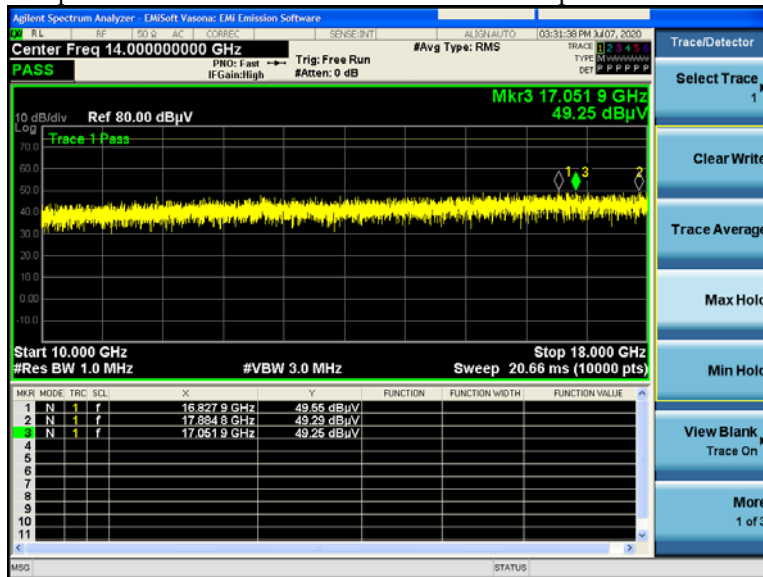


Tx Spurious Emissions 10GHz-18GHz. 2462MHz peak vertical

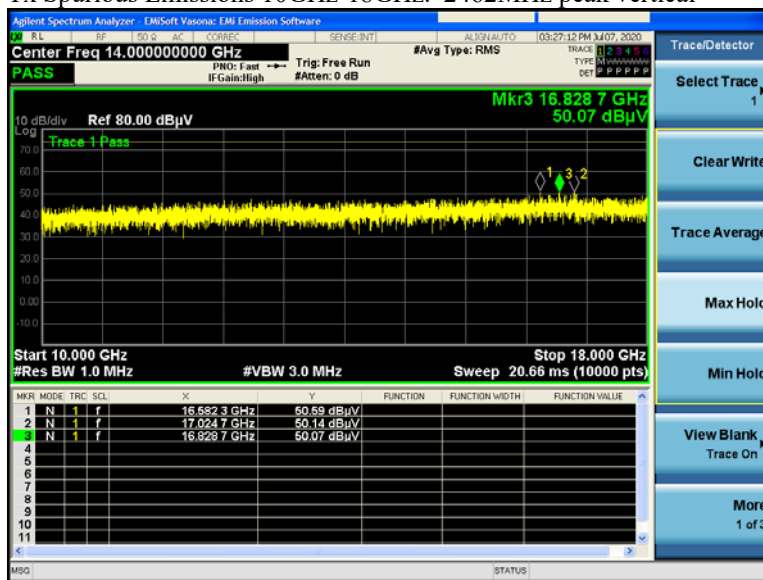



Transmitter Radiated Spurious Emissions peak/average horizontal & vertical 18GHz – 26.5GHz

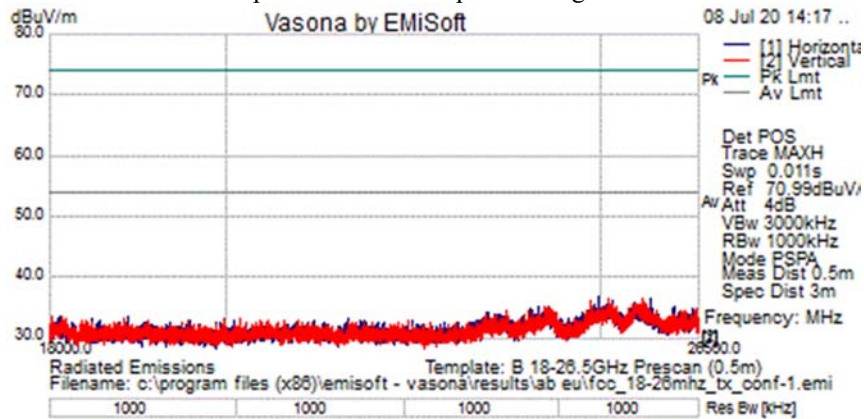

A.2 Radiated Emissions 30MHz to 1GHz

15.205 / 15.209 / RSS-Gen:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-GEN section 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen section 8.9.

Test Procedure

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

| | |
|-----------------------|--|
| Span: | 30MHz – 1GHz |
| Reference Level: | 80 dBuV |
| Attenuation: | 10 dB |
| Sweep Time: | Coupled |
| Resolution Bandwidth: | 100kHz |
| Video Bandwidth: | 300kHz |
| Detector: | Peak for Pre-scan, Quasi-Peak |
| | Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection. |

Terminate the access Point RF ports with 50 ohm loads.

Define worst case orientation x, y, z.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.


| System Number | Description | Samples | System under test | Support equipment |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1 | EUT | S01 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | Support | S02 | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

| | |
|-----------------------------------|-------------------------------------|
| Tested By : Allan Beecroft | Date of testing: 09-JUL-2020 |
| Test Result : PASS | |

See Appendix C for list of test equipment




Transmitter Radiated Emissions

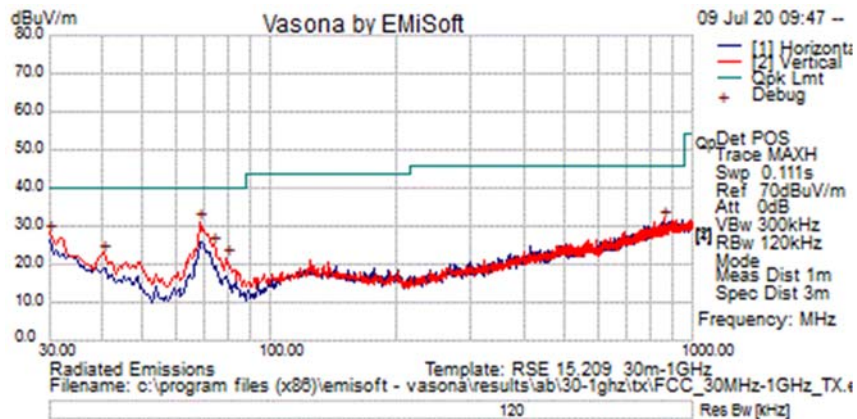


Appendix B: Emission Test Results (BLE)

Testing Laboratory: Cisco Systems, Inc., 125 West Tasman Drive, San Jose, CA 95134, USA

Radiated Emission Setup Diagram-Below 1G

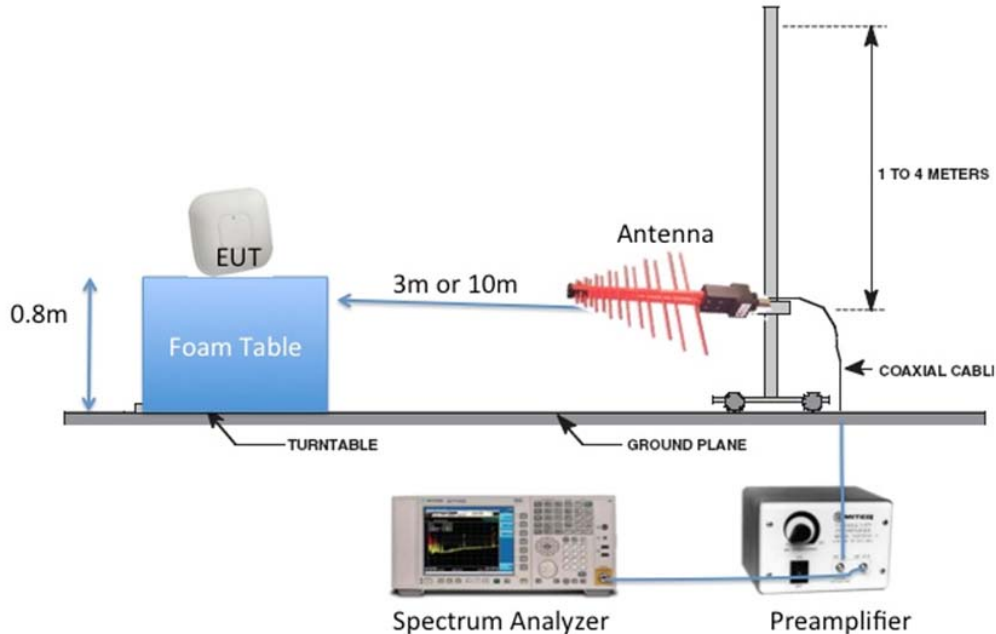

Radiated Emission Setup Diagram-Above 1G

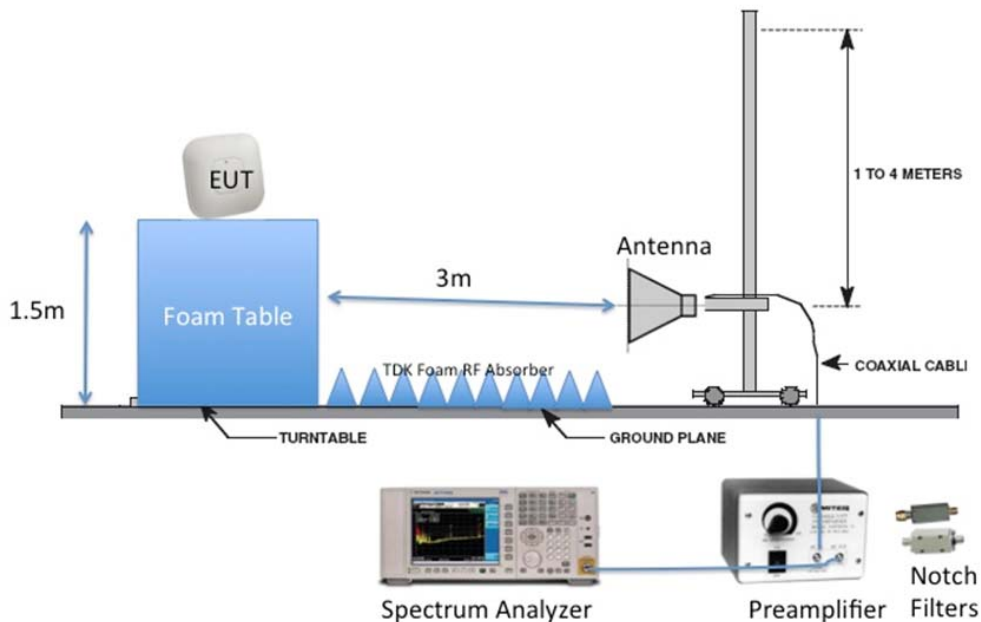



B.1 Radiated Spurious Emissions 1GHz – 26.5GHz

15.205 / RSS-Gen: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-Gen 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen 8.9.

Ref. ANSI C63.10: 2013 section 4.1.4.2.2, 4.1.4.2.3, 6.6.4 & 11.12.2

| Radiated Spurious Emissions | |
|--|---|
| Test parameters | |
| Peak Span = 1-18GHz /18GHz-26.5GHz RBW = 1 MHz VBW \geq 3 MHz Sweep = Auto couple Detector = Peak Trace = Max Hold. | Average Span = 1-18GHz /18GHz-26.5GHz RBW = 1 MHz VBW \geq 3 MHz Sweep = Auto couple Detector = Average |

Using Vasona, configure the spectrum analyzer as shown above (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode. Terminate the access Point RF ports with 50 ohm loads.

Define worst case orientation x, y, z
 Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents data for all supported operating modes and antennas.

| System Number | Description | Samples | System under test | Support equipment |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1 | EUT | S01 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | Support | S02 | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

| | |
|-----------------------------------|--|
| Tested By : Allan Beecroft | Date of testing: 02-JUL-2020 to 09-JUL-2020 |
| Test Result : PASS | |

See Appendix B for list of test equipment

B.1.A Transmitter Radiated Spurious Emissions-Average

Tx Spurious Emissions 1GHz-10GHz. BLE 2402MHz average horizontal



Tx Spurious Emissions 1GHz-10GHz. BLE 2402MHz average vertical





Tx Spurious Emissions 1GHz-10GHz. BLE 2442MHz average horizontal



Tx Spurious Emissions 1GHz-10GHz. BLE 2442MHz average vertical





Tx Spurious Emissions 1GHz-10GHz. BLE 2480MHz average horizontal



Tx Spurious Emissions 1GHz-10GHz. BLE 2480MHz average vertical





Transmitter Radiated Spurious Emissions average horizontal 10GHz – 18GHz (BLE 2402MHz)



Transmitter Radiated Spurious Emissions average vertical 10GHz – 18GHz (BLE 2402MHz)





Transmitter Radiated Spurious Emissions average horizontal 10GHz – 18GHz (BLE 2442MHz)




Transmitter Radiated Spurious Emissions average vertical 10GHz – 18GHz (BLE 2442MHz)






Transmitter Radiated Spurious Emissions average horizontal 10GHz – 18GHz (BLE 2480MHz)

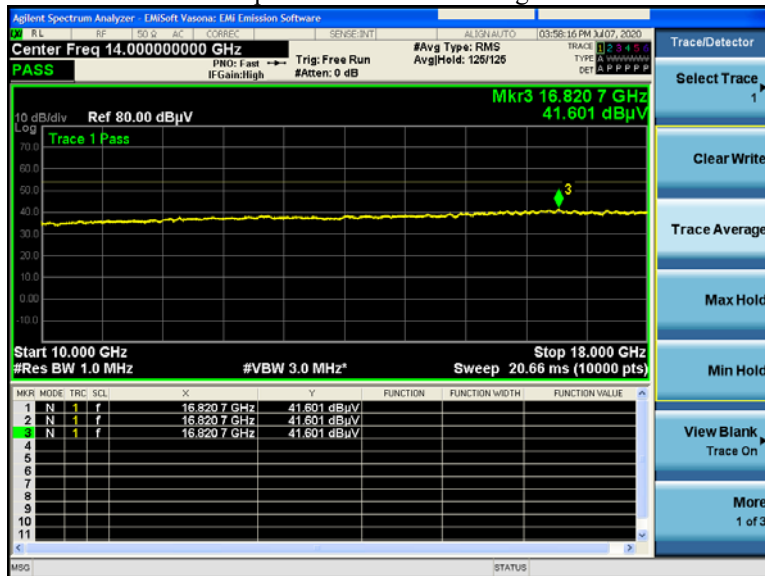


Transmitter Radiated Spurious Emissions average vertical 10GHz – 18GHz (BLE 2480MHz)

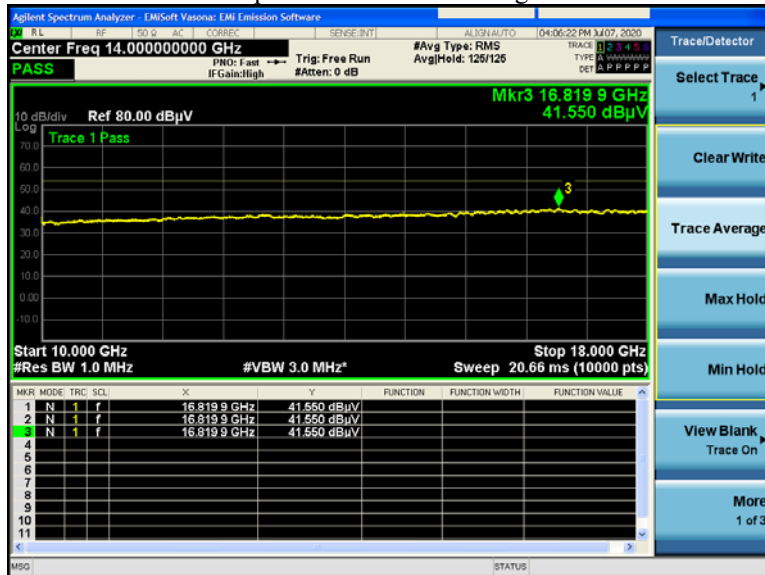



Transmitter Radiated Spurious Emissions peak/average horizontal & vertical 18GHz – 26.5GHz BLE

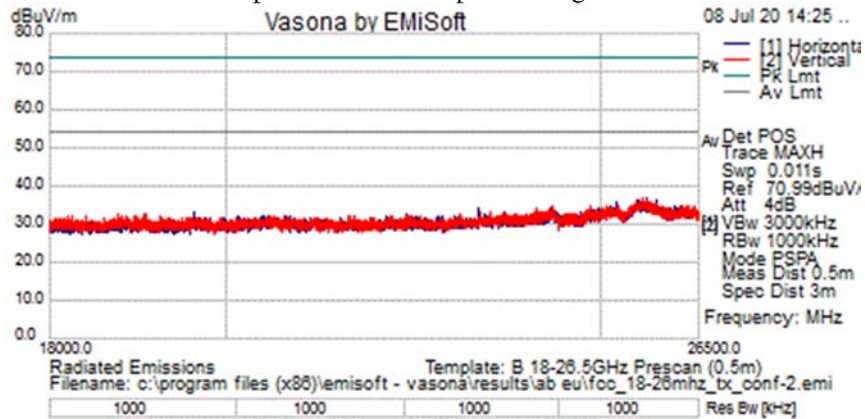



B.1.P Transmitter Radiated Spurious Emissions-Peak

Tx Spurious Emissions 1GHz-10GHz. BLE 2402MHz peak horizontal



Tx Spurious Emissions 1GHz-10GHz. BLE 2402MHz peak vertical






Tx Spurious Emissions 1GHz-10GHz. BLE 2442MHz peak horizontal



Tx Spurious Emissions 1GHz-10GHz. BLE 2442MHz peak vertical

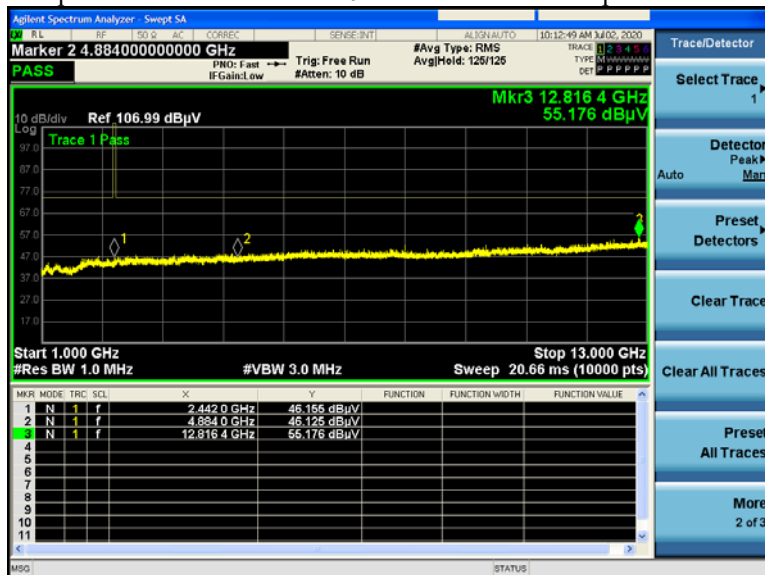



Tx Spurious Emissions 1GHz-10GHz. BLE 2480MHz peak horizontal




Tx Spurious Emissions 1GHz-10GHz. BLE 2480MHz peak vertical






Transmitter Radiated Spurious Emissions peak horizontal 10GHz – 18GHz (BLE 2402MHz)

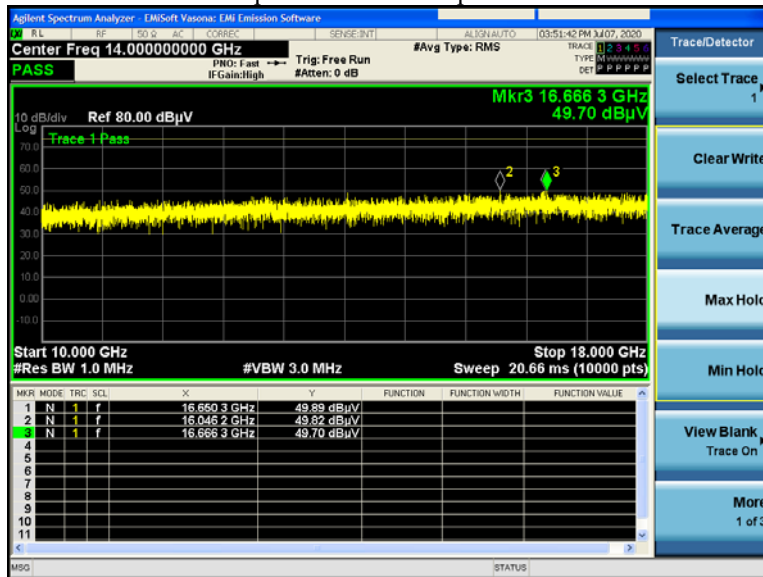


Transmitter Radiated Spurious Emissions peak vertical 10GHz – 18GHz (BLE 2402MHz)

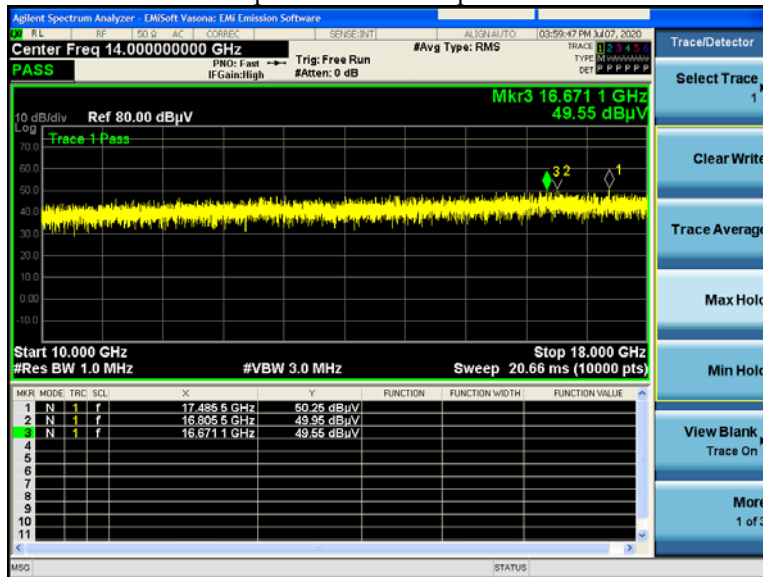




Transmitter Radiated Spurious Emissions peak horizontal 10GHz – 18GHz (BLE 2442MHz)

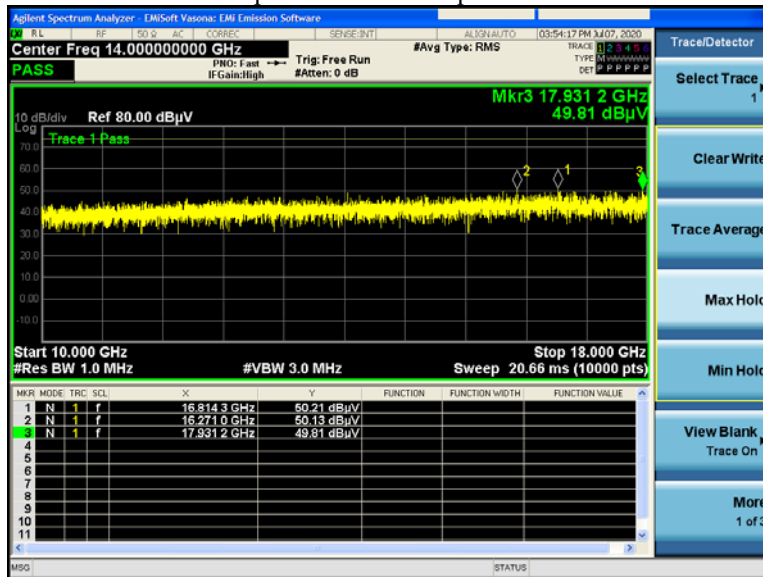


Transmitter Radiated Spurious Emissions peak vertical 10GHz – 18GHz (BLE 2442MHz)

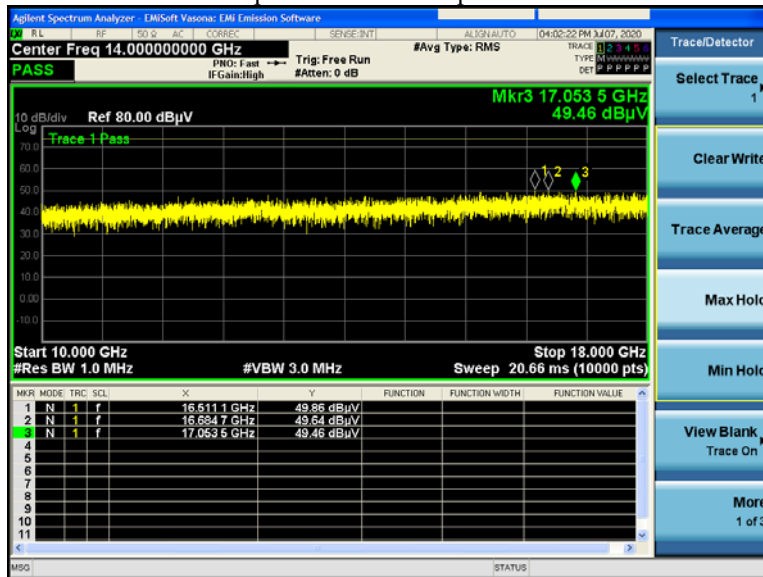




Transmitter Radiated Spurious Emissions peak horizontal 10GHz – 18GHz (BLE 2480MHz)

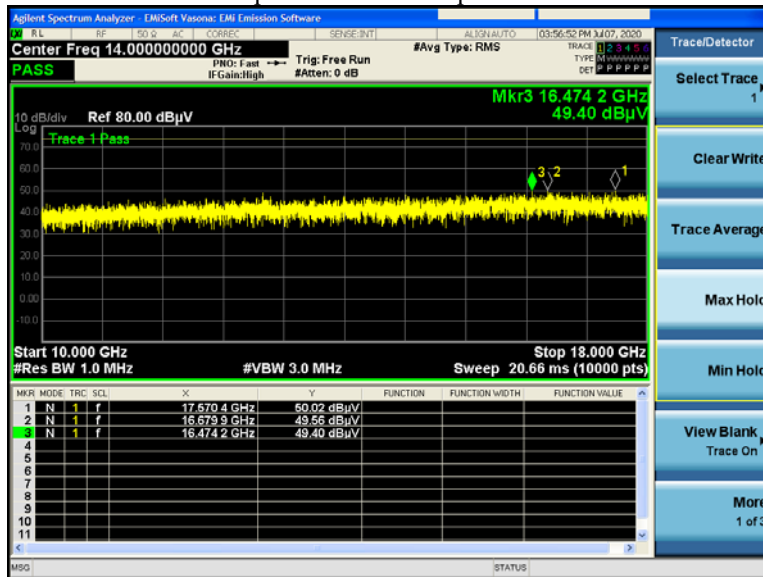


Transmitter Radiated Spurious Emissions peak vertical 10GHz – 18GHz (BLE 2480MHz)

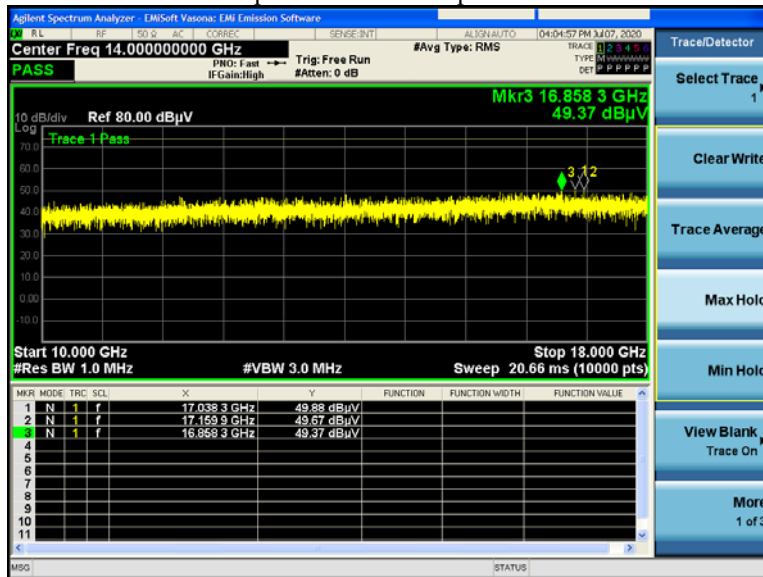



Transmitter Radiated Spurious Emissions peak/average horizontal & vertical 18GHz – 26.5GHz BLE

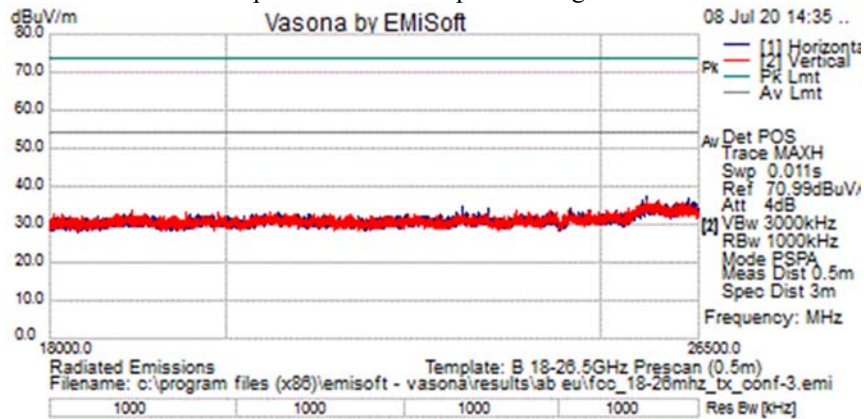



B.2 Radiated Emissions 30MHz to 1GHz

15.205 / 15.209 / RSS-Gen:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) and RSS-GEN section 8.10, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)) and RSS-Gen section 8.9.

Test Procedure

Ref. ANSI C63.10: 2013 section 6.5

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

| | |
|-----------------------|-------------------------------|
| Span: | 30MHz – 1GHz |
| Reference Level: | 80 dBuV |
| Attenuation: | 10 dB |
| Sweep Time: | Coupled |
| Resolution Bandwidth: | 100kHz |
| Video Bandwidth: | 300kHz |
| Detector: | Peak for Pre-scan, Quasi-Peak |

Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

This report represents the worst case data for all supported operating modes and antennas.


| System Number | Description | Samples | System under test | Support equipment |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1 | EUT | S01 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| | Support | S02 | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

| | |
|----------------------------|------------------------------|
| Tested By : Allan Beecroft | Date of testing: 09-JUL-2020 |
| Test Result : PASS | |

See Appendix C for list of test equipment



Transmitter Radiated Emission BLE

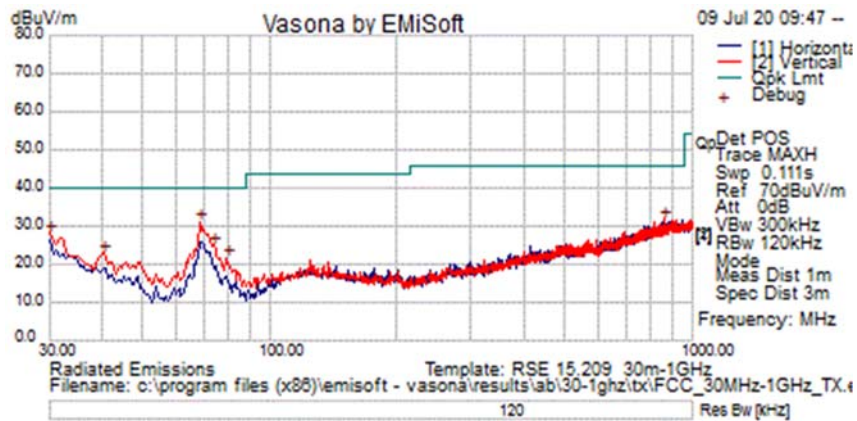



Appendix C: List of Test Equipment Used to perform the test

| 30MHz to 1GHz | | | | | |
|---------------|---|--|------------------|---------------------|-----------|
| Equip# | Manufacturer/ Model | Description | Last Cal | Next Due | Test Item |
| CIS38404 | SUNOL SCIENCES / JB1 | Combination Antenna, 30MHz-2GHz | 27-FEB-2020 | 27-FEB-2021 | A2 & B2 |
| CIS18313uc | Keysight (Agilent/HP) / 8447D | AMPLIFIER | 30-APR-2019 | 30-OCT-2020 | A2 & B2 |
| CIS8342 | TIMES MICROWAVE SYSTEMS / RG-214 | RG-214 Cable | 30-APR-2020 | 30-OCT-2020 | A2 & B2 |
| CIS21117 | MICRO-COAX / UFB311A-0-2484-5 20520 | Coaxial Cable-18Ghz | 12 Aug 2019 | 12 Aug 2020 | A2 & B2 |
| CIS49563 | HUBER + SUHNER / Sucoflex 106A | N-type cable 18GHz | 12-AUG-2019 | 12-AUG-2020 | A2 & B2 |
| CIS56155 | HUBER + SUHNER / Sucoflex 104PA | RF N-Type Cable 2meter 18GHz | 13-JAN-2020 | 13-JAN-2021 | A2 & B2 |
| CIS47410 | Agilent / N9038A | / MXE EMI Receiver 20Hz to 26.5GHz | 06-MAR-2020 | 06-MAR-2021 | A2 & B2 |
| CIS8448 | CISCO / NSA CAL | NSA Chamber | 26 Sep 2019 | 26 Sep 2020 | A2 & B2 |
| CIS45166 | STANLEY / 33-428 | 26' TAPE MEASURE | Cal not required | Cal not required | A2 & B2 |
| CIS27233 | York CNE V | Comparison Noise Emitter | Cal Not Required | Cal Not Required | A2 & B2 |
| CIS58225 | COMET / T7611-4 | Temperature Probe & Monitoring Unit | 20-AUG-2019 | 20-AUG-2020 | A2 & B2 |



| 1GHz to 18GHz | | | | | |
|-----------------------|------------------------------------|---|------------------|------------------|------------------|
| Equip# | Manufacturer/ Model | Description | Last Cal | Next Due | Test Item |
| CIS040597 | CISCO Above 1GHz Site Cal | 1GHz Cspr Site Verification | 27 Sep 2019 | 27 Sep 2020 | A1 & B1 |
| CIS47410 | Agilent / N9038A | / MXE EMI Receiver 20Hz to 26.5GHz | 06-MAR-2020 | 06-MAR-2021 | A1 & B1 |
| CIS41201 | ETS Lindgren 3117 | Double Ridged Horn Antenna | 27-AUG- 2019 | 27 -AUG-2020 | A1 & B1 |
| CIS45096 | CISCO TH0118 | Mast Mount Preamplifier Array, 1-18GHz | 29-OCT-2019 | 29-OCT-2020 | A1 & B1 |
| CIS49563 | HUBER + SUHNER / Sucoflex 106A | N-type cable 18GHz | 12-AUG-2019 | 12-AUG-2020 | A1 & B1 |
| CIS56060 | Miteq | SMA Preamplifier 18GHz | 08-APR-2020 | 08-OCT-2020 | A1 & B1 |
| CIS34740 | ETS Lindgren 3117 | Double Ridged Horn Antenna | 10-FEB- 2020 | 10-FEB-2021 | A1 & B1 |
| CIS34304 | Micro-Tronics HPM50112-02 | High Pass Filter 6.4GHz – 18GHz | 27 JUN 2019 | 27-DEC-2020 | A1 & B1 |
| CIS21117 | MICRO-COAX / UFB311A-0-2484-520520 | Coaxial Cable-18Ghz | 12 AUG- 2019 | 12 AUG-2020 | A1 & B1 |
| CIS56155 | HUBER + SUHNER / Sucoflex 104PA | RF N-Type Cable 2meter 18GHz | 13-JAN-2020 | 13-JAN-2021 | A1 & B1 |
| CIS45166 | STANLEY 33-428 | 8 meter Tape Measure | Cal Not Required | Cal Not Required | A1 & B1 |
| CIS58225 | COMET / T7611-4 | Temperature Probe & Monitoring Unit | 20-AUG-2019 | 20-AUG-2020 | A1 & B1 |
| CIS54235 | PASTERNAK PE5011-1 | PRESET TORQUE WRENCH, 8 IN/LBS | 02-MAR-2020 | 02-MAR-2021 | A1 & B1 |
| CIS34075 | SCHAFFNER RSG 2000 | Reference Spectrum Generator, 1-18GHz | Cal Not Required | Cal Not Required | A1 & B1 |
| CIS35040 | Micro-Tronics HPM50112-02 | High Pass Filter 6.4GHz – 18GHz | 27 JUN- 2019 | 27-DEC-2020 | A1 & B1 |
| 18GHz to 26GHz | | | | | |
| CIS26860 | Cisco 1840 | 18-40GHz EMI Test Head/Verification Fixture | 12-AUG-2019 | 12-AUG-2020 | A1 & B1 |
| CIS38393 | Agilent / E4446A | PSA Spectrum Analyzer | 08-JAN-2020 | 08-JAN-2021 | A1 & B1 |
| CIS7052 | HP / 83731B | Synthesized Signal Generator | 04-AUG-2019 | 04-AUG-2020 | A1 & B1 |

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

| Abbreviation | Description | Abbreviation | Description |
|--------------|--|--------------|-------------------------------------|
| EMC | Electro Magnetic Compatibility | °F | Degrees Fahrenheit |
| EMI | Electro Magnetic Interference | °C | Degrees Celsius |
| EUT | Equipment Under Test | Temp | Temperature |
| ITE | Information Technology Equipment | S/N | Serial Number |
| TAP | Test Assessment Schedule | Qty | Quantity |
| ESD | Electro Static Discharge | emf | Electromotive force |
| EFT | Electric Fast Transient | RMS | Root mean square |
| EDCS | Engineering Document Control System | Qp | Quasi Peak |
| Config | Configuration | Av | Average |
| CIS# | Cisco Number (unique identification number for Cisco test equipment) | Pk | Peak |
| Cal | Calibration | kHz | Kilohertz (1×10^3) |
| EN | European Norm | MHz | MegaHertz (1×10^6) |
| IEC | International Electro technical Commission | GHz | Gigahertz (1×10^9) |
| CISPR | International Special Committee on Radio Interference | H | Horizontal |
| CDN | Coupling/Decoupling Network | V | Vertical |
| LISN | Line Impedance Stabilization Network | dB | decibel |
| PE | Protective Earth | V | Volt |
| GND | Ground | kV | Kilovolt (1×10^3) |
| L1 | Line 1 | μ V | Microvolt (1×10^{-6}) |
| L2 | Line2 | A | Amp |
| L3 | Line 3 | μ A | Micro Amp (1×10^{-6}) |
| DC | Direct Current | mS | Milli Second (1×10^{-3}) |
| RAW | Uncorrected measurement value, as indicated by the measuring device | μ S | Micro Second (1×10^{-6}) |
| RF | Radio Frequency | μ S | Micro Second (1×10^{-6}) |
| SLCE | Signal Line Conducted Emissions | m | Meter |
| Meas dist | Measurement distance | Spec dist | Specification distance |
| N/A or NA | Not Applicable | SL | Signal Line (or Telecom Line) |
| P | Power Line | L | Live Line |
| N | Neutral Line | R | Return |
| S | Supply | AC | Alternating Current |



Appendix E: Photographs of Test Setups

Please refer to the attachment

Appendix F: Software Used to Perform Testing

EMIsoft Vasona, version 6.047

Appendix G: Test Procedures

Measurements were made in accordance with

- KDB 558074 - D01 DTS Meas Guidance v05
- KDB 662911 - MIMO
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below

| | |
|--------------------------------|----------------|
| FCC 2.4GHz RSE Test Procedures | EDCS # 1480386 |
|--------------------------------|----------------|

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Target Power Tables EDCS# 18087112