




IDT Technology Limited

萬威科技有限公司

3, Random ID Generation

- ID is generated after hardware reset.
- If the random number is generated to be either H'00 or H'FF, software will re-generate until the number is not these two value.

4, 433MHz RF Data Encoding

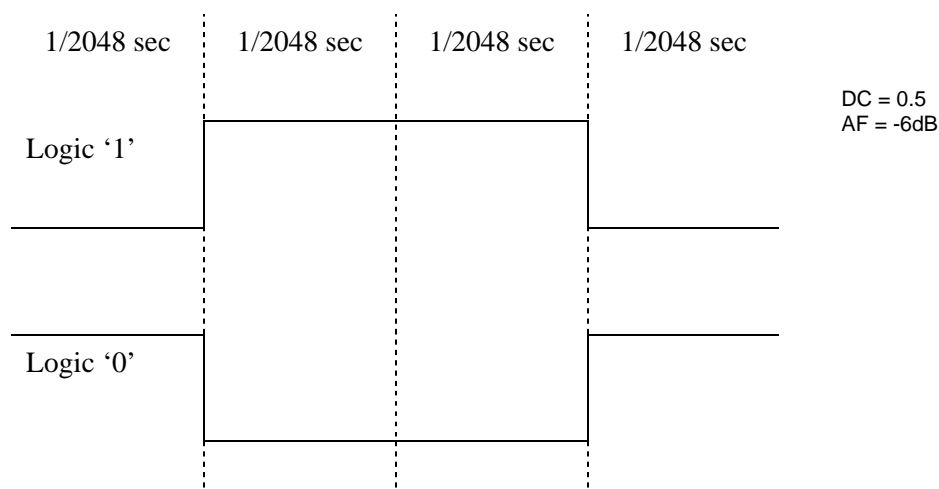

5, Temperature / Humidity Trend

The Temperature / Humidity Trends are updated for every 30 minutes.

The Temperature Trend is rising if the change of temperature is more than 0.5°C. It is falling if the change of temperature is less than -0.5°C. Otherwise, it is steady.

The Humidity Trend is rising if the change of humidity is more than 3%. It is falling if the change of humidity is less than -3%. Otherwise, it is steady.

6, Data Format

Version			
Data		TH	T
Preamble	Bit 0	1	1
	Bit 1	1	1
	Bit 2	1	1
	Bit 3	1	1
	Bit 0	1	1
	Bit 1	1	1
	Bit 2	1	1
	Bit 3	1	1
	Bit 0	1	1
	Bit 1	1	1
	Bit 2	1	1
	Bit 3	1	1
	Bit 0	1	1
	Bit 1	1	1

hp

MKR 375.00 msec

REF -10.0 dBm

AT 10 dB

-.02 dB

PEAK

LOG


10

dB/

VA SB

SC FC

CORR

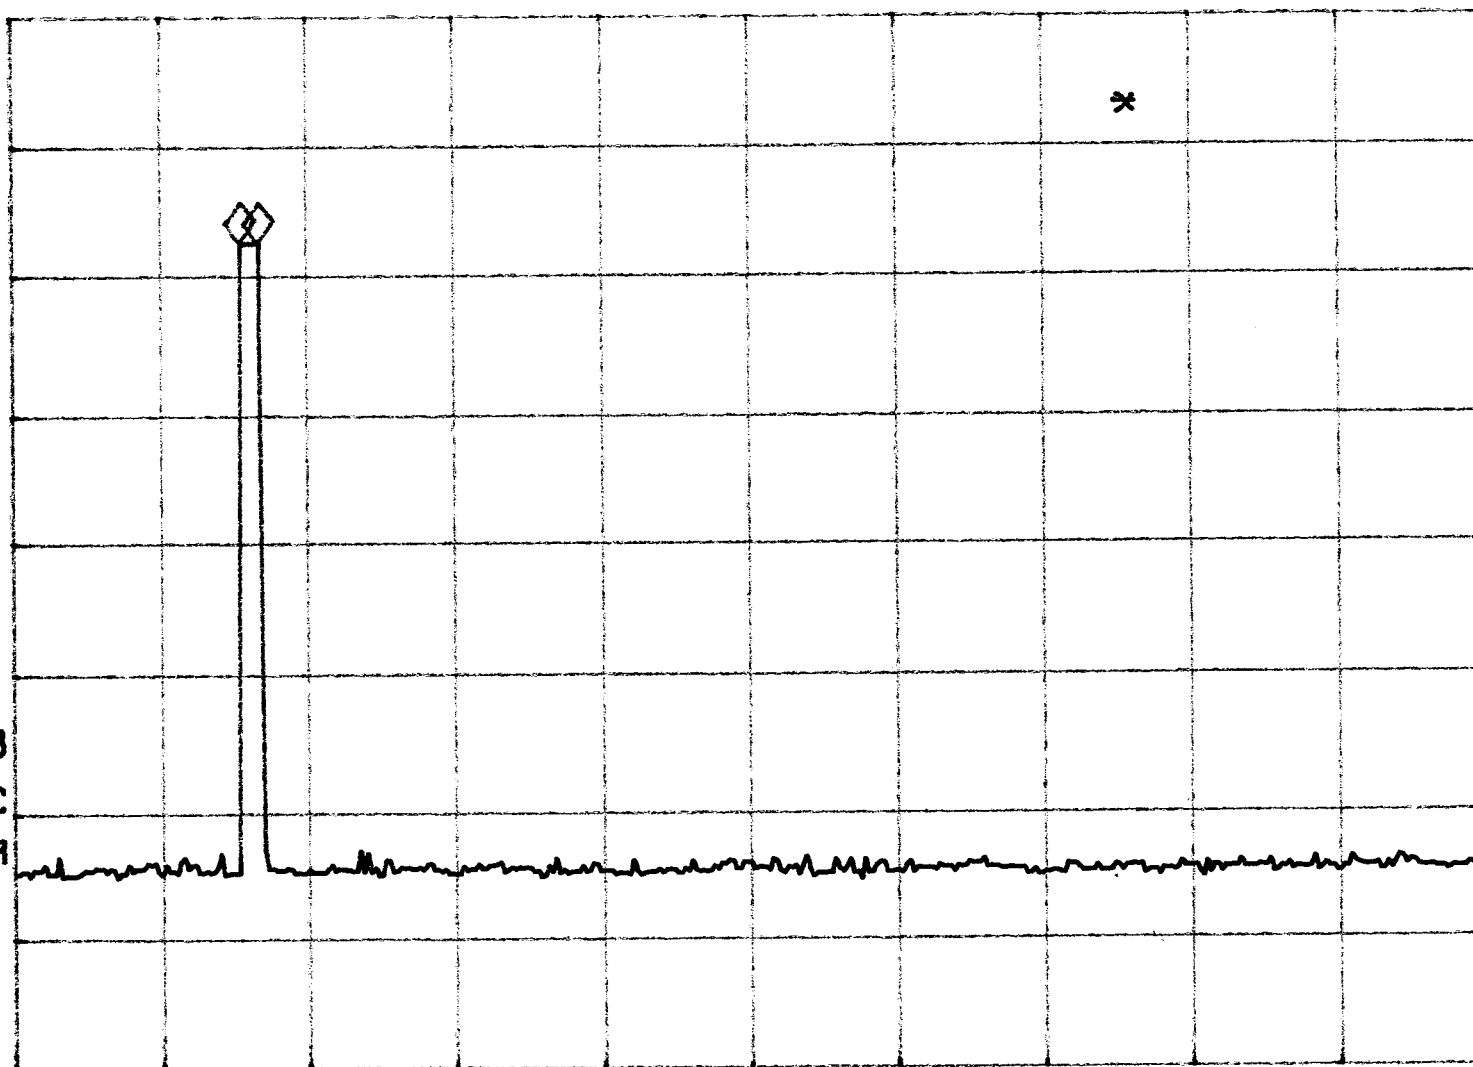

CENTER 433.908 MHz

SPAN 0 Hz

#RES BW 100 kHz


#VBW 3 MHz

#SWP 30.0 sec

hp MKR 38.813 sec
REF -10.0 dBm AT 10 dB -.07 dB

PEAK
LOG
10
dB/

VA SB
SC FC
CORR

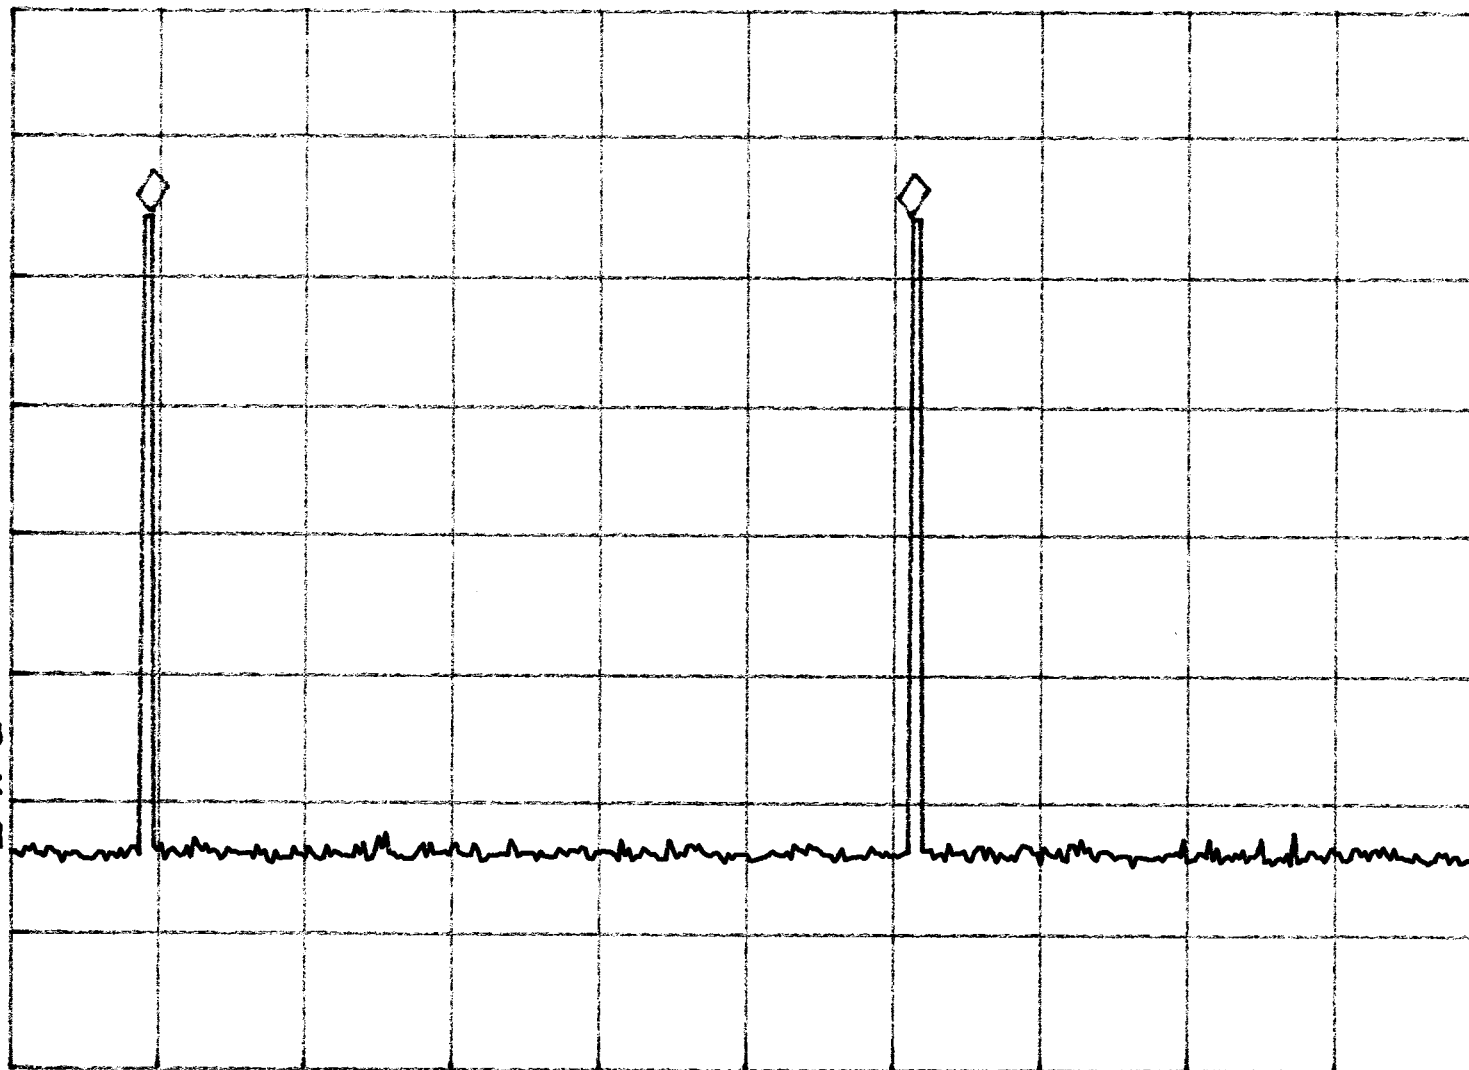

CENTER 433.908 MHz

#RES BW 100 KHz

#VBW 3 MHz

SPAN 0 Hz

#SWP 75.0 sec