

## RF Exposure Report

**Report No.:** SA170807E03

**FCC ID:** TLZ-CU302

**Test Model:** AW-CU302

**Received Date:** Aug. 07, 2017

**Test Date:** Sep. 18, 2017

**Issued Date:** Sep. 27, 2017

**Applicant:** AzureWave Technologies, Inc.

**Address:** 8F., No.94, Baozhong Rd. , Xindian Dist., New Taipei City , Taiwan 231

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

**Test Location :** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1     Certificate of Conformity .....</b>	<b>4</b>
<b>2     RF Exposure .....</b>	<b>5</b>
2.1   Limits for Maximum Permissible Exposure (MPE) .....	5
2.2   MPE Calculation Formula .....	5
2.3   Classification .....	5
2.4   Antenna Gain .....	6
<b>3     Calculation Result of Maximum Conducted Power .....</b>	<b>7</b>

### Release Control Record

Issue No.	Description	Date Issued
SA170807E03	Original release.	Sep. 27, 2017

## 1 Certificate of Conformity

**Product:** IEEE 802.11 b/g/n + Bluetooth 4.2 LE WLAN/BT Microcontroller Module

**Brand:** AzureWave

**Test Model:** AW-CU302

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** AzureWave Technologies, Inc.

**Test Date:** Sep. 18, 2017

**Standards:** FCC Part 2 (Section 2.1091)

KDB 447498 D01 General RF Exposure Guidance v06

IEEE C95.1

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**




**Date:**

Sep. 27, 2017

Claire Kuan / Specialist

**Approved by :**

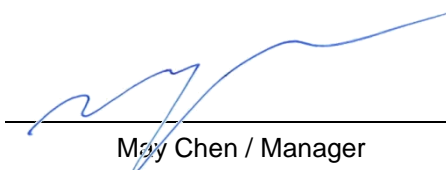

**Date:**

Sep. 27, 2017

May Chen / Manager

## 2 RF Exposure

### 2.1 Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
Limits For General Population / Uncontrolled Exposure				
300-1500	...	...	F/1500	30
1500-100,000	...	...	1.0	30

F = Frequency in MHz

### 2.2 MPE Calculation Formula

$$P_d = (P_{out} * G) / (4 * \pi * r^2)$$

where

$P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

G = gain of antenna in linear scale

$\pi$  = 3.1416

R = distance between observation point and center of the radiator in cm

### 2.3 Classification

The antenna of this product, under normal use condition, is at least 20cm away from the body of the user. So, this device is classified as Mobile Device.

## 2.4 Antenna Gain

Antenna No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length
1(Internal)	AzureWave	AW-CU302 ANT	2.5	2.4~2.4835GHz	Chip	NA	NA
2(External)	TAOGLAS	FXP73.07.0100A	3	2.4~2.4835GHz	Monopole	I-PEX	100mm
3(External)	TAOGLAS	PC11.07.0100A	3	2.4~2.4835GHz	Dipole	I-PEX	100mm
4(External)	TAOGLAS	FXP74.07.0100A	4	2.4~2.4835GHz	PIFA	I-PEX	100mm
5(External)	TAOGLAS	PC17.07.0070A	0.9	2.4~2.4835GHz	PIFA	I-PEX	70mm
6(External)	TAOGLAS	GW.17.07.0250E	2.7	2.4~2.4835GHz	Dipole	I-PEX	250mm
7(External)	TAOGLAS	FXP840.07.0055B	2	2.4~2.4836GHz	PIFA	I-PEX	55mm
8(External)	TAOGLAS	FXP75.07.0045B	2.5	2.4~2.4836GHz	PIFA	I-PEX	45mm
9(External)	LAIRD	NanoBlue-IP4_MAF94045	2	2.4~2.4835GHz	Dipole	I-PEX	100mm
10(External)	LAIRD	EBL2400A1-23UFL	2.45	2.4~2.4835GHz	Dipole	I-PEX	230mm
11(External)	LAIRD	NanoBlade-IP04_CAF94505	2	2.4~2.4835GHz	Dipole	I-PEX	100mm
12(External)	MOLEX	1461530100	3	2.4~2.4835GHz	Dipole	I-PEX	100mm
13(External)	MOLEX	1461530150	2.8	2.4~2.4835GHz	Dipole	I-PEX	150mm
14(External)	MOLEX	1461530200	2.6	2.4~2.4835GHz	Dipole	I-PEX	200mm
15(External)	MOLEX	1461530250	2.4	2.4~2.4835GHz	Dipole	I-PEX	250mm
16(External)	MOLEX	1461530300	2.2	2.4~2.4835GHz	Dipole	I-PEX	300mm
17(External)	MOLEX	2042810050	2.2	2.4~2.4835GHz	Dipole	I-PEX	50mm
18(External)	MOLEX	2042810100	2	2.4~2.4835GHz	Dipole	I-PEX	100mm
19(External)	MOLEX	2042810150	1.8	2.4~2.4835GHz	Dipole	I-PEX	150mm
20(External)	MOLEX	2042810200	1.6	2.4~2.4835GHz	Dipole	I-PEX	200mm
21(External)	MOLEX	2042810250	1.4	2.4~2.4835GHz	Dipole	I-PEX	250mm
22(External)	MOLEX	2042810300	1.2	2.4~2.4835GHz	Dipole	I-PEX	300mm
23(External)	YAGEO	ANTX100F113B24003	2.9	2.4~2.4835GHz	PIFA	I-PEX	100mm
24(External)	YAGEO	ANTX100P113B24003	2.8	2.4~2.4835GHz	PIFA	I-PEX	100mm
25(External)	LYNWAVE	ALA110-052020	2	2.4~2.4835GHz	Dipole	I-PEX	50mm
26(External)	LYNWAVE	ALA120-052024	2	2.4~2.4835GHz	Dipole	I-PEX	160mm
27(External)	LYNWAVE	ALA150-052020	2	2.4~2.4835GHz	Dipole	I-PEX	85mm
28(External)	LYNWAVE	ALA140-05102J	2	2.4~2.4835GHz	Dipole	I-PEX	40mm
29(External)	LYNWAVE	ALA120-051020	2	2.4~2.4835GHz	Dipole	I-PEX	50mm
30(External)	LYNWAVE	ALA120-051022	2	2.4~2.4835GHz	Dipole	I-PEX	30mm
31(External)	LYNWAVE	ALA140-051020	1.88	2.4~2.4835GHz	Dipole	I-PEX	70mm
32(External)	LYNWAVE	ALA150-05102B	2	2.4~2.4835GHz	Dipole	I-PEX	10mm
33(External)	LYNWAVE	ALA150-05102C	2	2.4~2.4835GHz	Dipole	I-PEX	75mm
34(External)	LYNWAVE	ALA150-05102F	2	2.4~2.4835GHz	Dipole	I-PEX	140mm
35(External)	LYNWAVE	ALA150-05102J	2	2.4~2.4835GHz	Dipole	I-PEX	100mm
36(External)	LYNWAVE	ALA140-05102D	2	2.4~2.4835GHz	Dipole	I-PEX	95mm
37(External)	LYNWAVE	ALA150-051026	2	2.4~2.4835GHz	Dipole	I-PEX	150mm

From the above antennas, antenna 1, 2, 3, 4 were selected for the test and its data was recorded in this report.

### 3 Calculation Result of Maximum Conducted Power

#### WLAN

Frequency Band (MHz)	Max Power (mW)	Antenna Gain (dBi)	Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
2412-2462	290.402	4.00	20	0.14512	1

#### BT-LE

Frequency Band (MHz)	Max Power (mW)	Antenna Gain (dBi)	Distance (cm)	Power Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
2402-2480	0.9183	4.00	20	0.00046	1

#### Conclusion:

The formula of calculated the MPE is:

$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$

CPD = Calculation power density

LPD = Limit of power density

WLAN + Bluetooth =  $0.14512 / 1 + 0.00046 / 1 = 0.14558$

Therefore the maximum calculations of above situations are less than the "1" limit.

---END---